



(11) **EP 1 561 794 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
30.06.2010 Bulletin 2010/26

(51) Int Cl.:
C09K 11/06 ^(2006.01) **H05B 33/14** ^(2006.01)
H05B 33/22 ^(2006.01)

(21) Application number: **03754188.5**

(86) International application number:
PCT/JP2003/013366

(22) Date of filing: **20.10.2003**

(87) International publication number:
WO 2004/044088 (27.05.2004 Gazette 2004/22)

(54) **MATERIAL FOR ORGANIC ELECTROLUMINESCENT DEVICE AND ORGANIC ELECTROLUMINESCENT DEVICE USING SAME**

STOFF FÜR ORGANISCHE ELEKTROLUMINESZENZVORRICHTUNG UND DARAUF
BASIERENDE ORGANISCHE ELEKTROLUMINESZENZVORRICHTUNG

MATERIAU POUR DISPOSITIF ELECTROLUMINESCENT ORGANIQUE, ET DISPOSITIF
ELECTROLUMINESCENT ORGANIQUE UTILISANT LEDIT MATERIAU

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **12.11.2002 JP 2002327956**

(43) Date of publication of application:
10.08.2005 Bulletin 2005/32

(73) Proprietor: **IDEMITSU KOSAN CO., LTD.
Tokyo 100-8321 (JP)**

(72) Inventor: **FUNAHASHI, Masakazu
Sodegaura-shi, Chiba 299-0205 (JP)**

(74) Representative: **Gille Hrabal Struck Neidlein Prop
Roos
Patentanwälte
Brucknerstrasse 20
40593 Düsseldorf (DE)**

(56) References cited:
**EP-A- 1 061 112 EP-A1- 0 468 528
EP-A1- 1 061 112 WO-A-2004/018588
JP-A- 6 240 245 JP-A- 2003 142 269
US-A- 5 153 073 US-A- 5 219 692
US-A- 5 219 692**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 561 794 B1

Description

Technical Field

[0001] The present invention relates to a material for use in an organic electroluminescent device (hereinafter may be referred to as "organic electroluminescent device material") which is employed as a flat light-emitting device for use in a wall-mounted, flat-panel television set or as a light source such as a backside light of a display device; which has a long service life; and which can emit blue light of high color purity at high emission efficiency. The invention also relates to an organic electroluminescent device including the material.

Background Art

[0002] Electroluminescent (EL) devices including an organic substance have been promising candidates for wide-area, full-color, and inexpensive display devices based on solid-state emission, and development of a variety of such devices is under way. Generally, an EL device is composed of a pair of electrodes, and a light-emitting layer interposed between the electrodes. Light emission is a phenomenon occurring through the following mechanism. When an electric field is applied between electrodes, electrons are injected from the cathode and holes are injected from the anode, both to the light-emitting layer. In the light-emitting layer, the injected electrons are recombined with holes, thereby creating an excited state. During transition from the excited state to the ground state, energy is released as light.

[0003] As compared with inorganic light-emitting diodes, conventional organic EL devices are operated at higher operation voltage and exhibit lower emission luminance and emission efficiency. In addition, organic EL devices are not actually used in practice, because of considerable impairment in characteristics. Recently, organic EL devices have been improved step by step. However, further improvement in emission efficiency and service life is demanded.

[0004] One disclosed technique is based on employment of a single monoanthracene compound serving as an organic light-emitting material (Japanese Patent Application Laid-Open (*kokai*) No. 11-3782). However, this technique is not practically employed, since luminance at a current density of 165 mA/cm² is as low as 1,650 cd/m², and emission efficiency is as considerably low as 1 cd/A. Another disclosed technique is based on employment of a single bisanthracene compound serving as an organic light-emitting material (Japanese Patent Application Laid-Open (*kokai*) No. 8-12600). However, emission efficiency attained by the technique is as low as about 1 to 3 cd/A, which remains to be improved before the technique is put into practice. Meanwhile, a long-life organic EL device has been proposed (WO 94/06157). The EL device includes a distyryl compound serving as an organic light-emitting material in combination with an additive such as styrylamine. However, the proposed EL device has an insufficient half-life, which is to be further improved.

[0005] Still another disclosed technique is based on employment of an organic light-emitting medium layer containing a mono- or a bis-anthracene compound and a distyryl compound (Japanese Patent Application Laid-Open (*kokai*) No. 2001-284050). According to the technique, a peak in an emission spectrum is red-shifted because of a conjugation structure of the styryl compound, thereby impairing color purity.

[0006] WO 2004/018588 A1 an intermediate document of the same Applicant, disclosing organic electroluminescent devices comprising, *inter alia* chrysene derivatives falling in the scope of formulae (I) and (II) of claim 1, whose disclosure is disclaimed therein.

[0007] EP-A-1061112 A1 discloses organic electroluminescence devices and materials therefor, comprising, *inter alia*, bis-(arylamine)chrysene derivatives with alkenyl substituents at the aryl groups.

Disclosure of the Invention

[0008] The present invention has been conceived in order to solve the aforementioned problems. Thus, an object of the present invention is to provide a material for use in an organic EL device material which has a long service life and which can emit blue light of high color purity at high emission efficiency. Another object of the invention is to provide an organic EL device including the material.

[0009] The present inventors have carried out extensive studies with an aim toward developing a material for use in an organic EL device exhibiting the aforementioned desirable properties and an organic EL device including the material, and have found that the aforementioned objects can be attained through employment of an aromatic amine derivative in which amine moieties are linked to a chrysene moiety and which is represented by any of the following formulas (I) to (IV). The present invention has been accomplished on the basis of this finding.

[0010] Accordingly, the present invention provides an organic EL device material comprising an aromatic amine derivative as described in claim 1.

[0011] The present invention also provides an organic EL device comprising a cathode, an anode, and one or more organic thin-film layers interposed between the cathode and the anode, the organic thin-layers including at least a light-emitting layer, wherein at least one of the organic thin-film layers contains the organic EL device material in the form of

single component material or a mixture of a plurality of components. The present invention also provides such an organic EL device, wherein the light-emitting layer contains the organic EL device material in an amount of 0.1 to 20 wt. %.

Brief Description of the Drawings

[0012]

Fig. 1 is an NMR spectrum of compound (1) synthesized in Synthesis Example 1 and serving an organic EL device material according to the present invention.

Fig. 2 is an NMR spectrum of compound (2) synthesized in Synthesis Example 2 and serving an organic EL device material according to the present invention.

Fig. 3 is an NMR spectrum of compound (5) synthesized in Synthesis Example 3 and serving an organic EL device material according to the present invention.

Fig. 4 is an NMR spectrum of compound (6) synthesized in Synthesis Example 4 and serving an organic EL device material according to the present invention.

Fig. 5 is an NMR spectrum of compound (8) synthesized in Synthesis Example 5 and serving an organic EL device material according to the present invention.

Fig. 6 is an NMR spectrum of compound (9) synthesized in Synthesis Example 6 and serving an organic EL device material according to the present invention.

Fig. 7 is an NMR spectrum of compound (10) synthesized in Synthesis Example 7 and serving an organic EL device material according to the present invention.

Fig. 8 is an NMR spectrum of compound (11) synthesized in Synthesis Example 8 and serving an organic EL device material according to the present invention.

Fig. 9 is an NMR spectrum of compound (12) synthesized in Synthesis Example 9 and serving an organic EL device material according to the present invention.

Fig. 10 is an NMR spectrum of compound (14) synthesized in Synthesis Example 10 and serving an organic EL device material according to the present invention.

Fig. 11 is an NMR spectrum of compound (19) synthesized in Synthesis Example 11 and serving an organic EL device material according to the present invention.

Best modes for Carrying Out the Invention

[0013] The organic EL device material of the present invention comprises an aromatic amine derivative represented by any of the aforementioned formulas (I) to (IV).

[0014] In formulas (I) to (IV), each of A_1 to A_{12} represents a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 50 (preferably 1 to 20) carbon atoms, a substituted or unsubstituted aryl group having 5 to 50 (preferably 5 to 20) ring carbon atoms, a substituted or unsubstituted cycloalkyl group having 3 to 50 (preferably 5 to 12) ring carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 50 (preferably 1 to 6) carbon atoms, a substituted or unsubstituted aryloxy group having 5 to 50 (preferably 5 to 18) ring carbon atoms, a substituted or unsubstituted arylamino group having 5 to 50 (preferably 5 to 18) ring carbon atoms, a substituted or unsubstituted alkylamino group having 1 to 20 carbon atoms (preferably 1 to 6), or a halogen atom.

[0015] Examples of the substituted or unsubstituted alkyl group represented by any of A_1 to A_{12} include methyl, ethyl, propyl, isopropyl, butyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, stearyl, 2-phenylisopropyl, trichloromethyl, trifluoromethyl, benzyl, α -phenoxybenzyl, α,α -dimethylbenzyl, α,α -methylphenylbenzyl, α,α -ditrifluoromethylbenzyl, triphenylmethyl, and α -benzyloxybenzyl.

[0016] Examples of the substituted or unsubstituted aryl group represented by any of A_1 to A_{12} include phenyl, 2-methylphenyl, 3-methylphenyl, 4-methylphenyl, 4-ethylphenyl, biphenyl, 4-methylbiphenyl, 4-ethylbiphenyl, 4-cyclohexylbiphenyl, terphenyl, 3,5-dichlorophenyl, naphthyl, 5-methylnaphthyl, anthryl, and pyrenyl.

[0017] Examples of the substituted or unsubstituted cycloalkyl group represented by any of A_1 to A_{12} include cyclopropyl, cyclobutyl, cyclopentyl, and cyclohexyl.

[0018] Examples of the substituted or unsubstituted alkoxy group represented by any of A_1 to A_{12} include methoxy, ethoxy, propoxy, isopropoxy, butoxy, isobutoxy, sec-butoxy, tert-butoxy, pentyloxy groups, and hexyloxy groups.

[0019] Examples of the substituted or unsubstituted aryloxy group represented by any of A_1 to A_{12} include phenoxy, tolyloxy, and naphthylloxy.

[0020] Examples of the substituted or unsubstituted arylamino group represented by any of A_1 to A_{12} include diphenylamino, ditolylamino, dinaphthylamino, and naphthylphenylamino.

[0021] Examples of the substituted or unsubstituted alkylamino group represented by any of A_1 to A_{12} include dimethylamino, diethylamino, and dihexylamino.

[0022] Examples of the halogen atom represented by any of A_1 to A_{12} include fluorine, chlorine, and bromine.

[0023] In formula (I), at least one of A_1 to A_4 does not represent a hydrogen atom. In formula (II), at least one of A_5 to A_8 does not represent a hydrogen atom. In formula (III), at least one of A_9 and A_{10} does not represent a hydrogen atom. In formula (IV), at least one of A_{11} and A_{12} does not represent a hydrogen atom.

[0024] The "m" is an integer of 0 to 5, preferably 0 to 2. When m is 2 or more, groups represented by any of A_1 to A_{12} may be identical to or different from one another, or may be linked together to form a saturated or unsaturated ring. Each pair of A_1 and A_2 , A_3 and A_4 , A_5 and A_6 , A_7 and A_8 , A_9 and A_{10} , and A_{11} and A_{12} , is such that the members thereof may be linked together to form a saturated or unsaturated ring.


[0025] Each of R_1 to R_{42} represents a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 20 ring carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a cyano group.











[0026] Examples of the substituted or unsubstituted alkyl group and aryl group represented by any of R_1 to R_{42} include the same groups as mentioned in relation to the A_1 to A_{12} .

[0027] Each of X_1 to X_3 represents a substituted or unsubstituted arylene group having 6 to 20 ring carbon atoms.

[0028] Examples of the substituted or unsubstituted arylene group represented by any of X_1 to X_3 include phenyl, biphenyl, terphenyl, divalent groups derived from naphthalene, fluorene, or a similar compound, and divalent groups formed by linking a plurality of the compounds.

[0029] Specific examples of the aromatic amine derivative represented by any of formulas (I) to (IV) include, but are not limited to, the following. The symbol "Me" denotes a methyl group. Compounds designated with a * are not according to the invention.

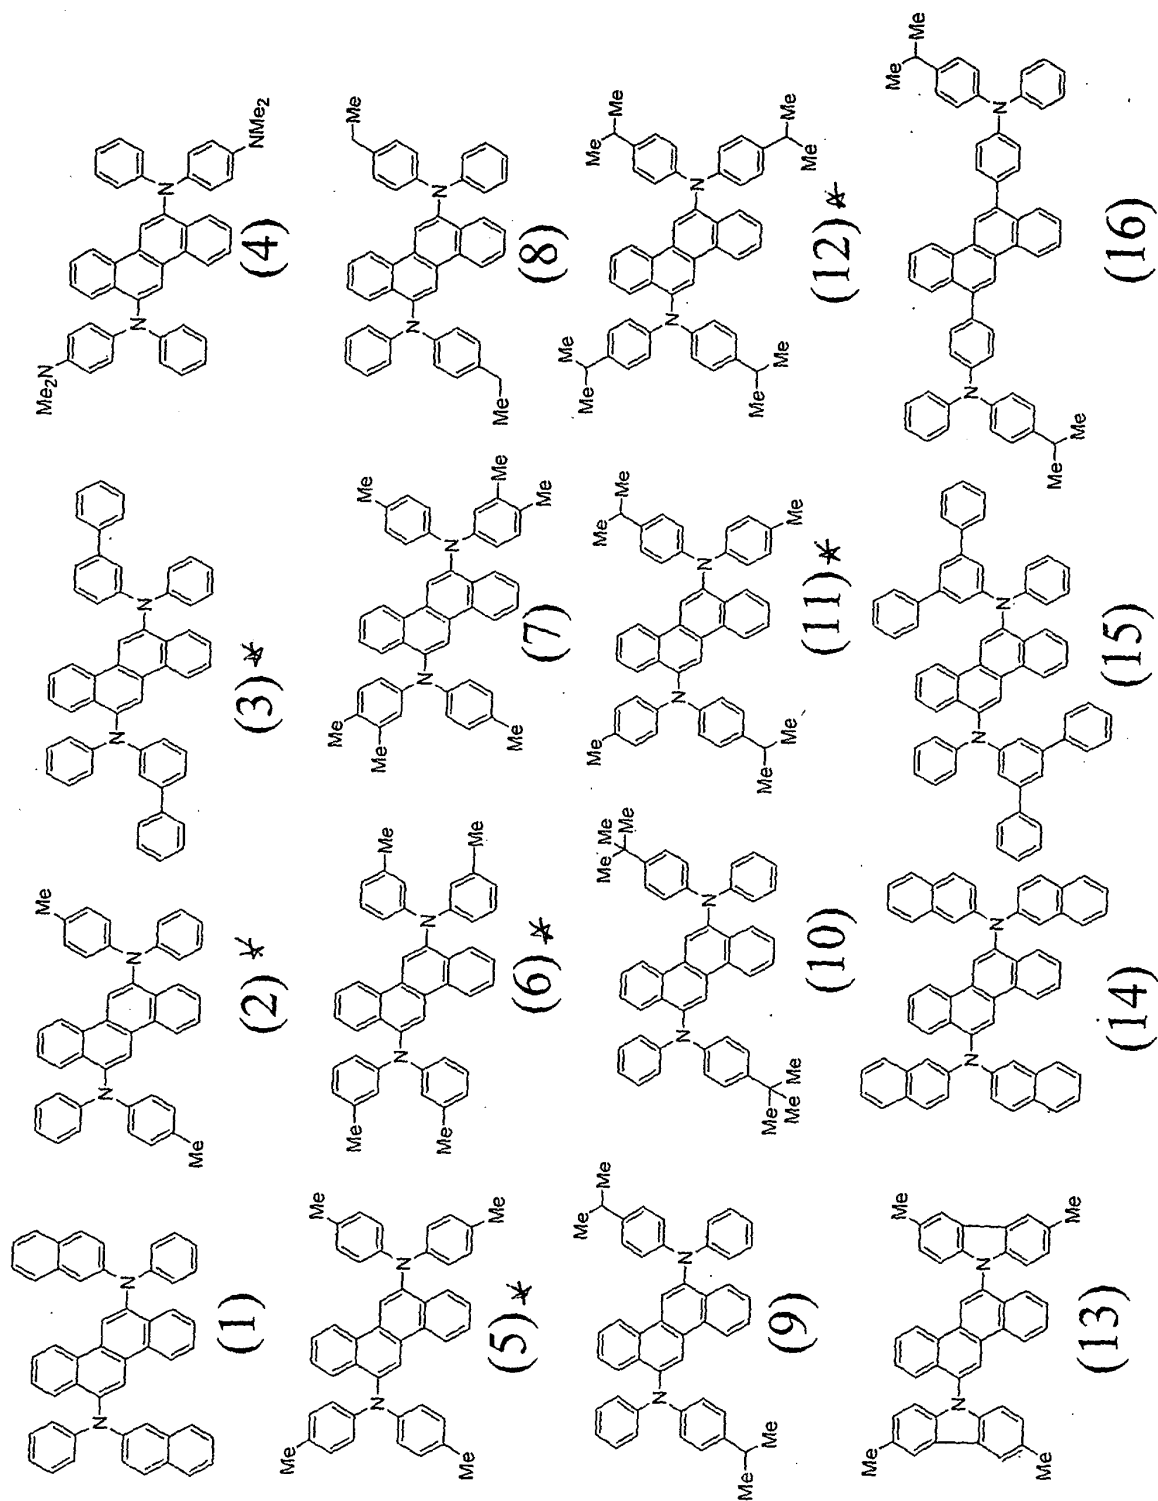

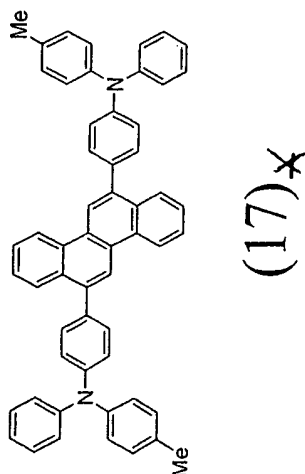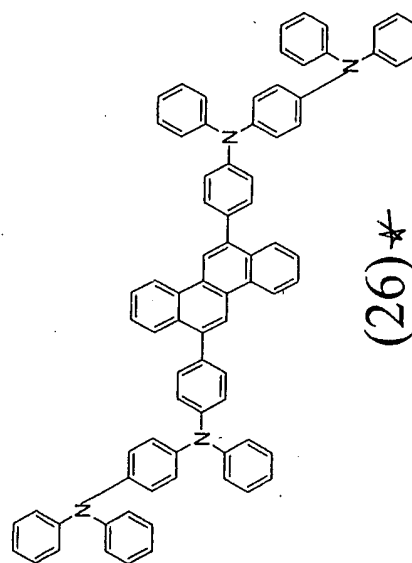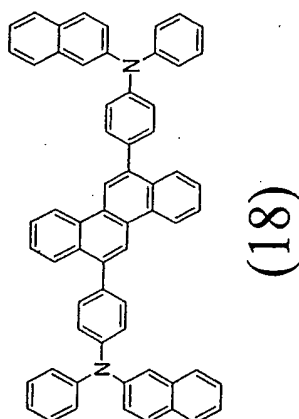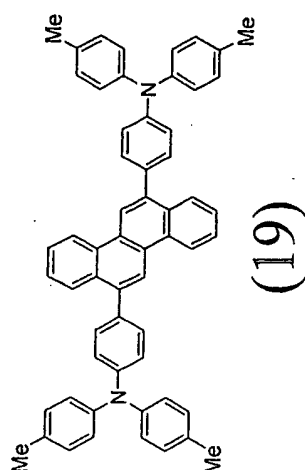

[0030] The compound of the present invention represented by any of the formulas (I) to (IV) has a structure in which amine moieties substituted by a substituent-containing benzene ring are linked to a chrysene moiety. Therefore, association of molecules of the compound is prevented, thereby prolonging the life time. The compound of the present invention exhibits highly fluorescent properties in the solid state and excellent electric-field-induced emission characteristics, and attains a fluorescence quantum efficiency of 0.3 or more. In addition, the compound exhibits excellent hole-injectability and hole-transportability from a metallic electrode or an organic thin-film layer, as well as excellent electron-

injectability and electron-transportability from a metallic electrode or an organic thin-film layer. Thus, the compound of the present invention is effectively used as an organic EL device material. The compound may be used in combination with another hole-transporting material, another electron-transporting material, or a doping material.

[0031] The organic EL device of the present invention is composed of a cathode, an anode, and one or more organic thin films interposed between the cathode and the anode. When a single organic thin film is used, a light-emitting layer is interposed between the cathode and the anode. The light-emitting layer contains a light-emitting material and may further contain a hole-injecting material for transporting, to the light-emitting material, holes injected from the anode, or an electron-injecting material for transporting, to the light-emitting material, electrons injected from the cathode. By virtue of excellent emission characteristics, hole-injectability, hole-transportability, electron-injectability, and electron-transportability, the compound represented by any of formulas (I) to (IV) can be used as a light-emitting material in the light-emitting layer.

[0032] In the organic EL device of the present invention, the light-emitting layer preferably contains the organic EL device material in an amount of 0.1 to 20 wt.%, more preferably 1 to 10 wt.%. Since the organic EL device material exhibits remarkably high fluorescence quantum efficiency and high hole- and electron-transportability and can provide uniform thin film, the light-emitting layer can be formed solely from the light-emitting material of the present invention.

[0033] Examples of the multi-layer structure of the organic EL device include (anode/hole-injecting layer/light-emitting layer/cathode), (anode/light-emitting layer/electron-injecting layer/cathode), and (anode/hole-injecting layer/light-emitting layer/electron-injecting layer/cathode).

[0034] In addition to the compound of the present invention represented by any of formulas (I) to (IV), the light-emitting layer may further contain, in accordance with needs, a known light-emitting material, doping material, hole-injecting material, or electron-injecting material. When the organic EL device has a multi-layer structure, decrease in luminance and life time due to quenching can be prevented. If required, a light-emitting material can be used in combination with a doping material, a hole-injecting material, or an electron-injecting material. When a doping material is used, emission luminance and emission efficiency can be elevated, and red-light-emission or blue-light-emission can be attained. Each of the hole-injecting layer, light-emitting layer, and electron-injecting layer may be composed of two or more layers. In the case of the hole-injecting layer, a layer to which holes are injected from an electrode is referred to as "hole-injecting layer," and a layer for receiving holes from the hole-injecting layer and transporting the holes to the light-emitting layer is referred to as "hole-transporting layer." Similarly, in the case of the electron-injecting layer, a layer to which electrons are injected from an electrode is referred to as "electron-injecting layer," and a layer for receiving electrons from the electron-injecting layer and transporting the electrons to the light-emitting layer is referred to as "electron-transporting layer." These layers may be employed in accordance with energy level of the material, heat resistance, adhesion with respect to an organic layer or a metallic electrode, or other factors.

[0035] No particular limitation is imposed on the light-emitting material or the doping material which may be used in the light-emitting layer in combination with the compound represented by any of formulas (I) to (IV). Examples include anthracene, naphthalene, phenanthrene, pyrene, tetracene, coronene, chrysene, fluoresceine, perylene, phthaloperylene, naphthaloperylene, perynone, phthaloperynone, naphthaloperynone, diphenylbutadiene, tetraphenylbutadiene, coumarin, oxadiazole, aldazine, bisbenzoxazoline, bisstyryl, pyrazine, cyclopentadiene, quinoline metal complexes, aminoquinoline metal complexes, benzoquinoline metal complexes, imines, diphenylethylene, vinylanthracene, diamino-carbazole, pyrane, thiopyrane, polymethine, merocyanine, imidazole-chelated oxinoid compounds, quinacridone, rubrene, and fluorescent dyes.

[0036] Preferably, the hole-injecting material is a compound which can transfer holes, which exhibits hole-injecting effect (from an anode) and excellent hole-injecting effect to a light-emitting layer or a light-emitting material, which prevents transfer of excitons generated in the light-emitting layer to an electron-injecting layer or an electron-injecting material, and which has excellent thin-film-formability. No particular limitation is imposed on the hole-injecting material, and specific examples include phthalocyanine derivatives, naphthalocyanine derivatives, porphyrin derivatives, oxazole, oxadiazole, triazole, imidazole, imidazolone, imidazoethione, pyrazoline, pyrazolone, tetrahydroimidazole, oxazole, oxadiazole, hydrazone, acylhydrazone, polyarylanes, stilbene, butadiene, benzidine-type triphenylamines, styrylamine-type triphenylamines, diamine-type triphenylamines, derivatives thereof, and polymer materials such as polyvinylcarbazole, polysilane, and conductive polymers.

[0037] Among the hole-injecting materials which may be used in the organic EL device of the present invention, an aromatic tertiary amine derivative and a phthalocyanine derivative serve as a more effective hole-injecting material.

[0038] No particular limitation is imposed on the type of the aromatic tertiary amine derivative, and examples include triphenylamine, tritolylamine, tolyldiphenylamine, N,N'-diphenyl-N,N'-(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N',N'-(4-methylphenyl)-1,1'-phenyl-4,4'-diamine, N,N,N',N'-(4-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N'-diphenyl-N,N'-dinaphthyl-1,1'-biphenyl-4,4'-diamine, N,N'-(methylphenyl)-N,N'-(4-n-butylphenyl)-phenanthrene-9,10-diamine, N,N-bis(4-di-4-tolylaminophenyl)-4-phenylcyclohexane, and oligomers and polymers having a skeletal structure of any of these aromatic tertiary amines.

[0039] No particular limitation is imposed on the type of the phthalocyanine (Pc) derivative, and examples include

phthalocyanine derivatives such as H₂Pc, CuPc, CoPc, NiPc, ZnPc, PdPc, FePc, MnPc, ClAlPc, ClGaPc, ClInPc, ClSnPc, Cl₂SiPc, (HO)AlPc, (HO)GaPc, VOPc, TiOPc, MoOPc, GaPc-O-GaPc, and naphthalocyanine derivatives.

[0040] The organic EL device of the present invention preferably includes, between the light-emitting layer and the anode, a layer containing any of these aromatic tertiary amine derivatives and/or phthalocyanine derivatives, for example, the aforementioned hole-transporting layer or a hole-injecting layer.

[0041] Preferably, the electron-injecting material is a compound which can transfer electrons, which exhibits electron-injecting effect (from a cathode) and excellent electron-injecting effect to a light-emitting layer or a light-emitting material, which prevents transfer of excitons generated in the light-emitting layer to a hole-injecting layer, and which has excellent thin-film-formability. No particular limitation is imposed on the electron-injecting material, and specific examples include fluorenone, anthraquinodimethane, diphenylquinone, thiopyrane dioxide, oxazole, oxadiazole, triazole, imidazole, perylene-tetracarboxylic acid, fluorenylidene methane, anthraquinodimethane, anthrone, and derivatives thereof. The hole-injecting material may be sensitized through addition of an electron-acceptor thereto, and the electron-injecting material may be sensitized through addition of an electron-donor thereto.

[0042] Among the electron-injecting materials which may be used in the organic EL device of the present invention, a metal complex compound and a nitrogen-containing five-membered ring derivative serve as a more effective electron-injecting material.

[0043] No particular limitation is imposed on the type of the metal complex compound, and examples include 8-hydroxyquinolinatolithium, bis(8-hydroxyquinolinato)zinc, bis(8-hydroxyquinolinato)copper, bis(8-hydroxyquinolinato)manganese, tris(8-hydroxyquinolinato)aluminum, tris(2-methyl-8-hydroxyquinolinato)aluminum, tris(8-hydroxyquinolinato)gallium, bis(10-hydroxybenzo[h]quinolinato)beryllium, bis(10-hydroxybenzo[h]quinolinato)zinc, bis(2-methyl-8-quinolinato)chlorogallium, bis(2-methyl-8-quinolinato)(o-cresolato)gallium, bis(2-methyl-8-quinolinato)(1-naphtholato)aluminum, and bis(2-methyl-8-quinolinato)(2-naphtholato)gallium.

[0044] The nitrogen-containing five-membered-ring derivative is preferably an oxazole derivative, a thiazole derivative, an oxadiazole derivative, a thiadiazole derivative, and a triazole derivative. Specific examples of the derivative include 2,5-bis(1-phenyl)-1,3,4-oxazole, dimethyl-POPOP, 2,5-bis(1-phenyl)-1,3,4-thiazole, 2,5-bis(1-phenyl)-1,3,4-oxadiazole, 2-(4'-tert-butylphenyl)-5-(4''-biphenyl)-1,3,4-oxadiazole, 2,5-bis(1-naphthyl)-1,3,4-oxadiazole, 1,4-bis[2-(5-phenyloxadiazolyl)]benzene, 1,4-bis[2-(5-phenyloxadiazolyl)-4-tert-butylbenzene], 2-(4'-tert-butylphenyl)-5-(4''-biphenyl)-1,3,4-thiadiazole, 2,5-bis(1-naphthyl)-1,3,4-thiadiazole, 1,4-bis[2-(5-phenylthiadiazolyl)]benzene, 2-(4'-tert-butylphenyl)-5-(4''-biphenyl)-1,3,4-triazole, 2,5-bis(1-naphthyl)-1,3,4-triazole, and 1,4-bis[2-(5-phenyltriazolyl)]benzene.

[0045] In the organic EL device of the present invention, the light-emitting layer may contain, in addition to the compound represented by any of formulas (I) to (IV), at least one species selected from among a light-emitting material, a doping material, a hole-injecting material, and an electron-injecting material. In order to enhance stability of the organic EL device fabricated according to the present invention, with respect to temperature, humidity, atmosphere, and other conditions, the surface of the device may be coated with a protective layer. Alternatively, the entirety of the device may be protected with silicone oil, resin, or a similar material.

[0046] The anode included in the organic EL device of the present invention is preferably formed of a conductive material having a work function higher than 4 eV. Examples of the conductive material include carbon, aluminum, vanadium, iron, cobalt, nickel, tungsten, silver, gold, platinum, palladium, alloys thereof, metal oxides such as tin oxide and indium oxide used in an ITO substrate or an NESA substrate, and organic conductive resins such as polythiophene and polypyrrole. The cathode included in the organic EL device of the present invention is preferably formed of a conductive material having a work function lower than 4 eV. No particular limitation is imposed on the conductive material, and examples include magnesium, calcium, tin, lead, titanium, yttrium, lithium, ruthenium, manganese, aluminum, lithium fluoride, and alloys thereof. No particular limitation is imposed on the type of alloys, and typical examples of the alloys include magnesium/silver, magnesium/indium, and lithium/aluminum. The alloy composition is appropriately regulated in accordance with temperature of vapor-deposition sources, atmosphere, vacuum degree, or other factors. In accordance with needs, each of the anode and the cathode may be composed of two or more layers.

[0047] In order to effectively emit light from the organic EL device, at least one surface of the device is preferably transparent sufficiently in a wavelength region of the emitted light. Preferably, the substrate is also transparent. Such a transparent electrode is produced from the aforementioned conductive material through vapor deposition, sputtering, or a similar method, such that a predetermined transparency is ensured. The light-emission surface of the electrode preferably has a light-transmittance of 10% or more. No particular limitation is imposed on the material of the substrate so long as the substrate has suitable mechanical and thermal strength and transparency. Example of the substrate material include a glass substrate and transparent resin film. Specific examples of the transparent resin film include polyethylene, ethylene-vinyl acetate copolymer, ethylene-vinyl alcohol copolymer, polypropylene, polystyrene, poly(methyl methacrylate), poly(vinyl chloride), poly(vinyl alcohol), poly(vinyl butyral), nylon, polyether-ether-ketones, polysulfones, polyether sulfones, tetrafluoroethylene-perfluoroalkyl vinyl ether copolymer, poly(vinyl fluoride), tetrafluoroethylene-ethylene copolymer, tetrafluoroethylene-hexafluoropropylene copolymer, poly(chlorotrifluoroethylene), poly(vinylidene fluoride), polyesters, polycarbonates, polyurethanes, polyimides, polyether imides, polyimides, and polypropylene.

[0048] Each component layer of the organic EL device of the present invention may be formed through any of the dry film forming methods such as vacuum vapor deposition, sputtering, and plasma-ion-plating and the wet film formation methods such as spin-coating, dipping, and flow coating. Although no particular limitation is imposed on the film thickness, the film thickness must be controlled appropriately. When the thickness excessively large, a large voltage must be applied so as to gain a predetermined light output, thereby lowering efficiency, whereas when the thickness is too small, pinholes and other defects generate. In this case, sufficient emission luminance cannot be attained even though electric field is applied. In general, the thickness is preferably 5 nm to 10 μm , more preferably 10 nm to 0.2 μm .

[0049] In the case where the wet film formation method is employed, materials for forming each layer is dissolved or dispersed in an appropriate solvent such as ethanol, chloroform, tetrahydrofuran, or dioxane, and a thin film is formed from the solution or dispersion. Any appropriate solvents may be used. In order to enhance film formability and prevent pinhole generation in the film, an appropriate resin or additive may be incorporated into any of the organic thin film layers. Examples of employable resins include insulating resins such as polystyrene, polycarbonate, polyarylate, polyester, polyamide, polyurethane, polysulfone, poly(methyl methacrylate), poly(methyl acrylate), and cellulose; copolymers thereof; photoconducting resins such as poly-N-vinylcarbazole and polysilane; and conductive resins such as polythiophene and polypyrrole. Examples of the additives include an anti-oxidant, a UV-absorber, and a plasticizer.

[0050] As described above, by producing organic thin-film layers in the organic EL device from the organic EL device material of the present invention, the produced EL device exhibits a long service life and can emit blue light of high color purity at high emission efficiency.

[0051] The organic EL device of the present invention can be used as a flat light-emitting device for use in a flat-panel display of a wall-mounted, flat-panel television set; light sources for a copying machine, a printer, a backside light of a liquid-crystal display, indicators, etc.; display panels; signal lamps; etc., in addition to organic EL devices, the material of the present invention can be also used in an electrophotographic sensitizer, a photoelectric conversion device, a solar cell, an image sensor, etc.

[0052] The present invention will next be described in more detail by of examples, which should not be construed as limiting the invention thereto.

Synthesis Example 1 (Synthesis of compound (1))

[0053] Under argon flow, 6, 12-dibromochrysene (3.8 g, 10 mmol), N-phenyl-2-naphthylamine (5.4 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-*t*-butylphosphine (0.06 g, 3 mol%), *t*-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 6.4 g of a pale yellow powder. The powder was identified as compound (1) through an NMR spectrum (see Fig. 1) and an FD-MS (field desorption mass spectrum) (yield: 98%).

[0054] The NMR spectrum (solvent: CDCl_3) was obtained by means of a Fourier-transform NMR spectrometer (R-1900 (90 MHz), product of Hitachi, Ltd.).

Synthesis Example 2 (Synthesis of compound (2)) (not according to the invention)

[0055] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-methyldiphenylamine (4.5 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-*t*-butylphosphine (0.06 g, 3 mol%), *t*-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 5.4 g of a pale yellow powder. The powder was identified as compound (2) through an NMR spectrum (see Fig. 2) and an FD-MS (yield: 92%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 3 (Synthesis of compound (5)) (not according to the invention)

[0056] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), *p,p'*-ditolylamine (4.9 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-*t*-butylphosphine (0.06 g, 3 mol%), *t*-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 5.7 g of a pale yellow powder. The powder was identified as compound (5) through an NMR spectrum (see Fig. 3) and an FD-MS (yield: 93%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 4 (Synthesis of compound (6)) (not according to the invention)

[0057] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), m,m'-ditolylamine (4.9 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 5.5 g of a pale yellow powder. The powder was identified as compound (6) through an NMR spectrum (see Fig. 4) and an FD-MS (yield: 89%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 5 (Synthesis of compound (8))

[0058] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-ethyldiphenylamine (4.9 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 5.7 g of a pale yellow powder. The powder was identified as compound (8) through an NMR spectrum (see Fig. 5) and an FD-MS (yield: 92%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 6 (Synthesis of compound (9))

[0059] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-isopropyldiphenylamine (5.2 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 6.3 g of a pale yellow powder. The powder was identified as compound (9) through an NMR spectrum (see Fig. 6) and an FD-MS (yield: 98%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 7 (Synthesis of compound (10))

[0060] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-t-butylidiphenylamine (5.6 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 5.3 g of a pale yellow powder. The powder was identified as compound (10) through an NMR spectrum (see Fig. 7) and an FD-MS (yield: 79%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 8 (Synthesis of compound (11))(not according to the invention)

[0061] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-isopropylphenyl-p-tolylamine (5.6 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 6.0 g of a pale yellow powder. The powder was identified as compound (11) through an NMR spectrum (see Fig. 8) and an FD-MS (yield: 89%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 9 (Synthesis of compound (12)) (not according to the invention)

[0062] Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-diisopropylphenylamine (6.3 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-t-butylphosphine (0.06 g, 3 mol%), t-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 6.9 g of a pale yellow powder. The powder was identified as compound (12) through an NMR spectrum (see Fig. 9) and an FD-MS (yield: 95%). The NMR

spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 10 (Synthesis of compound (14))

- 5 **[0063]** Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), di-2-naphthylamine (6.7 g, 25 mmol), palladium acetate (0.03 g, 1.5 mol%), tri-*t*-butylphosphine (0.06 g, 3 mol%), *t*-butoxysodium (2.4 g, 25 mmol), and anhydrous toluene (100 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 7.2 g of a pale yellow powder. The powder was identified as compound (14) through an NMR spectrum (see Fig. 10) and an FD-MS (yield: 94%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Synthesis Example 11 (Synthesis of compound (19))

- 15 **[0064]** Under argon flow, 6,12-dibromochrysene (3.8 g, 10 mmol), 4-(di-*p*-tolylamino)phenylboronic acid (7.9 g, 25 mmol), tetrakis(triphenyl)phosphine palladium (0.17 g, 1.5 mol%), aqueous sodium carbonate (30 mL, 60 mmol, 2M), and toluene (60 mL) were added to a 300-mL three-neck flask equipped with a condenser, and the mixture was heated overnight at 100°C with stirring. After completion of reaction, precipitated crystals were collected through filtration, followed by washing with toluene (50 mL) and methanol (100 mL), to thereby yield 7.3 g of a pale yellow powder. The powder was identified as compound (19) through an NMR spectrum (see Fig. 11) and an FD-MS (yield: 95%). The NMR spectrum was obtained under the same conditions as employed in Synthesis Example 1.

Example 1 (not according to the invention)

- 25 **[0065]** An indium tin oxide transparent electrode (thickness: 120 nm) was formed on a glass substrate (25 x 75 x 1.1 mm). The glass substrate was cleaned through irradiation with a UV ray in an ozone atmosphere, and placed in a vacuum deposition apparatus.
- [0066]** On the transparent electrode, N',N''-bis[4-(diphenylamino)phenyl]-N',N''-diphenylvinyl-4,4'-diamine serving as a hole-injecting layer (thickness: 60 nm), N,N,N',N'-tetrakis(4-biphenyl)-4,4'-benzidine serving as a hole-transporting layer (thickness: 20 nm) were sequentially vapor-deposited, followed by simultaneously vapor-depositing 10,10'-bis[1,1',4',1''terphenyl-2-yl-9,9'-bianthracenyl and the aforementioned compound (2) (40 : 2 by weight) thereon, to thereby form a light-emitting layer (thickness: 40 nm).
- [0067]** Subsequently, tris(8-hydroxyquinolino)aluminum serving as an electron-injecting layer (thickness: 10 nm) was deposited, followed by sequentially vapor-depositing lithium fluoride (thickness: 1 nm) and aluminum (thickness: 150 nm). The lithium fluoride/aluminum film served as a cathode. Thus, an organic EL device was fabricated.
- [0068]** When the thus-fabricated organic EL device was tested under application of voltage, a blue-light emission with an emission luminance of 410 cd/m² (maximum peak emission wavelength: 457 nm) was observed at a voltage of 6 V and a current density of 10 mA/cm². When the EL device was continuously tested under voltage application (DC) at an initial luminance of 500 cd/m², the half-life time was found to be 2,160 hours.

Example 2 (not according to the invention)

- [0069]** The procedure of Example 1 was repeated, except that compound (5) was used instead of compound (2), to thereby fabricate an organic EL device.
- 45 **[0070]** When the thus-fabricated organic EL device was tested under application of voltage, a blue-light emission with an emission luminance of 596 cd/m² (maximum peak emission wavelength: 463 nm) was observed at a voltage of 6.5 V and a current density of 10 mA/cm². When the EL device was continuously tested under voltage application in a manner similar to that of Example 1, the half-life time was found to be 3,880 hours.

Example 3 (not according to the invention)

- [0071]** The procedure of Example 1 was repeated, except that compound (11) was used instead of compound (2), to thereby fabricate an organic EL device.
- 55 **[0072]** When the thus-fabricated organic EL device was tested under application of voltage, a blue-light emission with an emission luminance of 594 cd/m² (maximum peak emission wavelength: 462 nm) was observed at a voltage of 6.3 V and a current density of 10 mA/cm². When the EL device was continuously tested under voltage application in a manner similar to that of Example 1, the half-life time was found to be 4,590 hours.

Conventional Example 1

[0073] The procedure of Example 1 was repeated, except that 6,12-bis(diphenylamino)chrysene was used instead of compound (2), to thereby fabricate an organic EL device.



[0074] When the thus-fabricated organic EL device was tested under application of voltage, a blue-light emission with an emission luminance of 311 cd/m² (maximum peak emission wavelength: 451 nm) was observed at a voltage of 6.2 V and a current density of 10 mA/cm². When the EL device was continuously tested under voltage application in a manner similar to that of Example 1, the half-life time was found to be as short as 1,000 hours.

Industrial Applicability

[0075] The organic EL device including the organic EL device material of the present invention serving as a light-emitting material attains emission luminance sufficient for use in practice through low applied voltage. The device also attains high emission efficiency and has a long service life; i.e., does not severely deteriorated during use for a long period of time.


Claims

1. An organic electroluminescent device material comprising an aromatic amine derivative represented by any of the following formulae (I) and (II):

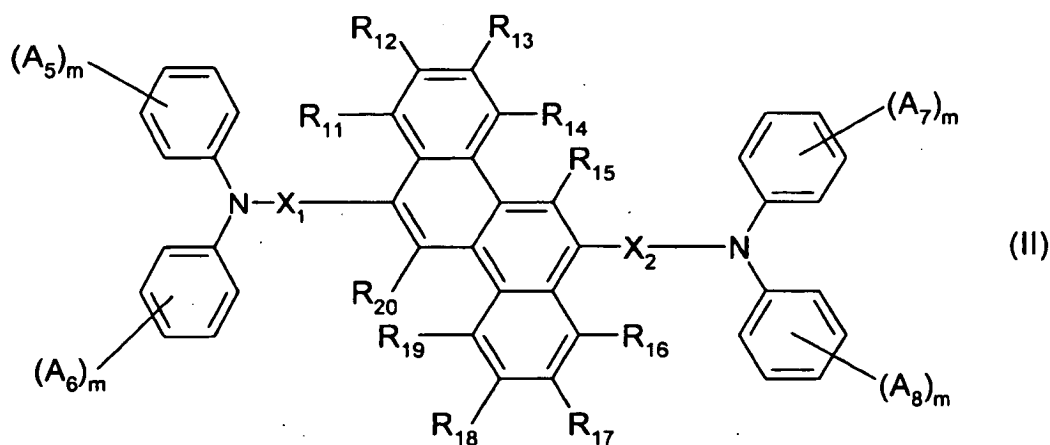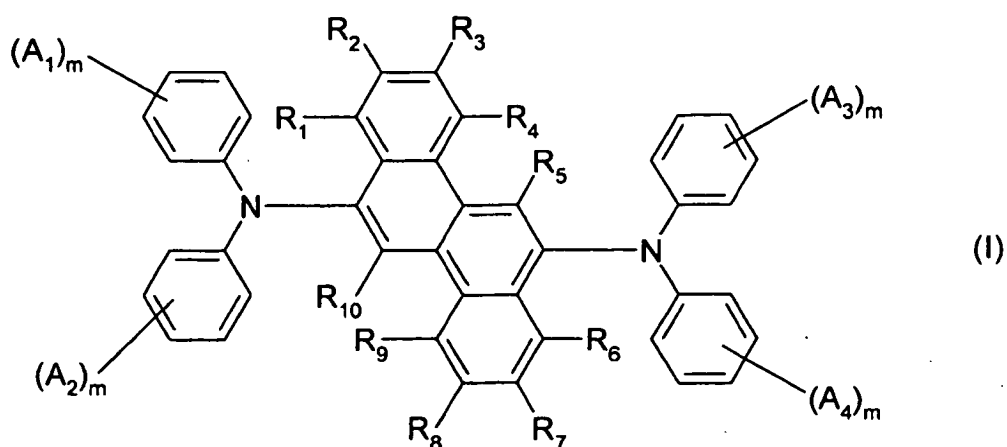

wherein each of A₁ to A₈ represents a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 50 carbon atoms, a substituted or unsubstituted aryl group having 5 to 50 ring carbon atoms, a substituted or unsub-

stituted cycloalkyl group having 3 to 50 ring carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 50 carbon atoms, a substituted or unsubstituted aryloxy group having 5 to 50 ring carbon atoms, a substituted or unsubstituted arylamino group having 5 to 50 ring carbon atoms, a substituted or unsubstituted alkylamino group having 1 to 20 carbon atoms, or a halogen atom; m is an integer of 0 to 5, and when m is 2 or more, groups represented by any of A₁ to A₈ may be identical to or different from one another, or may be linked together to form a saturated or unsaturated ring; each pair of A₁ and A₂, A₃ and A₄, A₅ and A₆ and A₇ and A₈ is such that the members thereof may be linked together to form a saturated or unsaturated ring; with the proviso that in formula (I), at least one of A₁ to A₄ does not represent a hydrogen atom, that in formula (II), at least one of A₅ to A₈ does not represent a hydrogen atom; each of R₁ to R₂₀ represents a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a cyano group; and each of X₁ and X₂ represents a substituted or unsubstituted arylene group having 6 to 20 ring carbon atoms; excluding the following compounds:


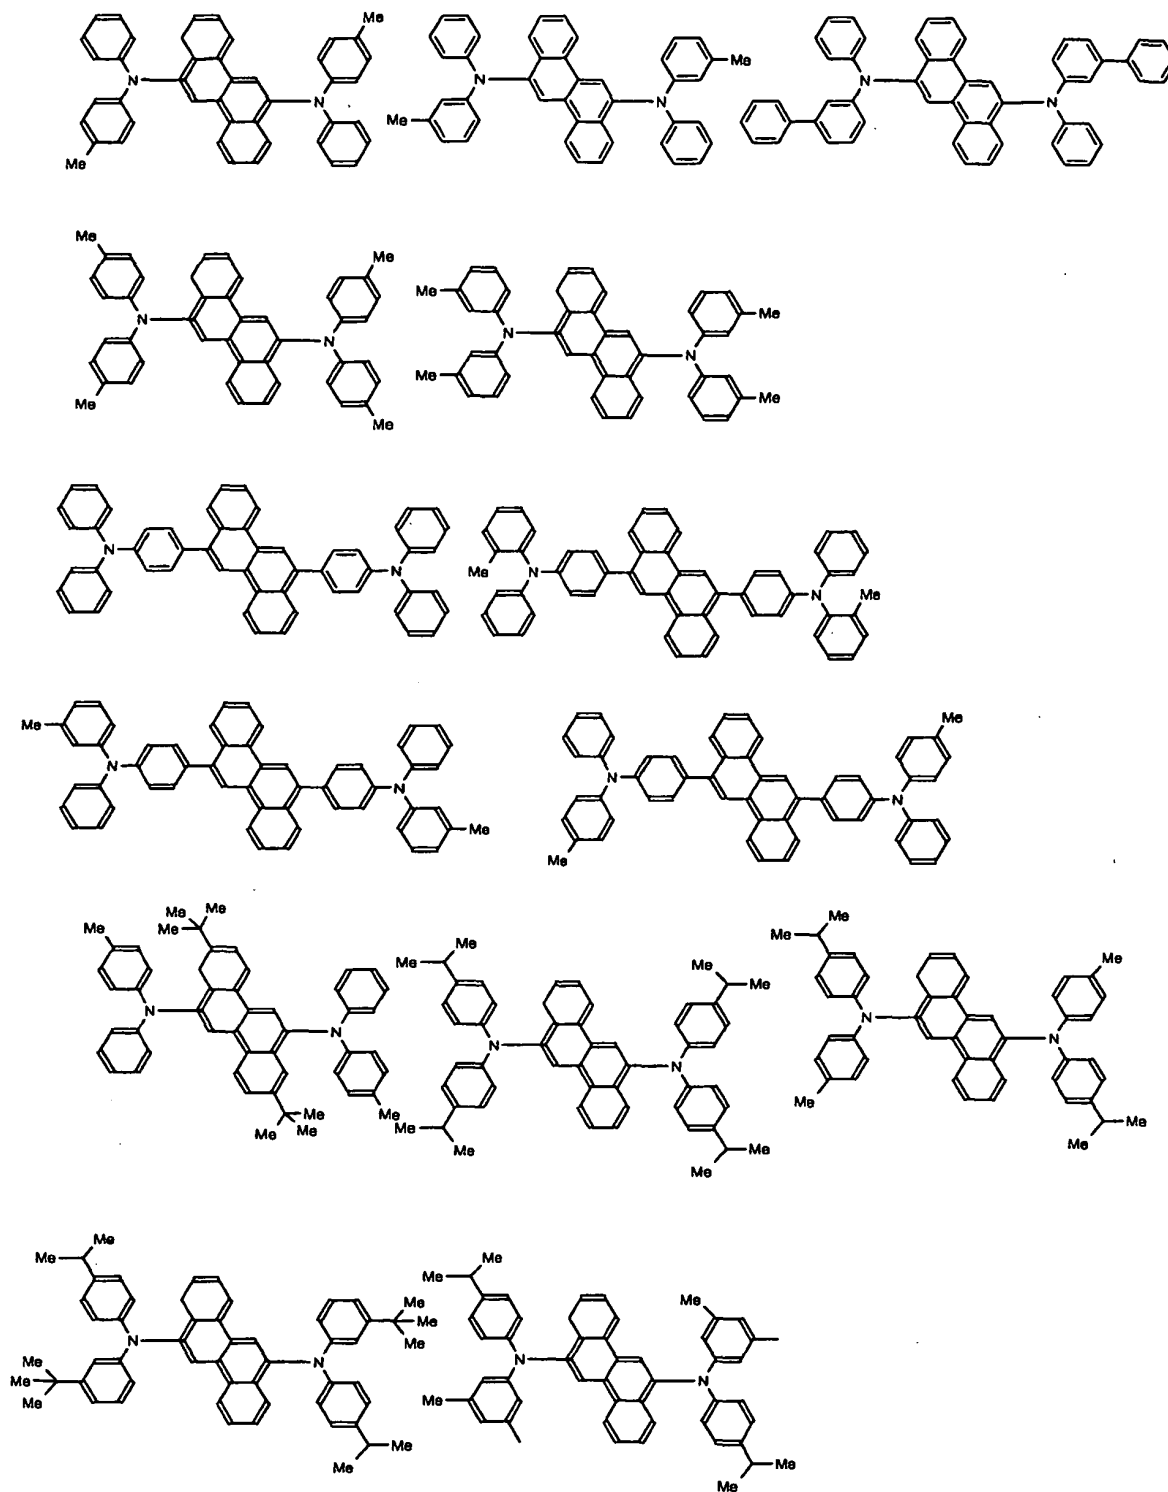


2. An organic electroluminescent device material as described in claim 1, which is a light-emitting material for use in an organic electroluminescent device.
3. An organic electroluminescent device comprising a cathode, an anode, and one or more organic thin-film layers interposed between the cathode and the anode, the organic thin-layers including at least a light-emitting layer, wherein at least one of the organic thin-film layers contains the organic electroluminescent device material as recited in claim 1 in the form of single component material or a mixture of a plurality of components.

4. An organic electroluminescent device comprising a cathode, an anode, and one or more organic thin-film layers interposed between the cathode and the anode, the organic thin-layers including at least a light-emitting layer, wherein the light-emitting layer contains the organic electroluminescent device material as recited in claim 1 in an amount of 0.1 to 20 wt. %.
5. An organic electroluminescent device as described in claim 3, which further includes a layer containing an aromatic tertiary amine derivative and/or a phthalocyanine derivative, the layer being provided between the light-emitting layer and the anode.
6. An organic electroluminescent device as described in claim 4, which further includes a layer containing an aromatic tertiary amine derivative and/or a phthalocyanine derivative, the layer being provided between the light-emitting layer and the anode.
7. An organic electroluminescent device as described in any of claims 3 to 6, which emits blue light.

Patentansprüche


1. Organisches Elektrolumineszenzvorrichtungsmaterial, umfassend ein durch die folgenden Formeln (I) und (II) dargestelltes aromatisches Aminderivat:

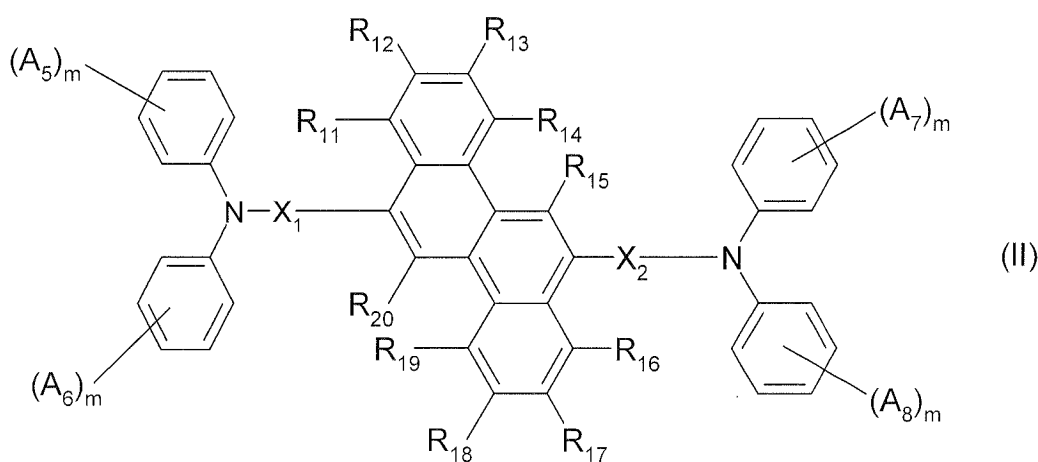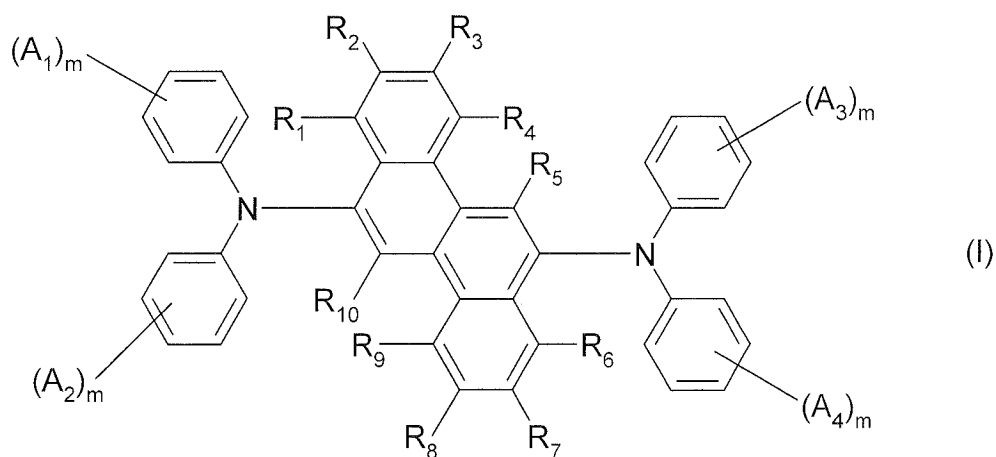


wobei jeder von A_1 bis A_8 ein Wasserstoffatom, eine substituierte oder unsubstituierte Alkylgruppe mit 1 bis 50

Kohlenstoffatomen, eine substituierte oder unsubstituierte Arylgruppe mit 5 bis 50 Ringkohlenstoffatomen, eine substituierte oder unsubstituierte Cykloalkylgruppe mit 3 bis 50 Ringkohlenstoffatomen, eine substituierte oder unsubstituierte Alkoxygruppe mit 1 bis 50 Kohlenstoffatomen, eine substituierte oder unsubstituierte Aryloxygruppe mit 5 bis 50 Ringkohlenstoffatomen, eine substituierte oder unsubstituierte Arylaminogruppe mit 5 bis 50 Ringkohlenstoffatomen, eine substituierte oder unsubstituierte Alkylaminogruppe mit 1 bis 20 Kohlenstoffatomen, oder ein Halogenatom darstellt; m eine ganze Zahl von 0 bis 5 ist, und wenn m 2 oder mehr ist, durch jeden von A_1 bis A_8 dargestellte Gruppen identisch oder verschieden voneinander sein können, oder unter Bildung eines gesättigten oder ungesättigten Rings aneinander gebunden sein können; jedes Paar von A_1 und A_2 , A_3 und A_4 , A_5 und A_6 und A_7 und A_8 so ist, dass die Bestandteile unter Bildung eines gesättigten oder ungesättigten Rings aneinander gebunden sein können; unter der Voraussetzung, dass in Formel (I) mindestens einer von A_1 bis A_4 kein Wasserstoffatom darstellt, dass in Formel (II) mindestens einer von A_5 bis A_8 kein Wasserstoffatom darstellt; jeder von R_1 bis R_{20} ein Wasserstoffatom, eine substituierte oder unsubstituierte Alkylgruppe mit 1 bis 20 Kohlenstoffatomen, eine substituierte oder unsubstituierte Arylgruppe mit 6 bis 20 Ringkohlenstoffatomen, oder eine Cyanogruppe darstellt; und jeder von X_1 und X_2 eine substituierte oder unsubstituierte Arylengruppe mit 6 bis 20 Ringkohlenstoffatomen darstellt; wobei die folgenden Verbindungen ausgeschlossen sind:

5

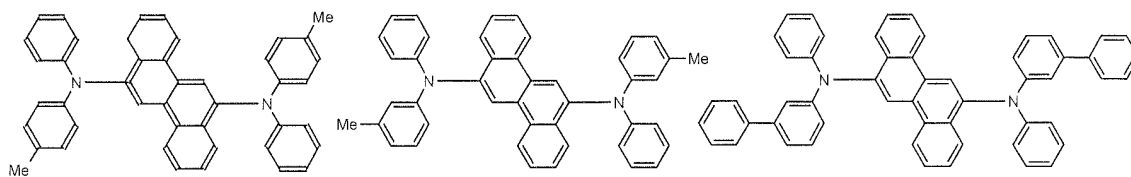


10

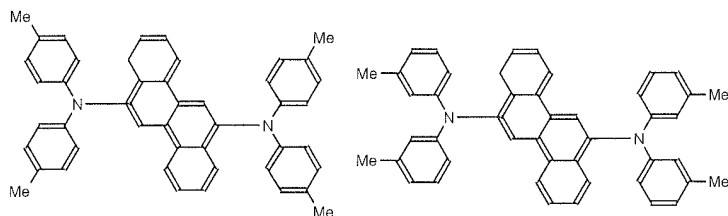


15

20

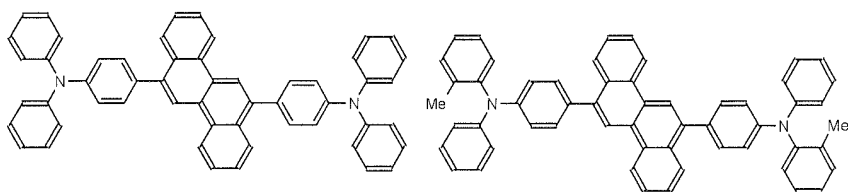


25

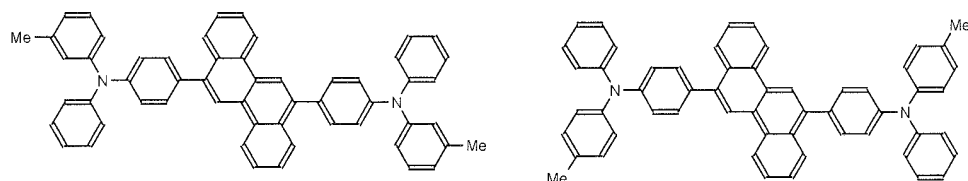


30

35

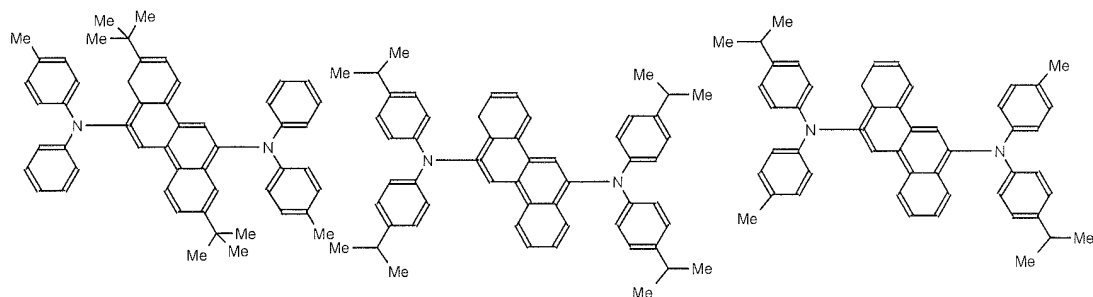

40

45

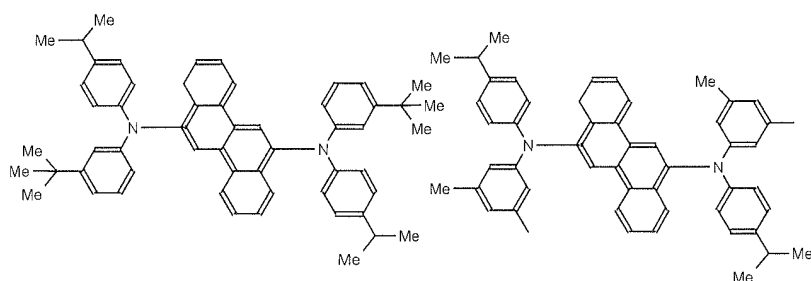

50



2. Organisches Elektrolumineszenzvorrichtungs-Material wie in Anspruch 1 beschrieben, welches ein lichtemittierendes Material zur Verwendung in einer organischen Elektrolumineszenzvorrichtung ist.
3. Organische Elektrolumineszenzvorrichtung, umfassend eine Kathode, eine Anode und eine oder mehr organische Dünnschichten, die zwischen der Kathode und der Anode angeordnet sind, wobei die organischen dünnen

Schichten mindestens eine lichtemittierende Schicht beinhalten, wobei mindestens eine der organischen Dünnschichten das organische Elektrolumineszenzvorrichtungsmaterial wie in Anspruch 1 wiedergegeben in Form eines Einzelkomponentenmaterials oder einer Mischung von mehreren Komponenten enthält.

4. Organische Elektrolumineszenzvorrichtung, umfassend eine Kathode, eine Anode und eine oder mehr organische Dünnschichten, die zwischen der Kathode und der Anode angeordnet sind, wobei die organischen dünnen Schichten mindestens eine lichtemittierende Schicht beinhalten, wobei die lichtemittierende Schicht das organische Elektrolumineszenzvorrichtungsmaterial wie in Anspruch 1 wiedergegeben in einer Menge von 0,1 bis 20 Gew.-% enthält.
5. Organische Elektrolumineszenzvorrichtung wie in Anspruch 3 beschrieben, welche darüber hinaus eine Schicht beinhaltet, die ein aromatisches tertiäres Aminderivat und/oder ein Phthalocyaninderivat enthält, wobei die Schicht zwischen der lichtemittierenden Schicht und der Anode vorgesehen ist.
6. Organische Elektrolumineszenzvorrichtung wie in Anspruch 4 beschrieben, welche darüber hinaus eine Schicht beinhaltet, die ein aromatisches tertiäres Aminderivat und/oder ein Phthalocyaninderivat enthält, wobei die Schicht zwischen der lichtemittierenden Schicht und der Anode vorgesehen ist.
7. Organische Elektrolumineszenzvorrichtung wie in einem der Ansprüche 3 bis 6 beschrieben, welche blaues Licht emittiert.


Revendications

1. Matériau de dispositif électroluminescent organique comprenant un dérivé d'amine aromatique représenté par l'une des formules suivantes (I) et (II) :

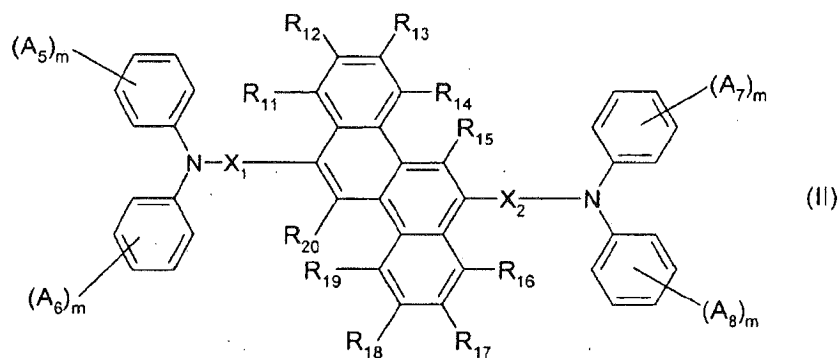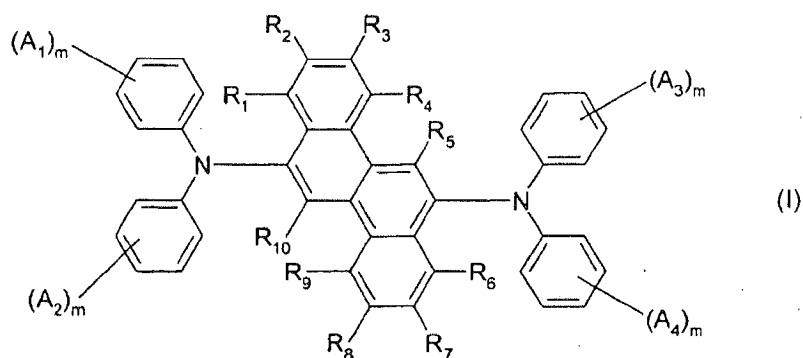

dans lesquelles chacun de A_1 à A_8 représente un atome d'hydrogène, un groupe alkyle substitué ou non substitué

ayant entre 1 et 50 atomes de carbone, un groupe aryle substitué ou non substitué ayant entre 5 et 50 atomes de carbone en anneau, un groupe cycloalkyle substitué ou non substitué ayant entre 3 et 50 atomes de carbone en anneau, un groupe alcoyle substitué ou non substitué ayant entre 1 et 50 atomes de carbone, un groupe aryloxy substitué ou non substitué ayant entre 5 et 50 atomes de carbone en anneau, un groupe arylamino substitué ou non substitué ayant entre 5 et 50 atomes de carbone en anneau, un groupe alkylamino substitué ou non substitué ayant entre 1 et 20 atomes de carbone, ou un atome d'halogène ; m est un nombre entier compris entre 0 et 5, et lorsque m est égal ou supérieur à 2, les groupes représentés par n'importe lequel de A_1 à A_8 peuvent être identiques les uns aux autres ou différents les uns des autres, ou ils peuvent être liés ensemble de manière à former un anneau saturé ou insaturé ; chaque paire A_1 et A_2 , A_3 et A_4 , A_5 et A_6 et A_7 et A_8 est telle que leurs éléments peuvent être liés ensemble de manière à former un anneau saturé ou insaturé ; à la condition expresse que dans la formule (I), l'un au moins de A_1 à A_4 ne représente pas un atome d'hydrogène, que dans la formule (II), l'un au moins de A_5 à A_8 ne représente pas un atome d'hydrogène ; chacun de R_1 à R_{20} représente un atome d'hydrogène, un groupe alkyle substitué ou non substitué ayant entre 1 et 20 atomes de carbone, un groupe aryle substitué ou non substitué ayant entre 6 et 20 atomes de carbone en anneau, ou un groupe cyano ; et chacun de X_1 et de X_2 représente un groupe arylène substitué ou non substitué ayant entre 6 et 20 atomes de carbone en anneau ; à l'exclusion des composés suivants :

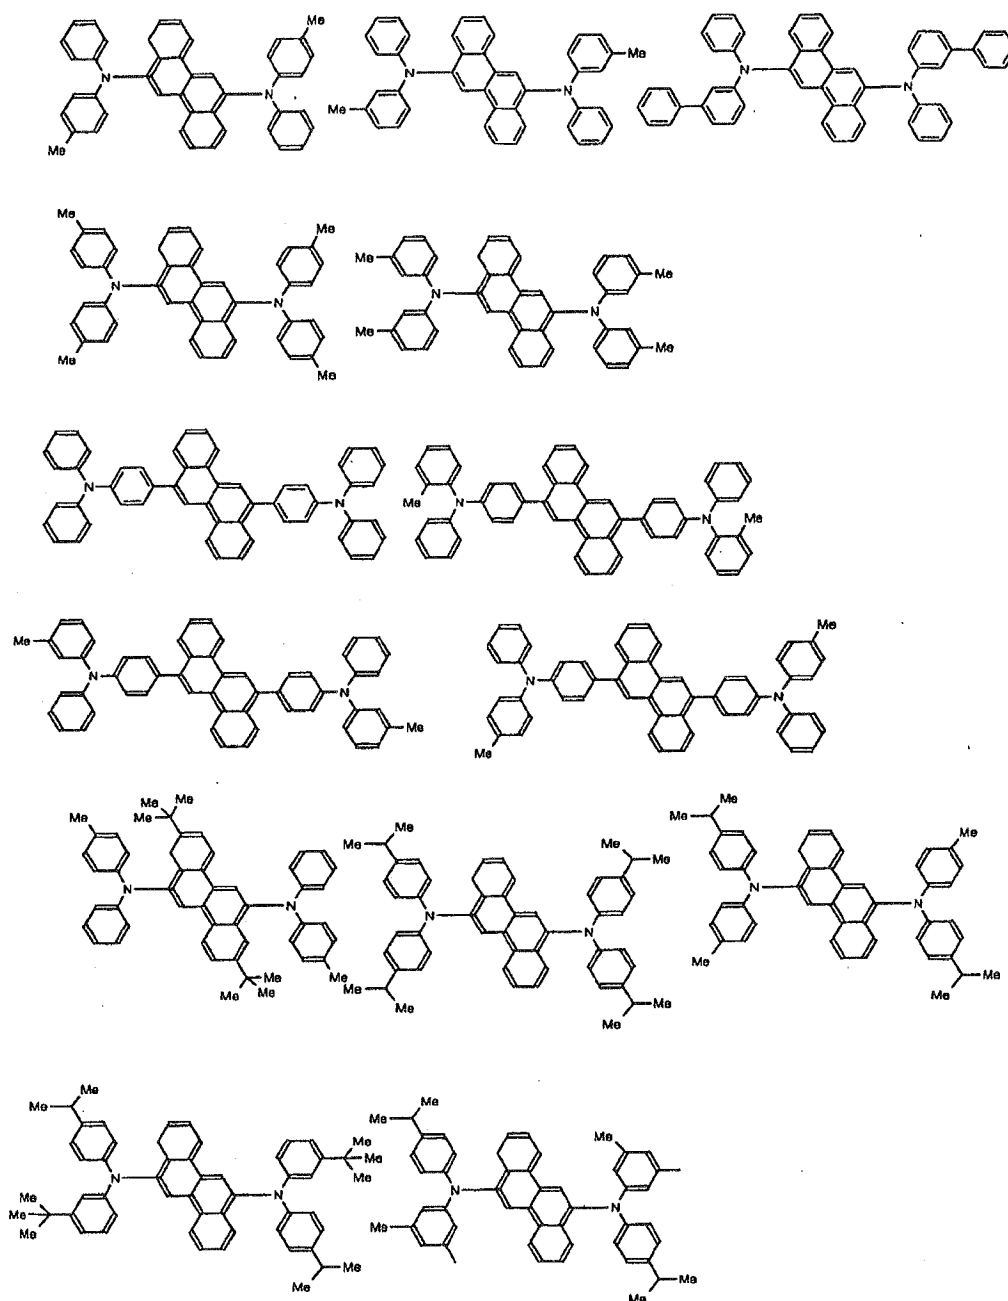

2. Matériau de dispositif électroluminescent organique selon la revendication 1, qui est un matériau luminescent destiné à être utilisé dans un dispositif électroluminescent organique.
3. Matériau de dispositif électroluminescent organique comprenant une cathode, une anode, et une ou plusieurs couches minces organiques interposées entre la cathode et l'anode, les couches minces organiques comprenant au moins une couche luminescente, dans lequel l'une au moins des couches minces organiques contient le matériau de dispositif électroluminescent organique selon la revendication 1 sous la forme d'un seul matériau de composant ou d'un mélange d'une pluralité de composants.
4. Matériau de dispositif électroluminescent organique comprenant une cathode, une anode, et une ou plusieurs couches minces organiques interposées entre la cathode et l'anode, les couches minces organiques comprenant au moins une couche luminescente, dans lequel la couche luminescente contient le matériau de dispositif électro-

EP 1 561 794 B1

luminescent organique selon la revendication 1 en une quantité comprise entre 0,1 % et 20 % en poids.

- 5 5. Dispositif électroluminescent organique selon la revendication 3, comprenant en outre une couche qui contient un dérivé tertiaire d'amine aromatique et / ou un dérivé phtalocyanine, la couche étant disposée entre la couche luminescente et l'anode.

- 10 6. Dispositif électroluminescent organique selon la revendication 4, comprenant en outre une couche qui contient un dérivé tertiaire d'amine aromatique et / ou un dérivé phtalocyanine, la couche étant disposée entre la couche luminescente et l'anode.

7. Dispositif électroluminescent organique selon l'une quelconque des revendications 3 à 6, émettant une lumière bleue.

15

20

25

30

35

40

45

50

55

Fig. 1

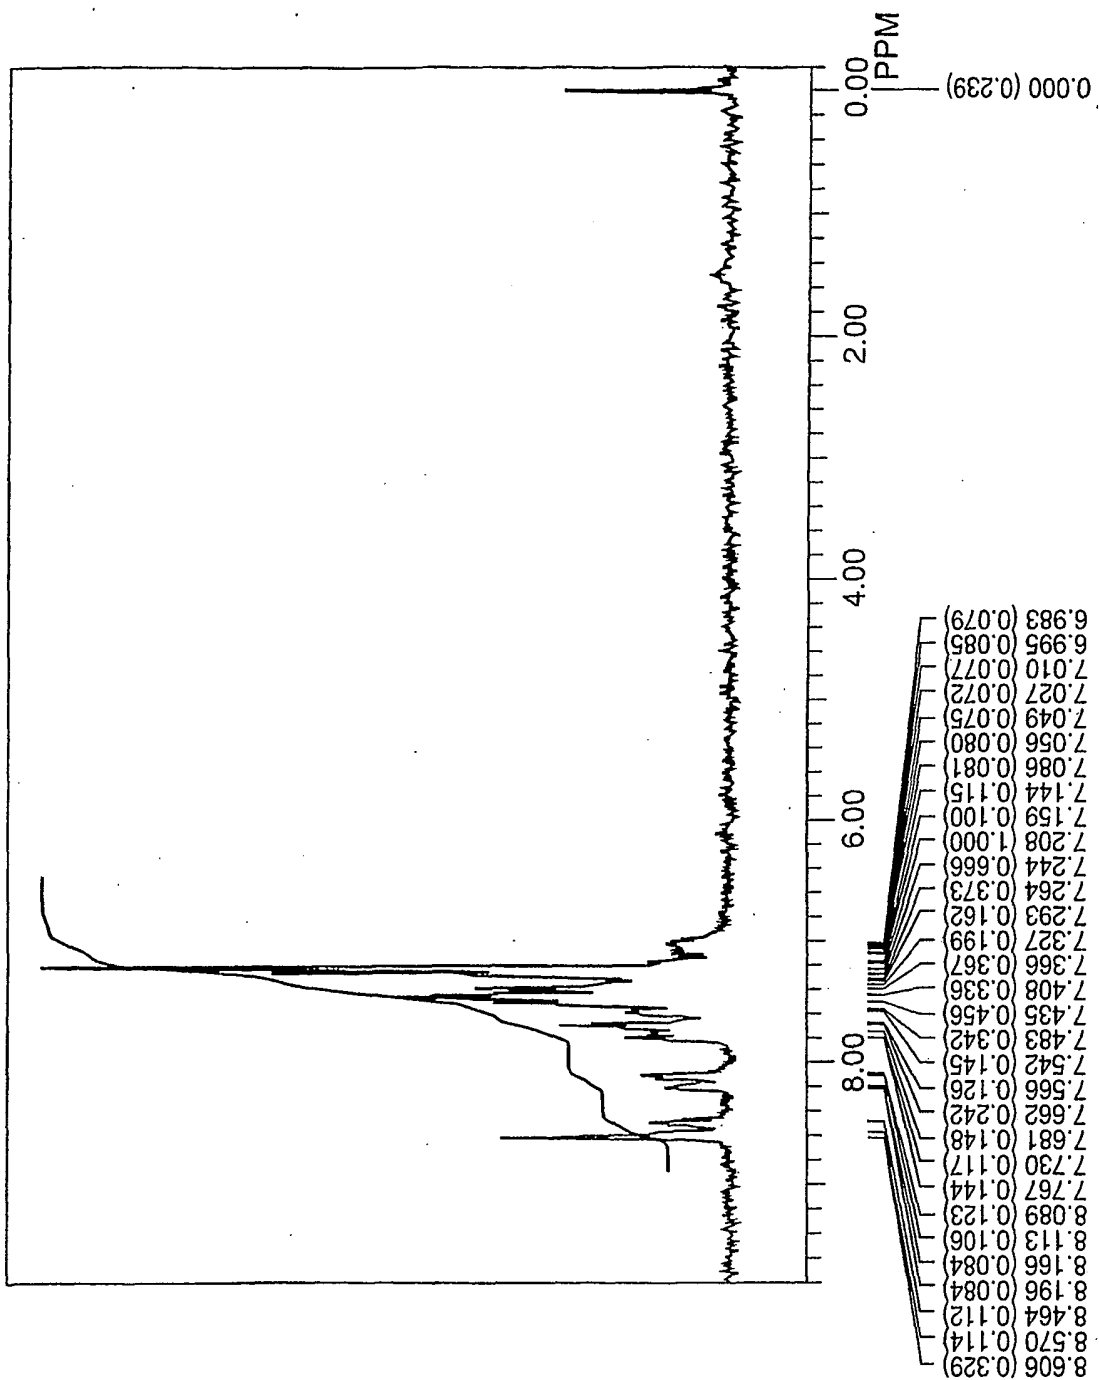


Fig. 2

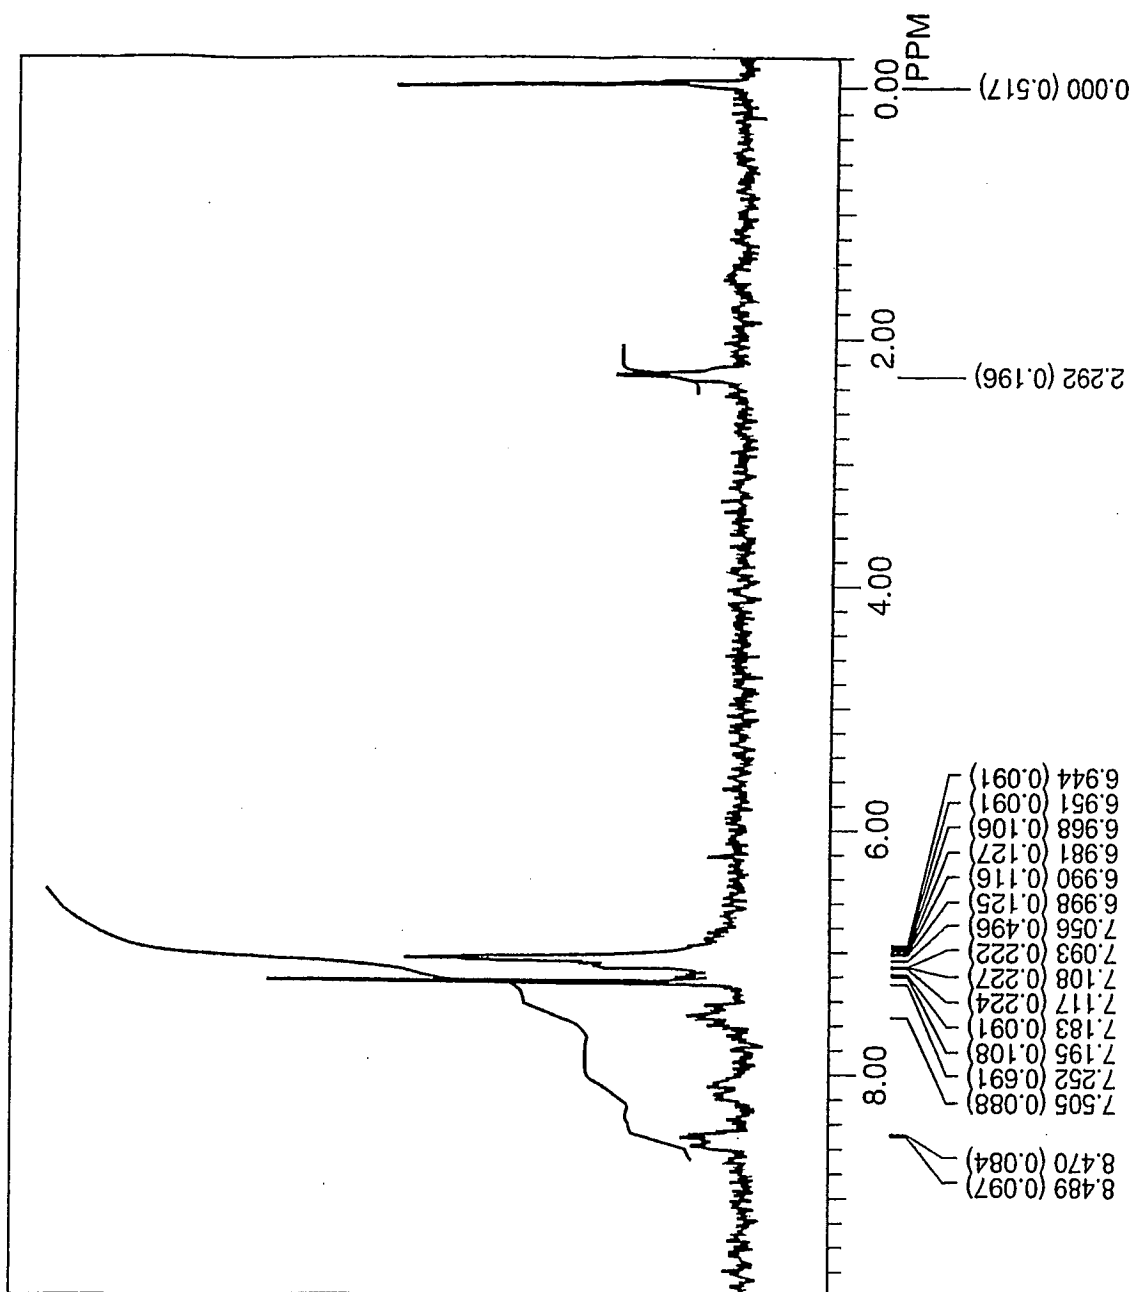


Fig. 3

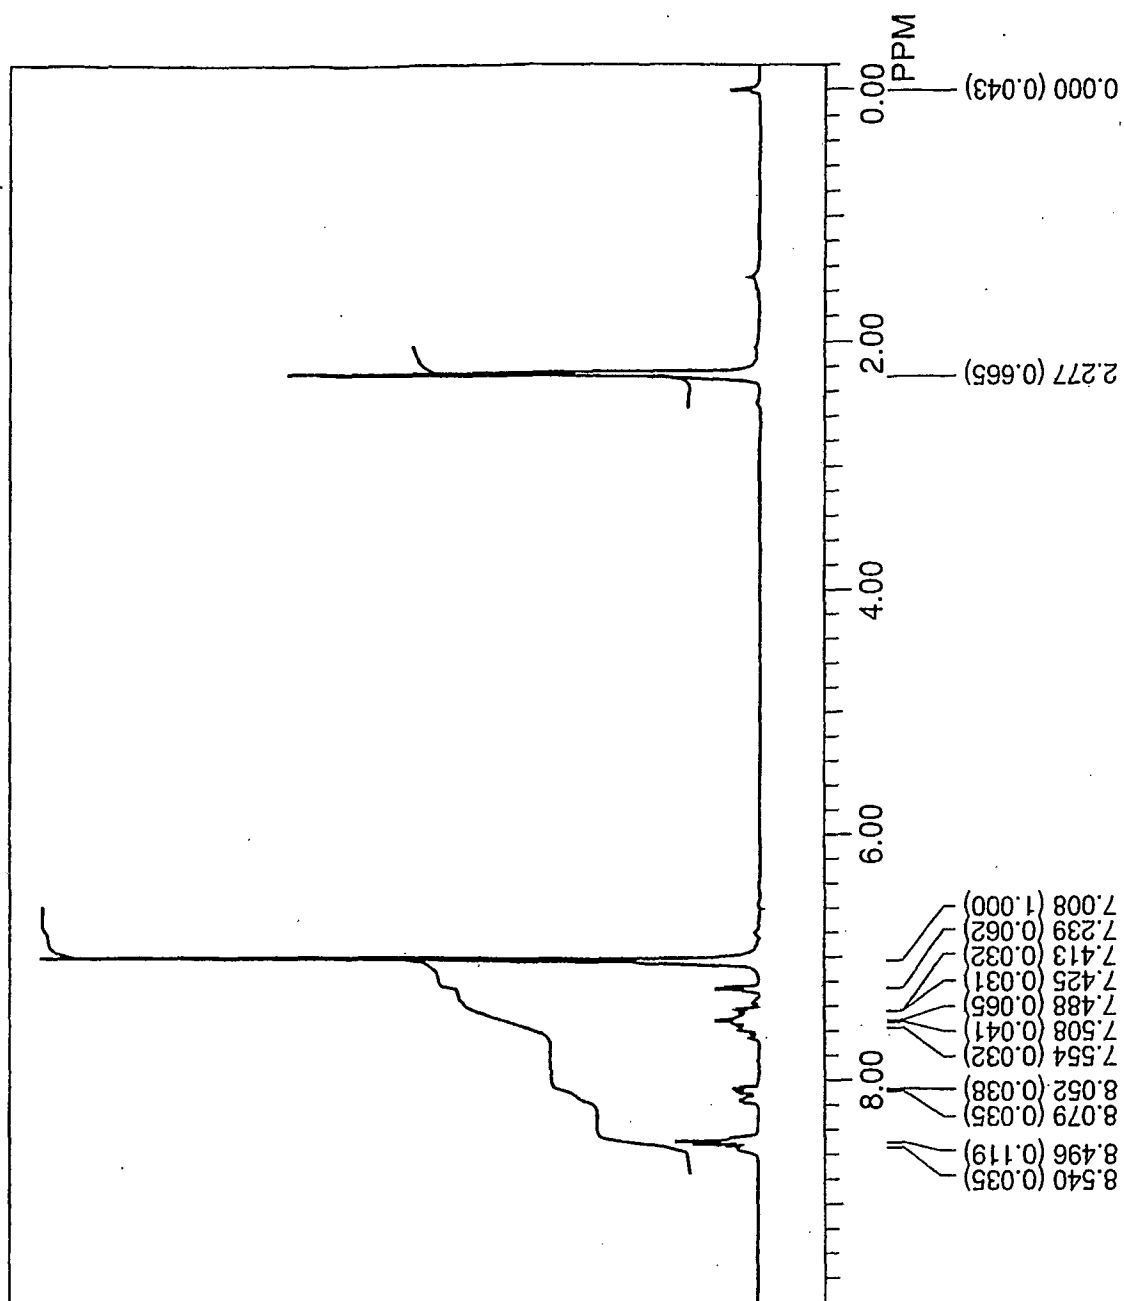


Fig. 4

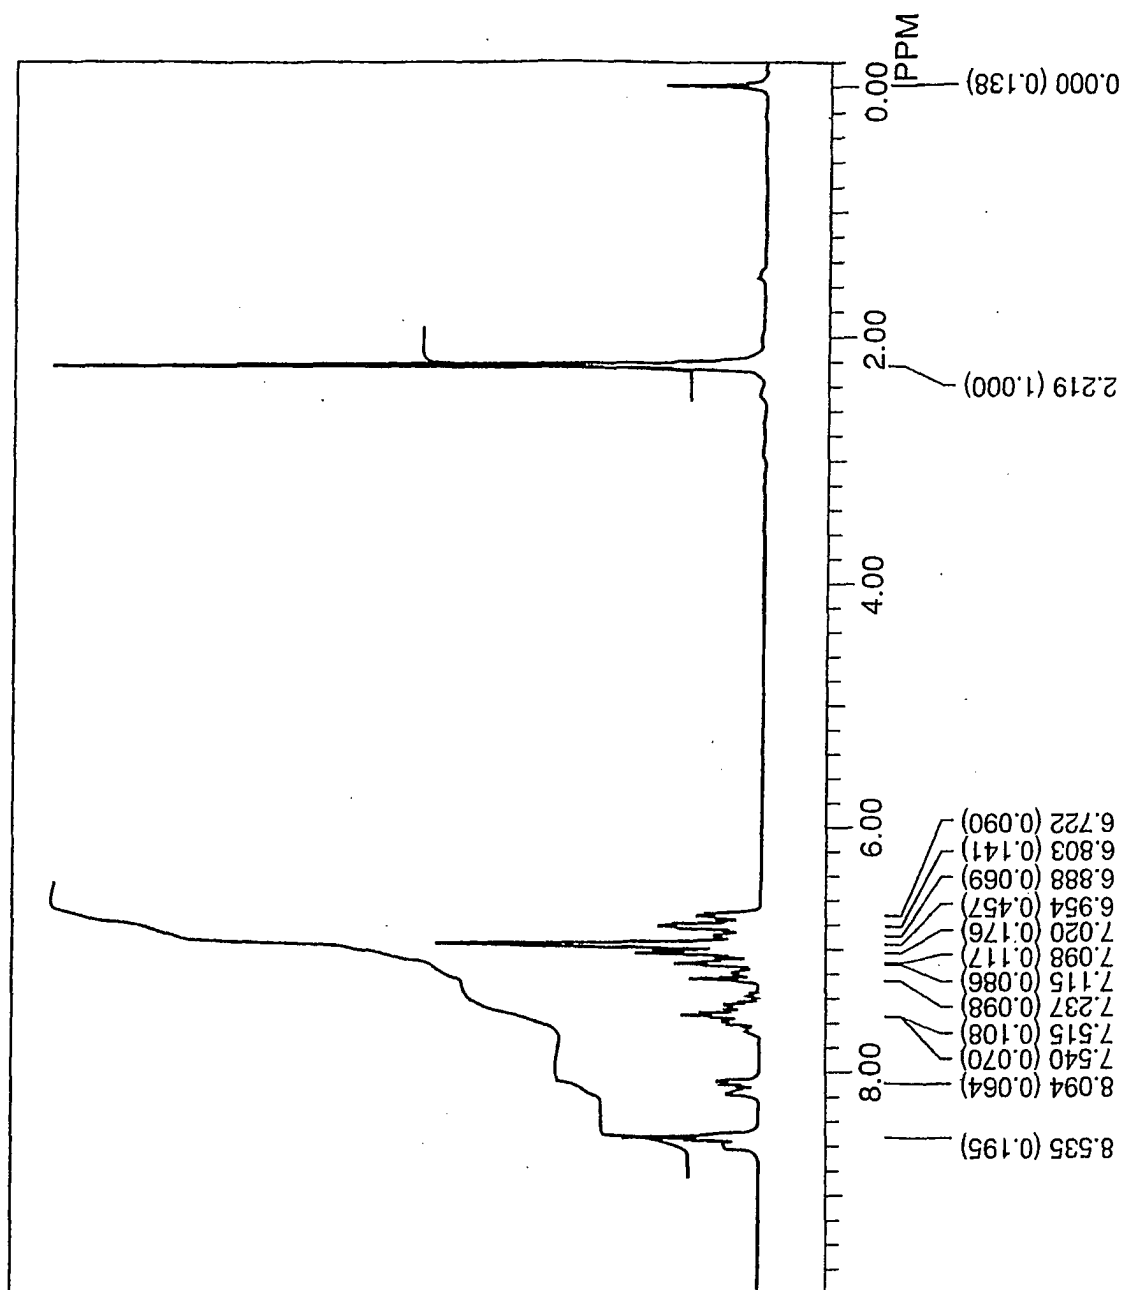


Fig. 5

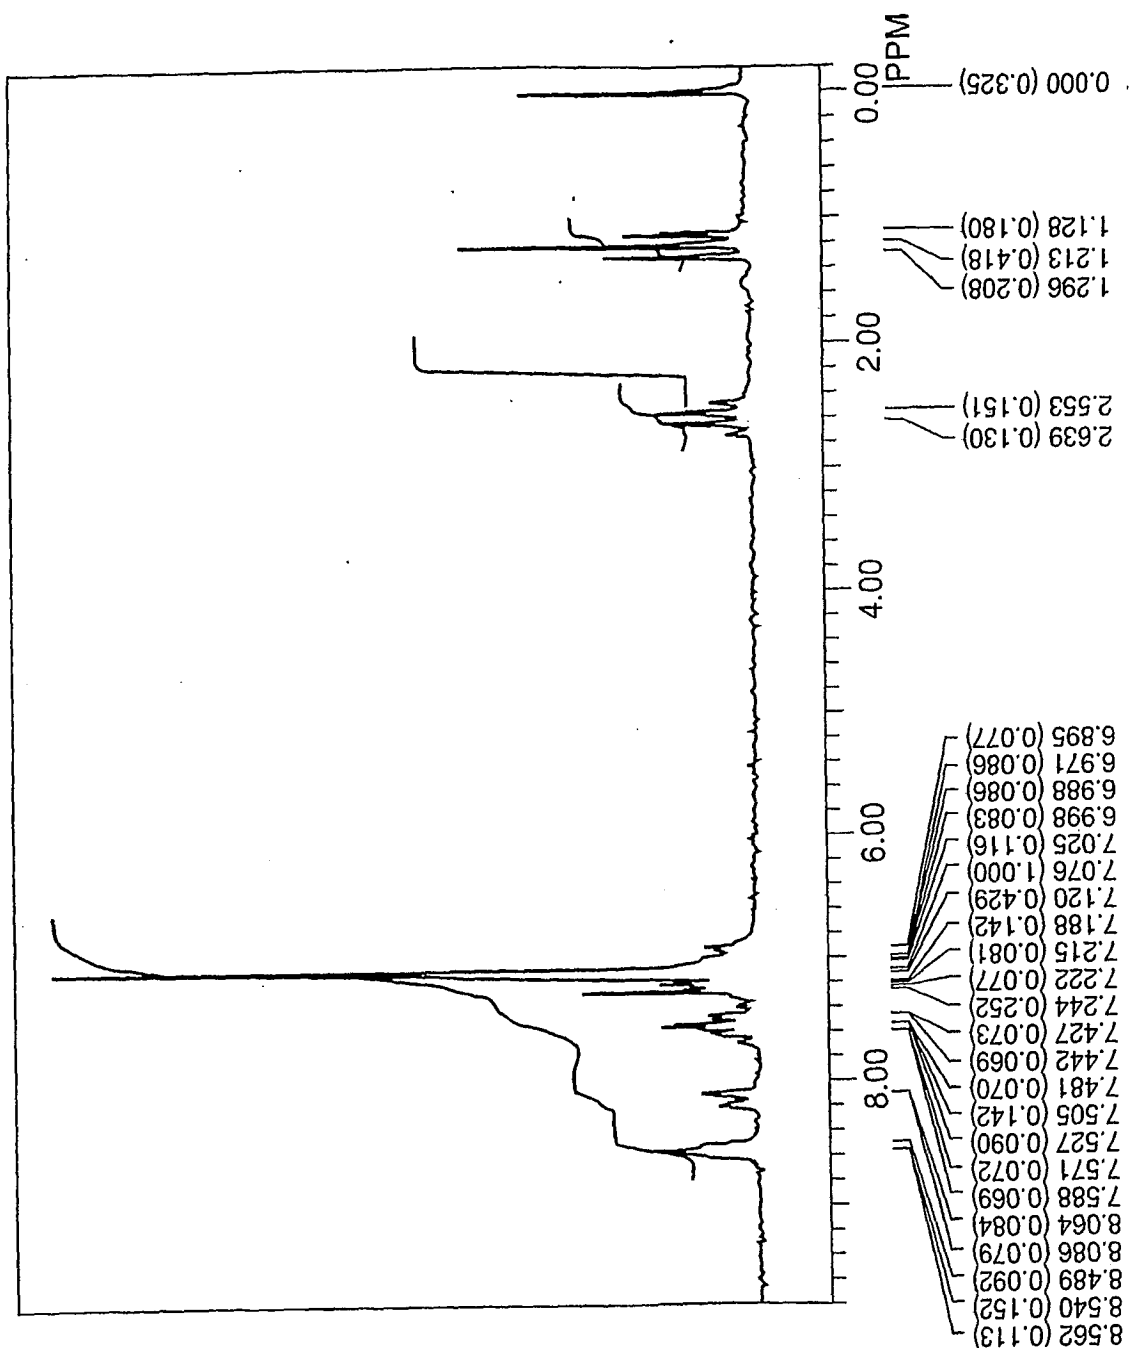


Fig. 6

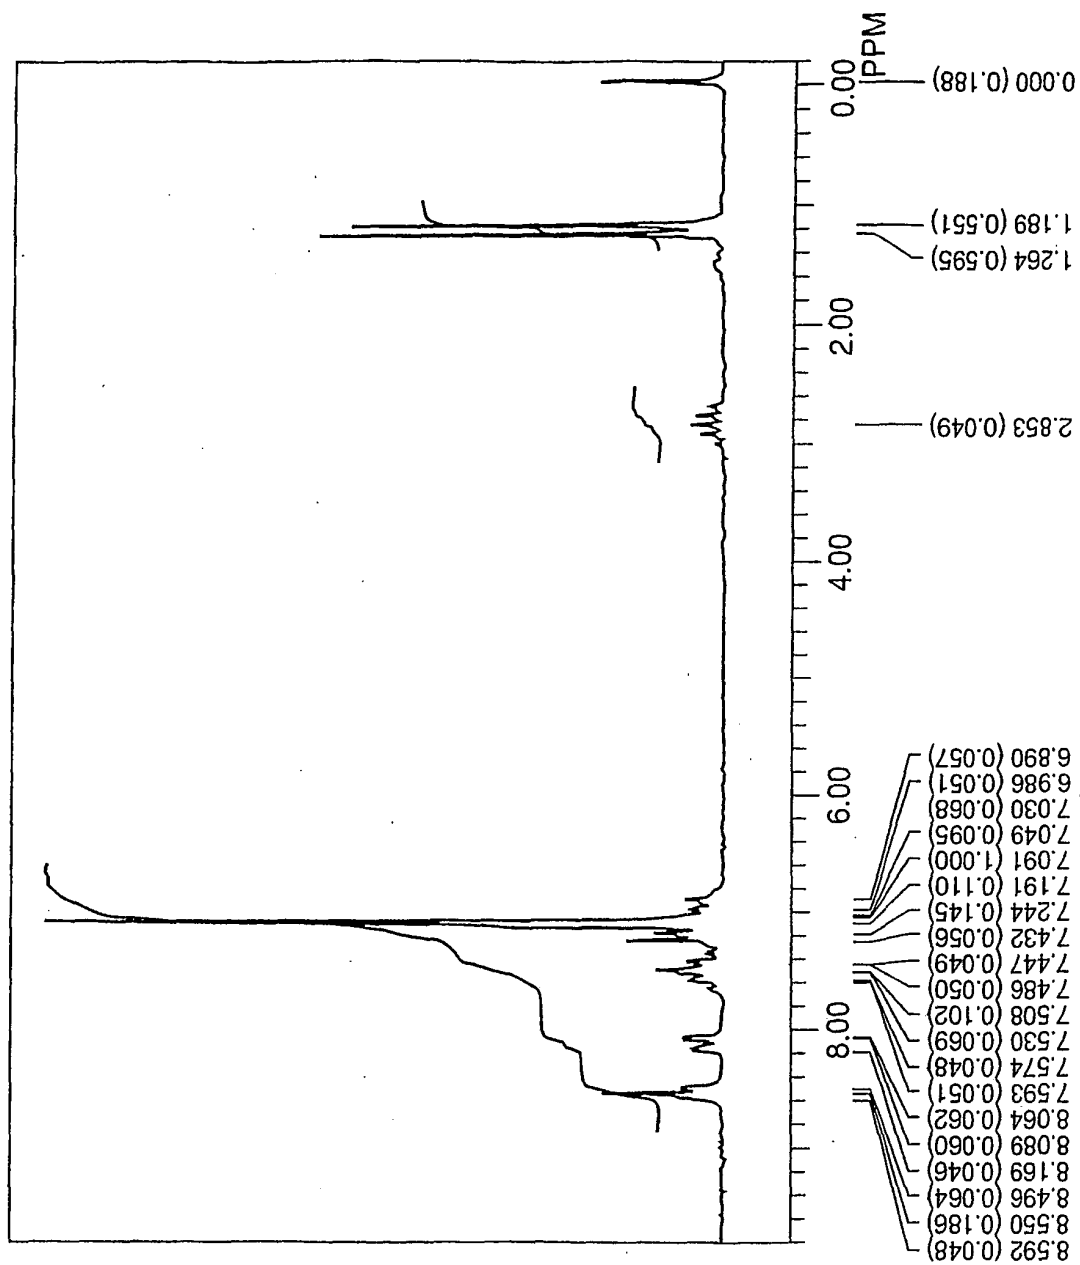


Fig. 7

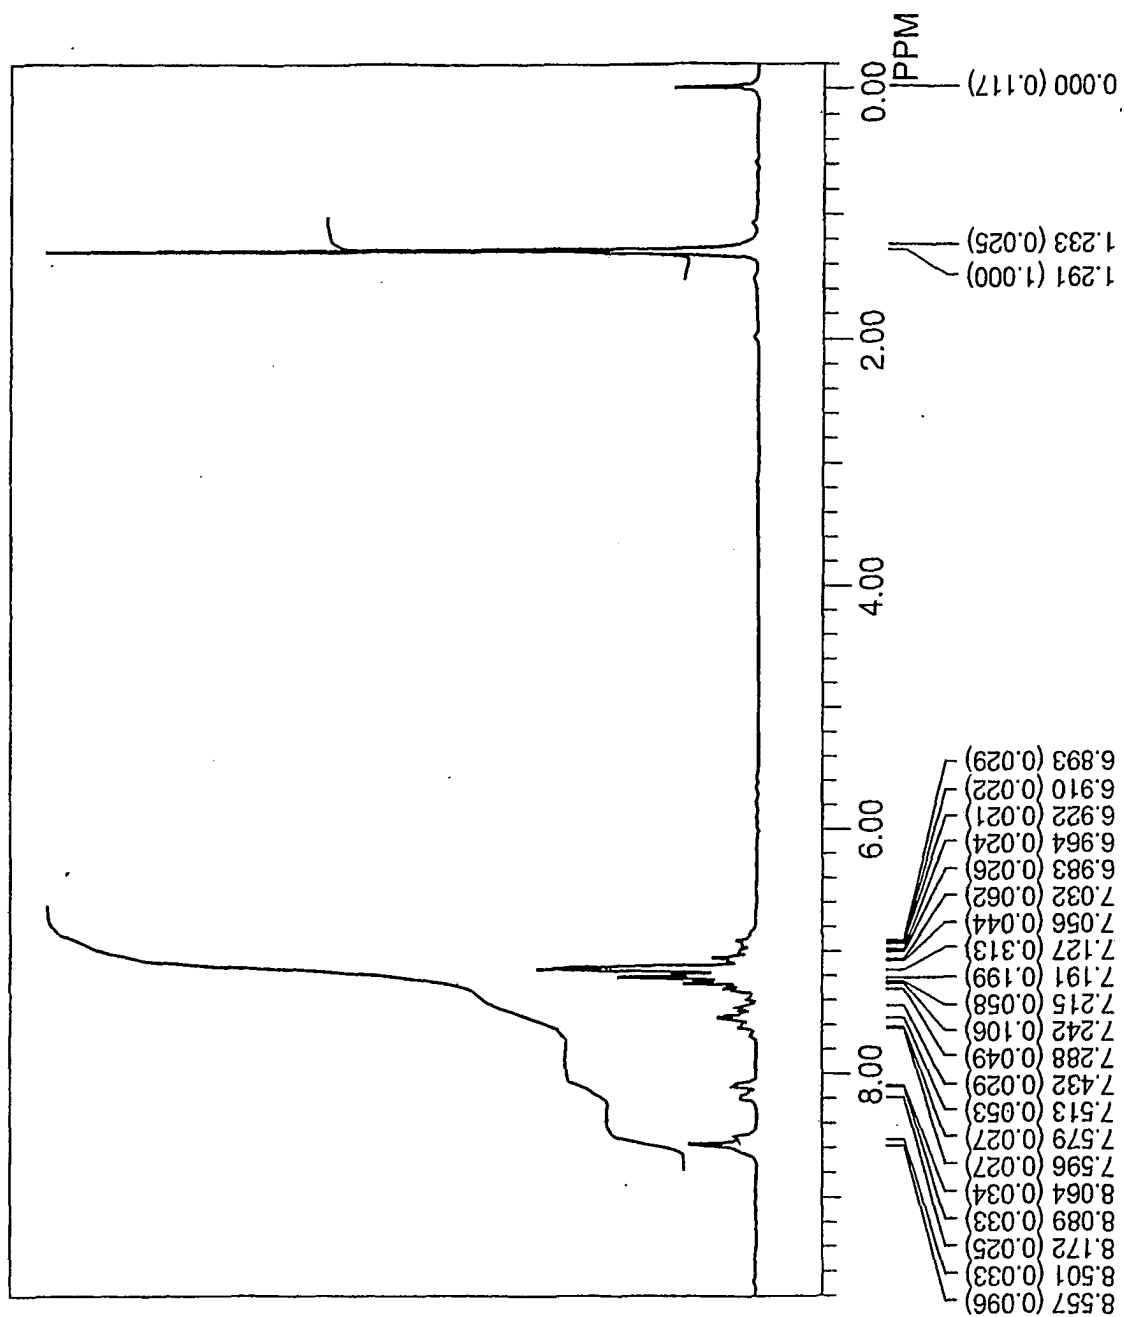


Fig. 8

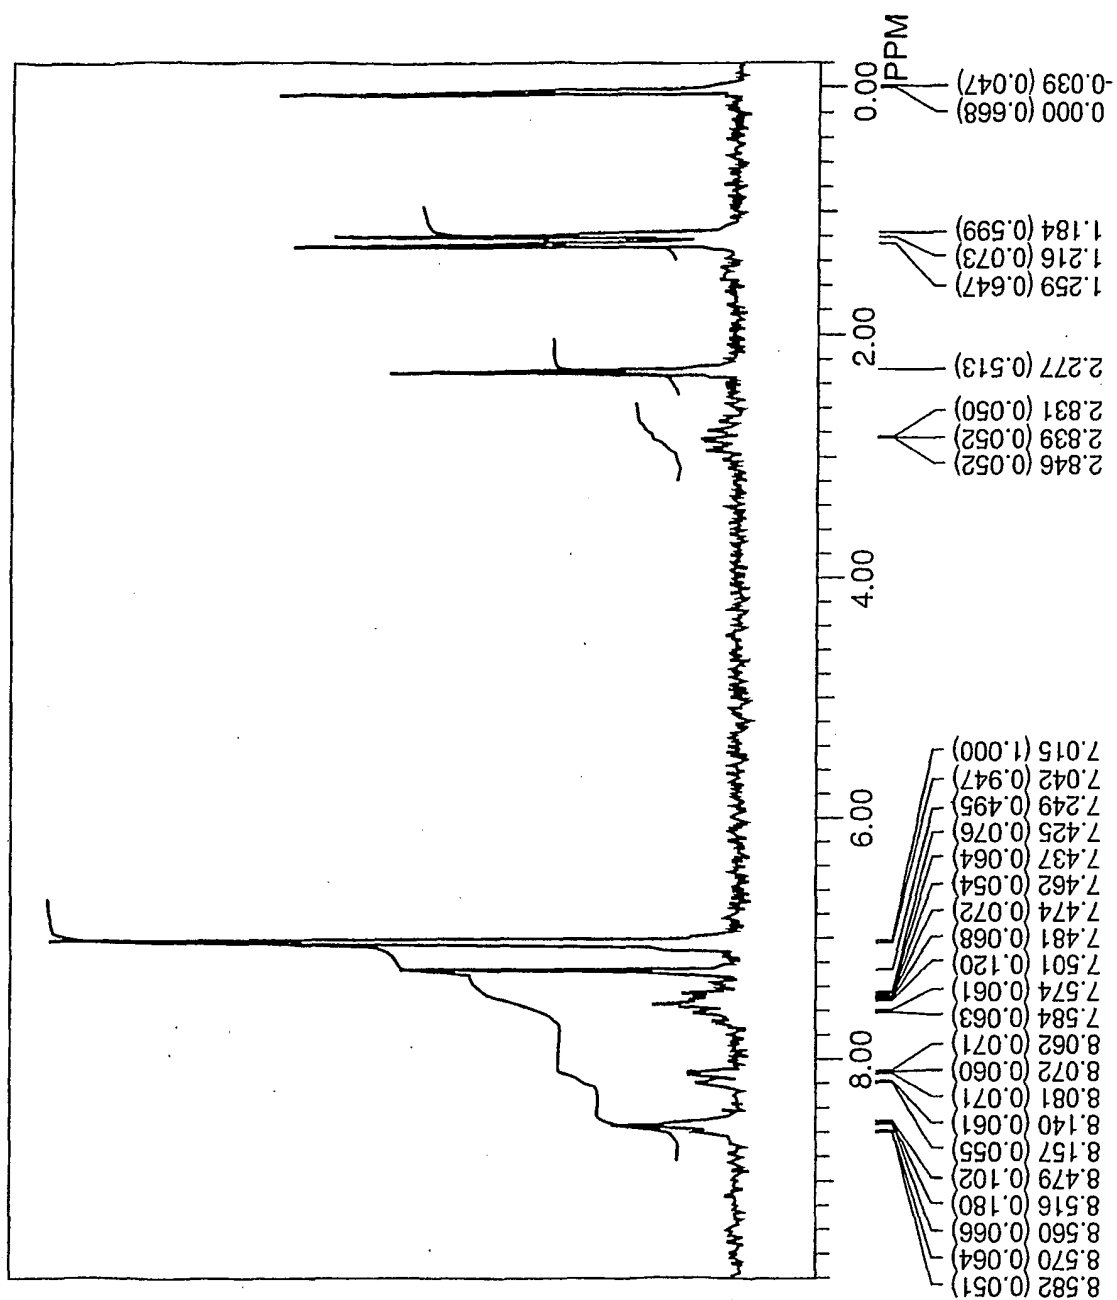


Fig. 9

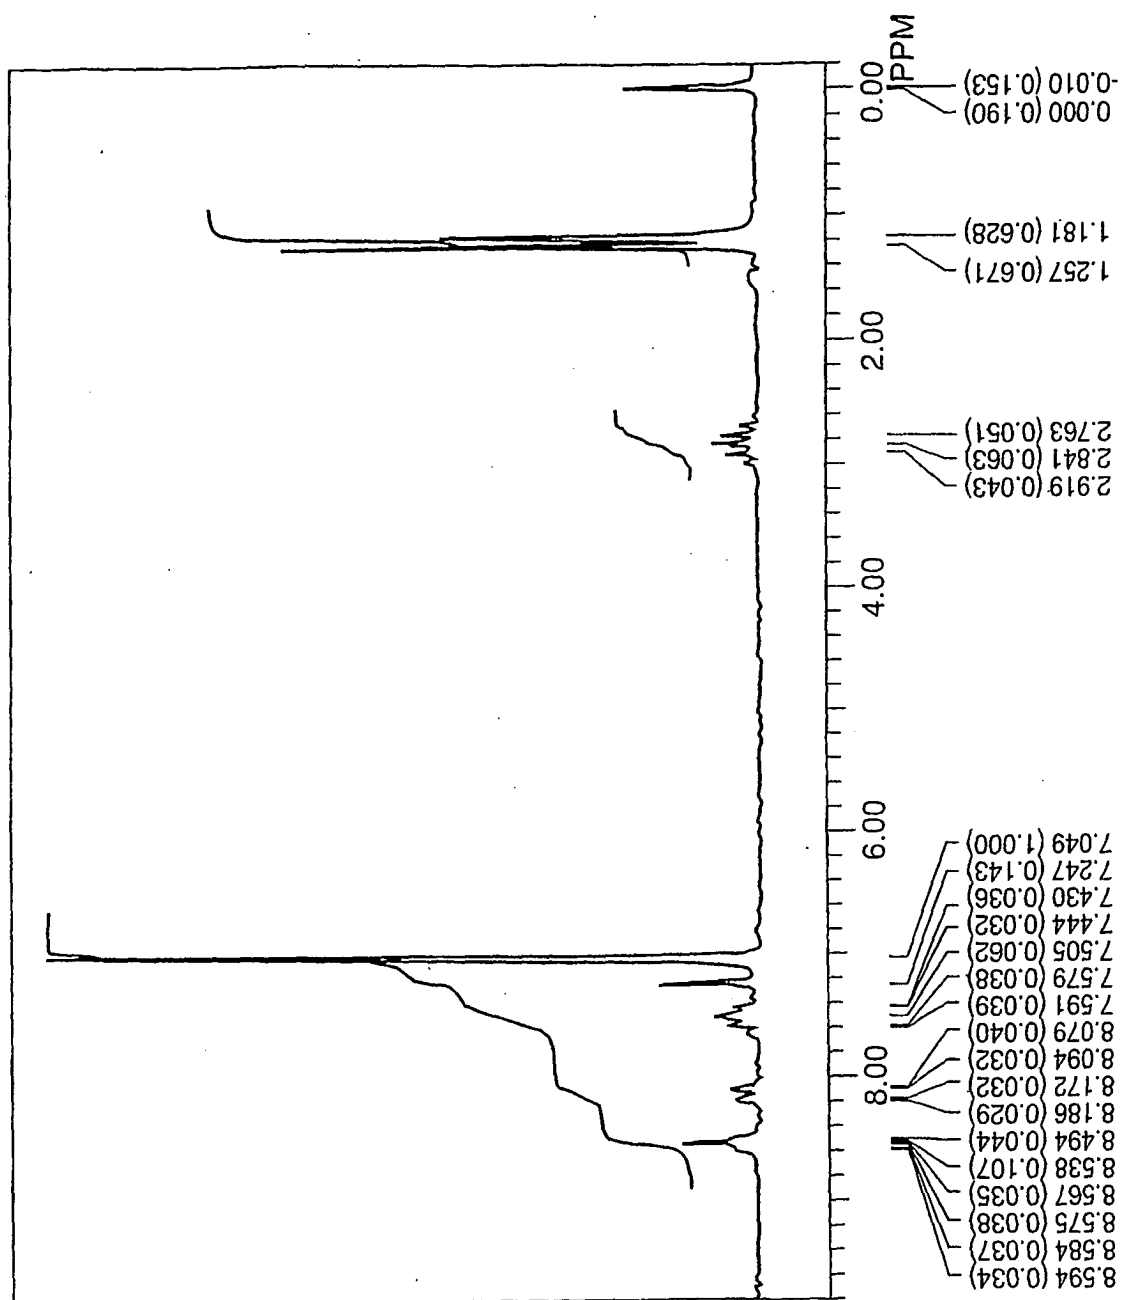


Fig. 10


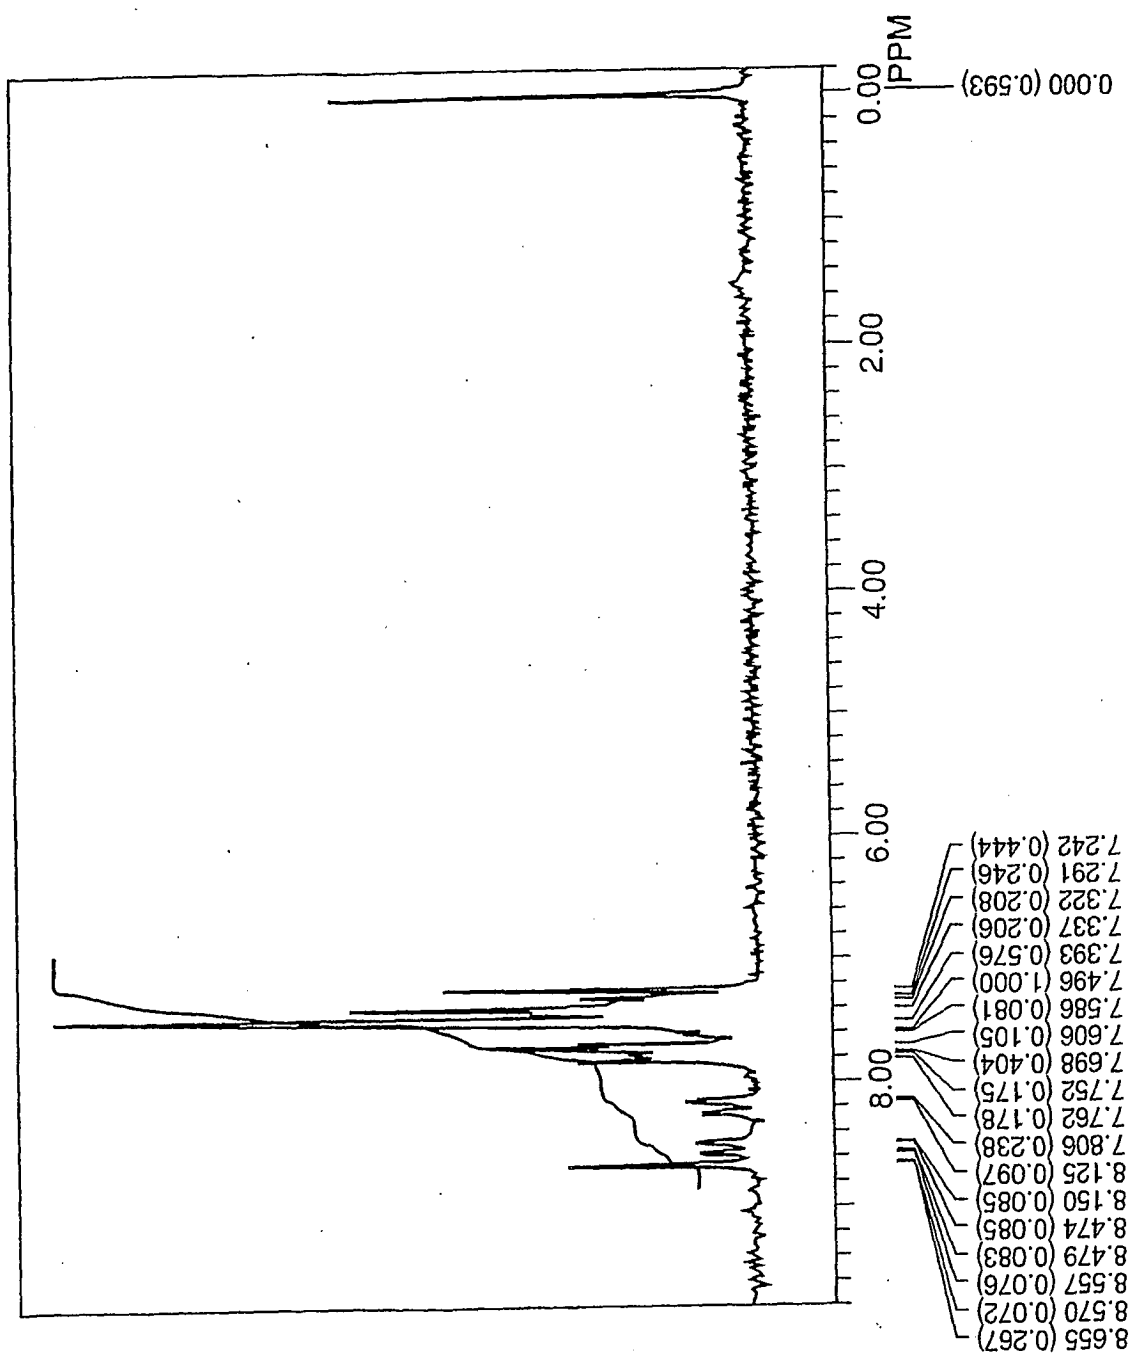


Fig. 11

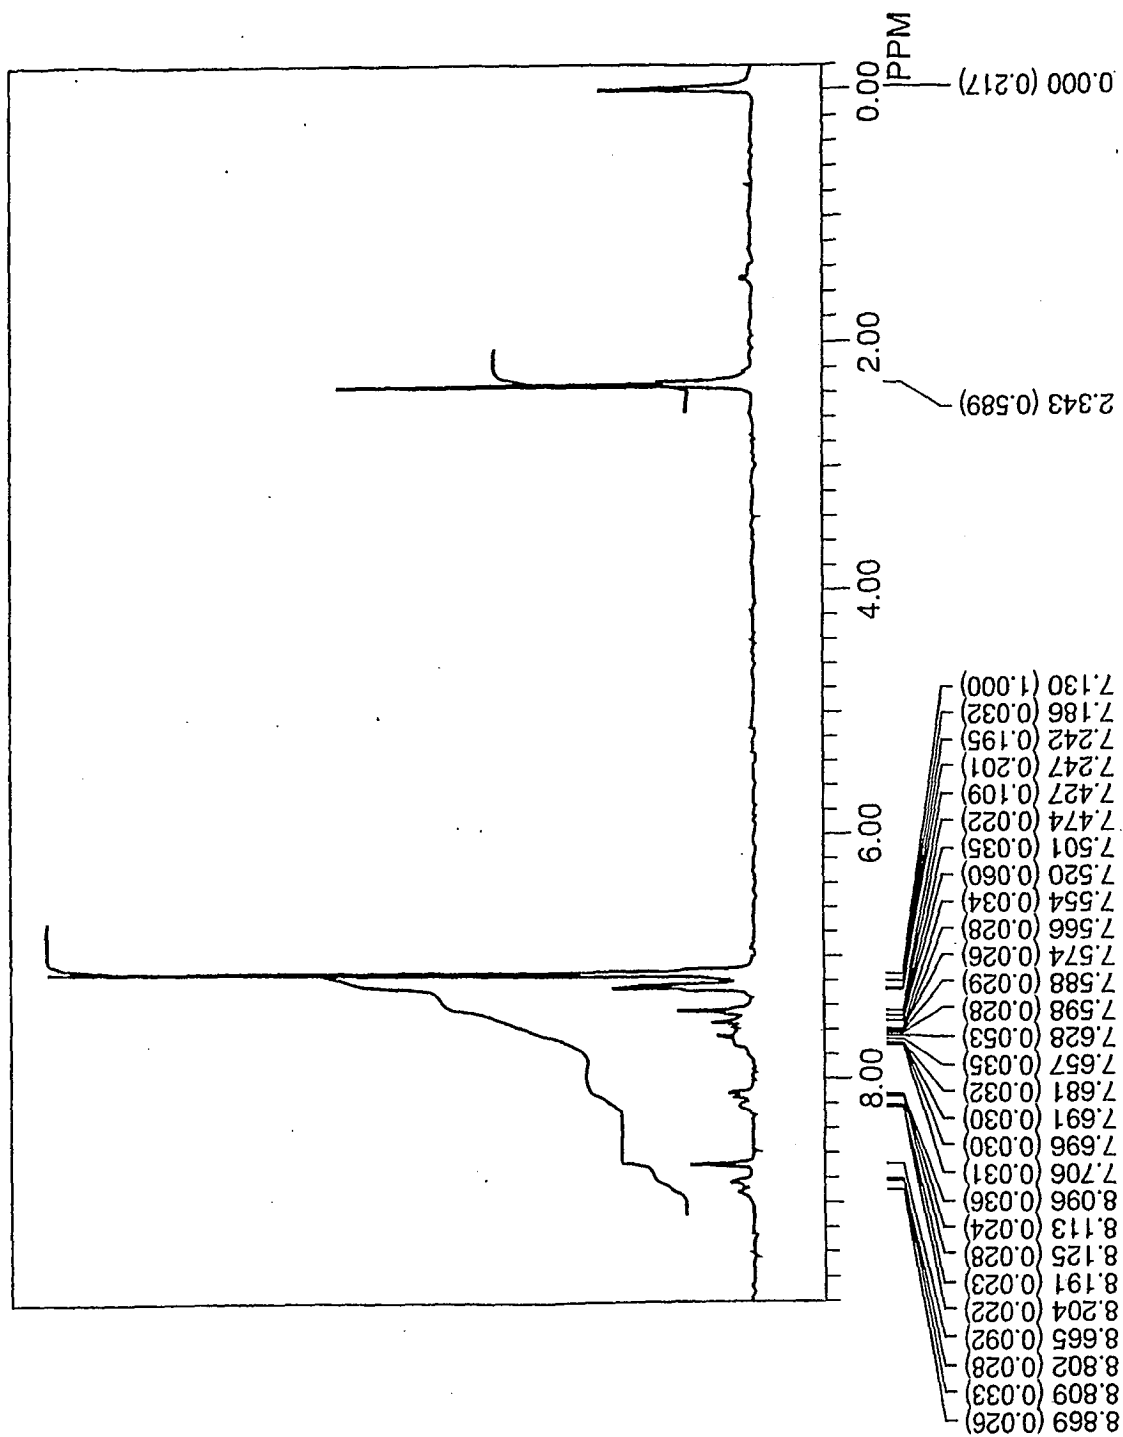

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 11003782 A [0004]
- JP 8012600 A [0004]
- WO 9406157 A [0004]
- JP 2001284050 A [0005]
- WO 2004018588 A1 [0006]
- EP 1061112 A [0007]

专利名称(译)	用于有机电致发光器件的材料和使用该材料的有机电致发光器件		
公开(公告)号	EP1561794B1	公开(公告)日	2010-06-30
申请号	EP2003754188	申请日	2003-10-20
[标]申请(专利权)人(译)	出光兴产株式会社		
申请(专利权)人(译)	出光兴产股份有限公司.		
当前申请(专利权)人(译)	出光兴产股份有限公司.		
[标]发明人	FUNAHASHI MASAKAZU		
发明人	FUNAHASHI, MASAKAZU		
IPC分类号	C09K11/06 H05B33/14 H05B33/22 H01L51/00 H01L51/30 H01L51/50		
CPC分类号	H05B33/14 C09K11/06 C09K2211/1011 C09K2211/1014 H01L51/0054 H01L51/0058 H01L51/006 H01L51/0071 H01L51/5012 Y10S428/917		
代理机构(译)	GILLE HRABAL STRUCK NEIDLEIN PROP ROOS		
优先权	2002327956 2002-11-12 JP		
其他公开文献	EP1561794A4 EP1561794A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种有机电致发光器件材料，其由具有特定结构的芳族胺衍生物组成，其中胺部分与chrysene部分连接；和有机电致发光器件，其具有阴极，阳极和介于阴极和阳极之间的一个或多个有机薄膜层，所述有机薄层至少包括发光层，其中至少一种有机薄膜薄膜层包含单组分材料形式的有机电致发光器件材料或多种组分的混合物。有机电致发光器件材料和包含该材料的有机电致发光器件具有长的使用寿命并且可以以高发射效率发射高色纯度的蓝光。

