



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 630 884 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.03.2006 Bulletin 2006/09

(51) Int Cl.:
H01L 51/40^(2006.01) H01L 27/00^(2006.01)

(21) Application number: **04090510.1**

(22) Date of filing: **23.12.2004**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL BA HR LV MK YU

(30) Priority: **30.08.2004 KR 2004068769**

(71) Applicant: **Samsung SDI Co., Ltd.**
Suwon-si,
Gyeonggi-do (KR)

(72) Inventors:
• **Kim, Mu-Hyun**
c/o Samsung SDI Co, Ltd
Yeongtong-gu
Suwon-si
Gyeonggi-do (KR)

• **Chin, Byung-Doo**
Legal & IP Team Corp. Plan. Staff
Yongin-si
Gyeonggi-do (KR)
• **Song, Myung-Won**
c/o Samsung SDI Co, Ltd
Yeongtong-gu
Gyeonggi-do (KR)
• **Lee, Seong-Taek**
c/o Samsung SDI Co, Ltd
Yeongtong-gu
Suwon-si
Gyeonggi-do (KR)

(74) Representative: **Hengelhaupt, Jürgen et al**
Anwaltskanzlei
Gulde Hengelhaupt Ziebig & Schneider
Wallstrasse 58/59
10179 Berlin (DE)

(54) **Laser induced thermal imaging method and a method of fabricating organic light emitting display**

(57) A laser induced thermal imaging method includes preparing a donor element and a substrate; facing a transfer layer of the donor element to the substrate and

then patterning the transfer layer onto the substrate; and annealing the patterned substrate.

EP 1 630 884 A1

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 2004-68769, filed August 30, 2004, the disclosure of which is hereby incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention relates to a laser induced thermal imaging method and, more particularly, to a laser induced thermal imaging method which includes controlling aerial atmosphere in a device and annealing a transfer layer. The present invention relates to a laser induced thermal imaging for manufacturing of an organic EL display device.

2. Description of the Related Art

[0003] Of plat panel display devices, an organic light emitting display("OLED") device has a response speed of less than 1ms which is a high response speed, is low in power consumption, and has no viewing angle problem due to its self-emitting characteristic, and so has an advantage as a moving image medium regardless size of a device. Also, the OLED can be manufactured and a simplified manufacturing process based on the existing semiconductor process technique and thus it attracts public attention.

[0004] The OLED display device is classified into a polymer type device using a wet-dry etching technique and a monomer device having a deposition technique according to its material and a process.

[0005] Of methods of patterning a polymer or monomer light emitting layer, an ink jet printing method has a disadvantage in that a material of organic layers except the light emitting layer is restricted and a structure for the ink jet printing should be formed on a substrate. Also, in case of patterning the light emitting layer using the deposition process, it has a difficulty manufacturing a large-size device due to use of a metal mask.

[0006] As an alternative technology of such a patterning method, a laser induced thermal imaging ("LITI") has been recently developed.

[0007] The LITI is a technique that a laser generated from a light source is converted to heat energy and a pattern forming material is transferred to an object substrate using the heat energy to form a pattern. For the sake of the LITI, a donor element on which a transfer layer is formed and a substrate which is a subject are required. In the LITI, a donor film covers the acceptor substrate, and the donor film and the substrate are fixed to a stage.

[0008] The transfer layer is formed of an organic layer

and has a characteristic of being so sensitive to oxygen and water vapor. That is, if the organic layer is exposed to oxygen and water vapor, life span of the organic layer is lowered or light emitting efficiency and life span are lowered if the organic layer includes a light emitting layer, thereby lowering life span and light emitting efficiency of the OLED.

SUMMARY OF THE INVENTION

[0009] It is an object of the present invention to provide a laser induced thermal imaging ("LITI") method which can improve life span and light emitting efficiency of an OLED by controlling an aerial atmosphere in a device during a LITI process.

[0010] It is another object of the present invention to provide a LITI method which can improve life span and light emitting efficiency of an OLED by annealing a transferred organic layer.

[0011] A first aspect of the present invention provides a laser induced thermal imaging method, comprising: preparing a donor element and a substrate; facing a transfer layer of the donor element to the substrate and then patterning the transfer layer onto the substrate; and annealing the patterned substrate.

[0012] A second aspect of the present invention provides a laser induced thermal imaging method, comprising: preparing a donor element and a substrate; facing a transfer layer of the donor element to the substrate and then patterning the transfer layer onto the substrate; and annealing the patterned substrate at an inert gas atmosphere.

[0013] A third aspect of the present invention provides a laser induced thermal imaging method, comprising: preparing a donor element and a substrate; facing a transfer layer of the donor element to the substrate and then patterning the transfer layer onto the substrate, at an inert gas atmosphere; and annealing the patterned substrate at an inert gas atmosphere at an inert gas atmosphere.

[0014] A forth aspect of the present invention provides a method of fabricating an organic light emitting display, comprising: forming a transfer layer on a donor element; forming arrays having thin film transistors, capacitors and lines on a substrate; forming pixel electrodes contacted each of the thin film transistors; patterning the transfer layer on the substrate after laminating the donor element and the substrate; annealing the patterned transfer layer; and forming a opposite electrode on the annealed transfer layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The above and other features and advantages of the present invention will become more apparent to those of ordinary skill in the art by describing in detail preferred embodiments thereof with reference to the attached drawings in which:

FIG. 1 is a flow chart illustrating a laser induced thermal imaging ("LITI") process according to an embodiment of the present invention;

FIG. 2 is a cross-sectional view illustrating the donor element;

FIG. 3 is a cross-sectional view illustrating a unit pixel of the substrate having the predetermined layer formed thereon;

FIG. 4 is a cross-sectional view illustrating a unit pixel formed by the LITI; and

FIG. 5 is a graph illustrating a characteristic of the OLED according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0016] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, the thickness of layers and regions are exaggerated for clarity. Like numbers refer to like elements throughout the specification.

[0017] FIG. 1 is a flow chart illustrating a laser induced thermal imaging ("LITI") process according to an embodiment of the present invention.

[0018] Referring to FIG. 1, a donor element a having a transfer layer and a substrate b having a predetermined layer are prepared. The transfer layer of the donor element is located to face to the predetermined layer of the substrate, and then the transfer layer is patterned in a laser irradiating device to perform a laser induced thermal imaging process c. After the patterning, the donor element having the transfer layer is removed, and the substrate is annealed. After the annealing process, an organic layer or a counter electrode is formed on the substrate having the transfer layer and then sealed, thereby completing an OLED.

[0019] FIGs. 2 to 4 are cross-sectional views illustrating respective steps of the LITI process according to the present invention.

[0020] FIG. 2 is a cross-sectional view illustrating the donor element which is labeled at "a" in FIG.1.

[0021] Referring to FIG. 2, the donor element 100 has a structure that a plurality of layers formed on a base substrate 110. That is, the donor element includes the base substrate 110 and a light-to-heat converting layer 120 formed on the base substrate 110 and a transfer layer 140.

[0022] The base substrate 110 may be framed one and may have a flexible or hard material. If the base substrate 110 is too thin, it is difficult to handle, and if it is too thick, it may have a difficulty conveying a donor film due to its heavy weight. Preferably, a thickness of the base sub-

strate 110 is in a range of 20 to 200 μm .

[0023] The light-to-heat converting layer 120 is formed on the base substrate 110, and the transfer layer 140 is formed on the light-to-heat converting layer 140.

5 [0024] The light-to-heat converting layer 120 serves to convert a laser irradiated from the laser irradiating device to the heat energy, and the heat energy changes adhesive force between the transfer layer 140 and the light-to-heat converting layer 120 to thereby transfer the transfer layer 140 to the lower substrate.

10 [0025] To prevent damage of a transfer material and effectively control the adhesive force of the donor film, a buffer layer 130 may be interposed between the light-to-heat converting layer 120 and the transfer layer 140.

15 [0026] The transfer layer 140 may be a light emitting layer of the OLED. The transfer layer 140 may be one selected from a group comprised of a hole injecting layer, a hole transporting layer, a hole blocking layer, and an electron injecting layer.

20 [0027] The transfer layer 140 may be a monomer organic layer.

25 [0028] FIG. 3 is a cross-sectional view illustrating a unit pixel of the substrate having the predetermined layer formed thereon which is labeled at "b" in FIG. 1.

[0029] Referring to FIG. 3, a process of forming the predetermined layer on the substrate 210 may include forming a thin film transistor ("TFT") E having a gate electrode 250, a source electrode 270a, and a drain electrode 270b, forming a pixel electrode layer 290 connected to the TFT E, and forming a pixel defining layer 295.

30 [0030] In more detail, a semiconductor layer 230 is formed on the substrate 210. In order to prevent impurities existing on the substrate 210 from flowing into the semiconductor layer 230, a buffer layer 220 may be formed between the semiconductor layer 230 and the substrate 210. A gate insulating layer 240 is formed on the semiconductor layer 230, and the gate electrode 250 is formed on the gate insulating layer 240. An interlayer insulator 260 is formed on the gate electrode 250 using a typical material, and contact holes are formed to expose source and drain regions of the semiconductor layer 230. A conductive material layer is formed on the interlayer insulator 260 and patterned to form the source and drain electrodes 270a and 270b which are connected to the source and drain regions, respectively.

35 [0031] A planarization layer 280 is formed above the substrate 210 having the source and drain electrodes 270a and 270b, and a via hole is formed in the planarization layer 280 to expose a portion of the drain electrode 270b. An inorganic passivation layer may be formed before forming the planarization layer 280 to protect the lower layers from humidity, impurities and a wet-etching process. A conductive material layer is deposited on the planarization layer 280 having the via hole and patterned to form the pixel electrode 290. The pixel defining layer 290 is formed to expose a portion of the pixel electrode 290 to thereby define a region on which an organic layer

in a unit pixel will be formed.

[0032] FIG. 4 is a cross-sectional view illustrating a unit pixel formed by the LITI which is labeled at "c" in FIG. 1.

[0033] A laser 600 is irradiated to a region to be patterned of the substrate 200 and the donor element 100.

[0034] Before forming the LITI process, the donor element 100 and the substrate 200 may be subjected to a lamination process. Due to the lamination process, the donor element 100 and the substrate 200 are fixed, and bubbles between the donor element 100 and the substrate 200 are removed by a pressurizing process for the lamination process. Therefore, it is preferred that the lamination process is performed.

[0035] After irradiating the laser 600, the adhesive force between the transfer layer 140a and the pixel electrode 290 becomes stronger than the adhesive force between the buffer layer 130 and the transfer layer 140, the transfer layer 140a of the region irradiated by the laser 600 is separated from the buffer layer 130 and patterned, i.e., patterned onto the pixel electrode 290. The patterned transfer layer 140a may be patterned into a stripe type or a delta type according to a type of a unit pixel.

[0036] Patterning the transfer layer onto the substrate may be performed in a vacuum state of less than 10^{-2} Torr. The transfer layer 140a may be a monomer organic layer.

[0037] Since the patterning is performed in a vacuum state, it is possible to prevent contamination substances which may occur on the pixel electrode and the organic layer during the patterning process, thereby increasing life span of the organic layer including the light emitting layer.

[0038] After the patterning process, the substrate 200 is removed from the donor film 100.

[0039] The transfer layer of the patterned substrate may be annealed.

[0040] The annealing process may be performed at an inert gas atmosphere.

[0041] It is preferred that the annealing process at inert gas atmosphere is performed after controlling density of water vapor to be less than 10ppm. Also, it is preferred that the annealing process at inert gas atmosphere is performed after controlling oxygen density to be less than 50ppm. It is because even though the device in which the annealing process is performed has an inert gas atmosphere, since it is difficult to perfectly keep out oxygen and water vapor coming in from an external portion, it is preferred to control an inflow amount of oxygen or water vapor in the device in which the annealing process is performed as described above.

[0042] As another embodiment of the present invention, regardless of atmosphere during the process of patterning the transfer layer onto the substrate, the transfer layer of the patterned substrate may be annealed at an inert gas atmosphere. The transfer layer 140a may be a monomer organic layer.

[0043] It is preferred that the annealing process at inert

gas atmosphere is performed after controlling density of water vapor to be less than 10ppm. Also, it is preferred that the annealing process at inert gas atmosphere is performed after controlling oxygen density to be less than 50ppm.

[0044] Due to the annealing process, inert gases such as argon and nitrogen which remains on the transferred organic layer are removed. Also, by controlling a partial pressure of oxygen and water vapor during the annealing process, a characteristic of the organic layer is more improved. Therefore, life span of the organic layer is increased, and a life span characteristic of the OLED is improved.

[0045] As another embodiment of the present invention, the process of patterning the transfer layer onto the substrate may be performed at inert gas atmosphere. The transfer layer 140a may be a monomer organic layer.

[0046] It is preferred that the patterning process at inert gas atmosphere is performed after controlling density of water vapor to be less than 10ppm. Also, it is preferred that the patterning process at inert gas atmosphere is performed after controlling oxygen density to be less than 50ppm. Therefore, by controlling a partial pressure of oxygen and water vapor during the patterning process, the pixel electrode and the organic layer on the substrate may be protected during the patterning process, whereby life span of the organic layer including the light emitting layer is increased.

[0047] After the patterning process, the substrate 200 is removed from the donor film 100.

[0048] The substrate 200 on which the transfer layer 140a is formed may be annealed at an inert gas atmosphere.

[0049] It is preferred that the annealing process at inert gas atmosphere is performed after controlling density of water vapor to be less than 10ppm. Also, it is preferred that the annealing process at inert gas atmosphere is performed after controlling oxygen density to be less than 50ppm.

[0050] Due to the annealing process, inert gases such as argon and nitrogen which remains on the transferred organic layer are removed. Also, by controlling a partial pressure of oxygen and water vapor during the annealing process, a characteristic of the organic layer is more improved. Therefore, life span of the organic layer is increased, and a life span characteristic of the OLED is improved.

[0051] In all of the above described three embodiments, it is preferred that the process of annealing the transfer layer of the patterned substrate at inert atmosphere to protect the transfer layer is performed in a range of temperature of less than a glass transition temperature.

[0052] A counter electrode is formed on the patterned organic layer and then sealed, thereby completing the OLED.

[0053] FIG. 5 is a graph illustrating a characteristic of the OLED according to the present invention. The graph of FIG. 5 shows a variation of illumination with respect

to time.

[0054] Referring to FIG. 5, "1" denotes a variation of luminance after performing the patterning process of the light emitting layer at a N₂ atmosphere and thereafter the annealing process, "2" denotes a variation of luminance after performing the patterning process of the light emitting layer in a vacuum state and thereafter the annealing process, and "3" denotes a variation of luminance after performing the patterning process of the light emitting layer in a normal aerial atmosphere and thereafter the annealing process. "4" and "5" denotes one which does not perform the annealing process, where "4" denotes one which patterns the light emitting layer at a normal aerial atmosphere.

[0055] It can be seen that luminance characteristic of the OLEDs which have undergone the annealing process after the patterning of the light emitting layer is such that more than 50% of an initial luminance is maintained after 1,000 hours go by regardless of the atmosphere of the patterning process. That is, it can be seen that the light emitting layer which has undergone the annealing process is more improved in life span than the light emitting layer which has not undergone the annealing process.

[0056] Performing the annealing process after the patterning process at a N₂ atmosphere is similar to in luminance characteristic to performing the patterning process in a vacuum state. Therefore, it can be seen that the OLED of the present invention has improved life span compared to the conventional OLED.

[0057] As described above, the laser induced thermal image can protect the pixel electrode and the transferred organic layer from gases flowing into an inside of the device from an external portion by performing the patterning process in a vacuum state, and can also improve life span of the organic layer including the light emitting layer of the OLED manufactured thereby.

[0058] Also, by annealing the transferred organic layer regardless of the atmosphere of the patterning process, gases remaining on the transferred organic layer are removed, and by controlling a partial pressure of oxygen and water vapor during the annealing process, a characteristic of the organic layer can be more improved.

[0059] Further, by performing the whole process of the patterning and the annealing at inert atmosphere and controlling a partial pressure of oxygen and water vapor, a life span characteristic of the organic layer can be more improved.

[0060] Therefore, a life span characteristic of the OLED can be more improved.

Claims

1. A laser induced thermal imaging method, comprising:

preparing a donor element and a substrate;
facing a transfer layer of the donor element to

the substrate and then patterning the transfer layer onto the substrate; and
annealing the patterned substrate.

2. The method of claim 1, wherein the steps are carried out in a vacuum state.
3. The method of claim 2, wherein the vacuum state has a vacuum degree of 10⁻² Torr.
4. The method of claim 1, wherein the transfer layer is a monomer organic layer.
5. The method of claim 1, wherein the donor element is a framed one.
6. The method of claim 1, further comprising, laminating the donor element and the substrate before patterning the transfer layer.
7. The method of claim 1, wherein the transfer layer is a light emitting layer of an OLED.
8. The method of claim 1, wherein the annealing process is performed at an inert gas atmosphere.
9. The method of claim 8, wherein the annealing process at the inert gas atmosphere is performed after controlling water vapor density in the inert gas to be less than 10ppm.
10. The method of claim 8, wherein the annealing process at the inert gas atmosphere is performed after controlling oxygen density in the inert gas to less than 50ppm.
11. The method of claim 8, wherein the annealing process at the inert gas atmosphere is performed in a range of a temperature of less than a glass transition temperature of the transfer layer.
12. A laser induced thermal imaging method, comprising:
preparing a donor element and a substrate;
facing a transfer layer of the donor element to the substrate and then patterning the transfer layer onto the substrate; and
annealing the patterned substrate at an inert gas atmosphere.
13. The method of claim 12, wherein the annealing process at the inert gas atmosphere is performed after controlling water vapor density in the inert gas to be less than 10ppm.
14. The method of claim 12, wherein the annealing process at the inert gas atmosphere is performed after

controlling oxygen density in the inert gas to less than 50ppm.

15. The method of claim 12, wherein the annealing process at the inert gas atmosphere is performed in a range of a temperature of less than a glass transition temperature of the transfer layer. 5
16. The method of claim 12, wherein the donor element is a framed one. 10
17. The method of claim 12, further comprising, laminating the donor element and the substrate before patterning the transfer layer. 15
18. The method of claim 12, wherein the transfer layer is a light emitting layer of an OLED.
19. A laser induced thermal imaging method, comprising: 20
 - preparing a donor element and a substrate;
 - facing a transfer layer of the donor element to the substrate and then patterning the transfer layer onto the substrate, at an inert gas atmosphere; and
 - annealing the patterned substrate at an inert gas atmosphere at an inert gas atmosphere.
20. The method of claim 19, wherein the annealing process at the inert gas atmosphere is performed after controlling water vapor density in the inert gas to be less than 10ppm. 30
21. The method of claim 19, wherein the annealing process at the inert gas atmosphere is performed after controlling oxygen density in the inert gas to less than 50ppm. 35
22. The method of claim 19, wherein the annealing process at the inert gas atmosphere is performed in a range of a temperature of less than a glass transition temperature of the transfer layer. 40
23. The method of claim 19, wherein the donor element is a framed one. 45
24. The method of claim 19, further comprising, laminating the donor element and the substrate before patterning the transfer layer. 50
25. The method of claim 19, wherein the transfer layer is a light emitting layer of an OLED.
26. The method of claim 25, wherein the transfer layer includes one or more selected from a group comprised of a hole injecting layer, a hole transporting layer, a hole blocking layer, and an electron injecting

layer.

27. A method of fabricating an organic light emitting display, comprising:
 - forming a transfer layer on a donor element;
 - forming arrays having thin film transistors, capacitors and lines on a substrate;
 - forming pixel electrodes contacted each of thin film transistors;
 - patterning the transfer layer on the substrate after laminating the donor element and the substrate;
 - annealing the patterned transfer layer; and
 - forming a opposite electrode on the annealed transfer layer.
28. The method of claim 27, wherein the steps are carried out in a vacuum state.
29. The method of claim 27, wherein the annealing process is performed at an inert gas atmosphere.
30. The method of claim 27, wherein the patterning process is performed at an inert gas atmosphere.
31. The method of claim 27, wherein the annealing process at the inert gas atmosphere is performed after controlling water vapor density in the inert gas to be less than 10ppm.
32. The method of claim 27, wherein the annealing process at the inert gas atmosphere is performed after controlling oxygen density in the inert gas to less than 50ppm.
33. The method of claim 27, wherein the annealing process at the inert gas atmosphere is performed in a range of a temperature of less than a glass transition temperature of the transfer layer.

FIG. 1

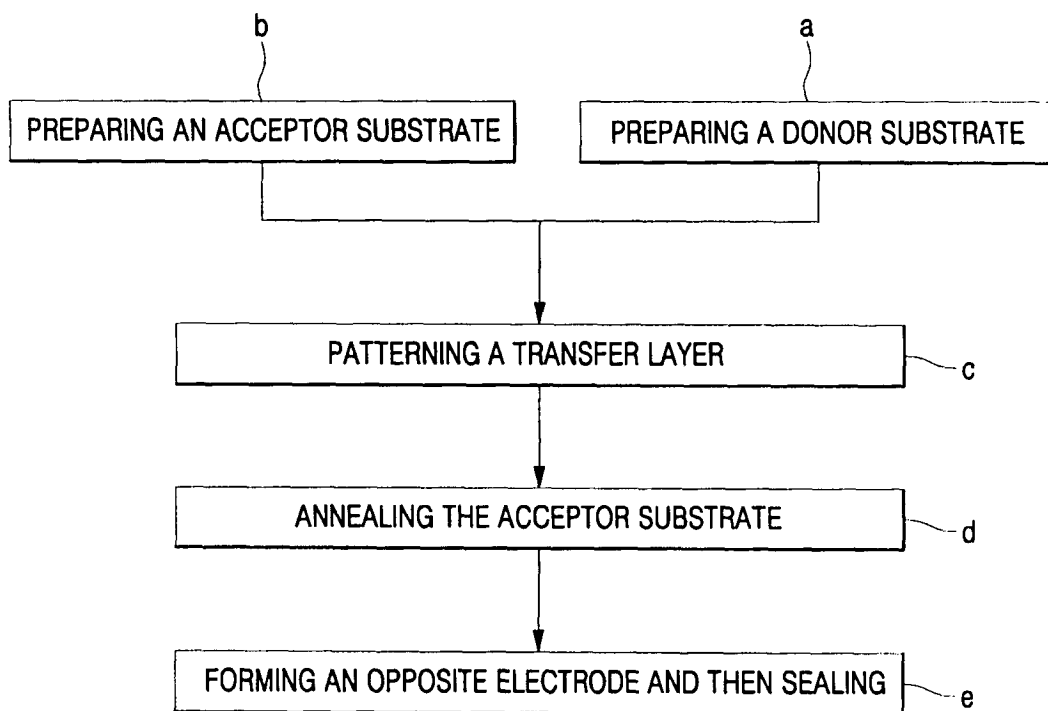


FIG. 2

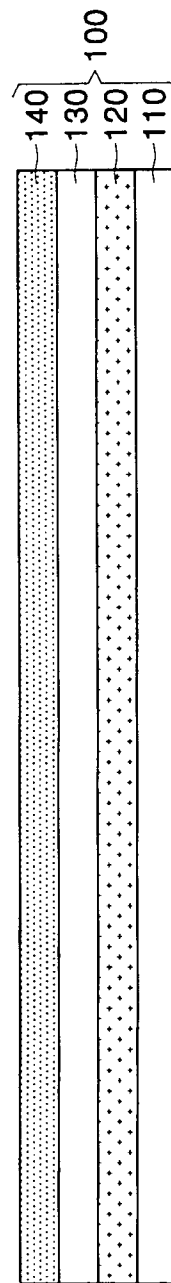


FIG. 3

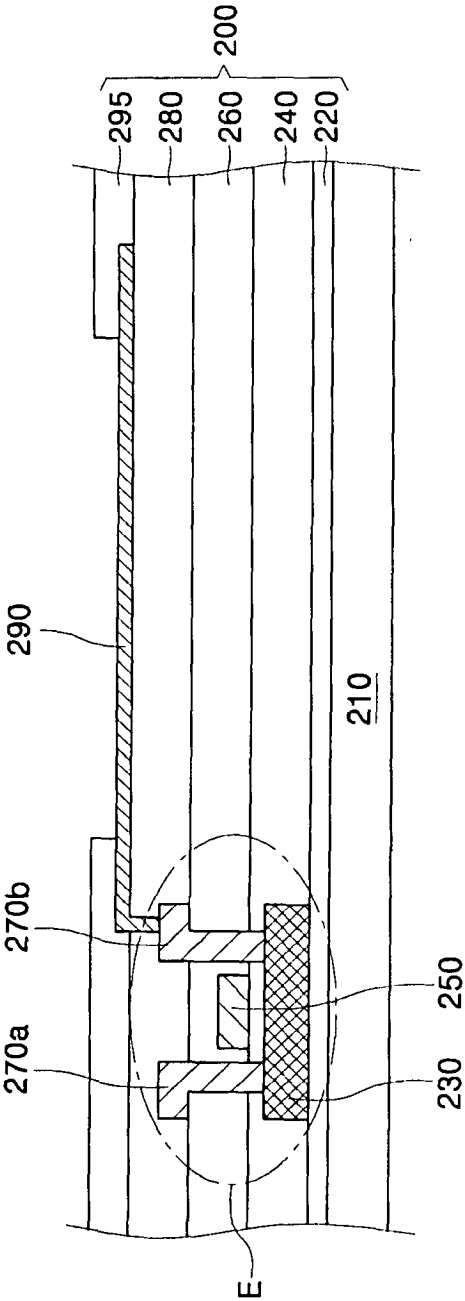


FIG. 4


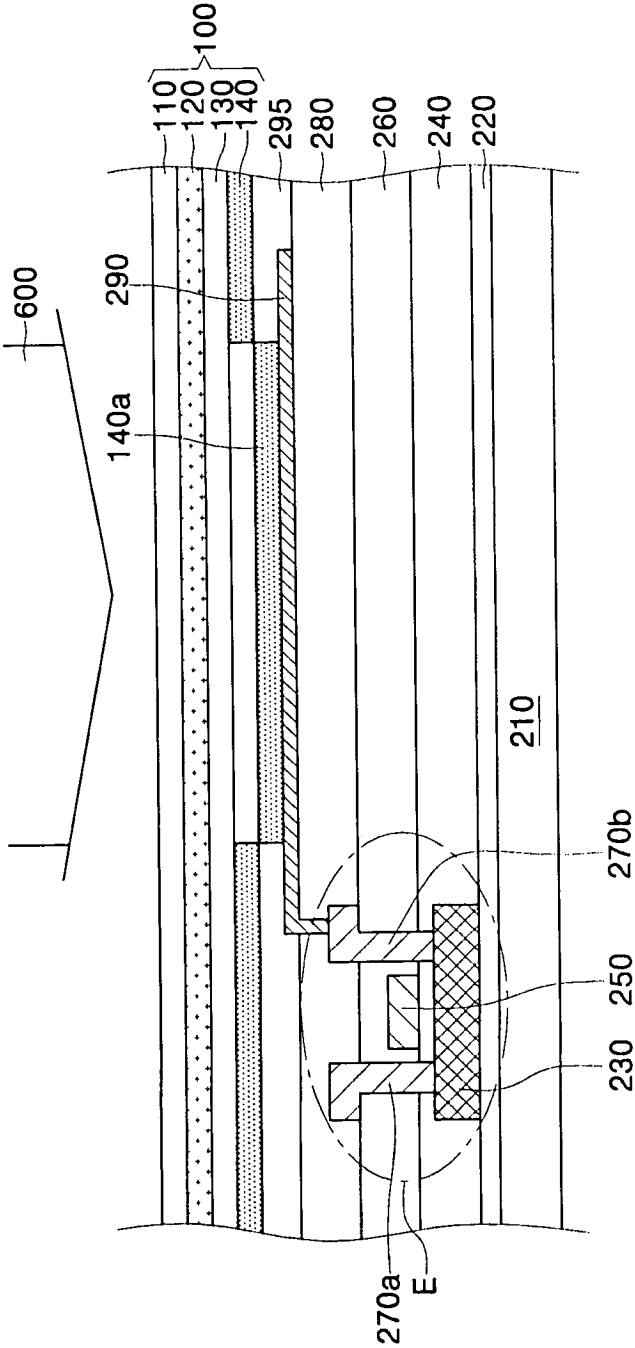


FIG. 5



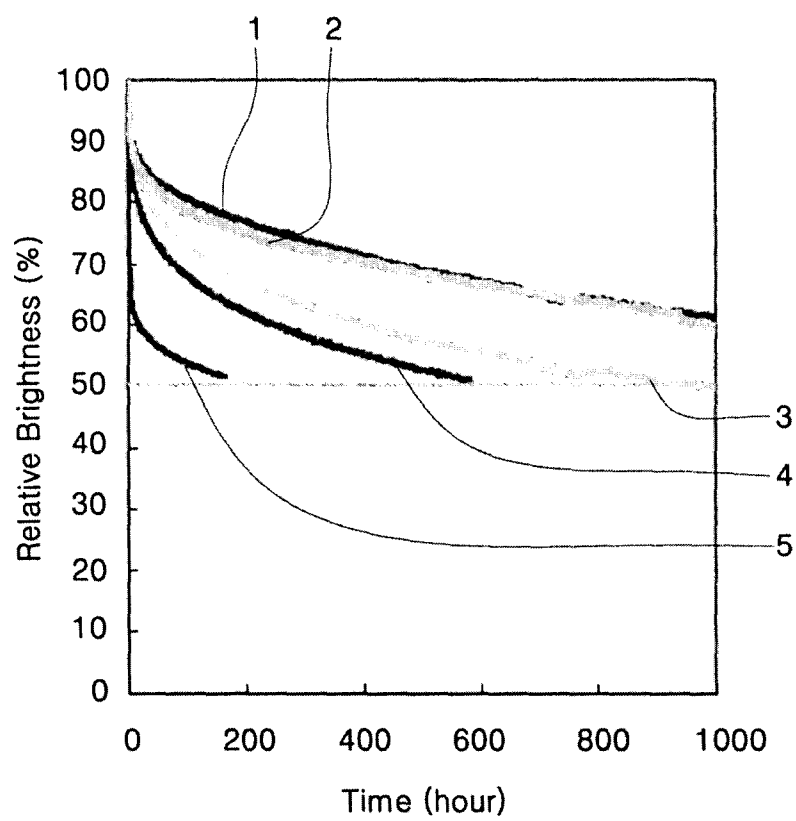

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 09 0510

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 1 401 033 A (SAMSUNG SDI CO. LTD) 24 March 2004 (2004-03-24)	1,7	H01L51/40 H01L27/00
Y	* paragraphs [0045], [0046], [0053], [0062] - [0066], [0068] - [0071] * -----	1-15, 17-22, 24-33	
Y	US 2002/098614 A1 (AKAI TOMONORI) 25 July 2002 (2002-07-25)	1-4, 6-15, 17-22, 24-33	
Y	* paragraphs [0016], [0029] - [0046] * -----	1-4,7	
Y	US 6 555 284 B1 (BOROSON MICHAEL L ET AL) 29 April 2003 (2003-04-29) * column 3, lines 1-16 * -----	1,2,4,7	
Y	DE 102 46 425 A1 (TECHNISCHE UNIVERSITAET BRAUNSCHWEIG) 15 April 2004 (2004-04-15) * the whole document * -----		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	EP 1 321 303 A (EASTMAN KODAK COMPANY) 25 June 2003 (2003-06-25)	1,5	H01L B41M
A	* paragraph [0015] * -----	16,23	
A	US 6 566 032 B1 (BOROSON MICHAEL L ET AL) 20 May 2003 (2003-05-20)	1-4, 6-10, 12-14, 17-21, 24-28, 31,32	
	* column 5, lines 13-42 * * column 22, line 66 - column 23, line 30 * ----- -/--		
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 18 February 2005	Examiner De Laere, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/02 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 04 09 0510

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 883 190 A (EASTMAN KODAK COMPANY) 9 December 1998 (1998-12-09) * claims 1-3 * -----	1-4,7, 27,28	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 18 February 2005	Examiner De Laere, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 09 0510

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-02-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1401033	A	24-03-2004	CN 1484476 A	24-03-2004
			EP 1401033 A2	24-03-2004
			JP 2004111350 A	08-04-2004
			US 2004056266 A1	25-03-2004

US 2002098614	A1	25-07-2002	JP 2002222694 A	09-08-2002

US 6555284	B1	29-04-2003	CN 1428874 A	09-07-2003
			EP 1324404 A2	02-07-2003
			JP 2003234185 A	22-08-2003

DE 10246425	A1	15-04-2004	WO 2004033223 A1	22-04-2004

EP 1321303	A	25-06-2003	US 2003148208 A1	07-08-2003
			CN 1424777 A	18-06-2003
			EP 1321303 A1	25-06-2003
			JP 2003197372 A	11-07-2003

US 6566032	B1	20-05-2003	CN 1457219 A	19-11-2003
			EP 1361618 A2	12-11-2003
			JP 2003332062 A	21-11-2003

EP 0883190	A	09-12-1998	US 5937272 A	10-08-1999
			EP 0883190 A2	09-12-1998
			JP 11054275 A	26-02-1999

专利名称(译)	激光诱导热成像方法和制造有机发光显示器的方法		
公开(公告)号	EP1630884A1	公开(公告)日	2006-03-01
申请号	EP2004090510	申请日	2004-12-23
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星移动显示器有限公司.		
[标]发明人	CHIN BYUNG DOO LEGAL & IP TEAM CORP PLAN STAFF		
发明人	KIM, MU-HYUN C/O SAMSUNG SDI CO, LTD CHIN, BYUNG-DOO LEGAL & IP TEAM CORP. PLAN. STAFF SONG, MYUNG-WON C/O SAMSUNG SDI CO, LTD LEE, SEONG-TAEK C/O SAMSUNG SDI CO, LTD		
IPC分类号	H01L51/40 H01L27/00 H01L21/00 H01L27/32 H01L51/56		
CPC分类号	H01L51/0013 B41M5/38207 B41M7/00 B41M7/0027 H01L27/3244 H01L51/56		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020040068769 2004-08-30 KR		
外部链接	Espacenet		

摘要(译)

激光诱导热成像方法包括制备供体元件和基板;面向供体元件的转移层到基板,然后将转移层图案化到基板上;并对图案化衬底进行退火。

FIG. 1

