



(11) **EP 2 725 633 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
01.08.2018 Bulletin 2018/31

(51) Int Cl.:
H01L 51/50 ^(2006.01) **C08G 61/12** ^(2006.01)
C09K 11/06 ^(2006.01)

(21) Application number: **12804346.0**

(86) International application number:
PCT/JP2012/065489

(22) Date of filing: **18.06.2012**

(87) International publication number:
WO 2013/002053 (03.01.2013 Gazette 2013/01)

(54) **POLYMER FOR USE IN ORGANIC ELECTROLUMINESCENT ELEMENT AND ORGANIC ELECTROLUMINESCENT ELEMENT EMPLOYING SAME**

POLYMER ZUR VERWENDUNG IN EINEM ORGANISCHEN ELEKTROLUMINESZENZELEMENT UND ORGANISCHES ELEKTROLUMINESZENZELEMENT DAMIT

POLYMÈRE DESTINÉ À ÊTRE UTILISÉ DANS UN ÉLÉMENT ÉLECTROLUMINESCENT ORGANIQUE ET ÉLÉMENT ÉLECTROLUMINESCENT ORGANIQUE EMPLOYANT LE POLYMÈRE

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **27.06.2011 JP 2011141640**

(43) Date of publication of application:
30.04.2014 Bulletin 2014/18

(73) Proprietor: **Nippon Steel & Sumikin Chemical Co., Ltd.**
Chiyoda-ku
Tokyo 101-0021 (JP)

(72) Inventors:

- **TANAKA Hiroshige**
Kitakyushu-shi
Fukuoka 804-8503 (JP)
- **ASARI Tohru**
Kitakyushu-shi
Fukuoka 804-8503 (JP)
- **SHIRAISHI Kazuto**
Kitakyushu-shi
Fukuoka 804-8503 (JP)
- **SAKAI Mitsuru**
Kitakyushu-shi
Fukuoka 804-8503 (JP)

- **NIINA Masashi**
Kitakyushu-shi
Fukuoka 804-8503 (JP)
- **YOSHIMURA Kazuaki**
Kitakyushu-shi
Fukuoka 804-8503 (JP)

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(56) References cited:

EP-A1- 1 672 713	EP-A1- 2 692 747
EP-A1- 2 692 751	EP-A1- 2 792 699
WO-A1-2007/063754	WO-A1-2010/098246
WO-A1-2011/136755	WO-A1-2012/087955
JP-A- 2011 071 460	JP-A- 2011 077 032
US-A1- 2004 137 271	

- **MASAJI AKIMOTO ET AL: "Syntheses and photonic properties of indolocarbazole derivatives", TRANSACTIONS OF THE MATERIALS RESEARCH SOCIETY OF JAPAN MARCH 2009 / SHIGEYUKI SÔMIYA; MASAO DOYAMA [EXECUTIVE EDITORS, JP, vol. 34, no. 1, 2009, pages 141-144, XP008159813,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

5 **[0001]** The present invention relates to a polymer for an organic electroluminescent element having a structure which includes an indolocarbazole unit in its main chain, and to an organic electroluminescent element obtained using the polymer.

Background Art

10 **[0002]** In general, an electroluminescent element includes an inorganic electroluminescent element using an inorganic compound in a light-emitting element and an organic electroluminescent element using an organic compound in a light-emitting element. In recent years, active studies on practical realization of the organic electroluminescent element have been made because the element can achieve light emission at a low voltage and at a high luminance.

15 **[0003]** A basic structure of the organic electroluminescent element is obtained by forming a hole-injecting layer and an organic thin layer such as a light-emitting layer on a glass plate deposited with a thin film of an anode material such as indium-tin oxide (ITO) and further forming a thin film of a cathode material thereon, and there is known an element obtained by appropriately providing a hole-transporting layer or an electron-transporting layer on the basic structure. A construction of layers in the organic electroluminescent element is, for example, anode/hole-injecting layer/light-emitting layer/electron-transporting layer/cathode or anode/hole-injecting layer/hole-transporting layer/light-emitting layer/electron-transporting layer/cathode.

20 **[0004]** In recent years, it has been found that when charge-transporting layers such as the hole-injecting layer and the hole-transporting layer are integrated between the light-emitting layer and the anode, the layers are improved in the property of injecting holes into the light-emitting layer and serve as buffer layers which optimize a charge balance to significantly improve luminous efficiency and life of the element.

25 **[0005]** Hole-transporting materials used in the hole-transporting layer of the organic electroluminescent element are broadly classified into a low-molecular-weight hole-transporting material and a high-molecular-weight hole-transporting material.

30 **[0006]** As a method of forming the low-molecular-weight hole-transporting material into a film serving as the hole-transporting layer, a vacuum deposition method is mainly used and has the following characteristics. According to the method, it is easy to produce a multilayer using various materials having different functions, which allows a high-performance organic electroluminescent element to be formed. However, there is a problem in that it is difficult to control a thickness uniformly and to apply different materials depending on parts for achieving a large-screen and high-definition panel, and a large-size vacuum apparatus is required, resulting in an increase in production cost.

35 **[0007]** Further, as the method of forming the low-molecular-weight hole-transporting material into a film serving as the hole-transporting layer, a film formation method involving application of a solution containing the low-molecular-weight hole-transporting material has been studied toward practical use. However, it is necessary to improve this technique for practical use because segregation and phase separation due to crystallization of the low-molecular-weight compound are observed.

40 **[0008]** On the other hand, as a method of forming the high-molecular-weight hole-transporting material into a film, a solution application method such as a spin coating method, a printing method, or an ink-jet method is used because most of the material cannot be deposited by the vacuum deposition method. This method can easily enlarge a panel screen and is excellent in terms of mass production. However, this method has problems in that it is difficult to laminate coated films, and contamination with impurities is liable to occur. Therefore, an element including the high-molecular-weight hole-transporting material is inferior in element performance such as element efficiency or life as compared with the low-molecular-weight hole-transporting material. Therefore, there has been required a high-molecular-weight hole-transporting material having excellent hole-transporting performance and good film forming property.

45 **[0009]** As attempts for expressing the required properties, for example, Non Patent Literature 1 discloses polyvinyl-carbazole and polysilane, and Patent Literature 2 and Non Patent Literature 2 report polymers having structures in which vinyltriphenylamine and triphenylamine are linked via methylene. However, organic electroluminescent elements including the compounds cannot improve the problems sufficiently because the luminous efficiency and stability of the elements are poor.

50 **[0010]** In addition, as a technique for enhancing the luminous efficiency of the organic electroluminescent element, a polymer material having a main chain of a n-conjugated polymer including an indolocarbazole unit integrated therein, and a light-emitting element including the polymer material have been disclosed. That is, Patent Literature 3 discloses a conjugated polymer obtained by bonding an indolocarbazole at a peripheral position, and Patent Literature 4 discloses a conjugated polymer obtained by introducing an indolocarbazole unit into a polyarylene main chain. However, each of the polymers is a n-conjugated polymer in which an indolocarbazole skeleton is bonded at a peripheral position. Although

each of the polymers improves charge mobility, its HOMO energy level is shallow, and hence a difference between the level and the energy level of a host material is large. As a result, hole-injecting property deteriorates. Accordingly, it cannot be said that luminous efficiency has been sufficiently improved.

Citation List

Patent Literature

[0011]

- [PTL 1] JP 05-205377 A
- [PTL 2] JP 11-256148 A
- [PTL 3] JP 2006-193729 A
- [PTL 4] JP 4019042 B2

Non Patent Literature

[0012]

- [NPL 1] Appl. Phys. Lett., 59, 2760 (1995)
- [NPL 2] Synthetic Metals, 55-57, 4163, (1993)

Summary of Invention


[0013] In order to apply a polymer to an organic electroluminescent element, it is necessary to improve luminous efficiency of the element and to improve stability of a film, solubility in a solvent, and film forming property.

[0014] The present invention has been made in view of the above-mentioned problems, and an object of the present invention is to provide a polymer for an organic electroluminescent element, which has high luminous efficiency and is applicable to a wet process. Another object of the present invention is to provide an organic electroluminescent element including the polymer, which is used, e.g., in a lighting device, an image display device, and a back light for a display device.

[0015] The inventors of the present invention have made intensive studies, and as a result, have found that light emission performance can be improved by using conjugated and non-conjugated polymers each having an indolocarbazole skeleton bonded at N-positions, thus completing the present invention.


[0016] The present invention relates to a polymer for an organic electroluminescent element containing an indolocarbazole skeleton in its polymer main chain, and an organic electroluminescent element having organic layers between an anode layer and a cathode layer laminated on a substrate, in which at least one of the organic layers contains the polymer.

[0017] The present invention relates to a polymer for an organic electroluminescent element, including a repeating unit represented by the following general formula (1) in repeating units constituting a main chain.

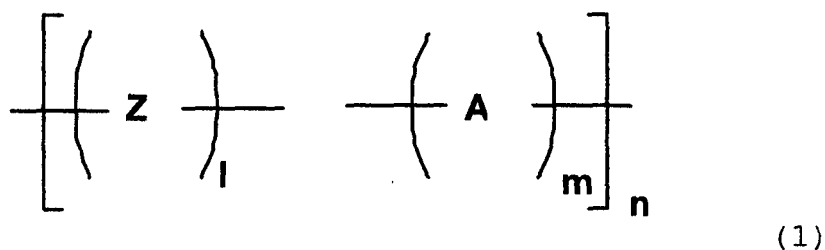


[0018] In the general formula (1), Z represents one or two or more kinds of repeating units selected from groups derived from indolocarbazoles represented by the following formulae (1a) to (1e),


[0019] A represents one or two or more repeating units different from Z, 1 and m each represent an abundance molar ratio, and when a ratio of all repeating units is defined as 100 mol%, 1 is 5 to 100 mol% and m is 0 to 95 mol%, and n represents an average repetition number and is 5 to 1,000.

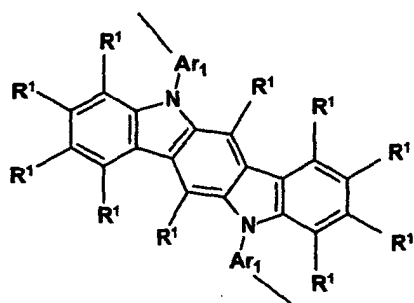


(1a)

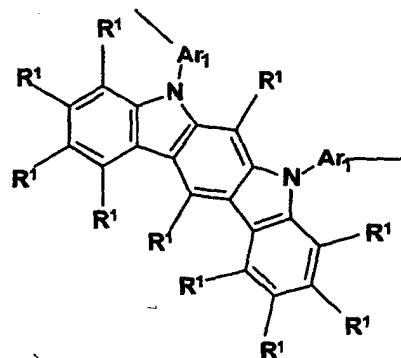


(1b)

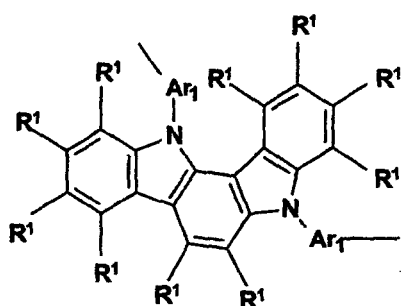

(1c)

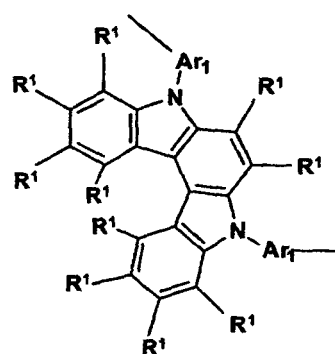


(1d)

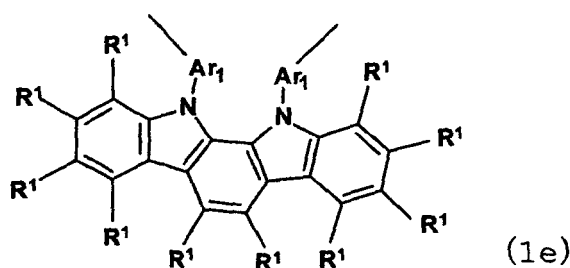

(1e)

[0020] In the formulae (1a) to (1e), Ar_1 's each independently represent a substituted or unsubstituted, C_6 to C_{18} arylene group, or a substituted or unsubstituted, C_3 to C_{18} heteroarylene group, and R^1 's each independently represent hydrogen, a C_1 to C_{12} alkyl group, a C_1 to C_{12} alkoxy group, a C_6 to C_{18} aryl group, a C_6 to C_{18} aryloxy group, a C_7 to C_{30} arylalkyl group, a C_7 to C_{30} arylalkyloxy group, a C_3 to C_{18} heteroaryl group, a C_3 to C_{18} heteroaryloxy group, or a C_3 to C_{18} cycloalkyl group.


[0021] In the general formula (1), A represents a repeating unit represented by the following formula (3).

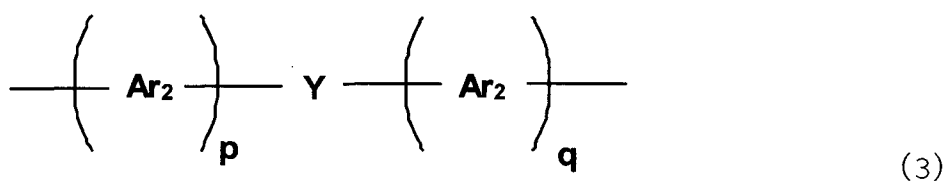

[0022] In the formula, Ar_2 's each independently represent a substituted or unsubstituted, C_6 to C_{18} arylene group, or a substituted or unsubstituted, C_3 to C_{18} heteroarylene group, Y represents a C_1 to C_{12} alkylene group, O, S, NR^2 , CO,

CO₂, SO, SO₂, SCO, NR²CO, CONR²CO, or a single bond, p and q each represent an integer of 0 to 3, at least one of p and q represents an integer of 1 or more, and when one of p and q represents 0, Y represents a single bond, and R² represents a hydrogen atom, a C₁ to C₁₂ alkyl group, a C₃ to C₁₈ cycloalkyl group, a C₆ to C₁₈ aryl group, a C₇ to C₃₀ arylalkyl group, a C₃ to C₁₈ heteroaryl group, or a C₄ to C₃₀ heteroarylalkyl group.


[0023] The present invention also relates to the polymer for an organic electroluminescent element, in which in the formulae (1a) to (1e) in the general formula (1), Ar₁'s each independently represent a group represented by the following formula (2).




(2)

[0024] In the formula (2), X's each independently represent any one of N or C-L, L's each independently represent a hydrogen atom, a C₆ to C₁₈ aryl group, a C₃ to C₁₈ heteroaryl group, a C₁₂ to C₃₆ diarylamino group, or a bonding hand, and one of L's represents a bonding hand.

[0025] The present invention further relates to the polymer for an organic electroluminescent element, in which in the general formula (1), A represents a repeating unit represented by the following formula (4a) or (4b).



(4a)



(4b)

[0026] In the formulae, Y₁ represents a substituted or unsubstituted, C₁ to C₆ alkylene group, an N-R⁴ group, O, S, or a single bond, Y₂ represents a C-(R⁴)₂ group, an N-R⁴ group, O, or S, R³'s each independently represent a hydrogen atom, a C₁ to C₁₂ alkyl group, a C₁ to C₁₂ alkoxy group, a C₆ to C₁₈ aryl group, a C₆ to C₁₈ aryloxy group, a C₇ to C₃₀ arylalkyl group, a C₇ to C₃₀ arylalkyloxy group, a C₃ to C₁₈ heteroaryl group, a C₃ to C₁₈ heteroaryloxy group, or a C₃ to C₁₈ cycloalkyl group, and R⁴ represents a hydrogen atom, a C₁ to C₁₂ alkyl group, a C₃ to C₁₈ cycloalkyl group, a C₆ to C₁₈ aryl group, a C₇ to C₃₀ arylalkyl group, a C₃ to C₁₈ heteroaryl group, or a C₄ to C₃₀ heteroarylalkyl group.

[0027] The present invention also relates to the polymer for an organic electroluminescent element, in which in the general formula (1), the polymer for an organic electroluminescent element has a weight-average molecular weight of 1,000 to 1,000,000. In addition, the present invention relates to the polymer for an organic electroluminescent element, in which in the general formula (1), m representing an abundance molar ratio is 10 to 90 mol%. Further, the present invention relates to the polymer for an organic electroluminescent element, in which the polymer includes an alternating copolymer in which A and Z as repeating units in the general formula (1) are alternately bonded.

[0028] The present invention also relates to an organic electroluminescent element, including, between an anode layer and a cathode layer laminated on a substrate, organic layers, in which at least one of the organic layers contains the polymer for an organic electroluminescent element. The organic layer containing the polymer for an organic electroluminescent element is, for example, a hole-transporting layer. The organic electroluminescent element is preferably an organic electroluminescent element in which a difference between the HOMO energy of the polymer for an organic electroluminescent element contained in the hole-transporting layer and the HOMO energy of a host material contained in the light-emitting layer containing a guest material and a host material is within ±0.5 eV.

Brief Description of Drawings

[0029] FIG. 1 is a sectional view illustrating a structure example of an organic EL element.

Description of Embodiments

[0030] Hereinafter, embodiments of the present invention are described in detail. A polymer for an organic electroluminescent element of the present invention is an oligomer or polymer represented by the general formula (1). In this case, the polymer for an organic electroluminescent element of the present invention may be a homopolymer or a copolymer.

[0031] The polymer for an organic electroluminescent element of the present invention has an indolocarbazole skeleton capable of imparting an excellent charge-transporting ability, in particular, a hole-transporting ability in a repeating unit constituting a main chain. In this case, the main chain may be constituted of only one kind of repeating unit or may be constituted of two or more kinds of repeating units, and includes Z as an essential repeating unit and A as an arbitrary repeating unit.

[0032] In the general formula (1), n represents a repetition number and is determined by a weight-average molecular weight; the average (number-average) repetition number is

5 to 1,000. 1 and m represent the abundance ratios of Z and A as repeating units, respectively, and when the ratio of all repeating units is defined as 100 mol%, 1 representing the abundance ratio of Z is 5 to 100 mol% and m is 0 to 95 mol%. 1 is preferably 10 to 90 mol%, more preferably 30 to 80 mol%. It should be noted that it is also preferred that 1 be 100 mol%. m is preferably 10 to 90 mol%, more preferably 20 to 70 mol%.

[0033] In addition, the polymer for an organic electroluminescent element of the present invention may include a terminal group except the repeating units Z and A appearing in the general formula (1). The repeating unit A is a repeating unit except the repeating unit Z, and may be one kind, or may be formed of two or more kinds of repeating units.

[0034] In the general formula (1), Z represents one or two or more kinds of repeating units selected from groups derived from indolocarbazoles represented by the formulae (1a) to (1e), and any such unit is a divalent group having bonding hands from two Ar₁'s bonded to the two N's of an indolocarbazole ring. Hereinafter, the divalent group is sometimes referred to as "indolocarbazolyl group bonded at N-positions." In addition, the indolocarbazolyl group bonded at N-positions can have a substituent at carbon constituting the indolocarbazole ring.

[0035] The indolocarbazolyl group bonded at N-positions can adopt five kinds of groups of structural isomers represented by the formulae (1a) to (1e) because the group has a plurality of positions at which an indole ring and a carbazole ring can be condensed. Any one of the structural isomers is permitted.

[0036] The indolocarbazolyl group bonded at N-positions represented by Z in the general formula (1) is one or two or more indolocarbazolyl groups selected from the group consisting of structures represented by the formulae (1a) to (1e). When the number of indolocarbazolyl groups is two or more, Z in the general formula (1) is formed of two or more kinds of indolocarbazolyl groups.

[0037] In the formulae (1a) to (1e), Ar₁ represents a substituted or unsubstituted, C₆ to C₁₈ arylene group, or a substituted or unsubstituted, C₃ to C₁₈ heteroarylene group.

[0038] Specific examples of the unsubstituted arylene group and heteroarylene group include, but not limited to, a divalent group formed by removing two hydrogen atoms from an aromatic ring of an aromatic compound selected from benzene, pentalene, indene, naphthalene, azulene, heptalene, octalene, indacene, acenaphthylene, phenalene, phenanthrene, anthracene, trindene, fluoranthene, acephenanthrylene, aceanthrylene, triphenylene, pyrene, chrysene, tetraphene, tetracene, pleiadene, picene, perylene, pentaphene, pentacene, tetraphenylene, cholanthrylene, helicene, hexaphene, rubicene, coronene, trinaphthylene, heptaphene, pyranthrene, ovalene, corannulene, fulminene, anthanthrene, zethrene, terrylene, naphthacenonaphthacene, truxene, furan, benzofuran, isobenzofuran, xanthene, oxathrene, dibenzofuran, peri-xanthenoxanthene, thiophene, thioxanthene, thianthrene, phenoxathiin, thionaphthene, isothianaphthene, thiophthene, thiophanthrene, dibenzothiophene, pyrrole, pyrazole, tellurazole, selenazole, thiazole, isothiazole, oxazole, furazan, pyridine, pyrazine, pyrimidine, pyridazine, triazine, indolizine, indole, isoindole, indazole, purine, quinolizine, isoquinoline, carbazole, imidazole, naphthyridine, phthalazine, quinazoline, benzodiazepine, quinoxaline, cinnoline, quinoline, pteridine, phenanthridine, acridine, perimidine, phenanthroline, phenazine, carboline, phenotellurazine, phenoselenazine, phenothiazine, phenoxazine, anthyridine, thebenidine, quindoline, quinindoline, acridoline, phthaloperine, triphenodithiazine, triphenodioxazine, phenanthrazine, anthrazine, benzothiazole, benzimidazole, benzoxazole, benzisoxazole, or benzisothiazole. Preferred examples thereof include a divalent group formed by removing two hydrogen atoms from an aromatic ring of an aromatic compound selected from benzene, naphthalene, pyridine, pyrazine, pyrimidine, pyridazine, triazine, indole, carbazole, dibenzofuran, or dibenzothiophene.

[0039] In addition, the arylene group or the heteroarylene group may have a substituent. In the case of the substituted arylene group or heteroarylene group, the total number of substituents is 1 to 10, preferably 1 to 6, more preferably 1 to 4. The substituent, which is not limited, is preferably, for example, a C₁ to C₁₂ linear, branched, or cyclic alkyl group,

a C₆ to C₁₂ aryl group, or a C₃ to C₁₂ heteroaryl group. Specific examples of the substituent include a methyl group, an ethyl group, an n-propyl group, an i-propyl group, an n-butyl group, a t-butyl group, a cyclopentyl group, a cyclohexyl group, a phenyl group, a naphthyl group, a quinolyl group, an indolyl group, a furanyl group, a pyrrolyl group, a thiophenyl group, a pyridyl group, a pyrimidyl group, a triazinyl group, a carbazolyl group, a benzofuranyl group, a dibenzofuranyl group, a benzothiophenyl group, and a dibenzothiophenyl group. When the substituent is an aryl group or a heteroaryl group, the substituent may further have a similar substituent. When the arylene group or the heteroarylene group has two or more substituents, the substituents may be identical to or different from each other. It should be noted that Ar₁ represents a divalent group and its two bonding hands in the case where a plurality of aromatic rings are present derive from the same ring or the same fused ring.

[0040] In addition, in the formulae (1a) to (1e), Ar₁ more preferably represents a divalent group represented by the formula (2). In the formula (2), X's each independently represent any one of N or C-L. It is preferred that 0 to 3 X's each represent N. L's each independently represent a hydrogen atom, a C₆ to C₁₈ aryl group, a C₃ to C₁₈ heteroaryl group, a C₁₂ to C₃₆ diarylamino group, or a bonding hand, and one of L's represents a bonding hand. The bonding hand is one of the two bonding hands appearing in the formula (2).

[0041] In this case, preferred examples of the aryl group, the heteroaryl group, and an aryl group in the diarylamino group include: a group formed by removing a hydrogen atom from benzene, pentalene, indene, naphthalene, azulene, heptalene, octalene, indacene, acenaphthylene, phenalene, phenanthrene, anthracene, trindene, fluoranthene, acephenanthrylene, aceanthrylene, triphenylene, pyrene, chrysene, tetraphene, tetracene, pleiadene, picene, perylene, pentaphene, pentacene, tetraphenylene, cholanthrylene, helicene, hexaphene, rubicene, coronene, trinaphthylene, heptaphene, pyranthrene, ovalene, corannulene, fulminene, anthanthrene, zethrene, terrylene, naphthacenonaphthacene, truxene, furan, benzofuran, isobenzofuran, xanthene, oxathrene, dibenzofuran, peri-xanthenoxanthene, thiophene, thioxanthene, thianthrene, phenoxathiin, thionaphthene, isothianaphthene, thiophthene, thiophanthrene, dibenzothiophene, pyrrole, pyrazole, tellurazole, selenazole, thiazole, isothiazole, oxazole, furazane, pyridine, pyrazine, pyrimidine, pyridazine, triazine, indolizine, indole, isoindole, indazole, purine, quinolizine, isoquinoline, carbazole, imidazole, naphthyridine, phthalazine, quinazoline, benzodiazepine, quinoxaline, cinnoline, quinoline, pteridine, phenanthridine, acridine, perimidine, phenanthroline, phenazine, carboline, phenotellurazine, phenoselenazine, phenothiazine, phenoxazine, anthyridine, thebenidine, quindoline, quinindoline, acridindoline, phthaloperine, triphenodithiazine, triphenodioxazine, phenanthrazine, anthrazine, benzothiazole, benzimidazole, benzoxazole, benzisoxazole, or benzisothiazole; a diphenylamino group; and a dinaphthylamino group. More preferred examples thereof include: a group formed by removing a hydrogen atom from benzene, naphthalene, pyridine, pyrazine, pyrimidine, pyridazine, triazine, indole, carbazole, dibenzofuran, or dibenzothiophene; and a diphenylamino group.

[0042] In addition, the aryl group, the heteroaryl group, or the aryl group in the diarylamino group may have a substituent. When the group has a substituent, the total number of substituents is 1 to 10, preferably 1 to 6, more preferably 1 to 4. The substituent, which is not particularly limited as long as it does not impair performance, is preferably a C₁ to C₆ alkyl group, a C₅ to C₁₀ cycloalkyl group, a C₆ to C₁₂ aryl group, or a C₃ to C₁₂ heteroaryl group. Specific examples thereof include a methyl group, an ethyl group, an n-propyl group, an i-propyl group, an n-butyl group, a t-butyl group, a cyclopentyl group, a cyclohexyl group, a phenyl group, a naphthyl group, a quinolyl group, an indolyl group, a furanyl group, a pyrrolyl group, a thiophenyl group, a pyridyl group, a pyrimidyl group, a triazinyl group, a carbazolyl group, a benzofuranyl group, a dibenzofuranyl group, a benzothiophenyl group, and a dibenzothiophenyl group. When the substituent is an aryl group or a heteroaryl group, the substituent may further have a similar substituent.

[0043] In addition, in the formulae (1a) to (1e), R¹'s each independently represent a hydrogen atom, a C₁ to C₁₂ alkyl group, a C₁ to C₁₂ alkoxy group, a C₆ to C₁₈ aryl group, a C₆ to C₁₈ aryloxy group, a C₇ to C₃₀ arylalkyl group, a C₇ to C₃₀ arylalkyloxy group, a C₃ to C₁₈ heteroaryl group, a C₃ to C₁₈ heteroaryloxy group, or a C₃ to C₁₈ cycloalkyl group, and may be identical to or different from each other. When any such group contains a hydrocarbon chain, the hydrocarbon chain may be linear or branched, and may be substituted with a halogen such as Cl or F. R¹'s each represent preferably a hydrogen atom, a C₁ to C₁₀ alkyl group, a C₁ to C₁₀ alkoxy group, a C₆ to C₁₂ aryl group, a C₆ to C₁₂ aryloxy group, a C₇ to C₂₂ arylalkyl group, a C₇ to C₂₂ arylalkyloxy group, a C₃ to C₁₂ heteroaryl group, a C₃ to C₁₂ heteroaryloxy group, or a C₃ to C₁₂ cycloalkyl group, more preferably a hydrogen atom, a C₁ to C₆ alkyl group, a C₆ to C₁₂ aryl group, or a C₃ to C₁₂ heteroaryl group. In addition, any such group may further have a substituent. The substituent, which is not particularly limited as long as it does not impair performance, is preferably a C₁ to C₆ alkyl group, a C₅ to C₁₀ cycloalkyl group, a C₆ to C₁₂ aryl group, or a C₃ to C₁₂ heteroaryl group. Specific examples thereof include a methyl group, an ethyl group, an n-propyl group, an i-propyl group, an n-butyl group, a t-butyl group, a cyclopentyl group, a cyclohexyl group, a phenyl group, a naphthyl group, a quinolyl group, an indolyl group, a furanyl group, a pyrrolyl group, a thiophenyl group, a pyridyl group, a pyrimidyl group, a triazinyl group, a carbazolyl group, a benzofuranyl group, a dibenzofuranyl group, a benzothiophenyl group, and a dibenzothiophenyl group. When the substituent is an aryl group or a heteroaryl group, the substituent may further have a similar substituent.


[0044] In the general formula (1), A represents a repeating unit different from Z, and is a divalent group represented by the formula (3).

[0045] In the formula (3), Y represents a C_1 to C_{12} alkylene group, O, S, NR^2 , CO, CO_2 , SO, SO_2 , SCO, NR^2CO , $CONR^2CO$, or a single bond, and preferably represents a C_1 to C_{12} alkylene group, O, S, NR^2 , or a single bond. When any such group includes a hydrocarbon chain, the chain may be linear or branched, and may be substituted with a halogen such as Cl or F. In addition, R^2 preferably represents a hydrogen atom, a C_1 to C_6 alkyl group, a C_6 to C_{12} aryl group, or a C_3 to C_{12} heteroaryl group, and specific examples thereof include a methyl group, an ethyl group, an n-propyl group, an i-propyl group, an n-butyl group, a t-butyl group, a phenyl group, a naphthyl group, a quinolyl group, an indolyl group, a furanyl group, a pyrrolyl group, a thiophenyl group, a pyridyl group, a pyrimidyl group, a triazinyl group, a carbazolyl group, a benzofuranyl group, a dibenzofuranyl group, a benzothiophenyl group, and a dibenzothiophenyl group. When the substituent is an aryl group or a heteroaryl group, the substituent may further have a similar substituent. In addition, p and q each represent an integer of 0 to 3, preferably 0 to 2, provided that when one of p and q represents 0, Y represents a single bond.

[0046] In addition, in the formula (3), Ar_2 's each independently represent a substituted or unsubstituted, C_6 to C_{18} arylene group, or a substituted or unsubstituted, C_3 to C_{18} heteroarylene group. Preferred Ar_2 is the same as the arylene group or heteroarylene group described for Ar_1 in the formulae (1a) to (1e). In addition, the case where the arylene group or the heteroarylene group has a substituent is the same as the description of the substituent for the arylene group or heteroarylene group described for Ar_1 in the formulae (1a) to (1e).

[0047] The divalent group represented by the formula (3) is preferably a group represented by one of the formulae (4a) and (4b). Y_1 represents a substituted or unsubstituted, C_1 to C_6 alkylene group, an $N-R^4$ group, O, S, or a single bond, and Y_2 represents a $C-(R^4)_2$ group, an $N-R^4$ group, O, or S. R^3 is the same as R^1 described in the formulae (1a) to (1e). R^4 is the same as R^2 described in the formula (3). Y_1 preferably represents a C_1 to C_3 alkylene group, O, S, or a single bond because of the following reason: as the chain length of Y_1 lengthens, a charge-transporting ability in the repeating unit reduces and the unit becomes thermally unstable. Y_2 preferably represents a $C-(R^4)_2$ group, O, or S.

[0048] The polymer for an organic electroluminescent element of the present invention having an indolocarbazole ring in its main chain can be easily produced by: producing a monomer that provides the repeating unit Z, or the repeating units Z and A; and polymerizing the monomer by a known method. For example, the polymer can be produced by the following reaction formulae. Although each of polycondensation and addition polymerization is available as a method for the polymerization, polycondensation based on the Suzuki coupling reaction is desirable from a general-purpose viewpoint.

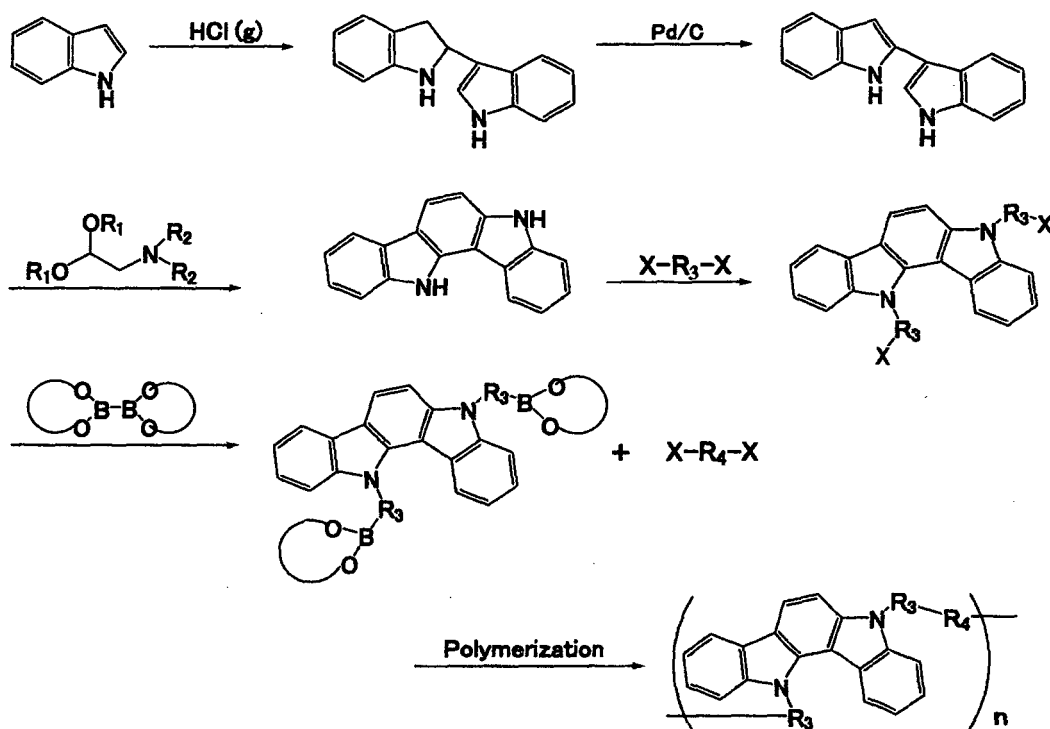


[0049] The reaction example is an example in which in the general formula (1), the repeating unit Z is a divalent group in which the two N's of an indolocarbazole are each substituted with R_3 , A is R_4 , and Z and A are alternately bonded to


form a repeating unit. The abundance ratios 1 and m in the general formula (1) can be controlled by controlling the kind and molar ratio of a halogen compound involved in the polymerization reaction. It should be noted that X in the reaction example means a halogen.

[0050] The indolocarbazole-based polymer of the present invention has a weight-average molecular weight Mw of 1,000 to 1,000,000, preferably 2,000 to 300,000. When the Mw is less than 1,000, formation of a uniform film is difficult, while when the Mw is more than 1,000,000, solubility in an organic solvent is extremely poor, resulting in difficulty in application of a solution.


[0051] Hereinafter, examples of the polymer having an indolocarbazole skeleton of the present invention are shown, but the polymer is not limited thereto.

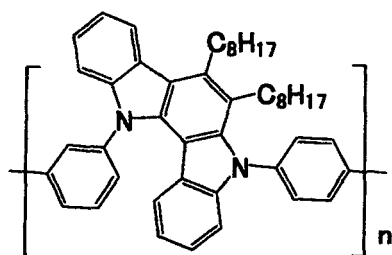


P-1

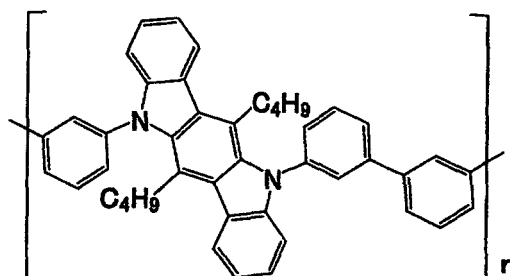


P-2

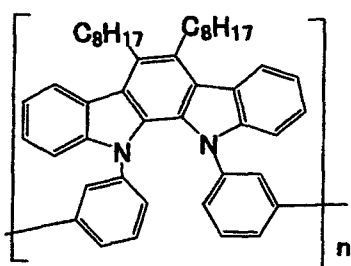


P-3

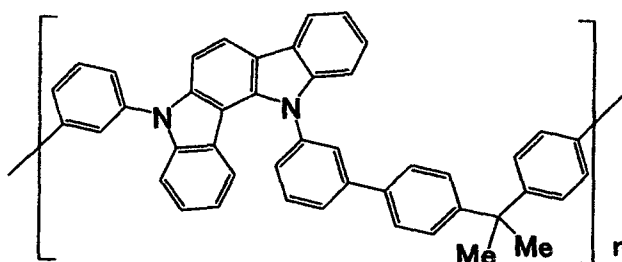

P-4

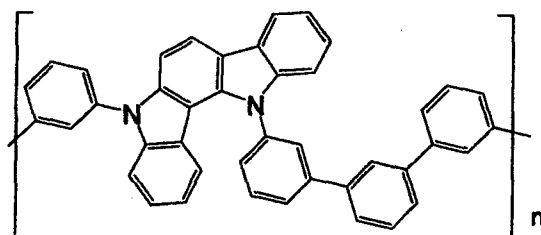


P-5

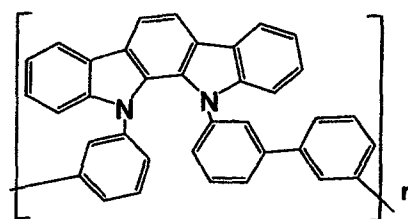


P-6

5

10

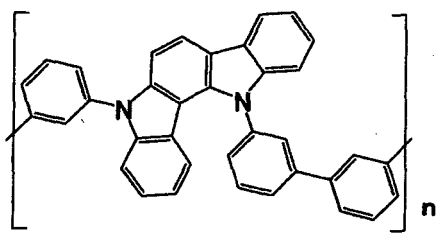

P-7

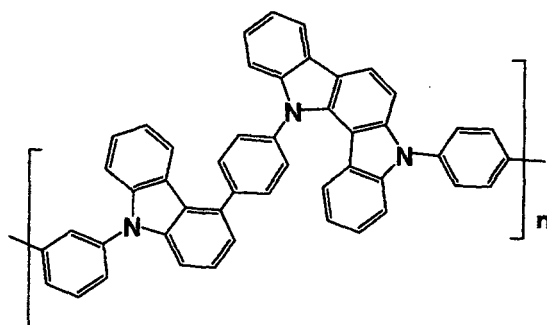


P-8


15

20

25

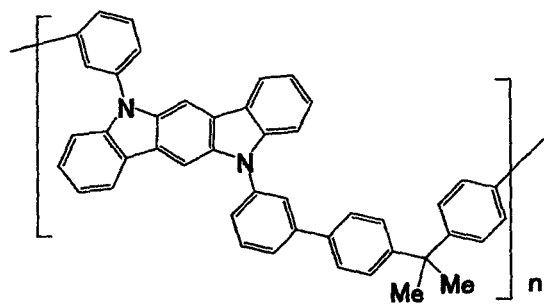

P-9

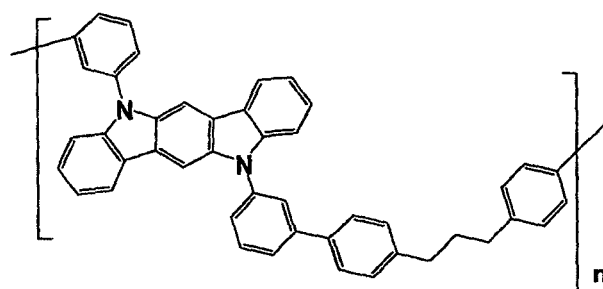


P-10


30

35

40

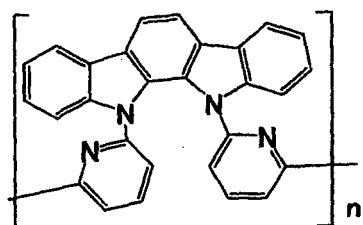


P-11

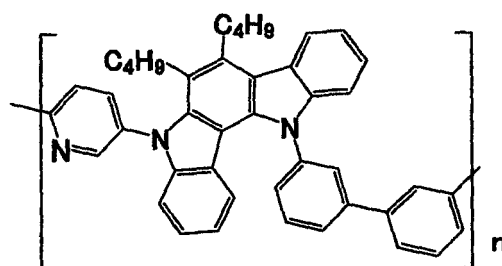


P-12

45

50

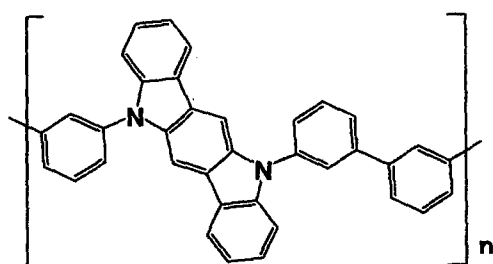


P-13

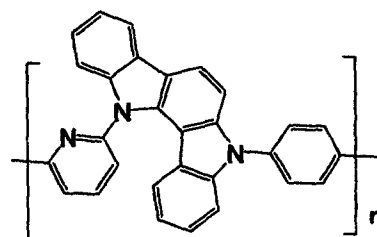


P-14


55

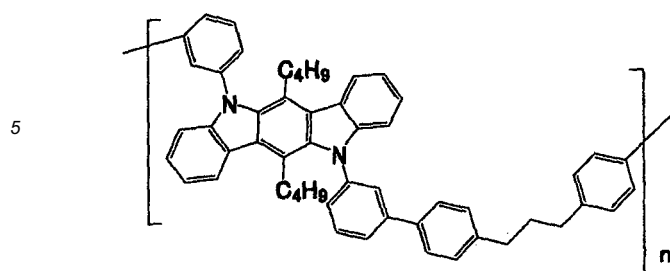


P-15

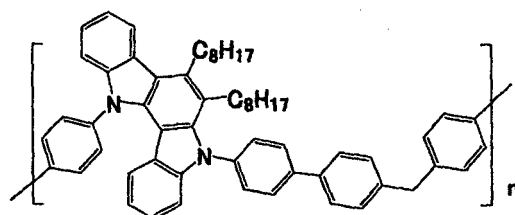


P-16

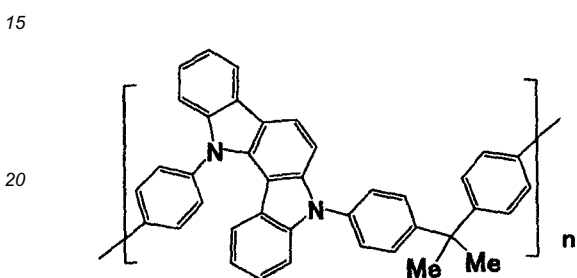


P-17

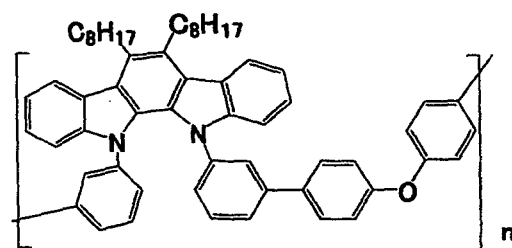


P-18

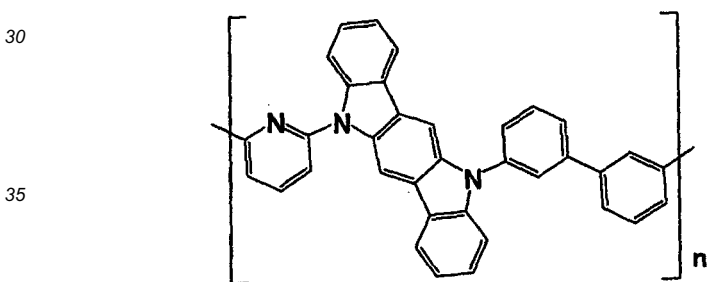


P-19

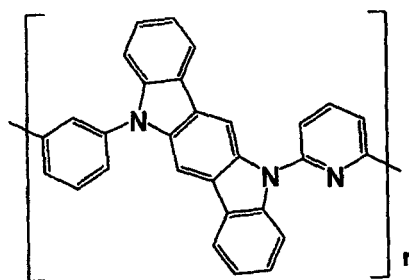


P-20

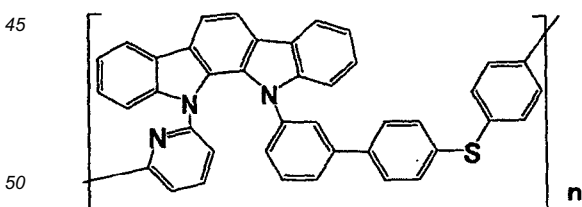


P-21

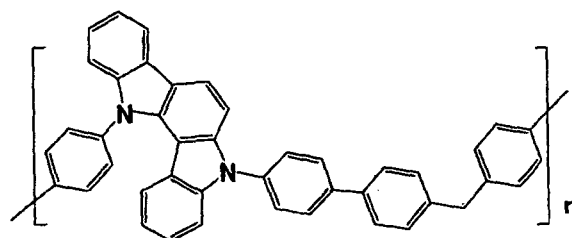



P-22

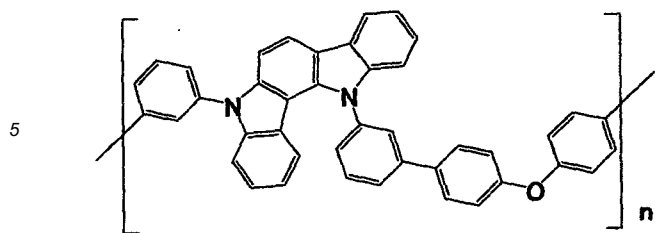

P-23


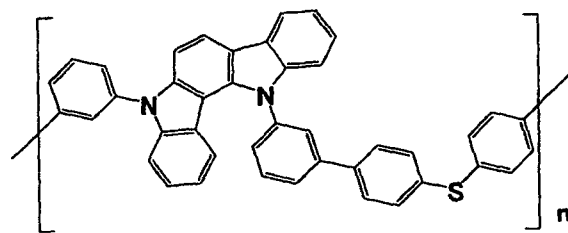


P-24

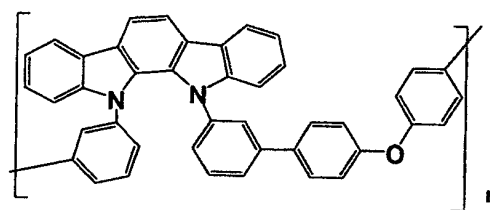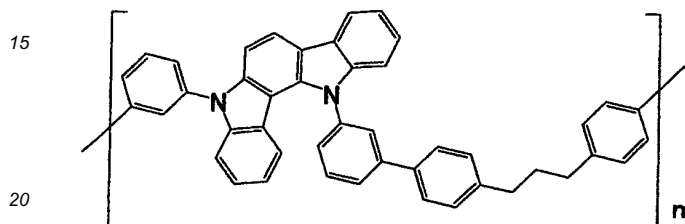



P-25

P-26

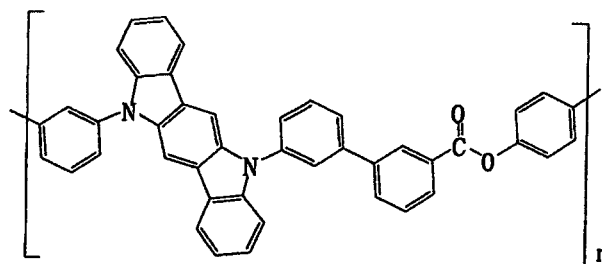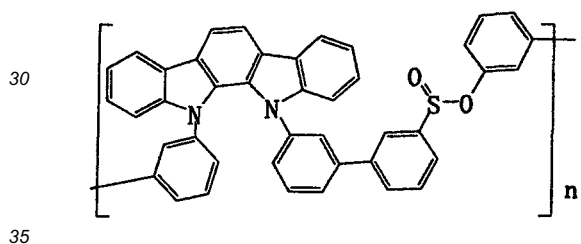

P-27


P-28

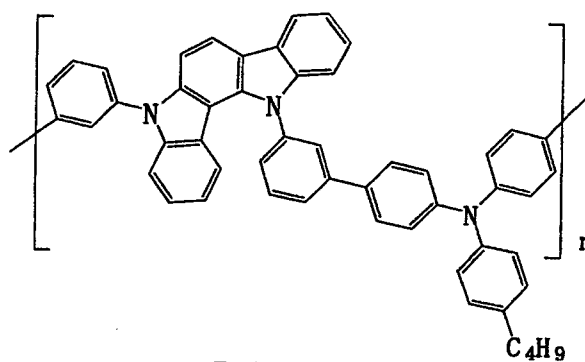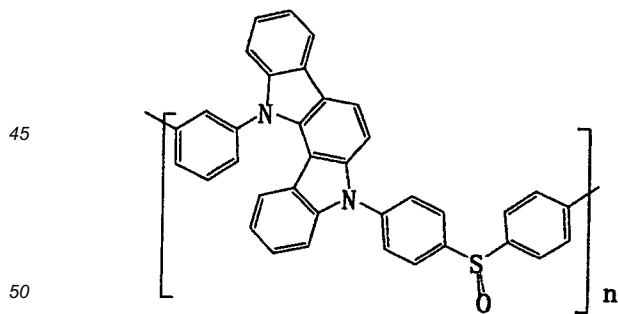


P-29

P-30


55

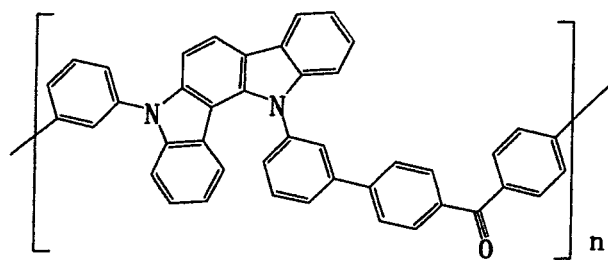


P-31

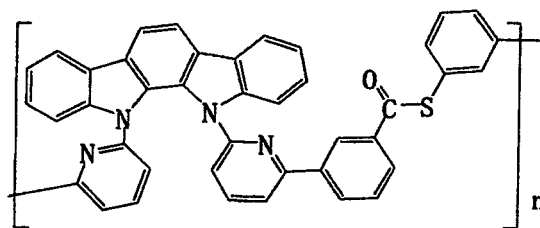


P-32

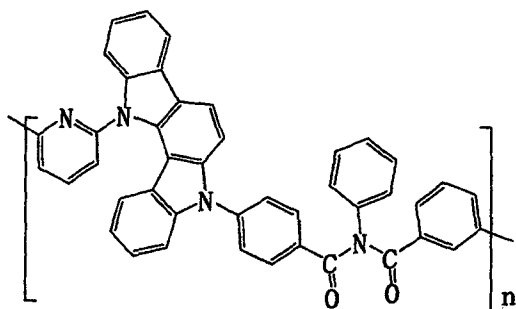


P-33

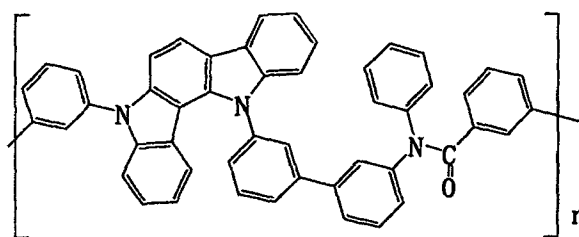


P-34

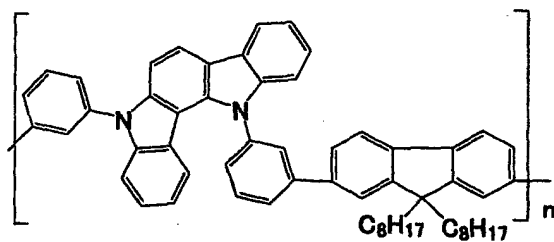


P-35

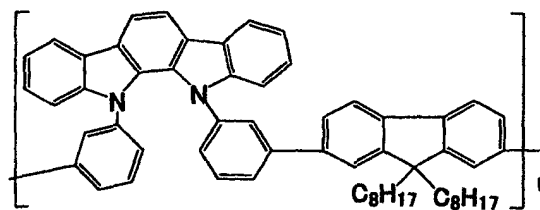


P-36

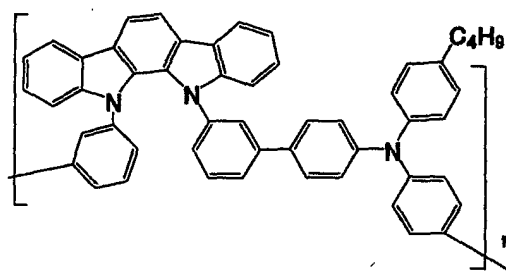


P-37

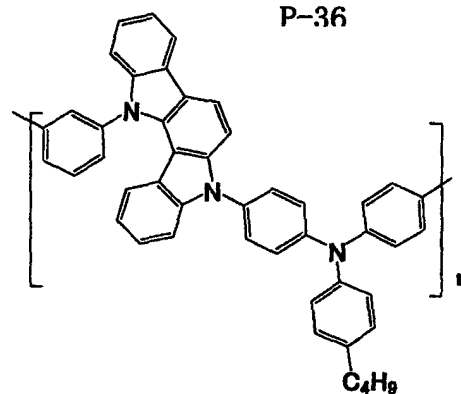


P-38

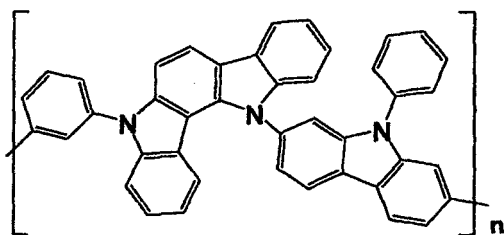


P-39

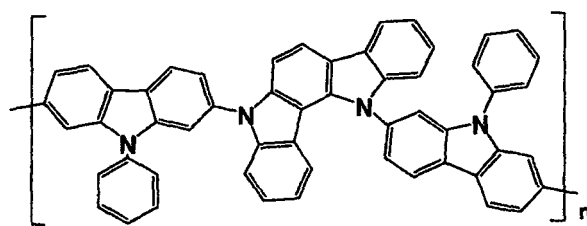


P-40

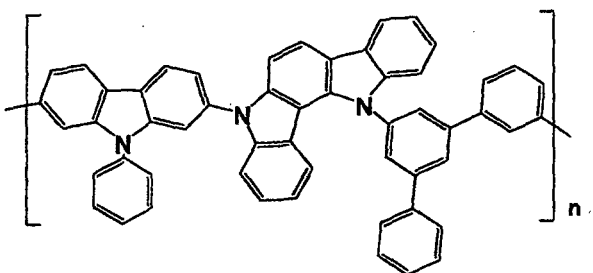


P-41

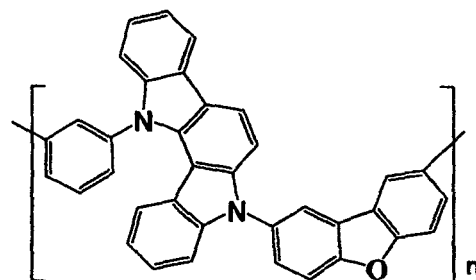

P-42

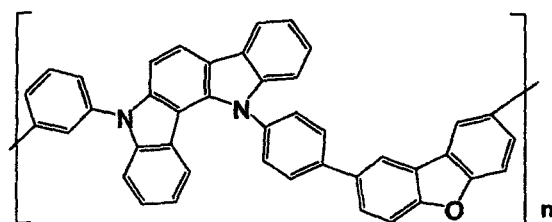

P-43

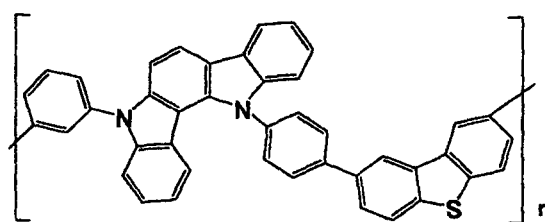

P-44

[0052] It should be noted that the polymer for an organic electroluminescent element of the present invention may be a homopolymer or a copolymer. In the case where the polymer for an organic electroluminescent element is a copolymer, polymerization may be carried out in a random manner, in a block manner, or in an alternating manner. However, the polymerization is preferably carried out in an alternating manner as shown in the formula.

[0053] In addition, an excellent organic electroluminescent element is obtained by incorporating the polymer for an organic electroluminescent element of the present invention into an organic layer of the organic EL element. The polymer is preferably incorporated into at least one organic layer selected from a light-emitting layer, a hole-transporting layer, an electron-transporting layer, and a hole-blocking layer, and more preferably incorporated into a hole-transporting layer. The light-emitting layer is preferably a fluorescent or phosphorescent light-emitting layer containing a host material and a guest material, more preferably a phosphorescent light-emitting layer.

[0054] When the polymer for an organic electroluminescent element of the present invention is incorporated into the hole-transporting layer, a difference between its HOMO energy and the HOMO energy of the host material incorporated into the light-emitting layer adjacent to the hole-transporting layer is preferably as small as possible. In addition, when the adjacent light-emitting layer contains a plurality of compounds, a difference in HOMO energy between the polymer and a compound serving as a main component for the light-emitting layer is preferably as small as possible. The difference between the HOMO energy of the polymer for an organic electroluminescent element and the HOMO energy of the compound in the light-emitting layer (when the layer contains the host material and the guest material, the compound is a compound serving as the host material as the main component) is desirably within ± 0.5 eV, preferably within ± 0.3 eV. When the difference between the HOMO energy of the polymer for an organic electroluminescent element and the HOMO energy of the compound in the light-emitting layer deviates from ± 0.5 eV, hole-injecting property deteriorates and hence luminous efficiency reduces.

[0055] It should be noted that values for the LUMO energy and HOMO energy as used herein are values determined

using software for molecular orbital calculation, Gaussian03, manufactured by Gaussian, Inc., USA, and are defined as values calculated by structure optimization calculation at the B3LYP/6-31G* level. In the calculation for the polymer, values for a trimer and higher multimers are similar to each other. Thus, the calculation was performed for the trimer.

[0056] Next, a structure of the organic EL element of the present invention is described with reference to the drawings. However, the structure of the organic EL element of the present invention is by no means limited to one illustrated in the figure.

[0057] FIG. 1 is a sectional view schematically illustrating a structure example of a general organic EL element to be used in the present invention. In the figure, a substrate is represented by 1, an anode is represented by 2, a hole-injecting layer is represented by 3, a hole-transporting layer is represented by 4, an electron- and/or exciton-blocking layer (EB layer) is represented by 5, a light-emitting layer is represented by 6, an electron-transporting layer is represented by 7, and a cathode is represented by 8. The organic EL element of the present invention has, as essential layers, an anode, a hole-transporting layer, a light-emitting layer, and a cathode. The organic EL element preferably has an anode, a hole-transporting layer, a light-emitting layer, an electron-transporting layer, and a cathode.

[0058] Further, the organic EL element of the present invention may have, as layers other than the essential layers, an electron-transporting layer, an electron-injecting layer, an EB layer, and a hole-blocking layer. In addition, the hole-transporting layer may be a hole-injecting/transporting layer having a hole-injecting function and the electron-transporting layer may be an electron-injecting/transporting layer having an electron-injecting function.

[0059] It should be noted that the organic EL element of the present invention may have an structure opposite to that illustrated in FIG. 1, that is, the cathode 8, the electron-transporting layer 7, the light-emitting layer 6, the EB layer 5, the hole-transporting layer 4, and the anode 2 may be laminated on the substrate 1 in the stated order. Also in this case, a layer may be added or omitted, as necessary.

[0060] Hereinafter, the respective members and the respective layers are described.

-Substrate-

[0061] The organic EL element of the present invention is preferably supported by a substrate. The substrate is not particularly limited and may be any substrate which is conventionally used in an organic EL element. For example, a substrate formed of glass, transparent plastic, or quartz may be used.

-Light-emitting layer-

[0062] The light-emitting layer is a layer containing a light-emitting material, and may be any one of a fluorescent light-emitting layer and a phosphorescent light-emitting layer. Of those, a phosphorescent light-emitting layer is preferred.

[0063] When the light-emitting layer is a fluorescent light-emitting layer, although at least one kind of fluorescent light-emitting material may be used alone as a fluorescent light-emitting material, it is preferred that the fluorescent light-emitting material be used as a fluorescent light-emitting dopant and the host material be incorporated.


[0064] Although the polymer for an organic electroluminescent element represented by the general formula (1) can be used as the fluorescent light-emitting material in the light-emitting layer, when the compound is used in any other organic layer, the fluorescent light-emitting material can be selected from those known, e.g., from many patent literatures. Examples thereof include: a benzoxazole derivative, a benzimidazole derivative, a benzothiazole derivative, a styryl-benzene derivative, a polyphenyl derivative, a diphenylbutadiene derivative, a tetraphenylbutadiene derivative, a naphthalimide derivative, a coumarin derivative, a fused aromatic compound, a perinone derivative, an oxadiazole derivative, an oxazine derivative, aldazine derivative, a pyrrolidine derivative, cyclopentadiene derivative, a bisstyrylanthracene derivative, a quinacridone derivative, a pyrrolopyridine derivative, a thiadiazolopyridine derivative, a cyclopentadiene derivative, a styrylamine derivative, a diketopyrrolopyrrole derivative, and an aromatic dimethyldiyne compound; various metal complexes typified by a metal complex of an 8-quinolinol derivative and a metal complex, rare earth metal complex, or transition metal complex of a pyrromethene derivative; polymer compounds such as polythiophene, polyphenylene, and polyphenylene vinylene; and an organic silane derivative. Preferred examples thereof include a fused aromatic compound, a styryl compound, a diketopyrrolopyrrole compound, an oxazine compound, a metal complex, transition metal complex, or lanthanoid complex of pyrromethene. More preferred examples thereof include naphthacene, pyrene, chrysene, triphenylene, benzo[c]phenanthrene, benzo[a]anthracene, pentacene, perylene, fluoranthene, acenaphthofluoranthene, dibenzo[a,j]anthracene, dibenzo[a,h]anthracene, benzo[a]naphthacene, hexacene, anthanthrene, naphtho[2,1-f]isoquinoline, α -naphthaphenanthridine, phenanthroxazole, quinolino[6,5-f]quinoline, and benzothiophanthrene. Any such material may have an aryl group, a heteroaryl group, a diarylamino group, or an alkyl group as a substituent.

[0065] When the fluorescent light-emitting material is used as a fluorescent light-emitting dopant and the host material is incorporated, the amount of the fluorescent light-emitting dopant to be incorporated into the light-emitting layer desirably falls within the range of 0.01 to 20 wt%, preferably 0.1 to 10 wt%.

[0066] In ordinary cases, an organic EL element is caused to emit light by injecting charge from each of both electrodes, i.e., an anode and a cathode into a light-emitting substance to produce a light-emitting substance in an excited state. It has been said that in the case of a charge injection type organic EL element, 25% of produced excitons are excited to an excited singlet state and the remaining 75% are excited to an excited triplet state. As described in Applied Physics Letters 98, 83302 (2011), it has been known that after the transition of its energy into an excited triplet state, e.g., through intersystem crossing, a specific fluorescent light-emitting substance undergoes inverse intersystem crossing into an excited singlet state by virtue of triplet-triplet annihilation or the absorption of a thermal energy to radiate fluorescence, thereby expressing thermally activated delayed fluorescence. An organic EL element using the compound of the present invention can also express delayed fluorescence. In this case, the delayed fluorescence can include both fluorescent emission and delayed fluorescent emission; provided that light emission from the host material may be partially present in the light emission.

[0067] Meanwhile, a phosphorescent light-emitting dopant and a host material are incorporated as a phosphorescent light-emitting material. The phosphorescent light-emitting dopant material is preferably a material containing an organic metal complex including at least one metal selected from ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum, and gold. Such organic metal complexes are known, e.g., in many patent literatures, and it is possible to select and use the complex.

[0068] Examples of the phosphorescent light-emitting material for providing high luminous efficiency include complexes such as Ir(ppy)_3 , complexes such as $\text{Ir(bt)}_2\text{acac}_3$, and complexes such as PtOEt_3 , the complexes each having a noble metal element such as Ir as a central metal. Hereinafter, the phosphorescent light-emitting material is specifically exemplified below, but is not limited thereto.

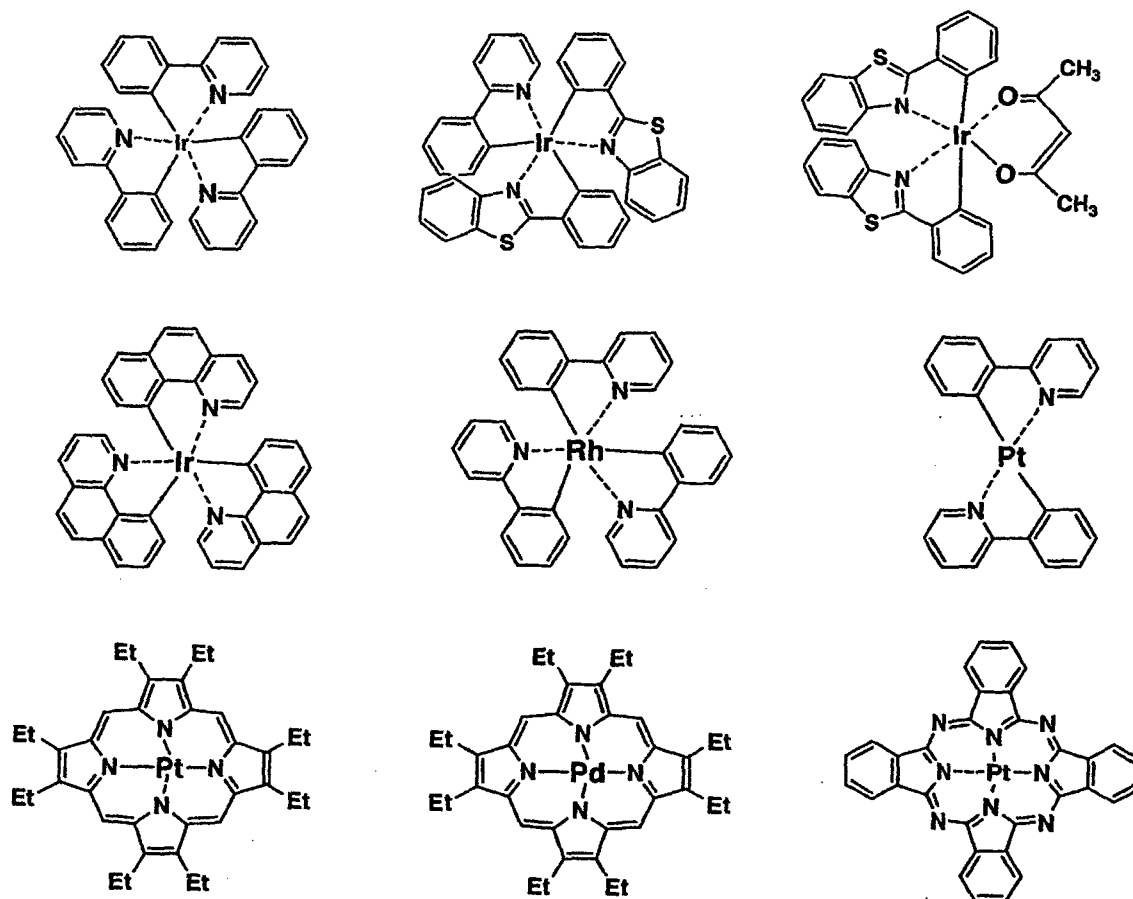

[0069] Organic electroluminescent elements having various emission wavelengths may be produced by using different kinds of light-emitting materials.

[0070] In the case where the above-mentioned light-emitting material is used as a dopant, the amount of the material in the light-emitting layer falls within the range of preferably 1 to 50 wt%, more preferably 5 to 30 wt%.


[0071] As the host material in the light-emitting layer, a known host material may be used, and the polymer of the present invention may be used as the host material. Further, the polymer of the present invention may be used in combination with another host material.

[0072] It is preferred to use, as a usable known host compound, a compound that has a hole-transporting ability and an electron-transporting ability, is capable of preventing luminescence from having a longer wavelength, and has a higher glass transition temperature.

[0073] Such other host materials are known, e.g., in many patent literatures, and hence a suitable host material may be selected therefrom. Specific examples of the host material include, but not limited to, an indole derivative, a carbazole derivative, a triazole derivative, an oxazole derivative, an oxadiazole derivative, an imidazole derivative, a polyarylethane derivative, a pyrazoline derivative, a pyrazolone derivative, a phenylenediamine derivative, an arylamine derivative, an amino-substituted chalcone derivative, a styrylanthracene derivative, a fluorenone derivative, a hydrazone derivative, a stilbene derivative, a silazane derivative, an aromatic tertiary amine compound, a styrylamine compound, an aromatic dimethylidene-based compound, a porphyrin-based compound, an anthraquinodimethane derivative, an anthrone derivative, a diphenylquinone derivative, a thiopyran dioxide derivative, a heterocyclic tetracarboxylic acid anhydride derived, e.g., from naphthalene, or perylene, a phthalocyanine derivative, various metal complexes typified by a metal complex of an 8-quinolinol derivative, a metal phthalocyanine, and metal complexes of benzoxazole and benzothiazole derivatives, and polymer compounds such as a polysilane-based compound, a poly(N-vinylcarbazole) derivative, an aniline-based copolymer, a thiophene oligomer, a polythiophene derivative, a polyphenylene derivative, a polyphenylene vinylene derivative, and a polyfluorene derivative.

-Hole-transporting layer-

[0074] As a hole-transporting compound for forming the hole-transporting layer, the polymer for an organic electroluminescent element of the present invention is advantageously used. Examples thereof include a derivative of triphenylamine as a tertiary amine and a carbazole derivative, as required, as long as the object of the present invention is not impaired. One kind or two or more kinds of low-molecular-weight hole-transporting compounds may be blended as additives to produce a composition. The hole-transporting compound is specifically exemplified below, but is not limited thereto.

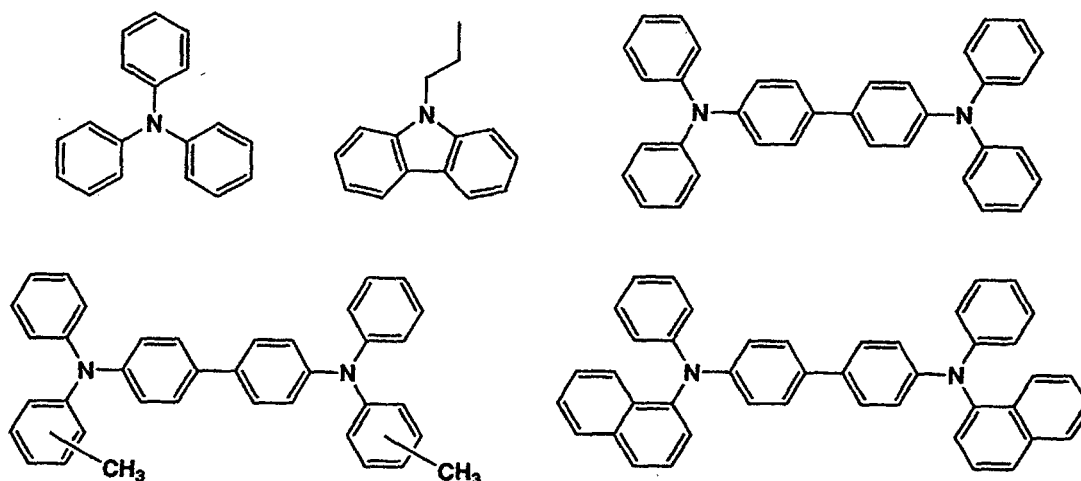

-Electron-blocking layer-

[0075] An electron-blocking layer has a role in blocking electrons from reaching the hole-transporting layer while transporting holes. This can improve the probability of recombination of electrons and holes in the light-emitting layer. As a material for the electron-blocking layer, is given.

-Exciton-blocking layer-

[0076] The exciton-blocking layer refers to a layer for blocking excitons, which are generated by the recombination of holes and electrons in the light-emitting layer, from diffusing to a charge-transporting layer. The insertion of this layer allows excitons to be efficiently confined in the light-emitting layer, which can improve the luminous efficiency of an element. The exciton-blocking layer may be inserted on any one of the anode side and the cathode side of the adjacent light-emitting layer, and may be simultaneously inserted on both of the sides. That is, when the exciton-blocking layer is provided on the anode side, the layer may be inserted between the hole-transporting layer and the light-emitting layer so as to be adjacent to the light-emitting layer. When the exciton-blocking layer is inserted on the cathode side, the layer

may be inserted between the light-emitting layer and the cathode so as to be adjacent to the light-emitting layer. Further, the hole-injecting layer or the electron-blocking layer

may be provided between the anode and the exciton-blocking layer adjacent to the anode side of the light-emitting layer, and the electron-injecting layer, the electron-transporting layer or the hole-blocking layer may be provided between the cathode and the exciton-blocking layer adjacent to the cathode side of the light-emitting layer.


[0077] A usable known material for the exciton-blocking layer is exemplified by 1,3-dicarbazoylbenzene (mCP) or bis(2-methyl-8-quinolinolato)-4-phenylphenolatoaluminum(III) (BALq) .

-Electron and/or exciton-blocking layer (EB layer)-

[0078] The EB layer is an electron-blocking layer, an exciton-blocking layer, or a layer having functions of both the layers, and a material for forming the EB layer is, for example, 1,3-dicarbazoylbenzene (MCP) .

-Electron-transporting layer-

[0079] Examples of the electron-transporting compound for forming the electron-transporting layer include an oxadiazole derivative, an imidazole derivative, and a triazole derivative. As required, one kind or two or more kinds of low-molecular-weight electron-transporting compounds may be blended as additives to produce a composition as long as the object of the present invention is not impaired. The electron-transporting compound is specifically exemplified below, but is not limited thereto.

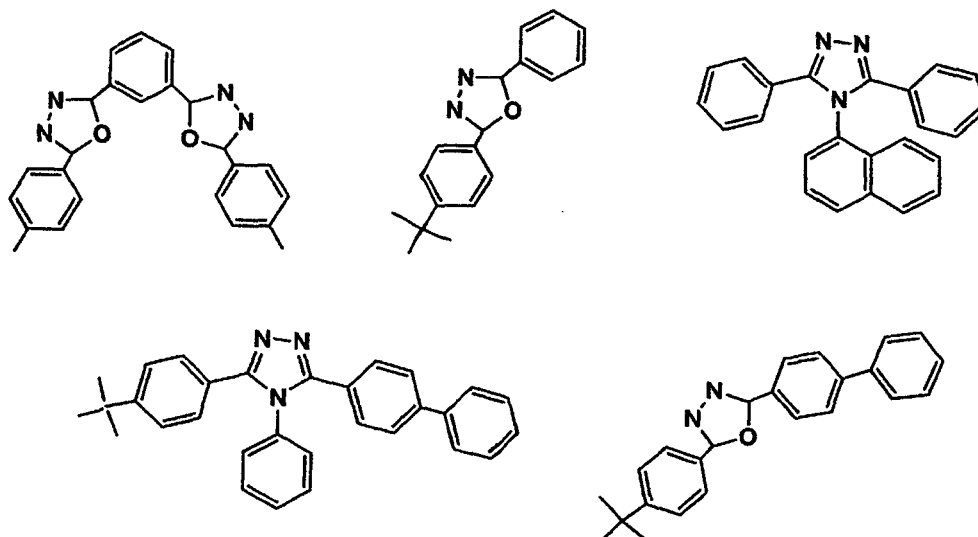

-Hole-injecting layer-

[0080] In order to improve efficiency of hole injection from the anode, the hole-injecting layer may be inserted between the anode and the hole-transporting layer or the light-emitting layer. As a hole-injecting material for forming the hole-injecting layer, a conductive polymer such as a polythiophene derivative or a polypyrrole derivative may be used. Of those, poly(3,4-ethylenedioxythiophene)/polystyrene sulfonic acid (PEDOT/PSS) as a polythiophene derivative is preferred in view of the efficiency of hole injection. In the case of using the hole-injecting layer, the thickness thereof is preferably 200 nm or less, more preferably 100 nm or less.

-Anode-

[0081] The anode supplies holes, e.g., to the hole-injecting layer, the hole-transporting layer, or the light-emitting layer, and is generally formed on a glass substrate. The material for the anode used in the present invention is not particularly limited, and specific examples thereof include a conductive metal oxide such as indium-tin oxide (ITO) or tin oxide, and a metal such as gold, silver, or platinum. Further, a commercially available glass with ITO may be used. The commercially available glass with ITO is usually washed with a cleaner aqueous solution and a solvent, and cleaned by a UV ozone irradiation apparatus or a plasma irradiation apparatus before use.

-Cathode-

[0082] The cathode supplies electrons to the electron-transporting layer or the light-emitting layer. The material for the anode used in the present invention is not particularly limited, and specific examples thereof include a metal such as Li, Mg, Ca, or Al, and an alloy thereof such as an Mg-Ag alloy or an Mg-Al alloy.

[0083] The cathode and anode can be formed by a known method, i.e., a vacuum deposition method or a sputtering method. The thickness of the cathode is preferably 300 nm or less, more preferably 200 nm or less, while the thickness of the anode is preferably 200 nm or less, more preferably 100 nm or less.


Examples

[0084] Hereinafter, the present invention is specifically described by way of examples. However, the present invention is not limited to these examples.

[0085] Compounds synthesized in the examples were identified by one kind or more kinds of analysis methods selected from ¹H-NMR (solvent: deuterated chloroform), FD-MS, GPC, TGA, DSC, UV, and IR analyses.


Example 1

[0086] According to the following scheme, a compound (A-2) and a compound (B-4) are synthesized, and then a polymer (P-1) is synthesized.

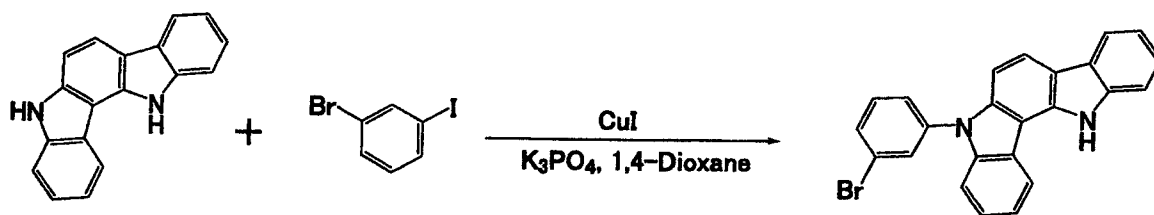


A-1


B-1

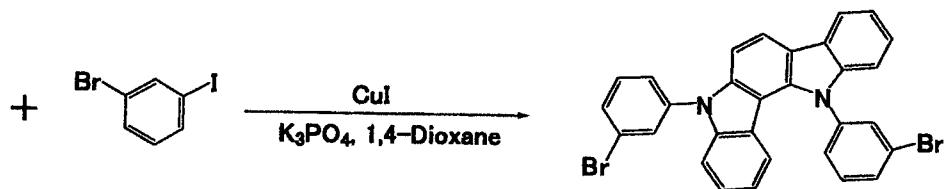

B-2

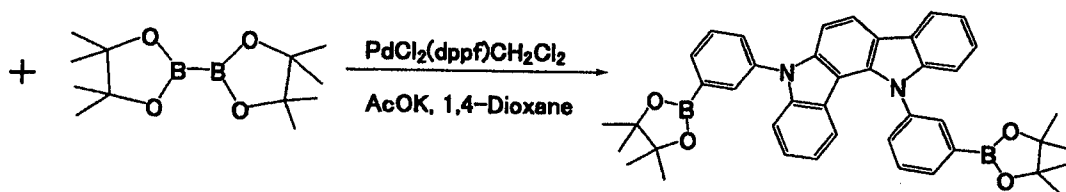


A-2



B-3

B-4

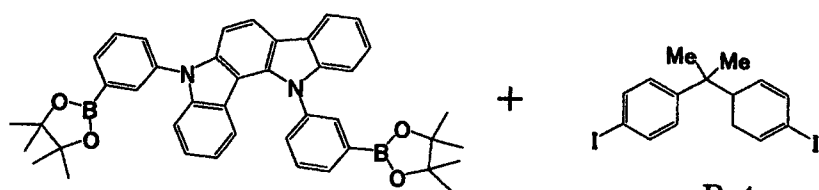

A-2

B-4

P-1

[0087] Under a nitrogen atmosphere, 10.00 g (39.1 mmol) of a compound (A-1), 12.2 g (42.9 mmol) of 1-bromo-3-iodobenzene, 0.24 g (1.2 mmol) of copper iodide, 33.2 g (156.3 mmol) of tripotassium phosphate, and 200 ml of 1, 4-

dioxanewere loaded into a 500-ml recovery flask. After that, 1.34 g (11.7 mmol) of trans-1,2-cyclohexanediamine were added to the solution, and then the mixture was stirred for 2.5 hr while being heated at a bath temperature of 120°C. After the temperature of the solution had been decreased to room temperature, its solid content was separated by filtration. The resultant filtrate was distilled under reduced pressure. The residue was purified by silica gel column chromatography, to thereby obtain 14.6 g (yield: 91%) of a compound (B-1) as white powder.

[0088] Next, under a nitrogen atmosphere, 6.00 g (14.6 mmol) of the compound (B-1), 176 g (623 mmol) of 1-bromo-3-iodobenzene, 5.57g (29.2 mmol) of copper iodide, and 8.1g (58.6mmol) of potassium carbonate were loaded into a 200-ml recovery flask provided with a Dimroth condenser, and were then stirred and dissolved at room temperature. After that, the solution was stirred for 7.5 hr while being heated at a bath temperature of 190°C. After the temperature of the solution had been decreased to room temperature, its solid content was separated by filtration and then excessive 1-bromo-3-iodobenzene was removed by distillation under reduced pressure. Thus, 15.1 g of a crude product were obtained. The crude product was purified by silica gel column chromatography and then recrystallized twice with dichloromethane/hexane to provide 3.0 g of a compound (B-2) (yield: 83%).

[0089] Under a nitrogen atmosphere, 2.87 g (5.07 mmol) of the resultant compound (B-2) were loaded into a 200-ml recovery flask. Next, 3.1 g (12.21 mmol) of bispinacolatodiboron, 1.50 g (15.27 mmol) of potassium acetate, and 100 ml of 1,4-dioxane were loaded into the flask, and then the mixture was stirred at a bath temperature of 60°C for 30 min. 0.25 g (0.31 mmol) of a (1,1'-bis(diphenylphosphinoferrocene))dichloropalladium(II) dichloromethane complex was loaded into the flask, and then the mixture was stirred for 6.5 hr while being heated at a bath temperature of 80°C. Further, 1.55 g (6.1 mmol) of bispinacolatodiboron and 0.25 g (0.31 mmol) of the (1,1'-bis(diphenylphosphinoferrocene))dichloropalladium(II) dichloromethane complex were additionally added twice to the mixture, and then the whole was stirred for 40 hr while being heated. After the temperature of the resultant had been decreased to room temperature, its solid content was separated by filtration and then 1,4-dioxane was removed by distillation under reduced pressure. The residue was purified by silica gel column chromatography to provide 3.00 g of the compound (A-2) (yield: 90%).

[0090] The ¹H-NMR and FD-MS spectrum of the compound (A-2) are shown below.

¹H-NMR (400 MHz, CDCl₃) : δ (ppm); 8.12-8.17 (3H, m), 8.077 (1H, dt, J=8, 2 Hz), 8.002 (1H, br d, J=2 Hz), 7.949 (1H, ddd, J=1, 2, 7 Hz), 7.63-7.67 (4H, m), 7.19-7.33 (6H, m), 6.766 (1H, ddd, J=2, 7, 8 Hz), 5.935 (1H, d, J=8 Hz), 1.352 (12H, s), 1.261 (12H, s) FD-MS spectrum: 660 (M⁺, base)

[0091] Meanwhile, under a nitrogen atmosphere, 32.4 g (0.31 mmol) of a compound (B-3) were loaded into a 2,000-ml recovery flask. Further, 75.3 g (175 mmol) of phenyliodine bis (trifluoroacetate), 41.9 g (165 mmol) of iodine, and 600 ml of carbon tetrachloride were loaded into the flask, and then the mixture was stirred for 2 hr while being heated at a bath temperature of 50°C. After the temperature of the mixture had been decreased to room temperature, carbon tetrachloride was removed by distillation under reduced pressure. The addition of EtOH to the residue resulted in the precipitation of a solid and the solid was separated by filtration. The solid was recrystallized with EtOH twice and then dried to provide 35.8 g of the compound (B-4) (yield: 48%).

[0092] The compound (A-2) and the compound (B-4) were polymerized to synthesize the polymer (P-1). Specifically, 0.66 g (1.0 mmol) of the compound (A-2) and 0.44 g (1.00 mmol) of the compound (B-4) were dissolved in 20 ml of toluene, and then 10 mg of tetrakis(triphenylphosphine) palladium(0) as a catalyst and 10 ml of a 2 M aqueous solution of Na₂CO₃ were added to the solution. After a nitrogen purge, the mixture was subjected to a reaction at 70°C for 3.5 hr. After the temperature of the reaction liquid had been decreased to room temperature, the aqueous layer was separated from the reaction liquid. After that, 243 mg (2 mmol) of phenylboronic acid, 314 mg (2 mmol) of bromobenzene, and 10 mg of tetrakis(triphenylphosphine) palladium(0) were loaded into the remainder, and then terminal sealing was performed by subjecting the mixture to a reaction at a bath temperature of 90°C for 20 hr. After the temperature of the resultant had been decreased to room temperature, the resultant was purified by reprecipitation with MeOH. The purified polymer component was collected and fed to MeOH again to perform reslurrying repetitively, to thereby obtain 0.40 g of the polymer (P-1). The resultant polymer was identified by GPC, TGA, and DSC. The polymer had an Mw in terms of polystyrene of 4,700 as measured by GPC (tetrahydrofuran: THF) and a molecular weight distribution of 1.8.

Example 2

[0093] An element including the polymer (P-1) obtained in Example 1 was evaluated. First, a film of poly(3,4-ethylenedioxythiophene)/polystyrene sulfonic acid (PEDOT/PSS): (manufactured by H.C. Starck, product name: Clevios PCH8000) was formed as a hole-injecting layer at a thickness of 25 nm on a glass substrate with ITO having a thickness of 150 nm, which had been washed with a solvent and treated by UV and ozone. Next, the synthesized polymer (P-1) was dissolved in THF to prepare a 0.4 wt% solution, and a film having a thickness of 20 nm was formed as a hole-transporting layer by a spin coating method. Next, a film of a light-emitting layer having a thickness of 40 nm was formed by co-evaporation using tris(2-(p-tolyl)pyridine)iridium(III) as a light-emitting layer dopant and using 4,4'-bis(9H-carbazol-9-yl)biphenyl as a light-emitting layer host by a vacuum deposition apparatus at a dopant concentration of 0.6 wt%. After that, a film of tris(8-hydroxyquinolato)aluminum (Alq₃) having a thickness of 35 nm and a film of LiF/Al having a thickness

of 170 nm as a cathode were formed using the vacuum deposition apparatus. The element was sealed in a glove box, to thereby produce an organic electroluminescent element.


[0094] An external power supply was connected to the organic electroluminescent element thus obtained, and a DC voltage of 0 to 10 V was applied thereto. As a result, the element was found to have light emission properties as shown in Table 1. The values for luminance, voltage, and luminous efficiency shown in the table are values when the element is driven at 20 mA/cm². It should be noted that the maximum wavelength of the light emission spectrum of the element was 550 nm, and green light emission derived from the iridium complex was observed.

Example 3

[0095] A polymer (P-2) was obtained in the same manner as in Example 1 except that 0.66 g (1.0 mmol) of the compound (A-2) and 0.40 g (0.9 mmol) of the compound (B-4) were used in subjecting the compound (A-2) and the compound (B-4) to polymerization. The polymer had an Mw of 2,500 and a molecular weight distribution of 1.5. In addition, element evaluations were performed in the same manner as in Example 2.

Example 4


[0096] A polymer (P-3) is synthesized from the compound (A-2) and 1,3-diiodobenzene according to the following scheme.

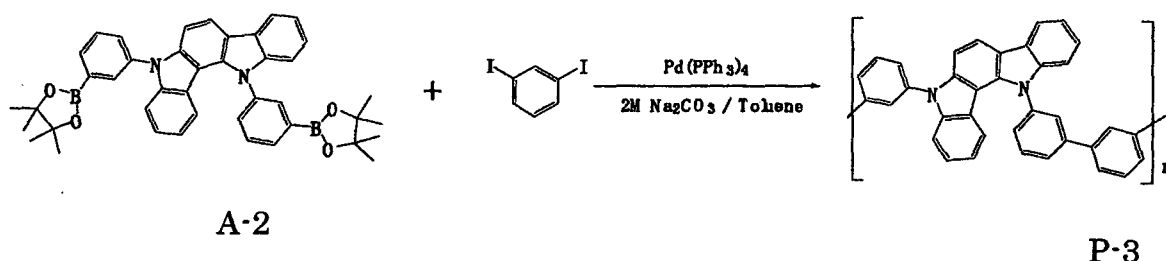

[0097] Specifically, the polymer (P-3) was obtained in the same manner as in Example 1 except that materials were changed to 0.66 g (1.0 mmol) of the compound (A-2) and 0.33 g (1.0 mmol) of 1, 3-diiodobenzene. The polymer had an Mw of 7,500 and a molecular weight distribution of 2.2. In addition, element evaluations were performed in the same manner as in Example 2.

Example 5

[0098] According to the following scheme, a compound (B-5) is synthesized, and then a polymer (P-4) is synthesized from the compound (A-2) and the compound (B-5).

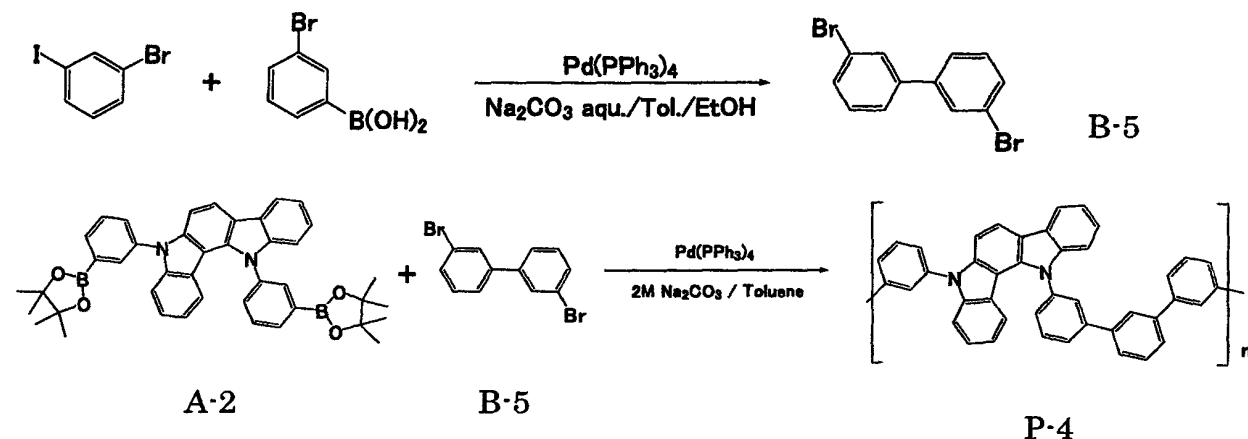


[0099] 50.0 g (177 mmol) of 1-bromo-3-iodobenzene, 35.5 g (177 mmol) of m-bromophenylboronic acid, 3.37 g (2.92 mmol) of triphenylphosphine palladium(0), 600 ml of toluene, and 225 ml of EtOH were loaded into a 2-L four-necked recovery flask equipped with a temperature gage, a reflux tube, and a nitrogen inlet tube, and were dissolved. After a

nitrogen purge, 112.4 g (1.06 mol) of sodium carbonate and 300 ml of pure water were added to the solution, and then the mixture was stirred for 6 hr while being heated at a bath temperature of 100°C. After the temperature of the mixture had been decreased to room temperature, the mixture was transferred to a separating funnel, followed by oil-water separation. After the organic layer had been washed, the layer was dehydrated with anhydrous magnesium sulfate and then the solvent was removed by distillation under reduced pressure. Thus, 62.1 g of a crude product were obtained.

The crude product was distilled under reduced pressure to provide 44.8 g of the compound (B-5) (yield: 81%).
 [0100] Next, the polymer (P-4) was obtained in the same manner as in Example 1 except that materials were changed to 0.66 g (1.0 mmol) of the compound (A-2) and 0.31 g (1.0 mmol) of the compound (B-5). The polymer had an Mw of 3,500 and a molecular weight distribution of 1.7. In addition, element evaluations were performed in the same manner as in Example 2.

Example 6


[0101] A polymer (P-5) is synthesized from the compound (A-2) and bis(4-bromophenyl) ether according to the following scheme.

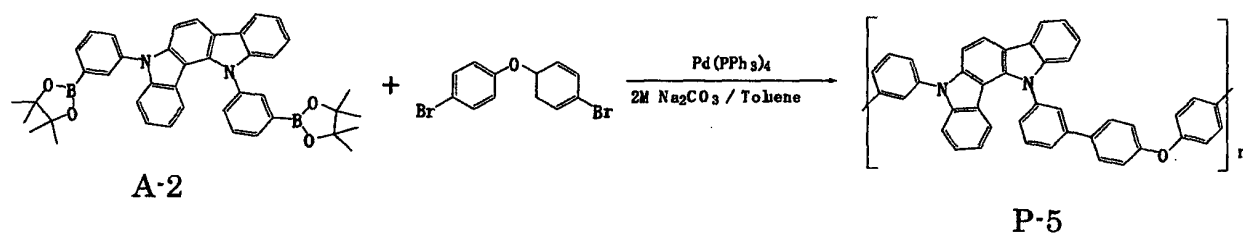

[0102] 0.10 g of the polymer (P-5) was obtained by performing polymerization and a post-treatment in the same manner as in Example 1 except that 0.66 g (1.0 mmol) of the compound (A-2) and 0.33 g (1.0 mmol) of bis (4-bromophenyl) ether were used. The polymer had an Mw of 5, 200 and a molecular weight distribution of 1.9. In addition, element evaluations were performed in the same manner as in Example 2.

Example 7


[0103] A polymer (P-6) is synthesized from the compound (A-2) and N-butylphenyl-N,N'-bis(dibromodiphenyl)amine according to the following scheme.

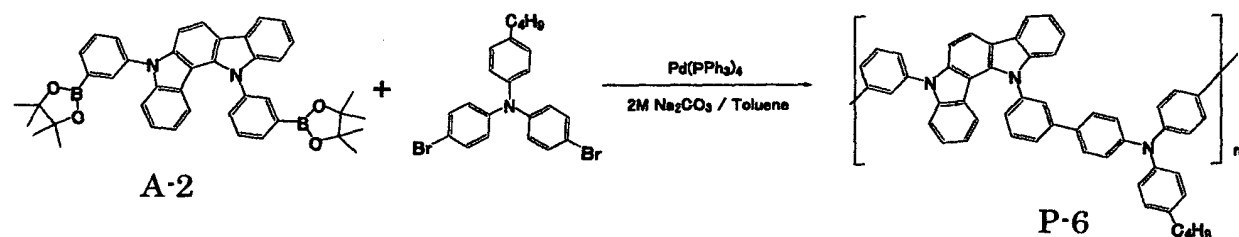

[0104] 0.33 g of the polymer (P-6) was obtained by performing polymerization and a post-treatment in the same manner as in Example 1 except that 0.66 g (1.0 mmol) of the compound (A-2) and 0.46 g (1.0 mmol) of N-butylphenyl-N,N'-bis(dibromodiphenyl)amine were used. The polymer had an Mw of 15,000 and a molecular weight distribution of 1.9. In addition, element evaluations were performed in the same manner as in Example 2.

Example 8


[0105] A polymer (P-7) is synthesized from the compound (A-3) and the compound (B-4) according to the following scheme.

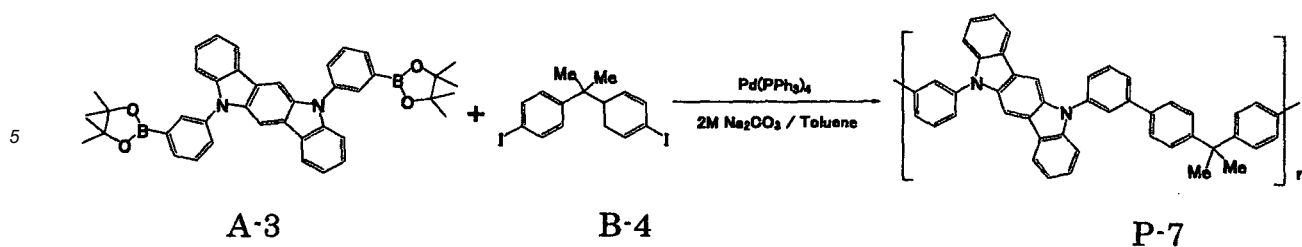

10 **[0106]** 0.32 g of the polymer (P-7) was obtained by performing polymerization and a post-treatment in the same manner as in Example 1 except that the compound (A-1) was changed to 0.66 g (1.0 mmol) of the compound (A-3). The polymer had an Mw of 5,200 and a molecular weight distribution of 1.8. In addition, element evaluations were performed in the same manner as in Example 2.

15 Example 9 (for comparison)

[0107] A polymer (EP-1) is synthesized using the compound (B-5) according to the following scheme.

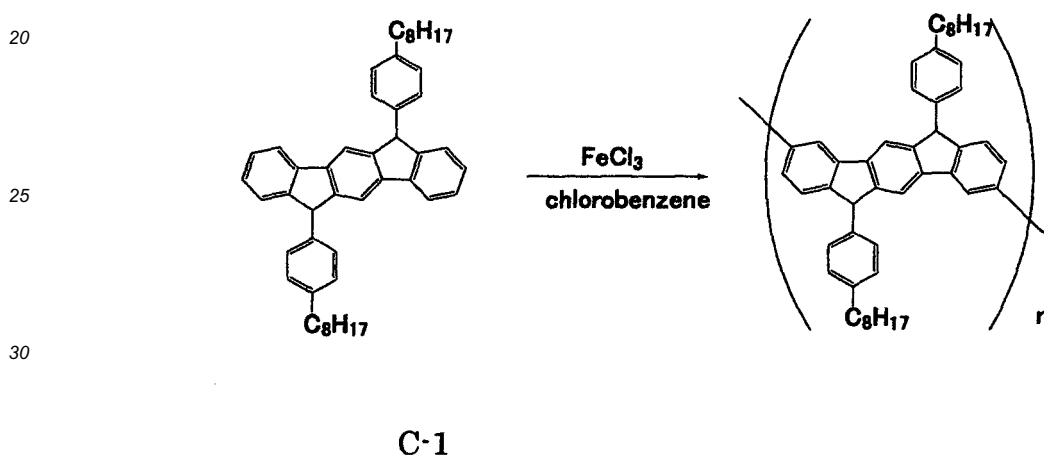

35 **[0108]** 0.7 g (4.3 mmol) of iron(III) chloride and 20 ml of monochlorobenzene were loaded into a 50-ml recovery flask and nitrogen purging was performed. After that, 10 ml of a solution prepared in advance by dissolving 0.7 g (1.1 mmol) of a compound (C-1) in monochlorobenzene were added and polymerization was performed at a bath temperature of 50°C for 44 hr. The polymerization solution was purified by reprecipitation with methanol. The purified polymer component was collected, transferred to a recovery flask, and 20 ml of 5% ammonia water were loaded into the flask, followed by

40 stirring. The precipitate was filtered, repeatedly washed twice with 50 ml of pure water and three times with 50 ml of MeOH, and dried to provide 0.67 g of the polymer (EP-1). The polymer had an Mw of 4,200 and a molecular weight distribution of 1.5. In addition, element evaluations were performed in the same manner as in Example 2.

45 **[0109]** The HOMO energy value of 4,4'-bis (9H-carbazol-9-yl)biphenyl as a host material and the HOMO energy value of a trimer unit of each of the polymers P-1, P-3, P-6, and EP-1 were calculated with the Gaussian 03 by structural optimization calculation at the B3LYP/6-31G* level, and then a difference between the host material and each polymer was calculated. Table 1 shows each difference.

[Table 1]

	Difference in HOMO energy (eV)
P-1	0.36
P-3	0.31
P-6	0.40
EP-1	0.84

[0110] Table 2 shows the polymers used for the element evaluations and the results of the evaluations. All the polymers

are ones used in the hole-transporting layers. It should be noted that the maximum wavelength of the light emission spectrum of the element was 550 nm, and green light emission derived from the iridium complex was observed.

[Table 2]


	Polymer	Mw ($\times 10^4$)	Luminance (cd/m ²)	Voltage (V)	Luminous efficiency(lm/W)
Example 2	P-1	4,700	5,200	8.1	10.1
Example 3	P-2	2,500	4,900	8.3	9.3
Example 4	P-3	7,500	5,000	7.9	9.9
Example 5	P-4	3,500	4,800	8.0	9.4
Example 6	P-5	5,200	4,500	8.1	8.7
Example 7	P-6	15,000	5,500	8.0	10.8
Example 8	P-7	5,200	5,400	8.4	10.1
Example 9	EP-1	4,200	3,600	9.1	6.2

Industrial Applicability


[0111] When the polymer for an organic electroluminescent element of the present invention is used, an organic electroluminescent element having improved hole-inj ecting property and excellent luminous efficiency can be obtained. In addition, a large-area element can be easily formed, e.g., by a coating film formation method.

Claims


1. A polymer for an organic electroluminescent element, comprising a repeating unit represented by the following general formula (1) in repeating units constituting a main chain:

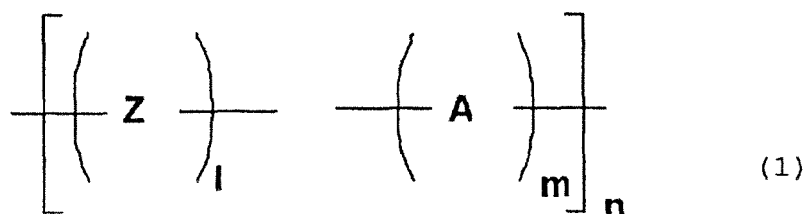


where Z represents one or two or more kinds of repeating units selected from groups derived from indolocarbazoles represented by the following formulae (1a) to (1e), A represents one or two or more kinds of repeating units different from Z, 1 and m each represent an abundance molar ratio, and when a ratio of all repeating units is defined as 100 mol%, 1 is 5 to 100 mol% and m is 0 to 95 mol%, and n represents an average repetition number and is 5 to 1,000;

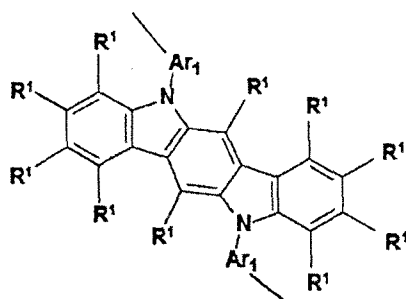


(1a)

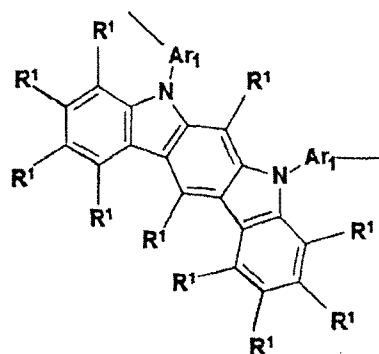


(1b)

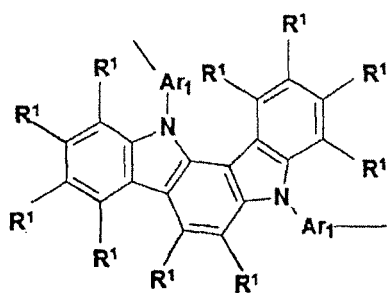

(1c)




(1d)

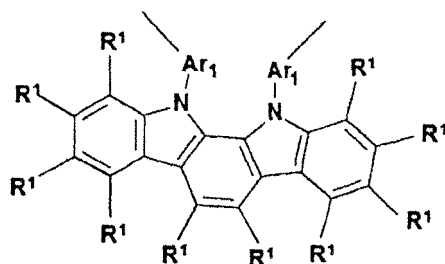

(1e)


in the formulae (1a) to (1e), Ar_1 's each independently represent a substituted or unsubstituted, C_6 to C_{18} arylene group, or a substituted or unsubstituted, C_3 to C_{18} heteroarylene group, and R^1 's each independently represent hydrogen, a C_1 to C_{12} alkyl group, a C_1 to C_{12} alkoxy group, a C_6 to C_{18} aryl group, a C_6 to C_{18} aryloxy group, a C_7 to C_{30} arylalkyl group, a C_7 to C_{30} arylalkyloxy group, a C_3 to C_{18} heteroaryl group, a C_3 to C_{18} heteroaryloxy group, or a C_3 to C_{18} cycloalkyl group; and wherein in the general formula (1), A represents a repeating unit represented by the following formula (3):

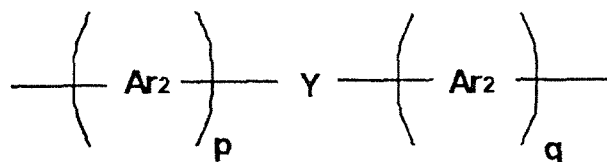

(3)

where Ar_2 's each independently represent a substituted or unsubstituted, C_6 to C_{18} arylene group, or a substituted or unsubstituted, C_3 to C_{18} heteroarylene group, Y represents a C_1 to C_{12} alkylene group, O, S, NR^2 , CO, CO_2 , SO, SO_2 , SCO, NR^2CO , $CONR^2CO$, or a single bond, p and q each represent an integer of 0 to 3, at least one of p and q represents an integer of 1 or more, and when p or q represents 0, Y represents a single bond, and R^2 represents a hydrogen atom, a C_1 to C_{12} alkyl group, a C_3 to C_{18} cycloalkyl group, a C_6 to C_{18} aryl group, a C_7 to C_{30} arylalkyl group, a C_3 to C_{18} heteroaryl group, or a C_4 to C_{30} heteroarylalkyl group.


2. A polymer for an organic electroluminescent element according to claim 1, wherein in the formulae (1a) to (1e), Ar_1 's each independently represent a group represented by the following formula (2):




(2)

where X's each independently represent any one of N or C-L, L's each independently represent a hydrogen atom, a C₆ to C₁₈ aryl group, a C₃ to C₁₈ heteroaryl group, a C₁₂ to C₃₆ diarylamino group, or a bond, and one of L's represents a bond.

3. A polymer for an organic electroluminescent element according to claim 1, wherein in the general formula (1), A represents a repeating unit represented by the following formula (4a) or (4b):



(4a)



(4b)

where Y₁ represents a substituted or unsubstituted, C₁ to C₆ alkylene group, an N-R⁴ group, O, S, or a single bond, Y₂ represents a C-(R⁴)₂ group, an N-R⁴ group, O, or S, R³'s each independently represent hydrogen, a C₁ to C₁₂ alkyl group, a C₁ to C₁₂ alkoxy group, a C₆ to C₁₈ aryl group, a C₆ to C₁₈ aryloxy group, a C₇ to C₃₀ arylalkyl group, a C₇ to C₃₀ arylalkyloxy group, a C₃ to C₁₈ heteroaryl group, a C₃ to C₁₈ heteroaryloxy group, or a C₃ to C₁₈ cycloalkyl group, and R⁴ represents a hydrogen atom, a C₁ to C₁₂ alkyl group, a C₃ to C₁₈ cycloalkyl group, a C₆ to C₁₈ aryl group, a C₇ to C₃₀ arylalkyl group, a C₃ to C₁₈ heteroaryl group, or a C₄ to C₃₀ heteroarylalkyl group.


4. A polymer for an organic electroluminescent element according to claim 1, wherein the polymer for an organic electroluminescent element has a weight-average molecular weight of 1,000 to 1,000,000.
5. A polymer for an organic electroluminescent element according to claim 1, wherein in the general formula (1), m representing an abundance molar ratio is 10 to 90 mol%.
6. A polymer for an organic electroluminescent element according to claim 1, wherein the polymer for an organic electroluminescent element comprises an alternating copolymer in which A and Z as repeating units in the general formula (1) are alternately bonded.
7. An organic electroluminescent element, comprising, between an anode layer and a cathode layer laminated on a substrate, organic layers including at least a hole-transporting layer, a light-emitting layer, and an electron-transporting layer, wherein at least one of the organic layers contains the polymer for an organic electroluminescent element according to any one of claims 1 to 6.
8. An organic electroluminescent element according to claim 7, wherein the organic layer containing the polymer for an organic electroluminescent element comprises the hole-transporting layer.

9. An organic electroluminescent element according to claim 8, wherein:


the light-emitting layer comprises a light-emitting layer containing a guest material and a host material; and
a difference between an HOMO energy of the polymer for an organic electroluminescent element contained in
the hole-transporting layer and an HOMO energy of the host material contained in the light-emitting layer is
within ± 0.5 eV.

Patentansprüche


1. Ein Polymer für ein organisches Elektrolumineszenzelement, umfassend eine Wiederholungseinheit, dargestellt durch die folgende allgemeine Formel (1), in Wiederholungseinheiten, die eine Hauptkette bilden:

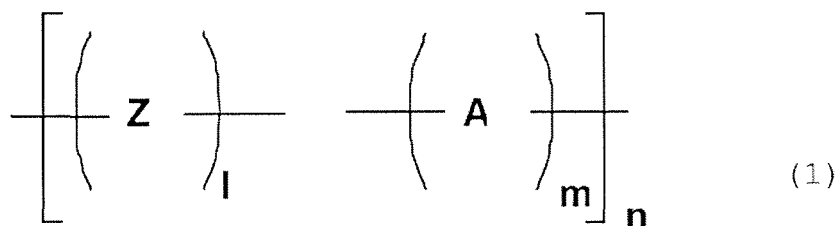


wobei Z eine oder zwei oder mehr Arten an Wiederholungseinheiten, ausgewählt aus von Indolocarbazolen abgeleiteten Resten, dargestellt durch die folgenden Formeln (1a) bis (1e), darstellt, A eine oder zwei oder mehr Arten an von Z verschiedenen Wiederholungseinheiten darstellt, l und m jeweils ein molares Häufigkeitsverhältnis darstellen, und wenn ein Verhältnis aller Wiederholungseinheiten als 100 Mol-% definiert ist, l gleich 5 bis 100 Mol-% ist und m gleich 0 bis 95 Mol-% ist und n eine mittlere Wiederholungszahl darstellt und 5 bis 1.000 beträgt;

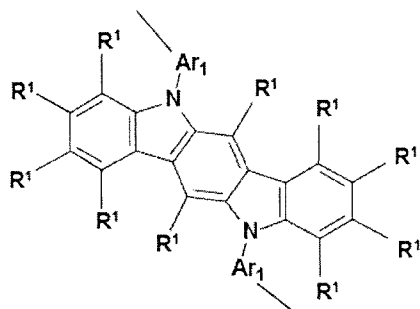


(1a)

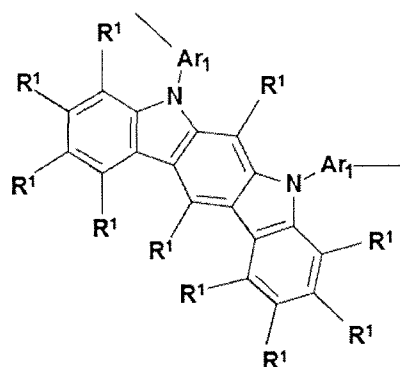


(1b)

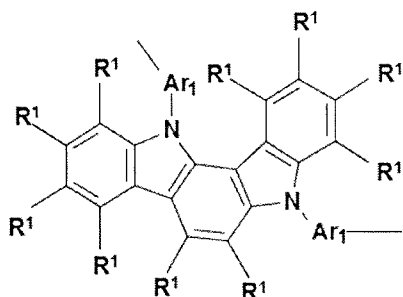

(1c)

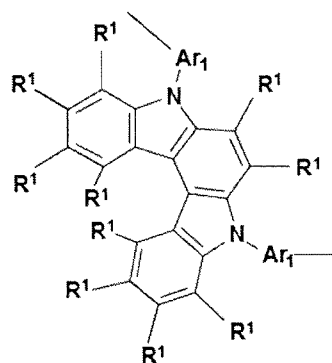


(1d)

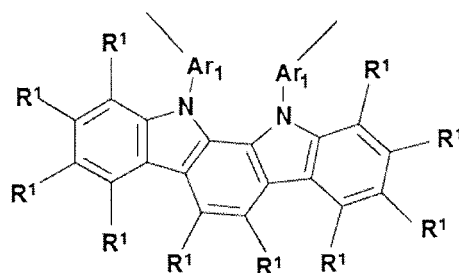

(1e)


in den Formeln (1a) bis (1e) die Reste Ar_1 jeweils unabhängig einen substituierten oder unsubstituierten C_6 - bis C_{18} -Arylenrest oder einen substituierten oder unsubstituierten C_3 - C_{18} -Heteroarylenrest darstellen und die Reste R^1 jeweils unabhängig Wasserstoff, einen C_1 - bis C_{12} -Alkylrest, einen C_1 - bis C_{12} -Alkoxyrest, einen C_6 - bis C_{18} -Arylrest, einen C_6 - bis C_{18} -Aryloxyrest, einen C_7 - bis C_{30} -Arylalkylrest, einen C_7 - bis C_{30} -Arylalkyloxyrest, einen C_3 - bis C_{18} -Heteroarylrest, einen C_3 - bis C_{18} -Heteroaryloxyrest oder einen C_3 - bis C_{18} -Cycloalkylrest darstellen; und wobei in der allgemeinen Formel (1) A eine durch die folgende Formel (3) dargestellte Wiederholungseinheit darstellt:

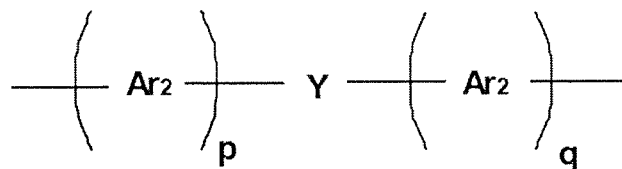

(3)

wobei die Reste Ar_2 jeweils unabhängig einen substituierten oder unsubstituierten C_6 - bis C_{18} -Arylenrest oder einen substituierten oder unsubstituierten C_3 - bis C_{18} -Heteroarylenrest darstellen, Y einen C_1 - bis C_{12} -Alkylrest, O, S, NR^2 , CO, CO_2 , SO, SO_2 , SCO, NR^2CO , $CONR^2CO$ oder eine Einfachbindung darstellt, p und q jeweils eine ganze Zahl von 0 bis 3 darstellen, mindestens eines von p und q eine ganze Zahl von 1 oder mehr darstellt, und wenn p oder q 0 darstellt, Y eine Einfachbindung darstellt, und R^2 ein Wasserstoffatom, einen C_1 - bis C_{12} -Alkylrest, einen C_3 - bis C_{18} -Cycloalkylrest, einen C_6 - bis C_{18} -Arylrest, einen C_7 - bis C_{30} -Arylalkylrest, einen C_3 - bis C_{18} -Heteroarylrest oder einen C_4 - bis C_{30} -Heteroarylalkylrest darstellt.


2. Ein Polymer für ein organisches Elektrolumineszenzelement nach Anspruch 1, wobei in den Formeln (1a) bis (1e) die Reste Ar_1 jeweils unabhängig einen durch die folgende Formel (2) dargestellten Rest darstellen:




(2)

wobei die Reste X jeweils unabhängig eines aus N oder C-L darstellen, die Reste L jeweils unabhängig ein Wasserstoffatom, einen C_6 - bis C_{18} -Arylrest, einen C_3 - bis C_{18} -Heteroarylrest, einen C_{12} - bis C_{36} -Diarylaminorest oder eine Bindung darstellen und einer der Reste L eine Bindung darstellt.

3. Ein Polymer für ein organisches Elektrolumineszenzelement nach Anspruch 1, wobei in der allgemeinen Formel (1) A eine Wiederholungseinheit, dargestellt durch die folgende Formel (4a) oder (4b), darstellt:



(4a)



(4b)

wobei Y_1 einen substituierten oder unsubstituierten C_1 - bis C_6 -Alkylrest, einen Rest $N-R^4$, O, S oder eine Einfachbindung darstellt, Y_2 einen Rest $C-(R^4)_2$, einen Rest $N-R^4$, O oder S darstellt, die Reste R^3 jeweils unabhängig Wasserstoff, einen C_1 - bis C_{12} -Alkylrest, einen C_1 - bis C_{12} -Alkoxyrest, einen C_6 - bis C_{18} -Arylrest, einen C_6 - bis C_{18} -Aryloxyrest, einen C_7 - bis C_{30} -Arylalkylrest, einen C_7 - bis C_{30} -Arylalkyloxyrest, einen C_3 - bis C_{18} -Heteroarylrest, einen C_3 - bis C_{18} -Heteroaryloxyrest oder einen C_3 - bis C_{18} -Cycloalkylrest darstellen und R^4 ein Wasserstoffatom, einen C_1 - bis C_{12} -Alkylrest, einen C_3 - bis C_{18} -Cycloalkylrest, einen C_6 - bis C_{18} -Arylrest, einen C_7 - bis C_{30} -Arylalkylrest, einen C_3 - bis C_{18} -Heteroarylrest oder einen C_4 - bis C_{30} -Heteroarylalkylrest darstellt.


4. Ein Polymer für ein organisches Elektrolumineszenzelement nach Anspruch 1, wobei das Polymer für ein organisches Elektrolumineszenzelement ein Gewichtsmittel des Molekulargewichts von 1.000 bis 1.000.000 aufweist.
5. Ein Polymer für ein organisches Elektrolumineszenzelement nach Anspruch 1, wobei in der allgemeinen Formel (1) m, das eine molares Häufigkeitsverhältnis darstellt, 10 bis 90 Mol-% beträgt.
6. Ein Polymer für ein organisches Elektrolumineszenzelement nach Anspruch 1, wobei das Polymer für ein organisches Elektrolumineszenzelement ein alternierendes Copolymer umfasst, in dem A und Z als Wiederholungseinheiten in der allgemeinen Formel (1) alternierend gebunden sind.
7. Ein organisches Elektrolumineszenzelement, das zwischen einer Anodenschicht und einer Kathodenschicht, die auf ein Substrat laminiert sind, organische Schichten umfasst, die mindestens eine Lochtransportierende Schicht, eine lichtemittierende Schicht und eine elektronentransportierende Schicht enthalten, wobei mindestens eine der organischen Schichten das Polymer für ein organisches Elektrolumineszenzelement nach einem der Ansprüche 1 bis 6 enthält.
8. Ein organisches Elektrolumineszenzelement nach Anspruch 7, wobei die organische Schicht, die das Polymer für ein organisches Elektrolumineszenzelement enthält, die Lochtransportierende Schicht umfasst.
9. Ein organisches Elektrolumineszenzelement nach Anspruch 8, wobei:

die lichtemittierende Schicht eine lichtemittierende Schicht umfasst, die ein Gastmaterial und ein Wirtsmaterial enthält; und


eine Differenz zwischen einer HOMO-Energie des Polymers für ein organisches Elektrolumineszenzelement, das in der Lochtransportierenden Schicht enthalten ist, und einer HOMO-Energie des Wirtsmaterials, das in der lichtemittierenden Schicht enthalten ist, im Bereich von $\pm 0,5$ eV liegt.

Revendications


1. Polymère pour élément électroluminescent organique, comprenant un motif répétitif représenté par la formule générale (1) suivante sous forme de motifs répétitifs constituant une chaîne principale :

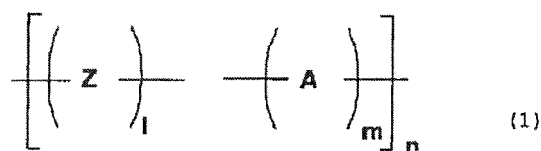


où Z représente un ou deux types ou plus de motifs répétitifs choisis parmi les groupes dérivés des indolocarbazoles représentés par les formules (1a) à (1e) suivantes, A représente un ou deux types ou plus de motifs répétitifs différents de Z, l et m représentent chacun un rapport molaire d'abondance, et quand une proportion de tous les motifs répétitifs est définie à 100 % en mol, l vaut de 5 à 100 % en mol et m vaut de 0 à 95 % en mol, et n représente un nombre moyen de répétitions et vaut de 5 à 1 000 ;

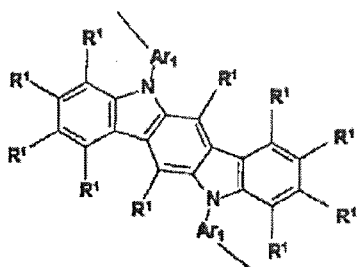


(1a)




(1b)



(1c)




(1d)

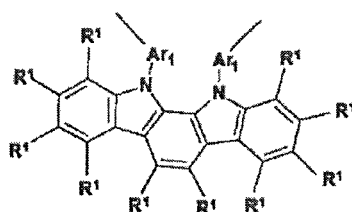


(1e)

dans les formules (1a) à (1e), les Ar₁ représentent chacun indépendamment un groupe arylène C₆ à C₁₈ substitué ou non, ou un groupe hétéroarylène C₃ à C₁₈ substitué ou non, et les R¹ représentent chacun indépendamment un atome d'hydrogène, un groupe alkyle C₁ à C₁₂, un groupe alcoxy C₁ à C₁₂, un groupe aryle C₆ à C₁₈, un groupe aryloxy C₆ à C₁₈, un groupe arylalkyle C₇ à C₃₀, un groupe arylalkyloxy C₇ à C₃₀, un groupe hétéroaryle C₃ à C₁₈, un groupe hétéroaryloxy C₃ à C₁₈, ou un groupe cycloalkyle C₃ à C₁₈; et dans lequel dans la formule générale (1), A représente un motif répétitif représenté par la formule (3) suivante :

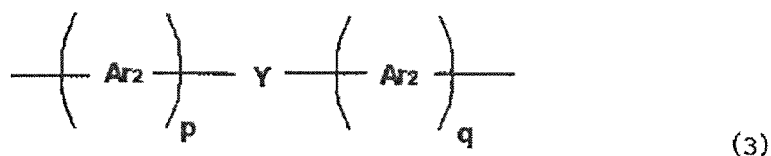

où les Ar_2 représentent chacun indépendamment un groupe arylène C_6 à C_{18} , substitué ou non, ou un groupe hétéroarylène C_3 à C_{18} , substitué ou non, Y représente un groupe alkylène C_1 à C_{12} , O, S, NR^2 , CO, CO_2 , SO, SO_2 , SCO, NR^2CO , CONR^2CO , ou une liaison simple, p et q représentent chacun un entier de 0 à 3, au moins un des p et q représente un entier de 1 ou plus, et quand p ou q représente 0, Y représente une liaison simple, et R^2 représente un atome d'hydrogène, un groupe alkyle C_1 à C_{12} , un groupe cycloalkyle C_3 à C_{18} , un groupe aryle C_6 à C_{18} , un groupe arylalkyle C_7 à C_{30} , un groupe hétéroaryle C_3 à C_{18} , ou un groupe hétéroarylalkyle C_4 à C_{30} .


2. Polymère pour élément électroluminescent organique selon la revendication 1, dans lequel dans les formules (1a) à (1e), les Ar_1 représentent chacun indépendamment un groupe représenté par la formule (2) suivante :




(2)

où les X représentent chacun indépendamment l'un quelconque de N ou C-L, les L représentent chacun indépendamment un atome d'hydrogène, un groupe aryle C_6 à C_{18} , un groupe hétéroaryle C_3 à C_{18} , un groupe diarylamino C_{12} à C_{36} , ou une liaison, et un des L représente une liaison.

3. Polymère pour élément électroluminescent organique selon la revendication 1, dans lequel dans la formule générale (1), A est un motif répétitif représenté par la formule (4a) ou (4b) suivante :



(4a)



(4b)

où Y_1 représente un groupe alkylène C_1 à C_6 , substitué ou non, un groupe N-R^4 , O, S, ou une liaison simple, Y_2 représente un groupe $\text{C-(R}^4)_2$, un groupe N-R^4 , O, ou S, les R^3 représentent chacun indépendamment un atome d'hydrogène, un groupe alkyle C_1 à C_{12} , un groupe alcoxy C_1 à C_{12} , un groupe aryle C_6 à C_{18} , un groupe aryloxy C_6 à C_{18} , un groupe arylalkyle C_7 à C_{30} , un groupe arylalkyloxy C_7 à C_{30} , un groupe hétéroaryle C_3 à C_{18} , un groupe hétéroaryloxy C_3 à C_{18} , ou un groupe cycloalkyle C_3 à C_{18} , et R^4 représente un atome d'hydrogène, un groupe alkyle C_1 à C_{12} , un groupe cycloalkyle C_3 à C_{18} , un groupe aryle C_6 à C_{18} , un groupe arylalkyle C_7 à C_{30} , un groupe hétéroaryle C_3 à C_{18} , ou un groupe hétéroarylalkyle C_4 à C_{30} .

4. Polymère pour élément électroluminescent organique selon la revendication 1, dans lequel le polymère pour élément

électroluminescent organique a un poids moléculaire moyen en poids de 1 000 à 1 000 000.

5 5. Polymère pour élément électroluminescent organique selon la revendication 1, dans lequel dans la formule générale (1), m représentant un rapport molaire d'abondance est de 10 à 90 % en mol.

6. Polymère pour élément électroluminescent organique selon la revendication 1, dans lequel le polymère pour élément électroluminescent organique comprend un copolymère alterné dans lequel A et Z à titre de motifs répétitifs dans la formule générale (1) sont liés en alternance.

10 7. Élément électroluminescent organique, comprenant, entre une couche anodique et une couche cathodique stratifiées sur un substrat, des couches organiques contenant au moins une couche de transport de trous, une couche électroluminescente, et une couche de transport d'électrons, dans lequel au moins une des couches organiques contient le polymère pour élément électroluminescent organique selon l'une quelconque des revendications 1 à 6.


15 8. Élément électroluminescent organique selon la revendication 7, dans lequel la couche organique contenant le polymère pour élément électroluminescent organique comprend la couche de transport de trous.

9. Élément électroluminescent organique selon la revendication 8, dans lequel :

20 la couche électroluminescente comprend une couche électroluminescente contenant un matériau "invité" et un matériau hôte ; et

une différence entre l'énergie HOMO du polymère pour élément électroluminescent organique contenu dans la couche de transport de trous et l'énergie HOMO du matériau hôte contenu dans la couche électroluminescente est dans les $\pm 0,5$ eV.

Fig.1

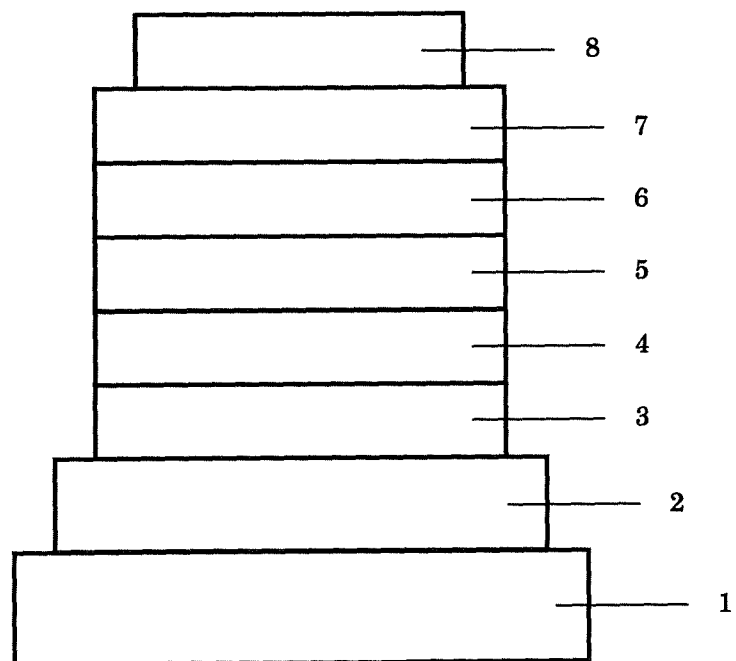

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 5205377 A [0011]
- JP 11256148 A [0011]
- JP 2006193729 A [0011]
- JP 4019042 B [0011]

Non-patent literature cited in the description

- *Appl. Phys. Lett.*, 1995, vol. 59, 2760 [0012]
- *Synthetic Metals*, 1993, vol. 55-57, 4163 [0012]
- *Applied Physics Letters*, 2011, vol. 98, 83302 [0066]

专利名称(译)	用于有机电致发光元件的聚合物和使用它的有机电致发光元件		
公开(公告)号	EP2725633B1	公开(公告)日	2018-08-01
申请号	EP2012804346	申请日	2012-06-18
[标]申请(专利权)人(译)	新日铁化学株式会社		
申请(专利权)人(译)	NIPPON STEEL住金化工有限公司.		
当前申请(专利权)人(译)	NIPPON STEEL住金化工有限公司.		
[标]发明人	TANAKA HIROSHIGE ASARI TOHRU SHIRAISHI KAZUTO SAKAI MITSURU NIINA MASASHI YOSHIMURA KAZUAKI		
发明人	TANAKA HIROSHIGE ASARI TOHRU SHIRAISHI KAZUTO SAKAI MITSURU NIINA MASASHI YOSHIMURA KAZUAKI		
IPC分类号	H01L51/50 C08G61/12 C09K11/06		
优先权	2011141640 2011-06-27 JP		
其他公开文献	EP2725633A4 EP2725633A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种用于有机电致发光元件的聚合物，其具有改善的发光效率并且适用于湿法工艺，以及由其获得的有机电致发光元件。用于有机电致发光元件的聚合物具有由构成主链的重复单元中的[- (Z) 1 - - (A) m -] n 表示的重复单元。此外，有机电致发光元件包括在层压在基板上的阳极和阴极之间的包括空穴传输层和发光层的有机层，其中至少一个有机层包含用于有机物的聚合物。电致发光元件。在重复单元中，Z表示N-吡啶并咔唑基，A表示不同于Z的重复单元，1和m各自表示丰度摩尔比，并且1是5至100mol%，m是0至95mol%，并且n是2到10,000。

