



(11)

EP 3 343 660 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
04.07.2018 Bulletin 2018/27

(51) Int Cl.:
H01L 51/52^(2006.01) H01L 51/54^(2006.01)
H01L 51/56^(2006.01)

(21) Application number: **16812665.4**

(86) International application number:
PCT/CN2016/072294

(22) Date of filing: **27.01.2016**

(87) International publication number:
WO 2017/036084 (09.03.2017 Gazette 2017/10)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(72) Inventors:
• **WU, Haidong**
Beijing 100176 (CN)
• **LAI, Weilin**
Beijing 100176 (CN)
• **CHEN, Kai**
Beijing 100176 (CN)
• **BAI, Juanjuan**
Beijing 100176 (CN)
• **MA, Wenyu**
Beijing 100176 (CN)


(30) Priority: **28.08.2015 CN 201510542671**

(71) Applicants:
• **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)
• **Ordos Yuansheng Optoelectronics Co., Ltd.**
Ordos, Inner Mongolia 017020 (CN)

(74) Representative: **Cohausz & Florack**
Patent- & Rechtsanwälte
Partnerschaftsgesellschaft mbB
Bleichstraße 14
40211 Düsseldorf (DE)

(54) **ORGANIC ELECTROLUMINESCENCE COMPONENT AND MANUFACTURING METHOD THEREOF, AND DISPLAY DEVICE**

(57) The application provides an organic light emitting device, a method of fabricating the organic light emitting device, and a display device. The organic light emitting device comprises an anode layer, a cathode layer, and a light emitting layer provided between the anode layer and the cathode layer, and further comprises a carrier velocity adjustment layer provided between the light emitting layer and at least one of the anode layer and the cathode layer, and the carrier velocity adjustment layer is used for adjusting an injection rate of a carrier.

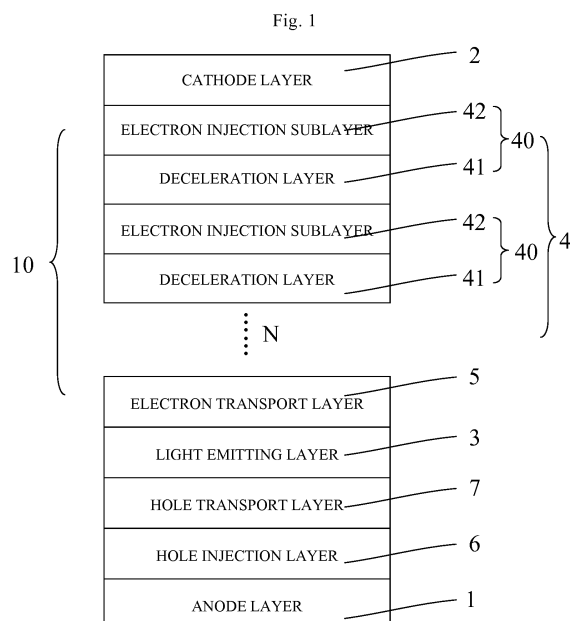

EP 3 343 660 A1

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to Chinese Patent Application No. 201510542671.5, filed on August 28, 2015, the contents of which are incorporated by reference in the entirety.

TECHNICAL FIELD

[0002] The application relates to the field of display technology, particularly to an organic light emitting device, a method of fabricating the organic light emitting device, and a display device.

BACKGROUND

[0003] An organic light emitting device (referred to as OLED) is a light emitting device using an organic solid semiconductor as a light emitting material, and has a broad application prospect due to its advantages of simple fabricating process, low cost, low power consumption, high luminous brightness, wide range of operating temperature, etc.

[0004] A structure of an existing OLED generally comprises an anode layer, a cathode layer, and an organic function layer provided between the anode layer and the cathode layer. The organic function layer comprises a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer and an electron injection layer, which are sequentially provided in a direction from the anode layer to the cathode layer. The hole injection layer is adjacent to the anode layer, and the electron injection layer is adjacent to the cathode layer.

[0005] A light emitting mechanism of the OLED is as follows. When an external voltage is applied between the anode layer and the cathode layer, driven by the external voltage, the holes injected from the anode layer enter the light emitting layer through the hole injection layer and the hole transport layer, and the electrons injected from the cathode layer enter the light emitting layer through the electron injection layer and the electron transport layer. The holes and the electrons which have entered the light emitting layer recombine to form excitons in a recombination region, and the excitons emit light by radiative transition, thereby resulting in light-emitting phenomenon, i.e., electroluminescence.

[0006] The inventor finds at least the following problems that exist in the prior art. Since the electrons and the holes have different injection rates, i.e., the injection rate of the electrons is larger than that of the holes, amounts of the electrons and the holes injected into the recombination region of the light emitting layer are different from each other, resulting in reduction of a luminous efficiency and a life time of the organic light emitting device.

SUMMARY

[0007] In view of the above problems existing in the organic light emitting device in the prior art, the embodiments of the application provide an organic light emitting device which have a high luminous efficiency and a long life time, a method of fabricating the organic light emitting device, and a display device.

[0008] An embodiment of the application provides an organic light emitting device comprising an anode layer, a cathode layer, and a light emitting layer provided between the anode layer and the cathode layer, the organic light emitting device further comprises a carrier velocity adjustment layer provided between the light emitting layer and at least one of the anode layer and the cathode layer, and the carrier velocity adjustment layer is used for adjusting an injection rate of a carrier.

[0009] The carrier velocity adjustment layer may be provided between the light emitting layer and the cathode layer, and the carrier velocity adjustment layer may comprise an electron velocity adjustment layer. The electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, and the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer. The electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons.

[0010] The carrier velocity adjustment layer may further comprise an electron transport layer provided between the light emitting layer and the electron velocity adjustment layer.

[0011] The electron transport layer may comprise a material having an electron mobility larger than $10^{-3}\text{cm}^2/\text{Vs}$.

[0012] The material of the electron transport layer may comprise any one of 2-(4-biphenyl)-5-phenyl oxadiazole (PBD), 2,5-bis(1-naphthyl)-1,3,4-oxadiazole (BND), and 2,4,6-triphenyl-1,3,5-triazine (TRZ).

[0013] A thickness of the electron transport layer may range from 10nm to 30nm.

[0014] A material of the deceleration layer may comprise any one of magnesium, silver, aluminum, lithium, potassium and calcium, or an alloy thereof.

[0015] A thickness of the deceleration layer may range from 1nm to 10nm.

[0016] A material of the electron injection sublayer may comprise any one of lithium fluoride, sodium fluoride, potassium fluoride, rubidium fluoride, cesium fluoride, lithium oxide, and lithium metaborate.

[0017] A thickness of the electron injection sublayer may range from 1nm to 5nm.

[0018] The number of the electron trap units may range from two to ten.

[0019] The organic light emitting device may further comprise a hole injection layer and a hole transport layer which are provided between the anode layer and the light

emitting layer. The hole injection layer is provided between the anode layer and the hole transport layer.

[0020] The carrier velocity adjustment layer may be provided between the light emitting layer and the anode layer, and the carrier velocity adjustment layer may comprise a hole velocity adjustment layer. The hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, and the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer. The hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes.

[0021] A material of the hole injection sublayer may be a P-type doped material.

[0022] A material of the hole injection sublayer may comprise any one of 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene, 2,3,5,6-tetrafluoro-7,7',8,8'-tetracyanoquinodimethane, and tris(4-bromophenyl)aminium hexachloroantimonate.

[0023] A thickness of the hole injection sublayer may range from 1nm to 5nm.

[0024] A material of the acceleration layer may comprise any one of N,N'-bis(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine, triphenyldiamine derivative, and 1,3,5-tris(N-3-methylphenyl-N-phenylamino) benzene.

[0025] A thickness of the acceleration layer may range from 10nm to 200nm.

[0026] The number of the hole acceleration units may range from two to ten.

[0027] The organic light emitting device may further comprise an electron injection layer and an electron transport layer which are provided between the cathode layer and the light emitting layer. The electron transport layer is provided between the light emitting layer and the electron injection layer.

[0028] The carrier velocity adjustment layer may comprise a hole velocity adjustment layer and an electron velocity adjustment layer, the hole velocity adjustment layer is provided between the anode layer and the light emitting layer, and the electron velocity adjustment layer is provided between the cathode layer and the light emitting layer. The hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer, the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes. The electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer, the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for

reducing the injection rate of the electrons.

[0029] The organic light emitting device may further comprise an electron transport layer provided between the light emitting layer and the electron velocity adjustment layer.

[0030] An embodiment of the application further provides a method of fabricating an organic light emitting device, comprising forming an anode layer and a cathode layer on a substrate, and forming a light emitting layer between the cathode layer and the anode layer, and the method further comprises forming a carrier velocity adjustment layer between the light emitting layer and at least one of the anode layer and the cathode layer,

[0031] The carrier velocity adjustment layer may be formed between the cathode layer and the light emitting layer, and the carrier velocity adjustment layer comprises an electron velocity adjustment layer. The electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, and the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer. The electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons. Forming the electron velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the deceleration layer and the electron injection sublayer on the substrate having the light emitting layer formed thereon; and then repeatedly forming the deceleration layer and the electron injection sublayer.

[0032] Forming the electron velocity adjustment layer may further comprise forming an electron transport layer between the light emitting layer and the deceleration layer closest to the light emitting layer.

[0033] The carrier velocity adjustment layer may be formed between the light emitting layer and the anode layer, and the carrier velocity adjustment layer comprises a hole velocity adjustment layer. The hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, and the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer. The hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes. Forming the hole velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the hole injection sublayer and the acceleration layer on the substrate having the anode layer formed thereon; and then repeatedly forming the hole injection sublayer and the acceleration layer.

[0034] The carrier velocity adjustment layer may comprise a hole velocity adjustment layer and an electron velocity adjustment layer, the hole velocity adjustment layer is formed between the anode layer and the light emitting layer, and the electron velocity adjustment layer is formed between the cathode layer and the light emitting

layer. The hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer, the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes. The electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer, the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons. Forming the hole velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the hole injection sublayer and the acceleration layer on the substrate having the anode layer formed thereon; and then repeatedly forming the hole injection sublayer and the acceleration layer. Forming the electron velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the deceleration layer and the electron injection sublayer on the substrate having the light emitting layer formed thereon; and then repeatedly forming the deceleration layer and the electron injection sublayer.

[0035] Forming the electron velocity adjustment layer may further comprise forming an electron transport layer between the light emitting layer and the deceleration layer closest to the light emitting layer.

[0036] An embodiment of the application further provides a display device, comprising the organic light emitting device described above.

[0037] The carrier velocity adjustment layer is provided in the organic light emitting device of the embodiments of the application, and the carrier velocity adjustment layer is provided between the light emitting layer and at least one of the anode layer and the cathode layer. The carrier velocity adjustment layer may adjust the injection rate of corresponding carrier into the light emitting layer, so that the injection rates of different carriers tend to be balanced, thereby improving the luminous efficiency and the life time of the organic light emitting device.

BRIEF DESCRIPTION OF THE FIGURES

[0038]

FIG. 1 is a structural schematic diagram of an organic light emitting device according to an embodiment of the application.

FIG. 2 is a structural schematic diagram of an organic light emitting device according to an embodiment of the application.

FIG. 3 is a structural schematic diagram of an organic light emitting device according to an embodiment of the application.

DETAILED DESCRIPTION

[0039] To make the persons skilled in the art better understand the technical solutions of the application, the application will be described in detail below, in conjunction with drawings and specific embodiments.

[0040] An embodiment of the application provides an organic light emitting device, comprising an anode layer, a cathode layer, and a light emitting layer provided between the anode layer and the cathode layer. The organic light emitting device further comprises a carrier velocity adjustment layer that is provided between the light emitting layer and at least one of the anode layer and the cathode layer. The carrier velocity adjustment layer is used for adjusting an injection rate of a carrier.

[0041] In the existing organic light emitting device, when the organic light emitting device is driven to emit light, since the injection rate of the holes injected from the anode layer to the light emitting layer is different from that of the electrons injected from the cathode layer to the light emitting layer, i.e., the injection rate of the holes is smaller than that of the electrons, amounts of the electrons and the holes injected into the recombination region of the light emitting layer at the same time are different from each other, thus resulting in reduction of the luminous efficiency and the life time of the organic light emitting device.

[0042] In the organic light emitting device of the embodiment, the carrier velocity adjustment layer is added, and is provided between the light emitting layer and at least one of the anode layer and the cathode layer. The carrier velocity adjustment layer may adjust the injection rate of corresponding carrier into the light emitting layer, so that the injection rates of different carriers tend to be balanced, thus improving the luminous efficiency and the life time of the organic light emitting device.

[0043] Specifically, FIG. 1 illustrates a structural schematic diagram of an organic light emitting device according to an embodiment of the application. The organic light emitting device comprises an anode layer 1, a light emitting layer 3, a carrier velocity adjustment layer 10 and a cathode layer 2. The carrier velocity adjustment layer 10 of the embodiment comprises at least an electron velocity adjustment layer 4'. The electron velocity adjustment layer 4' comprises a plurality of electron trap units 40 which are provided successively, and each of the electron trap units 40 comprises an electron injection sublayer 42 and a deceleration layer 41 which are sequentially provided in a direction away from the cathode layer 2. The electron injection sublayer 42 is used for injecting the electrons into the deceleration layer 41, and the deceleration layer 41 is used for reducing the injection rate of the electrons.

[0044] When an external voltage is applied to the organic light emitting device, the electrons injected from the cathode layer 2 pass through the first electron injection sublayer 42 first, an injection capability of the electron itself is poor, and the electron injection sublayer 42 facil-

itates injection of the electrons. Then, the electrons pass through the first deceleration layer 41, and the injection rate of the electrons is reduced. After wards, the electrons pass through the repeated electron injection sublayer 42 and deceleration layer 41. Each group of the electron injection sublayer 42 and the deceleration layer 41 substantially corresponds to the electron trap unit 40 for reducing the injection rate of the electrons. The number of the electron trap units 40 is adjusted such that the injection rate of the electrons and the injection rate of the holes injected from the anode layer 1 tend to be balanced, and the electrons and the holes are recombined to emit light in the light emitting layer 3 at this point. The technical solution of the embodiment facilitates improvement of the luminous efficiency and the life time of the organic light emitting device.

[0045] For example, the carrier velocity adjustment layer 10 of the embodiment further comprises an electron transport layer 5 provided between the light emitting layer 3 and the electron velocity adjustment layer 4'. The electron transport layer 5 facilitates transport of the electrons to the light emitting layer 3.

[0046] For example, the organic light emitting device of the embodiment further comprises a hole injection layer 6 and a hole transport layer 7 which are provided between the anode layer 1 and the light emitting layer 3. The hole injection layer 6 is provided between the anode layer 1 and the hole transport layer 7. The hole injection layer 6 facilitates improvement of the injection capability of the holes, and the hole transport layer 7 facilitates improvement of the transport capability of the holes to the light emitting layer 3.

[0047] Materials and thicknesses of the layers of the above organic light emitting device are described in detail in conjunction with a method of fabricating the organic light emitting device described below.

[0048] The method of fabricating the organic light emitting device of the embodiment comprises the following steps S1 to S8.

[0049] Step S1 comprises sputtering an anode conductive film on a substrate, and forming a pattern comprising the anode layer 1 by a patterning process.

[0050] In this embodiment, the substrate serves as a support for electrode layers and organic function film layers in the organic light emitting device, has a good light transmission property in the visible light region, a certain capability of preventing water vapor and oxygen permeation, and a good surface smoothness, and may be generally formed from glass, a flexible substrate or an array substrate. If the flexible substrate is selected, the substrate may be made of polyester, polyphthalimide or thin metal.

[0051] In addition, the anode layer 1 serves as a connection layer for a positive voltage in the organic light emitting device, and has a good conductivity, a light transmission property in the visible light region and a high work function. The anode layer 1 may be made of an inorganic metal oxide (e.g., indium tin oxide (ITO), zinc oxide (ZnO),

etc.), an organic conductive polymer (e.g., poly(3,4-ethylenedioxythiophene): polystyrene sulfonate (PEDOT :PSS), polyaniline (PANI), et c.) or a metal material with high work function (e.g., gold, copper, silver, platinum, etc.). The thickness of the anode layer 1 may range from 10nm to 200nm.

[0052] Step S2 comprises forming, by using a vacuum evaporation process, the hole injection layer 6 on the substrate having the anode layer 1 formed thereon.

[0053] In this embodiment, the material of the hole injection layer 6 may comprise any one of 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene (HAT-CN), 2,3,5,6-tetrafluoro-7,7',8,8'-tetracyanoquinodimethane (F₄-TCNQ), and tris(4-bromophenyl)aminium hexachloroantimonate (TBAHA). The thickness of the hole injection layer 6 may range from 1nm to 5nm.

[0054] Step S3 comprises forming, by using a vacuum evaporation process, the hole transport layer 7 on the substrate having the hole injection layer 6 formed thereon.

[0055] In this embodiment, the hole transport layer 7 may comprise the material having a hole mobility larger than 10⁻⁵cm²/VS, and may be made of aromatic diamine compound, triphenylamine compound, aromatic triamine compound, biphenyl diamine derivatives, triarylamine polymer, metal complex, or carbazole-based polymer, for example, any one of N,N'-bis(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine (NPB), triphenyldiamine derivative (TPD), TPTE, and 1,3,5-tris(N-3-methylphenyl-N-phenylamino) benzene (TDAB). The thickness of the hole transport layer 7 may range from 10nm to 200nm.

[0056] Step S4 comprises forming, by using a vacuum evaporation process, the light emitting layer 3 on the substrate having the hole transport layer 7 formed thereon.

[0057] In this embodiment, the light emitting layer 3 may be made of a non-doped fluorescent organic material consisting of a luminescent material having a hole transport capability not lower than an electron transport capability, or may be made of a fluorescent material-doped organic material consisting of a fluorescent dopant and a host material, or may be made of a phosphorescent material-doped organic material consisting of a phosphorescent dopant and a host material. The thickness of the light emitting layer 3 may range from 10nm to 50nm.

[0058] Step S5 comprises forming, by using a vacuum evaporation process, the electron transport layer 5 on the substrate having the light emitting layer 3 formed thereon.

[0059] In this embodiment, the electron transport layer 5 may comprise the material having an electron mobility larger than 10⁻³cm²/VS.

[0060] For example, the material of the electron transport layer 5 may comprise any one of 2-(4-biphenyl)-5-phenyl oxadiazole (PBD), 2,5-bis(1-naphthyl)-1,3,4-oxadiazole (BND), and 2,4,6-triphenyl-1,3,5-triazine (TRZ).

[0061] For example, the thickness of the electron transport layer 5 may range from 10nm to 30nm.

[0062] Step S6 comprises forming, by using a vacuum evaporation process, the first deceleration layer 41 on the substrate having the electron transport layer 5 formed thereon.

[0063] In this embodiment, the material of the deceleration layer 41 may comprise any one of magnesium (Mg), silver (Ag), aluminum (Al), lithium (Li), potassium (K) and calcium (Ca), or an alloy thereof. The thickness of the deceleration layer 41 may range from 1nm to 10nm.

[0064] Step S7 comprises forming, by using a vacuum evaporation process, the first electron injection sublayer 42 on the substrate having the first deceleration layer 41 formed thereon.

[0065] In this embodiment, the material of the electron injection sublayer 42 may comprise any one of lithium fluoride, sodium fluoride, potassium fluoride, rubidium fluoride, cesium fluoride, lithium oxide, and lithium molybdate. The thickness of the electron injection sublayer 42 may range from 1nm to 5nm.

[0066] Then, steps S6 and S7 are repeated, i.e., the plurality of electron trap units 40 are formed. The number of the electron trap units 40 may range from two to ten, e.g., may be three. Of course, the number may be set according to a specific situation.

[0067] Step S8 comprises forming, by using a vacuum evaporation process, the cathode layer 2 on the substrate having the N-th electron injection sublayer 42 formed thereon.

[0068] In this embodiment, the cathode layer 2 serves as a connection layer for a negative voltage in the organic light emitting device, and has a good conductivity and a low work function. The cathode layer 2 may be generally made of a metal material with low work function, e.g., lithium, magnesium, calcium, strontium, aluminum, indium, etc., or an alloy of the above metal with copper, gold or silver, or may be formed of a thin layer of buffer insulation layer (e.g., lithium fluoride LiF, cesium carbonate CsCO₃, etc.) and the above metal or alloy. The thickness of the cathode layer 2 may range from 10nm to 20nm.

[0069] Thus, the fabrication of the organic light emitting device of the embodiment is completed.

[0070] FIG. 2 illustrates a structural schematic diagram of an organic light emitting device according to an embodiment of the application. The organic light emitting device comprises a substrate, and an anode layer 1, a carrier velocity adjustment layer 10, a light emitting layer 3 and a cathode layer 2 which are sequentially provided on the substrate. The carrier velocity adjustment layer 10 of the embodiment comprises a hole velocity adjustment layer 6'. The hole velocity adjustment layer 6' comprises a plurality of hole acceleration units 60 which are provided successively, and each of the hole acceleration units 60 comprise a hole injection sublayer 61 and an acceleration layer 62 sequentially provided in a direction away from the anode layer 1. The hole injection sublayer 61 is used for injecting the holes into the acceleration layer 62, and the acceleration layer 62 is used for in-

creasing the injection rate of the holes.

[0071] In this embodiment, since the carrier velocity adjustment layer 10 is provided between the anode layer 1 and the light emitting layer 3, the carrier velocity adjustment layer 10 can increase the injection rate of the holes. Specifically, the carrier velocity adjustment layer 10 comprises the hole velocity adjustment layer 6' that consists of the plurality of hole acceleration units 60. When an external voltage is applied to the organic light emitting device, the holes injected from the anode layer 1 into the light emitting layer 3 pass through one hole acceleration unit 60, and the injection rate of the holes is increased. The number of the hole acceleration units 60 is adjusted such that the injection rate of the electrons and the injection rate of the holes tend to be balanced, and the electrons and the holes are recombined to emit light in the light emitting layer 3 at this point. The technical solution of the embodiment facilitates improvement of the luminous efficiency and the life time of the organic light emitting device.

[0072] For example, the organic light emitting device of the embodiment further comprises an electron injection layer 4 and an electron transport layer 5 which are provided between the cathode layer 2 and the light emitting layer 3. The electron transport layer 5 is provided between the light emitting layer 3 and the electron injection layer 4. The electron injection layer 4 and the electron transport layer 5 facilitate improvement of the capability of injecting the electrons from the cathode layer 2 into the light emitting layer 3.

[0073] Materials and thicknesses of the layers of the above organic light emitting device are described in detail in conjunction with a method of fabricating the organic light emitting device described below.

[0074] The method of fabricating the organic light emitting device of the embodiment comprises the following steps S1 to S7.

[0075] Step S1 comprises sputtering an anode conductive film on a substrate, and forming a pattern comprising the anode layer 1 by a patterning process.

[0076] In this embodiment, the substrate serves as a support for electrode layers and organic function film layers in the organic light emitting device, has a good light transmission property in the visible light region, a certain capability of preventing water vapor and oxygen permeation, and a good surface smoothness, and may be generally formed from glass, a flexible substrate or an array substrate. If the flexible substrate is selected, the substrate may be made of polyester, polyphthalimide or thin metal.

[0077] In addition, the anode layer 1 serves as a connection layer for a positive voltage in the organic light emitting device, and has a good conductivity, a light transmission property in the visible light region and a high work function. The anode layer 1 may be made of an inorganic metal oxide (e.g., indium tin oxide (ITO), zinc oxide (ZnO), etc.), an organic conductive polymer (e.g., poly(3,4-ethylenedioxythiophene): polystyrene sulfonate

(PEDOT :PSS), polyaniline (PANI), et c.) or a metal material with high work function (e.g., gold, copper, silver, platinum, etc.). The thickness of the anode layer 1 may range from 10nm to 200nm.

[0078] Step S2 comprises forming, by using a vacuum evaporation process, the hole injection sublayer 61 of the first hole acceleration unit 60 on the substrate having the anode layer 1 formed thereon.

[0079] In this embodiment, the hole injection sublayer 61 may be made of an organic material or polymer doped with a phosphorescent dopant (P).

[0080] For example, the material of the hole injection sublayer 61 may comprise any one of 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene (HAT-CN), 2,3,5,6-tetrafluoro-7,7',8,8'-tetracyanoquinodimethane (F₄-TCNQ), and tris(4-bromophenyl)aminium hexachloroantimonate (TBAHA). The thickness of the hole injection sublayer 61 may range from 1nm to 5nm, e.g., may be 1nm.

[0081] Step S3 comprises forming, by using a vacuum evaporation process, the acceleration layer 62 on the substrate having the hole injection sublayer 61 of the first hole acceleration unit 60 formed thereon.

[0082] In this embodiment, the acceleration layer 62 may comprise the material having a hole mobility larger than 10⁻⁵cm²/Vs.

[0083] Specifically, the acceleration layer 62 may be made of aromatic diamine compound, triphenylamine compound, aromatic triamine compound, biphenyl diamine derivatives, triarylamine polymer, metal complex, or carbazole-based polymer, for example, any one of N,N'-bis(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine (NPB), triphenyldiamine derivative (TPD), TPTE, and 1,3,5-tris(N-3-methylphenyl-N-phenylamino) benzene (TDAB). The thickness of the acceleration layer 62 may range from 10nm to 200nm.

[0084] Then, steps S2 and S3 are repeated to form the plurality of hole acceleration units 60. The number of the hole acceleration units 60 may range from two to ten, e.g., may be three. Of course, the number may be set according to a specific situation, so that the injection rate of the holes and the injection rate of the electrons tend to be balanced.

[0085] Step S4 comprises forming, by using a vacuum evaporation process, the light emitting layer 3 on the substrate having the hole velocity adjustment layer 6' formed thereon.

[0086] In this embodiment, the light emitting layer 3 may be made of a non-doped fluorescent organic material consisting of a luminescent material having a hole transport capability not lower than an electron transport capability, or may be made of a fluorescent material-doped organic material consisting of a fluorescent dopant and a host material, or may be made of a phosphorescent material-doped organic material consisting of a phosphorescent dopant and a host material. The thickness of the light emitting layer 3 may range from 10nm to 50nm.

[0087] Step S5 comprises forming, by using a vacuum

evaporation process, the electron transport layer 5 on the substrate having the light emitting layer 3 formed thereon.

[0088] In this embodiment, the electron transport layer 5 may comprise the material having a high electron mobility, for example, any one of 2-(4-biphenyl)-5-phenyl oxadiazole (PBD), 2,5-bis(1-naphthyl)-1,3,4-oxadiazole (BND), and 2,4,6-triphenyl-1,3,5-triazine (TRZ). The thickness of the electron transport layer 5 may range from 10nm to 30nm.

[0089] Step S6 comprises forming, by using a vacuum evaporation process, the electron injection layer 4 on the substrate having the electron transport layer 5 formed thereon.

[0090] In this embodiment, the material of the electron injection layer 4 may comprise any one of lithium fluoride, sodium fluoride, potassium fluoride, rubidium fluoride, cesium fluoride, lithium oxide, and lithium metaborate. The thickness of the electron injection layer 4 may range from 1nm to 5nm.

[0091] Step S7 comprises forming, by using a vacuum evaporation process, the cathode layer 2 on the substrate having the electron injection layer 4 formed thereon.

[0092] In this embodiment, the cathode layer 2 serves as a connection layer for a negative voltage in the organic light emitting device, and has a good conductivity and a low work function. The cathode layer 2 may be generally made of a metal material with low work function, e.g., lithium, magnesium, calcium, strontium, aluminum, indium, etc., or an alloy of the above metal with copper, gold or silver, or may be formed of a thin layer of buffer insulation layer (e.g., lithium fluoride LiF, cesium carbonate CsCO₃, etc.) and the above metal or alloy. The thickness of the cathode layer 2 may range from 10nm to 20nm.

[0093] Thus, the fabrication of the organic light emitting device of the embodiment is completed.

[0094] FIG. 3 illustrates a structural schematic diagram of an organic light emitting device according to an embodiment of the application. The organic light emitting device comprises an anode layer 1, a hole velocity adjustment layer 6', a light emitting layer 3, an electron velocity adjustment layer 4' and a cathode layer 2. The hole velocity adjustment layer 6' and the electron velocity adjustment layer 4' constitute a carrier velocity adjustment layer. The hole velocity adjustment layer 6' comprises a plurality of hole acceleration units 60 which are provided successively, and each of the hole acceleration units 60 comprises a hole injection sublayer 61 and an acceleration layer 61 sequentially provided in a direction away from the anode layer 1. The hole injection sublayer 61 is used for injecting the holes into the acceleration layer 62, and the acceleration layer 62 is used for increasing the injection rate of the holes. The electron velocity adjustment layer 4' comprises a plurality of electron trap units 40 which are provided successively, and each of the electron trap units 40 comprises an electron injection sublayer 42 and a deceleration layer 41 sequentially pro-

vided in a direction away from the cathode layer 2. The electron injection sublayer 42 is used for injecting the electrons into the deceleration layer 41, and the deceleration layer 41 is used for reducing the injection rate of the electrons.

[0095] When an external voltage is applied to the organic light emitting device, the electrons injected from the cathode layer 2 pass through the first electron injection sublayer 42 of the electron velocity adjustment layer 4'. First, an injection capability of the electron itself is poor, and the electron injection sublayer 42 facilitates injection of the electrons. Then, the electrons pass through the first deceleration layer 41, and the injection rate of the electrons is reduced. Afterwards, the electrons pass through the repeated electron injection sublayer 42 and deceleration layer 41. Each group of the electron injection sublayer 42 and the deceleration layer 41 substantially corresponds to the electron trap unit 40 for reducing the injection rate of the electrons. Meanwhile, the hole velocity adjustment layer 6' consists of the plurality of hole acceleration units 60. When an external voltage is applied to the organic light emitting device, the holes injected from the anode layer 1 into the light emitting layer 3 pass through the hole acceleration unit 60, and the injection rate of the holes is increased. The number of the electron trap units 40 and the number of the hole acceleration units 60 are adjusted such that the injection rate of the electrons and the injection rate of the holes tend to be balanced, and the electrons and the holes are recombined to emit light in the light emitting layer 3 at this point. The organic light emitting device according to the embodiment of the application has improved luminous efficiency and life time.

[0096] For example, the organic light emitting device of the embodiment further comprises an electron transport layer 5 provided between the light emitting layer 3 and the electron velocity adjustment layer 4'. The electron transport layer 5 facilitates transport of the electrons to the light emitting layer 3.

[0097] Materials and thicknesses of the layers of the above organic light emitting device are described in detail in conjunction with a method of fabricating the organic light emitting device described below.

[0098] The method of fabricating the organic light emitting device of the embodiment comprises the following steps S1 to S8.

[0099] Step S1 comprises sputtering an anode conductive film on a substrate, and forming a pattern comprising the anode layer 1 by a patterning process.

[0100] In this embodiment, the substrate serves as a support for electrode layers and organic function film layers in the organic light emitting device, has a good light transmission property in the visible light region, a certain capability of preventing water vapor and oxygen permeation, and a good surface smoothness, and may be generally formed from glass, a flexible substrate or an array substrate. If the flexible substrate is selected, the substrate may be made of polyester, polyphthalimide or thin

metal.

[0101] In addition, the anode layer 1 serves as a connection layer for a positive voltage in the organic light emitting device, and has a good conductivity, a light transmission property in the visible light region and a high work function. The anode layer 1 may be made of an inorganic metal oxide (e.g., indium tin oxide (ITO), zinc oxide (ZnO), etc.), an organic conductive polymer (e.g., poly(3,4-ethylenedioxythiophene) / polystyrene sulfonate (PEDOT:PSS), polyaniline (PANI), et c.) or a metal material with high work function (e.g., gold, copper, silver, platinum, etc.). The thickness of the anode layer 1 may range from 10nm to 200nm.

[0102] Step S2 comprises forming, by using a vacuum evaporation process, the hole injection sublayer 61 of the first hole acceleration unit 60 on the substrate having the anode layer 1 formed thereon.

[0103] In this embodiment, the hole injection sublayer 61 may be made of an organic material or polymer doped with a phosphorescent dopant (P). For example, the hole injection sublayer 61 may be made of any one of 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene (HAT-CN), 2,3,5,6-tetrafluoro-7,7',8,8'-tetracyanoquinodimethane (F₄-TCNQ), and tris(4-bromophenyl)aminium hexachloroantimonate (TBAHA). The thickness of the hole injection sublayer 61 may range from 1nm to 5nm, e.g., may be 1nm.

[0104] Step S3 comprises forming, by using a vacuum evaporation process, the acceleration layer 62 on the substrate having the hole injection sublayer 61 of the first hole acceleration unit 60 formed thereon.

[0105] In this embodiment, the acceleration layer 62 may comprise the material having a hole transport rate larger than $10^{-5} \text{cm}^2/\text{VS}$, and may be made of aromatic diamine compound, triphenylamine compound, aromatic triamine compound, biphenyl diamine derivatives, triarylamine polymer, metal complex, or carbazole-based polymer, for example, any one of N,N'-bis(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine (NPB), triphenyldiamine derivative (TPD), TPTE, and 1,3,5-tris(N-3-methylphenyl-N-phenylamino) benzene (TDAB). The thickness of the acceleration layer 62 may range from 10nm to 200nm.

[0106] Then, steps S2 and S3 are repeated to form the plurality of hole acceleration units 60. The number of the hole acceleration units 60 may range from two to ten, e.g., may be three. Of course, the number may be set according to a specific situation, so that the injection rate of the holes and the injection rate of the electrons tend to be balanced.

[0107] Step S4 comprises forming, by using a vacuum evaporation process, the light emitting layer 3 on the substrate having the hole velocity adjustment layer 6' formed thereon.

[0108] In this embodiment, the light emitting layer 3 may be made of a non-doped fluorescent organic material consisting of a luminescent material having a hole transport capability not lower than an electron transport

capability, or may be made of a fluorescent material-doped organic material consisting of a fluorescent dopant and a host material, or may be made of a phosphorescent material-doped organic material consisting of a phosphorescent dopant and a host material. The thickness of the light emitting layer 3 may range from 10nm to 50nm.

[0109] Step S5 comprises forming, by using a vacuum evaporation process, the electron transport layer 5 on the substrate having the light emitting layer 3 formed thereon.

[0110] In this embodiment, the electron transport layer 5 may comprise the material having a high electron mobility, for example, any one of 2-(4-biphenyl)-5-phenyl oxadiazole (PBD), 2,5-bis(1-naphthyl)-1,3,4-oxadiazole (BND), and 2,4,6-triphenyl-1,3,5-triazine (TRZ). The thickness of the electron transport layer 5 may range from 10nm to 30nm.

[0111] Step S6 comprises forming, by using a vacuum evaporation process, the first deceleration layer 41 on the substrate having the electron transport layer 5 formed thereon.

[0112] In this embodiment, the material of the deceleration layer 41 may comprise any one of magnesium (Mg), silver (Ag), aluminum (Al), lithium (Li), potassium (K) and calcium (Ca), or an alloy thereof. The thickness of the deceleration layer 41 may range from 1nm to 10nm.

[0113] Step S7 comprises forming, by using a vacuum evaporation process, the first electron injection sublayer 42 on the substrate having the first deceleration layer 41 formed thereon.

[0114] In this embodiment, the material of the electron injection sublayer 42 may comprise any one of lithium fluoride, sodium fluoride, potassium fluoride, rubidium fluoride, cesium fluoride, lithium oxide, and lithium metaborate. The thickness of the electron injection sublayer 42 may range from 1nm to 5nm.

[0115] Then, steps S6 and S7 are repeated, i.e., the plurality of electron trap units 40 are formed. For example, the number of the electron trap units 40 may be three. Of course, the number may be set according to a specific situation, as long as the injection rate of the electrons and the injection rate of the holes are guaranteed to be substantially the same.

[0116] Step S8 comprises forming, by using a vacuum evaporation process, the cathode layer 2 on the substrate having the N-th electron injection sublayer 42 formed thereon.

[0117] In this embodiment, the cathode layer 2 serves as a connection layer for a negative voltage in the organic light emitting device, and has a good conductivity and a low work function. The cathode layer 2 may be generally made of a metal material with low work function, e.g., lithium, magnesium, calcium, strontium, aluminum, indium, etc., or an alloy of the above metal with copper, gold or silver, or may be formed of a thin layer of buffer insulation layer (e.g., lithium fluoride LiF, cesium carbonate CsCO₃, etc.) and the above metal or alloy. The thickness of the cathode layer 2 may range from 10nm to 20nm.

[0118] Thus, the fabrication of the organic light emitting device of the embodiment is completed.

[0119] An embodiment of the application further provides a display device that comprises any one of the above organic light emitting devices. The display device of the embodiment has a good luminous efficiency and a good life time.

[0120] The display device may be any product or component with a display function, such as an electronic paper, an OLED panel, a mobile phone, a tablet computer, a TV set, a display, a laptop, a digital photo frame, a navigator, etc.

[0121] It should be understood that the above embodiments are only exemplary embodiments for illustrating the principle of the application, but the application is not limited thereto. Various variations and improvements can be made by the person of ordinary skill in the art without departing from the spirit and essence of the application, and these variations and improvements should also be considered to fall within the protection scope of the application.

Claims

1. An organic light emitting device, comprising an anode layer, a cathode layer, and a light emitting layer provided between the anode layer and the cathode layer, wherein the organic light emitting device further comprises a carrier velocity adjustment layer provided between the light emitting layer and at least one of the anode layer and the cathode layer, and the carrier velocity adjustment layer is used for adjusting an injection rate of a carrier.
2. The organic light emitting device of claim 1, wherein the carrier velocity adjustment layer is provided between the light emitting layer and the cathode layer, the carrier velocity adjustment layer comprises an electron velocity adjustment layer; the electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, and the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer; and the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons.
3. The organic light emitting device of claim 2, wherein the carrier velocity adjustment layer further comprises an electron transport layer provided between the light emitting layer and the electron velocity adjustment layer.

4. The organic light emitting device of claim 3, wherein the electron transport layer comprises a material having an electron mobility larger than $10^{-3}\text{cm}^2/\text{VS}$.
5. The organic light emitting device of claim 4, wherein the material of the electron transport layer comprises anyone of 2-(4-biphenyl)-5-phenyl oxadiazole, 2,5-bis(1-naphthyl)-1,3,4-oxadiazole, and 2,4,6-triphenyl-1,3,5-triazine.
6. The organic light emitting device of claim 3, wherein a thickness of the electron transport layer ranges from 10nm to 30nm.
7. The organic light emitting device of claim 2, wherein a material of the deceleration layer comprises any one of magnesium, silver, aluminum, lithium, potassium and calcium, or an alloy thereof.
8. The organic light emitting device of claim 2, wherein a thickness of the deceleration layer ranges from 1nm to 10nm.
9. The organic light emitting device of claim 2, wherein a material of the electron injection sublayer comprises any one of lithium fluoride, sodium fluoride, potassium fluoride, rubidium fluoride, cesium fluoride, lithium oxide, and lithium metaborate.
10. The organic light emitting device of claim 2, wherein a thickness of the electron injection sublayer ranges from 1nm to 5nm.
11. The organic light emitting device of claim 2, wherein the number of the electron trap units ranges from two to ten.
12. The organic light emitting device of anyone of claims 2 to 11, further comprising a hole injection layer and a hole transport layer which are provided between the anode layer and the light emitting layer, wherein the hole injection layer is provided between the anode layer and the hole transport layer.
13. The organic light emitting device of claim 1, wherein the carrier velocity adjustment layer is provided between the light emitting layer and the anode layer, the carrier velocity adjustment layer comprises a hole velocity adjustment layer; the hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, and the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer; and the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes.
14. The organic light emitting device of claim 13, wherein a material of the hole injection sublayer is a P-type doped material.
15. The organic light emitting device of claim 14, wherein a material of the hole injection sublayer comprises any one of 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene, 2,3,5,6-tetrafluoro-7,7',8,8'-tetracyanoquinodimethane, and tris(4-bromophenyl)aminium hexachloroantimonate.
16. The organic light emitting device of claim 13, wherein a thickness of the hole injection sublayer ranges from 1nm to 5nm.
17. The organic light emitting device of claim 13, wherein a material of the acceleration layer comprises any one of N,N'-bis(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine, triphenyldiamine derivative, and 1,3,5-tris(N-3-methylphenyl-N-phenylamino) benzene.
18. The organic light emitting device of claim 13, wherein a thickness of the acceleration layer ranges from 10nm to 200nm.
19. The organic light emitting device of claim 13, wherein the number of the hole acceleration units ranges from two to ten.
20. The organic light emitting device of any one of claims 13 to 19, further comprising an electron injection layer and an electron transport layer which are provided between the cathode layer and the light emitting layer, wherein the electron transport layer is provided between the light emitting layer and the electron injection layer.
21. The organic light emitting device of claim 1, wherein the carrier velocity adjustment layer comprises a hole velocity adjustment layer and an electron velocity adjustment layer, the hole velocity adjustment layer is provided between the anode layer and the light emitting layer, and the electron velocity adjustment layer is provided between the cathode layer and the light emitting layer; the hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer, the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes; the electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, the electron trap unit comprises an elec-

- tron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer, the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons.
22. The organic light emitting device of claim 21, further comprising an electron transport layer provided between the light emitting layer and the electron velocity adjustment layer.
23. A method of fabricating an organic light emitting device, comprising forming an anode layer and a cathode layer on a substrate, and forming a light emitting layer between the cathode layer and the anode layer, wherein the method further comprises forming a carrier velocity adjustment layer between the light emitting layer and at least one of the anode layer and the cathode layer,
24. The method of claim 23, wherein the carrier velocity adjustment layer is formed between the cathode layer and the light emitting layer, the carrier velocity adjustment layer comprises an electron velocity adjustment layer; the electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, and the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer; the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons; and forming the electron velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the deceleration layer and the electron injection sublayer on the substrate having the light emitting layer formed thereon; and then repeatedly forming the deceleration layer and the electron injection sublayer.
25. The method of claim 24, wherein forming the electron velocity adjustment layer further comprises forming an electron transport layer between the light emitting layer and the deceleration layer closest to the light emitting layer.
26. The method of claim 23, wherein the carrier velocity adjustment layer is formed between the light emitting layer and the anode layer, the carrier velocity adjustment layer comprises a hole velocity adjustment layer; the hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, and the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer; the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes; and forming the hole velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the hole injection sublayer and the acceleration layer on the substrate having the anode layer formed thereon; and then repeatedly forming the hole injection sublayer and the acceleration layer.
27. The method of claim 23, wherein the carrier velocity adjustment layer comprises a hole velocity adjustment layer and an electron velocity adjustment layer, the hole velocity adjustment layer is formed between the anode layer and the light emitting layer, and the electron velocity adjustment layer is formed between the cathode layer and the light emitting layer; the hole velocity adjustment layer comprises a plurality of hole acceleration units which are provided successively, the hole acceleration unit comprises a hole injection sublayer and an acceleration layer sequentially provided in a direction away from the anode layer, the hole injection sublayer is used for injecting holes into the acceleration layer, and the acceleration layer is used for increasing a transport rate of the holes; the electron velocity adjustment layer comprises a plurality of electron trap units which are provided successively, the electron trap unit comprises an electron injection sublayer and a deceleration layer which are sequentially provided in a direction away from the cathode layer, the electron injection sublayer is used for injecting electrons into the deceleration layer, and the deceleration layer is used for reducing the injection rate of the electrons; forming the hole velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the hole injection sublayer and the acceleration layer on the substrate having the anode layer formed thereon; and then repeatedly forming the hole injection sublayer and the acceleration layer; and forming the electron velocity adjustment layer comprises: sequentially forming, by using an evaporation process, the deceleration layer and the electron injection sublayer on the substrate having the light emitting layer formed thereon; and then repeatedly forming the deceleration layer and the electron injection sublayer.
28. The method of claim 27, wherein forming the electron velocity adjustment layer further comprises forming an electron transport layer between the light

emitting layer and the deceleration layer closest to the light emitting layer.

- 29.** A display device, comprising the organic light emitting device of any one of claims 1 to 22.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

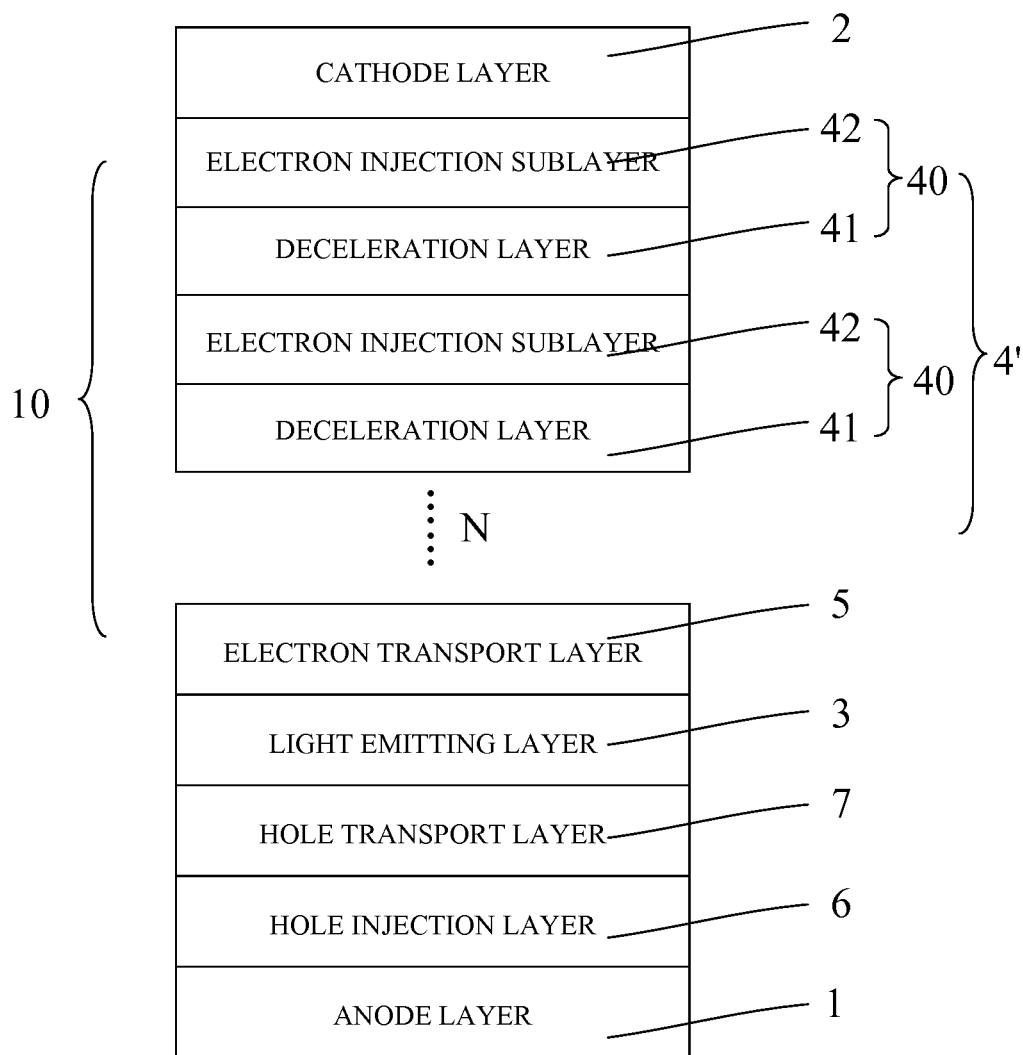


Fig. 2


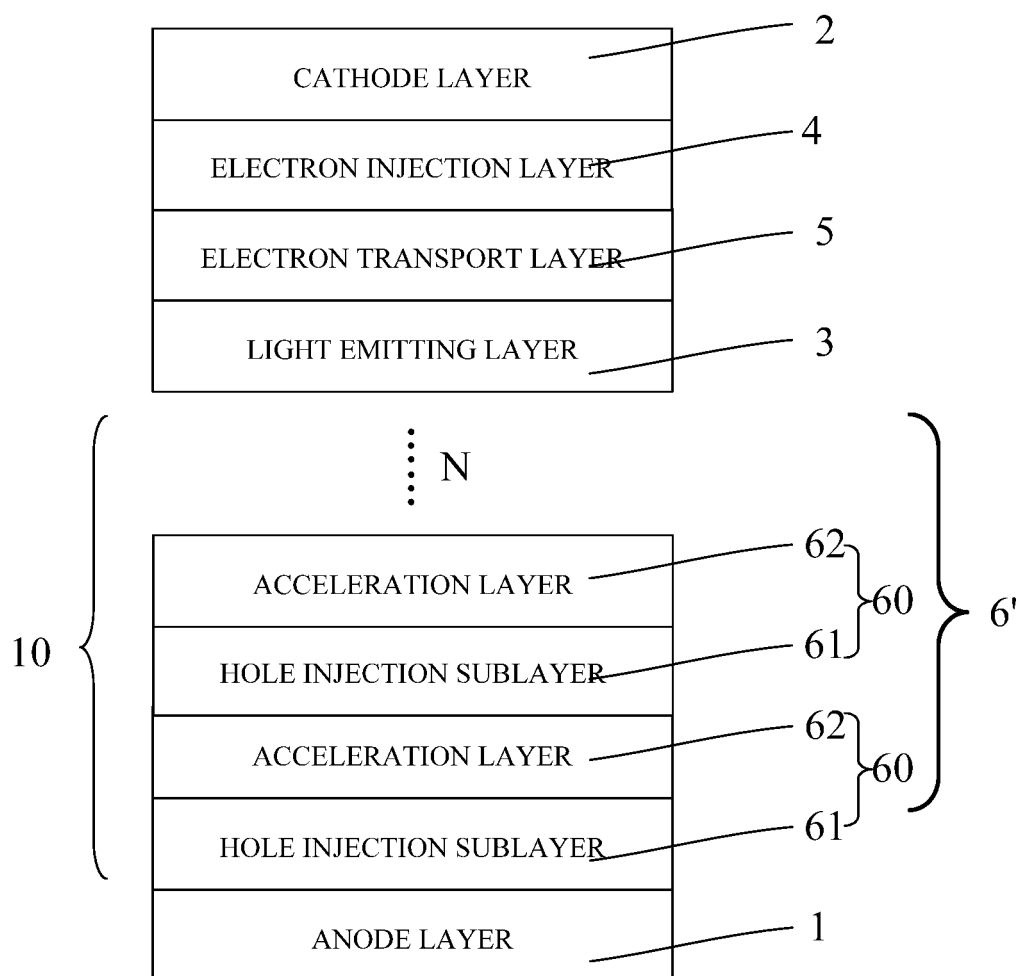


Fig. 3

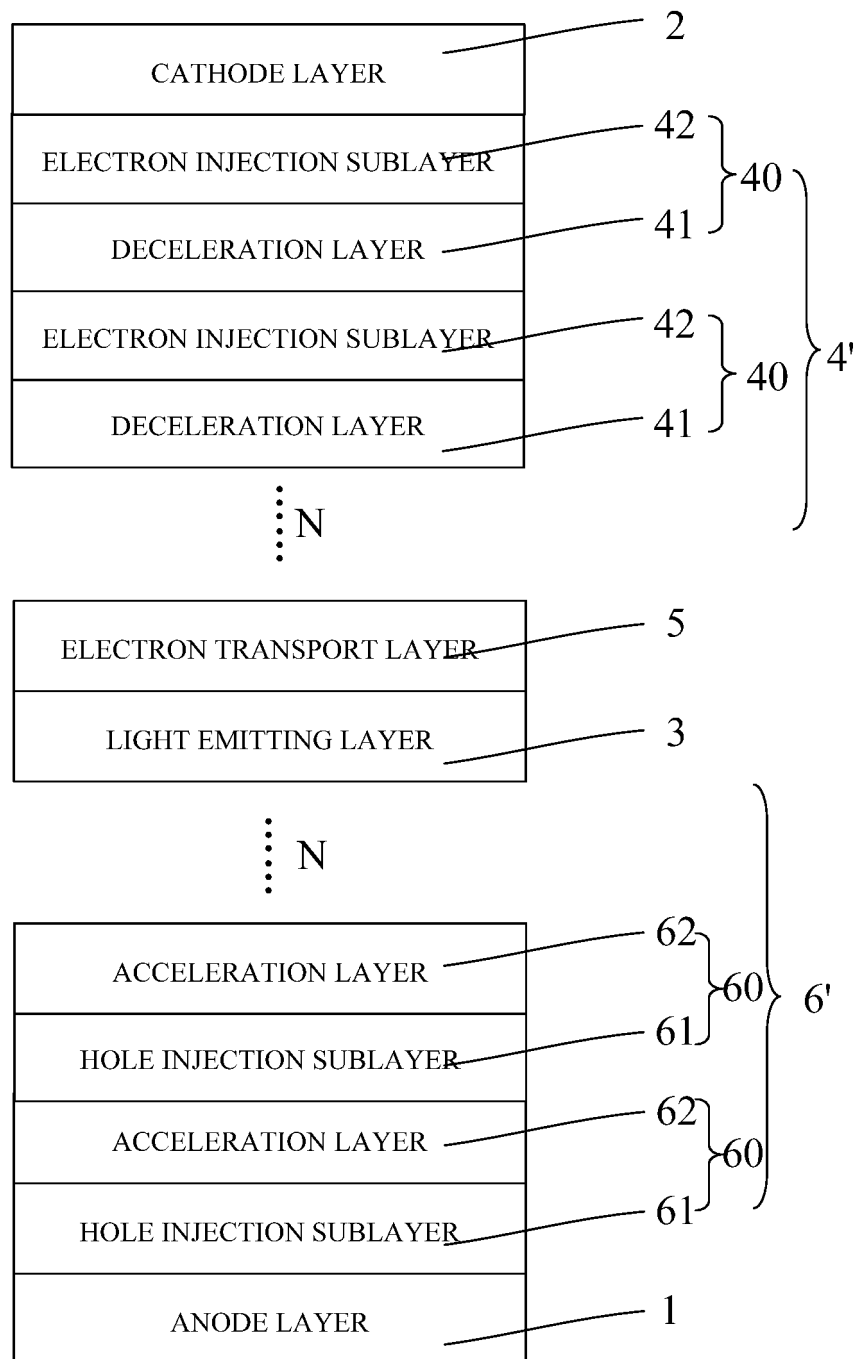

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/072294

A. CLASSIFICATION OF SUBJECT MATTER

H01L 51/52 (2006.01) i; H01L 51/54 (2006.01) i; H01L 51/56 (2006.01) i
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNXTX; CNABS; VEN; CNKI; GOOGLE: lithium, lithium fluoride, electron transfer layer, calcium, composite, period, electron injection/transporting layer, hole, potassium, magnesium, electron injection layer, alternate, lithium-fluorine, aluminium, repeat, multigroup, silver, electron deceleration layer, multilayer?, stack, layer?, Mg, Ag, Al, multi+, Ag, LiF, F4-TCNQ, HAT-CN, Ca, NPB, K, TBAHA, laminat+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEN, C.W. et al., "An Effective Cathode Structure for Inverted Top-Emitting Organic Light-Emitting Devices", APPLIED PHYSICS LETTERS, vol. 85, no. 13, 27 September 2004 (27.09.2004), ISSN: 0003-6951, pages 2469-2471	1, 23, 29
Y	CHEN, C.W. et al., "An Effective Cathode Structure for Inverted Top-Emitting Organic Light-Emitting Devices", APPLIED PHYSICS LETTERS, vol. 85, no. 13, 27 September 2004 (27.09.2004), ISSN: 0003-6951, pages 2469-2471	2-22, 24-28
Y	CN 102881843 A (BOE TECHNOLOGY GROUP CO., LTD.), 16 January 2013 (16.01.2013), claims 1-24	2-22, 24-28
A	CN 103378297 A (INNOCOM TECHNOLOGY (SHENZHEN) CO., LTD. et al.), 30 October 2013 (30.10.2013), the whole document	1-29

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 11 May 2016 (11.05.2016)	Date of mailing of the international search report 26 May 2016 (26.05.2016)
Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer WANG, Peng Telephone No.: (86-10) 62412105

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/072294

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 105244446 A (BOE TECHNOLOGY GROUP CO., LTD. et al.), 13 January 2016 (13.01.2016), the whole document	1-29

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/072294

5	Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
	CN 102881843 A	16 January 2013	CN 102881843 B	30 September 2015
10	CN 103378297 A	30 October 2013	None	
	CN 105244446 A	13 January 2016	None	
15				
20				
25				
30				
35				
40				
45				
50				
55				

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201510542671 [0001]

专利名称(译)	有机电致发光组件及其制造方法和显示装置		
公开(公告)号	EP3343660A4	公开(公告)日	2019-05-15
申请号	EP2016812665	申请日	2016-01-27
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 鄂尔多斯市源盛光电有限责任公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 鄂尔多斯源盛光电有限公司.		
[标]发明人	WU HAIDONG LAI WEILIN CHEN KAI BAI JUANJUAN MA WENYU		
发明人	WU, HAIDONG LAI, WEILIN CHEN, KAI BAI, JUANJUAN MA, WENYU		
IPC分类号	H01L51/52 H01L51/54 H01L51/56		
CPC分类号	H01L51/5092 H01L51/56 H01L51/0037 H01L51/50 H01L51/5056 H01L51/5064 H01L51/5072 H01L51/508 H01L51/5088 H01L2251/55 H01L51/005 H01L51/0059 H01L51/0067 H01L51/007 H01L51/0072 H01L51/5206 H01L51/5221 H01L2251/301 H01L2251/558		
代理机构(译)	COHAUSZ & FLORACK		
优先权	201510542671.5 2015-08-28 CN		
其他公开文献	EP3343660A1		
外部链接	Espacenet		

摘要(译)

本申请提供有机发光器件，制造有机发光器件的方法和显示器件。有机发光装置包括阳极层，阴极层和设置在阳极层和阴极层之间的发光层，并且还包括设置在发光层和至少一个之间的载体速度调节层。阳极层和阴极层，载流子速度调节层用于调节载体的注入速率。