

(19)



(11)

EP 1 175 128 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.09.2010 Bulletin 2010/38

(51) Int Cl.:
H01L 51/00 ^(2006.01) **H05B 33/14** ^(2006.01)
C09K 11/06 ^(2006.01) **C07D 403/04** ^(2006.01)
C07D 403/10 ^(2006.01)

(21) Application number: **01117288.9**

(22) Date of filing: **17.07.2001**

(54) Light emitting element and azole compound

Lichtemittierendes Element und Azolverbindung

Élément électroluminescent et composé de type azole

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **17.07.2000 JP 2000216339**

(43) Date of publication of application:
23.01.2002 Bulletin 2002/04

(60) Divisional application:
10006305.6 / 2 224 790

(73) Proprietor: **FUJIFILM Corporation**
Minato-ku
Tokyo (JP)

(72) Inventors:

- Ise, Toshihiro,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)
- Igarashi, Tatsuya,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)
- Miyashita, Yousuke,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)
- Fujimura, Hidetoshi,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)
- Mishima, Masayuki,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)

- Okada, Hisashi,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)
- Xuepeng, Qiu,
c/o Fuji Photo Film Co., Ltd.
Minami-Ashigara-shi,
Kanagawa, (JP)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser**
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)

(56) References cited:
EP-A- 0 387 715 EP-A- 0 825 804
WO-A-99/20081 US-A- 5 645 948

- KOWALSKY W ET AL: "ORGANIC LIGHT
EMITTING DIODES" PROCEEDINGS OF THE
EIGHTH INTERNATIONAL CONFERENCE ON
INDIUM PHOSPHIDE AND RELATED MATERIALS
1996. SCHWABISCH GMUND, APR. 21 - 25, 1996,
PROCEEDINGS OF THE INTERNATIONAL
CONFERENCE ON INDIUM PHOSPHIDE AND
RELATED MATERIALS (IPRM), NEW YORK, IEEE,
US, vol. CONF. 8, 21 April 1996 (1996-04-21),
pages 450-453, XP000634526 ISBN:
0-7803-3284-9
- MARIA D S M; CORNAGO P; CLARAMUNT R M;
ELGUERO J; FERNANDEZ-CASTANO C; FOCES-
FOCES C: "Aromatic propellenes. Part 10.
Conformational study of hexa(imidazol-1-yl)
benzene and hexakis(2-methylimidazol-1-yl)
benzene by means of NMR and AM1 calculations"
JOURNAL OF MOLECULAR STRUCTURE, vol.
478, 1999, pages 285-294, XP002194812

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 175 128 B1

- CHENG L F; HUNG L M; DING X M; GAO Z Q; LEE C S; LEE S T: "Photoemission study of a new electroluminescent material: trimer of N-arylbenzimidazoles (TPBI)" DISPLAYS, vol. 21, 2000, pages 51-54, XP002194813

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] The present invention relates to a light emitting element, and, more particularly, to a light emitting element which can be utilized in a wide range of fields such as back lights, flat panel displays, illuminating light sources, display elements, electrophotographs, organic semiconductor lasers, recording light sources, exposure light sources, read light sources, beacons, signboards, interiors and optical communication devices.

Description of Related Art

[0002] Among various light emitting elements which are being studied and developed today, organic electroluminescence (EL) elements have been animatedly studied and developed in recent years because these organic electroluminescence elements enable high luminance emission to be obtained even when driven at low voltages. An organic EL element is generally structured of a light emitting layer and a pair of counter electrodes between which the light emitting layer is sandwiched, and makes use of emission from an exciton produced by recombination of an electron injected from a cathode with a hole injected from an anode in the light emitting layer.

[0003] As organic EL elements which emit high illuminance light at low voltages at present, those having a multilayer structure as revealed by Tang et al. (Applied Physics Letters, vol. 51, page 913, 1987) are known. This element can emit high illuminance green light by lamination of a material which doubles as an electron transporting material and a light emitting material with a hole transporting material, wherein the illuminance reaches several thousands cd/m² at a d.c. voltage of 6 to 7 V. However, further improvement in the illuminance and development of more highly efficient light emitting elements are desired, taking practical elements into consideration.

[0004] Recently, a light emitting element using an orthometalated complex of iridium (Ir(ppy)₃: tris-ortho-iridated complex with 2-phenylpyridine) as a light emitting material has been reported as a light emitting element which can emit with higher efficiency (Applied Physics Letters, vol. 75, page 4, 1999). The external quantum efficiency of this light emitting element is 8.3%, which exceeds 5%, which has been said to be the limit of levels of external quantum efficiency. The above orthometalated complex of iridium is limited to a green color light emitting element. Therefore, it is necessary to also develop elements which emit other color lights with high efficiency when the elements are applied in full color displays or white light emitting elements. EP0 825 804 A discloses blue electroluminescent devices based on benzodiazole compounds.

[0005] On the other hand, among organic light emitting elements, those which have attained high illuminance emission are elements with multi-layered structure of organic materials by vacuum deposition. Production of elements by using a coating method is preferable in view of simplification of production steps, processability and increase in area. However, elements produced by a conventional coating method are inferior to elements produced by a deposition system in emission illuminance and luminance efficiency, giving rise to important problems concerning high illuminance and high luminance efficiency in view of the simplification of production steps, processability, area increase and the like.


SUMMARY OF THE INVENTION

[0006] An object of the present invention is to provide a light emitting element which can emit light in the blue region with high luminance efficiency, and a light emitting element which can emit light of white of high color purity with high luminance efficiency.

[0007] The present invention provides :

- (1) A light emitting element, comprising at least one organic layer containing the light-emitting layer between a pair of electrodes, wherein said at least one organic layer includes a layer comprising at least one compound represented by the general formula (A):

General formula (A)

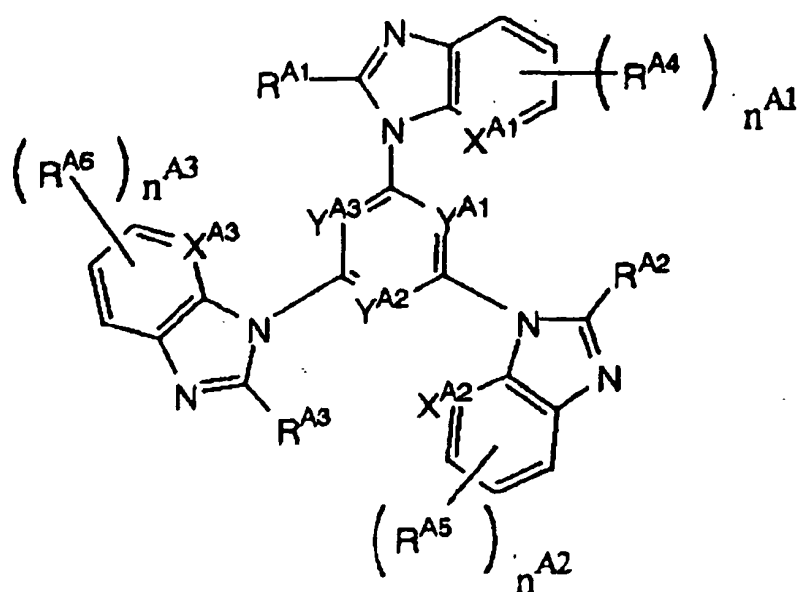

wherein R^{A1} , R^{A2} , and R^{A3} each represent a hydrogen atom or an aliphatic hydrocarbon group; R^{A4} , R^{A5} , and R^{A6} each represent a substituent; n^{A1} , n^{A2} , and n^{A3} each represent an integer of 0 to 3; X^{A1} , X^{A2} , and X^{A3} each represent a nitrogen atom or $C-R^X$ (R^X represents a hydrogen atom or a substituent); and Y^{A1} , Y^{A2} , and Y^{A3} each represent a nitrogen atom or $C-R^{YX}$ (R^{YX} represents a hydrogen atom or a substituent);

(2) A light emitting element according to (1), wherein the light emitting layer contains a light emitting material and a host material and has a light emission maximum wavelength of 500 nm or less, and the minimum excitation triplet energy level of the host material is higher than that of the light emitting material;

(3) A light emitting element according to (2), wherein the minimum excitation triplet energy level of said host material is from 1.05 times to 1.38 times the minimum excitation triplet energy level of said light emitting material;

(4) A light emitting element according to (2) or (3), wherein the minimum excitation triplet energy level of said host material is from 68 kcal/mol to 90 kcal/mol;

(5) A light emitting element according to any of (1) to (4), further comprising a layer which is disposed adjacent to said light emitting layer and contains an organic material, wherein the minimum excitation triplet energy level of said organic material is higher than the minimum excitation triplet energy level of each of materials which constitute said light emitting layer;

(6) A light emitting element according to (5), wherein the minimum excitation triplet energy level of said organic material contained in the layer which is disposed adjacent to the light emitting layer is from 1.05 times to 1.38 times the minimum excitation triplet energy level of each of the materials which constitute said light emitting layer;

(7) A light emitting element according to (5) or (6), wherein the minimum excitation triplet energy level of said organic material contained in the layer which is disposed adjacent to the light emitting layer is from 68 kcal/mol to 90 kcal/mol;

(8) A light emitting element according to any of (2) to (7), wherein said host material is a compound represented by the following general formula (I):



wherein L^1 represents a bivalent or more linking group; Q^1 represents an aromatic hydrocarbon ring or an aromatic hetero ring; and n^1 represents a number of 2 or more, plural Q^1 may be the same or may be different from each other


(9) A light emitting element according to any of (5) to (8), wherein said organic material contained in the layer which is disposed adjacent to said light emitting layer is a compound represented by the following general formula (II):



wherein L^2 represents a bivalent or more linking group; Q^2 represents an aromatic hydrocarbon ring or an aromatic, hetero ring; and n^2 represents a number of 2 or more, plural Q^2 may be the same or may be different from each other;

(10) A light emitting element according to any of (5) to (9), wherein said organic material contained in the layer which is disposed adjacent to the light emitting layer is an azole compound represented by the general formula (A):

General formula (A)

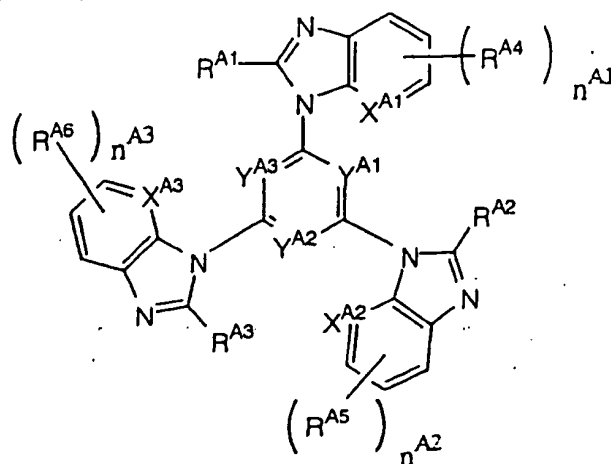

wherein R^{A1} , R^{A2} , and R^{A3} each represent a hydrogen atom or an aliphatic hydrocarbon group; R^{A4} , R^{A5} , and R^{A6} each represent a substituent; n^{A1} , n^{A2} , and n^{A3} each represents an integer of 0 to 3; X^{A1} , X^{A2} , and X^{A3} each represent a nitrogen atom or C- R^X (R^X represents a hydrogen atom or a substituent); and Y^{A1} , Y^{A2} , and Y^{A3} each represent a nitrogen atom or C- R^{YX} (R^{YX} represents a hydrogen atom or a substituent);

(11) A light emitting element according to any of (2) to (10), wherein the light emitting material is a transition metal complex;

(12) A light emitting element according to any of (2) to (11), wherein the light emitting layer comprises 0.1 % by weight to 20 % by weight of the light emitting material with respect to the weight of the host material; and

(13) A light emitting element according to any of (2) to (12), wherein the light emitting layer has a thickness of from 1 nm to 5 μm .

[0008] In the light emitting element of the present invention, the light emitting layer is held between a pair of electrodes and an electric field is applied to the electrodes whereby electrons are injected from a cathode and holes are injected from an anode. These electrons and holes are recombined with each other in the light emitting layer to create triplet excitons. When an exciton returns to the ground state, excess energy is emitted as light in the blue region. In the above light emitting element, the above light emitting layer is composed of a light emitting material (guest material) and a host material having a minimum excitation triplet energy level (T_1) higher than the T_1 of the light emitting material. This makes it possible to transfer the energy of the above triplet exciton to the T_1 level of the light emitting material efficiently, with the result that blue light can be emitted with high luminance efficiency.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] The present invention will be hereinafter explained in detail.

[0010] A light emitting element according to the present invention comprises at least a light emitting layer containing a light emitting material. The light emitting element is not particularly limited with respect to system, driving method and

utility mode, and examples thereof include EL (electroluminescent) elements. In EL elements, a light emitting layer is generally held between a pair of electrodes which are an anode and a cathode. Also, besides the light emitting layer, a hole injecting layer, a hole transporting layer, an electron injecting layer, an electron transporting layer, a protective layer and the like may be disposed between the pair of electrodes, and these layers may be provided with other functions respectively. The light emitting element of the present invention is preferably an organic light emitting element. The organic light emitting element referred to herein means an element in which a material which emits light is an organic compound.

[0011] The light emitting element of the present invention has a light emission maximum wavelength λ_{max} of 500 nm or less, specifically this light emitting element is a blue light emitting element. The above λ_{max} is preferably 495 nm or less and more preferably 490 nm or less in view of color purity.

[0012] However, the light emitting element of the present invention may emit light in any of regions other than the blue region, such as the ultraviolet region, green region, red region, and infrared region.

[0013] The light emitting element of the present invention preferably has a high luminance efficiency. External quantum efficiency of the light emitting element is 5% or more, preferably 7% or more, more preferably 10% or more, still more preferably 18% or more. The light emitting element of the present invention can reduce energy consumption at the time light is emitted and can emit highly luminous blue light for a long period of time. Particularly, when the light emitting element of the present invention is used as a display element, it becomes possible to increase surface area. Here, the external quantum efficiency means a value calculated from the following formula. Methods of calculating an external quantum efficiency include a method of calculating from the emission illuminance, emission spectrum, relative luminance efficiency curve and current density and a method of calculating the current density and the total number of emitted photons.

External quantum efficiency (%)

$$= (\text{Total number of emitted photons} / \text{Number of electrons injected into a light emitting element}) \times 100$$

[0014] It is preferable that an x value and a y value of the CIE chromaticity of light emission are as small as possible from the standpoint of the color purity of blue color. Specifically, the x value of the CIE chromaticity of light emission is preferably 0.22 or less, and more preferably 0.20 or less. The y value of the CIE chromaticity of light emission is preferably 0.53 or less, more preferably 0.50 or less, and further preferably 0.40 or less.

[0015] The light emitting element preferably has a light emission spectrum half value width of 1 to 100 nm or less, more preferably from 5 to 90 nm, further preferably from 10 to 80 nm, and particularly preferably from 20 to 70 nm, from the standpoint of the color purity of blue color.

[0016] In the light emitting element, it is preferable that a layer containing a compound having an ionization potential of 5.9 eV or more, more preferably from 6.0 to 7.0 eV, is disposed between the cathode and the light emitting layer, and it is more preferable that an electron transporting layer having an ionization potential of 5.9 eV or more is disposed between the cathode and the light emitting layer.

[0017] The light emitting element of the present invention is a light emitting element having a light emission maximum wavelength of 500 nm or less, in which the light emitting layer contains a host material and a light emitting material (guest material) and the T_1 level of the host material is higher than the T_1 level of the light emitting material.

[0018] The light emitting element according to the present invention preferably comprises at least a light emitting layer containing a light emitting material, and a layer disposed adjacent to the light emitting layer, and the T_1 level of an organic material contained in the layer adjacent to the light emitting layer is higher than the T_1 level of each of the materials which constitute the light emitting layer. Examples of the layer adjacent to the light emitting layer include a hole injecting layer, hole transporting layer, electron injecting layer, electron transporting layer, hole blocking layer, and electron blocking layer. Examples of the organic material which is used in each layer include a hole injecting material, hole transporting material, electron injecting material, electron transporting material, hole blocking material and electron blocking material. In a case where two layers are disposed adjacent to the light emitting layer, both these layers are preferably formed of an organic material having a T_1 level higher than the T_1 level of the light emitting material.

[0019] Generally, the luminance efficiency of a light emitting element can be expressed by a product of an injection efficiency of a hole and an electron, a recombination efficiency of a hole and an electron, a generation efficiency of an exciton, an efficiency of transfer of excitation energy generated by the recombination to the light emitting material, and a luminous quantum efficiency of the light emitting material. When a material which emits light from a triplet exciton, is used as the light emitting material, the probability at which the exciton is generated by the recombination, is higher than

that of a singlet exciton, thereby resulting in improvement of the luminance efficiency. Here, so long as the energy of a triplet exciton generated by the recombination can be efficiently transferred to the T_1 level of the light emitting material, the luminance efficiency further improves. In the light emitting element of the present invention, the T_1 level of the host material is made higher than the T_1 level of the light emitting material, thereby enabling efficient transfer of the energy of the triplet exciton to the T_1 level of the light emitting material, with the result that light is emitted with high luminance efficiency. In the light emitting element of the present invention, the T_1 level of the organic material constituting the layer disposed adjacent to the light emitting layer is made higher than the T_1 level of the light emitting material to thereby prevent the energy of the triplet exciton from transferring to the organic material constituting the layer adjacent to the light emitting layer, with the result that light is emitted with high luminance efficiency.

[0020] The T_1 level of each of the host material and the organic material contained in the layer which is disposed adjacent to the light emitting layer is preferably 1.05 times to 1.38 times the T_1 level of the light emitting material. Also, the T_1 level of each of the host material and the organic material is preferably from 68 kcal/mol (284.9 kJ/mol) to 90 kcal/mol (377.1 kJ/mol), more preferably from 69 kcal/mol (289.1 kJ/mol) to 85 kcal/mol (356.2 kJ/mol) and still more preferably 70 kcal/mol (293.3 kJ/mol) to 80 kcal/mol (335.2 kJ/mol).

[0021] When the light emitting element of the present invention has a layer which is formed of an organic material and disposed adjacent to the light emitting layer, preferably, the T_1 level of the organic material is also higher than the T_1 level of the light emitting material. A more preferable embodiment of the light emitting element of the present invention is a light emitting element in which the T_1 level of any organic material contained in any layer is higher than the T_1 level of the light emitting material.

[0022] The host material is preferably a compound represented by the following general formula (I), and the organic material which constitutes the layer adjacent to the light emitting layer is preferably a compound represented by the following general formula (II).




[0023] In the general formula (I), L^1 represents a bivalent or more coupling group, Q^1 represents an aromatic hydrocarbon ring or an aromatic hetero ring, and n^1 represent a number of 2 or more. Plural Q^1 may be the same or may be different from one another.





















































[0024] In the general formula (II), L^2 represents a bivalent or more coupling group, Q^2 represents an aromatic hydrocarbon ring or an aromatic hetero ring, and n^2 represent a number of 2 or more. Plural Q^2 may be the same or may be different from one another.


[0025] Next, the general formula (I) will be described. In the general formula (I), L^1 , Q^1 , and n^1 each has the same meaning as L^1 , Q^1 , and n^1 in the general formula (I), and a duplicate description thereof will be omitted.

[0026] L^1 represents a bivalent or more coupling group, preferably a coupling group comprised of carbon, silicon, nitrogen, boron, oxygen, sulfur, metal, and metal ion, more preferably a carbon atom, a nitrogen atom, a silicon atom, a boron atom, an oxygen atom, a sulfur atom, an aromatic hydrocarbon ring, and an aromatic hetero ring, and still more preferably a carbon atom, a silicon atom, an aromatic hydrocarbon ring, and an aromatic hetero ring. Specific examples of the coupling group represented by L^1 include the following.







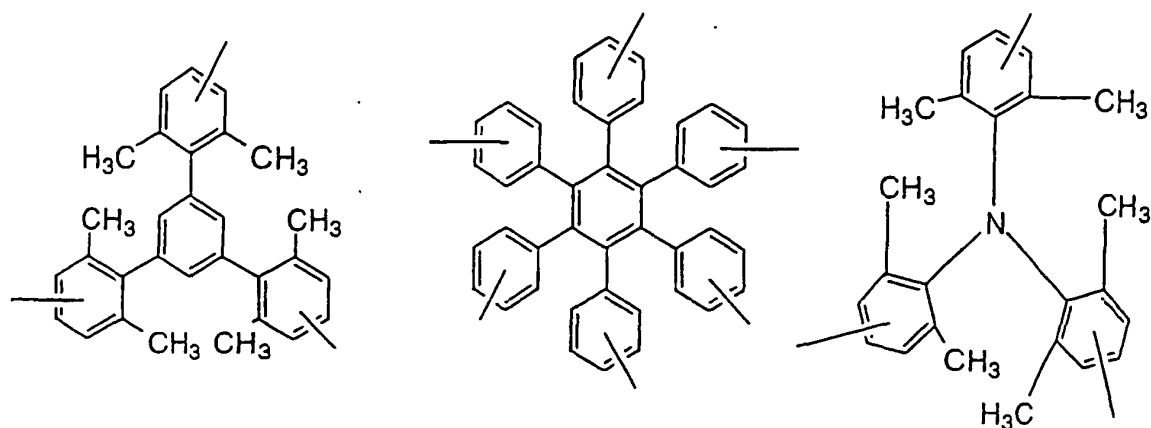

Al Zn Cu Fe Ir Ni Cd Au Pt Pd Os Re Ru Rh W Eu Sm Dy

[0027] In the general formula (I), L^1 may have a substituent. Examples of the substituent include an alkyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 12 carbon atoms, and particularly preferably having from 1 to 8 carbon atoms, such as methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, n-octyl, cyclopropyl, cyclopentyl, cyclohexyl, trifluoromethyl, and trichloromethyl), an alkenyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 6 carbon atoms, and particularly preferably having 2 carbon atoms, such as vinyl and the like), an alkynyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 6 carbon atoms, and particularly preferably having 2 carbon atoms, such as ethynyl and the like), an aryl group (preferably having from 6 to 10 carbon atoms, and particularly preferably having 6 carbon atoms, such as phenyl and the like), an amino group (preferably having from 0 to 36 carbon atoms, more preferably having from 0 to 20 carbon atoms, and particularly preferably having from 0 to 12 carbon atoms, such as amino, methylamino, dimethylamino, ethylamino, diethylamino, phenylamino, diphenylamino, dibenzylamino, thienylamino, dithienylamino, pyridylamino, and dipyridylamino), an alkoxy group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 12 carbon atoms, and particularly preferably having from 1 to 8 carbon atoms, such as methoxy, ethoxy, isopropoxy, n-butoxy, and t-butoxy), an aryloxy group (preferably having from 6 to 10 carbon atoms, and particularly preferably having 6 carbon atoms, such as phenoxy and the like), a heterocyclic oxy group (preferably having from 1 to 10 carbon atoms, more preferably having from 2 to 8 carbon atoms, and particularly preferably having from 4 to 5 carbon atoms, such as thienyloxy and pyridyloxy), a siloxy group (preferably having from 3 to 52 carbon atoms, more preferably having from 3 to 39 carbon atoms, still more preferably having from 3 to 33 carbon atoms, and particularly preferably having 3 to 27 carbon atoms, such as trimethylsiloxy, triethylsiloxy, and tri t-butylsiloxy), an acyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as acetyl, benzoyl, formyl, pivaloyl, thenoyl and nicotinoyl), an alkoxycarbonyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 16 carbon atoms, and particularly preferably having from 2 to 12 carbon atoms, such as methoxycarbonyl and ethoxycarbonyl), an aryloxycarbonyl group (preferably having from 7 to 20 carbon atoms, more preferably having from 7 to 16 carbon atoms, and particularly preferably having 7 carbon atoms, such as phenoxycarbonyl), a heterocyclic oxycarbonyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 12 carbon atoms, and particularly preferably having from 5 to 6 carbon atoms, such as thienyloxycarbonyl and pyridyloxycarbonyl), an acyloxy group (preferably having from 2 to 20 carbon atoms, more preferably from 2 to 16 carbon atoms, and particularly preferably having from 2 to 12 carbon atoms, such as acetoxyl, ethylcarbonyloxy, benzoyloxy, pivaloyloxy, thenoyloxy and nicotinoyloxy), an acylamino group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 16 carbon atoms, and particularly preferably having from 2 to 10 carbon atoms, such as acetylamino, benzoylamino, thenoylamino and nicotinoylamino), an alkoxycarbonylamino group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 16 carbon atoms, and particularly preferably having from 2 to 12 carbon atoms, such as methoxycarbonylamino), an aryloxycarbonylamino group (preferably having from 7 to 20 carbon atoms, more preferably having from 7 to 16 carbon atoms, and particularly preferably having from 7 to 12 carbon atoms, such as phenoxycarbonyl), a heterocyclic oxycarbonylamino group (preferably having from 6 to 21 carbon atoms, more preferably having from 2 to 15 carbon atoms, and particularly preferably having 5 to 11 carbon atoms, such as thienyloxycarbonylamino), a sulfonylamino group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methanesulfonylamino, benzenesulfonylamino and thiophenesulfonylamino), a sulfamoyl group (preferably

having from 0 to 20 carbon atoms, more preferably having from 0 to 16 carbon atoms, and particularly preferably having from 0 to 12 carbon atoms, such as sulfamoyl, methylsulfamoyl, dimethylsulfamoyl, phenylsulfamoyl and thienylsulfamoyl), a carbamoyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as carbamoyl, methylcarbamoyl, diethylcarbamoyl and phenylcarbamoyl), an alkylthio group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methylthio, ethylthio and n-butylthio), an arylthio group (preferably having from 6 to 26 carbon atoms, more preferably having from 6 to 20 carbon atoms, and particularly preferably having from 6 to 12 carbon atoms, such as phenylthio), a heterocyclic thio group (preferably having from 1 to 25 carbon atoms, more preferably having from 2 to 19 carbon atoms, and particularly preferably having from 5 to 11 carbon atoms, such as thienylthio and pyridylthio), a sulfonyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as tosyl and mesyl), a sulfinyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methanesulfinyl and benzenesulfinyl), an ureido group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as ureido, methylureido and phenylureido), a phosphoamide group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, particularly preferably having from 1 to 12 carbon atoms, such as diethylphosphoamide and phenylphosphoamide), a hydroxyl group, a mercapto group, a halogen atom (such as a fluorine atom, a chlorine atom, a bromine atom and an iodine atom), a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic acid group, a sulfinio group, a hydrazino group, an imino group, a heterocyclic group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, examples of the hetero atom including a nitrogen atom, an oxygen atom and a sulfur atom, and examples of the heterocyclic group including imidazolyl, pyridyl, piperidyl, morpholino, furyl, oxazolyl, thiazolyl, thienyl, benzoxazolyl, benzothiazolyl, benzimidazolyl, purinyl, pyrazinyl, pyrimidinyl, pyridazinyl, triazinyl, thiadiazolyl, oxadiazolyl, and selenienyl, the position of substitution may be arbitrarily set), and a silyl group (preferably having from 3 to 40 carbon atoms, more preferably having from 3 to 30 carbon atoms, and particularly preferably having from 3 to 20 carbon atoms, such as trimethylsilyl and triphenylsilyl). These substituents may further be substituted or may be condensed to other rings. Further, if there are two or more of substituents, these substituents may be the same or different from each other, or may be combined with each other to form a cyclic structure. The substituent is preferably an alkyl group, an aryl group, an acyl group, an alkoxy group, an aryloxy group, an alkylthio group, an arylthio group, an alkoxy carbonyl group, an aryloxy carbonyl group, a halogen atom, a hydroxy group, and a heterocyclic group, more preferably an alkyl group, an aryl group, a halogen atom, and a heterocyclic group, and still more preferably an alkyl group and a halogen group.


[0028] Q^1 in the general formula (I) represents an aromatic hydrocarbon ring or an aromatic hetero ring. An example of the aromatic hydrocarbon ring represented by Q^1 is a benzene ring. Examples of the aromatic hetero ring represented by Q^1 include a pyridine ring, a pyrazine ring, a pyrimidine ring, a pyridazine ring, a triazine ring, an oxazole ring, a thiazole ring, an imidazole ring, an oxadiazole ring, a thiadiazole ring, a triazole ring, a tetrazole ring, a furan ring, a thiophene ring, a pyrrole ring, an indole ring, a benzimidazole, and an imidazopyridine ring. Q^1 is preferably a benzene ring, a pyridine ring, a pyrimidine ring, a pyrazine ring, a triazine ring, a thiadiazole ring, an oxadiazole ring, an imidazole ring, an indole ring, a benzimidazole ring and an imidazopyridine ring, more preferably a benzene ring, a pyridine ring, a triazine ring, a thiadiazole ring, an oxazole ring, a thiazole ring, an imidazole ring, a benzimidazole ring, and an imidazopyridine ring, and still more preferably a benzene ring, a pyridine ring, a benzimidazole ring and an imidazopyridine ring.

[0029] The aromatic hydrocarbon ring or aromatic hetero ring represented by Q^1 may have a substituent. As the substituent, any of the examples of the substituent of L^1 can be applied. The substituent of Q^1 is preferably an alkyl group, an aryl group, a halogen atom, and a heterocyclic group, and more preferably an alkyl group and a halogen atom.


[0030] n^1 in the general formula (I) represents a number of 2 or more, preferably 2 to 15, more preferably 2 to 6, and still more preferably 3 to 6.

[0031] Among the compounds represented by the general formula (I), compounds represented by the following general formulae (A-I), (B-I), (C-I), and (D-I) are preferred.


General formula (A-I)




General formula (B-I)



General formula (C-I)



General formula (D-I)



[0032] L^A in the general formula (A-I) represents a bivalent or more coupling group. As the coupling group represented by L^A , any of the specific examples of the coupling group L^1 in the general formula (I) can be applied. L^A is preferably a bivalent or more aromatic hydrocarbon ring and a bivalent or more aromatic hetero ring, more preferably 1,3,5-benzenetriyl group, 2,4,6-pyridinetriyl group, 2,4,6-pyrimidinetriyl group, and 2,4,6-triazinetriyl group, still more preferably 1,3,5-benzenetriyl group and 2,4,6-triazinetriyl group, and particularly preferably 2,4,6-triazinetriyl group.

[0033] Q^A represents a group of atoms necessary for forming a nitrogen-containing aromatic hetero ring, and may have a monocyclic structure or a condensed ring structure. The nitrogen-containing aromatic hetero ring formed by Q^A is preferably a 5- to 8-membered nitrogen-containing aromatic hetero ring, and still more preferably a 5- to 6-membered nitrogen-containing aromatic hetero ring.

[0034] Examples of the nitrogen-containing aromatic hetero ring formed by Q^A include a pyrrole ring, an imidazole ring, a triazole ring, a tetrazole ring, an oxadiazole ring, thiadiazole ring, an oxatriazole ring, a thiatriazole ring, an indole ring, a benzimidazole ring, a benzotriazole ring, an imidazopyridine ring, an imidazopyrimidine ring, and an imidazopyridazine ring, preferably a pyrrole ring, an imidazole ring, a benzimidazole ring, and an imidazopyridine ring, more preferably a benzimidazole ring and an imidazopyridine ring, and still more preferably a benzimidazole ring.


[0035] Plural Q^A may be the same or may be different from each other.

[0036] Further, L^A and Q^A in the general formula (A-I) each may have a substituent. As the substituent, for example, any of the examples of the substituent of L^1 in the general formula (I) can be applied.

[0037] n^A represents a number of 2 or more, preferably 2 to 6, more preferably 2 to 3, and still more preferably 3.

[0038] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-II) is more preferable.

General formula (A-II)



[0039] L^A and n^A in the general formula (A-II) each have the same meaning as those in the general formula (A-I), and a preferred embodiment thereof is also the same.

[0040] X^{A21} , X^{A22} , X^{A23} , and X^{A24} in the general formula (A-II) each represent a nitrogen atom or C-R (R represents a hydrogen atom or a substituent), and if possible, may be combined with each other to form a ring structure. As the substituent represented by R, for example, any of the examples of the substituent of L^1 in the general formula (I) can be applied. R is preferably a hydrogen atom, an aliphatic hydrocarbon group, a silyl group, and a ring structure formed by combination thereof, more preferably a hydrogen atom, an aliphatic hydrocarbon group, and a ring structure formed by combination thereof, and still more preferably a hydrogen atom, an alkyl group (preferably having from 1 to 16 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 1 to 6 carbon atoms), and a ring structure formed by combination thereof (preferably a 5- to 7-membered ring, more preferably a 5- or 6-membered ring, still more preferably a 6-membered aromatic ring, and particularly preferably a benzene ring or a pyridine ring).

[0041] X^{A21} is preferably C-R. R is more preferably a hydrogen atom or an alkyl group, still more preferably a hydrogen atom or an unsubstituted alkyl group, and particularly preferably a hydrogen atom or a methyl group.


[0042] X^{A22} is preferably a nitrogen atom.

[0043] X^{A23} and X^{A24} are each preferably C-R, and more preferably a ring structure formed by combination of X^{A23} and X^{A24} via R (preferably a 5- to 7-membered ring, more preferably a 5- or 6-membered ring, still more preferably a 6-membered ring, further more preferably a 6-membered aromatic ring, and particularly preferably a benzene ring or a pyridine ring).

[0044] When there are plural R, they may be the same or may be different from each other.

[0045] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-III) is still more preferable.

General formula (A-III)




[0046] L^A and n^A in the general formula (A-III) each have the same meaning as those in the general formula (A-I), and a preferred embodiment thereof is also the same. X^{A23} and X^{A24} in the general formula (A-III) each have the same meaning as those in the general formula (A-II), and a preferred embodiment thereof is also the same.

[0047] R^A represents a hydrogen atom or a substituent. As the substituent represented by R^A , for example, any of the examples of the substituent of L^1 in the general formula (I) can be applied. R^A is preferably a hydrogen atom or an aliphatic hydrocarbon group, more preferably a hydrogen atom or an alkyl group, still more preferably a hydrogen atom or an alkyl group having 1 to 16 carbon atoms, particularly preferably a hydrogen atom or an alkyl group having 1 to 6 carbon atoms, and most preferably a hydrogen atom or a methyl group.

[0048] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-IV) is still more preferable.


General formula (A-IV)



[0049] L^A and n^A in the general formula (A-IV) each have the same meaning as those in the general formula (A-I), and a preferred embodiment thereof is also the same. R^A in the general formula (A-IV) has the same meaning as that in the general formula (A-III), and a preferred embodiment thereof is also the same. Q^{A4} represents a group of atoms for forming an aromatic hydrocarbon ring or an aromatic hetero ring. Examples of the aromatic ring formed by Q^{A4} include a benzene ring, a pyridine ring, a pyrimidine ring, a pyridazine ring, and a triazine ring, and preferably a benzene ring and a pyridine ring.

[0050] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-V) is still more preferable.

General formula (A-V)

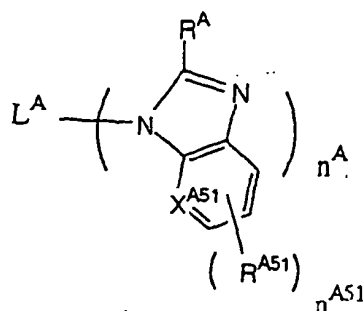

[0051] L^A and n^A in the general formula (A-V) each have the same meaning as those in the general formula (A-I), and a preferred embodiment thereof is also the same. R^A in the general formula (A-V) has the same meaning as that in the general formula (A-III), and a preferred embodiment thereof is also the same. X^{A51} represents a nitrogen atom or C- R^X (R^X represents a hydrogen atom or a substituent). As the substituent represented by R^X , for example, any of the examples of L^1 in the general formula (I) can be applied. R^X is preferably a hydrogen atom, an aliphatic hydrocarbon group, and a halogen atom, more preferably a hydrogen atom, an alkyl group (preferably having from 1 to 16 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 1 to 6 carbon atoms), and an aryl group (preferably having from 6 to 20 carbon atoms, more preferably having from 6 to 16 carbon atoms, and still more preferably having from 6 to 12 carbon atoms), still more preferably a hydrogen atom and an alkyl group, and particularly preferably a hydrogen atom.


[0052] X^{A51} is preferably a nitrogen atom or CH, and particularly preferably CH.

[0053] R^{A51} represents a substituent. As the substituent represented by R^{A51} , for example, any of the examples of L^1 in the general formula (I) can be applied. R^{A51} is preferably an aliphatic hydrocarbon group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 16 carbon atoms, and still more preferably having from 1 to 12 carbon atoms), an aryl group (preferably having from 6 to 20 carbon atoms, more preferably having from 6 to 16 carbon atoms, and still more preferably having from 6 to 12 carbon atoms), a halogen atom, and a cyano group, more preferably an alkyl group (preferably having from 1 to 16 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 1 to 6 carbon atoms), and an aryl group (preferably having from 6 to 20 carbon atoms, more preferably having from 6 to 16 carbon atoms, and still more preferably having from 6 to 12 carbon atoms), and still more preferably an alkyl group.

[0054] n^{A51} represents an integer of 0 to 3, preferably 0 to 2, more preferably 0 or 1, and particularly preferably 0.

[0055] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A) is still more preferable. An azole compound represented by the general formula (A) is particularly preferably used as an organic material which constitutes a layer adjacent to the light emitting layer.

General formula (A)

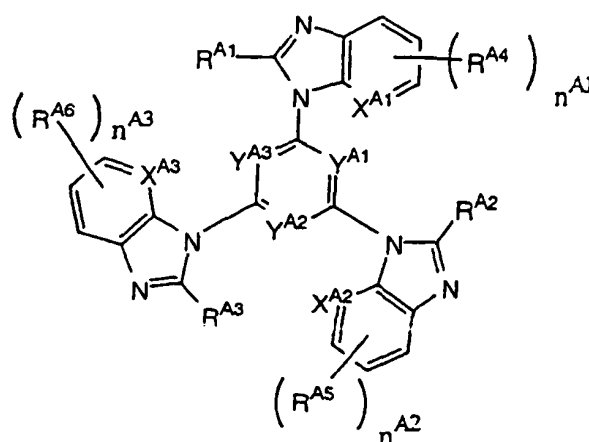

[0056] R^{A1} , R^{A2} and R^{A3} in the general formula (A) each have the same meaning as R^A in the general formula (A-III), and a preferred embodiment thereof is also the same. That is, R^{A1} , R^{A2} and R^{A3} are each preferably a hydrogen atom or an aliphatic hydrocarbon group. R^{A4} , R^{A5} and R^{A6} in the general formula (A) each have the same meaning as R^{A51} in the general formula (A-V), that is, each represent a substituent, and a preferred embodiment thereof is also the same. n^{A1} , n^{A2} and n^{A3} in the general formula (A) each have the same meaning as n^{A51} in the general formula (A-V), that is, each represent an integer of 0 to 3, and a preferred embodiment thereof is also the same.


[0057] X^{A1} , X^{A2} and X^{A3} in the general formula (A) each have the same meaning as X^{A51} in the general formula (A-V), that is, each represent a nitrogen atom or $C-R^X$ (R^X represents a hydrogen atom or a substituent), and a preferred embodiment thereof is also the same.

[0058] Y^{A1} , Y^{A2} and Y^{A3} in the general formula (A) each represent a nitrogen atom or $C-R^{YX}$ (R^{YX} represents a hydrogen atom or a substituent). As the substituent represented by R^{YX} , for example, any of the examples of the substituent of L^1 in the general formula (I) can be applied. R^{YX} is preferably a hydrogen atom, an alkyl group (preferably having from 1 to 16 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 1 to 6 carbon atoms), and an aryl group (preferably having from 6 to 16 carbon atoms, more preferably having from 6 to 12 carbon atoms, and still more preferably having from 6 to 10 carbon atoms), more preferably a hydrogen atom, a methyl group, and a phenyl group, and particularly preferably a hydrogen atom.

[0059] It is preferable that Y^{A1} , Y^{A2} and Y^{A3} are all nitrogen atoms or CH.

[0060] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-a) is particularly preferable.


General formula (A-a)

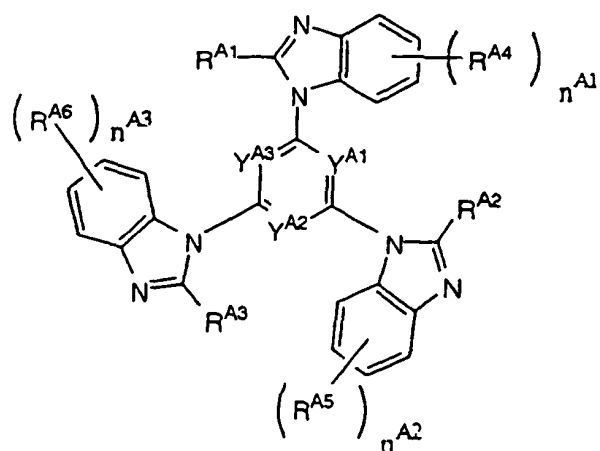


[0061] R^{A1} , R^{A2} and R^{A3} in the general formula (A-a) each have the same meaning as that of R^A in the general formula (A-III), and a preferred embodiment thereof is also the same. R^{A4} , R^{A5} and R^{A6} in the general formula (A-a) each have the same meaning as that of R^{A51} in the general formula (A-V), and a preferred embodiment thereof is also the same. n^{A1} , n^{A2} and n^{A3} in the general formula (A-a) each have the same meaning as that of n^{A51} in the general formula (A-V), and a preferred embodiment thereof is also the same. Y^{A1} , Y^{A2} and Y^{A3} in the general formula (A-a) each have the same meaning as those in the general formula (A), and a preferred embodiment thereof is also the same.

[0062] Among the compounds represented by the general formula (A-I), the compound represented by the following general formula (A-b) or (A-c) is preferred.

General formula (A-b)

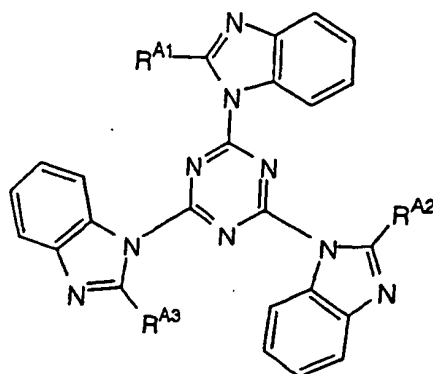

General formula (A-c)

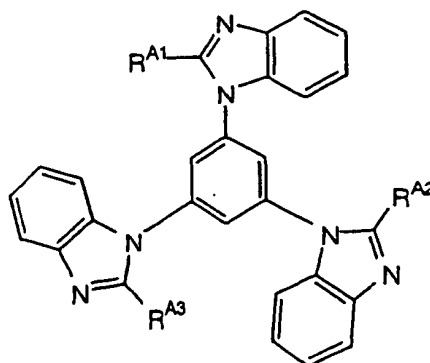

[0063] R^{A1} , R^{A2} and R^{A3} in the general formulae (A-b) and (A-c) each have the same meaning as R^A in the general formula (A-III), and a preferred embodiment is also the same.

[0064] Next, the compound represented by the general formula (B-I) will be described. L^B in the general formula (B-I) represents a bivalent or more coupling group. As the coupling group represented by L^B , any of the examples of the coupling group L^1 in the general formula (I) can be applied. L^B is preferably a bivalent or more aromatic hydrocarbon ring and a bivalent or more aromatic hetero ring, and more preferably 1,3,5-benzenetriyl group and 2,4,6-triazinetriyl group.


[0065] Q^B in the general formula (B-I) represents atoms necessary for forming an aromatic hetero ring by bonding with C. The aromatic hetero ring formed by Q^B is preferably a 5- to 8-membered aromatic hetero ring, more preferably a 5- to 6-membered aromatic hetero ring, and particularly preferably a 5- to 6-membered nitrogen-containing aromatic hetero ring.

[0066] Examples of the aromatic hetero ring formed by Q^B include an imidazole ring, an oxazole ring, a thiazole ring, a selenazole ring, a tellurazole ring, a triazole ring, a tetrazole ring, an oxadiazole ring, a thiadiazole ring, an oxatriazole ring, a thiatriazole ring, a pyrimidine ring, a pyridazine ring, a pyrazine ring, a triazine ring, and a tetrazine ring, preferably an imidazole ring, an oxazole ring, a thiazole ring, and a triazine ring, more preferably an imidazole ring, an oxazole ring, and a triazine ring, and still more preferably an imidazole ring and a triazine ring. The aromatic hetero ring formed by Q^B may also form a condensed ring with other ring, or may have a substituent. As the substituent, for example, any of the examples of the substituent of the group represented by L^1 in the general formula (I). The substituent of Q^B is preferably an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an acyl group, an alkoxy-carbonyl group, an aryloxy-carbonyl group, an acyloxy group, an acylamino group, a sulfonylamino group, a sulfamoyl group, a carbamoyl group, an alkylthio group, an arylthio group, a sulfonyl group, a halogen atom, a cyano group, and a heterocyclic group, more preferably an alkyl group, an aryl group, an alkoxy group, an aryloxy group, a halogen atom, a cyano group, and a heterocyclic group, still more preferably an alkyl group, an aryl group, an alkoxy group, an aryloxy group, and an aromatic heterocyclic group, and particularly preferably an alkyl group, an aryl group, an alkoxy group, and an aromatic heterocyclic group.

[0067] n^B in the general formula represents an integer of 2 or more, preferably 2 to 8, more preferably 2 to 6, still more preferably 2 to 4, particularly preferably 2 to 3, and most preferably 3.

[0068] Among the compounds represented by the general formula (B-I), the compound represented by the following general formula (B-II) is still more preferable.

General formula (B-II)



[0069] L^B in the general formula (B-II) has the same meaning as L^B in the general formula (B-I), and a preferred embodiment thereof is also the same. X^{B2} in the general formula (B-II) represents -O-, -S- or =N- R^{B2} . R^{B2} represents a hydrogen atom, an aliphatic hydrocarbon group, an aromatic hydrocarbon group, and an aromatic heterocyclic group. The aliphatic hydrocarbon group represented by R^{B2} is a normal chain, branching, or cyclic alkyl group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 12 carbon atoms, and particularly preferably having from 1 to 8 carbon atoms, such as methyl, ethyl, isopropyl, tert-butyl, n-octyl, n-decyl, n-hexadecyl, cyclopropyl, cyclopentyl, and cyclohexyl), an alkenyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 12 carbon atoms, and particularly preferably having from 2 to 8 carbon atoms, such as vinyl, allyl, 2-butenyl, and 3-pentenyl), an alkynyl group (preferably having from 2 to 20 carbon atoms, more preferably having from 2 to 12 carbon atoms, and particularly preferably having from 2 to 8 carbon atoms, such as propargyl and 3-pentynyl), and more preferably an alkyl group.

[0070] The aryl group represented by R^{B2} is a monocyclic or condensed-ring aryl group, that is, an aryl group preferably having from 6 to 30 carbon atoms, more preferably having from 6 to 20 carbon atoms, and still more preferably having from 6 to 12 carbon atoms. Examples of the aryl group include phenyl, 2-methylphenyl, 3-methylphenyl, 4-methylphenyl, 2-methoxyphenyl, 3-trifluoromethylphenyl, pentafluorophenyl, 1-naphthyl, and 2-naphthyl.

[0071] The heterocyclic group represented by R^{B2} is a monocyclic or condensed-ring heterocyclic group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 2 to 10 carbon atoms), preferably an aromatic heterocyclic group including at least one of a nitrogen atom, an oxygen atom, a sulfur atom, and selenium atom. Specific examples of the heterocyclic group represented by R^{B2} include pyrrolidine, piperidine, piperazine, morpholine, thiophene, selenophene, furan, pyrrole, imidazole, pyrazole, pyridine, pyrazine, pyridazine, pyrimidine, triazole, triazine, indole, indazole, purine, thiazoline, thiazole, thiadiazole, oxazoline, oxazole, oxadiazole, quinoline, isoquinoline, phthalazine, naphthylidene, quinoxaline, quinazoline, cinnoline, pteridine, acridine, phenanthroline, phenazine, tetrazole, benzimidazole, benzoxazole, benzothiazole, benzotriazole, tetrazaindene, carbazole, and azepin, preferably furan, thiophene, pyridine, pyrazine, pyrimidine, pyridazine, triazine, quinoline, phthalazine, naphthylidene, quinoxaline, and quinazoline, more preferably furan, thiophene, pyridine, and quinoline, and still more preferably quinoline.

[0072] The aliphatic hydrocarbon group, aryl group, and heterocyclic group represented by R^{B2} each may have a substituent. As the substituent, any of the examples of the substituent of the group represented by L^1 in the general formula (I) can be applied, and a preferred substituent is also the same. R^{B2} is preferably an alkyl group, an aryl group, and an aromatic heterocyclic group, more preferably an aryl group and an aromatic heterocyclic group, and still more preferably an aryl group. X^{B2} is preferably -O- or =N- R^{B2} , more preferably =N- R^{B2} , and particularly preferably N- Ar^{B2} (Ar^{B2} is an aryl group (preferably having from 6 to 30 carbon atoms, more preferably from 6 to 20 carbon atoms, and still more preferably 6 to 12 carbon atoms) and an aromatic heterocyclic group (preferably having from 1 to 20 carbon atoms, more preferably having from 1 to 12 carbon atoms, and still more preferably having from 2 to 10 carbon atoms)), and preferably an aryl group).


[0073] Z^{B2} represents a group of atoms necessary for forming the aromatic ring. The aromatic ring formed by Z^{B2} may be any one of the aromatic hydrocarbon ring and the aromatic hetero ring. Examples of the aromatic ring includes a benzene ring, a pyridine ring, a pyrazine ring, a pyrimidine ring, a pyridazine ring, a triazine ring, a pyrrole ring, a furan ring, a thiophene ring, a selenophene ring, tellurophene ring, an imidazole ring, a thiazole ring, a selenazole ring, a tellurazole ring, a thiadiazole ring, an oxadiazole ring, and a pyrazole ring, preferably a benzene ring, a pyridine ring, a pyrazine ring, a pyrimidine ring, and a pyridazine ring, more preferably a benzene ring, a pyridine ring, and a pyrazine ring, still more preferably a benzene ring and a pyridine ring, and particularly preferably a pyridine ring.

[0074] The aromatic ring formed by Z^{B2} may also form a condensed ring with other ring, or may have a substituent. As the substituent, for example, any of the examples of the substituent of the group represented by L^1 in the general formula (I) can be applied. The substituent of the aromatic ring formed by Z^{B2} is preferably an alkyl group, an alkenyl

group, an alkynyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an acyl group, an alkoxy-carbonyl group, an aryloxy-carbonyl group, an acyloxy group, an acylamino group, an alkoxy-carbonylamino group, an aryloxy-carbonylamino group, a sulfonylamino group, a sulfamoyl group, a carbamoyl group, an alkylthio group, an arylthio group, a sulfonyl group, a halogen atom, a cyano group, and a heterocyclic group, more preferably an alkyl group, an aryl group, an alkoxy group, an aryloxy group, a halogen atom, a cyano group, and a heterocyclic group, still more preferably an alkyl group, an aryl group, an alkoxy group, an aryloxy group, and an aromatic heterocyclic group, and particularly preferably an alkyl group, an aryl group, an alkoxy group, and an aromatic heterocyclic group.

[0075] Among the compounds represented by the general formula (B-II), the compound represented by the following general formula (B-III) is still more preferable.

General formula (B-III)




[0076] L^B in the general formula (B-III) has the same meaning as that in the general formula (B-I), and a preferred embodiment thereof is also the same. X^{B3} and n^{B3} in the general formula (B-III) respectively have the same meanings as X^{B2} and n^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B3} represents a group of atoms necessary for forming the aromatic hetero ring. The aromatic hetero ring formed by Z^{B3} is preferably a 5- or 6-membered aromatic hetero ring, more preferably a 5- or 6-membered nitrogen-containing aromatic hetero ring, and still more preferably a 6-membered nitrogen-containing aromatic hetero ring.

[0077] Examples of the aromatic hetero ring formed by Z^{B3} include furan, thiophene, pyran, pyrrole, imidazole, pyrazole, pyridine, pyrazine, pyrimidine, pyridazine, triazine, thiazole, oxazole, isothiazole, isoxazole, thiadiazole, oxadiazole, triazole, selenazole, and tellurazole, preferably pyridine, pyrazine, pyrimidine, and pyridazine, more preferably pyridine and pyrazine, and still more preferably pyridine.

[0078] The aromatic hetero ring formed by Z^{B3} may also form a condensed ring with other ring, or may have a substituent. As the substituent, any of the examples of the substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same.

[0079] Among the compounds represented by the general formula (B-II), the compound represented by the following general formula (B-IV) is still more preferable.

General formula (B-IV)




[0080] L^B in the general formula (B-IV) has the same meaning as that in the general formula (B-I), and a preferred embodiment thereof is also the same. X^{B4} and n^{B4} in the general formula (B-IV) respectively have the same meanings as X^{B2} and n^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B4} represents a group of atoms required for forming a nitrogen-containing aromatic hetero ring. The nitrogen-containing aromatic hetero ring formed by Z^{B4} is preferably a 5- or 6-membered nitrogen-containing aromatic hetero ring, and more preferably a 6-membered nitrogen-containing aromatic hetero ring.

[0081] Examples of the nitrogen-containing aromatic hetero ring formed by Z^{B4} include pyrrole, imidazole, pyrazole, pyridine, pyrazine, pyrimidine, pyridazine, triazine, thiazole, oxazole, isothiazole, isoxazole, thiadiazole, oxadiazole, triazole, selenazole, and tellurazole, preferably pyridine, pyrazine, pyrimidine, and pyridazine, more preferably pyridine and pyrazine, and still more preferably pyridine.

[0082] The aromatic hetero ring formed by Z^{B4} may also form a condensed ring with other ring, or may have a substituent. As the substituent, any of the examples of the substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same.

[0083] Among the compound represented by the general formula (B-II), the compound represented by the following general formula (B-V) is still more preferable.

General formula (B-V)




[0084] L^B in the general formula (B-V) has the same meaning as that in the general formula (B-I), and a preferred embodiment thereof is also the same. X^{B5} and n^{B5} in the general formula (B-V) respectively have the same meanings as X^{B2} and n^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B5} represents a group of atoms necessary for forming the 6-membered nitrogen-containing aromatic hetero ring.

[0085] Examples of the 6-membered nitrogen-containing aromatic hetero ring formed by Z^{B5} include pyridine, pyrazine, pyrimidine, pyridazine, and triazine, preferably pyridine, pyrazine, pyrimidine, and pyridazine, more preferably pyridine and pyrazine, and still more preferably pyridine.

[0086] The 6-membered nitrogen-containing aromatic hetero ring formed by Z^{B5} may also form a condensed ring with other ring, or may have a substituent. As the substituent, any of the examples of the substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same.

[0087] Among the compounds represented by the general formula (B-II), the compound represented by the following general formula (B-VI) is still more preferable.


General formula (B-VI)



[0088] L^B in the general formula (B-VI) has the same meaning as that in the general formula (B-I), and a preferred embodiment thereof is also the same. X^{B6} and n^{B6} in the general formula (B-VI) respectively have the same meanings as X^{B2} and n^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B6} in the general formula (B-VI) has the same meaning as Z^{B5} in the general formula (B-V), and a preferred embodiment thereof is also the same. R^{B6} in the general formula (B-VI) has the same meaning as R^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same.

[0089] Among the compound represented by the general formula (B-II), the compound represented by the following general formula (V-VII) is still more preferable.

General formula (B-VII)

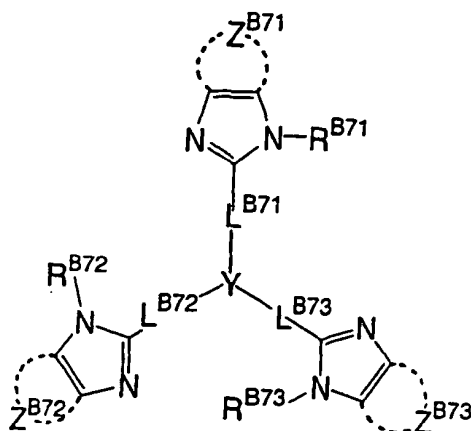


[0090] R^{B71} , R^{B72} , and R^{B73} in the general formula (B-VII) each have the same meaning as R^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B71} , Z^{B72} , and Z^{B73} in the general formula (B-VII) each have the same meaning as Z^{B5} in the general formula (B-V), and a preferred embodiment thereof is also the same. L^{B71} , L^{B72} , and L^{B73} in the general formula (B-VII) each represent a coupling group, and may be each any of the examples of L^1 in the general formula (I). L^{B71} , L^{B72} , and L^{B73} in the general formula (B-VII) are each a coupling group comprised of, preferably single bond, bivalent aromatic hydrocarbon ring group, bivalent aromatic heterocyclic group, and a combination thereof, and more preferably single bond. L^{B71} , L^{B72} , and L^{B73} may each have a substituent. As the substituent, any of substituents of the group represented by L^1 in the general formula (I), and a preferred embodiment thereof is also the same.

[0091] Y in the general formula (B-VII) represents a nitrogen atom, 1,3,5-benzenetriyl group, or 2,4,6-triazinetriyl group. 1,3,5-benzenetriyl group may have a substituent at the position of 2,4,6. As the substituent, for example, an alkyl group, an aromatic hydrocarbon ring group, and a halogen atom can be applied.

[0092] Among the compounds represented by the general formula (B-II), the compound represented by the following general formula (B-VIII) is particularly preferable.

General formula (B-VIII)

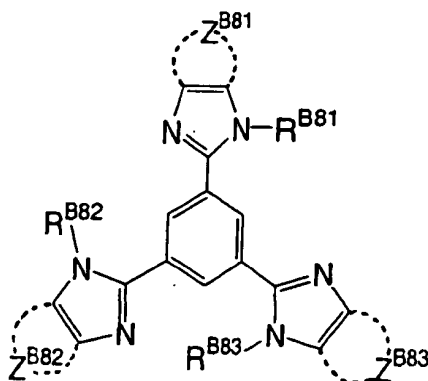


[0093] R^{B81} , R^{B82} , and R^{B83} in the general formula (B-VIII) each have the same meaning as R^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. Z^{B81} , Z^{B82} , and Z^{B83} in the general formula (B-VIII) each

have the same meaning as Z^{B5} in the general formula (B-V), and a preferred embodiment thereof is also the same.

[0094] Among the compounds represented by the general formula (B-II), the compound represented by the following general formula (B-IX) is most preferable.

General formula (B-IX)

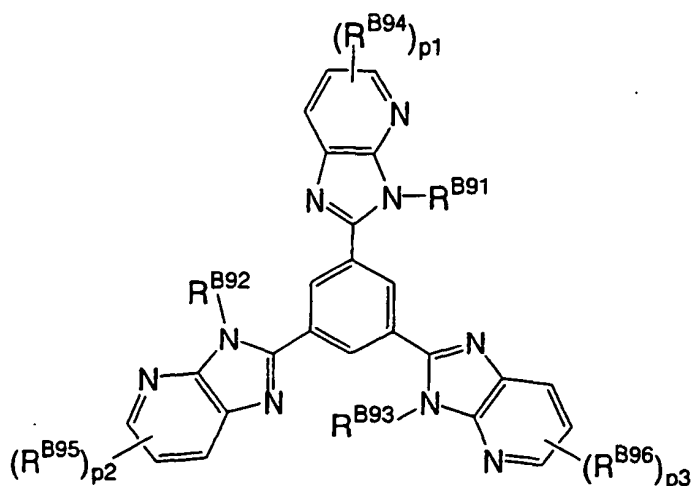


[0095] R^{B91} , R^{B92} , and R^{B93} in the general formula (B-IX) each have the same meaning as R^{B2} in the general formula (B-II), and a preferred embodiment thereof is also the same. R^{B94} , R^{B95} , and R^{B96} in the general formula (B-IX) each represent a substituent. As the substituent, any of substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same. Further, if possible, the substituents may be coupled to form a ring. p_1 , p_2 , and p_3 in the general formula (B-IX) each represent an integer of 0 to 3, preferably 0 to 2, more preferably 0 or 1, and still more preferably 0.

[0096] Next, the compound represented by the general formula (C-I) will be described. Q^{C1} represents an aromatic hydrocarbon ring or an aromatic hetero ring. Examples of the aromatic hydrocarbon ring represented by Q^{C1} are a benzene ring and a naphthalene ring. Examples of the aromatic hetero ring represented by Q^{C1} are a pyridine ring, a pyrazine ring, a pyrimidine ring, a pyridazine ring, a triazine ring, an oxazole ring, a thiazole ring, an imidazole ring, an oxadiazole ring, a thiadiazole ring, a triazole ring, a tetrazole ring, a furan ring, a thiophene ring, and pyrrole ring. Q^{C1} is preferably a benzene ring, a pyridine ring, a pyrazine ring, a triazine ring, a thiadiazole ring, and an oxadiazole ring, more preferably a benzene ring, a pyridine ring, a triazine ring, and a thiadiazole ring, and still more preferably a benzene ring and a triazine ring. The aromatic hydrocarbon ring or aromatic hetero ring represented by Q^{C1} may be condensed with other ring, or may have a substituent. As the substituent, any of substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same.

[0097] R^{C1} represents a hydrogen atom or an aliphatic hydrocarbon group. R^{C1} is preferably an aliphatic hydrocarbon group, and more preferably an alkyl group and an alkenyl group. n^c represents an integer of 2 to 4, preferably 3 or 4, and more preferably 4. At this time, if n^c is 2, Q^{C1} of the same kind may be bonded to Si, or Q^{C1} of different two kinds may be bonded to Si.

[0098] Among the compounds represented by the general formula (C-I), the compound represented by the following general formula (C-II) is more preferable.

General formula (C-II)




[0099] Q^{C21} , Q^{C22} , Q^{C23} , and Q^{C24} in the general formula (C-II) each have the same meaning as Q^{C1} in the general formula (C-I), and a preferred embodiment thereof is also the same. Q^{C21} , Q^{C22} , Q^{C23} , and Q^{C24} in the general formula (C-II) may be the same or may be different from one another.

[0100] Next, the compound represented by the general formula (D-I) will be described. Q^{D1} represents an aromatic hydrocarbon ring or an aromatic hetero ring. An example of the aromatic hydrocarbon ring represented by Q^{D1} is a benzene ring. Examples of the aromatic hetero ring represented by Q^{D1} are a pyridine ring, a pyrazine ring, a pyrimidine ring, a pyridazine ring, a triazine ring, an oxazole ring, a thiazole ring, an imidazole ring, an oxadiazole ring, a thiadiazole ring, a triazole ring, a tetrazole ring, a furan ring, a thiophene ring, and pyrrole ring. Q^{D1} is preferably a benzene ring, a pyridine ring, a pyrazine ring, a triazine ring, a thiadiazole ring, more preferably a benzene ring, a pyridine ring, a pyrazine ring, a triazine ring, and a thiadiazole ring, and still more preferably a benzene ring and a triazine ring. The aromatic hydrocarbon ring or aromatic hetero ring represented by Q^{D1} may be condensed with other ring, or may have a substituent. As the substituent, any of substituents of the group represented by L^1 in the general formula (I) can be applied, and a preferred embodiment thereof is also the same.

[0101] R^{D1} represents a hydrogen atom or an aliphatic hydrocarbon group. R^{D1} is preferably an aliphatic hydrocarbon group, and more preferably an alkyl group and an alkenyl group. n^D represents an integer of 2 to 4, preferably 3 or 4, and more preferably 4. At this time, if n^D is 2, Q^{D1} of the same kind may be bonded to C, or Q^{D1} of the different two kinds may be bonded to C.

[0102] Among the compounds represented by the general formula (D-I), the compound represented by the following general formula (D-II) is more preferable.

General formula (D-II)




[0103] Q^{D21} , Q^{D22} , Q^{D23} , and Q^{D24} in the general formula (D-II) each have the same meaning as Q^{D1} in the general formula (D-I), and a preferred embodiment thereof is also the same. Q^{D21} , Q^{D22} , Q^{D23} , and Q^{D24} in the general formula (D-II) may be the same or may be different from one another.

[0104] The host material used in the present invention and the organic material contained in the layer which is disposed adjacent to the light emitting layer each may be a polymer (having a weight average molecular weight of preferably 1000 to 5000000, more preferably 2000 to 2000000, and still more preferably 10000 to 1000000) with a skeleton represented by the general formula (I) or the general formula (II) being connected to a polymer main chain, or a polymer (having a weight average molecular weight of preferably 1000 to 5000000, more preferably 2000 to 2000000, and still more preferably 10000 to 1000000) having, as the main chain, a skeleton represented by the general formula (I) or the general formula (II). The polymer may be a homopolymer or a copolymer having other skeleton connected thereto. The copolymer may be a random copolymer or a block copolymer. The host material used in the present invention and the organic material contained in the layer which is disposed adjacent to the light emitting layer are each preferably a low molecular weight compound or a polymer with the skeleton represented by the general formula (I) or the general formula (II) being connected to a polymer main chain, and more preferably a low molecular weight compound. The host material used in the present invention and the organic material contained in the layer which is disposed adjacent to the light emitting


layer may be compounds in which the skeleton represented by the general formula (I) or the general formula (II) is connected to a metal to form a complex.

[0105] Specific examples of the compound represented by the general formula (I) or the general formula (II) are described below. Exemplified compounds A-1 to A-33 are specific examples of the general formula (A-I), exemplified compounds B-1 to B-62 are specific examples of the general formula (B-I), exemplified compounds C-1 to C-72 are specific examples of the general formula (C-I), exemplified compounds D-1 to D-75 are specific examples of the general formula (D-I), and exemplified compounds E-1 to E-5 are other specific examples.


A-1

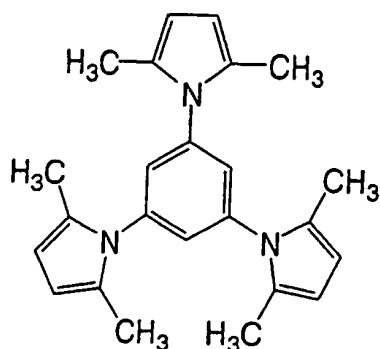


A-2

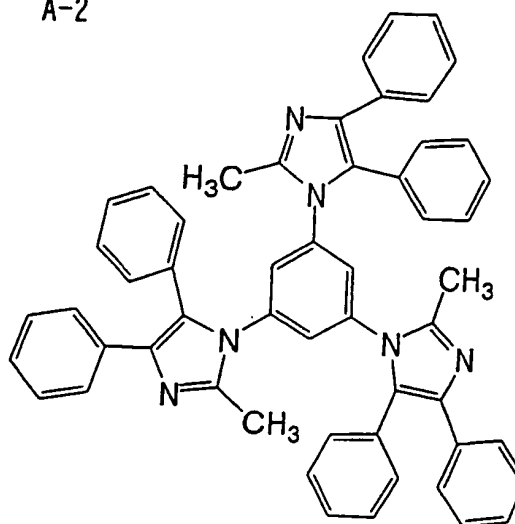


A-3

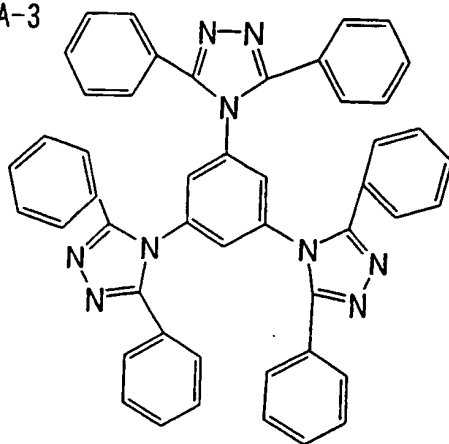


A-4

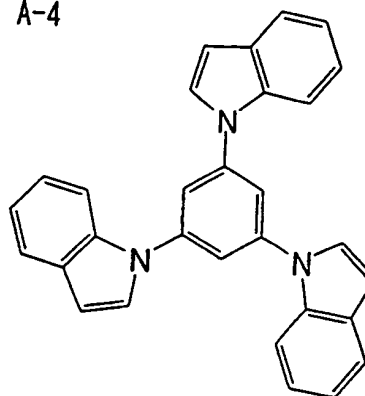


A-5

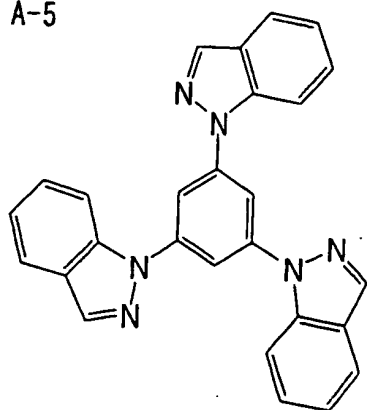


A-6

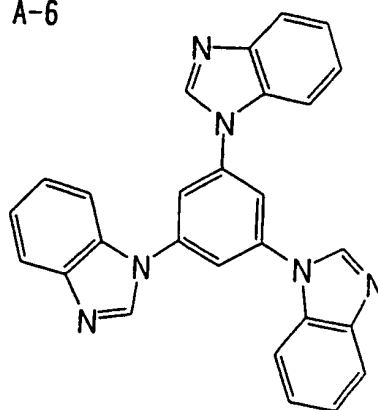


A-7

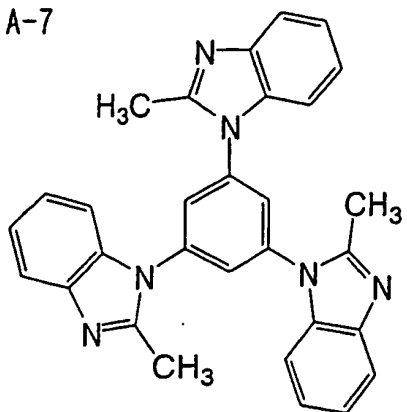


A-8






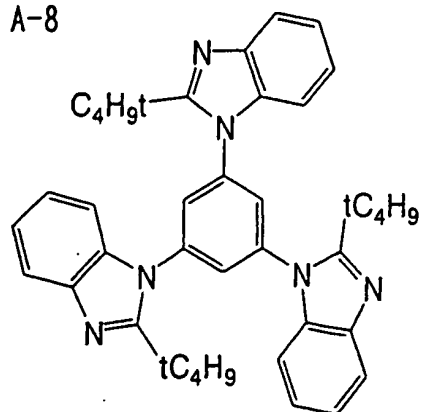


A-9

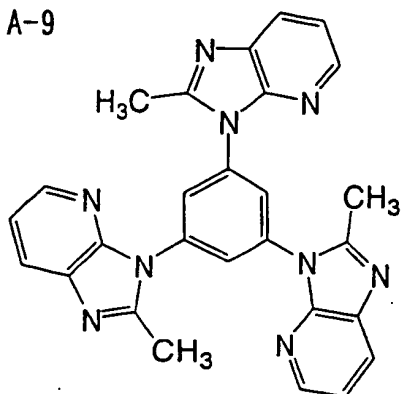


A-10

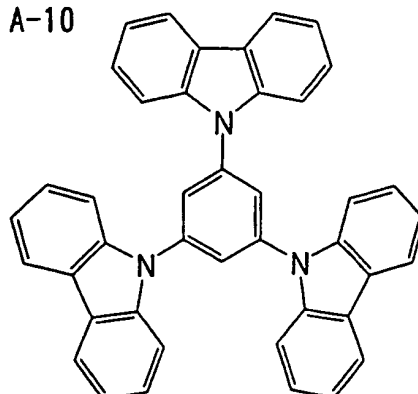


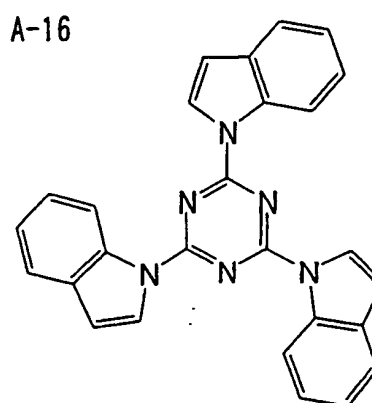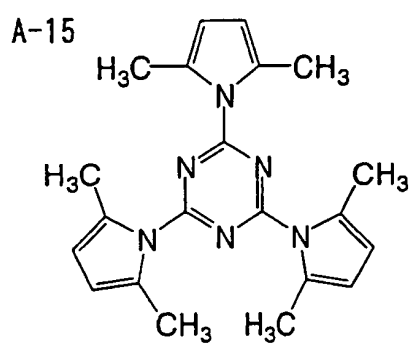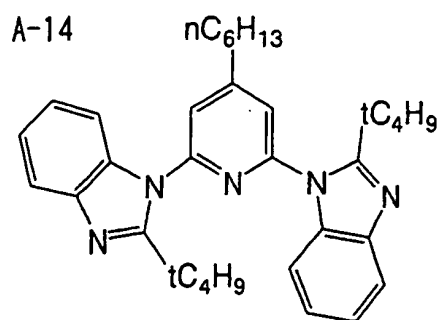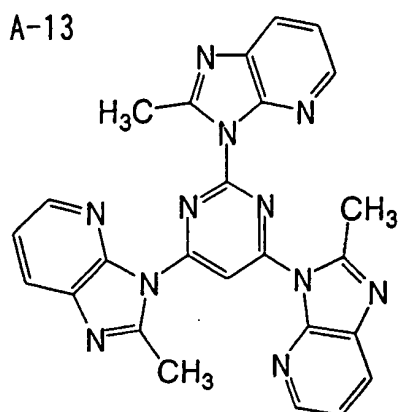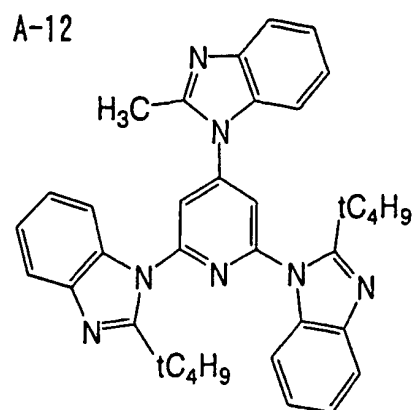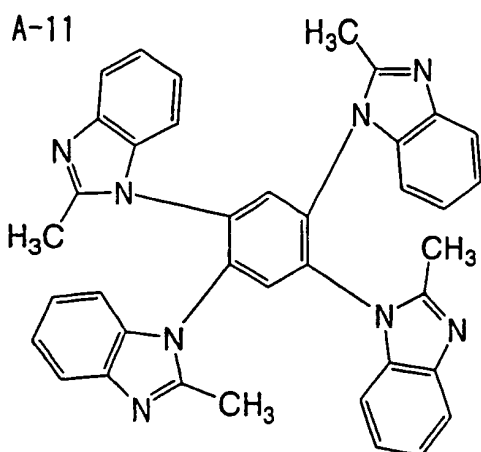


A-17

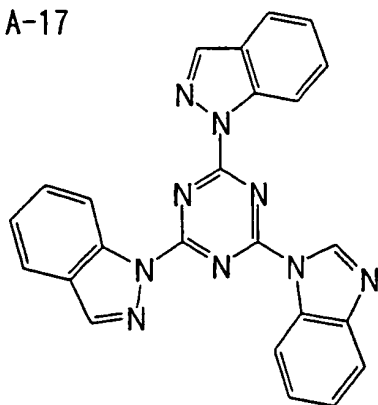


A-18

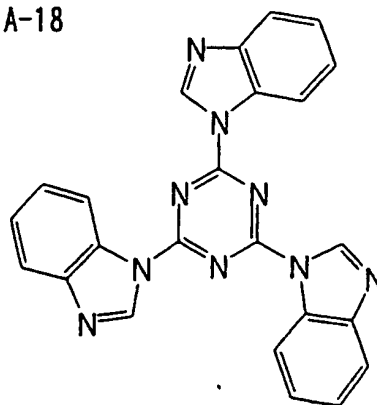


A-19

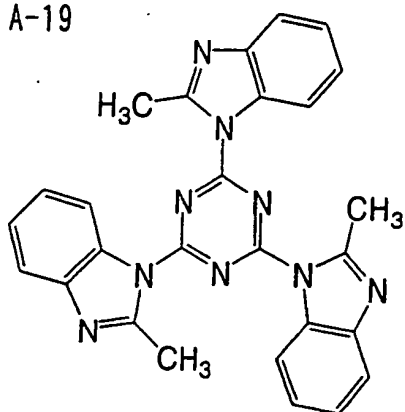


A-20

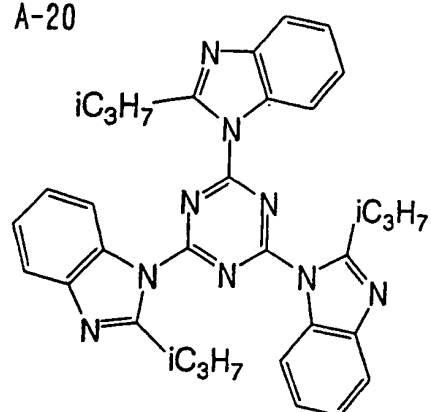


A-21

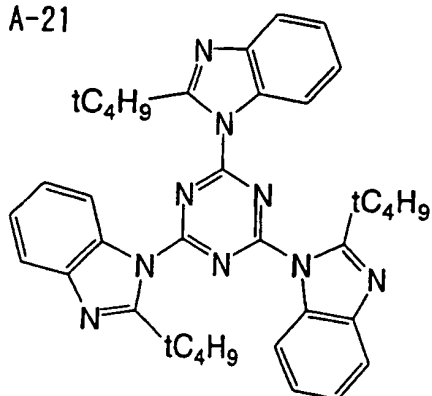


A-22

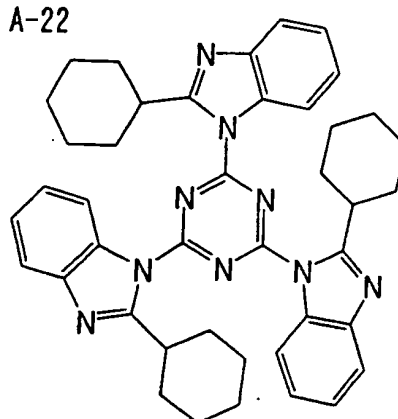


A-23

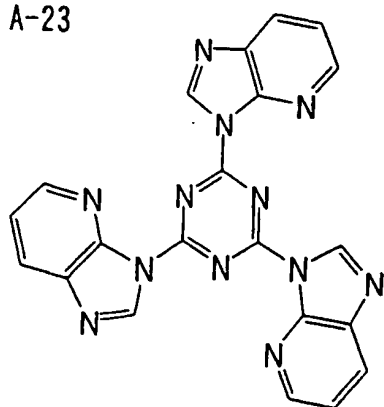


A-24

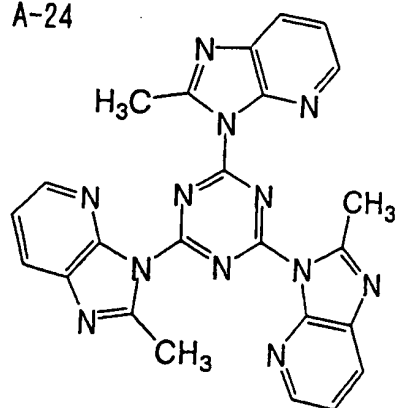


A-25

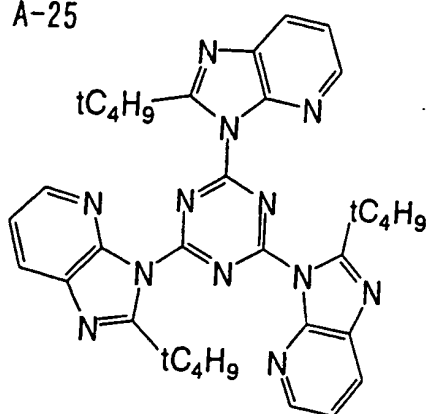


A-26

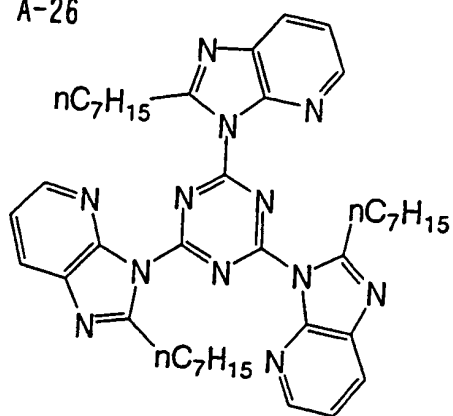


A-27

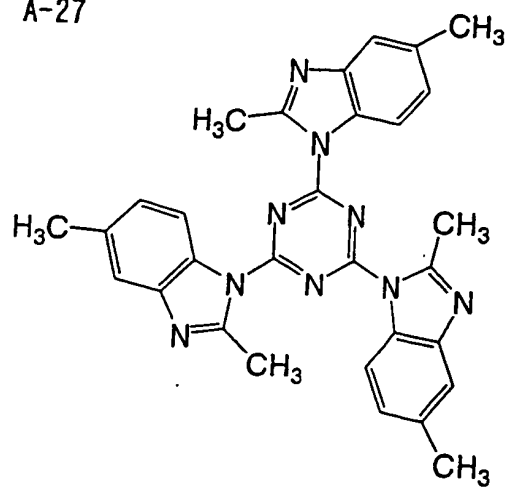


A-28

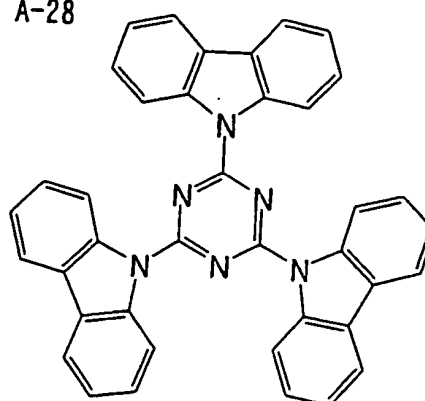


A-29

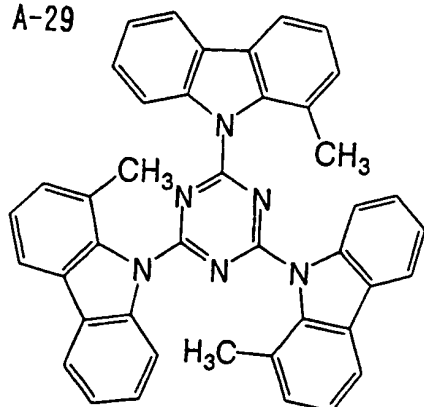


A-30

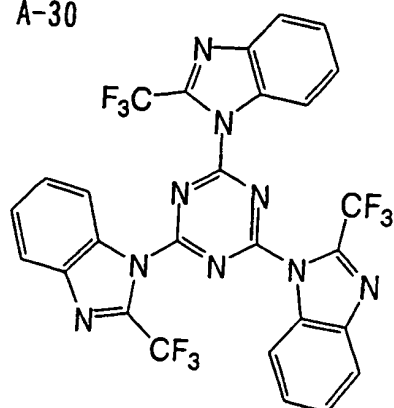


A-31

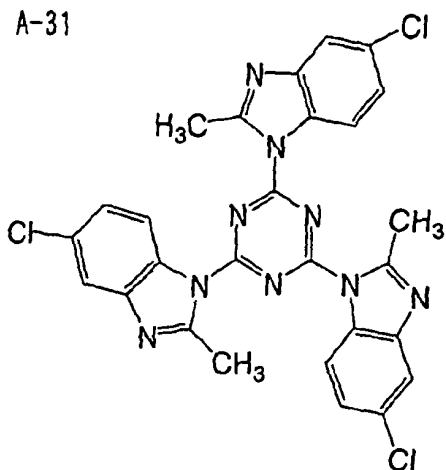

A-32

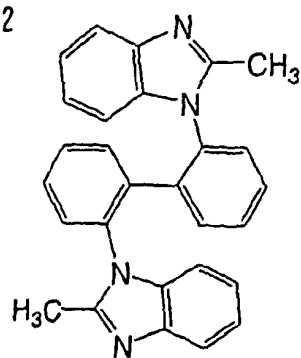


A-33

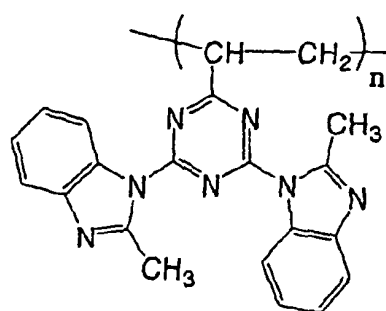


Weight average molecular weight: 14100
(converted into polystyrene)


B-1

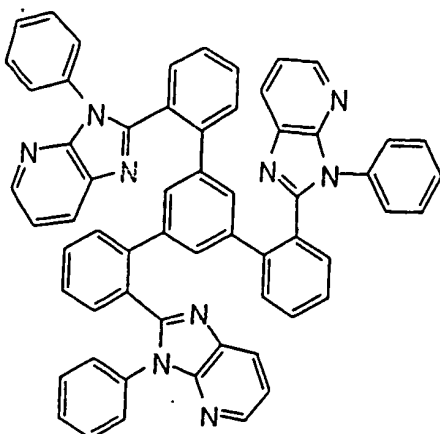


B-4

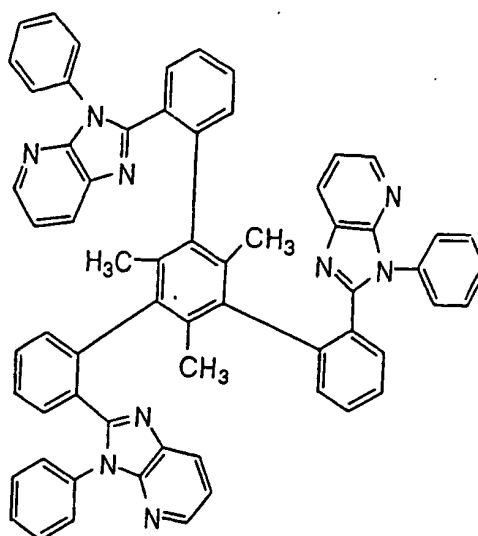


B-2

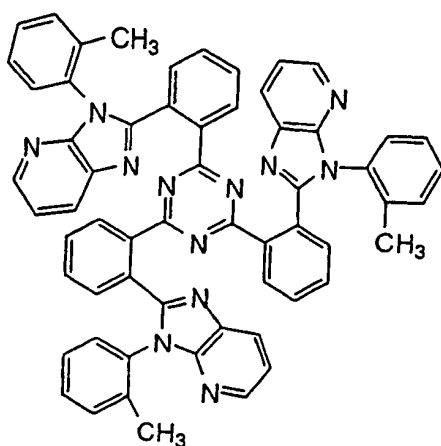


B-5

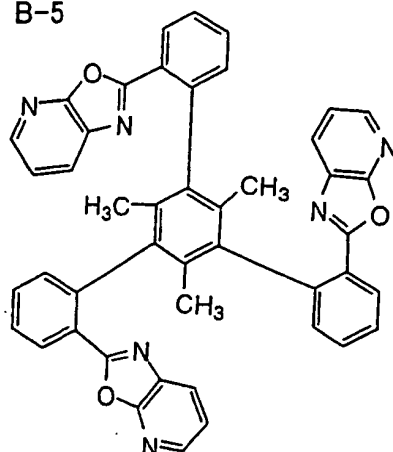


B-3

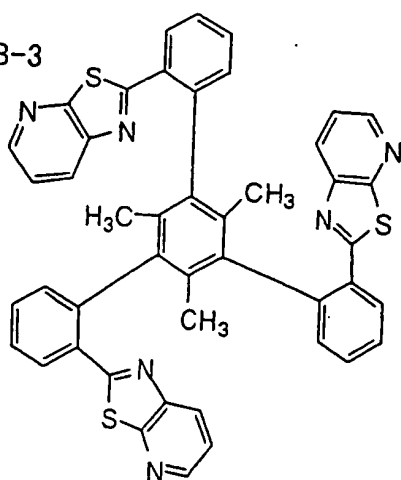


B-6

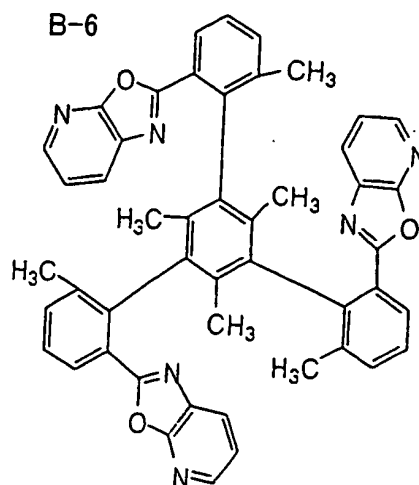


B-7

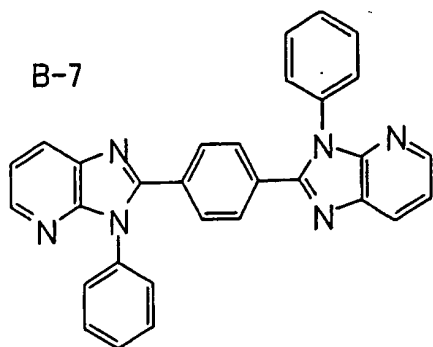


B-11

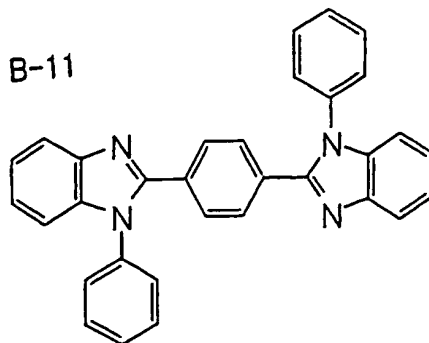


B-8

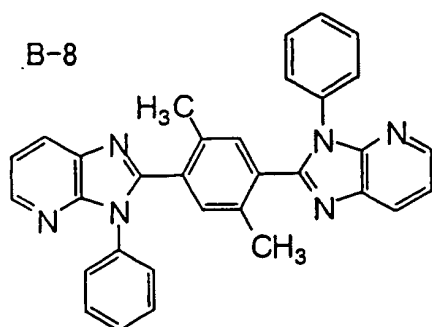


B-12

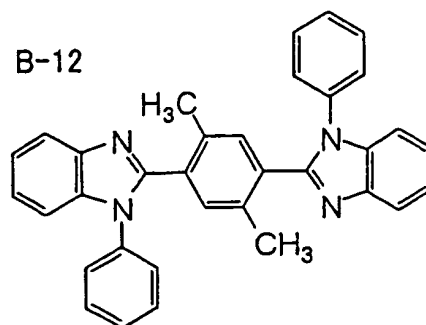


B-9

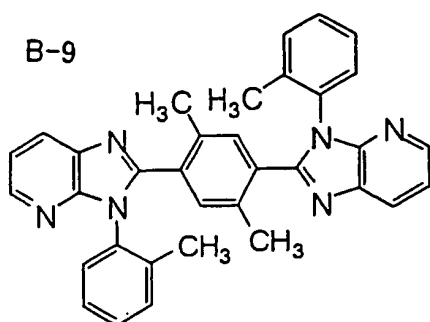


B-13

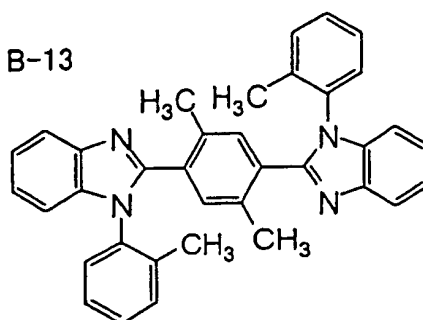


B-10

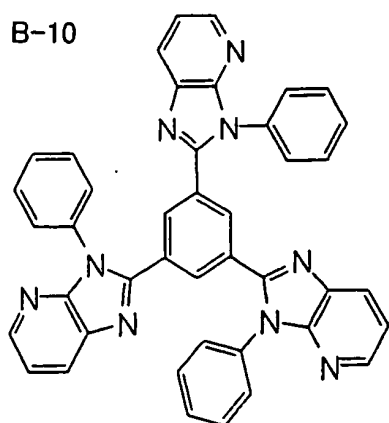


B-14

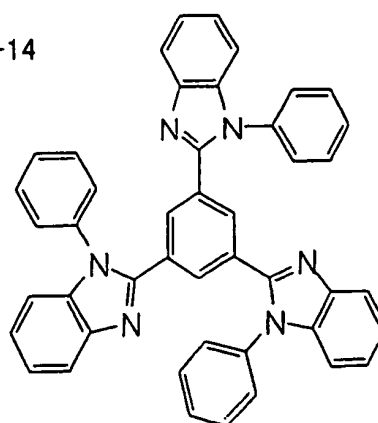


B-15

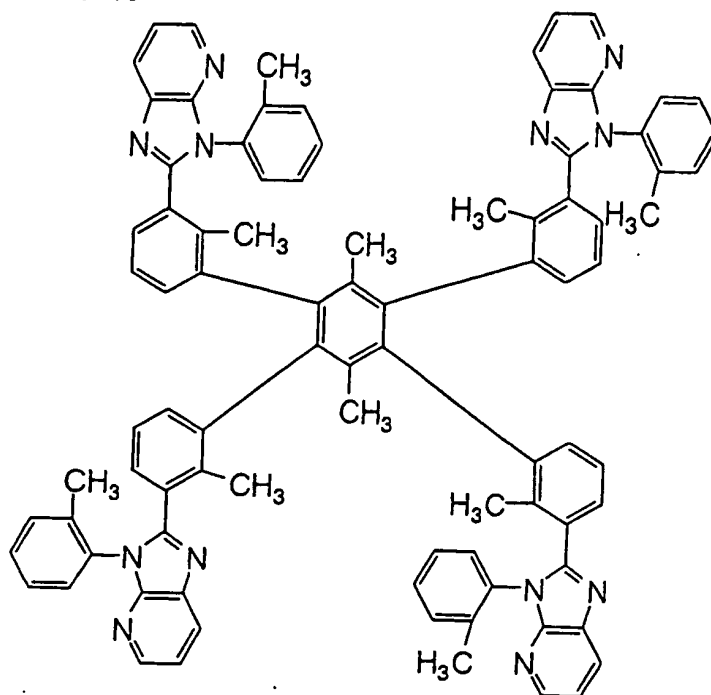


B-16

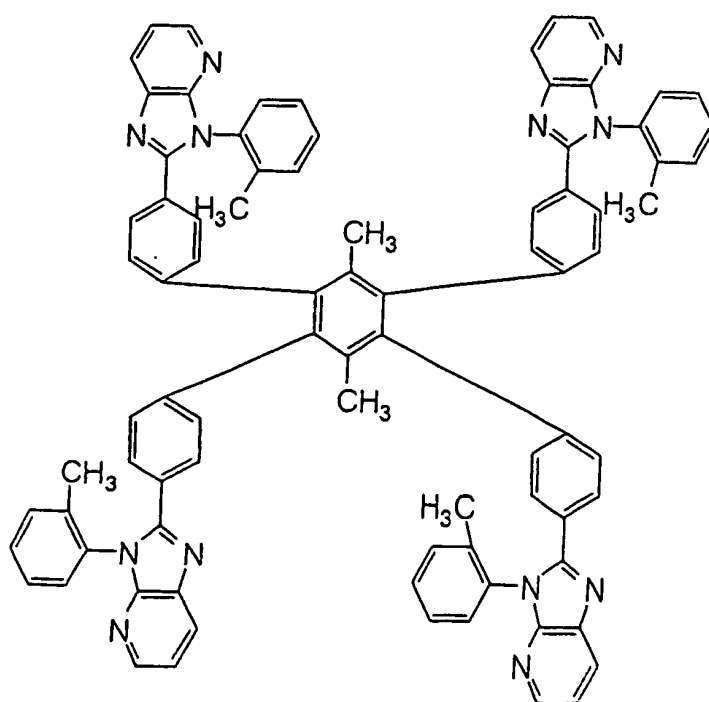


B-17

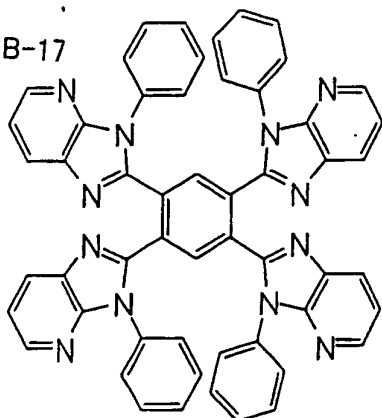


B-20

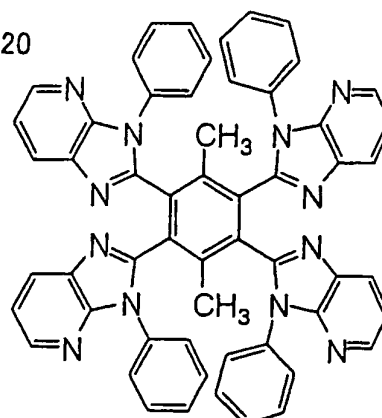


B-18

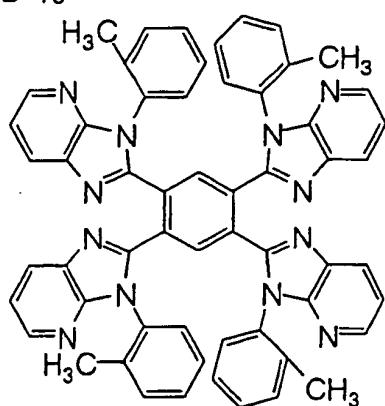


B-21

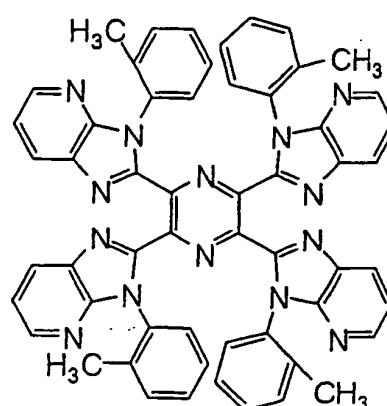


B-19

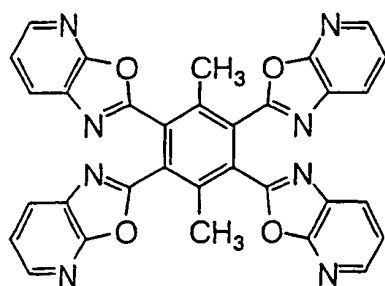


B-22

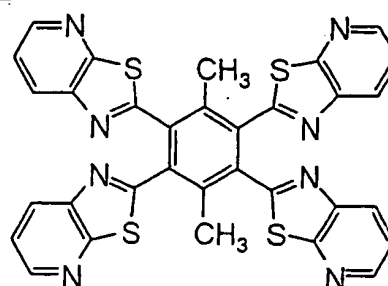


B-23

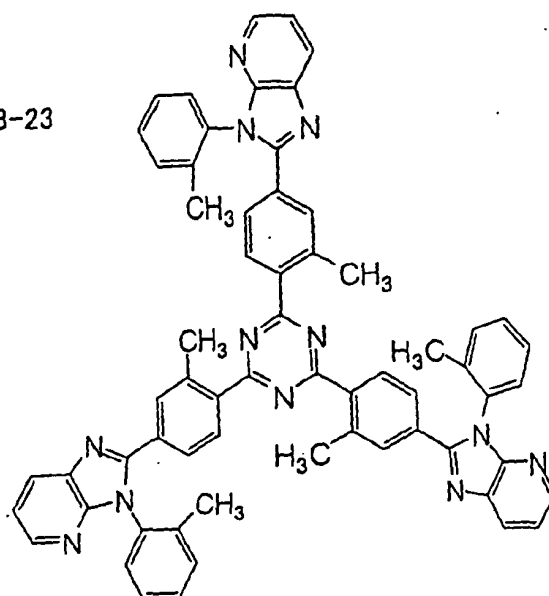


B-24

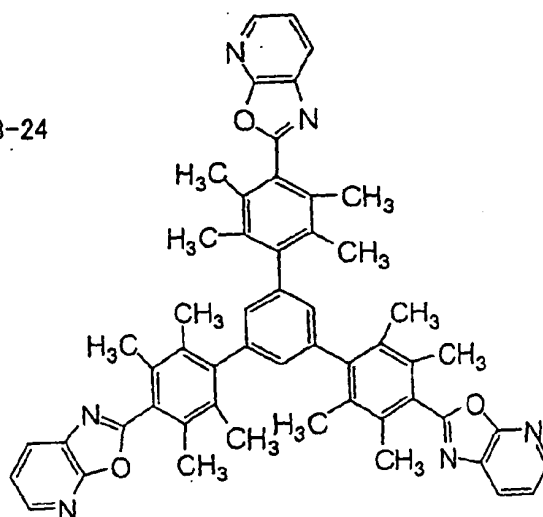


B-25

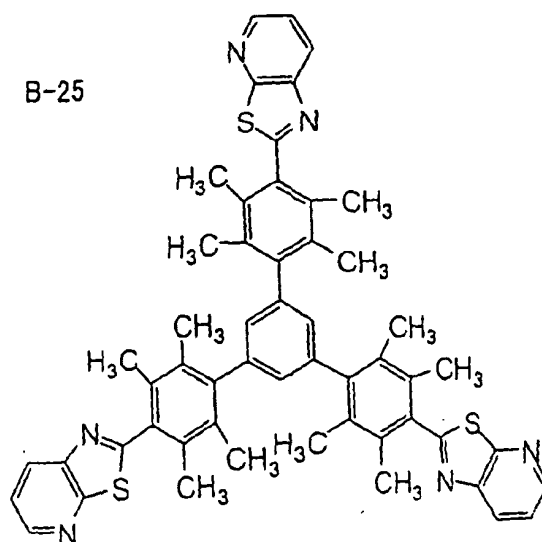


B-26

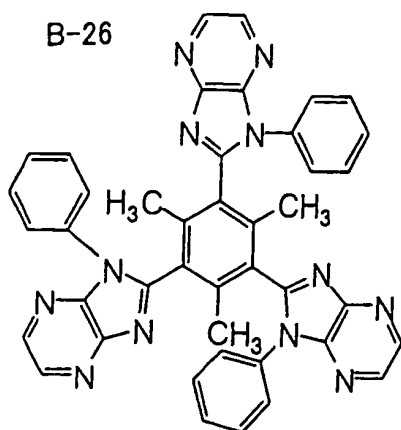


B-28

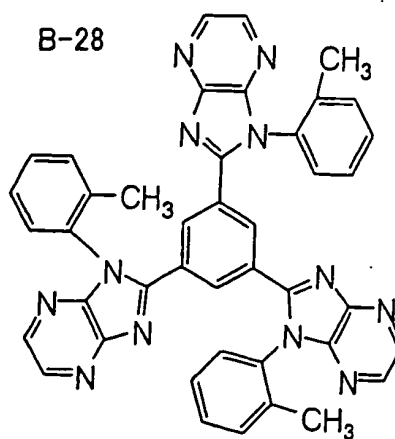


B-27

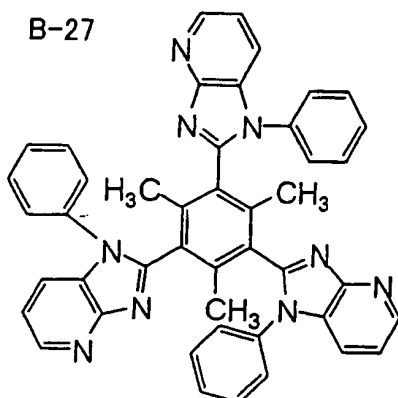


B-29

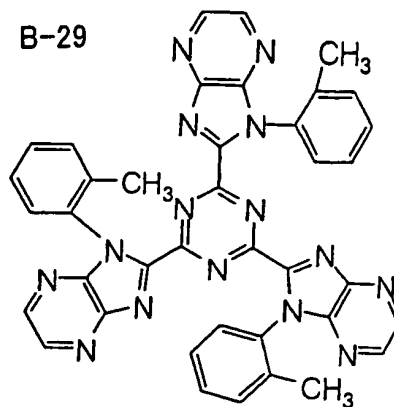


B-30

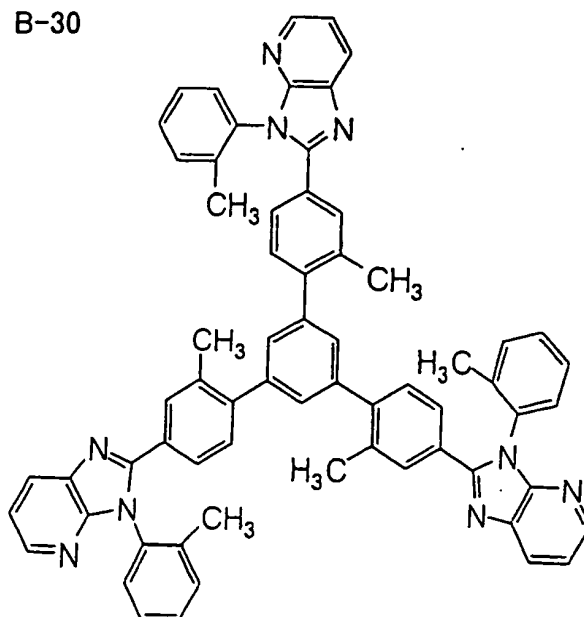


B-31

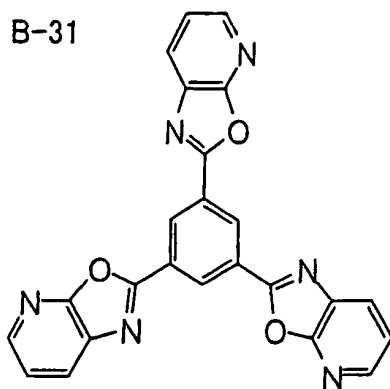


B-35

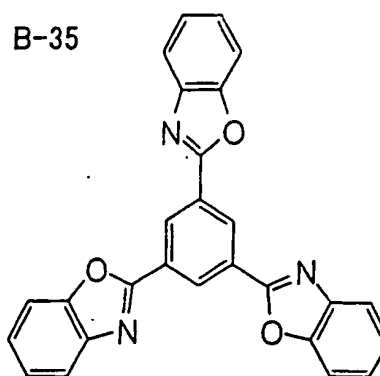


B-32

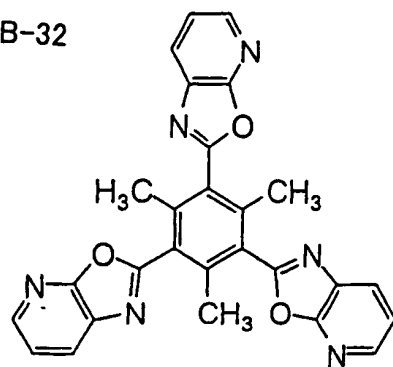


B-36

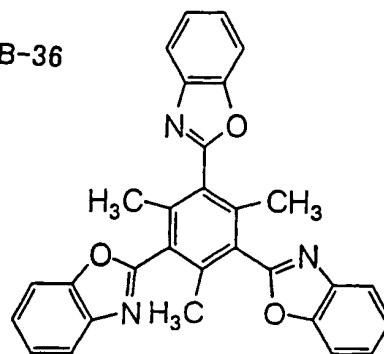


B-33

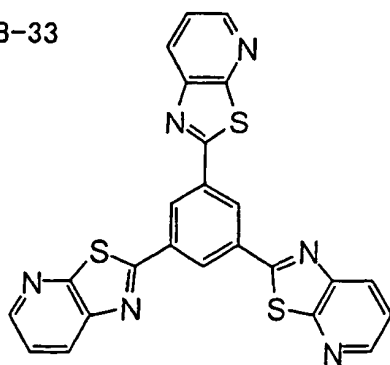


B-37

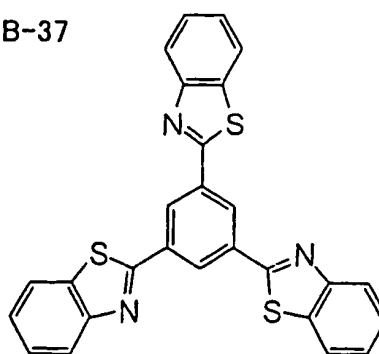


B-34

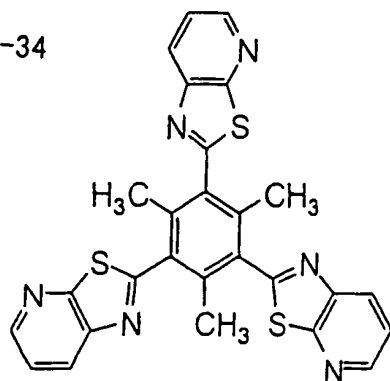


B-38

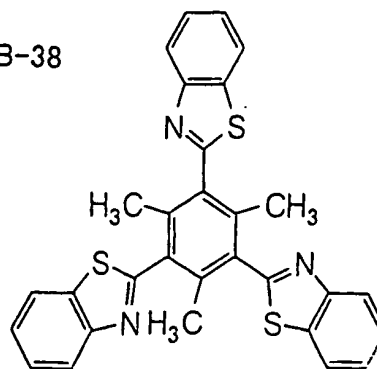


B-39

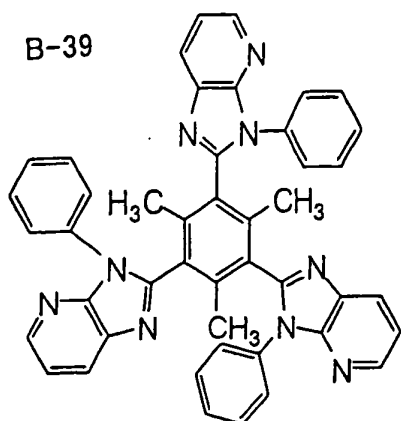


B-43

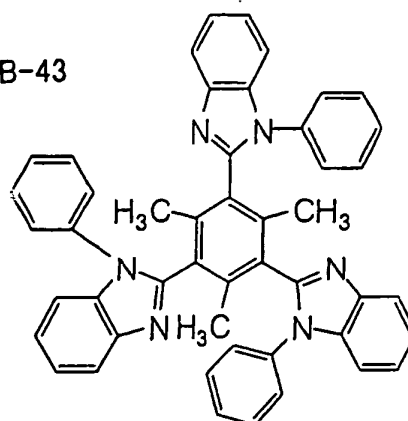


B-40

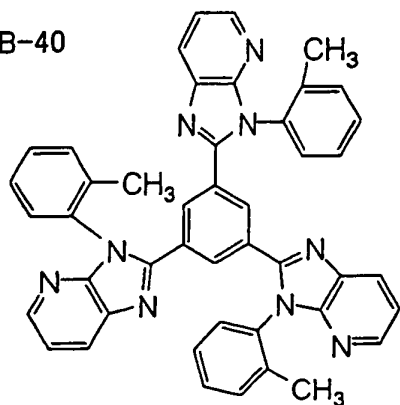


B-44

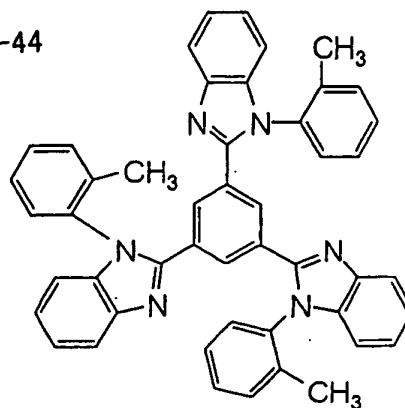


B-41

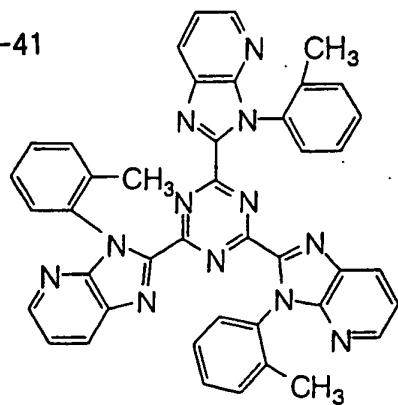


B-45

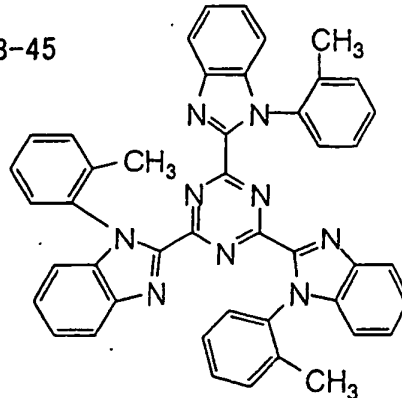


B-42

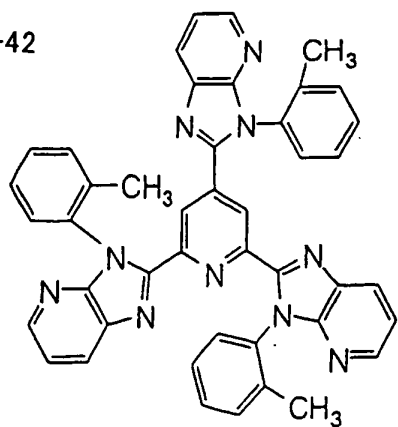


B-46

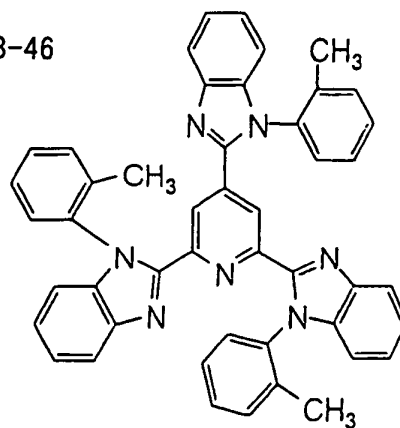


B-47

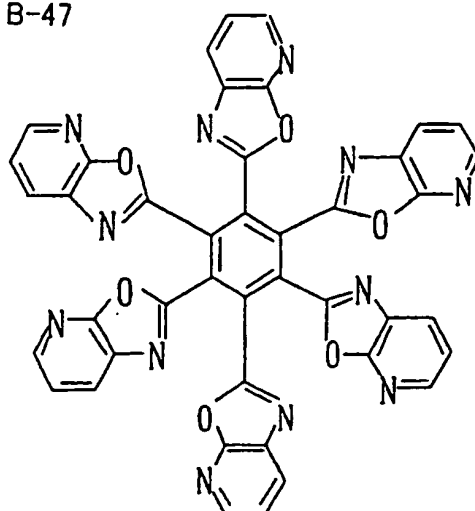


B-48

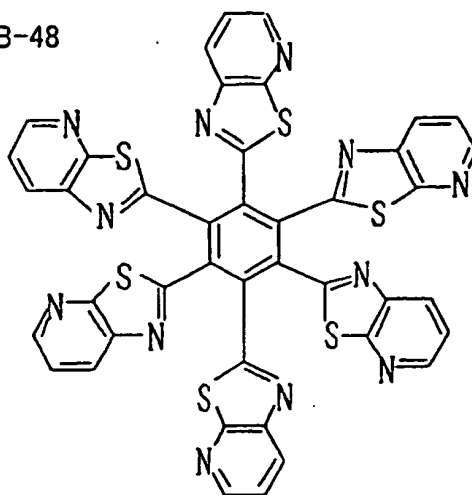


B-49

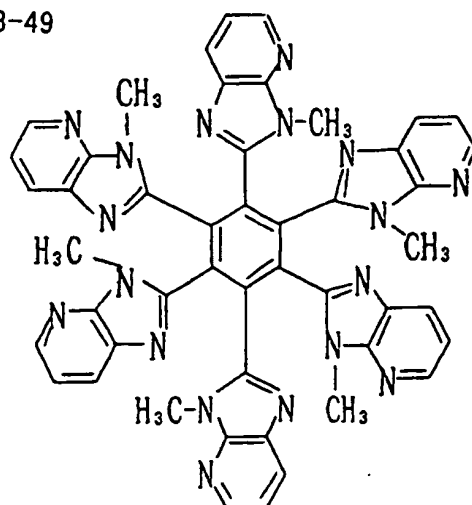


B-50

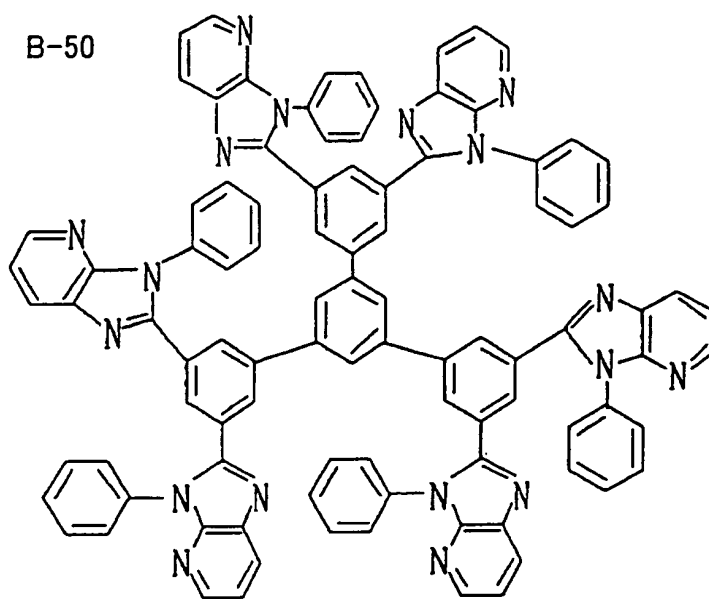


B-51

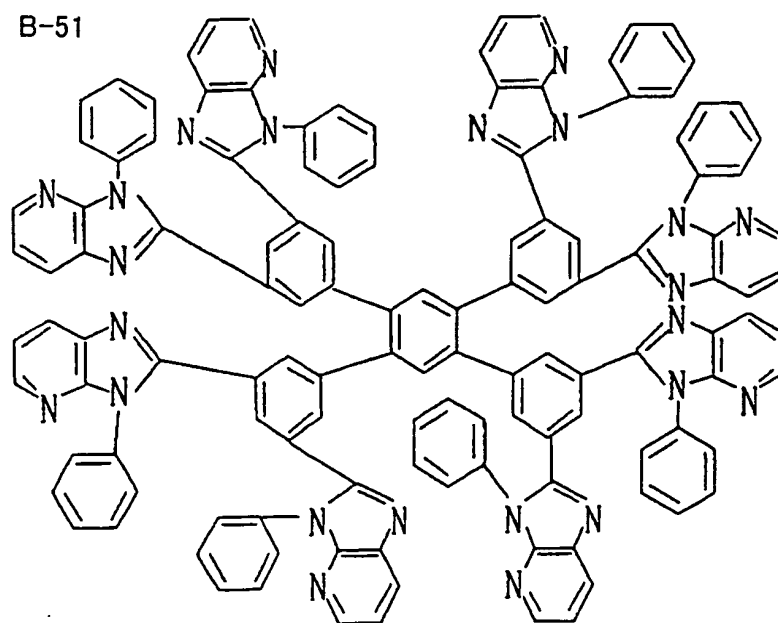


B-52

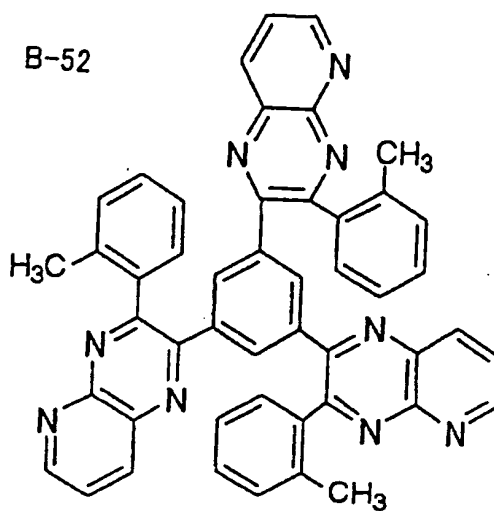


B-53

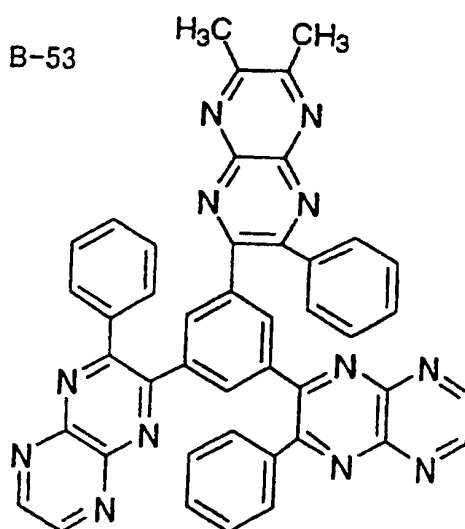

B-54

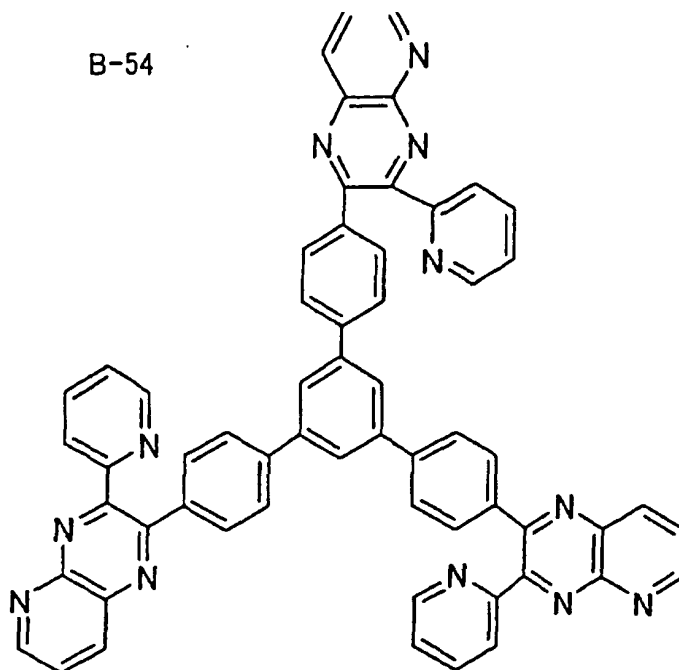


B-55

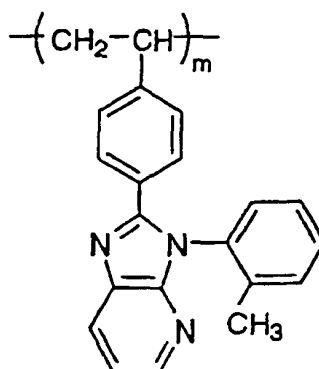


Weight average molecular weight: 21,000
(converted into polystyrene)


B-56

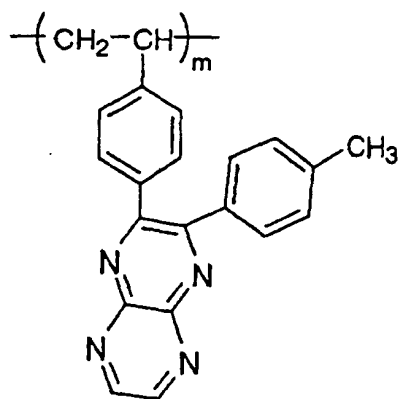

Weight average molecular weight: 14,000
(converted into polystyrene)

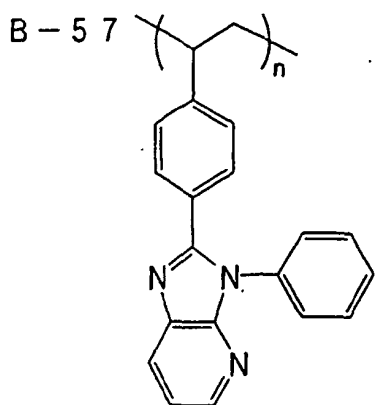


Mw: 84,000

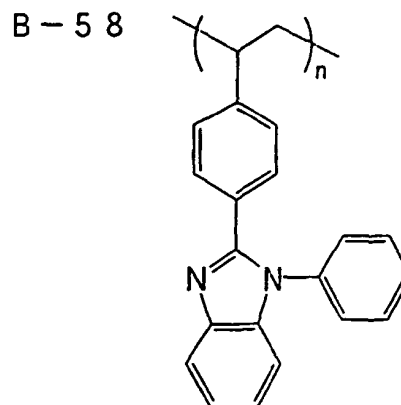


Mw: 100,000

(converted into polystyrene) (converted into polystyrene)

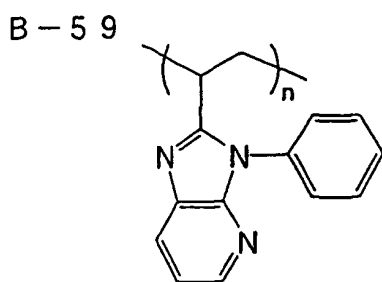


Mw: 71,000

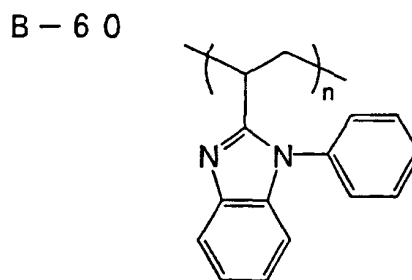

Mw: 14,000

(converted into polystyrene) (converted into polystyrene)


B-61



Mw: 32,000









(converted into polystyrene)








B-62


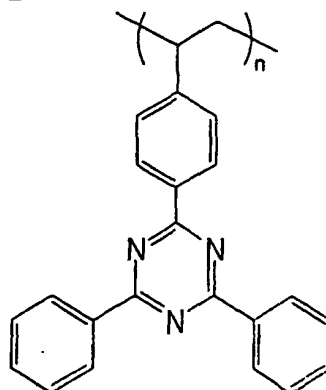


Mw: 110,000


(converted into polystyrene)



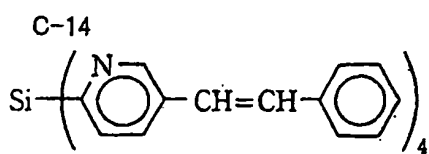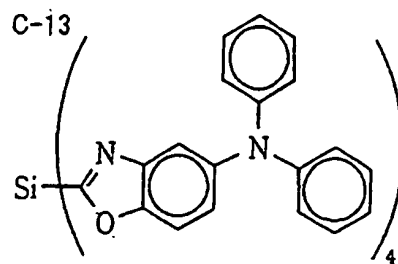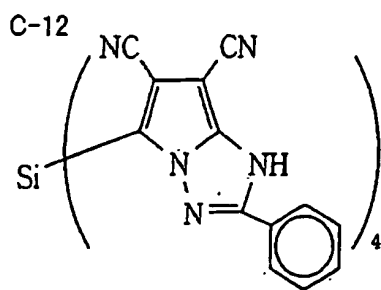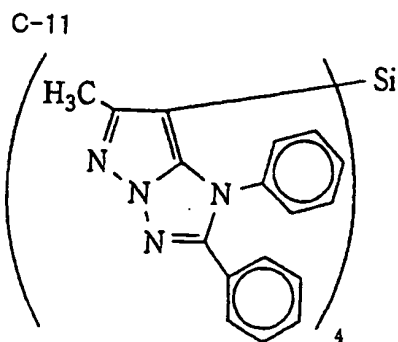


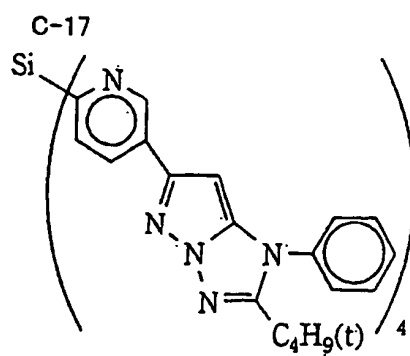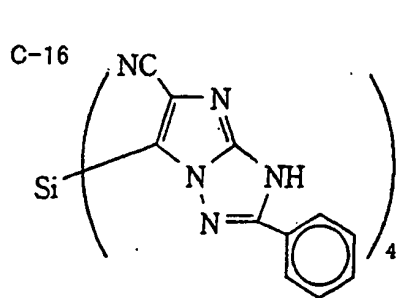


C-18




C-19




C-20




C-21




C-22

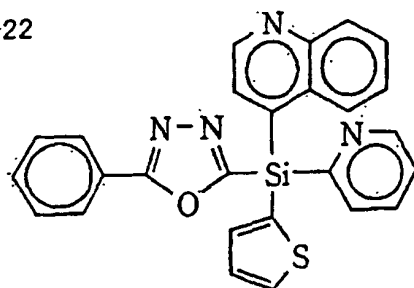

C-23




C-24

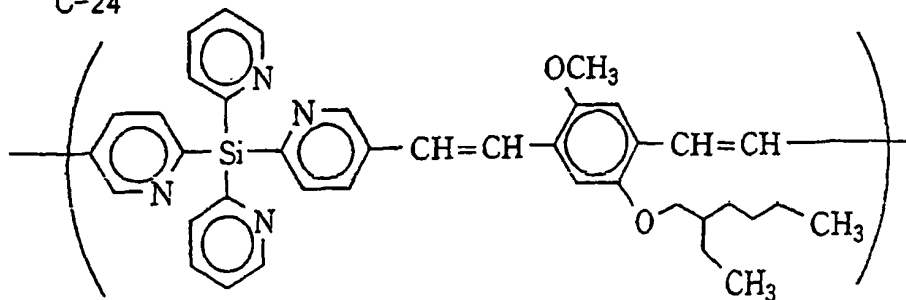


Weight average molecular weight: 12100
(converted into polystyrene)

C-25

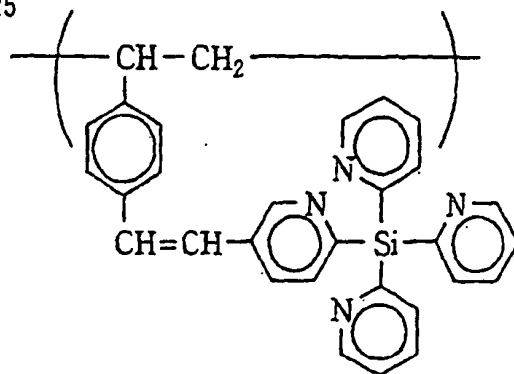


Weight average molecular weight: 3200
(converted into polystyrene)

C-26

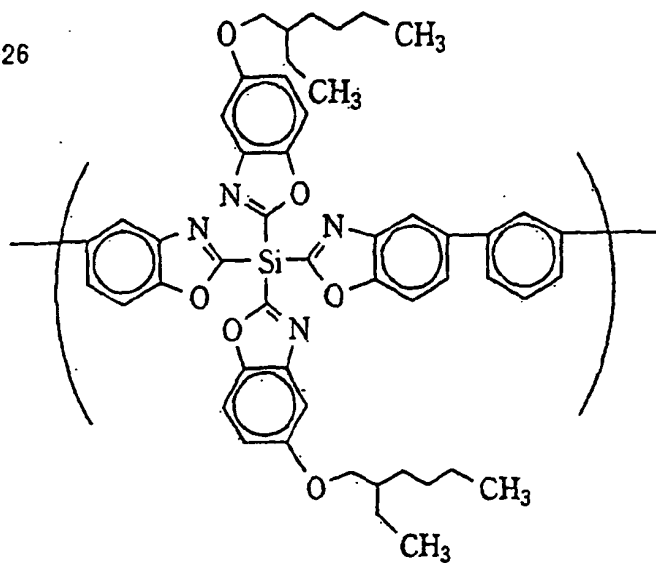


Weight average molecular weight: 4200
(converted into polystyrene)


C-27

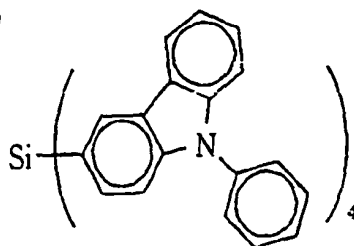


C-28

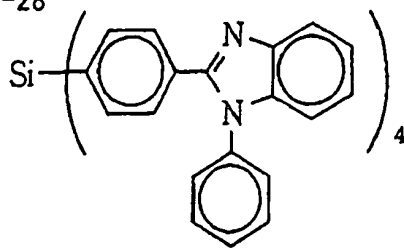


C-29





C-30

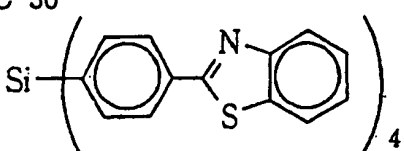


C-31

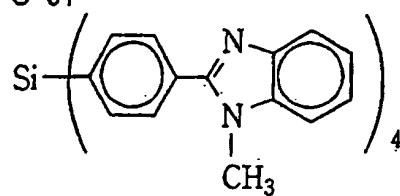


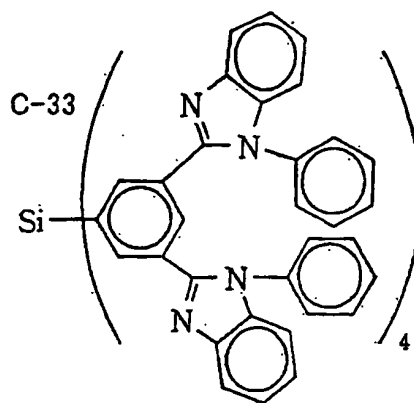


C-34




C-35

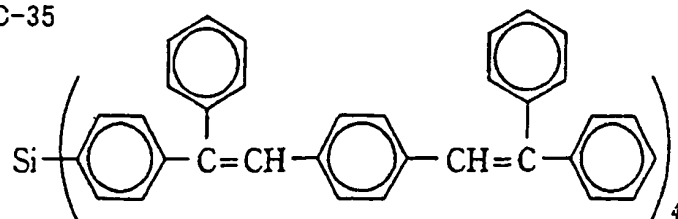


C-36




C-37

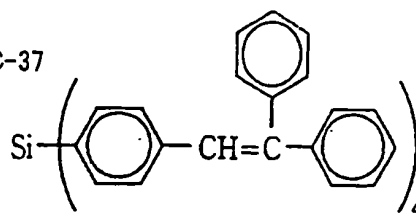


C-38

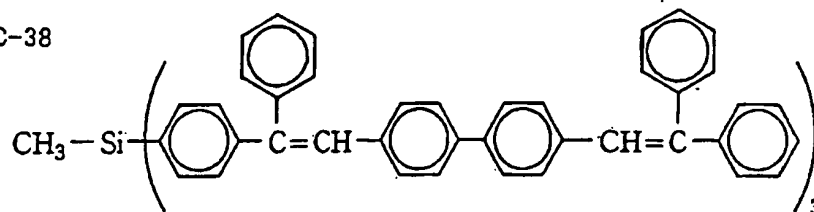


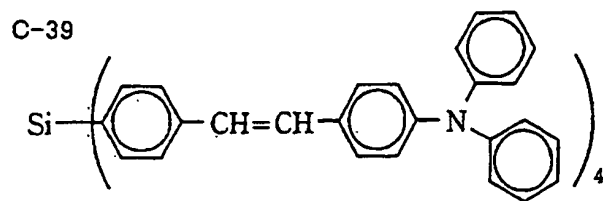


10



15

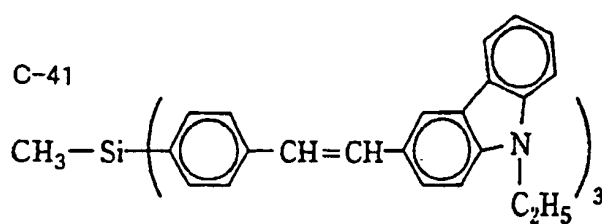


25

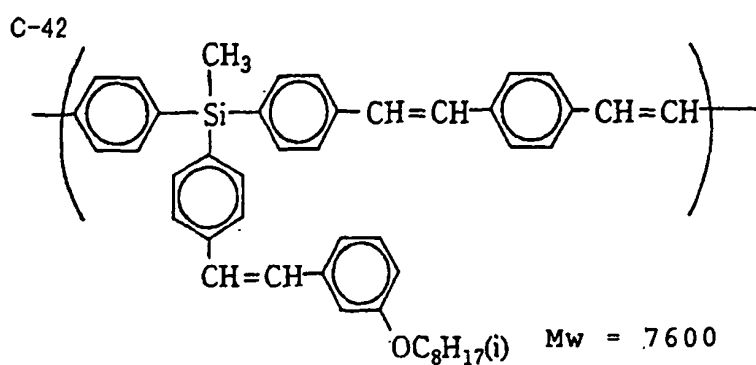

35

40

(converted into polystyrene)

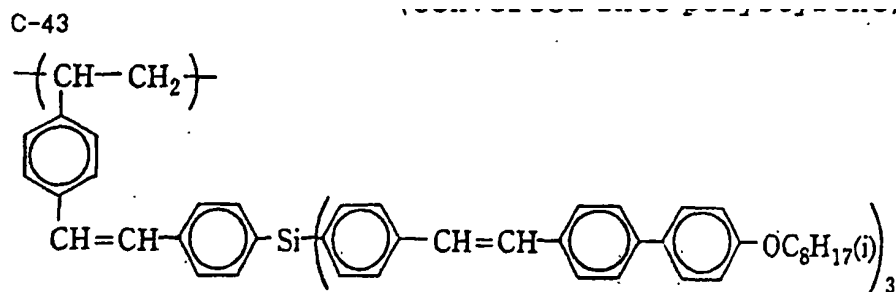


45

50


Mw = 13700

(converted into polystyrene)


C-44




C-45




C-46




C-47








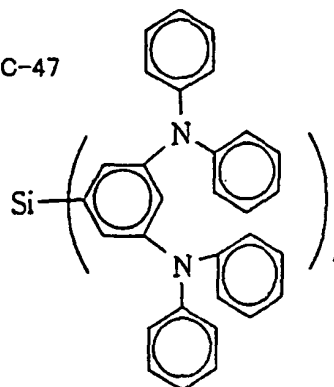





C-48

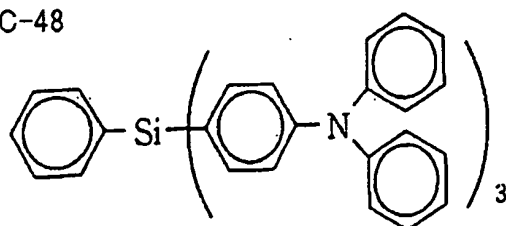

C-49

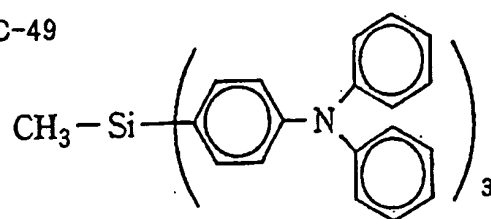


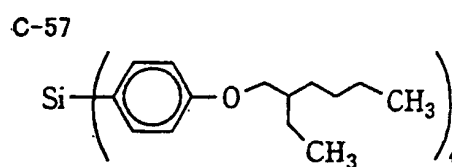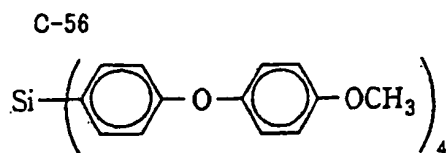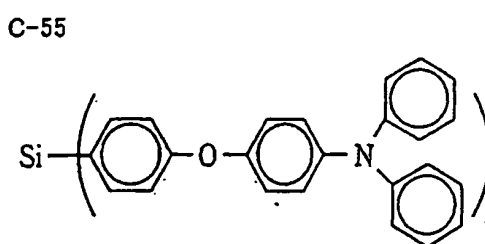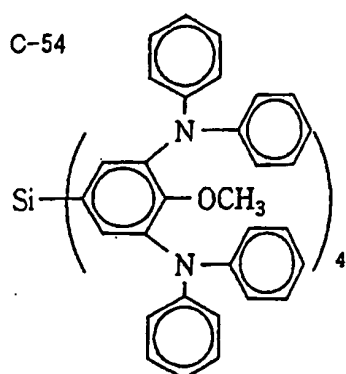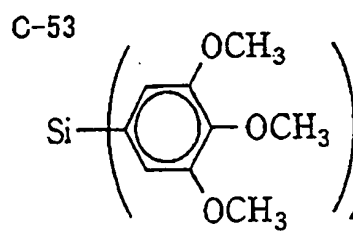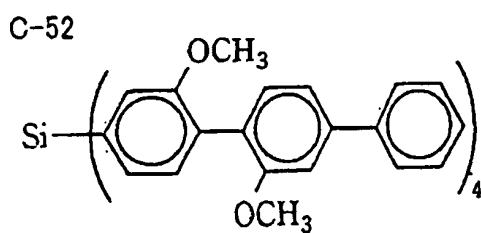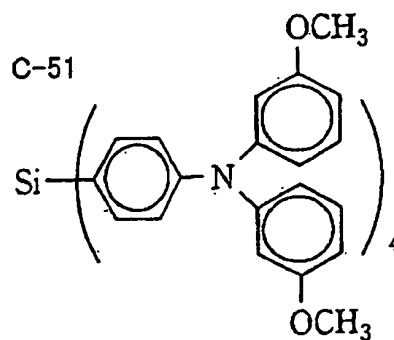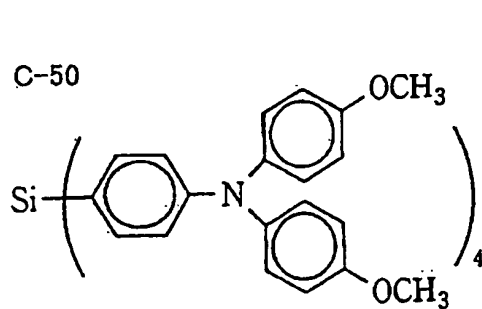

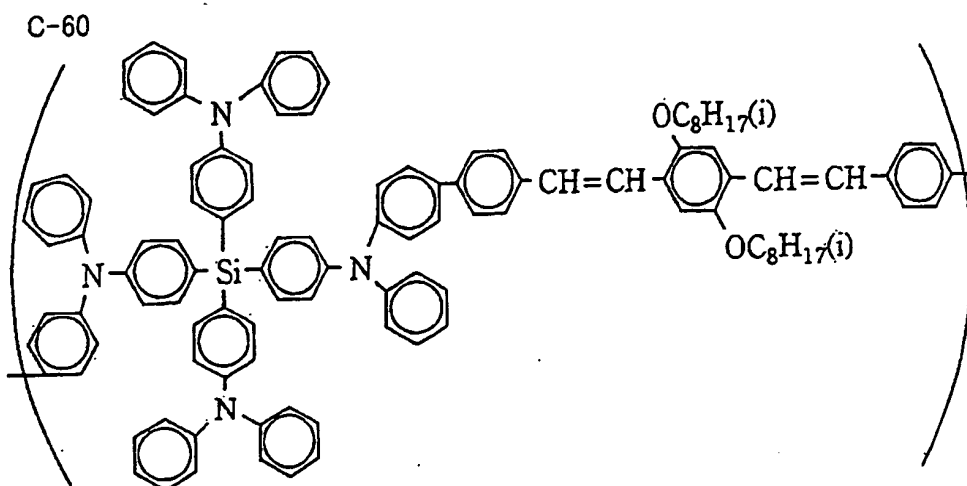
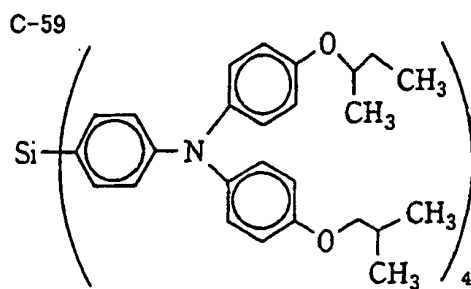
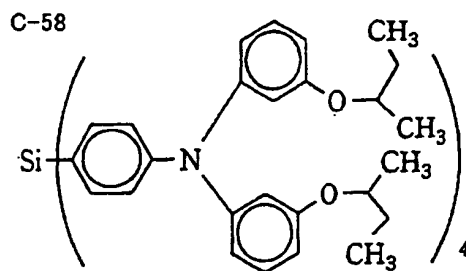


Mw = 8800


(converted into polystyrene)

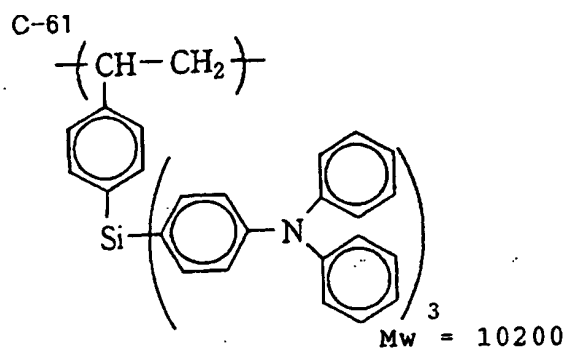


(converted into polystyrene)

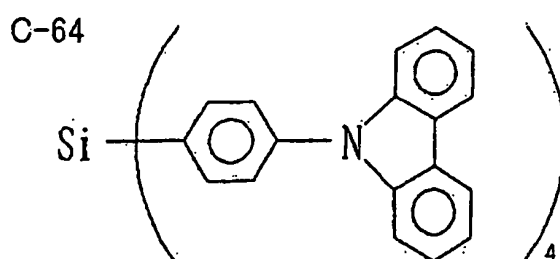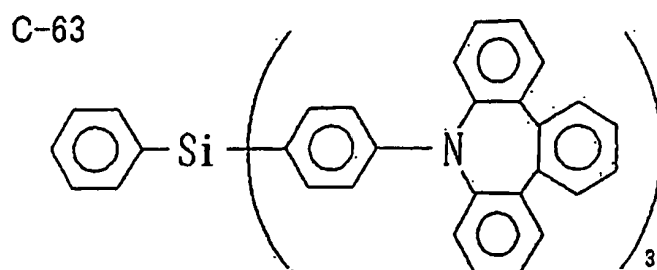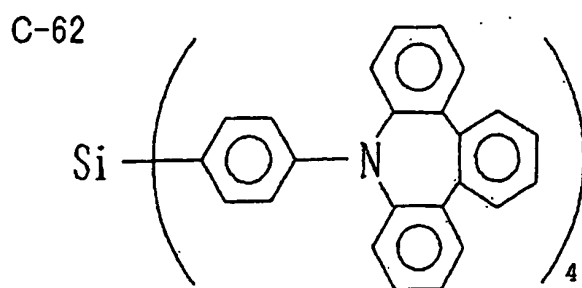


C-65

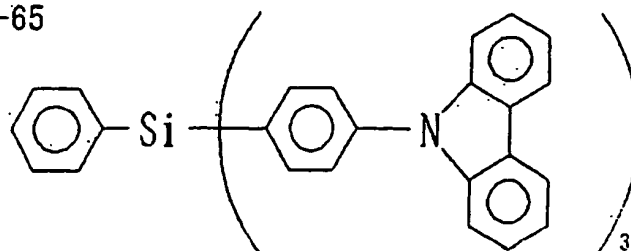


C-66

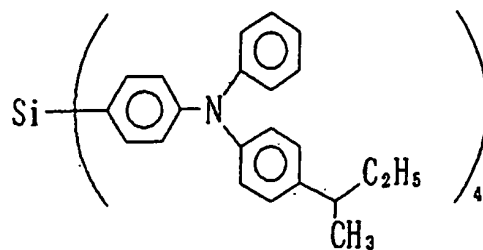


C-67

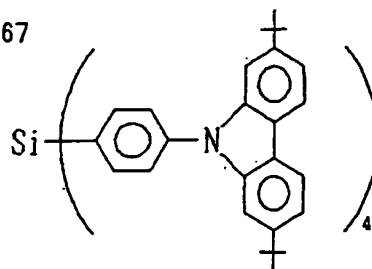


C-68

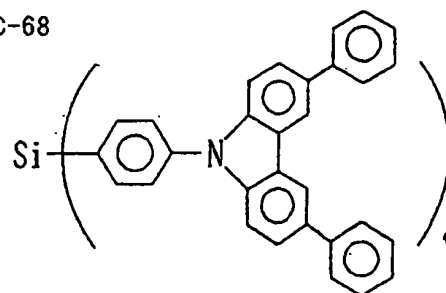


C-69




C-70

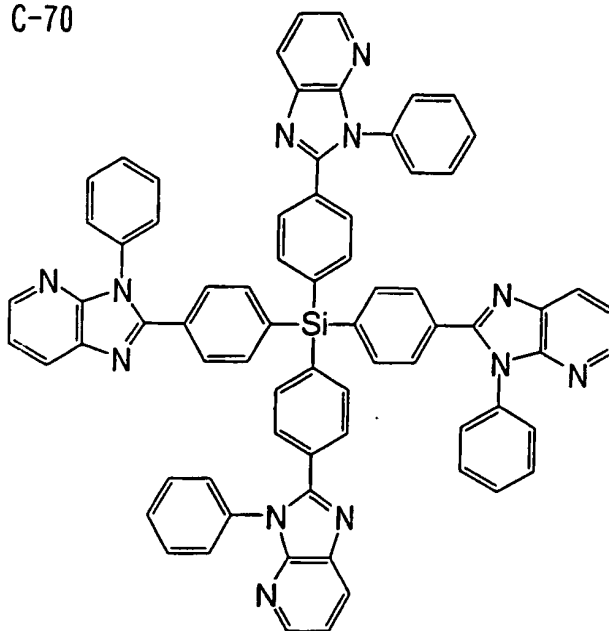


C-71

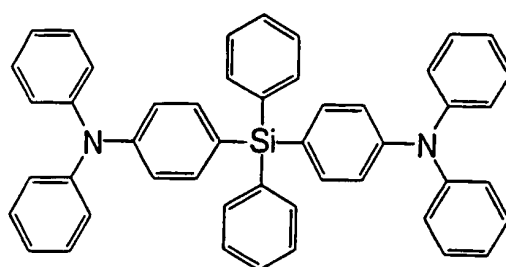


C-72

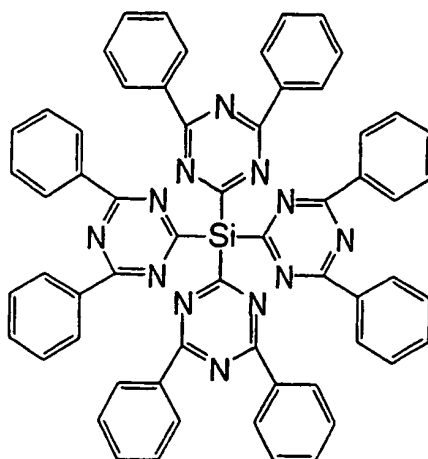


D-1




D-2




D-3




D-4




D-5




D-6










D-7




D-8




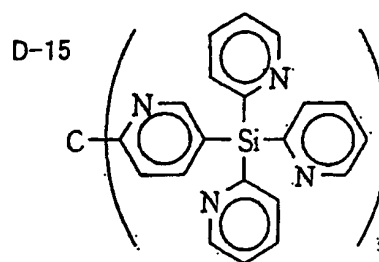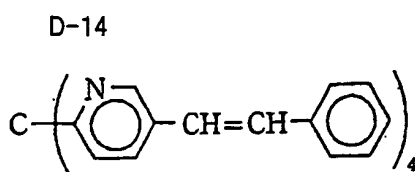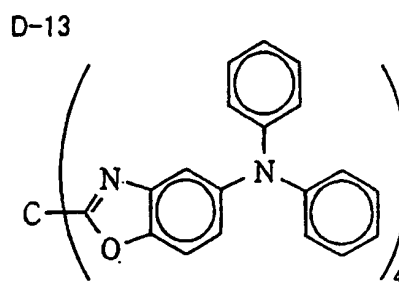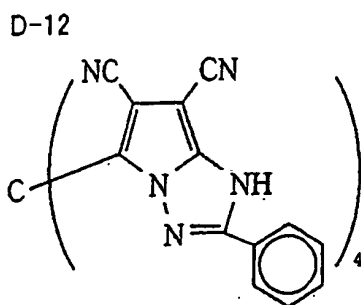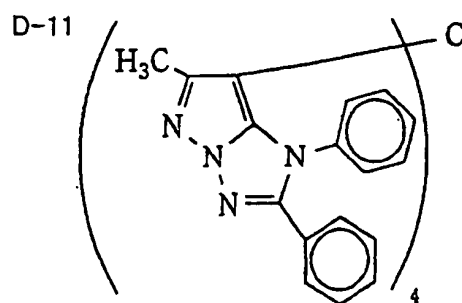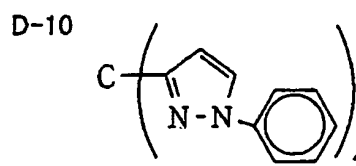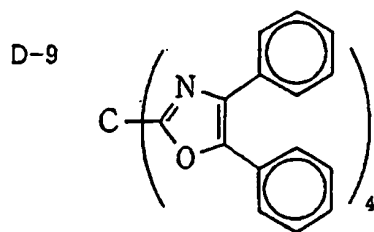


D-16

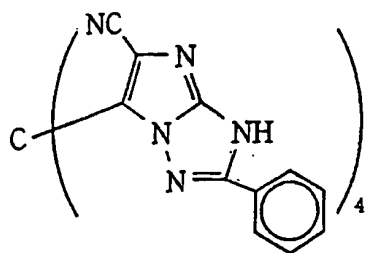


D-17

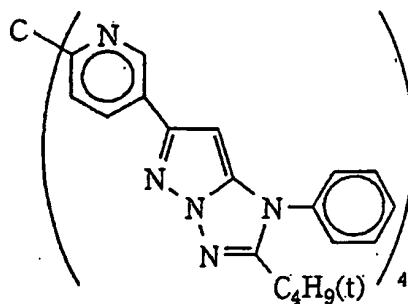


D-18




D-19




D-20




D-21




D-22

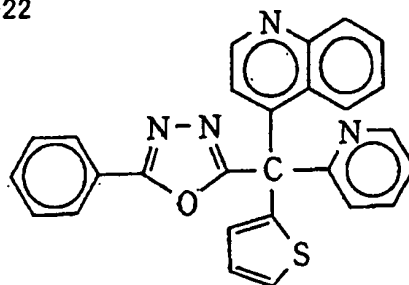

D-23




D-24

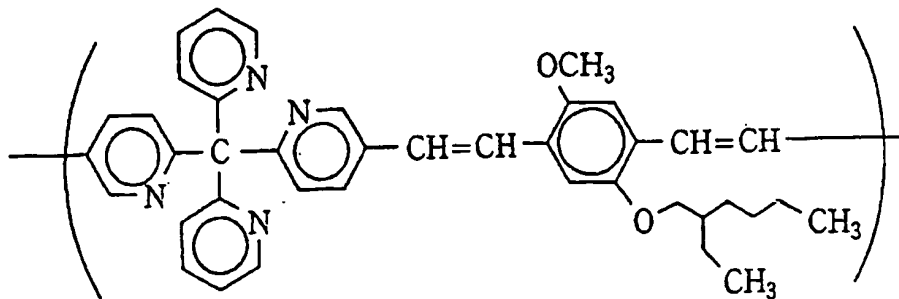

Mw = 12100

(converted into polystyrene)


D-25

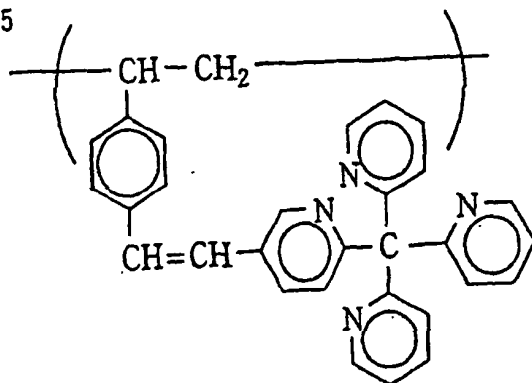

Mw = 3200

(converted into polystyrene)


D-26

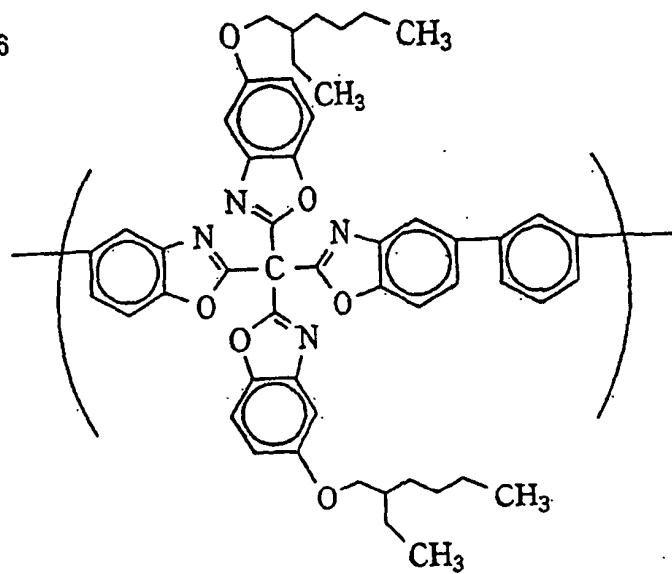


Mw = 4200

(converted into polystyrene)


D-27

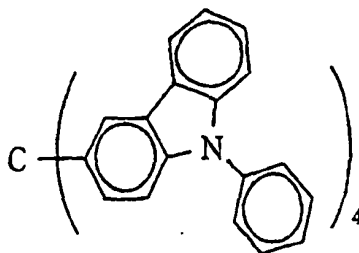


D-28

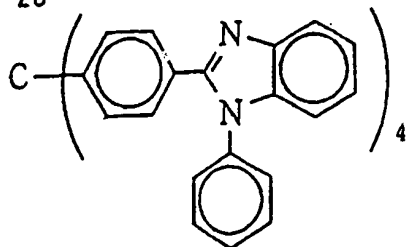


D-29

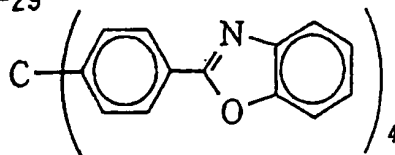


D-30

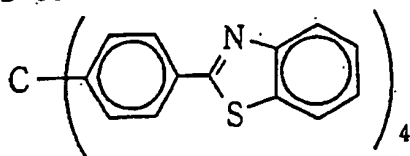


D-31

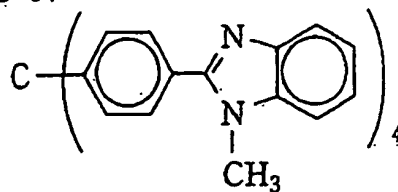


D-32




D-33

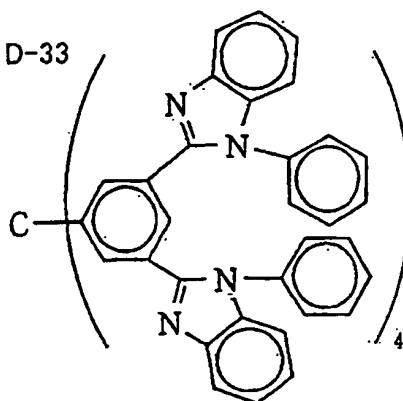


D-34




D-35

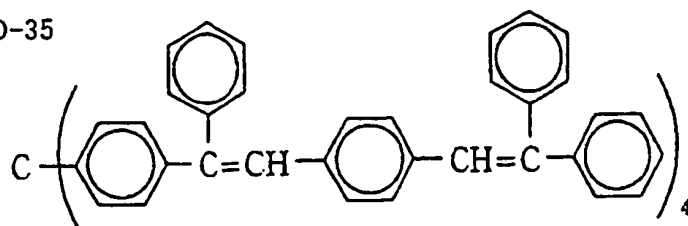


D-36




D-37

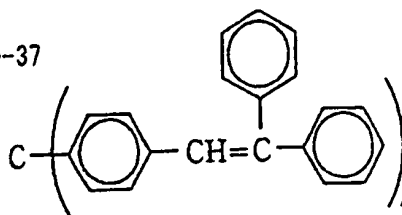


D-38

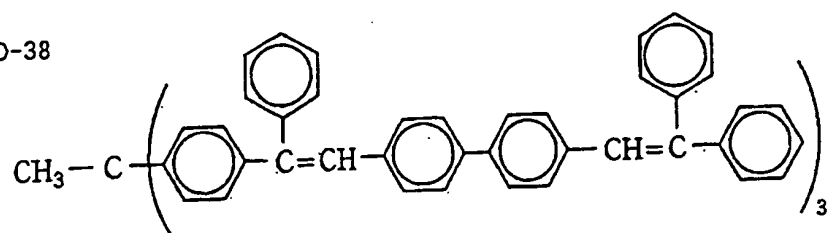


D-39

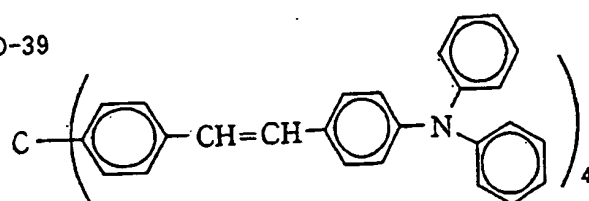


D-40



D-41

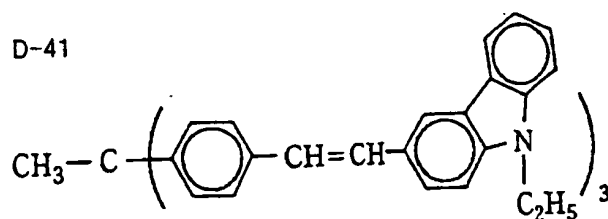


D-42

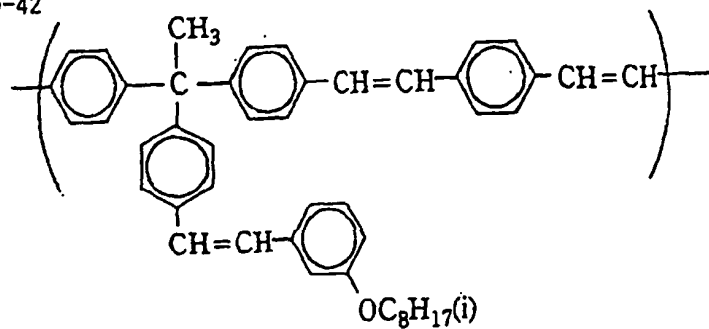

Mw = 7600

(converted into polystyrene)


D-43

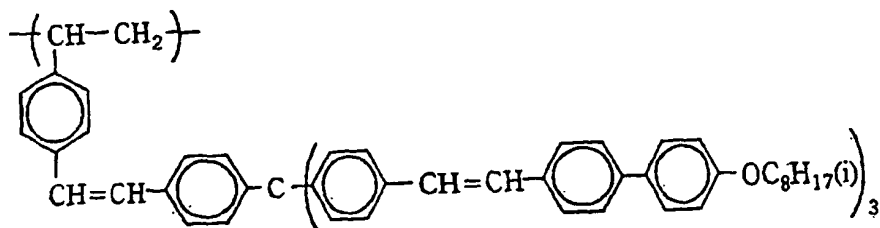


Mw = 13700

(converted into polystyrene)


D-44




D-45




D-46




D-47

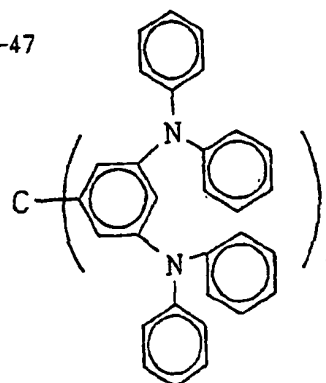


D-48

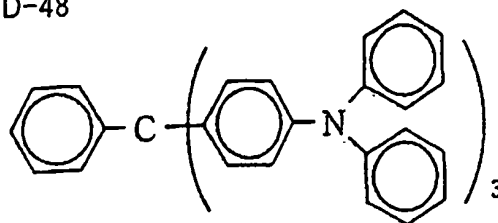


D-49

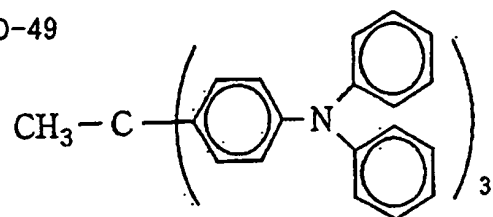


D-50

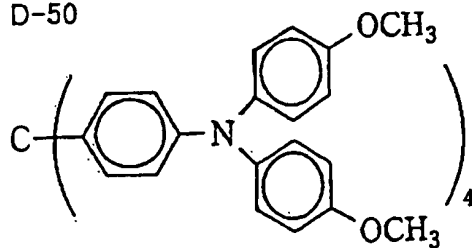


D-51

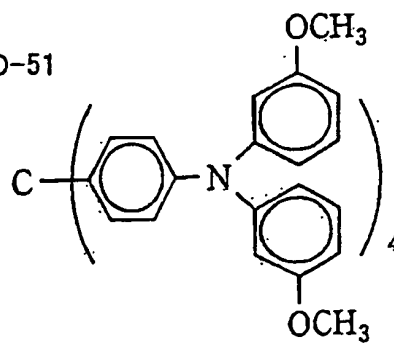


D-52

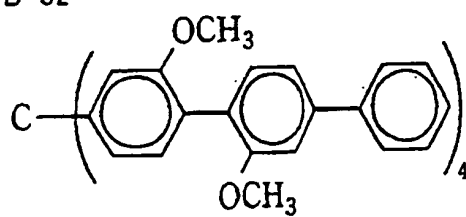


D-53






D-54

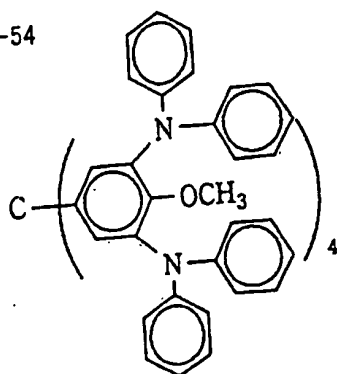


D-55

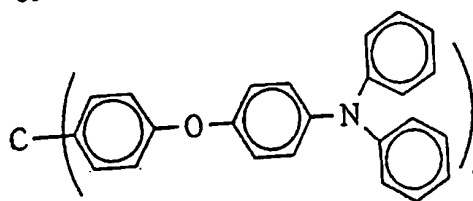

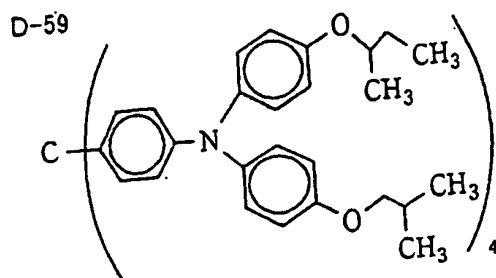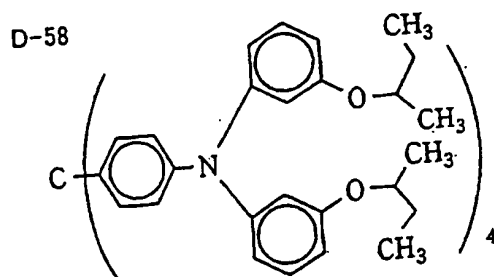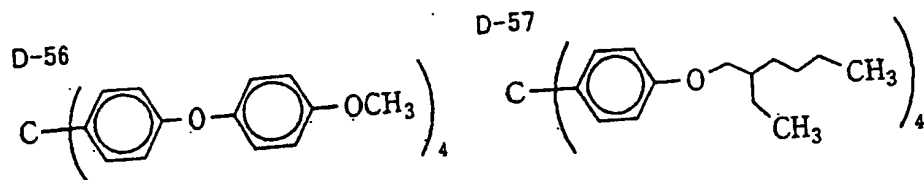


D-60

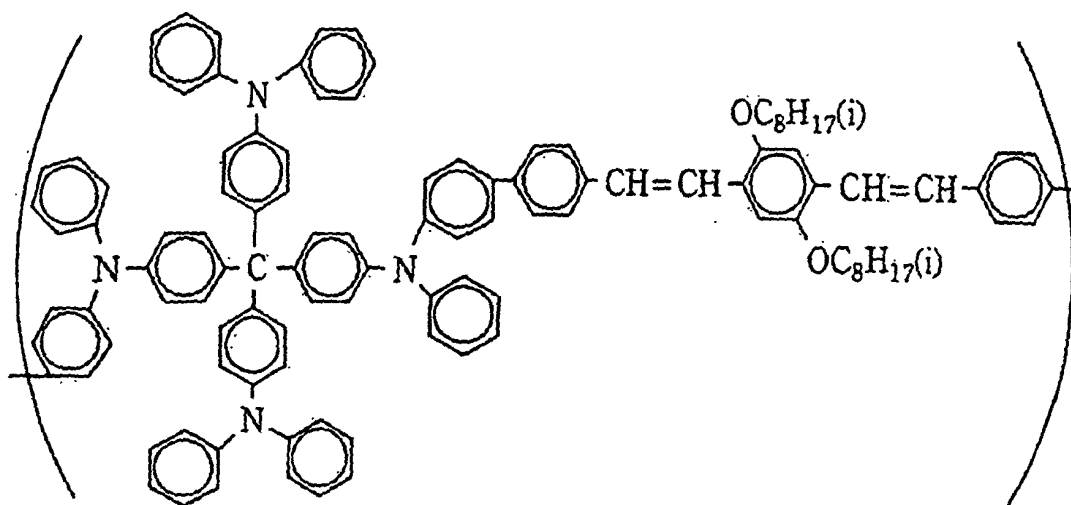

Mw = 8800

(converted into polystyrene)


D-61

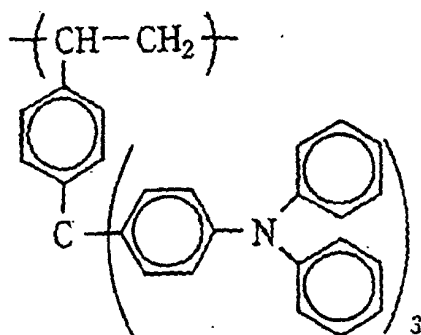


Mw = 10200

(converted into polystyrene)


D-62

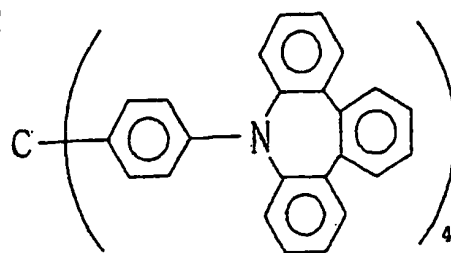


D-63

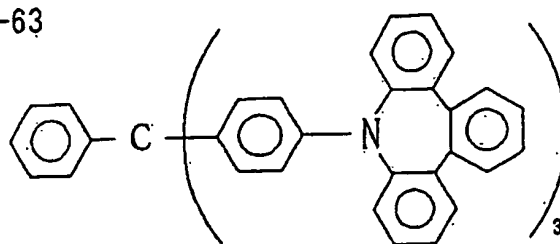


D-64

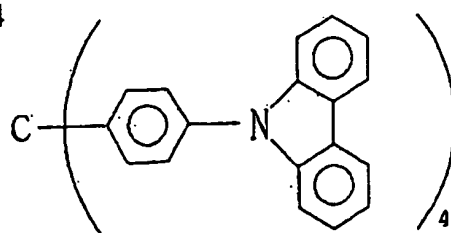


D-65

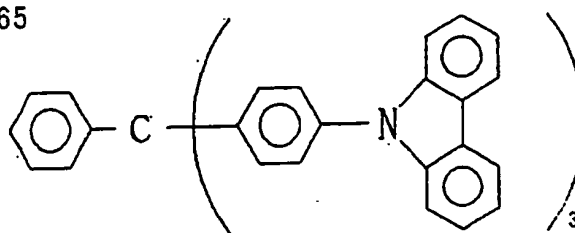


D-66

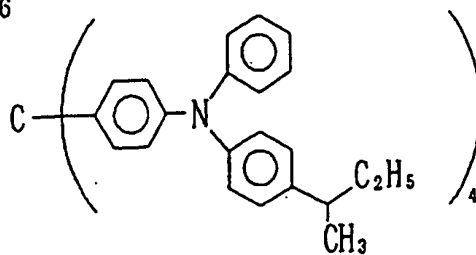


D-67

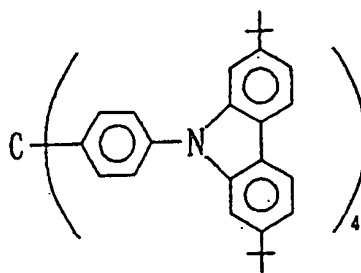


D-68

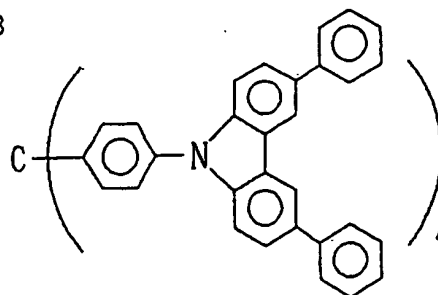


D-69




D-70




D-71

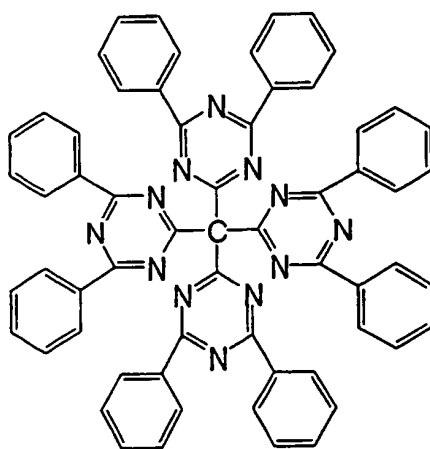


D-72

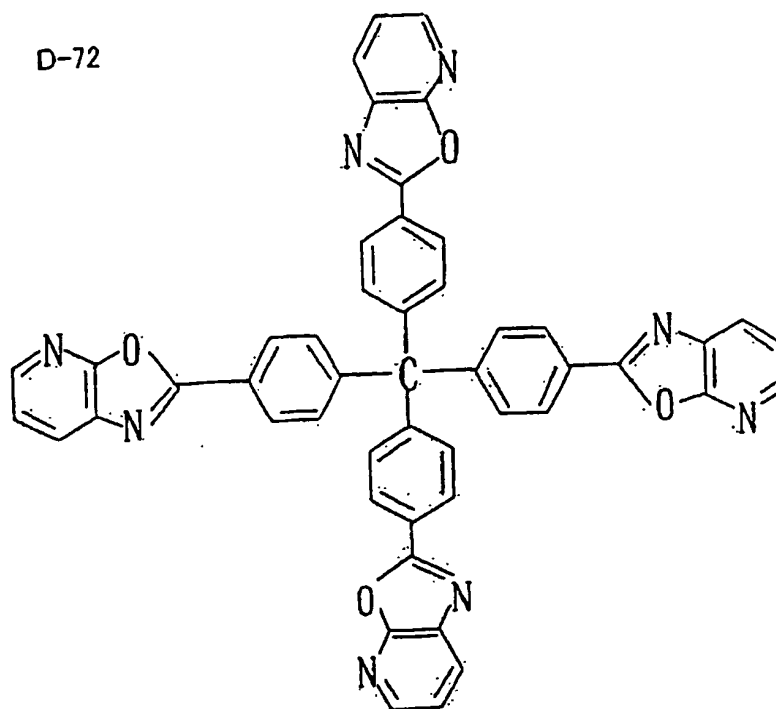


D-73

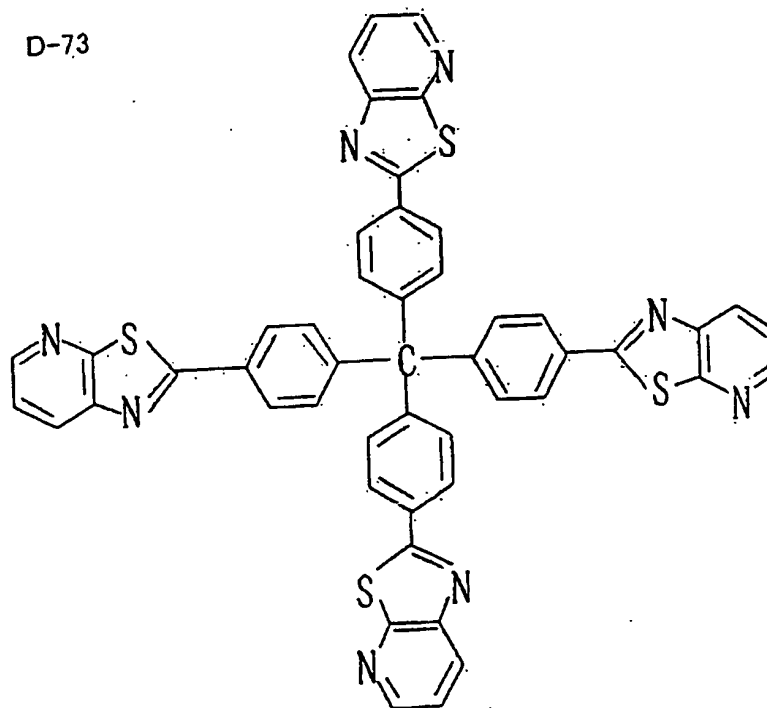


D-74

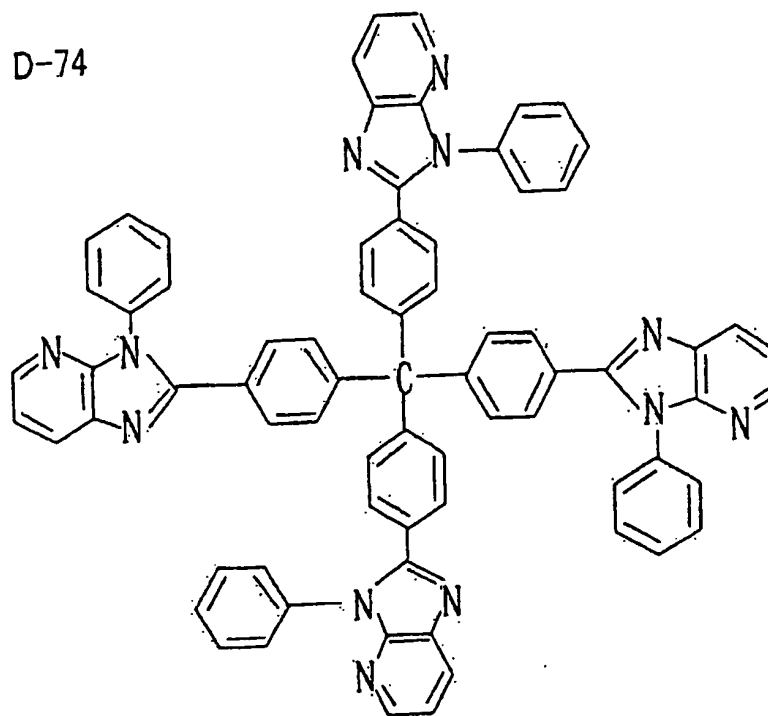


D-75

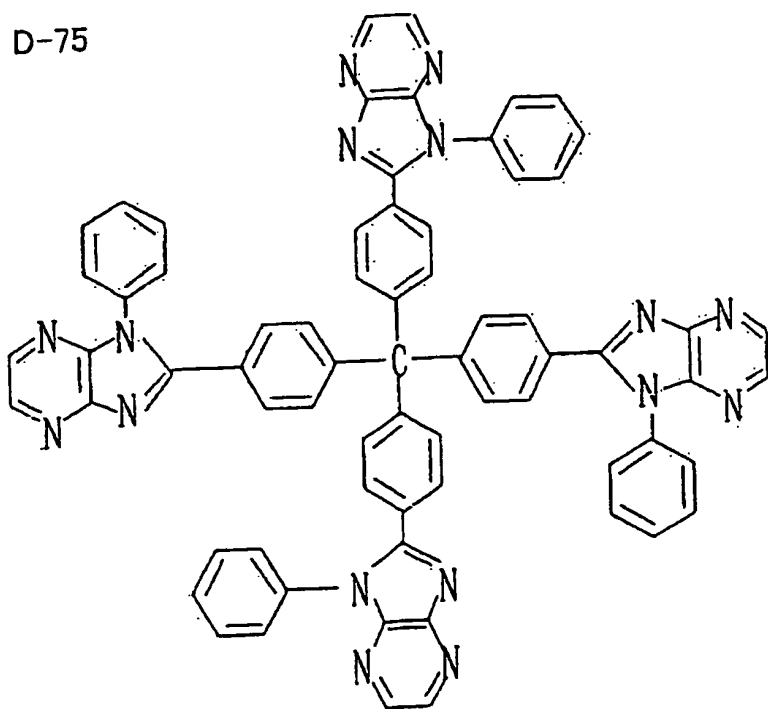


E-1

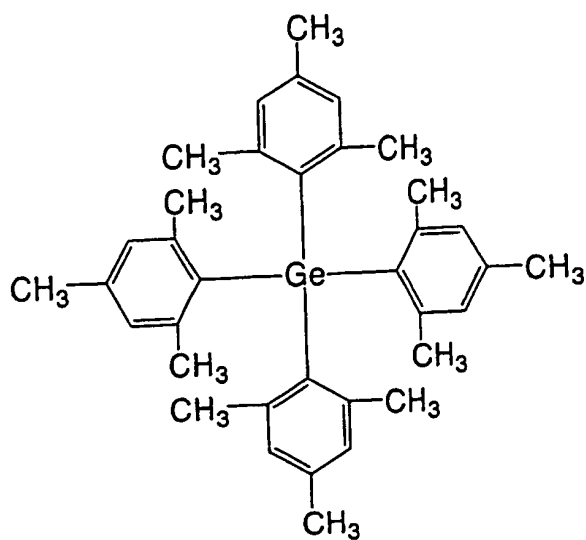


E-2

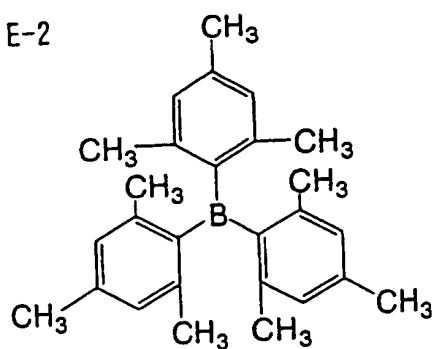


E-3

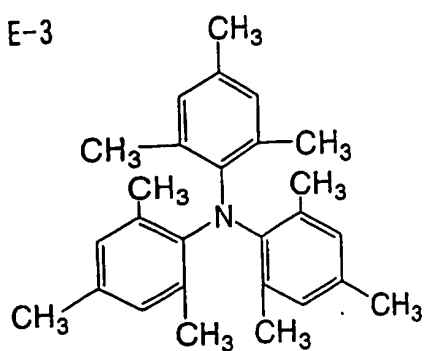

E-4

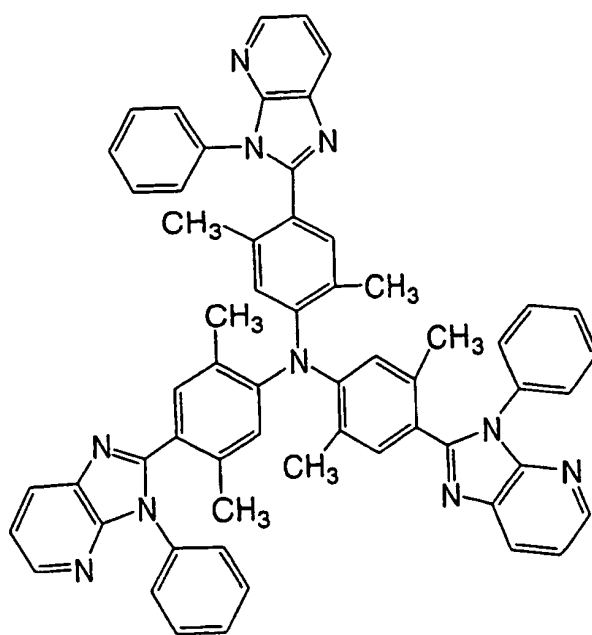

E-5

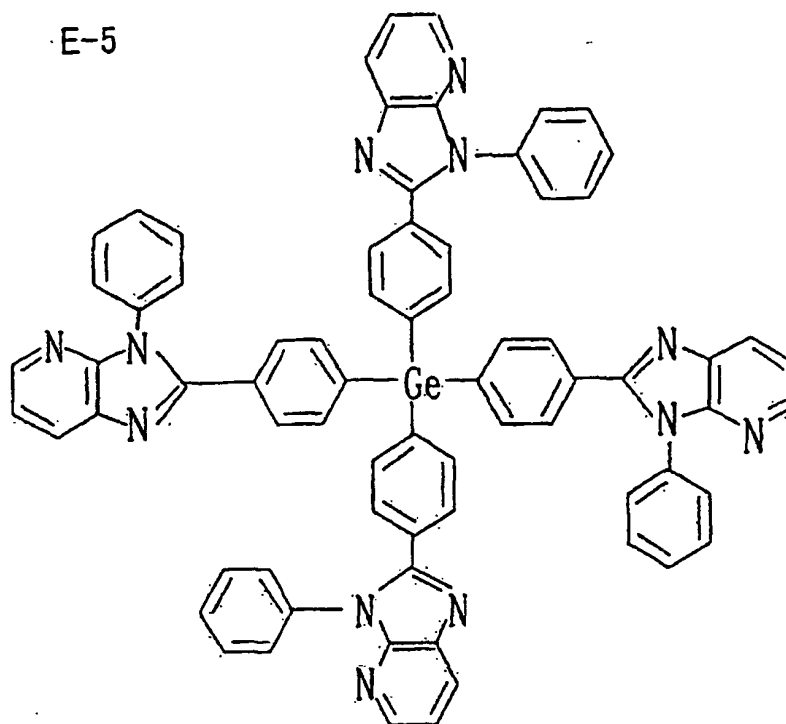

[0106] Next, synthesis examples of the exemplified compounds will be described.

Synthesis Example 1: synthesis of exemplified compound A-7

[0107] 3.17 g (8.0 mmol) of 1,3,5-tris(2-aminophenylamino)benzene was dissolved in 50 ml of dimethylacetamide, and 5 ml (36 mmol) of triethylamine was added thereto under an atmosphere of nitrogen. After cooling to the temperature of 0°C or lower, 2.0 ml (26.4 mmol) of acetylchloride was gently dropped into the mixture so as to maintain the temperature of 0°C or lower. About one hour after the dropping was completed, the temperature was maintained at 0°C or lower, and the temperature was gradually raised and the resulting product was stirred for 5 hours. A reaction solution was poured into 300 ml of water and a solid matter thus deposited was filtered out and washed with water. The obtained solid matter, 1 g of p-toluene sulfonic acid monohydrate, and 100 ml of xylene were heat-refluxed for about 10 hours. The solvent was removed under a reduced pressure, and thereafter, a condensate thus obtained was purified with silica gel column chromatography (eluent: chloroform/methanol = 100/1 (vol/vol)), and then recrystallized with ethylacetate, thereby obtaining 0.24 g of the exemplified compound A-7 (0.51 mmol) (yield: 6.4%).

Synthesis Example 2: synthesis of exemplified compound A-19

[0108] 3.69 g (20 mmol) of cyanuric chloride, 8.72 g (66 mmol) of 2-methylbenzimidazole, 41.6 g (180 mmol) of rubidium carbonate, 0.135 g (0.6 mmol) of palladium acetate, 0.44 ml (1.8 mmol) of tri-tert-butylphosphine, and 70 ml of o-xylene were mixed and heated under an atmosphere of nitrogen at 120°C for 6 hours. After cooling to room temperature, a solid matter was filtered out, and washed with chloroform. An organic layer thus formed was washed with water, and thereafter, dried with magnesium sulfuric anhydride, and the solvent was removed under a reduced pressure. The condensate was purified with silica gel column chromatography (eluent: chloroform/methanol = 100/1 (vol/vol)), and thereafter, recrystallized with ethyl acetate to obtain 2.5 g (5.32 mmol) of the exemplified compound A-19 (yield: 27%).

[0109] The aforementioned light emitting material contains at least one compound having a light emission maximum wavelength from an exciton in the blue region. The light emission in the blue region is derived from a transition from the minimum exciton triplet energy (T_1) to the ground state.

[0110] In the light emitting element, a material having a high phosphorescence quantum yield is preferably used as the light emitting material. Specifically, a light emitting material having a phosphorescence quantum yield of 70% or more at 20°C and a phosphorescence emission maximum wavelength λ_{max} of 500 nm or less is preferable. A light emitting material having a phosphorescence quantum yield of 80% or more at 20°C and a phosphorescence emission

maximum wavelength λ_{max} of 490 nm or less is more preferable. A light emitting material having a phosphorescence quantum yield of 85% or more at 20°C and a phosphorescence emission maximum wavelength λ_{max} of 480 nm or less is still further preferable.

[0111] The above-described light emitting material is a compound contained in a light emitting layer of the light emitting element, or in organic compound layers including the light emitting layer, which compound itself emits light. A transition metal complex is preferable as the light emitting material, and an orthometalated complex is more preferable. Among these complexes, iridium complexes, osmium complexes and platinum complexes are preferable in the point that these complexes have a high phosphorescence quantum yield and further improve the external quantum efficiency of the light emitting element. Iridium complexes and platinum complexes are more preferable, orthometalated iridium complexes are still more preferable, and a compound having a partial structure represented by general formula K-0 (described later) is particularly preferable. Examples of preferred transition metal complexes include compounds described in Japanese Patent Application Nos. 11-370353, 2000-287177, 2000-28178, 2000-299495, 2000-398907, 2001-33684, and 2001-45476.


[0112] The orthometalated complex referred to herein is a generic designation of the group of compounds described in Akio Yamamoto, Yûki Kinzoku Kagaku, Kiso to Ôyô ("Organic Metal Chemistry, Fundamentals and Applications", Shôkabô, 1982), pp. 150 and 232, and in H. Yersin, Photochemistry and Photophysics of Coordination Compounds (New York: Springer-Verlag, 1987), pp. 71-77 and pp. 135-146.

[0113] The light emitting element preferably contains, as the light emitting material, the compound having the partial structure represented by the following general formula K-0

[0114] (hereinafter, sometimes referred to as "iridium compound"). Among iridium compounds, a compound having a phosphorescence quantum yield and a phosphorescence emission maximum wavelength λ_{max} that are within the ranges described above is preferred. The general formula K-0 will be described in detail below.

[0115] The light emitting material in the present invention functions in the state of being contained in the light emitting layer of the light emitting element or in a plurality of organic compound layers including the light emitting layer.

General formula K-0



[0116] In the general formula K-0, R^1 to R^7 each independently represents a hydrogen atom or a substituent, provided that, if R^2 is a fluorine atom, R^3 shall not be a hydrogen atom. Examples of the substituent include groups, which will be described later for R^{11} in the general formula K-0. R^1 in the general formula K-0 is preferably a hydrogen atom, an alkyl group, an aryl group or a heteroaryl group, and more preferably a hydrogen atom. R^2 in the general formula K-0 is preferably a hydrogen atom, an alkyl group, an aryl group, a heteroaryl group or a fluorine atom, and more preferably a hydrogen atom, fluorine atom, or alkyl group. R^3 in the general formula K-0 is preferably a hydrogen atom, an alkyl group, an aryl group, a heteroaryl group or a fluorine atom, more preferably a hydrogen atom or a fluorine atom, and further preferably a fluorine atom.

[0117] R^5 in the general formula K-0 is preferably a hydrogen atom, an alkyl group, a substituted or unsubstituted amino group or an alkoxy group, more preferably a hydrogen atom, alkyl group, or an alkoxy group, and further preferably a hydrogen atom. R^4 , R^6 , and R^7 are each preferably a hydrogen atom or an alkyl group, and more preferably a hydrogen atom.

[0118] In the general formula K-0, the valence of the iridium atom in the iridium compound is not particularly limited, and is preferably trivalent. The iridium compound may be a so-called single nucleus complex containing one iridium atom and may also be a so-called multinuclei complex containing two or more iridium atoms. Among these, a single


nucleus complex containing one iridium atom is preferred. The iridium compound may contain a metallic atom other than iridium, and a compound containing a central metal being only an iridium atom is preferred.

[0119] The iridium compound may have various kinds of ligands in the structure thereof. Examples of the ligand include ligands disclosed in H. Yersin, Photochemistry and Photophysics of Coordination Compounds (New York: Springer-Verlag, 1987) and in Akio Yamamoto, Yûki Kinzoku Kagaku, Kiso to Ôyô ("Organic Metal Chemistry, Fundamentals and Applications", Sh6kab6, 1982). The ligand may be either a unidentate ligand or a bidentate ligand. As the ligand, a halogen ligand (preferably a chlorine ligand), a nitrogen-containing heterocyclic ligand (such as phenylpyridine, benzoquinoline, quinolinole, bipyridyl and phenanthroline), a diketone ligand and a carboxylic acid ligand are preferred, and a diketone ligand (such as acetylacetone) is more preferred. The ligand contained in the iridium compound may be of one kind or two or more kinds. The ligand contained in the iridium compound is preferably of one or two kinds, and particularly of one kind. The iridium compound may be either a neutral complex having no electric charge or an anionic complex having a counter salt (such as a chloride ion, a PF_6 ion and a ClO_4 ion). Among these, a neutral complex is preferred.


[0120] The number of carbon atoms contained in the iridium compound is preferably from 15 to 100, more preferably from 20 to 70, and further preferably from 30 to 60.

[0121] The compound having the partial structure represented by the general formula K-0 is preferably a compound having a partial structure represented by the general formula K-I, or a compound having a partial structure represented by the general formula K-III, and more preferably a compound having a partial structure represented by the general formula K-III. The compound having the partial structure represented by the general formula K-I is preferably an iridium complex represented by the general formula K-II, and more preferably an iridium complex represented by the general formula K-V. The compound having the partial structure represented by the general formula K-III is preferably an iridium complex represented by the general formula K-IV, and more preferably an iridium complex represented by the general formula K-VI.


General Formula K-I:




General Formula K-II:

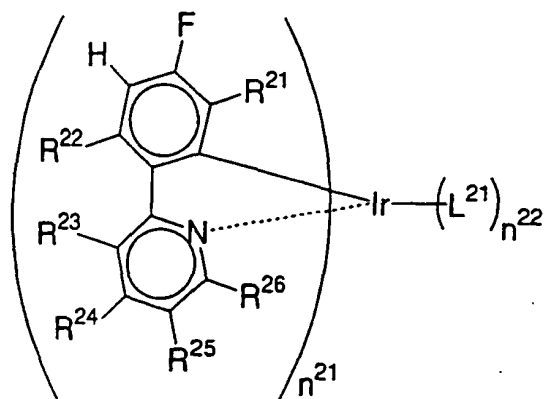


General Formula K-III:

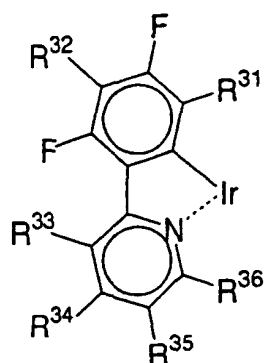


General Formula K-IV:

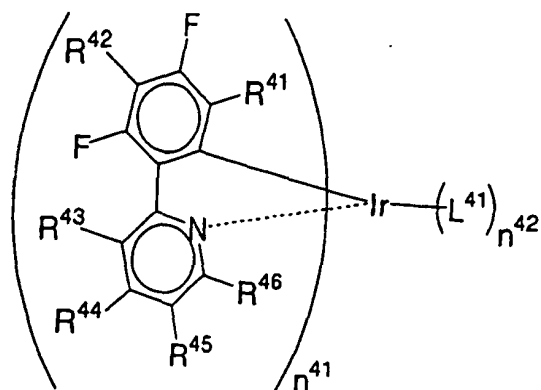

General Formula K-V:

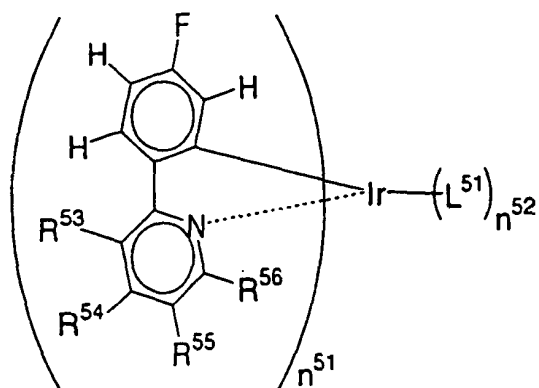

General Formula K-VI:

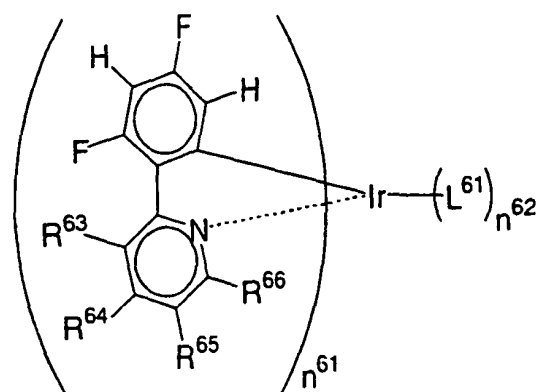

[0122] Next, the general formula K-I will be described.

[0123] In the general formula K-I, R¹¹ and R¹² each independently represents a hydrogen atom or a substituent. Examples of the substituent include an alkyl group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 10 carbon atoms, such as methyl, ethyl, isopropyl, tert-butyl, n-octyl, n-decyl, n-hexadecyl, cyclopropyl, cyclopentyl and cyclohexyl), an alkenyl group (preferably having from 2 to 30 carbon atoms, more preferably having from 2 to 20 carbon atoms, and particularly preferably having from 2 to 10 carbon atoms, such as vinyl, allyl, 2-butenyl and 3-pentenyl), an alkynyl group (preferably having from 2 to 30 carbon atoms, more preferably having from 2 to 20 carbon atoms, and particularly preferably having from 2 to 10 carbon atoms, such as propargyl and 3-pentynyl), an aryl group (preferably having from 6 to 30 carbon atoms, more preferably having from 6 to 20 carbon atoms, and particularly preferably having from 6 to 12 carbon atoms, such as phenyl, p-methylphenyl, naphthyl and anthranyl), an amino group (preferably having from 0 to 30 carbon atoms, more preferably having from 0 to 20 carbon atoms, and particularly preferably having from 0 to 10 carbon atoms, such as amino, methylamino, dimethylamino, diethylamino, dibenzylamino, diphenylamino and ditolylamino), an alkoxy group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 10 carbon atoms, such as methoxy, ethoxy, butoxy and 2-ethylhexyloxy), an aryloxy group (preferably having from 6 to 30 carbon atoms, more preferably having from 6 to 20 carbon atoms, and particularly preferably having from 6 to 12 carbon atoms, such as phenyloxy, 1-naphthyloxy and 2-naphthyloxy), a heteroaryloxy group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as pyridyloxy, pyradylxy, pyrimidyloxy and quinolyloxy), an acyl group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as acetyl, benzoyl, formyl and pivaloyl), an alkoxycarbonyl group (preferably having from 2 to 30 carbon atoms, more preferably having from 2 to 20 carbon atoms, and particularly preferably having from 2 to 12 carbon atoms, such as methoxycarbonyl and ethoxycarbonyl), an aryloxy carbonyl group (preferably having from 7 to 30 carbon atoms, more preferably having from 7 to 20 carbon atoms, and particularly preferably having from 7 to 12 carbon atoms, such as phenyloxy carbonyl), an acyloxy group (preferably having from 2 to 30 carbon atoms, more preferably from 2 to 20 carbon atoms, and particularly preferably having from 2 to 10 carbon atoms, such as acetoxyl and benzoyloxy), an acylamino group (preferably having from 2 to 30 carbon atoms, more preferably having from 2 to 20 carbon atoms, and particularly preferably having from 2 to 10 carbon atoms, such as acetylamino and benzoylamino), an alkoxycarbonylamino group (preferably having from 2 to 30 carbon atoms, more preferably having from 2 to 20 carbon atoms, and particularly preferably having from 2 to 12 carbon atoms, such as methoxycarbonylamino), an aryloxy carbonylamino group (preferably having from 7 to 30 carbon atoms, more preferably having from 7 to 20 carbon atoms, and particularly preferably having from 7 to 12 carbon atoms, such as phenyloxy carbonylamino), a sulfonylamino group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methanesulfonylamino and benzenesulfonylamino), a sulfamoyl group (preferably having from 0 to 30 carbon atoms, more preferably having from 0 to 20 carbon atoms, and particularly preferably having from 0 to 12 carbon atoms, such as sulfamoyl, methylsulfamoyl, dimethylsulfamoyl and phenylsulfamoyl), a carbamoyl group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as carbamoyl, methylcarbamoyl, diethylcarbamoyl and phenylcarbamoyl), an alkylthio group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methylthio and ethylthio), an arylthio group (preferably having from 6 to 30 carbon atoms, more preferably having from 6 to 20 carbon atoms, and particularly preferably having from 6 to 12 carbon atoms, such as phenylthio), a heteroarylthio group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as pyridylthio, 2-benzimidazolylthio, 2-benzoxazolylthio and 2-benzthiazolylthio), a sulfonyl group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as mesyl and tosyl), a sulfinyl group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as methanesulfinyl and benzenesulfinyl), an ureido group (preferably having from 1 to 30 carbon atoms, more preferably having from 1 to 20 carbon atoms, and particularly preferably having from 1 to 12 carbon atoms, such as ureido, methylureido and phenylureido), a phosphoamide group (preferably from 1 to 30 carbon atoms, more preferably from 1 to 20 carbon atoms, particularly preferably from 1 to 12 carbon atoms, such as diethylphosphoamide and phenylphosphoamide), a hydroxyl group, a mercapto group, a halogen atom (such as a fluorine atom, a chlorine atom, a bromine atom and an iodine atom), a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic acid group, a sulfinio group, a hydrazino group, an imino group, a heterocyclic group (such as an aliphatic heterocyclic group and a heteroaryl group, preferably having from 1 to 30 carbon atoms, and more preferably having from 1 to 12 carbon atoms, examples of the hetero atom including a nitrogen atom, an oxygen atom and a sulfur atom, and examples of the heterocyclic group including imidazolyl, pyridyl, quinolyl, furyl, thienyl, piperidyl, morpholino, benzoxazolyl, benzimidazolyl, benzthiazolyl and carbazolyl), and a silyl group (preferably having from 3 to 40 carbon atoms, more preferably from 3 to 30 carbon atoms, and particularly preferably having from 3 to 24 carbon atoms, such

as trimethylsilyl and triphenylsilyl). These substituents may further be substituted.

[0124] R^{11} in the general formula K-I is preferably a hydrogen atom, an alkyl group, an aryl group or a heteroaryl group, and more preferably a hydrogen atom.

[0125] R^{12} in the general formula K-I is preferably a hydrogen atom, an alkyl group, an aryl group, a heteroaryl group or a fluorine atom, more preferably a hydrogen atom or a fluorine atom, and further preferably a fluorine atom.

[0126] R^{13} , R^{14} , R^{15} , and R^{16} in the general formula K-I each independently represents a hydrogen or a substituent. Two or more of substituents may be combined with each other to form a cyclic structure. The substituent may be any group of R^{11} . R^{14} in the general formula K-I is preferably a hydrogen atom, an alkyl group, a substituted or unsubstituted amino group or an alkoxy group, more preferably a hydrogen atom, an alkyl group, or an alkoxy group, and particularly preferably a hydrogen atom.

[0127] R^{13} , R^{15} and R^{16} in the general formula K-I are each preferably a hydrogen atom or an alkyl group, and more preferably a hydrogen atom.

[0128] Next, the general formula K-II will be described. In the general formula K-II, R^{21} , R^{22} , R^{23} , R^{24} , R^{25} , and R^{26} each has the same meaning as R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , and R^{16} in the general formula K-I, and a preferred embodiment thereof is also the same.

[0129] L^{21} in the general formula K-II represents a ligand. Examples of the ligand include ligands disclosed in H. Yersin, Photochemistry and Photophysics of Coordination Compounds (Springer-Verlag, 1987) and in Akio Yamamoto, Yûki Kinzoku Kagaku, Kiso to ôyô ("Organic Metal Chemistry, Fundamentals and Applications", Shôkabô, 1982). As the ligand, a halogen ligand (preferably a chlorine ligand), a nitrogen-containing heterocyclic ligand (such as phenylpyridine, benzoquinoline, quinoline, bipyridyl and phenanthroline), a diketone ligand, and a carboxylic acid ligand are preferred. A nitrogen-containing heterocyclic ligand and a diketone ligand are more preferred.

[0130] n^{21} in the general formula K-II represents an integer of 1 to 3, and more preferably 2 or 3. n^{22} in the general formula K-II represents an integer of 0 to 4, and more preferably 0 or 1.

[0131] Next, the general formula K-III will be described. R^{31} and R^{32} in the general formula K-III each independently represents a hydrogen atom or a substituent. The substituent may be any group of R^{11} in the general formula K-I. R^{31} in the general formula K-III is preferably a hydrogen atom, an alkyl group, an aryl group, or a heteroaryl group, and more preferably a hydrogen atom. R^{32} in the general formula K-III is preferably a hydrogen atom, an alkyl group, an aryl group, a heteroaryl group, or a fluorine atom, more preferably a hydrogen atom or a fluorine atom, and further preferably a hydrogen atom.

[0132] R^{33} to R^{36} in the general formula K-III each independently represents a hydrogen atom or a substituent. Two or more of substituents may be combined with each other to form a cyclic structure. The substituent may be any group of R^{11} in the general formula K-I. R^{34} in the general formula K-III is preferably a hydrogen atom, an alkyl group, a substituted or unsubstituted amino group or an alkoxy group, more preferably a hydrogen atom, an alkyl group, or an alkoxy group, and further preferably a hydrogen atom. R^{33} , R^{35} , and R^{36} in the general formula K-III are each preferably a hydrogen atom or an alkyl group, and more preferably a hydrogen atom.

[0133] Next, the general formula K-IV will be described.

[0134] In the general formula K-IV, R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each has the same meaning as R^{31} , R^{32} , R^{33} , R^{34} , R^{35} , and R^{36} in the general formula K-III, and a preferred embodiment thereof is also the same. L^{41} in the general formula K-IV has the same meaning as L^{21} in the general formula K-II, and a preferred embodiment thereof is also the same. n^{41} in the general formula K-IV represents an integer of 1 to 3, and preferably 1 or 2. n^{42} in the general formula K-IV represents an integer of 0 to 4, and preferably 0 or 1.


[0135] Next, the general formula K-V will be described. In the general formula K-V, R^{53} , R^{54} , R^{55} , R^{56} , L^{51} , n^{51} , and n^{52} each has the same meaning as R^{23} , R^{24} , R^{25} , R^{26} , L^{21} , n^{21} , and n^{22} in the general formula K-II, and a preferred embodiment thereof is also the same.

[0136] Next, the general formula K-VI will be described. In the general formula K-VI, R^{63} , R^{64} , R^{65} , R^{66} , L^{61} , n^{61} , and n^{62} each has the same meaning as R^{43} , R^{44} , R^{45} , R^{46} , L^{41} , n^{41} , and n^{42} in the general formula K-IV, and a preferred embodiment thereof is also the same.


[0137] The iridium compound may be either a so-called low molecular weight compound or a so-called oligomer compound and a so-called polymer compound containing repeating units having the partial structure represented by the general formula K-0 (which preferably contain a weight average molecular weight (polystyrene standard) of from 1,000 to 5,000,000, more preferably from 2,000 to 1,000,000, and further preferably from 3,000 to 100,000). Among these, it is preferable that the iridium compound is a low molecular weight compound.

[0138] Example compounds (K-1) to (K-25) of the iridium compound having the partial structure represented by the general formula K-0 will be described below.


(K-1)




(K-5)

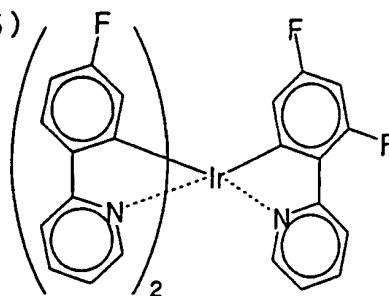


(K-2)

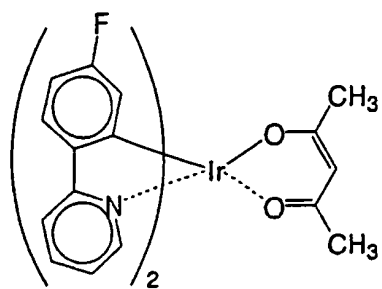


(K-6)




(K-3)




(K-7)

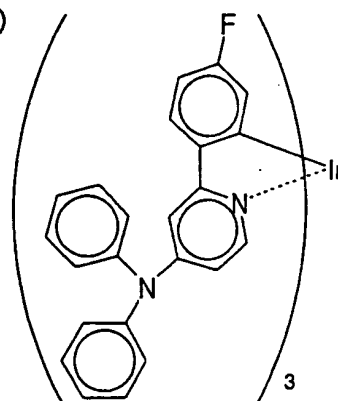


(K-4)




(K-8)

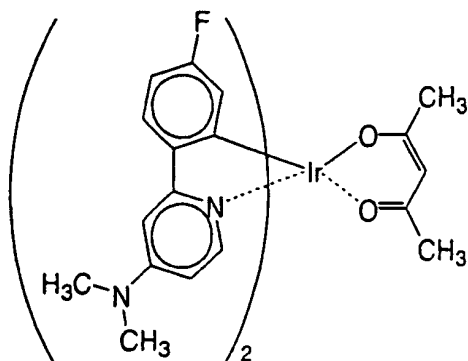


(K-9)

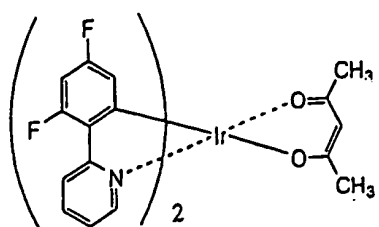


(K-14)




(K-10)

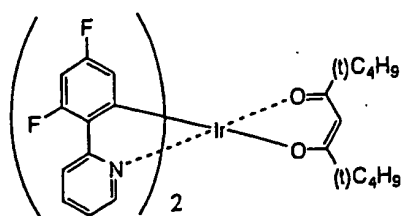


(K-15)

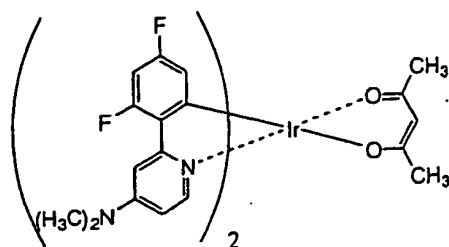


(K-11)




(K-16)

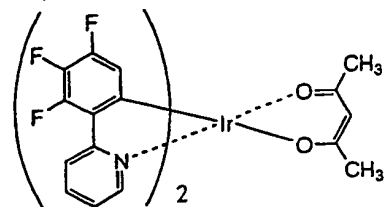


(K-12)




(K-17)

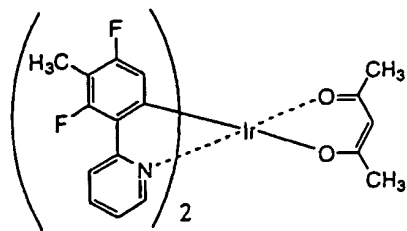


(K-13)




(K-18)

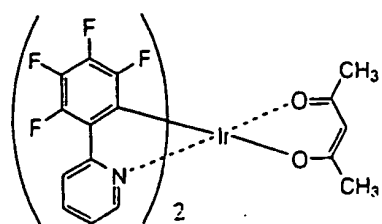


(K-19)

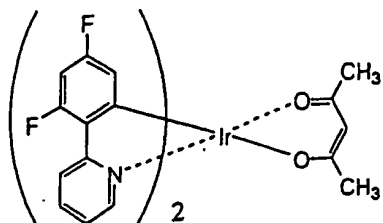


(K-24)

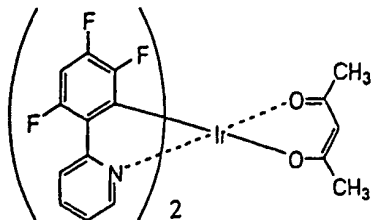


(K-20)




(K-25)




(K-21)



(K-22)



(K-23)



[0139] The compound having the partial structure represented by the general formula K-0 can be synthesized by various methods. For example, the various ligands or a dissociated product thereof and the iridium compound are reacted in the presence of a solvent (such as a halogen-substituted hydrocarbon, an alcohol, an ether and water) or the absence of a solvent, and in the presence of a base (such as various kinds of inorganic and organic bases, e.g., sodium methoxide, t-butoxy potassium, triethylamine and potassium carbonate) or the absence of a base, at room temperature or under heating (in which a method of heating by microwave is also effective as well as ordinary heating). Examples of the starting material include iridium (III) chloride, trisacetylacetonato iridium (III), potassium hexachloroiridate (III), potassium hexachloroiridate (IV) and an analogue thereof.

[0140] The iridium complex represented by the general formula K-II and the iridium complex represented by the general formula K-IV can be utilized as a material for a light-emitting element and can also be used for medical uses, fluorescent whitening agents, photographic materials, UV absorbing materials, laser dyes, dyes for color filters and color conversion filters.


Synthesis Example 1

Synthesis of Example Compound K-1

[0141] 1.77 g of 2-(4-fluorophenyl)pyridine, 0.5 g of trisacetylacetonato iridium (III) and 30 ml of glycerol were mixed


and then stirred under a nitrogen stream at 200°C for 4 hours. After cooling to room temperature, 200 ml of methanol was added thereto, and a solid matter thus deposited was filtered out. The solid matter was purified with silica gel column chromatography (eluent: chloroform) to obtain 0.5 g of a pale yellow solid matter. The NMR measurement thereof revealed that the resulting compound was the example compound K-1.

[0142] The phosphorescence quantum yield of the resulting example compound K-1 was measured after degassing oxygen (solvent: toluene, concentration: 5.0×10^{-6} mol/L), and it was 90%. The phosphorescence emission maximum wavelength λ_{max} was 477 nm.

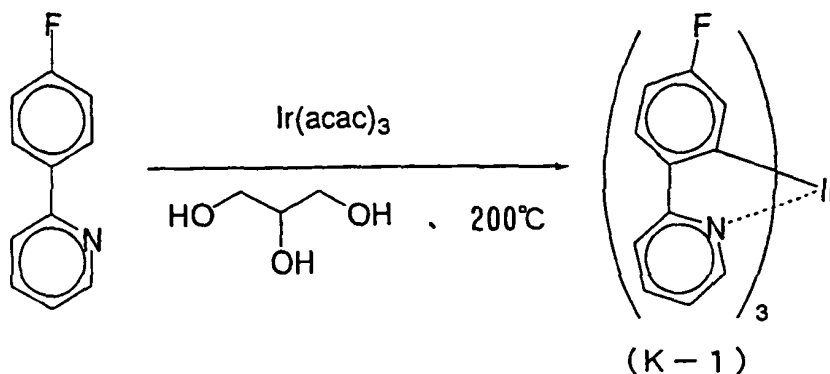

Synthesis Example 2 Synthesis of Example Compound K-3 3.0 g of 2-(2,4-difluorophenyl)pyridine, 1.3 g of trisacetylacetonato iridium (III) and 50 ml of glycerol were mixed and then stirred under a nitrogen stream at 200°C for 4 hours. After cooling to room temperature, 200 ml of methanol was added thereto, and a solid matter thus deposited was filtered out. The solid matter was purified with silica gel column chromatography (eluent: chloroform) to obtain 0.8 g of a pale yellow solid matter. The NMR measurement thereof revealed that the resulting compound was the example compound K-3.

[0143] The phosphorescence quantum yield of the resulting example compound K-3 was measured after degassing oxygen (solvent: toluene, concentration: 5.0×10^{-6} mol/L), and it was 70%. The phosphorescence emission maximum wavelength λ_{max} was 470 nm.

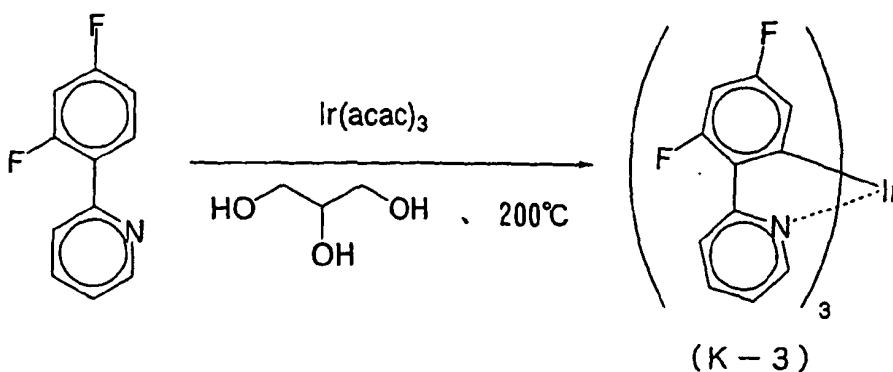


Synthesis Example 3

Synthesis of Example Compound K-9

[0144] 10 ml of chloroform was added to 0.2 g of compound (a) and 0.07 ml of acetylacetone, and 0.13 ml of methanol solution of sodium methoxide (28 % by weight) was further added thereto and then stirred under a reflux for 6 hours. After cooling to room temperature, 50 ml of chloroform and 50 ml of water were added thereto, and an organic layer was separated. The organic layer was purified with silica gel column chromatography (eluent: chloroform) to obtain 0.1 g of a pale yellow solid matter. The NMR measurement thereof revealed that the resulting compound was the example


compound K-9.

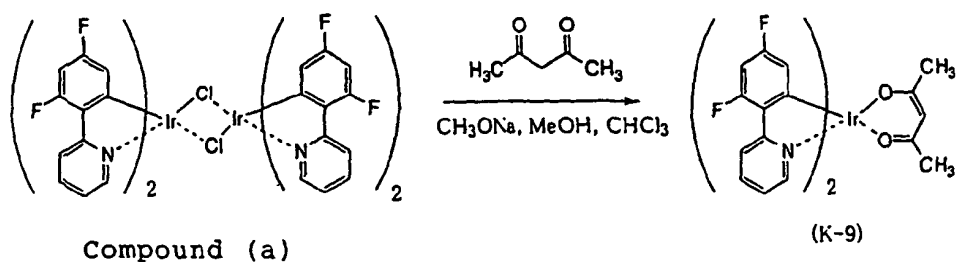

Synthesis Example 4

Synthesis of Example Compound K-11

[0145] 1.0 g of 2-(2,4-difluorophenyl)-4-methylpyridine, 1.0 g of trisacetylacetonato iridium (III) and 30 ml of glycerol were mixed and then stirred under a nitrogen stream at 200°C for 4 hours. After cooling to room temperature, 200 ml of water was added thereto, and a solid matter thus deposited was filtered out. The solid matter was purified with silica gel column chromatography (eluent: chloroform) to obtain 0.2 g of a pale yellow solid matter. The NMR measurement thereof revealed that the resulting compound was the example compound K-11.

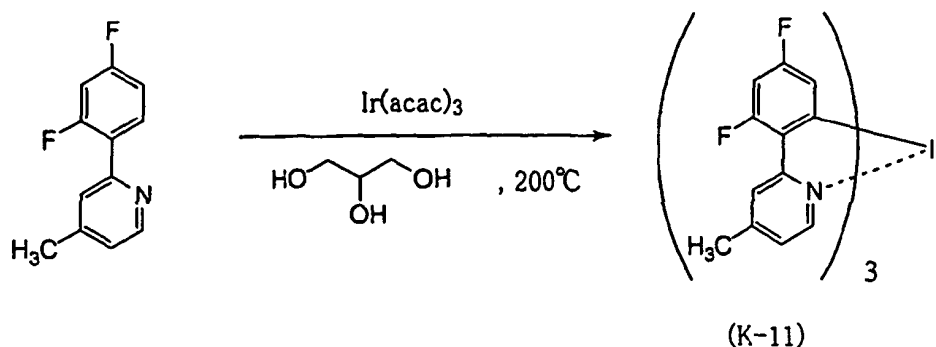

[0146] The aforementioned host material provides a field for the recombination of injected holes and electrons and also has the ability to transfer the energy of an exciton generated by the recombination to the guest. Given as examples of the host material are materials having a carbazole skeleton, materials having a diarylamine skeleton, materials having a pyridine skeleton, materials having a pyrazine skeleton, materials having a triazine skeleton and materials having an arylsilane skeleton.

[0147] In the light emitting element of the present invention, the light emitting layer may be formed by doping the host material with the light emitting material. For example, the light emitting layer may be formed by co-depositing the light emitting material and the host material. The light emitting layer can be formed by utilizing a vacuum deposition method, LB method, ink jet method, printing method, transfer method or coating method (e.g., a spin coating method, casting method, dip coating method, or the like). The use of the aforementioned coating method is advantageous in reducing production costs. However, the coating method conventionally poses the problem that a light emitting element utilizing the above coating method is inferior in emission illuminance and luminance efficiency to those produced by a deposition method or the like. In the light emitting element of the present invention, when the layer disposed adjacent to the light emitting layer is formed of an organic material satisfying the above requirements, the luminance efficiency is improved. Therefore, a light emitting element having good luminance efficiency can be provided at low cost by producing this light emitting element utilizing the coating method.

[0148] In the coating method, a coating solution, in which the light emitting material is dissolved in a solvent, is prepared

and the coating solution is applied to a desired position to form the light emitting layer. A resin may be dissolved or dispersed in the solvent together with the light emitting material to prepare the coating solution. Given as examples of the resin are polyvinyl chloride, polycarbonate, polystyrene, polymethyl methacrylate, polybutyl methacrylate, polyester, polysulfone, polyphenylene oxide, polybutadiene, poly(N-vinylcarbazole), hydrocarbon resins, ketone resins, phenoxy resins, polyamide, ethyl cellulose, polyvinyl acetate, ABS resins, polyurethane, melamine resins, unsaturated polyester resins, alkyd resins, epoxy resins, silicone resins, and the like.

[0149] A film thickness of the light emitting layer is generally preferably 1 nm to 5 μm , more preferably 5 nm to 1 μm and still more preferably 10 nm to 500 nm, though no particular limitation is imposed on the thickness.

[0150] In the light emitting layer, the weight ratio of the light emitting material to the host material is generally from 0.1 % by weight to 20 % by weight, preferably from 0.5 % by weight to 15 % by weight, and more preferably from 1.0 % by weight to 10 % by weight.

[0151] Materials used for the hole injecting layer and hole transporting layer have the ability to inject holes from an anode and to transport holes, respectively. These materials preferably have the ability to block electrons injected from a cathode in addition to the above abilities.

[0152] Specific examples of the hole transporting material and hole injecting material include carbazole derivatives, imidazole derivatives, triazole derivatives, oxazole derivatives, oxadiazole derivatives, polyarylethane derivatives, pyrazoline derivatives, pyrazolone derivatives, phenylenediamine derivatives, arylamine derivatives, amino substituted calcon derivatives, styrylanthracene derivatives, fluorenone derivatives, hydrazone derivatives, stilbene derivatives, silazane derivatives, aromatic tertiary amine compounds, styrylamine derivatives, aromatic dimethyldiyne derivatives, porphyrin derivatives, polysilane derivatives, poly(N-vinylcarbazole) derivatives, aniline type copolymers, thiophene oligomers, electroconductive polymers and oligomers such as polythiophene, organic silane derivatives and organic phosphine derivatives.

[0153] The hole injecting layer and hole transporting layer may have either a monolayer structure comprising one or two types selected from the above materials or a multilayer structure comprising plural layers having the same compositions or different compositions.

[0154] In a case where the hole transporting layer or the hole injecting layer is disposed adjacent to the light emitting layer, the T_1 level of the hole transporting material or hole injecting material is preferably higher than the T_1 level of the light emitting material. The T_1 level of the hole transporting material or hole injecting material is preferably more than 1.05 times and more preferably more than 1.1 times the T_1 level of the light emitting material. The T_1 level of the hole transporting material or hole injecting material is preferably from 68 kcal/mol (284.9 kJ/mol) to 90 kcal/mol (377.1 kJ/mol), more preferably from 69 kcal/mol (289.1 kJ/mol) to 85 kcal/mol (356.2 kJ/mol) and still more preferably from 70 kcal/mol (293.3 kJ/mol) to 80 kcal/mol (335.2 kJ/mol).

[0155] In a case where the hole transporting layer or the hole injecting layer is disposed adjacent to the light emitting layer and has a multilayer structure, the T_1 level of each of all hole transporting materials and hole injecting materials contained in the multilayer is preferably higher than the T_1 level of the light emitting material.

[0156] Examples of a method of forming the hole injecting layer and the hole transporting layer include a vacuum deposition method, LB method, ink jet method, printing method, coating method (e.g., a spin coating method, casting method, dip coating method and the like), and transfer method similarly to the method of forming the light emitting layer. When a coating solution to be used for the coating method is prepared, a resin may be used. Examples of the resin include the same resins that are exemplified as being usable for the preparation of the coating solution used in the formation of the light emitting layer.

[0157] A film thickness of each of the hole injecting layer and the hole transporting layer is preferably 1 nm to 5 μm , more preferably 5 nm to 1 μm and still more preferably 10 nm to 500 nm in general, though there is no particular limitation to the thickness.

[0158] Materials used for the electron injecting layer and the electron transporting layer have the ability to inject electrons from a cathode and to transport electrons, respectively. These materials preferably have the ability to block holes injected from an anode in addition to the above abilities.

[0159] Specific examples of the electron injecting material and electron transporting material include various metal complexes represented by metal complexes of imidazole derivatives, triazole derivatives, triazine derivatives, oxazole derivatives, oxadiazole derivatives, fluorenone derivatives, anthraquinodimethane derivatives, anthrone derivatives, diphenylquinone derivatives, thiopyranedioxide derivatives, carbodiimide derivatives, fluorenylidene methane derivatives, distyrylpyrazine derivatives, cyclic tetracarboxylic acid of aromatic compound such as perylene and naphthalene, phthalocyanine derivatives or 8-quinolinol derivatives and by metal complexes containing metal phthalocyanine, benzoxazole or benzothiazole as a ligand and organosilane derivatives. The electron injecting layer and electron transporting layer may have either a monolayer structure comprising one or two types selected from the above materials or a multilayer structure comprising plural layers having the same compositions or different compositions.

[0160] In a case where the electron transporting layer or the electron injecting layer is disposed adjacent to the light emitting layer, the T_1 level of the electron transporting material or electron injecting material is preferably higher than

the T_1 level of the light emitting material. The T_1 level of the electron transporting material or electron injecting material is preferably more than 1.05 times and more preferably more than 1.1 times the T_1 level of the light emitting material. The T_1 level of the electron transporting material or electron injecting material is preferably from 68 kcal/mol (284.9 kJ/mol) to 90 kcal/mol (377.1 kJ/mol), more preferably from 69 kcal/mol (289.1 kJ/mol) to 85 kcal/mol (356.2 kJ/mol) and still more preferably from 70 kcal/mol (293.3 kJ/mol) to 80 kcal/mol (335.2 kJ/mol).

[0161] In a case where the electron transporting layer or the electron injecting layer is disposed adjacent to the light emitting layer and has a multilayer structure, the T_1 level of each of all electron transporting materials and electron injecting materials contained in the multilayer is preferably higher than the T_1 level of the light emitting material.

[0162] Examples of a method of forming the electron injecting layer and the electron transporting layer include a vacuum deposition method, LB method, ink jet method, printing method, coating method (e.g., a spin coating method, casting method, dip coating method and the like), and transfer method similarly to the method of forming the light emitting layer. When a coating solution to be used for the coating method is prepared, a resin may be used. Examples of the resin include the same resins that are exemplified as being usable for the preparation of the coating solution used in the formation of the light emitting layer.

[0163] A film thickness of each of the electron injecting layer and the electron transporting layer is preferably 1 nm to 5 μm , more preferably 5 nm to 1 μm and still more preferably 10 nm to 500 nm in general, though there is no particular limitation to the thickness.

[0164] Materials for the protective layer may be those having the ability to prevent the intrusion of a material, such as water and oxygen promoting elemental deterioration, into the element. Specific examples of such a material include metals such as In, Sn, Pb, Au, Cu, Ag, Al, Ti and Ni, metal oxides such as MgO, SiO, SiO₂, Al₂O₃, GeO, NiO, CaO, BaO, Fe₂O₃, Y₂O₃ and TiO₂, nitrides such as SiN_x and SiN_xO_y, metal fluorides such as MgF₂, LiF, AlF₃ and CaF₂, polyethylene, polypropylene, polymethyl methacrylate, polyimide, polyurea, polytetrafluoroethylene, polychlorotrifluoroethylene, polydichlorodifluoroethylene, copolymers of chlorotrifluoroethylene and dichlorodifluoroethylene, copolymers obtained by copolymerizing tetrafluoroethylene and a monomer mixture containing at least one comonomer, fluorine-containing copolymers having a cyclic structure on a copolymer principal chain, water-absorbable materials having an absorption coefficient of 1% or more and moisture proof materials having an absorption coefficient of 0.1% or less.

[0165] No particular limitation is imposed on a method of forming the protective layer. As the method, for example, a vacuum deposition method, sputtering method, reactive sputtering method, MBE (molecular beam epitaxy) method, cluster ion beam method, ion plating method, plasma polymerization method (high frequency excitation ion plating method), plasma CVD method, laser CVD method, thermal CVD method, gas source CVD method, coating method, ink jet method, printing method, and transfer method may be applied.

[0166] Materials constituting the anode serves to supply holes to the hole injecting layer, hole transporting layer and light emitting layer. As the material, a metal, alloy, metal oxide, electroconductive compound or a mixture of these materials may be used. Preferable materials are those having a working function of 4 eV or more. Specific examples of these materials include conductive metal oxides such as tin oxide, zinc oxide, indium oxide, indium tin oxide (ITO), metals such as gold, silver, chromium and nickel, mixtures or laminates of these metals and conductive metal oxides, inorganic conductive materials such as copper iodide and copper sulfide, organic conductive materials such as polyaniline, polythiophene and polypyrrole and laminates of these materials and ITO. Among these materials, conductive metal oxides are preferable and ITO is particularly preferable in view of productivity, high conductivity and transparency.

[0167] Although a film thickness of the anode may be selected optionally according to the type of material, it is in a range preferably from 10 nm to 5 μm , more preferably from 50 nm to 1 μm and still more preferably from 100 nm to 500 nm in general.

[0168] As the anode, an electrode obtained by forming a layer on soda lime glass, non-alkali glass and a transparent resin substrate is usually used. When glass is used as the substrate, non-alkali glass is preferably used as the glass material to decrease the elution of ions from the glass. Also, when soda lime glass is used, glass which is coated with silica as a barrier is preferably used. Although no particular limitation is imposed on the thickness of the substrate as far as it is enough to maintain the mechanical strength, a substrate having a thickness of generally 0.2 mm or more and preferably 0.7 mm or more is used when glass is used. For the formation of the anode, various methods are used according to the type of material. In a case of, for example, ITO, a film is formed using a method such as an electron beam method, sputtering method, resistance heating deposition method, chemical reaction method (sol-gel method) and method of applying a dispersion of ITO.

[0169] The driving voltage for the light emitting element can be reduced and the luminance efficiency can be raised by performing treatments such as washing and other treatments of the anode. For example, in a case of ITO, UV-ozone treatment and plasma treatment are effective.

[0170] A material constituting the cathode serves to supply electrons to the electron injecting layer, electron transporting layer, light emitting layer and the like and is selected in consideration of adhesion to the layers, such as the electron injecting layer, electron transporting layer and light emitting layer, disposed adjacent thereto, ionizing potential and stability. As the material of the cathode, a metal, alloy, metal oxide, electroconductive compound or mixture of these

materials may be used. Specific examples include alkali metals (e.g., Li, Na, K, Cs and the like) or fluorides or oxides of these compounds, alkali earth metals (e.g., Mg and Ca) or fluorides or oxides of these compounds, gold, silver, lead, aluminum, sodium-potassium alloys or mixtures of this alloy and other metal, lithium-aluminum alloys or mixtures of this alloy and other metal, magnesium-silver alloys or mixtures of this alloy and other metal and rare earth metals such as indium and ytterbium. Materials having a working function of 4 eV or less are preferable and aluminum, lithium-aluminum alloys or mixtures of this alloy and other metal and magnesium-silver alloys or mixtures of this alloy and other metal are more preferable.

[0171] Although a film thickness of the cathode may be optionally selected, the cathode has a film thickness ranging preferably from 10 nm to 5 μm , more preferably from 50 nm to 1 μm and more preferably 100 nm to 1 μm in general.

[0172] The cathode is formed using a method such as an electron beam method, sputtering method, resistance heating deposition method and coating method. A metal can be deposited singly and two or more metal components may be deposited simultaneously. Moreover, plural metals may be deposited at the same time to form an alloy electrode. Also, an alloy prepared in advance may be deposited.

[0173] It is preferable that the sheet resistance of each of the anode and the cathode be lower and preferably several hundreds $\Omega/\square$ or less.

[0174] The light emitting element of the present invention may be served to applications in wide fields such as display elements, displays, back-up lights, electrophotographs, illumination light sources, recording light sources, reading light sources, beacons, signboards, interiors, and optical communication devices.

EXAMPLES

[0175] The present invention will be explained in more detail by way of examples.

(Example 1)

[0176] An ITO substrate which was washed was placed in an evaporating apparatus and α -NPD(N, N'-diphenyl-N, N'-di(α -naphthyl)-benzidine) was deposited on the substrate in a thickness of 50 nm. CBP (biscarbazolylbenzidine) and the exemplified compound K-1 were co-deposited thereon in a ratio of 17:1 in a thickness of 36 nm. The exemplified compound B-40 was further deposited thereon in a thickness of 24 nm. A patterned mask (the emission area was designed to be 4 mm $\times$ 5 mm) was placed on the organic thin film to co-deposit magnesium/silver (10:1) in a thickness of 250 nm. Thereafter, silver was deposited in a thickness of 300 nm to produce a light emitting element.

(Example 2)

[0177] A light emitting element was produced in the same manner as in Example 1 except that the exemplified compound A-10 was used in place of CBP in the manufacturing of the light emitting element of Example 1.

(Example 3)

[0178] A light emitting element was produced in the same manner as in Example 1 except that TPD(N,N'-diphenyl-N,N'-di(m-tolyl)-benzidine) was used in place of α -NPD in the manufacturing of the light emitting element of Example 1.

(Example 4)

[0179] A light emitting element was produced in the same manner as in Example 2 except that TPD was used in place of α -NPD in the manufacturing of the light emitting element of Example 2.

(Example 5)

[0180] A light emitting element was produced in the same manner as in Example 4 except that the exemplified compound D-46 was used in place of the exemplified compound A-10 in the manufacturing of the light emitting element of Example 4.

(Example 6)

[0181] A light emitting element was produced in the same manner as in Example 4 except that the exemplified compound C-71 was used in place of the exemplified compound A-10 in the manufacturing of the light emitting element of Example 4.

(Example 7)

[0182] A light emitting element was produced in the same manner as in Example 3 except that the exemplified compound K-3 was used in place of the exemplified compound K-1 in the manufacturing of the light emitting element of Example 3.

(Example 8)

[0183] A light emitting element was produced in the same manner as in Example 4 except that the exemplified compound K-3 was used in place of the exemplified compound K-1 in the manufacturing of the light emitting element of Example 4.

(Example 9)

[0184] A light emitting element was produced in such a manner that in the manufacturing of the light emitting element of Example 4, the exemplified compound A-19 was used in place of the exemplified compound B-40 to form an organic thin film, and a pattern mask (the emission area was designed to be 4 mm×5 mm) was placed on the organic thin film to deposit lithium fluoride in a thickness of 3 nm, and thereafter, aluminum was deposited in a thickness of 400 nm.

(Example 10)

[0185] A light emitting element was produced in the same manner as in Example 9 except that the exemplified compound K-3 was used in place of the exemplified compound K-1 in the manufacturing of the light emitting element of Example 9.


(Comparative Example 1)



[0186] A light emitting element was produced in the same manner as in Example 1 except that TPD was used in place of CBP in the manufacturing of the light emitting element of Example 1.

(Comparative Example 2)

[0187] A light emitting element was produced in the same manner as in Comparative Example 1 except that TPD was used in place of α -NPD and the exemplified compound K-3 was used in place of the exemplified example K-1 in the manufacturing of the light emitting element of Comparative Example 1.

[0188] Respective constitutional formulae of α -NPD, CBP, and TPD used in Examples and Comparative Examples are shown below.

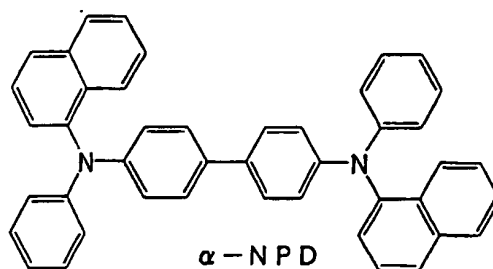

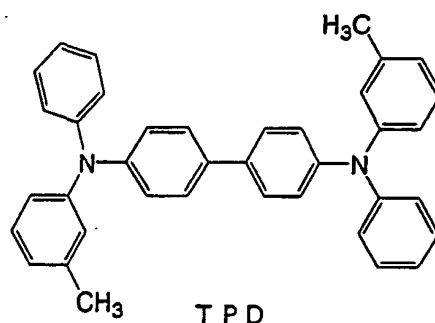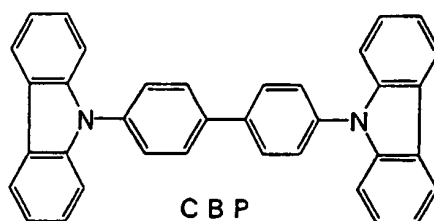

[0189] The minimum excitation triplet energy level T_1 of each of CBP, exemplified compounds A-10, D-46, and C-71, TPD, α -NPD, exemplified compounds K-1, K-3, B-40, and A-19, which were used in Examples and Comparative Examples was measured. Specifically, the phosphorescence spectrum of each material was measured (10 μ mol/l EPA (diethyl ether: isopentane: isopropyl alcohol = 5:5:2 (volume ratio)) solution, 77K, quartz cell, FLUOROLOGII manufactured by SPEX) to determine the T_1 level from the beginning of the wavelength on the short wavelength side of the phosphorescence spectrum.

[0190] A fixed d.c. voltage was applied to each of the light emitting elements obtained in Examples and Comparative Examples by using Source Measure Unit 2400 manufactured by Toyo Technica, making each element emit light to measure the luminance by using a luminance meter BM-8 manufactured by Topcon and the light emission wavelength and CIE chromaticity coordinate by using a Spectrum Analyzer PMA-11 manufactured by Hamamatsu Photonics.

[0191] The results of each measurement are shown in Table 1 below.

TABLE 1

Lightemitting Element	Hole transporting material	T ₁ (kcal/mol)	Light emitting layer				Electron transporting material	T ₁ (kcal/mol)	Light emission wavelength (nm)	External quantum efficiency (%)
			Host	T ₁ (kcal/mol)	Light emitting material	T ₁ (kcal/mol)				
Example 1	α -NPD	50	CBP	66	I<-1	63	B-40	66	486	5.8
Example 2	α -NPD	50	A-10	71	K-1	63	B-40	66	487	14.5
Example 3	TPD	58	CBP	66	K-1	63	B-40	66	486	10.9
Example 4	TPD	58	A-10	71	K-1	63	B-40	66	486	16.5
Example 5	TPD	58	D-46	69	K-1	63	B-40	66	486	9.6
Example 6	TPD	58	C-71	70	K-1	63	B-40	66	487	8.9
Example 7	TPD	58	CBP	66	K-3	64	B-40	66	474	9.7
Example 8	TPD	58	A-10	71	K-3	64	B-40	66	473	10.0
Example 9	TPD	58	A-10	71	K-1	63	A-19	74	485	19.1
Example 10	TPD	58	A-10	71	K-3	64	A-19	74	473	12.9
Comparative Example 1	α -NPD	50	TPD	58	K-1	63	B-40	66	485	0.1
Comparative Example 2	TPD	58	TPD	58	K-3	64	B-40	66	---	0


[0192] As is clear from the results shown in Table 1, it is found that the light emitting element in which the T_1 level of the host material is higher than the T_1 level of the light emitting material could emit light with high efficiency. Further, it was also found that when the T_1 level of the layer adjacent to the light emitting layer is higher than the T_1 level of the light emitting material, emission of light with higher efficiency becomes possible. Particularly, in a case of the light emitting material which emitted in the blue region, emission with higher efficiency can be attained when the T_1 level of the host is higher than 70 kcal/mol (293.3 kJ/mol).

[0193] Similarly, also in applying the coating method to produce the light emitting element, the T_1 level of the material used to form the layer containing the light emitting material and/or the layer adjacent to the light emitting layer is made higher than the T_1 level of the light emitting material. This makes it possible to produce a light emitting element which can emit light with high efficiency. Also, the T_1 level of the material used to form the layer containing the light emitting material and/or the layer adjacent to the light emitting layer is made higher than 70 kcal/mol (293.3 kJ/mol) or more. This makes it possible to produce a light emitting element which can emit light with higher efficiency.

(Example 11)

[0194] A washed ITO substrate was placed in an evaporating apparatus and TPD was deposited on the substrate in a thickness of 50 nm. CBP (biscarbazolylbenzidine) and the compound R-1 were co-deposited thereon in a ratio of 1:17 in a thickness of 30 nm. The exemplified compound A-10 and exemplified compound K-3 were further co-deposited thereon in a ratio of 1:17 in a thickness of 2 nm, and the exemplified compound A-19 was still further deposited thereon in a thickness of 36 nm. A patterend mask (the emission area was designed to be 4 mm×5 mm) was placed on the organic thin film to deposit lithium fluoride in a thickness of 3 nm. Thereafter, aluminum was deposited in a thickness of 400 nm to produce a light emitting element.

Compound R-1

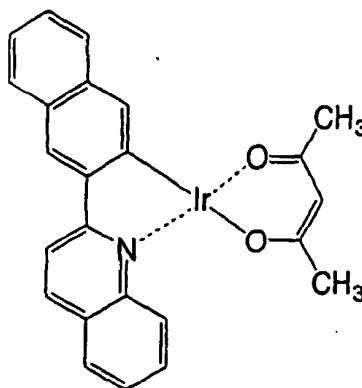

[0195] A fixed d.c. voltage was applied to the light emitting element obtained in Example 11 by using Source Measure Unit 2400 manufactured by Toyo Technica, making each element emit light to measure the illuminance by using a luminance meter BM-8 manufactured by Topcon and the light emission wavelength and CIE chromaticity coordinate by using a Spectrum Analyzer PMA-11 manufactured by Hamamatsu Photonics. As a result, white light emission having chromaticity coordinates (x,y)=(0.35, 0.33) was obtained, the maximum luminance was 75000 cd/m² and the external quantum efficiency was 15.4 %.

[0196] From the results of Example 11, the light emitting element using the compounds of the present invention can emit light with a high efficiency exceeding 15% even in a white light emitting element having conventionally emitted light with lower efficiency, and a light emitting element which can emit light of white having excellent color purity can be produced.


[0197] According to the present invention, it is possible to provide a light emitting element which can emit light in the blue region with high luminance efficiency, and a light emitting element which can emit light of white of high color purity with high luminance efficiency.

Claims

1. A light emitting element, comprising at least one organic layer containing the light-emitting layer between a pair of electrodes, wherein said at least one organic layer includes a layer comprising at least one compound represented

by the general formula (A):

General formula (A)

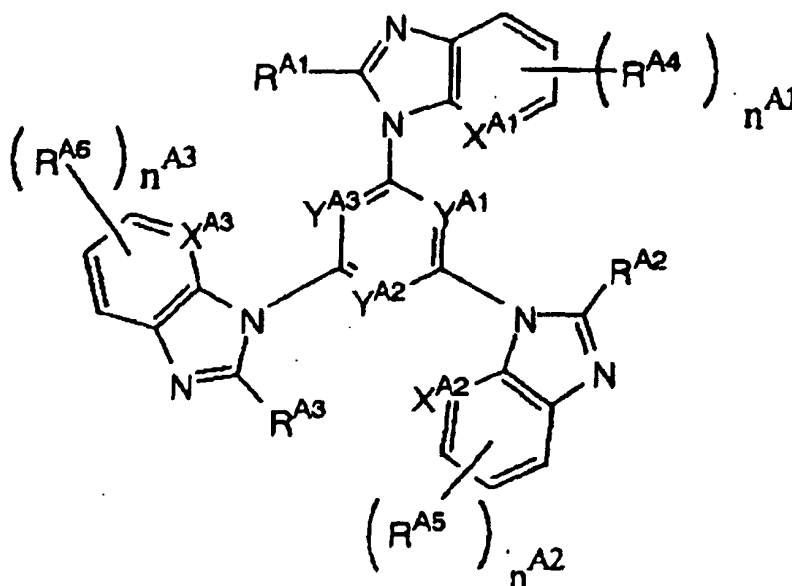

wherein R^{A1} , R^{A2} , and R^{A3} each represent a hydrogen atom or an aliphatic hydrocarbon group; R^{A4} , R^{A5} , and R^{A6} each represent a substituent; n^{A1} , n^{A2} , and n^{A3} each represent an integer of 0 to 3; X^{A1} , X^{A2} , and X^{A3} each represent a nitrogen atom or $C-R^X$ (R^X represents a hydrogen atom or a substituent); and Y^{A1} , Y^{A2} , and Y^{A3} each represent a nitrogen atom or $C-R^{YX}$ (R^{YX} represents a hydrogen atom or a substituent).

2. A light emitting element according to claim 1, wherein the light emitting layer contains a light emitting material and a host material and has a light emission maximum wavelength of 500 nm or less, and the minimum excitation triplet energy level of the host material is higher than that of the light emitting material.
3. A light emitting element according to claim 2, wherein the minimum excitation triplet energy level of said host material is from 1.05 times to 1.38 times the minimum excitation triplet energy level of said light emitting material.
4. A light emitting element according to claim 2 or 3, wherein the minimum excitation triplet energy level of said host material is from 68 kcal/mol to 90 kcal/mol.
5. A light emitting element according to any of claims 1 to 4, further comprising a layer which is disposed adjacent to said light emitting layer and contains an organic material, wherein the minimum excitation triplet energy level of said organic material is higher than the minimum excitation triplet energy level of each of materials which constitute said light emitting layer.
6. A light emitting element according to claim 5, wherein the minimum excitation triplet energy level of said organic material contained in the layer which is disposed adjacent to the light emitting layer is from 1.05 times to 1.38 times the minimum excitation triplet energy level of each of the materials which constitute said light emitting layer.
7. A light emitting element according to claim 5 or 6, wherein the minimum excitation triplet energy level of said organic material contained in the layer which is disposed adjacent to the light emitting layer is from 68 kcal/mol to 90 kcal/mol.
8. A light emitting element according to any of claims 2 to 7, wherein said host material is a compound represented by the following general formula (I):



wherein L^1 represents a bivalent or more linking group; Q^1 represents an aromatic hydrocarbon ring or an aromatic hetero ring; and n^1 represents a number of 2 or more, plural Q^1 may be the same or may be different from each other.


9. A light emitting element according to any of claims 5 to 8, wherein said organic material contained in the layer which is disposed adjacent to said light emitting layer is a compound represented by the following general formula (II) :



wherein L^2 represents a bivalent or more linking group; Q^2 represents an aromatic hydrocarbon ring or an aromatic hetero ring; and n^2 represents a number of 2 or more, plural Q^2 may be the same or may be different from each other.

10. A light emitting element according to any of claims 5 to 9, wherein said organic material contained in the layer which is disposed adjacent to the light emitting layer is an azole compound represented by the general formula (A):

General formula (A)

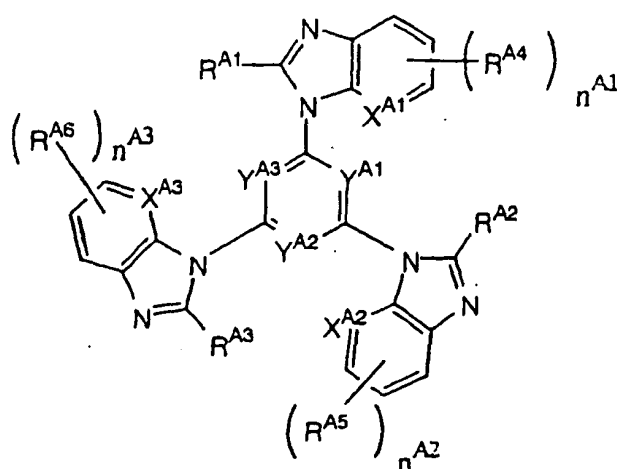


wherein R^{A1} , R^{A2} , and R^{A3} each represent a hydrogen atom or an aliphatic hydrocarbon group; R^{A4} , R^{A5} , and R^{A6} each represent a substituent; n^{A1} , n^{A2} , and n^{A3} each represents an integer of 0 to 3; X^{A1} , X^{A2} , and X^{A3} each represent a nitrogen atom or $C-R^X$ (R^X represents a hydrogen atom or a substituent); and Y^{A1} , Y^{A2} , and Y^{A3} each represent a nitrogen atom or $C-R^{YX}$ (R^{YX} represents a hydrogen atom or a substituent).

11. A light emitting element according to any of claims 2 to 10, wherein the light emitting material is a transition metal complex.
12. A light emitting element according to any of claims 2 to 11, wherein the light emitting layer comprises 0.1 % by weight to 20 % by weight of the light emitting material with respect to the weight of the host material.
13. A light emitting element according to any of claims 2 to 12, wherein the light emitting layer has a thickness of from 1 nm to 5 μm .

Patentansprüche

1. Lichtemittierendes Element, umfassend wenigstens eine die lichtemittierende Schicht enthaltende organische Schicht zwischen einem Paar von Elektroden, wobei die wenigstens eine organische Schicht eine Schicht einschließt, die wenigstens eine Verbindung umfasst, die durch die allgemeine Formel (A) wiedergegeben ist:

Allgemeine Formel (A)

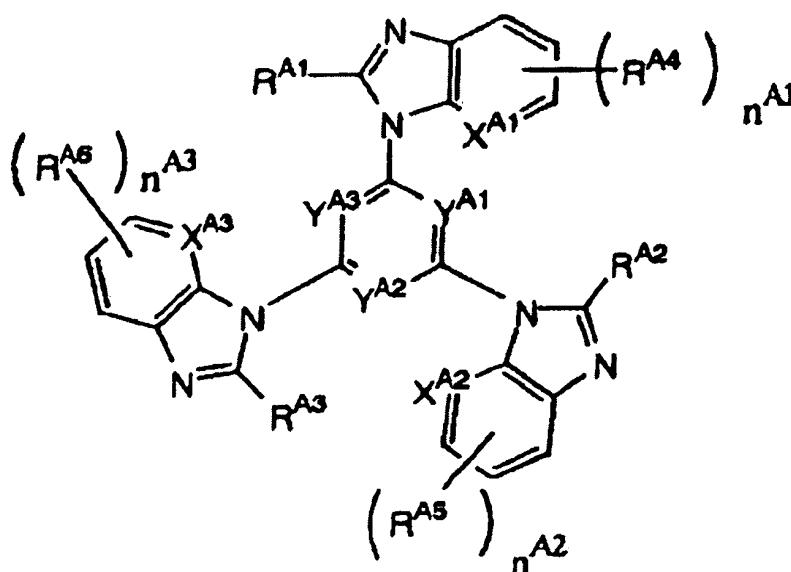

worin R^{A1} , R^{A2} und R^{A3} jeweils ein Wasserstoffatom oder eine aliphatische Kohlenwasserstoffgruppe bedeuten; R^{A4} , R^{A5} und R^{A6} jeweils einen Substituenten bedeuten; n^{A1} , n^{A2} und n^{A3} jeweils eine ganze Zahl von 0 bis 3 bedeuten; X^{A1} , X^{A2} und X^{A3} jeweils ein Stickstoffatom oder $C-R^X$ bedeuten (R^X bedeutet ein Wasserstoffatom oder einen Substituenten); und Y^{A1} , Y^{A2} und Y^{A3} jeweils ein Stickstoffatom oder $C-R^{YX}$ bedeuten (R^{YX} bedeutet ein Wasserstoffatom oder einen Substituenten).


2. Lichtemittierendes Element nach Anspruch 1, wobei die lichtemittierende Schicht ein lichtemittierendes Material und ein Wirtsmaterial enthält und eine maximale Lichtemissions-Wellenlänge (light emission maximum wavelength) von 500 nm oder weniger aufweist und das minimale Anregungs-Triplett-Energieniveau (minimum excitation triplet energy level) des Wirtsmaterials höher ist als das des lichtemittierenden Materials.
3. Lichtemittierendes Element nach Anspruch 2, wobei das minimale Anregungs-Triplett-Energieniveau des Wirtsmaterials das 1,05-fache bis 1,38-fache des minimalen Anregungs-Triplett-Energieniveaus des lichtemittierenden Materials beträgt.
4. Lichtemittierendes Element nach Anspruch 2 oder 3, wobei das minimale Anregungs-Triplett-Energieniveau des Wirtsmaterials 68 kcal/mol bis 90 kcal/mol beträgt.
5. Lichtemittierendes Element nach einem der Ansprüche 1 bis 4, außerdem umfassend eine Schicht, welche an die lichtemittierende Schicht angrenzend angeordnet ist und ein organisches Material enthält, wobei das minimale Anregungs-Triplett-Energieniveau des organischen Materials höher ist als das minimale Anregungs-Triplett-Energieniveau von jedem der Materialien, welche die lichtemittierende Schicht bilden.
6. Lichtemittierendes Element nach Anspruch 5, wobei das minimale Anregungs-Triplett-Energieniveau des organischen Materials, das in der Schicht enthalten ist, welche an die lichtemittierende Schicht angrenzend angeordnet ist, das 1,05-fache bis 1,38-fache des minimalen Anregungs-Triplett-Energieniveaus von jedem der Materialien beträgt, welche die lichtemittierende Schicht bilden.
7. Lichtemittierendes Element nach Anspruch 5 oder 6, wobei das minimale Anregungs-Triplett-Energieniveau des organischen Materials, das in der Schicht enthalten ist, welche an die lichtemittierende Schicht angrenzend angeordnet ist, 68 kcal/mol bis 90 kcal/mol beträgt.
8. Lichtemittierendes Element nach einem der Ansprüche 2 bis 7, wobei das Wirtsmaterial eine Verbindung ist, die durch die folgende allgemeine Formel (I) wiedergegeben ist:



worin L^1 eine zweiwertige oder mehr als zweiwertige Verbindungsgruppe bedeutet;

Q^1 einen aromatischen Kohlenwasserstoffring oder einen aromatischen Heteroring bedeutet; und n^1 eine Zahl von 2 oder mehr bedeutet, wobei mehrere Q^1 gleich oder voneinander verschieden sein können.

9. Lichtemittierendes Element nach einem der Ansprüche 5 bis 8, wobei das organische Material, das in der Schicht enthalten ist, welche an die lichtemittierende Schicht angrenzend angeordnet ist, eine Verbindung ist, die durch die folgende allgemeine Formel (II) wiedergegeben ist:




worin L^2 eine zweiwertige oder mehr als zweiwertige Verbindungsgruppe bedeutet;

Q^2 einen aromatischen Kohlenwasserstoffring oder einen aromatischen Heteroring bedeutet; und n^2 eine Zahl von 2 oder mehr bedeutet, wobei mehrere Q^2 gleich oder voneinander verschieden sein können.

10. Lichtemittierendes Element nach einem der Ansprüche 5 bis 9, wobei das organische Material, das in der Schicht enthalten ist, welche an die lichtemittierende Schicht angrenzend angeordnet ist, eine Azolverbindung ist, die durch die allgemeine Formel (A) wiedergegeben ist:

Allgemeine Formel (A)

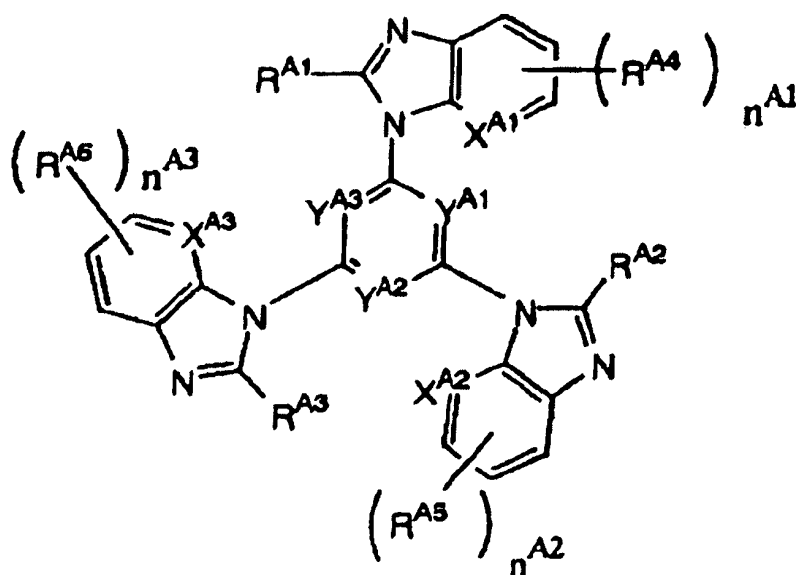


worin R^{A1} , R^{A2} und R^{A3} jeweils ein Wasserstoffatom oder eine aliphatische Kohlenwasserstoffgruppe bedeuten; R^{A4} , R^{A5} und R^{A6} jeweils einen Substituenten bedeuten; n^{A1} , n^{A2} und n^{A3} jeweils eine ganze Zahl von 0 bis 3 bedeuten; X^{A1} , X^{A2} und X^{A3} jeweils ein Stickstoffatom oder C- R^X bedeuten (R^X bedeutet ein Wasserstoffatom oder einen Substituenten); und Y^{A1} , Y^{A2} und Y^{A3} jeweils ein Stickstoffatom oder C- R^{YX} bedeuten (R^{YX} bedeutet ein Wasserstoffatom oder einen Substituenten).

11. Lichtemittierendes Element nach einem der Ansprüche 2 bis 10, wobei das lichtemittierende Material ein Übergangsmetallkomplex ist.
12. Lichtemittierendes Element nach einem der Ansprüche 2 bis 11, wobei die lichtemittierende Schicht 0,1 Gew.-% bis 20 Gew.-% des lichtemittierenden Materials, bezogen auf das Gewicht des Wirtsmaterials, umfasst.
13. Lichtemittierendes Element nach einem der Ansprüche 2 bis 12, wobei die lichtemittierende Schicht eine Dicke von 1 nm bis 5 μ m aufweist.

Revendications

1. Élément électroluminescent, comprenant au moins une couche organique contenant la couche électroluminescente entre une paire d'électrodes, dans lequel ladite au moins une couche organique inclut une couche comprenant au moins un composé représenté par la formule générale (A) :

Formule générale (A)

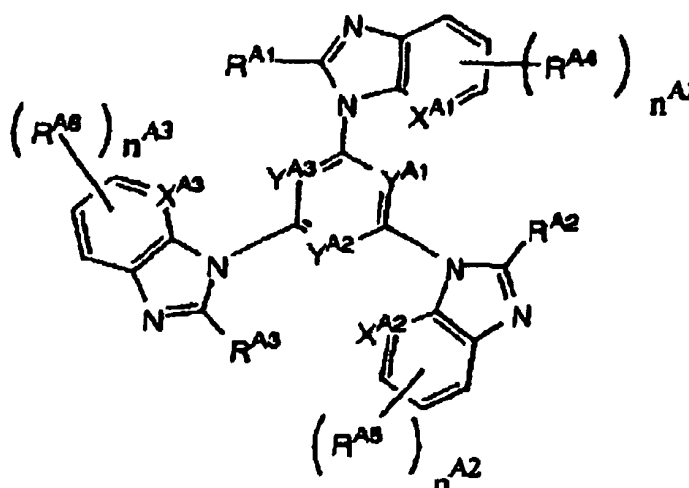

dans laquelle R^{A1} , R^{A2} et R^{A3} représentent chacun un atome d'hydrogène ou un groupe hydrocarbure aliphatique ; R^{A4} , R^{A5} et R^{A6} représentent chacun un substituant ; n^{A1} , n^{A2} et n^{A3} représentent chacun un entier de 0 à 3, X^{A1} , X^{A2} et X^{A3} représentent chacun un atome d'azote ou C- R^X (R^X représente un atome d'hydrogène ou un substituant) ; et Y^{A1} , Y^{A2} et Y^{A3} représentent chacun un atome d'azote ou C- R^{YX} (R^{YX} représente un atome d'hydrogène ou un substituant).

2. Élément électroluminescent selon la revendication 1, dans lequel la couche électroluminescente contient un matériau électroluminescent et un matériau hôte et présente une longueur d'onde maximale d'émission de lumière de 500 nm ou moins, et le niveau d'énergie de triplet d'excitation minimal du matériau hôte est supérieur à celui du matériau électroluminescent.
3. Élément électroluminescent selon la revendication 2, dans lequel le niveau d'énergie de triplet d'excitation minimal dudit matériau hôte va de 1,05 fois à 1,38 fois le niveau d'énergie de triplet d'excitation minimal dudit matériau électroluminescent.
4. Élément électroluminescent selon la revendication 2 ou 3, dans lequel le niveau d'énergie de triplet d'excitation minimal dudit matériau hôte va de 68 kcal/mol à 90 kcal/mol.
5. Élément électroluminescent selon l'une quelconque des revendications 1 à 4, comprenant en outre une couche qui est disposée de façon adjacente à ladite couche électroluminescente et contient un matériau organique, dans lequel le niveau d'énergie de triplet d'excitation minimal dudit matériau organique est supérieur au niveau d'énergie de triplet d'excitation minimal de chacun des matériaux qui constituent ladite couche électroluminescente.
6. Élément électroluminescent selon la revendication 5, dans lequel le niveau d'énergie de triplet d'excitation minimal dudit matériau organique contenu dans la couche qui est disposée de manière adjacente à la couche électroluminescente va de 1,05 fois à 1,38 fois le niveau d'énergie de triplet d'excitation minimal de chacun des matériaux qui constituent ladite couche électroluminescente.
7. Élément électroluminescent selon la revendication 5 ou 6, dans lequel le niveau d'énergie de triplet d'excitation

minimal dudit matériau organique contenu dans la couche qui est disposée de manière adjacente à la couche électroluminescente, va de 68 kcal/mol à 90 kcal/mol.

8. Élément électroluminescent selon l'une quelconque des revendications 2 à 7, dans lequel ledit matériau hôte est un composé représenté par la formule générale (I) suivante :



dans laquelle L^1 représente un groupe de liaison bivalent ou plus ; Q^1 représente un cycle hydrocarbure aromatique ou un hétérocycle aromatique ; et n^1 représente un nombre de 2 ou plus, plusieurs Q^1 peuvent être identiques ou différents les uns des autres.


9. Élément électroluminescent selon l'une quelconque des revendications 5 à 8, dans lequel ledit matériau organique contenu dans la couche qui est disposée de manière adjacente à ladite couche électroluminescente est un composé représenté par la formule générale (II) suivante :



dans laquelle L^2 représente un groupe de liaison bivalent ou plus ; Q^2 représente un cycle hydrocarbure aromatique ou un hétérocycle aromatique ; et n^2 représente un nombre de 2 ou plus, plusieurs Q^2 peuvent être identiques ou différents les uns des autres.

10. Élément électroluminescent selon l'une quelconque des revendications 5 à 9, dans lequel ledit matériau organique contenu dans la couche qui est disposée de manière adjacente à ladite couche électroluminescente est un composé azole représenté par la formule générale (A) :

Formule générale (A)

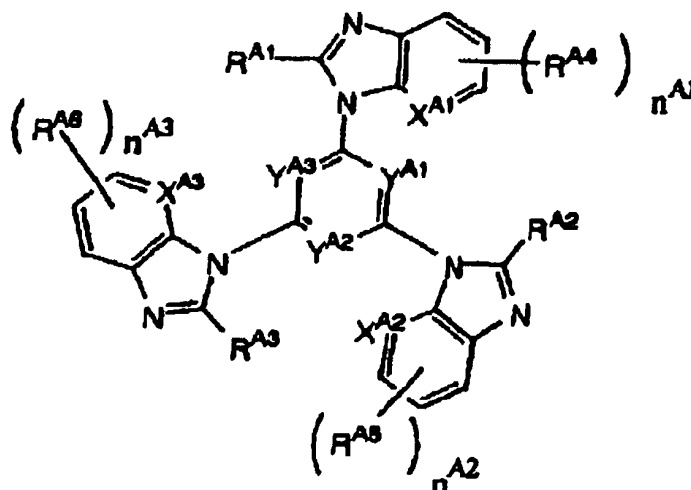

dans laquelle R^{A1} , R^{A2} et R^{A3} représentent chacun un atome d'hydrogène ou un groupe hydrocarbure aliphatique ; R^{A4} , R^{A5} et R^{A6} représentent chacun un substituant ; n^{A1} , n^{A2} et n^{A3} représentent chacun un entier de 0 à 3, X^{A1} , X^{A2} et X^{A3} représentent chacun un atome d'azote ou C- R^X (R^X représente un atome d'hydrogène ou un substituant) ; et Y^{A1} , Y^{A2} et Y^{A3} représentent chacun un atome d'azote ou C- R^{YX} (R^{YX} représente un atome d'hydrogène ou un substituant).

11. Élément électroluminescent selon l'une quelconque des revendications 2 à 10, dans lequel le matériau électroluminescent est un complexe de métal de transition.

EP 1 175 128 B1

12. Élément électroluminescent selon l'une quelconque des revendications 2 à 11, dans lequel la couche électroluminescente comprend 0,1 % en poids à 20 % en poids du matériau électroluminescent par rapport au poids du matériau hôte.

5 **13.** Élément électroluminescent selon l'une quelconque des revendications 2 à 12, dans lequel la couche électroluminescente a une épaisseur de 1 nm à 5 μm .

10

15

20

25

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0825804 A [0004]
- JP 11370353 A [0112]
- JP 2000287177 A [0112]
- JP 2000028178 A [0112]
- JP 2000299495 A [0112]
- JP 2000398907 A [0112]
- JP 2001033684 A [0112]
- JP 2001045476 A [0112]

Non-patent literature cited in the description

- **Tang et al.** *Applied Physics Letters*, 1987, vol. 51, 913 [0003]
- *Applied Physics Letters*, 1999, vol. 75, 4 [0004]
- **Akio Yamamoto.** *Yûki Kinzoku Kagaku, Kiso to Ôyô. Shôkabô*, 1982, 150, 232 [0113]
- **H. Yersin.** *Photochemistry and Photophysics of Coordination Compounds.* New York: Springer-Verlag, 1987, 71-77135-146 [0113]
- **H. Yersin.** *Photochemistry and Photophysics of Coordination Compounds.* Springer-Verlag, 1987 [0120] [0130]
- **Akio Yamamoto.** *Yûki Kinzoku Kagaku, Kiso to Ôyô. Shôkabô*, 1982 [0120]
- **Akio Yamamoto.** *Yûki Kinzoku Kagaku, Kiso to ôyô. Shôkabô*, 1982 [0130]

专利名称(译)	发光元素和唑类化合物		
公开(公告)号	EP1175128B1	公开(公告)日	2010-09-22
申请号	EP2001117288	申请日	2001-07-17
[标]申请(专利权)人(译)	富士摄影胶片公司		
申请(专利权)人(译)	富士胶片有限公司.		
当前申请(专利权)人(译)	富士胶片株式会社		
[标]发明人	ISE TOSHIHIRO C O FUJI PHOTO FILM CO LTD IGARASHI TATSUYA C O FUJI PHOTO FILM CO LTD MIYASHITA YOUSUKE C O FUJI PHOTO FILM CO LTD FUJIMURA HIDETOSHI C O FUJI PHOTO FILM CO LTD XUEPENG QIU C O FUJI PHOTO FILM CO LTD		
发明人	ISE, TOSHIHIRO, C/O FUJI PHOTO FILM CO., LTD. IGARASHI, TATSUYA, C/O FUJI PHOTO FILM CO., LTD. MIYASHITA, YOUSUKE, C/O FUJI PHOTO FILM CO., LTD. FUJIMURA, HIDETOSHI, C/O FUJI PHOTO FILM CO., LTD. MISHIMA, MASAYUKI, C/O FUJI PHOTO FILM CO., LTD. OKADA, HISASHI, C/O FUJI PHOTO FILM CO., LTD. XUEPENG, QIU, C/O FUJI PHOTO FILM CO., LTD.		
IPC分类号	H01L51/00 H05B33/14 C09K11/06 C07D403/04 C07D403/10 H01L51/30 H01L51/50		
CPC分类号	H01L51/0085 C09K11/06 H01L51/0035 H01L51/0038 H01L51/004 H01L51/0043 H01L51/005 H01L51/0059 H01L51/0061 H01L51/0062 H01L51/0067 H01L51/0068 H01L51/007 H01L51/0071 H01L51/0072 H01L51/008 H01L51/0081 H01L51/0094 H01L51/5016 H01L2251/308 Y10S428/917 Y10T428/24942 Y10T428/265		
优先权	2000216339 2000-07-17 JP		
其他公开文献	EP1175128A2 EP1175128A3		
外部链接	Espacenet		

摘要(译)

发光元件技术领域本发明涉及一种发光元件，其至少包括含有发光材料和主体材料并且发光最大波长为500nm或更小的发光层，其中主体材料的最小激发三重态能级更高。比发光材料的最小激发三重态能级。优选地，其中主体材料的最小激发三重态能级是发光材料的最小激发三重态能级的1.05倍至1.38倍的发光元件，以及其中最小激发三重态能级的发光元件。提供的主体材料为68kcal / mol至90kcal / mol。

General formula (A)

