

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 294 823 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**13.12.2006 Bulletin 2006/50**

(21) Application number: **02705589.6**

(22) Date of filing: **18.03.2002**

(51) Int Cl.:  
**C09K 11/06 (2006.01) C07C 13/72 (2006.01)**

(86) International application number:  
**PCT/KR2002/000458**

(87) International publication number:  
**WO 2002/088274 (07.11.2002 Gazette 2002/45)**

### (54) **DOUBLE-SPIRO ORGANIC COMPOUNDS AND ELECTROLUMINESCENT DEVICES**

ORGANISCHE VERBINDUNG MIT DOPPELTER SPIRO-KONFIGURATION UND  
ELEKTROLUMINESZENTE VORRICHTUNGEN

COMPOSES ORGANIQUES A CONFIGURATION SPIRO DOUBLE ET DISPOSITIFS  
ELECTROLUMINESCENTS

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**

(30) Priority: **27.04.2001 KR 2001023039**  
**27.04.2001 KR 2001023038**

(43) Date of publication of application:  
**26.03.2003 Bulletin 2003/13**

(60) Divisional application:  
**05020697.8 / 1 645 552**

(73) Proprietor: **LG Chem, Ltd.**  
**Seoul 150-721 (KR)**

(72) Inventors:  
• **KIM, Kong-Kyeum**  
**Taejeon-city 305-761 (KR)**  
• **SON, Se-Hwan**  
**Taejeon-city 305-340 (KR)**  
• **YOON, Seok-Hee**  
**Yuseong-ku,**  
**Taejeon-city 305-751 (KR)**  
• **BAE, Jae-Soon**  
**Daejeon-city 305-761 (KR)**

- **LEE, Youn-Gu**  
**Seoul 121-836 (KR)**
- **IM, Sung-Gap**  
**435-055 Gunpo-city, Gyeonggi-do (KR)**
- **KIM, Ji-Eun**  
**Yuseong-ku,**  
**Taejeon-city 305-340 (KR)**
- **LEE, Jae-Chol**  
**Yuseong-ku,**  
**Taejeon-city 305-340 (KR)**

(74) Representative: **Casalonga, Axel**  
**Bureau Casalonga & Josse**  
**Bayerstrasse 71/73**  
**80335 München (DE)**

(56) References cited:  
**JP-A- 11 273 863 US-A- 3 869 363**

- **CLARKSON R.G. ET AL.: 'Spirans with four  
aromatic radicals on the spiro carbon atom' THE  
JOURNAL OF THE AMERICAN CHEMICAL  
SOCIETY vol. LII, May 1930 - August 1930, pages  
2881 - 2891, XP002958617**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**Background of the InventionField of the Invention

**[0001]** The present invention generally relates to organic electroluminescence. More particularly, the present invention pertains to novel organic compounds having electroluminescent (hereinafter referred to as "EL") characteristics and an organic EL device using the organic EL compounds.

Description of the Related Art

**[0002]** Organic electroluminescence is one of the instances in which electric current is converted into visible light by internal processes of certain organic molecules. Organic molecules having either fluorescent or phosphorescent characteristics generate light emission upon the application of electric current, although they differ in their internal processes and response time. Both organic fluorescent and phosphorescent molecules are referred to as organic EL or light-emitting molecules.


**[0003]** The organic EL technology has been used in luminescent displays which produce their own light, unlike liquid crystal displays, which require an independent light source. Various colors can be generated by using an individual color-generating compound or combining compounds generating basic color elements. This technology is advantageous over LCD technology in its low power consumption, faster response time, higher brightness level, unlimited viewing angle and thinner design.

**[0004]** A basic construction of an organic EL device includes two opposing electrodes, i.e., a cathode and an anode, and an intervening layer containing an organic light-emitting material. When applying an electric voltage between the electrodes, electrons and holes are injected from the cathode and anode, respectively, into the intervening layer. The holes and electrons recombine at organic light-emitting molecules in the intervening layer. Recombined pairs of electrons and holes, namely excitons, move around carrying the energy generated by the recombination and transfer the energy to other organic light-emitting molecules, particularly to those having a smaller band gap near the location of their recombination. The transferred energy is used to excite valence electrons of the organic light-emitting molecules, which generates photons when the electrons return to their ground state.

**[0005]** In order to improve energy efficiency, multiple-layered organic EL devices have been suggested. Generally, multiple-layered organic EL devices have one or more layers functioning as vehicles for hole injection, hole transportation, light emission, electron transportation, and electron injection. One or more layers of the multiple-layered constructions may have more than one function. Many organic compounds have been known to have physical properties and characteristics for use in such organic EL devices. However, there exists a need for new organic compounds for use in organic electroluminescence in order to improve various aspects of organic EL devices or the manufacture of such devices.

Summary of the Invention

**[0006]** One aspect of the present invention provides a chemical compound of Chemical Formula I:

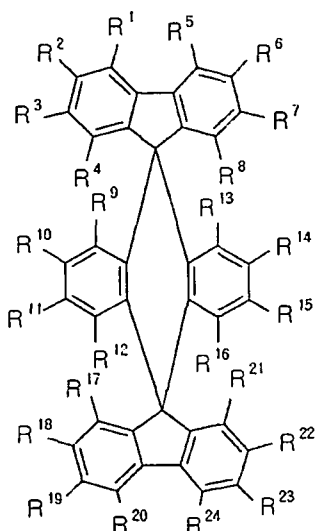

Chemical Formula 1

R1 through R24 are substituent groups, identical or different, but not all of R1 through R24 are hydrogen. Examples of the substituent groups R1-R24 will be described in detail. Among substituent groups available for R1-R24, one or more of R1-R24 are selected from the aryl group consisting of phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl, and heteroaryl, which are either substituted or unsubstituted. The aryl groups are further substituted with one or more phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl or heteroaryl, which are either substituted or unsubstituted. One or more of the R1-R24 are selected from the heteroaryl group consisting of thiophenyl, thiazolyl, oxazolyl, imidazolyl, and pyrazinyl, either substituted or unsubstituted. One or more of R1-R24 are selected from the group consisting of amines with at least one aryl substituent and aryl including phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl and heteroaryl. At least one of R1-R24 is anthracene or heteroaryl. The substituent groups R1 through R24 can be substituted by one or more organic moieties satisfying General Formula I. One or more of the R3, R7, R10, R11, R14, R15, R18, and R22 are substituted with non-hydrogen substituent groups. One or more pairs of R3 and R7; R18 and R22; R10 and R15; and R11 and R14 are substituted with non-hydrogen substituent groups.

**[0007]** The chemical compound of General Formula 1 is selected from the group consisting of Chemical Compounds 1-11, 100-137, 200-222, 300-308, and 400-413 as will be shown later. The compound has a melting point above about 300 °C. The compound has a band-gap corresponding to visible light emission. The band-gap for the visible light emission is from about 1.8 eV to about 3.5 eV. The band-gap corresponds to blue, green or red light emission. The compound has a hole-transporting property. Hole mobility in the compound is about  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  or greater. The compound has an electron-transporting property. Electron mobility in the compound is about  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  or greater. The compound has a hole-injecting property. The compound has the highest occupied molecular orbital (HOMO) level from about -4.0 eV to about -6.0 eV. The compound has an electron-injecting property. The compound has the lowest unoccupied molecular orbital (LUMO) level from about -2.5 eV to about -4.0 eV.

**[0008]** Another aspect of the present invention provides a light-emitting material comprising one or more of the chemical compounds of General Formula I. The chemical compounds are selected from the group consisting of Chemical Compounds 100-137, 200-222, and 400-413.

**[0009]** Another aspect of the present invention provides a hole-transporting material comprising one or more of the chemical compounds of General Formula

I. The chemical compounds are selected from the group consisting of Chemical Compounds 300-308 and 400-413.

**[0010]** Still another aspect of the present invention provides an electron-transporting material comprising one or more of the chemical compounds of General Formula 1. The chemical compounds are selected from the group consisting of Chemical Compounds 200-222.

**[0011]** Further, the present invention provides a solid deposition of one or more chemical compounds for use in organic electroluminescence. The chemical compounds comprise one or more double-spiro compounds of General Formula 1. The double-spiro compounds comprise at least three substantially planar organic moieties configured such that one

planar moiety is interveningly located between the other two planar moieties and that the at least three planar moieties have substantially no overlap with one another; wherein the intervening planar moiety shares an atom with each of the two neighboring planar moieties; wherein the intervening planar moiety is substantially perpendicular to the two neighboring planar moieties; wherein the at least three planar moieties may be the same or different from each other; and wherein each of the planar moiety may be substituted with one or more non-planar moieties.

**[0012]** In the solid deposition, one or more double-spiro chemical compounds are in an amorphous form. The one or more chemical compounds further comprise one or more non-double-spiro compounds acceptable in organic electroluminescence. The one or more non-double-spiro compounds comprise a light-emitting compound. The non-double-spiro light-emitting compound has the band gap smaller than the band gap of the double-spiro compound. The non-double-spiro light-emitting compound has the band gap greater than the band gap of the double-spiro compound. The non-double-spiro light-emitting compound is either fluorescent or phosphorescent compound. The solid deposition is in the form of a thin film. The solid deposition comprises one or more layers. The double-spiro compound has one or more properties selected from the group consisting of visible light emission, electron transportation, electron injection, hole transportation, and hole injection.

**[0013]** In the double-spiro compounds, the atoms shared with the neighboring planar moieties are apart from each other in the intervening planar moieties. Two or more rings constitute at least one of the substantially planar moieties, and wherein the two or more rings are fused by sharing two or more atoms to form a substantially rigid plane. Each planar moiety is isolated from conjugation with its neighboring planar moieties.

**[0014]** The double-spiro compound has a melting point above about 300 °C. In General Formula I, the R1 through R24 are one or more substituents selected from the group consisting of hydrogen atom, halogen atoms, substituted or unsubstituted alkyl groups having 1 to 18 carbon atoms, substituted or unsubstituted aryl groups having 6 to 24 carbon atoms, alkoxyl groups having 1 to 18 carbon atoms, substituted or unsubstituted heterocyclic or heteroaryl groups, substituted vinyl groups, amino group, amine groups, nitrile groups, nitro groups, formyl group, alkanoyl groups, substituted or unsubstituted carbazoles, alkyl sulfide groups, and aryl sulfide groups. The double-spiro compound are selected from the group consisting of Chemical Compounds 1-12, 100-137, 200-222, 300-308, and 400-413.

**[0015]** The one or more double-spiro compounds have a band gap corresponding to visible light emission. The band-gap for the visible light emission is from about 1.8 eV to about 3.5 eV. The band-gap corresponds to blue, green or red light emission. The double-spiro compounds have a hole-transporting property. Hole mobility in the one or more double-spiro compounds is about  $1 \times 10^{-7}$  cm<sup>2</sup>/Vs or greater. The double-spiro compounds have a electron-transporting property. Electron mobility in the one or more double-spiro compounds is about  $1 \times 10^{-7}$  cm<sup>2</sup>/Vs or greater. The double-spiro compounds have a hole-injecting property. The double-spiro compounds have the highest occupied molecular orbital (HOMO) level from about -4.0 eV to about 6.0 eV. The double-spiro compounds have a electron-injecting property. The double-spiro compounds has the lowest unoccupied molecular orbital (LUMO) level from about -2.5 eV to about 4.0 eV.

**[0016]** Still another aspect of the present invention provides a method of making the discussed solid deposition. The method comprises providing a support; and depositing one or more chemical compounds comprising one or more of the double-spiro compounds of General Formula 1. The deposition of one or more chemical compounds comprises physical vapor deposition. Also, the deposition of one or more chemical compounds comprises forming multiple layers of different compositions of the one or more chemical compounds.

**[0017]** Still another aspect of the present invention provides an organic electroluminescent ("EL") device, which comprises an anode; a cathode; and the solid deposition located between the anode and cathode, wherein the solid deposition comprises one or more layers comprising a light-emitting layer. The light-emitting layer comprises the one or more double-spiro compounds of General Formula 1 having the band gap corresponding to visible light emission. The band-gap for the visible light emission is from about 1.8 eV to about 3.5 eV. The light-emitting layer comprises one or more fluorescent or phosphorescent materials. The organic EL device is supported by a substrate, and wherein the substrate contacts either the anode or the cathode. The one or more layers comprise at least one material having one or more properties selected from the group consisting of electron injection, electron transportation, light emission, hole transportation, and hole injection. The light-emitting layer comprises one or more selected from the group consisting of Chemical Compounds 100-137, 200-222, and 400-413. The light-emitting layer further comprises one or more non-double-spiro light-emitting, compounds. The non-double-spiro light-emitting compound has the band gap smaller than the band gap of the double-spiro compound. The non-double-spiro light-emitting compound has the band gap greater than the band gap of the double-spiro compound. The non-double-spiro light-emitting compound is either fluorescent or phosphorescent compound. The one or more layers comprise at least one of the electron-injecting and electron-transporting layers. The at least one of the electron-injecting and electron-transporting layers comprises Chemical Compounds 200-222. The one or more layers comprise at least one of the hole-injecting and hole-transporting layers. The at least one of the hole-injecting and hole-transporting layers comprises Chemical Compounds 300-308 and 400-413.

**[0018]** A still further aspect of the present invention provides an electronic device comprising a display, wherein the display comprises the organic EL device as discussed.

**[0019]** A still further aspect of the present invention provides a method of generating visible light from the organic EL

device as discussed above. The method comprises applying electric power between the anode and cathode of the device; the cathode injecting electrons toward the light-emitting layer; the anode injecting holes toward the light-emitting layer; and allowing recombination of at least part of the injected electrons and holes in the light-emitting layer, thereby generating visible light from the light-emitting layer. The light-emitting layer comprises the one or more double-spiro compounds of General Formula I having a light-emitting property. The light-emitting layer further comprises one or more non-double-spiro light-emitting compounds. The one or more layers comprises the double-spiro compound having one or more properties selected from the group consisting of visible light emission, electron transportation, electron injection, hole transportation, and hole injection.

**[0020]** A still further aspect of the present invention provides a method of manufacturing the organic EL device as discussed above. The method comprises: providing a substrate; forming a first conductive layer; depositing the one or more chemical compounds comprising one or more of the double-spiro compounds of General Formula 1 so as to form the solid deposition comprising the light-emitting layer; and forming a second conductive layer, wherein either of the first and second conductive layers corresponds to the anode or cathode. The formation of the light-emitting layer comprises depositing one or more of the double-spiro compounds of General Formula 1 having a light-emitting property. The formation of the light-emitting layer comprises co-depositing one or more non-double-spiro light-emitting compounds. The deposition of the one or more chemical compounds further comprises forming layers having one or more functions selected from the group consisting of visible light emission, electron transportation, electron injection, hole transportation, and hole injection. The formation of the layers having one or more functions comprises depositing one or more of the double-spiro compound of General Formula 1. The formation of the layers having one or more functions comprises depositing one or more non-double-spiro compounds.

#### Brief Description of the Drawings

##### **[0021]**

Figures 1-6 illustrate simplified cross-sectional views of various exemplary constructions of organic EL devices in accordance with the present invention.

Figure 7 is a spectrum of light emission from the organic EL device manufactured in Example 42.

Figure 8 is a spectrum of light emission from the organic EL device manufactured in Example 45.

Figure 9 is a spectrum of light emission from the organic EL device manufactured in Example 51.

#### Detailed Description of the Preferred Embodiment

**[0022]** Now the various aspects of the present invention will be discussed in more detail. It is to be understood at the outset of the description, which follows that persons of skill in the appropriate arts may modify the invention here described while still achieving the favorable results of this invention. Accordingly, the following description is to be understood as being a broad, teaching disclosure directed to persons of skill in the appropriate arts, and not as limiting upon the present invention.

#### Considerations for new organic EL materials

**[0023]** The present inventors have invented a group of new organic EL compounds. In the course of the research for new organic EL compounds, the inventors considered various factors relating to the applicability of chemical compounds to the manufacturing of organic EL devices. These factors include, among other things, electroluminescence of candidate chemical compounds, sublimability of the compounds under given manufacturing conditions, thermal stability of thin film made of the compounds, etc.

**[0024]** The electroluminescence of compounds is preferred although it is not always necessary for compounds to be used in organic EL devices. In order for an organic compound to generate visible light or to host another light-emitting compound, however, the organic compound needs to have its own electroluminescence. Although certain organic EL compounds have common functional groups or structural similarities, there is not a general rule as to what structures or elements of organic compounds would secure electroluminescence. Thus, it is difficult to find completely new structured organic EL compounds.

**[0025]** Not only must the compounds electroluminesce, but their colors of emission and efficiency of electroluminescence are also important. The colors and efficiency are considered with other properties of the compounds in determining what functions the organic EL compound can do in organic EL devices. For example, a compound emitting blue color alone may form a layer emitting blue light. Also, the blue light-emitting compound can be used as a blue light-emitting dopant or as a host material for hosting various light-emitting dopants in a full color display. Also, efficiency of electroluminescence may be relevant to the consideration of whether the compound is to be used as a host or a dopant.

**[0026]** Thermal stability of organic EL devices is a very important consideration. Quality of organic EL devices may deteriorate, as they happen to be subject to a high temperature, for example in a car heated by sunlight. Generally, organic EL devices have organic compounds in the form of amorphous thin films. The amorphous form of the compounds may crystallize when the temperature goes up above the glass transition temperature of the compounds. Even partial crystallization of the compounds may cause an electrical short between electrodes and result in the loss of electroluminescence. Crystallization in the amorphous films may also occur during the manufacturing process because it involves a high temperature. If crystallization occurs during the manufacturing, the very new products may have defects in the electroluminescence.

**[0027]** In order to avoid thermal crystallization of organic compounds, the glass transition temperature of the compounds must be higher than a temperature to which the deposited thin film can possibly be subjected. Generally, organic EL compounds having a glass transition temperature of about 120°C or above are sufficient for use in organic EL devices. As glass transition temperature of a compound has good correlation with the melting point thereof, melting point is often used as a reference instead of glass transition temperature. The relationship between melting point and glass transition temperature is set forth in *Molecular Design for Nonpolymeric Organic Dye Glasses with Thermal Stability*, J. Phys. Chem. 97, 6240-6248 (1993), which is hereby incorporated herein by reference.

**[0028]** Also, crystallinity of the organic compounds is relevant to the crystallization of organic EL compounds in thin films and therefore the stability of the organic EL devices. The crystallinity of a compound may be defined as the degree of crystallization or its tendency to crystallize. When an organic compound has high crystallinity, it is more likely to crystallize under a given condition than others having low crystallinity. Accordingly, organic compounds having low crystallinity are preferred. It has been found that organic molecules having high planarity and rigidity tend to crystallize, regardless of their melting points or substrate temperature, when thin-films thereof are formed on a substrate either by solution processing or physical vapor deposition.

**[0029]** Further, organic EL compounds need to have good sublimability in view of the use of physical vapor deposition (PVD) in the formation of amorphous thin films. However, organic EL compounds with a high melting point generally have a large molecular weight and a poor sublimability. In fact, what is sought are organic EL compounds having high sublimability while having a sufficiently high melting point. Flat structures such as aromatic rings or hetero-rings may introduce too much pi-orbital overlap, which can be the source of traps impeding carrier transportation and quenching sites, thus reducing quantum efficiency of electroluminescence, by interaction of molecular orbitals, etc.

**[0030]** Further considerations include other characteristics of organic compounds such as hole injection, hole transportation, emission, electron transportation and electron injection functions and the like. For example, organic EL compounds for hole injection require compatibility with the material used for the anode. Also, consideration must be given to whether certain organic EL compounds can be used for more than one function. Multi-functional organic EL compounds enable the construction of a single layer performing multi-functions in organic EL device, and therefore can reduce processing costs, which otherwise would incur to produce additional layers.

### Double-Spiro Compounds

**[0031]** With the considerations discussed above, the present inventors discovered organic compounds having a double-spiro structure that possess properties and characteristics favorable for use in organic EL devices. The term "spiro" refers to a configuration or structure in an organic molecule in which two planar moieties share an atom and are configured substantially perpendicular to each other. Here, the term "double-spiro" refers to a configuration of at least three substantially planar moieties, in which one planar moiety is interveningly located between two neighboring planar moieties and the intervening planar moiety shares an atom with each of the two neighboring planar moieties. The intervening planar moiety is substantially perpendicular to the two neighboring planar moieties. The two atoms shared with the neighboring planar moieties are preferably apart from each other in the intervening planar moieties.


**[0032]** The double-spiro organic compounds generally meet the requirements of a high melting point, high sublimability and low crystallinity. The planar moieties with cyclic rings raise the molecular weight of these organic compounds. The high molecular weight generally increases the melting point and glass transition temperature. Also, the rigidity of the conjugated double bond ring structures and their aromaticity will enhance the sublimability of these compounds. Further, the substantially perpendicular configuration of neighboring planar moieties provides steric hindrance effect among the molecules. The steric hindrance will inhibit tight packing of the compounds in an orderly manner, whereby the crystallinity of these compounds is decreased.

**[0033]** Many of double-spiro structured organic compounds can emit visible light and have other properties including hole-injection, hole-transportation, electron-injection, and electron-transportation. These various properties can be provided in the double-spiro organic compounds by introducing appropriate functional groups on one or more of the planar moieties. For example, in one planar moiety a hole-transporting functional group is substituted, and in another planar moiety an electron-transporting functional group can be substituted. In the same way, bi- or multi-functional double-spiro organic EL materials can be prepared. This scheme is feasible particularly because each planar moiety is isolated from

conjugation with its neighboring planar moieties and therefore the functional groups introduced in each of the planar moieties would not likely interfere with each other.

#### General Formula 1

**[0034]** Among various double-spiro structures, the organic compounds for use in the organic electroluminescence in accordance with the present invention satisfy General Formula 1 defined below.

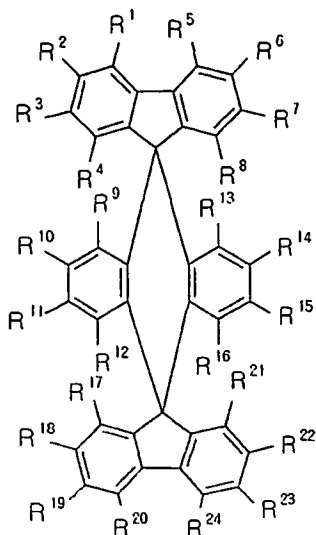

General Formula 1


**[0035]** R1 through R24 are identical or different substituent groups, namely hydrogen; halogen; cyano; hydroxyl; mercapto; C1-C18 alkyl which can be monosubstituted or polysubstituted by hydroxyl, carboxyl, C1-C6 alkyloxycarbonyl, formyl or C1-C6 alkylcarbonyl, the carbonyl groups of which can also be present in ketalized form, carbamoyl, N-hydroxycarbamoyl, sulfo, C1-C6 alkyloxy, hydroxy-C1-C6 alkyloxy, C1-C6 alkylthio, C1-C6 alkylsulfinyl, C1-C6 alkylsulfonyl, C2-C6 alkenyloxy, C2-C6 alkenylthio, C2-C6 alkenylsulfinyl or C2-C6 alkenylsulfonyl, and of which 2 alkyl groups can also be linked to form an optionally substituted di- to deca-methylene ring in which a C atom can be replaced by a heteroatom and which can additionally contain one or two double bonds; cyano-C1-C3 alkyl, epoxy-C2-C6 alkyl, trifluoromethyl, hydroxyiminomethyl or C1-C4 alkoxyiminomethyl, pentafluoroethyl; C2-C6 alkynyl; C1-C18 alkoxy, which can also be substituted by hydroxyl, carboxyl or C1-C6 alkyloxycarbonyl; epoxy-C2-C6 alkoxy; C2-C6 alkenyloxy or C2-C6 alkynyloxy; C3-C7-Cycloalkyl or C3-C7-Cycloalkylmethyl, in which the ring can also be substituted by hydroxyl, halogen, carboxyl, C1-C6 alkyloxycarbonyl or cyano, and in which a C atom can be replaced by an oxygen, nitrogen or sulfur atom; C2-C6 alkenyl which can also be substituted by hydroxyl, hydrogen or C1-C6 alkyl; C4-C7-Cycloalkenyl; formyl or ketalized formyl; C1-C6 alkylcarbonyl which can also be substituted by hydroxyl and can also be present in ketalized form; arylcarbonyl or C1-C6 alkylcarbonylamino; carboxyl or C1-C6 alkoxy carbonyl; C1-C6 alkylthio, C1-C6 alkylsulfinyl or C1-C6 alkylsulfonyl, all of which can also be substituted by hydroxyl in the alkyl part; methylthio, methylsulfinyl or methylsulfonyl, all of which are substituted in the methyl part by carboxyl or C1-C6 alkyloxycarbonyl; C2-C6 alkenylthio, C2-C6 alkenylsulfinyl or C2-C6 alkenylsulfonyl; carbamoyl which can be monosubstituted on the nitrogen by C1-C6 alkyl, hydroxy-C1-C6 alkyl, C1-C6 alkyloxycarbonyl, C1-C6 alkylcarbonyl, carboxymethyl, C1-C6 alkyloxycarbonylmethyl, aminocarbonylmethyl, C1-C6 alkylaminocarbonyl, carbamoyl, hydroxyl or pyridyl, or which can be disubstituted on the nitrogen by C1-C6 alkyl; carbazoyl which can be substituted by C1-C4 alkyl or N-carbamoylcarbazoyl; sulfamoyl which can be monosubstituted on the nitrogen by C1-C6 alkylaminocarbonyl; pyridyl or 4-pyridon-1-yl; amino, C1-C6 alkyl amines, aryl amines, or arylalkyl amines, all of which can also be substituted; nitrile or nitro; C1-C6 alkyl sulfide; and phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl or heteroaryl, all of which can also be substituted with any of the substituent groups listed here.

**[0036]** One or more of these substituent groups can also be substituted by one or more organic moieties having a spiro or double-spiro configuration, preferably organic moieties of General Formula I. Preferably, the substituent group of phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl or heteroaryl are further substituted with one or more phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl,


perylene, coronene or heteroaryl. Preferably, heteroaryl is a five- or six-membered aromatic rings where one or more C atoms are replaced by an oxygen, nitrogen or sulfur atom. More preferably, heteroaryl includes thiophenyl, thiazolyl, oxazolyl, imidazolyl, or pyrazinyl, either substituted or unsubstituted. The aryl group of the aryl amines or arylalkyl amines are identical or different and preferably selected from the group consisting of phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracenyl, tetracenyl, pentacenyl, perylenyl, coronenyl and heteroaryl. Preferably, one or more of R1-R24 are selected from the group consisting of amines with at least one aryl substituent and aryl including phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracenyl, tetracenyl, pentacenyl, perylenyl, coronenyl and heteroaryl. More preferably, at least one of R1-R24 is anthracene or heteroaryl.

**[0037]** In one embodiment, R3, R7, R10, R11, R14, R15, R18, R22 are substituted with non-hydrogen substituent groups. In another embodiment, the pairs of R3 and R7; R18 and R22; R10 and R15; and R11 and R14 are substituted with non-hydrogen substituent groups.


**[0038]** Compounds 100-137, 200-222, 300-308, and 400-413 are examples of the organic EL compounds having the double-spiro structure according to the present invention, the scope of which is not limited thereto.

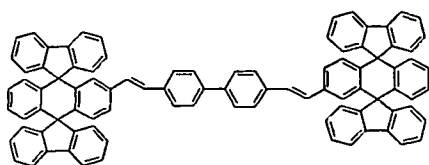


Chemical Compound 100

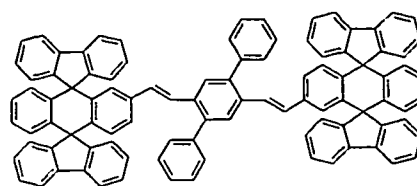


Chemical Compound 101




Chemical Compound 102




Chemical Compound 103




Chemical Compound 104



Chemical Compound 105




Chemical Compound 106



Chemical Compound 107




5



Chemical Compound 108


10




Chemical Compound 109

15

20




Chemical Compound 110




Chemical Compound 111

25

30




Chemical Compound 112




Chemical Compound 113

35

40

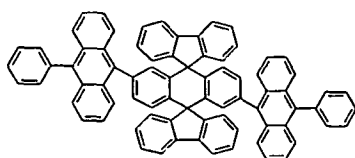


Chemical Compound 114

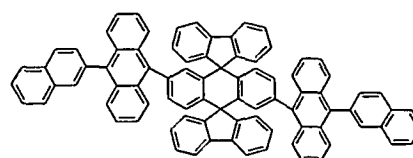


Chemical Compound 115

45

50




Chemical Compound 116



Chemical Compound 117


55

5




10

Chemical Compound 118




Chemical Compound 119

15



20


Chemical Compound 120

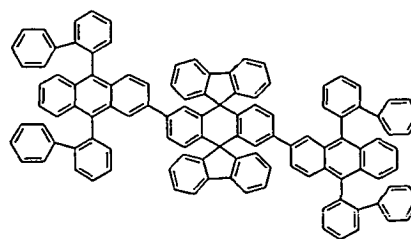

25


Chemical Compound 121

30

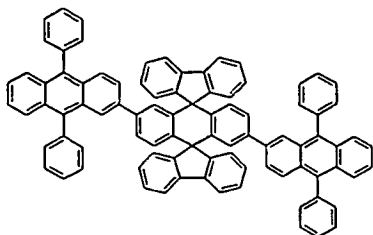


35

Chemical Compound 122

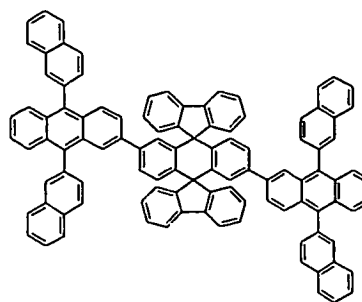

Chemical Compound 123


40

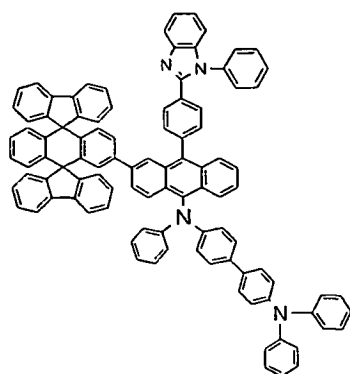

45


50

Chemical Compound 124




Chemical Compound 125


55

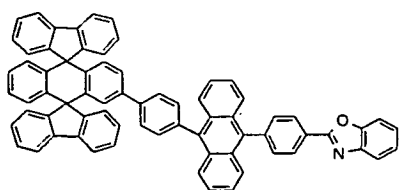


Chemical Compound 126




Chemical Compound 127

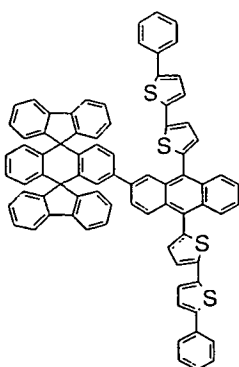


Chemical Compound 128

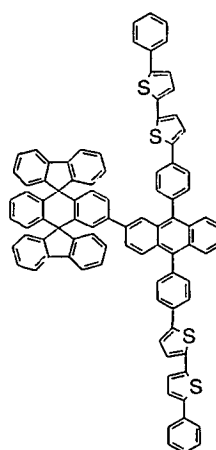


Chemical Compound 129

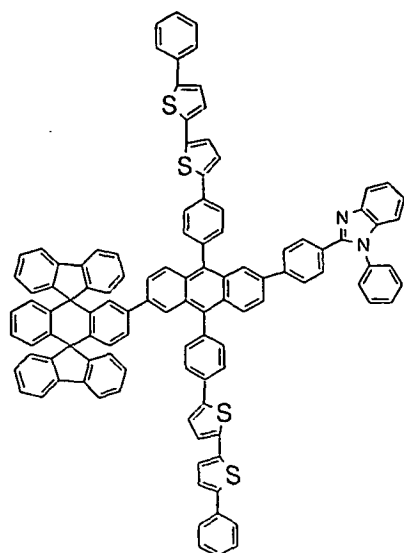


Chemical Compound 130

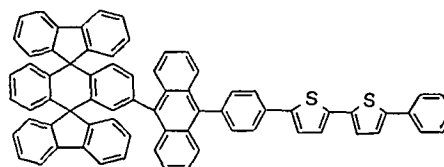


Chemical Compound 131

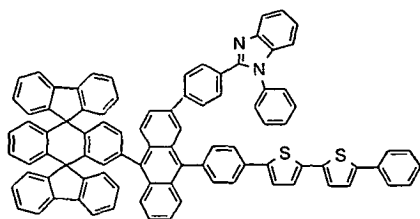


Chemical Compound 132

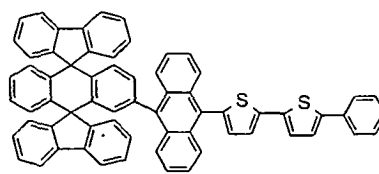


Chemical Compound 133




Chemical Compound 134




Chemical Compound 135




Chemical Compound 136




Chemical Compound 137




Chemical Compound 200




Chemical Compound 201




Chemical Compound 202

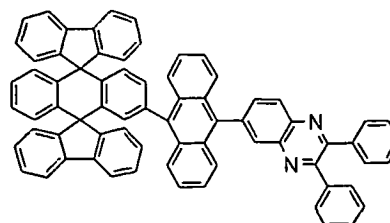


Chemical Compound 203




Chemical Compound 204




Chemical Compound 205




Chemical Compound 206




Chemical Compound 207




Chemical Compound 208




Chemical Compound 209

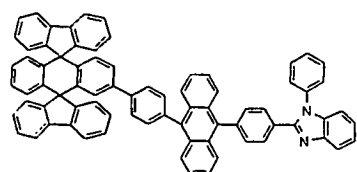


Chemical Compound 210

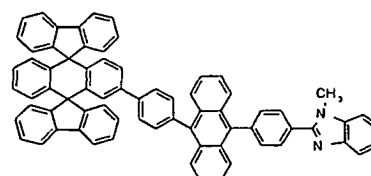


Chemical Compound 211




Chemical Compound 212




Chemical Compound 213




Chemical Compound 214




Chemical Compound 215




Chemical Compound 216



Chemical Compound 217




Chemical Compound 218




Chemical Compound 219

5



10


Chemical Compound 220



Chemical Compound 221

15


20



25


Chemical Compound 222

30



35


Chemical Compound 300




Chemical Compound 301

40

45




Chemical Compound 302




Chemical Compound 303

50


55




Chemical Compound 304




Chemical Compound 305




Chemical Compound 306




Chemical Compound 307




Chemical Compound 308




Chemical Compound 400



Chemical Compound 401

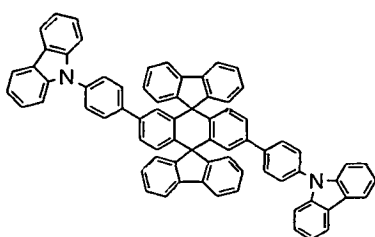

Chemical Compound 402




Chemical Compound 403




5

10




Chemical Compound 404

15




Chemical Compound 405

20



Chemical Compound 406


25



Chemical Compound 407


30

35

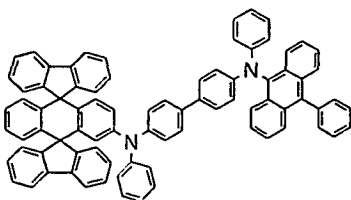

Chemical Compound 408


40

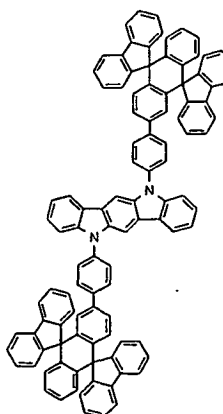

Chemical Compound 409


45

50




Chemical Compound 410


55



Chemical Compound 411



Chemical compound 412



Chemical Compound 413

**[0039]** Double-spiro organic compounds satisfying General Formula 1 have light-emitting, hole-injecting, hole-transporting, electron injection, electron-transporting properties and characteristics, facilitating their use in the organic EL devices. Also, many of these compounds have more than one property so that they can be used to form a multifunctional layer in organic EL devices.

#### Compounds for Use in Light Emission

**[0040]** Many double-spiro compounds, particularly those satisfying General Formula (I), have the property of emitting visible light when appropriate energy is applied. These double-spiro compounds have their band gaps corresponding to the visible light emission. Advantageously, the band gaps of the present double-spiro compounds range from about 1.8 eV to about 3.5 eV. The double-spiro light emitting compounds generate blue, green or red light although not limited thereto. The double-spiro light emitting compounds according to the invention include, for example, Chemical Compounds 100-137, 200-222, and 400-413. The double-spiro light emitting compounds can be used to form a light-emitting layer of organic EL devices alone or in combination with other light-emitting materials, as will be discussed later. Advantageously, these light-emitting double-spiro compounds can be used to host other EL compounds having higher quantum efficiency than their own. Also, these light-emitting compounds can be used as a light-emitting dopant in a light-emitting layer with another host material or in other layers of organic EL devices.

#### Compounds for Use in Transportation and/or Injection of Electrons

**[0041]** The double-spiro compounds of the instant invention have good electron mobility. Such compounds are candidates for use in electron transportation because good mobility of electrons in those compounds will reduce the driving voltage of the organic EL devices using the compounds. In other words, free electrons in the compounds having high electron mobility are prone to move at a low electric potential difference. Advantageously, the compounds having electron mobility of about  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  or greater can be used for electron transportation. A general discussion on carrier mobility can be found in *Electron Mobility in Tris(8-hydroxy-quinoline)aluminum Thin Films Determined via Transient Electroluminescence From Single- and Multiple-Layer Organic Light-Emitting Diodes*, J. Appl. Phys., Vol 89, 3712 (2001); *Transient Electroluminescence Measurements on Organic Heterolayer Light Emitting Diodes*, Synthetic Metals 111-112, 91 (2000); and *Organic Electroluminescence of Silole-Incorporated Polysilane*, Journal of Luminescence 87-89, 1174 (2000), which are hereby incorporated herein by reference.

**[0042]** Also, among the compounds with good electron mobility is a group having their lowest unoccupied molecular orbital (LUMO) level relatively close to the work function of cathode materials. This group of compounds is especially suited for electron injection. This is also relevant to the driving voltage of the device because the compounds for electron injection reduce the electric potential barrier in the electron injection. Advantageously, the LUMO level of the instant compounds used for electron injection ranges from about -2.5 eV to about -4.0 eV. For example, Chemical Compounds 200-222 can be used for electron injection or transportation, or both. The double-spiro compounds with the properties of electron injection and/or transportation can be used to form an electron-injecting layer, an electron-transporting layer, or a layer having both electron injection and transportation functions in organic EL devices.

#### Compounds for Use in Transportation and/or Injection of Holes

**[0043]** Various double-spiro compounds of the present invention have good hole mobility. Such compounds are candidates for use in hole transportation because the good mobility of holes in those compounds will reduce the driving voltage of an organic EL device using the compounds. Holes in the compounds having high hole mobility are prone to move at a low electric potential difference. Advantageously, double-spiro compounds having hole mobility of about  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  or greater can be used for hole transportation. Also, among the compounds with good electron mobility

is a group having their highest occupied molecular orbital (HOMO) level relatively close to the work function of anode materials. This group of compounds is especially suited for hole injection. This is relevant to the driving voltage as well because the compounds for hole injection primarily reduce the electric potential barrier in the hole injection. Advantageously, the HOMO level of the instant compounds used for hole injection ranges from about -4.0 eV to about -6.0 eV. For example, Chemical Compounds 300-308 and 400-413 can be used for hole injection or transportation, or both. The double-spiro compounds with the properties of hole injection and/or transportation can be used to form an hole-injecting layer, an hole-transporting layer, or a layer having both hole injection and transportation functions in organic EL devices.

#### Melting Points & Emission Color of Compounds of General Formula 1

**[0044]** Table 1 lists melting points and color of light emission of some exemplary double-spiro compounds of General Formula I.

Table 1

Chemical Compound Nos.	Melting Point (°C)	Color of Light Emission
100	>500	Blue
102	>500	Blue
103	430	Blue
107	365.2	Blue
109	448	Blue
110	424.8	Blue
111	475.5	Blue
113	430.3	Blue
117	462.6	Blue
118	409.8	Blue
134	395.2	Blue
135	>500	Green
200	462.9	Blue
305	353	Blue
307	315.9	Blue
308	329.2	Blue
301	370.4	Blue
303	326.0	Blue
400	358.7	Blue
401	489.5	Blue
403	413.0	Blue

**[0045]** As summarized in Table 1, the organic compounds of General Formula I have melting points sufficient to use in organic EL devices. The high melting point can be attributed, among other things, to the double-spiro structure with the fused six aromatic rings. Advantageously, these organic compounds have a melting point above about 300°C and glass transition temperature above about 120°C. Preferably, the melting point is above about 400°C. Given the high melting point and high glass transition temperature, morphology changes or crystallization in the thin films of these organic compounds will be less likely. Therefore, the production yield and product stability of the organic EL devices will be substantially enhanced.

Sublimability of Compounds of General Formula 1

**[0046]** The double-spiro organic compounds of General Formula 1 show good sublimability while at the same time the melting points thereof are sufficiently high. The sublimability of these compounds can be attributed to the structural rigidity as discussed above. On one hand, each planar moiety in the compounds holds the two dimensional rigidity with its two fused phenyl rings; on the other hand, the whole double-spiro structure has the three dimensional rigidity by balancing the spatial location of the planar moieties. The aromatic phenyl units in the compounds can also add the sublimability as well.

Steric Hindrance Effects of Compounds of General Formula 1


**[0047]** Further, the steric hindrance effect of the substantially perpendicular configuration of each planar moiety makes the crystallinity of the compounds substantially lower than other compounds having the same or a similar number of conjugated double bond rings. If the steric hindrance effect of a compound is high, the melting point of the compound is generally low. In the compounds of General Formula 1, however, even if the steric hindrance effect exists, the high molecular weight keeps the melting point of the compounds sufficiently high, which prevents crystallization at a relatively low temperature.

Crystallinity of Compounds of General Formula 1


**[0048]** Also, the double-spiro compounds of General Formula 1 have relatively low crystallinity while having high aromaticity owing to the existence of six fused phenyl rings. Generally, compounds having high aromaticity are of high crystallinity and easy to crystallize. But, in the compounds of General Formula 1, the conjugation of double bonds in each of the six phenyl rings does not overlap with other phenyl rings in the double-spiro structure. More particularly, the conjugations in the two phenyl groups fused with the pentagonal or hexagonal ring in each planar moiety do not overlap with each other in that planar moiety. Further, the conjugation in either of the phenyl groups of each planar moiety does not overlap with conjugation in another planar moiety of the double-spiro structure. This means that even if each planar moiety is substituted with groups forming extended conjugation with its phenyl groups, the pi-orbital overlap in the conjugation would not extend over another planar moiety and accordingly the whole molecule either. The lack of overlap of conjugation explains the relatively low crystallinity of these compounds.

Synthesis of Double-Spiro Compounds


**[0049]** Double-spiro compounds of General Formula 1 can be synthesized in various ways. For example, certain basic double-spiro compounds are first synthesized, and then they are modified to produce more complicated double-spiro compounds. For instance, the basic double-spiro compounds have one or more reactive atoms and/or functional groups as substituents in a double-spiro skeleton. Preferably, the reactive atoms and/or functional groups are halogen atoms and any acidic leaving groups. More preferably, they are selected from the group of chlorine, bromine, iodine, p-toluenesulfonic acid, and trifluoroacetic acid. Some exemplary basic double-spiro molecules are listed below as Chemical Compounds 1-11. In these compounds, "Br" may be substituted with any other reactive atoms or functional groups.




Chemical Compound 1




Chemical Compound 2




Chemical Compound 3




Chemical Compound 4




Chemical Compound 5




Chemical Compound 6




Chemical Compound 7




Chemical Compound 8



Chemical Compound 9



Chemical Compound 10



Chemical Compound 11

**[0050]** The basic double-spiro compounds are prepared in multi-step chemical reactions. For example, certain precursor molecules are synthesized and further processed to produce basic double-spiro compounds. For example, the precursor molecules include 2-bromo-9,10-bis(2-biphenyl-hydroxy)-anthracene and 2,6-dibromo-9,10-bis(2-biphenyl-dihydroxy)-anthracene. The synthesis of 2-bromo-9,10-bis(2-biphenyl-hydroxy)-anthracene is disclosed in *A Novel Acid-Catalyzed Rearrangement of 9,10-Dicryl-9,10-dihydrocyntracene-9,10-diols Affording 10,10'-Diacyl-9-anthrones*, Tetrahedron (1999) 55, 1759; and *A General Synthesis of Distributed Rubicenes*, Eur. J. Org. Chem., (1998) 2769, which are hereby incorporated herein by reference.

**[0051]** The basic double-spiro compounds are modified to produce desired double-spiro compounds. The modification of the basic double-spiro molecules is to introduce proper substituent groups into the double-spiro moiety of the basic molecules for favorable properties for use in organic electroluminescence. Reactions that can be used in such a modification includes, for example, Suzuki-coupling, Heck-coupling and Wittig reaction.

**[0052]** In a Suzuki-coupling condition, the reactive atoms or functional groups of the basic molecules are subject to reaction with boronic acid or molecules having a boronate to produce a double-spiro compounds having a new substituent group. In Heck-coupling, the reactive atoms or functional groups are reacted with compounds containing atoms for nucleophilic substitution, such as nitrogen and sulfur, to produce double-spiro compounds having substituent groups linked by a non-carbon atom. Also, under a Heck-coupling condition, basic double-spiro molecules can be reacted with compounds containing vinyl groups to obtain double-spiro molecules substituted with olefinic groups. Alternatively, double-spiro molecules having olefinic substituent groups can be produced by reacting basic double-spiro molecules with compounds containing a carbonyl group such as an aldehyde under a Wittig reaction condition. The synthesis of various double-spiro organic compounds will be further discussed in Examples 1-33.

#### Organic EL Devices

**[0053]** The present inventors have developed organic EL devices using organic compounds having one or more double-spiro structures. As discussed above, many double-spiro organic compounds have light-emitting property and other properties favorable for use in organic EL devices, including hole injection, hole transportation, electron transportation and electron injection. Various organic EL devices can be constructed with the double-spiro organic compounds of the present invention in combination with any other compounds having characteristics and properties for use in the organic EL devices. Further, some of the double-spiro organic compounds of the present invention have more than one function in the process of organic electroluminescence. With these multi-functional organic EL compounds, further various constructions of organic EL devices can be available.

#### General Construction of Organic EL Devices

**[0054]** Now constructions for organic EL devices of the present invention will be discussed with reference to the accompanying drawings. Figures 1-6 illustrate various examples of organic EL device constructions composed of a plurality of layers. In these drawings, the same reference numbers are used to indicate like components between the embodiments. The term "layer" in these illustrations refers to a thin film deposit of one or more compounds. These exemplary constructions are not exhaustive variants of the organic EL devices in accordance of the present invention.

**[0055]** The constructions of the organic EL device of the present invention include a substrate 1, an anode 3, a cathode 15 and one or more layers located between the anode 3 and the cathode 15, as illustrated in Figures 1-6 although not limited thereto. Advantageously, the one or more intervening layers contain at least one of the instant double-spiro organic compound. Preferably, the double-spiro compounds contained in the one or more intervening layers satisfy General Formula 1. The one or more intervening layers include a hole-injecting layer 5, a hole-transporting layer 7, a light-emitting layer 9, an electron-transporting layer 11, an electron-injecting layer 13 and combinations of more than one of these layers.

**[0056]** The substrate 1 (Figures 1-6) supports the laminated structure of the organic EL device 10. The anode 3 (Figures 1-6) and cathode 15 (Figures 1-6) are electrically connected to an electric power source 17 (Figures 1-6) via a switch 19 (Figures 1-6), which is controlled by a controller (not shown). The hole-injecting layer 5 (Figures 1-3) facilitates the injection of holes from the anode 3 into the hole-transporting layer 7 (Figures 1-5). Similarly, the electron-injecting layer 13 (Figures 1 and 4) facilitates the injection of electrons from the cathode 15 into the electron-transporting layer 11. The hole-transporting layer 7 accelerates the movement of holes away from the anode 3 or hole-injecting layer 5 into, for example, the light-emitting layer 9 (Figures 1-6). The electron-transporting layer 11 (Figures 1, 2, 4 and 5) accelerates the movement of electrons away from the cathode 15 or the electron-injecting layer 13 into, for example, the light-emitting layer 9 (Figures 1-6).

**[0057]** The transferred holes and electrons recombine and form excitons at light emitting molecules in the light-emitting layer 9. The excitons transfer the energy of the recombination to the light-emitting molecules or to other light-emitting molecules, which release the transferred energy in the form of visible light. The one or more intervening layers, although

not further indicated or discussed, may be multi-functional. A multi-functional layer has functions of, for example, hole injection and transportation; electron injection and transportation; hole transportation and light emission; electron transportation and light emission; hole injection, hole transportation and light emission; electron injection, electron transportation and light emission; and so forth. Such multi-functional layers can be made of a material having multi-functional properties with or without doping of other functional materials. In the alternative such layers are made of a mixture of more than one material having different functional properties still with or without doping of other functional materials.

#### Substrate

**[0058]** As mentioned above, the substrate 1 provides a support on which the laminated construction of the organic EL device can be build. Also, the substrate 1 functions as a protective layer for the construction of the organic EL device once manufactured. Thus, materials for the substrate 1 are selected from those which can stand the conditions of manufacturing processes and usage of the organic EL devices. In some organic EL device constructions of the present invention, the light emitted from the one or more intervening layers 5, 7, 9, 11 and 13 pass through the substrate 1. In such constructions, the substrate 1 is advantageously made of a transparent material to allow the visible light emitted from the light-emitting layer 9 to pass through. Transparent materials, which can be used for the substrate 1, for example, include glass, quartz and any other appropriate artificial materials such as transparent plastics. Preferably, glass is used for the substrate 1. In other constructions of organic EL devices of the present invention, the light can be emitted through the cathode 15 or any directions other than through the substrate 1. In such constructions, the substrate 1 is advantageously made of highly reflective material satisfying thermodynamic and mechanical requirements for depositing the anode 3 thereon. For example, semiconductor wafers, metal oxide, ceramic materials, and non-transparent plastics can be used as the substrate 1. A transparent substrate coated with a reflective material can also be used.

#### Anode

**[0059]** The anode 3 is a conductive electrode electrically connected to an electric power source. The anode 3 requires a relatively large work function, advantageously greater than 4 eV. For example, conductive materials, which can be used for the anode 3, include carbon; aluminum, vanadium, chromium, copper, zinc, silver, gold, similar metals, and alloys of the foregoing metals; zinc oxide, indium oxide, indium tin oxide (hereinafter referred to as "ITO"), indium zinc oxide and similar tin oxide or tin oxide indium-based complex compounds; mixtures of oxides and metals, such as ZnO:Al, SnO<sub>2</sub>:Sb; and conductive polymers, such as poly (3-methylthiophene), poly[3,4-(ethylene-1,2-dioxy) thiophene], polypyrrole and polyaniline. Either transparent or non-transparent materials can be selected for the anode 3, depending upon the construction of the light passage in the organic EL device as discussed above in connection with the materials for the substrate 1. Preferably, the anode 3 is made of ITO. Although not illustrated, the anode 3 may be constructed in multiple layers of materials. The thickness of the anode 3 may vary depending on the materials used and its layered structures. However, the anode 3 is advantageously from about 10 nm to about 1000 nm, preferably from about 10 nm to about 500 nm.

#### Cathode

**[0060]** The cathode 15 requires a relatively small work function, advantageously smaller than 4 eV. For example, conductive materials, which can be used for the cathode 15, include magnesium, calcium, sodium, potassium, titanium, indium, yttrium, lithium, gadolinium, aluminum, silver, tin, lead, similar metals, and alloys of foregoing metals. Although not illustrated, the cathode 15 may be constructed in multiple layers of materials, such as LiF/Al and Li<sub>2</sub>O/Al. Preferably, the cathode 15 is made of aluminum-lithium alloy, LiF/Al or Li<sub>2</sub>O/Al. Either transparent or non-transparent materials may be used for the cathode 3, depending upon the construction of the light passage in the organic EL device as discussed above. The thickness of the cathode 15 may vary depending on the materials used and its layered structures. However, the cathode 15 is laminated advantageously from about 1 nm to about 10,000 nm, preferably from about 5 nm to about 5,000 nm.

#### Hole-Injecting layer

**[0061]** The hole-injecting layer 5 has the function of enabling a large number of holes to be injected from the anode 3 at a low electric field applied to the device. The hole-injecting layer 5 advantageously is formed in the cases either where the interfacial strength between anode layer 3 and hole-transporting layer 7 is not strong enough or where the work function of the anode material is significantly different from the highest occupied molecular orbital (HOMO) level of the material of its neighboring layer 7, 9, 11 or 13. The HOMO level of the hole-injecting material is advantageously located between the work function of the anode 3 and the HOMO level of the other neighboring layer 9, 11 or 13,

preferably near the middle of the two. Also, the hole-injecting material is preferred to be transparent when the construction of the organic EL device allows the light emission through the substrate 1. In otherwise constructions, the hole-injecting material is advantageously non-transparent.

**[0062]** In accordance with the organic EL devices of the present invention, the hole-injecting layer 5 can be made of one or more of the double-spiro structured compounds. Preferably, the double-spiro compounds are of General Formula 1. More preferably, the hole-injecting layer 5 includes one or more of the Chemical Compounds 300-308 and 400-413, most preferably, Chemical Compounds 300-308. In accordance with the organic EL devices of the present invention, one or more non-double-spiro hole-injecting materials may be added. Also, the hole-injecting layer 5 can be formed with one or more non-double-spiro hole-injecting materials as long as at least one double-spiro compound is used in the organic EL device. The non-double-spiro hole-injecting materials include, for example, metal porphyrine (U.S. Patent Nos. 4,720,432 and 4,356,429); oligothiophene (U.S. Patent No. 5,540,999); arylamines and derivatives thereof (U.S. Patent Nos. 5,256,945, 5,609,970, and 6,074,734, and Japanese Unexamined Patent Publications 1999-219788 and 1996-269445); hexanitride hexaazatriphenylene; conductive polymers such as derivatives of polyaniline, polythiophene with or without acid dopant; derivatives of quinacridone; derivatives of perylene (U.S. Patent No. 5,998,803); and anthraquinone (Japanese Unexamined Patent Publication 2000-058267.) The referenced U.S. patents and Japanese publications are hereby incorporated herein by reference.

#### Hole-Transporting layer

**[0063]** The hole-transporting layer 7 has the function to smoothly transfer the holes from the hole-injecting layer 5 or from anode 3 (in the absence of the hole-injecting layer 5) toward the light-emitting layer 9 or toward an area where light-emitting materials are doped. Materials good for use in the hole-transporting layer 7 are those having high hole mobility therein. This hole-transporting layer 7 also has the function of blocking electrons from its neighboring layer 9, 11, or 13 on the side of the cathode 15. Further, the hole-transporting layer 7 functions for both the hole injection and hole transportation in the constructions which do not have a separate hole-injecting layer.

**[0064]** In accordance with the organic EL devices of the present invention, the hole-transporting layer 7 can be made of one or more of the double-spiro structured compounds. The double-spiro compounds are preferably of General Formula 1. More preferably, the hole-transporting layer 7 includes one or more of the Chemical Compounds 300-308 and 400-413. In accordance with the organic EL devices of the present invention, one or more non-double-spiro hole-transporting materials may be added. Also, the hole-transporting layer 7 can be formed with one or more non-double-spiro hole-transporting materials as long as at least one double-spiro compound is used in the organic EL device. The non-double-spiro hole-transporting materials include, for example, arylamine derivatives, conjugated polymers, block co-polymers with conjugated and nonconjugated repeating units, and the like. Advantageously, derivatives of the arylamine, 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPB) is used for the hole-transporting layer 7.

#### Electron-Transporting layer

**[0065]** The electron-transporting layer 11 contains an electron transfer material to transfer the electron injected from the electron injecting layer 13 or from the cathode 15 (in the absence of the electron-injecting layer 13) to the light-emitting layer 9 or to an area where a light-emitting material is doped. Compounds having high electron mobility is used as an electron-transporting material. The electron-transporting layer 11 may also have the function of blocking holes to move thereinto. In the construction without a separate electron-injecting layer, the electron-transporting material is selected from those which can enable a large number of electron to be injected from the cathode 15 at a low electric field applied across the device.

**[0066]** In accordance with the organic EL devices of the present invention, the electron-transporting layer 11 can be made of one or more of the double-spiro structured compounds. Preferably, the double-spiro compounds are of General Formula 1. More preferably, the electron-transporting layer 11 includes one or more of the Chemical Compounds 200-222. In accordance with the organic EL devices of the present invention, one or more non-double-spiro electron-transporting materials may be added. Also, according to the organic EL devices of the present invention, the electron-transporting layer 11 can be formed with one or more non-double-spiro electron-transporting materials as long as at least one double-spiro compound is used in the organic EL device. The non-double-spiro electron-transporting materials include, for example, aluminum complexes of 8-hydroxyquinoline; organometallic complex compounds including Alq3 (U.S. Patent No. 5,061,569 and U.S. Patent Application No. 09/540837); organic radical compounds (U.S. Patent No. 5,811,833); hydroxyflavon-metal complexes (U.S. Patent Nos. 5,817,431 and 5,516,577, Japanese Unexamined Patent Publications 2001-076879, 2001-123157 and 1998-017860, and *Organic Light-emitting Diodes using 3- or 5-hydroxyflavone-metal Complexes*, Appl. Phys. Lett. 71 (23), 3338 (1997).) The referenced documents are hereby incorporated herein by reference.



Electron-Injecting layer

**[0067]** The electron-injecting layer 13 is generally to facilitate injection of a large number of electrons from the cathode 15 at a low electric field applied across the device. The electron-injecting layer 13 is provided when the work function of the cathode 15 significantly differs from the lowest unoccupied molecular orbital (LUMO) level of the other neighboring layer 5, 7, 9 or 11. The electron-injecting layer 13 may be introduced to prevent excitons generated in the neighboring layer 5, 7, 9 or 11 from moving toward the cathode layer 15. In the alternative or in addition, the electron-injecting layer 13 may be provided to avoid damaging the neighboring layer 5, 7, 9 or 11 in the course of the deposition of the cathode layer 15. The LUMO level of the electron-injecting material is advantageously located between the work function of the cathode material and the LUMO level of the other neighboring layer 5, 7, 9 or 11, preferably near the middle of the two. Further, the electron-injecting layer 13 is required to have strong interface with the cathode layer 15. In accordance with the organic EL devices of the present invention, the electron-injecting layer 13 can be made of one or more of the double-spiro structured compounds. Preferably, the double-spiro compounds are of General Formula 1. More preferably, the electron-injecting layer 13 includes one or more of the Chemical Compounds 200-222. In accordance with the organic EL devices of the present invention, one or more non-double-spiro electron-injecting materials may be added. Also, according to the organic EL devices of the present invention, the electron-injecting layer 13 can be formed with one or more non-double-spiro electron-injecting materials as long as at least one double-spiro compound is used in the organic EL device. The non-double-spiro electron-injecting materials include, for example, aluminum complexes of 8-hydroxyquinoline, organometallic complex compounds including Alq3, organic radical compounds (U.S. Patent No. 5,811,833); 3- or 5-hydroxyflavone-metal complexes (*Organic Light-emitting Diodes using 3- or 5-hydroxyflavone-metal Complexes*, Appl. Phys. Lett. 71 (23), 3338 (1997)); the electron-injecting compounds disclosed in Japanese Unexamined Patent Publications 2001-076879, 2001-123157 and 1998-017860; poly(p-phenyleneethylene), poly(triphenyldiamine), and spiroquinoxaline (*Polymeric Light-Emitting Diodes Based on Poly(p-phenyleneethylene), Poly(triphenyldiamine), and Spiroquinoxaline*, Adv. Funct. Mater. 11, 41, (2001)); the electron-injecting compounds disclosed in *High-efficiency oligothiophene-based light-emitting diodes*, Appl. Phys. Lett. 75, 439 (1999); the electron-injecting compounds disclosed in *Modifiede Oligothiophenes with High Photo-and Electroluminescence Efficiencies*, Adv. Mater. 11, 1375 (1999). The referenced documents are hereby incorporated herein by reference.

Light-Emitting Layer

**[0068]** The light-emitting layer 9 is a layer particularly dedicated to the emission of visible light by the process of recombination of electrons and holes therein although it may have other functions as well. Advantageously, the light-emitting layer 9 of the organic EL devices is composed of one light-emitting material alone or a mixture of two or more light-emitting materials without doping. In an alternative construction, the light-emitting layer 9 is composed of one or more light-emitting host materials and a small amount of one or more dopants, as will be discussed below.

**[0069]** In accordance with the organic EL devices of the present invention, the light-emitting layer 9 can include one or more of the instant double-spiro structured compounds. Preferably, the double-spiro compounds are of General Formula 1 as a light-emitting material. More preferably, the light-emitting layer 9 includes one or more of the Chemical Compounds 100-137, 200-222, and 400-413. In accordance with the organic EL devices of the present invention, these double-spiro compounds can be used as a host or as a dopant. In either case, one or more non-double-spiro light-emitting materials may be added as either another host material or another dopant. Advantageously, the double-spiro compounds are used as a host material, with or without another host material, for hosting one or more fluorescent or phosphorescent dopants. Also, according to the organic EL devices of the present invention, the light-emitting layer 9 may include one or more non-double-spiro light-emitting materials as long as at least one double-spiro compound is used in the organic EL device. The non-double-spiro light-emitting materials include, for example, 8-hydroxyquinoline metal complexes including Alq3; carbazole compounds and derivatives thereof; dimerized styryl compounds (U.S. Patent No. 5,366,811); BAlq (U.S. Patent No. 5,150,006); 10-hydroxybenzo [h] quinoline-metal complexes (U.S. Patent No. 5,529,853); 2-(2'-hydroxy-5'-methylphenyl) benzotriazole metal complexes (U.S. Patent No. 5,486,406); benzoxazole, benzthiazole, benzimidazole and derivatives thereof (U.S. Patent No. 5,645,948); poly(p-phenylene vinylene) and derivatives thereof (*Conjugated Polymers as Solid-State Laser Materials*, Synthetic Metals 91, 35 (1997); and *Low Voltage Operation of Large Area Polymer LEDs*, Synthetic Metals 91, 109 (1997)); spiro compounds (U.S. Patent No. 5,840,217); polyfluorene, rubrene or the like. The referenced documents are hereby incorporated herein by reference.

Doping

**[0070]** According to the organic EL devices of the present invention, the light-emitting layer 9 may be constructed with or without a dopant. Dopants are introduced to improve the light-emission efficiency, to tune the color of the emission, and/or to simply emit light from a layer having a non-fluorescent host. Dopants can be added to the light-emitting layer

9 and one or more of the other layers 5, 7, 11 and 13. More than one light-emitting material can be doped together in these layers for various purposes. Also, in some constructions of the organic EL devices according to the present invention, the light-emitting layer 9 may be absent. In such constructions, one or more light-emitting dopants are necessarily put in one or more of the layers 5, 7, 11 or 13 to generate visible light therefrom.

**[0071]** Generally, dopants are selected from fluorescent or phosphorescent materials having higher quantum efficiency than the host material. Preferably, the dopants have a quantum yield close to "1" in a dilute system. This means that most of the energy received from excitons contributes to the light emission rather than releasing it in other forms such as generating heat. Also, dopants are selected such that they match energetically with the host material. In other words, excitons are known to have a tendency to transfer their energy to a material having a smaller band gap among materials near the recombination location; thus, dopants are advantageously selected from the light-emitting materials having a band gap slightly smaller than that of the host materials. Depending upon the matching of the dopants and host materials, recombination may occur in the host molecules, and the energy of the generated excitons is transferred to the dopants. In this case, visible light is emitted from the dopant molecules. Also, the energy of the excitons may be transferred to another dopant, where the light is emitted. In the alternative, the recombination and light emission may occur in one light-emitting material.

**[0072]** Advantageously, the double-spiro light-emitting compounds can be used as a dopant in various layers. Preferably, these dopants have the double-spiro structure of General Formula 1. For example, Chemical Compounds 100-137, 200-222 and 400-413 can be used as a dopant light-emitting material. One or more double-spiro dopants can be used with or without other dopants. Whether or not a separate light-emitting layer is provided, quantum efficiency and lifetime of the organic EL device can be enhanced by selecting an appropriate host materials, one or more matching dopants and their concentrations.

**[0073]** Other light-emitting (phosphorescent or fluorescent) materials for doping in the organic EL devices of the present invention include, for example, perylene, rubrene, coumarine, quinacridone, nile red, DCM, and the following organo-metallic complexes.



**[0074]** Some of the exemplified and additional materials for use as dopants, either fluorescent or phosphorescent, are disclosed in *Organic Light-Emitting Devices With Saturated Red Emission Using 6,13-Diphenylpentacene*, Appl. Phys. Lett. 78, 2378 (2001); *Photoluminescence and Electroluminescence Properties of Dye-Doped Polymer System*, Synthetic Metals 91, 335 (1997); *Fabrication of Highly Efficient Organic Electroluminescent Devices*, Appl. Phys. Lett. 73, 2721 (1998); *Organic Electroluminescent Devices Doped With Condensed Polycyclic Aromatic Compounds*, Synthetic Metals 91, 27 (1997); *Bright Blue Electroluminescent Devices Utilizing Poly (N-Vinylcarbazole) Doped With Fluorescent Dye*, Synthetic Metals 91, 331 (1997); *Doped Organic Electroluminescent Devices With Improved Stability*, Appl. Phys. Lett. 70, 1665 (1997); *Stability Characteristics Of Quinacridone and Coumarine Molecules as Guest Dopants in The Organic Leds*, Synthetic Metals 91, 15 (1997); *Strongly Modified Emission From Organic Electroluminescent Device With a Microcavity*, Synthetic Metals 91, 49 (1997); *Organic Light-Emitting Diodes Using a Gallium Complex*, Appl. Phys. Lett. 72, 1939 (1998); *Orange and Red Organic Light-Emitting Devices Using Aluminum Tris (5-Hydroxyquinoline)*, Synthetic Metals 91, 217 (1997); *Synthesis and Characterization of Phosphorescent Cyclometalated Iridium Complexes*, Inorg. Chem. 40, 1704 (2001); *Highly Phosphorescent Bis-Cyclometalated Iridium Complexes*, J. Am. Chem. Soc. 123, 4304, (2001); *High Quantum Efficiency in Organic Light-Emitting Devices with Iridium-Complex as Triplet Emissive Center*, Jpn. J. Appl. Phys. 38, L1502 (1999); *Optimization of Emitting Efficiency in Organic LED Cells Using Ir Complex*, Synthetic Metals 122, 203 (2001); *Operating lifetime of phosphorescent organic light emitting devices*, Appl. Phys. Lett. 76, 2493 (2000); *High-Efficiency Red Electrophosphorescence Devices*, Appl. Phys. Lett. 78, 1622 (2001); *Very High-Efficiency Green Organic Light-Emitting Devices Based on Electrophosphorescence*, Appl. Phys. Lett. 75, 4 (1999); *Highly-Efficient Organic Electrophosphorescent Devices With Tris(2-Phenylpyridine)Iridium Doped Into Electron-Transporting Materials*, Appl. Phys. Lett. 77, 904 (2000); and *Improved Energy Transfer In Electrophosphorescent Devices*, Appl. Phys. Lett. 74, 442 (1999), all of which are hereby incorporated herein by reference.


**[0075]** Other various aspects and features of the double-spiro compounds and organic EL devices in accordance with the present invention will be further discussed in terms of the following examples, which are intended to illustrate the

present invention but not limit the scope.

### Examples of Synthesis

#### Example 1: Synthesis of Chemical Compound 1


**[0076]** To a solution of 2-bromobiphenyl (9.00 ml, 52.0 mmol) in THF (100 ml) was added dropwise t-BuLi (40 ml of a 1.7 M solution in pentane) at -78 °C under nitrogen. After the mixture had been stirred for 40 min, 2-bromoanthraquinone (5.00 g, 17.0 mmol) was added at -78 °C. The cooling bath was removed and the mixture was stirred for 3 hours at room temperature. The reaction mixture was poured into diethyl ether (150 ml) and 2 N HCl (150 ml), and stirred for 40 min at room temperature. The precipitate was filtered off with suction, washed with water and ethyl ether, and then dried to obtain 2-bromo-9,10-bis(2-biphenyl-hydroxy)-anthracene (9.50 g, 92%).

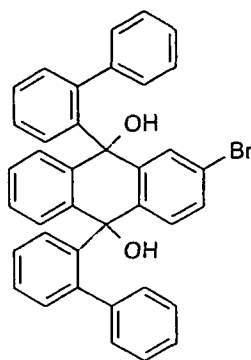

**[0077]** 2-bromo-9,10-bis(2-biphenyl-dihydroxy)-anthracene 9.50 g (16.0 mmol) of 2-bromo-9,10-bis(2-biphenyl-hydroxy)-anthracene synthesized as above was suspended in acetic acid (150 ml), and conc. H<sub>2</sub>SO<sub>4</sub> (20 drops) was added thereto. After the reaction mixture had been stirred at reflux for about 3 hours, it was cooled to room temperature. The precipitate was filtered off with suction, washed with acetic acid, water, and ethanol. Purification by sublimation afforded Chemical Compound 2 (8.0 g, 89%) as white solid: mp 419.7 °C; <sup>1</sup>H NMR (500 MHz, DMSO-d<sub>6</sub>) δ 8.12 (dd, J = 7.4, 7.3 Hz, 4H), 7.53-7.47 (m, 4H), 7.39-7.34 (m, 4H), 7.25 (t, J = 8.0 Hz, 4H), 7.06 (dd, J = 2.3, 8.7 Hz, 1H), 6.86-6.81 (m, 2H), 6.29 (d, J = 2.3 Hz, 1H), 6.26-6.21 (m, 2H), 6.20 (d, J = 8.7 Hz, 1H); MS (M<sup>+</sup>) calculated for C<sub>38</sub>H<sub>23</sub>Br 558, found 558; analysis calculated for C<sub>38</sub>H<sub>23</sub>Br: C, 81.58; H, 4.14; Br, 14.28. Found: C, 82.00; H, 4.14; Br, 13.86.

#### Example 2: Synthesis of Chemical Compound 2

**[0078]** To a solution of 2-bromobiphenyl (8.83 ml, 51.2 mmol) in THF (200 ml) was added dropwise t-BuLi (60 ml of a 1.7 M solution in pentane) at -78 °C under nitrogen. After the mixture had been stirred for 40 min, 2,6-dibromoanthraquinone (7.50 g, 20.5 mmol) was added at -78 °C. The cooling bath was removed and the mixture was stirred for 15 hours at room temperature. The reaction mixture was poured into diethyl ether (200 ml) and 2 N HCl (200 ml), and stirred for 40 min at room temperature. The precipitate was filtered off with suction, washed with water and ethyl ether. After drying, 2,6-dibromo-9,10-bis(2-biphenyl-dihydroxy)-anthracene (11.8 g, 85%) was obtained.



**[0079]** 2,6-dibromo-9,10-bis(2-biphenyl-dihydroxy)-anthracene 10.5 g (15.57 mmol) of 2,6-dibromo-9,10-bis(2-biphenyl-hydroxy)-anthracene synthesized as above was suspended in acetic acid (150 ml), and conc. H<sub>2</sub>SO<sub>4</sub> (20 drops) was added thereto. After the reaction mixture had been stirred while refluxing for about 15 hours, it was cooled to room temperature. The precipitate was filtered off with suction, washed with acetic acid, water, and ethanol. Purification by sublimation afforded Chemical Compound 2 (9.0 g, 90%) as white solid: mp 478.1 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 7.92 (d, J = 7.6 Hz, 4H), 7.46 (t, J = 8.0 Hz, 4H), 7.33 (t, J = 7.4 Hz, 4H), 7.21 (d, J = 7.6 Hz, 4H), 6.88 (dd, J = 2.1, 8.6 Hz, 2H), 6.47 (d, J = 2.1 Hz, 2H), 6.22 (d, J = 8.6 Hz, 2H); MS (M<sup>+</sup>) calculated for C<sub>38</sub>H<sub>22</sub>Br<sub>2</sub> 636, found 636; analysis calculated for C<sub>38</sub>H<sub>22</sub>Br<sub>2</sub>: C, 71.50; H, 3.47; Br, 25.03. Found: C, 71.90; H, 3.40; Br, 25.7.

#### Example 3: Synthesis of Chemical Compound 3

**[0080]** To a solution of 2-methylantraquinone (16.0 g, 72.0 mmol) in a mixture of acetic acid (400 ml) and acetic anhydride (400 ml) was added concentrated sulfuric acid (16 ml) at 5 °C. Chromium trioxide (18.0 g, 0.18 mmol) was added over a period of 1 hour at 5 °C. The reaction mixture was then stirred at 5 °C for 4 hours, poured into ice water, and extracted with chloroform. The organic extract was dried over MgSO<sub>4</sub> and concentrated under vacuum to give anthraquinone-2-aldehyde diacetate (16.0 g, 65%). To a solution of the anthraquinone-2-aldehyde diacetate (16.0 g, 47.3 mmol) in acetic acid (400 ml) was added dropwise 35% aqueous hydrochloric acid (170 ml) at room temperature. The reaction mixture had been stirred while refluxing for 15 min, cooled to room temperature, filtered off with suction, and washed with water. After drying, anthraquinone-2-aldehyde (10.0 g, 89%) was obtained.

**[0081]** A mixture of anthraquinone-2-aldehyde (12.0 g), 1,3-propanediol (10 ml), and p-toluenesulfonic acid (20 mg) in toluene (300 ml) was heated under reflux with a removal of water formed from the condensation of anthraquinone aldehyde and 1,3-propane diol for 4 hours. The mixture was then cooled to room temperature, filtered off with suction, washed with water and diethyl ether, and dried under vacuum to afford anthraquinone-2-propaneacetal (12.5 g, 84%).

**[0082]** To a solution of 2-bromobiphenyl (9.3 ml, 54.0 mmol) in THF (80 ml) was added dropwise t-BuLi (45 ml of a 1.7 M solution in pentane) at -78 °C under nitrogen. After the mixture had been stirred for 1 hour, anthraquinone-2-propaneacetal (6.60 g, 22.4 mmol) was added at -78 °C. The cooling bath was removed and the mixture was stirred for 1h at room temperature. The mixture was poured into 1 N HCl and diethyl ether, and then stirred for 1 hour, precipitate formed was filtered off with suction, washed with diethyl ether, and dried under vacuum to give anthraquinol-2-propaneacetal (13.0 g, 93%).

**[0083]** To a solution of anthraquinol-2-propaneacetal (13.0 g, 21.5 mmol) in acetic acid (300 ml) was added concentrated sulfuric acid (5 drops). The reaction mixture had been stirred while refluxing for 3 hours, it was cooled to room temperature. The precipitate was filtered off with suction, washed with water, ethanol, and diethyl ether, and dried under vacuum to afford Chemical Compound 3 (10.0 g, 91%) as white solid: mp 428.5 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 9.53 (s, 1H), 8.15-8.13 (m, 4H), 7.52-7.23 (m, 13H), 6.85-6.82 (m, 2H), 6.79 (s, 1H), 6.45 (d, J = 8.2 Hz, 1H), 6.26-6.22 (m, 2H).

#### Example 4: Synthesis of Chemical Compound 8

**[0084]** For the coupling of the halogen containing precursor molecules to prepare appropriately substituted double-spiro compounds, the halogen of Chemical Compound 1 was converted into a boronic acid group as in Chemical Compound 8.

**[0085]** To a solution of Chemical Compound 1 (10.0 g, 17.9 mmol), in dry THF (150 ml) was added dropwise t-BuLi (31.5 ml of a 1.7 M solution in pentane) at -78 °C under nitrogen. After the mixture had been stirred for 1 hour, trimethylborate (8.00 ml, 71.5 mmol) was added dropwise at -78°C. The cooling bath was removed and the mixture was stirred for 3 hours at room temperature. The mixture was quenched with 2 N HCl (100 ml) and stirred for 1 hour at room temperature. The precipitate was filtered with suction and washed with water. The crude product was slurried in diethyl ether, stirred while refluxing, filtered off with suction, and dried under vacuum at 50 °C. After drying, double-spiro boronic acid of Chemical Compound 8 (7.60 g, 81%) was obtained, and used for the Suzuki-coupling reaction without further purification.

#### Example 5: Synthesis of Chemical Compound 100

**[0086]** To a solution of Chemical Compound 3 (1.34 g, 2.6 mmol) and 4,4'-bis(diethylphosphorylmethyl)biphenyl (0.50 g, 1.3 mmol) in DMF (80 ml) was added dropwise lithium ethoxide (2.8 ml of a 1.0 M solution in ethanol) at room temperature under nitrogen. After the reaction mixture had been stirred at room temperature for 12 hours, it was filtered off with suction, washed with ethanol and dried under vacuum. Purification by sublimation afforded Chemical Compound 100 (1.00 g, 66%) as white solid: mp > 500 °C; <sup>1</sup>H NMR is not listed because of insolubility of Chemical Compound 100 in common solvents. MS (M<sup>+</sup>) calculated for C<sub>90</sub>H<sub>56</sub> 1136, found 1136; analysis calculated for C<sub>90</sub>H<sub>56</sub>: C, 95.04; H, 4.96. Found: C, 94.88; H, 5.12.

Example 6: Synthesis of Chemical Compound 102

**[0087]** To a suspension of 9,10-dibromoanthracene (60 mg 0.19 mmol), Chemical Compound 8 (0.20 g, 0.38 mmol), and potassium phosphate (0.16 g, 0.76 mmol) in DMF (10 ml) was added tetrakis(triphenylphosphine)palladium (12 mg, 0.01 mmol) under nitrogen. After the reaction mixture had been stirred at 60 °C for 18 hours, it was cooled to room temperature and ethanol (20 ml) was added. After addition, the reaction mixture was further stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then it was dissolved in N-methyl pyrrolidine (50 ml) and filtered through a short column packed with silica gel. After removal of solvent, the crude product was purified by crystallizing from ethanol to give Chemical Compound 102 (0.16 g, 41%): mp > 500 °C; <sup>1</sup>H NMR is not listed because of insolubility of 102 in common solvents. MS (M<sup>+</sup>) calculated for C<sub>90</sub>H<sub>54</sub> 1134, found 1134; analysis calculated for C<sub>90</sub>H<sub>54</sub>: C, 95.21; H, 4.79. Found: C, 94.90; H, 4.70.

Example 7: Synthesis of Chemical Compound 103

**[0088]** To a suspension of Chemical Compound 1 (0.50 g, 0.89 mmol), 1-vinylpyrene (0.25 g, 1.07 mmol), and triethylamine (1.5 ml, 10.8 mmol) in DMF (8 ml) were added Pd(OAc)<sub>2</sub> (11 mg, 0.05 mmol) and tri-*o*-tolylphosphine (70 mg, 0.23 mmol). After the reaction mixture had been stirred while refluxing for 15 hours, it was cooled to room temperature, quenched with water (40 ml), and extracted with dichloromethane (3 x 40 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. Purification by column chromatography (1:2 dichloromethane-hexane) and recrystallization from THF and ethanol afforded Chemical Compound 103 (0.2 g, 32%) as yellow solid: mp 430.0 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 8.18-7.70 (m, 14H), 7.47-7.25 (m, 14H), 6.90-6.78 (m, 2H), 6.52-6.41 (m, 4H); MS (M<sup>+</sup>) calculated for C<sub>56</sub>H<sub>34</sub> 706, found 706; analysis calculated for C<sub>56</sub>H<sub>34</sub>: C, 95.15; H, 4.85. Found: C, 95.10; H, 4.66.

Example 8: Synthesis of Chemical Compound 105

**[0089]** To a solution of 1,1'-diphenylethylene (7.80 g, 43.3 mmol) in carbon tetrachloride (250 ml) in dark atmosphere was added dropwise bromine (2.45 ml) in carbon tetrachloride (5 ml) at -15 °C. The reaction mixture was stirred at room temperature for 1 hour and silica gel (SiO<sub>2</sub>, 1.0 g), which was activated at 140 °C for 15h, was added. After the mixture had been stirred while refluxing for 1 hour, it was cooled to room temperature. After removal of the solvent, the residue was dissolved with n-hexane and filtered through a short column packed with silica gel. Recrystallization from n-hexane afforded 2,2'-diphenylvinyl-1-bromide (10.6 g, 95%) as ivory crystal.

**[0090]** To a solution of 2,2'-diphenylvinyl-1-magnesium bromide, which was freshly prepared from 2,2'-diphenyl-1-bromide (2.00 g, 7.72 mmol) in THF (30 ml) and magnesium (0.23 g, 9.24 mmol) with iodomethane (3 drops) as an initiator, was added dropwise trimethylborate (2.63 ml, 23.16 mmol) in THF (6 ml) at -78 °C under nitrogen. After the mixture had been stirred at room temperature for 3 hours, it was poured into a mixture of 2 N HCl (40 ml) and diethyl ether (200 ml). The organic layer was separated, dried over MgSO<sub>4</sub>, and concentrated under vacuum. Chemical Compound 2 (0.36 g, 0.75 mmol), 2,2'-diphenylvinyl-1-boronic acid, and tetrakis(triphenylphosphine)palladium (86 mg, 0.075 mmol) were slurried in a mixture of toluene (20 ml) and aqueous potassium carbonate solution (10 ml, 2 M). With vigorous stirring, the mixture was boiled under reflux for 10 hours. After cooling to room temperature, the organic layer was separated, washed with water, dried over MgSO<sub>4</sub>, and concentrated under vacuum. Recrystallization from chloroform and ethanol afforded Chemical Compound 105 (0.42 g, 67%) as white solid: mp 387.7 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 7.44 (d, J = 7.4 Hz, 4H), 7.37 (t, J = 7.4 Hz, 4H), 7.23 (t, J = 8.8 Hz, 4H), 7.14-6.98 (m, 20H), 6.81 (d, J = 8.0 Hz, 4H), 6.43 (s, 2H), 6.34 (d, J = 8.4 Hz, 2H), 6.10 (s, 2H), 6.01 (d, J = 8.4 Hz, 2H); MS (M<sup>+</sup>) calculated for C<sub>66</sub>H<sub>44</sub> 836, found 836; analysis calculated for C<sub>66</sub>H<sub>44</sub>: C, 94.70; H, 5.30. Found: C, 94.30; H, 5.40.

Example 9: Synthesis of Chemical Compound 107

**[0091]** To a solution of Chemical Compound 1 (1.20 g, 2.14 mmol), 4-(2,2-diphenylvinyl)-phenylboronic acid (0.64 g, 2.14 mmol), and sodium carbonate (0.68 g, 6.42 mmol) in a mixture of toluene (30 ml), ethanol (6 ml), and water (15 ml) was added tetrakis(triphenylphosphine)palladium (50 mg, 0.04 mmol). The reaction mixture was stirred while refluxing for 12 hours. Then it was cooled to room temperature and water (50 ml) was added. The organic layer was separated and the aqueous layer was extracted with dichloromethane (3 x 50 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. Recrystallization from chloroform and ethanol afforded Chemical Compound 107 (0.98 g, 62%) as colorless solid: mp 365.2 °C; <sup>1</sup>H NMR (500 MHz, CDCl<sub>3</sub>) δ 7.92 (dd, J = 4.6, 7.4 Hz, 4H), 7.45-7.39 (m, 4H), 7.32-7.22 (m, 17H), 7.15-7.13 (m, 2H), 6.96 (dd, J = 2.0, 8.5 Hz, 1H), 6.89 (s, 3H), 6.84 (s, 1H), 6.79-6.75 (m, 2H), 6.55 (d, J = 2.0 Hz, 1H), 6.43-6.36 (m, 3H); MS (M<sup>+</sup>) calculated for C<sub>58</sub>H<sub>38</sub> 734, found 734; analysis calculated for C<sub>58</sub>H<sub>38</sub>: C, 94.79; H, 5.21. Found: C, 94.98; H, 5.05.

Example 10: Synthesis of Chemical Compound 109

**[0092]** To a suspension of 9-bromo-10-phenylanthracene (0.3 g, 1.00 mmol), Chemical Compound 8 (0.52 g, 1.00 mmol), and potassium phosphate (0.42 g, 2.00 mmol) in DMF (10 ml) was added tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) under nitrogen. After the reaction mixture had been stirred at 60 °C for 12 hours, it was cooled to room temperature. Ethanol (20 ml) was added to the mixture, and then the mixture was stirred for 30 minutes at room temperature. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then it was dissolved in chloroform (150 ml) and filtered through a short column packed with silica gel. After removal of solvent, the crude product was purified by crystallizing from ethanol to give Chemical Compound 109 (0.26 g, 35%): mp 448 °C; <sup>1</sup>H NMR (400 MHz, *N*-methylpyrrolidine-*d*<sub>9</sub>) δ 8.26 (d, *J* = 7 Hz, 2H), 8.00 (dd, *J* = 3.0, 7.0 Hz, 2H), 7.62-7.54 (m, 9H), 7.48-7.38 (m, 9H), 7.35-7.29 (m, 5H), 7.20-7.16 (m, 2H), 7.10 (dd, *J* = 2.0, 8.0 Hz, 1H), 6.95-6.90 (m, 2H), 6.66 (d, *J* = 8.0 Hz, 1H), 6.49 (d, *J* = 2.0 Hz, 1H), 6.42-6.39 (m, 2H); MS (M<sup>+</sup>) calculated for C<sub>58</sub>H<sub>36</sub> 732, found 732; analysis calculated for C<sub>58</sub>H<sub>36</sub>: C, 95.05; H, 4.95. Found: C, 95.07; H, 4.88.

Example 11: Synthesis of Chemical Compound 110

**[0093]** To a suspension of 9-bromo-10-(2-naphthyl)-anthracene (1.00 g, 2.60 mmol), Chemical Compound 8 (1.36 g, 2.60 mmol), and potassium phosphate (1.10 g, 5.20 mmol) in DMF (60 ml) was added tetrakis(triphenylphosphine)palladium (90 mg, 0.08 mmol) under nitrogen. After the reaction mixture was stirred at 70 °C for 12 hours, it was cooled to room temperature and ethanol (60 ml) was added. After addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then, it was dissolved in chloroform (450 ml) and filtered through a short column of silica gel. After removal of solvent, the crude product was purified by crystallizing from ethanol to give of Chemical Compound 110 (1.20 g, 58%): mp 423 °C; <sup>1</sup>H NMR (400 MHz, CDCl<sub>3</sub>) δ 8.00-7.96 (m, 4H), 7.84-7.81 (m, 2H), 7.76-7.71 (m, 2H), 7.58-7.33 (m, 19H), 7.18-7.06 (m, 4H), 6.97 (ddd, *J* = 2.0, 4.0, 8.0 Hz, 1H), 6.85-6.80 (m, 2H), 6.65 (d, *J* = 8.0 Hz, 1H), 6.57 (dd, *J* = 2.0, 5.0 Hz, 1H), 6.50-6.45 (m, 2H); MS (M<sup>+</sup>) Calculated for C<sub>62</sub>H<sub>38</sub> 782, found 782; analysis calculated for C<sub>62</sub>H<sub>38</sub>: C, 95.11; H, 4.89. Found: C, 95.20; H, 4.80.

Example 12: Synthesis of Chemical Compound 111

**[0094]** To a suspension of 9-bromo-10-(2-biphenyl) anthracene (0.4 g, 1.00 mmol), Chemical Compound 8 (0.52 g, 1.00 mmol), and potassium phosphate (0.42 g, 2.00 mmol) in DMF (10 ml) was added tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) under nitrogen. After the reaction mixture had been stirred at 60 °C for 12 hours, it was cooled to room temperature and ethanol (20 ml) was added. After addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then, it was dissolved in chloroform (150 ml) and filtered through a short column of silica gel. After removal of solvent, the crude product was purified by sublimation to give Chemical Compound 111 (0.26 g, 35%): mp 475.5 °C; <sup>1</sup>H NMR (400 MHz, CDCl<sub>3</sub>) δ 7.97 (d, *J* = 7.0 Hz, 2H), 7.81 (d, *J* = 7.0 Hz, 1H), 7.74-7.70 (m, 2H), 7.56-7.20 (m, 18H), 7.14-7.10 (m, 2H), 7.00-6.70 (m, 11H), 6.58 (d, *J* = 8.0 Hz, 1H), 6.53-6.42 (m, 3H); MS (M<sup>+</sup>) Calculated for C<sub>64</sub>H<sub>40</sub> 808, found 808; analysis calculated for C<sub>64</sub>H<sub>40</sub>: C, 95.02; H, 4.98. Found: C, 95.14; H, 4.86.

Example 13: Synthesis of Chemical Compound 113

**[0095]** To a suspension of 9-bromo-10-(3,5-terphenyl)-anthracene (0.78 g, 1.50 mmol), Chemical Compound 8 (0.79 g, 1.50 mmol), and potassium phosphate (0.63 g, 3.00 mmol) in DMF (25 ml) was added tetrakis(triphenylphosphine)palladium (52 mg, 0.05 mmol) under nitrogen. After the reaction mixture had been stirred at 70 °C for 12 hours, it was cooled to room temperature and ethanol (30 ml) was added. After the addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then, it was dissolved in chloroform (50 ml) and filtered through a short column of silica gel. After removal of the solvent, the crude product was purified by crystallizing from ethanol to give Chemical Compound 113 (0.75 g, 57%): mp 430.3 °C; <sup>1</sup>H NMR (400 MHz, CDCl<sub>3</sub>) δ 7.99-7.96 (m, 3H), 7.75-7.66 (m, 8H), 7.59 (dt, *J* = 2.0, 10.0 Hz, 2H), 7.51-7.30 (m, 20H), 7.24-7.19 (m, 2H), 7.11-7.07 (m, 2H), 6.96 (dd, *J* = 2.0, 8.0 Hz, 1H), 6.85-6.80 (m, 2H), 6.65 (d, *J* = 8.0 Hz, 1H), 6.57 (d, *J* = 2.0 Hz, 1H), 6.50-6.45 (m, 2H); MS (M<sup>+</sup>) Calculated for C<sub>70</sub>H<sub>44</sub> 884, found 884; analysis calculated for C<sub>70</sub>H<sub>44</sub>: C, 94.99; H, 5.01. Found: C, 95.03; H, 4.93.

Example 14: Synthesis of Chemical Compound 114

**[0096]** To a suspension of Chemical Compound 2 (0.33 g, 0.51 mmol), 10-phenyl-anthracene-9-boronic acid (0.53 g,

1.79 mmol), potassium phosphate (0.43 g, 2.00 mmol), and 2,6-di-*t*-butyl-4-methylphenol (80 mg, 0.36 mmol) in DMF (10 ml) was added tetrakis(triphenylphosphine)palladium (24 mg, 0.02 mmol) under nitrogen. The mixture was degassed with nitrogen for 1 hour. After the reaction mixture had been stirred at 65 °C for 17 hours, it was cooled to room temperature and ethanol (50 ml) was added. After addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water and ethanol, and dried under vacuum. Purification by sublimation afforded Chemical Compound 114 (60 mg, 12%) as white solid: mp > 500 °C; <sup>1</sup>H NMR is not listed because of insolubility of Chemical Compound 114 in common solvents. MS (M<sup>+</sup>) Calculated for C<sub>78</sub>H<sub>48</sub> 984, found, 984; analysis calculated for C<sub>78</sub>H<sub>48</sub>: C, 95.09; H, 4.91. Found: C, 95.15; H, 4.85.

#### Example 15: Synthesis of Chemical Compound 116

**[0097]** To a suspension of 2-bromo-9,10-diphenylanthracene (0.41 g, 1.00 mmol), Chemical Compound 8 (0.79 g, 1.50 mmol), and potassium phosphate (0.64 g, 3.00 mmol) in DMF (15 ml) was added tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) under nitrogen. The mixture was degassed with nitrogen for 30 minutes. After the reaction mixture had been stirred at 90 °C for 60 hours, it was cooled to room temperature and ethanol (60 ml) was added. After addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water and ethanol, and dried under vacuum. Purification by sublimation afforded Chemical Compound 116 (0.32 g, 40%) as white solid: mp 399.06 °C; <sup>1</sup>H NMR (500 MHz, CDCl<sub>3</sub>) δ 7.90 (dd, *J* = 7.0, 13.0 Hz, 4H), 7.62-7.37 (m, 19H), 7.31-7.22 (m, 9H), 7.05 (dd, *J* = 2.0, 8.0 Hz, 1H), 6.96 (dd, *J* = 2.0, 8.0 Hz, 1H), 6.79-6.75 (m, 2H), 6.56 (d, *J* = 2.0 Hz, 1H), 6.41-6.36 (m, 3H); MS (M<sup>+</sup>) Calculated for C<sub>64</sub>H<sub>40</sub> 808, found 808; analysis calculated for C<sub>64</sub>H<sub>40</sub>: C, 95.02; H, 4.98. Found: C, 95.10; H, 4.90.

#### Example 16: Synthesis of Chemical Compound 117

**[0098]** To a solution of 2-bromonaphthalene (6.49 g, 31.3 mmol) in dry THF (50 ml) was added dropwise *t*-BuLi (18.4 ml of a 1.7 M solution in pentane) at -78 °C under nitrogen. After the mixture had been stirred for 30 min, 2-bromoanthraquinone (3.00 g, 10.4 mmol) was added at -78 °C. The cooling bath was removed and the mixture was stirred for 2 hours at room temperature. The mixture was quenched with saturated aqueous ammonium chloride solution (50 ml) and extracted with ethyl ether (3 x 50 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. The crude product was slurried in petroleum ether, filtered off with suction, and washed with petroleum ether. After drying, the 2-bromo-9,10-di-naphthalene-2-yl-9,10-dihydro-anthracene-9,10-diol (5.30 g, 93%) was obtained.

**[0099]** A mixture of the diol (5.43 g, 10 mmol) obtained above, potassium iodide (15 g), and sodium hypophosphite hydrate (15 g) in acetic acid (100 ml) was stirred while refluxing for 1 hour under nitrogen. After cooling the mixture to room temperature, the precipitate was filtered off with suction and washed with water and methanol. After drying, 2-bromo-9,10-(di-2-naphthyl)-anthracene (4.00 g, 79%) was obtained.

**[0100]** To a solution of 2-bromo-9,10-(di-2-naphthyl)-anthracene (0.60 g, 1.18 mmol), Chemical Compound 8 (0.62 g, 1.18 mmol), and sodium carbonate (0.38 g, 3.54 mmol) in a mixture of toluene (30 ml), ethanol (6 ml), and water (10 ml), tetrakis(triphenylphosphine)palladium (27 mg, 0.02 mmol) was added. The reaction mixture was stirred while refluxing for 24 hours and quenched with conc. HCl (1 ml). Then it was cooled to room temperature and extracted with dichloromethane (3 x 30 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. The residue was dissolved in chloroform, filtered through a short column of silica gel, and concentrated under vacuum. Recrystallization from chloroform and ethanol afforded Chemical Compound 117 (0.70 g, 65%) as pale yellow solid: mp 462.6 °C; <sup>1</sup>H NMR (500 MHz, DMSO-*d*<sub>6</sub>) δ 8.36 (d, *J* = 8.3 Hz, 1H), 8.18-7.97 (m, 8H), 7.88-7.74 (m, 4H), 7.64-7.51 (m, 6H), 7.48-7.40 (m, 4H), 7.37-7.02 (m, 15H), 6.82-6.77 (m, 2H), 6.30-6.15 (m, 4H); MS (M<sup>+</sup>) Calculated for C<sub>72</sub>H<sub>44</sub> 908, found 908; analysis calculated for C<sub>72</sub>H<sub>44</sub>: C, 95.12; H, 4.88. Found: C, 95.36; H, 4.64.

#### Example 17: Synthesis of Chemical Compound 118

**[0101]** To a suspension of 2-bromo-9,10-bis(2-biphenyl) (0.56 g, 1.00 mmol), Chemical formula 8 (0.79 g, 1.50 mmol), and potassium phosphate (0.64 g, 3.00 mmol) in DMF (10 ml) was added tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) under nitrogen. The mixture was degassed with nitrogen for 30 min. After the reaction mixture had been stirred at 90 °C for 18 hours, it was cooled to room temperature and ethanol (50 ml) was added. After addition, the reaction mixture was stirred at room temperature for 30 minutes. The precipitate was filtered off with suction, washed with water and ethanol, and dried under vacuum. Then it was dissolved in chloroform (500 ml), filtered through a short column of silica gel, and concentrated under vacuum. Purification by sublimation afforded Chemical Compound 118 (0.63 g, 66%) as white solid: mp 409.8 °C; <sup>1</sup>H NMR (500 MHz, CDCl<sub>3</sub>) δ 7.96 (d, *J* = 7.4 Hz, 2H), 7.91 (dd, *J* = 4.6, 7.4 Hz, 2H), 7.59-7.12 (m, 26H), 6.97 (ddd, *J* = 2.3, 8.7, 14.2 Hz, 2H), 6.87-6.73 (m, 8H), 6.68-6.63 (m, 4H), 6.60 (d, *J* = 1.9 Hz, 1H), 6.41 (d, *J* = 8.7 Hz, 1H), 6.40-6.36 (m, 2H); MS (M<sup>+</sup>) Calculated for C<sub>76</sub>H<sub>48</sub> 960, found 960; analysis calculated

for  $C_{76}H_{48}$ : C, 94.79; H, 5.03. Found: C, 95.10; H, 4.89.

#### Example 18: Synthesis of Chemical Compound 119

**[0102]** To a solution of 1,3,5-tribromobenzene (10.0 g, 31.8 mmol), phenylboronic acid (9.68 g, 79.4 mmol), and sodium carbonate (25.3 g, 0.24 mol) in a mixture of toluene (150 ml), ethanol (30 ml), and water (75 ml), tetrakis(triphenylphosphine)palladium (1.84 g, 5 mol%) was added. The reaction mixture was stirred while refluxing for 24 hours and quenched with conc. HCl (20 ml). Then it was cooled to room temperature and extracted with ethyl ether (3 x 50 ml). The combined organic extracts were dried over  $MgSO_4$  and concentrated under vacuum. Purification by column chromatography (n-hexane) afforded 3,5-(diphenyl)bromobenzene (9.82 g, 51%)

**[0103]** To a solution of 3,5-(diphenyl)bromobenzene (5.00 g, 16.2 mmol) in dry THF (50 ml) was added dropwise t-BuLi (9.53 ml of a 1.7 M solution in pentane) at  $-78^\circ C$  under nitrogen. After the mixture had been stirred for 30 min, 2-bromoanthraquinone (1.55 g, 5.39 mmol) was added at  $-78^\circ C$ . The cooling bath was removed and the mixture was stirred for 2 hours at room temperature. The mixture was quenched with saturated aqueous ammonium chloride solution (50 ml) and extracted with ethyl ether (3 x 50 ml). The combined organic extracts were dried over  $MgSO_4$  and concentrated under vacuum. The crude product was slurried in petroleum ether, filtered off with suction, and washed with petroleum ether. After drying, 2-bromo-9,10-[1,1',3',1'']terphenyl-5'-yl-9,10-dihydro-anthracene-9,10-diol (3.00 g, 74%) was obtained.

**[0104]** A mixture of the diol obtained above (2.24 g, 3.0 mmol), potassium iodide (2.25 g, 13.6 mmol), and sodium hypophosphite hydrate (2.25 g, 25.6 mmol) in acetic acid (30 ml) was stirred while refluxing for 1 hour under nitrogen. After cooling to room temperature, the precipitate was filtered off with suction, and washed with water and methanol. After drying, 2-bromo-9,10-[1,1',3',1'']terphenyl-5'-yl-anthracene (1.75 g, 82%) was obtained.

**[0105]** To a solution of 2-bromo-9,10-[1,1',3',1'']terphenyl-5'-yl-anthracene (0.5 g, 0.70 mmol), Chemical Compound 8 (0.55 g, 1.05 mmol), and sodium carbonate (0.22 g, 2.1 mmol) dissolved in a mixture of toluene (30 ml), ethanol (6 ml), and water (10 ml), tetrakis(triphenylphosphine)palladium (16 mg, 2 mol%) was added. The reaction mixture was stirred while refluxing for 24 hours and quenched with conc. HCl (1 ml). Then, it was cooled to room temperature and extracted with dichloromethane (3 x 30 ml). The combined organic extracts were dried over  $MgSO_4$  and concentrated under vacuum. The residue was dissolved in chloroform, filtered through a short column of silica gel, and concentrated under vacuum. Recrystallization from chloroform and ethanol afforded Chemical Compound 119 (0.45 g, 58%) as pale yellow solid: mp  $512.8^\circ C$ ;  $^1H$  NMR (500 MHz,  $DMSO-d_6$ )  $\delta$  8.38 (s, 1H), 8.15-7.82 (m, 11H), 7.75-7.38 (m, 20H), 7.32-7.05 (m, 16H), 6.82-6.75 (m, 3H), 6.38-6.10 (m, 5H); MS (M<sup>+</sup>) Calculated for  $C_{88}H_{56}$  1112, found 1112; analysis calculated for  $C_{88}H_{56}$ : C, 94.93; H, 5.07. Found: C, 95.18; H, 4.82.

#### Example 19: Synthesis of Chemical Compound 136

**[0106]** To a suspension of 2-bromo-9,10-di[2-(2'-phenyl)biphenyl]-anthracene (0.40 g, 0.56 mmol), Chemical Compound 8 (0.63 g, 1.12 mmol), and potassium phosphate (0.36 g, 1.68 mmol) in DMF (40 ml) was added tetrakis(triphenylphosphine)palladium (65 mg, 0.06 mmol) under nitrogen. After the reaction mixture had been stirred at  $80^\circ C$  for 24 hours, it was cooled to room temperature. The precipitate was filtered off with suction, washed with water, ethanol, and acetone, and dried under vacuum. Then it was dissolved in chloroform (50 ml) and filtered through a short column of silica gel. After removal of solvent, the crude product was purified by crystallizing from ethanol to Chemical Compound 136 (0.11 g, 18%): mp  $385.4^\circ C$ ;  $^1H$  NMR is not listed because of insolubility of Chemical Compound 136 in common solvents. MS (M<sup>+</sup>) calculated for  $C_{88}H_{56}$  1112, found 1112.

#### Example 20: Synthesis of Chemical Compound 301

**[0107]** To a suspension of Chemical Compound 1 (1.50 g, 2.68 mmol), N-phenyl-1-naphtylamine (0.59 g, 2.68 mmol), and sodium t-butoxide (0.31 g, 3.22 mmol) in o-xylene (20 ml),  $Pd(OAc)_2$  (0.2 mg, 0.007 mmol) and  $P(t-Bu)_3$  (0.50 mg, 0.003 mmol) were added. After the reaction mixture had been stirred at  $130^\circ C$  for 3 hours, it was cooled to room temperature, quenched with water (40 ml), and extracted with dichloromethane (3 x 40 ml). The combined organic extracts were dried over  $MgSO_4$  and concentrated under vacuum. Purification by recrystallization from chloroform and ethanol afforded Chemical Compound 301 (1.50 g, 80%) as white solid: mp  $370.4^\circ C$ ;  $^1H$  NMR (500 MHz,  $DMSO-d_6$ )  $\delta$  8.03 (d,  $J = 7.3$  Hz, 2H), 7.88 (dd,  $J = 7.8, 8.5$  Hz, 3H), 7.76 (d,  $J = 8.3$  Hz, 1H), 7.44-7.32 (m, 11H), 7.26 (m, 4H), 7.19 (dt,  $J = 1.0, 8.3$  Hz, 1H), 7.03 (dd,  $J = 1.0, 7.3$  Hz, 1H), 6.86-6.80 (m, 4H), 6.71 (t,  $J = 7.3$  Hz, 1H), 6.38 (d,  $J = 7.8$  Hz, 2H), 6.24-6.21 (m, 2H), 6.16 (dd,  $J = 2.8, 8.7$  Hz, 1H), 6.13 (d,  $J = 2.3$  Hz, 1H), 6.06 (d,  $J = 8.7$  Hz, 1H); MS (M<sup>+</sup>) calculated for  $C_{54}H_{35}N$  697, found 696; analysis calculated for  $C_{54}H_{35}N$ : C, 92.94; H, 5.06; N, 2.01. Found: C, 93.05; H, 4.91; N, 2.04.



Example 21: Synthesis of Chemical Compound 303

**[0108]** To a solution of Chemical Compound 1 (2.00 g, 3.56 mmol), 4-(dimethylamino)-phenylboronic acid (1.24 g, 4.27 mmol), and sodium carbonate (1.13 g, 10.7 mmol) in a mixture of toluene (40 ml), ethanol (6 ml), and water (20 ml), tetrakis(triphenylphosphine)palladium (130 mg, 3 mol%) was added. The reaction mixture was stirred while refluxing for 12 hours. Then, it was cooled to room temperature and water (50 ml) was added. The organic layer was separated and the aqueous layer was extracted with ethyl acetate (3 x 50 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. Purification by column chromatography (1:2 THF-hexane) and recrystallization from THF and ethanol afforded Chemical Compound 303. (0.70 g, 27%) as white solid: mp 326.0 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 7.91 (dd, *J* = 4.9, 7.5 Hz, 4H), 7.44-7.30 (m, 4H), 7.30-7.15 (m, 13H), 7.01-6.85 (m, 11H), 6.79-6.72 (m, 2H), 6.56 (d, *J* = 1.9 Hz, 1H), 6.44-6.39 (m, 3H); MS (M<sup>+</sup>) calculated for C<sub>56</sub>H<sub>37</sub>N 723, found 723; analysis calculated for C<sub>56</sub>H<sub>37</sub>N: C, 92.91; H, 5.15; N, 1.93. Found: C, 92.70; H, 5.07; N, 2.12.

Example 22: Synthesis of Chemical Compound 400

**[0109]** To a suspension of Chemical Compound 1 (3.00 g, 5.34 mmol), *N,N*-diphenyl-4-(vinylphenyl)amine (1.74 g, 6.41 mmol), and triethylamine (6 ml, 43.0 mmol) in DMF (20 ml), Pd(OAc)<sub>2</sub> (40 mg, 0.18 mmol) and tri-*o*-tolylphosphine (270 mg, 0.90 mmol) were added. After the reaction mixture had been stirred while refluxing for 15 hours, it was cooled to room temperature, quenched with water (40 ml), and extracted with chloroform (3 x 40 ml). The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. Purification by column chromatography (1:2 dichloromethane-hexane) and recrystallization from chloroform and ethanol afforded Chemical Compound 400 (3.1 g, 77%) as ivory solid: mp 358.7 °C; <sup>1</sup>H NMR (300 MHz, CDCl<sub>3</sub>) δ 7.92 (dd, *J* = 4.0, 7.6 Hz, 4H), 7.44-7.40 (m, 3H), 7.32-7.12 (m, 15H), 7.04-6.89 (m, 9H), 6.76 (dd, *J* = 3.4, 6.1 Hz, 2H), 6.56 (dd, *J* = 12.0, 21.0 Hz, 2H), 6.40-6.36 (m, 4H); MS (M<sup>+</sup>) calculated for C<sub>58</sub>H<sub>39</sub>N 749, found 749; analysis calculated for C<sub>58</sub>H<sub>39</sub>N: C, 92.89; H, 5.24; N, 1.87. Found: C, 93.12; H, 5.26; N, 1.65.

Example 23: Synthesis of Chemical Compound 307

**[0110]** To a suspension of Chemical Compound 1 (0.34 g, 0.60 mmol), diphenylbenzidine (0.40 g, 1.20 mmol), and sodium *t*-butoxide (0.10 g, 1.10 mmol) in *o*-xylene (10 ml), Pd(OAc)<sub>2</sub> (8.0 mg, 0.04 mmol) and P(*t*-Bu)<sub>3</sub> (29 mg, 0.14 mmol) were added. After the reaction mixture had been stirred while refluxing for 2 hours, iodobenzene (1.0 ml, 8.94 mmol) was added. After the resulting reaction mixture had been stirred while refluxing for 21 hours, it was cooled to room temperature and quenched with water. The organic layer was separated and the aqueous layer was extracted with toluene. The combined organic extracts were dried over MgSO<sub>4</sub>, filtered through a short column of silica gel, and concentrated under vacuum. Purification by column chromatography (1:4 THF-hexane) and sublimation afforded Chemical Compound 307 (0.20 g, 37%) as ivory solid: mp 315.9 °C; <sup>1</sup>H NMR (300 MHz, DMSO-*d*<sub>6</sub>) δ 8.06 (d, *J* = 7.4 Hz, 2H), 7.91 (d, *J* = 7.4 Hz, 2H), 7.48-7.40 (m, 20H), 7.08-6.98 (m, 9H), 6.91 (d, *J* = 7.5 Hz, 2H), 6.83-6.79 (m, 2H), 6.66 (d, *J* = 7.6 Hz, 2H), 6.61 (d, *J* = 8.6 Hz, 2H), 6.40-6.36 (m, 1H), 6.26-6.20 (m, 2H), 6.12 (d, *J* = 9.3 Hz, 1H), 6.05-6.01 (m, 1H); MS (M<sup>+</sup>) calculated for C<sub>68</sub>H<sub>46</sub>N<sub>2</sub> 890, found 890; analysis calculated for C<sub>68</sub>H<sub>46</sub>N<sub>2</sub>: C, 91.65; H, 5.20; N, 3.14. Found: C, 91.95; H, 5.20; N, 2.85.

Example 24: Synthesis of Chemical Compound 305

**[0111]** To a solution of 2-bromo-4,4'-bis(diphenylamino)biphenyl (0.57 g, 1.00 mmol) and Chemical Compound 8 (0.79 g, 1.50 mmol) in a mixture of toluene (30 ml) and 2 N potassium carbonate solution (10 ml), tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) was added. The reaction mixture was stirred at 80 °C for 24 hours. Then it was cooled to room temperature and water (50 ml) was added. The organic layer was separated, and the aqueous layer was extracted with toluene. The combined organic extracts were dried over MgSO<sub>4</sub> and concentrated under vacuum. Purification by column chromatography (1:19 ethyl acetate-hexane) afforded Chemical Compound 305 (0.36 g, 37%) as ivory solid: mp 353 °C; <sup>1</sup>H NMR (300 MHz, DMSO-*d*<sub>6</sub>) δ 8.04-7.99 (m, 4H), 7.42-6.70 (m, 38H), 6.55-5.98 (m, 8H); MS (M<sup>+</sup>) calculated for C<sub>74</sub>H<sub>50</sub>N<sub>2</sub> 966, found 966.

Example 25: Synthesis of Chemical Compound 9

**[0112]** To a suspension of Chemical Compound 8 (0.52 g, 1.00 mmol), 9-bromoanthracene (0.25 g, 1.00 mmol), and potassium phosphate (0.42 g, 2.00 mmol) in DMF (10 ml) tetrakis(triphenylphosphine)palladium (35 mg, 0.03 mmol) was added under nitrogen. After the reaction mixture had been stirred at 80 °C for 12 hours, it was cooled to room temperature and ethanol (15 ml) was added. After addition, the reaction mixture had been stirred at room temperature

for 10 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone. Purification by sublimation afforded Chemical Compound 9 (0.40 g, 60%): MS (M+) calculated for  $C_{52}H_{32}$  656, found 656.

#### Example 26: Synthesis of Chemical Compound 5

**[0113]** To a solution of Chemical Compound 9 (0.35 g, 0.53 mmol) in dry  $CCl_4$  (80 ml), bromine (27 mL, 0.53 mmol) was added dropwise at room temperature. After the reaction mixture had been stirred for 5 hours at room temperature, it was quenched with saturated aqueous sodium bicarbonate solution. The organic layer was dried over  $MgSO_4$  and concentrated in vacuum. Purification by column chromatography (1:4 THF-hexane) afforded Chemical Compound 5 (0.28 g, 72%): MS (M+) calcd for  $C_{52}H_{31}Br$  734, found 734.

#### Example 27: Synthesis of Chemical Compound 401

**[0114]** To a suspension of Chemical Compound 5 (1.60 g, 2.20 mmol), 4-diphenylaminophenylboronic acid (0.63 g, 2.20 mmol), and potassium phosphate (0.93 g, 4.40 mmol) in DMF (80 ml) was added tetrakis(triphenylphosphine) palladium (81 mg, 0.07 mmol) under nitrogen. After the reaction mixture had been stirred at 80 °C for 12 hours, it was cooled to room temperature and ethanol (80 ml) was added. After addition, the reaction mixture was stirred at room temperature for 10 minutes. The precipitate was filtered off with suction, washed with water, ethanol, and acetone. Purification by sublimation afforded Chemical Compound 401 (0.80 g, 41%): mp 489.5 °C;  $^1H$  NMR (300 MHz,  $CDCl_3$ )  $\delta$  8.00 (d,  $J$  = 7.5 Hz, 2H), 7.78-7.73 (m, 2H), 7.67 (d,  $J$  = 8.6 Hz, 2H), 7.54-7.00 (m, 31H), 6.92 (d,  $J$  = 10.8 Hz, 1H), 6.83-6.80 (m, 3H), 6.62 (d,  $J$  = 7.5 Hz, 1H), 6.48-6.40 (m, 3H); MS (M+) calculated for  $C_{70}H_{45}N$  899, found 899; analysis calculated for  $C_{70}H_{45}N$ : C, 93.40; H, 5.04; N, 1.56. Found: C, 93.30; H, 4.95; N, 1.95.

#### Example 28: Synthesis of Chemical Compound 10

**[0115]** To a suspension of Chemical Compound 1 (2.00 g, 3.56 mmol), carbazole (0.89 g, 5.34 mmol), and potassium carbonate (0.59 g, 4.27 mmol) in xylene (60 ml), palladium acetate (0.02 g, 0.11 mmol) and tri-*tert*-butylphosphine (80 mg, 0.43 mmol) were added. After the reaction mixture had been stirred while refluxing for 24 hours, it was cooled to room temperature, quenched with water, and extracted with ethyl acetate. The organic extract was dried over  $MgSO_4$  and concentrated under vacuum. Purification by column chromatography (1:2 chloroform-hexane) afforded Chemical Compound 10 (1.69 g, 74%): MS (M+) calculated for  $C_{50}H_{31}N$  645, found 645.

#### Example 29: Synthesis of Chemical Compound 6

**[0116]** To a solution of Chemical Compound 10 (0.50 g, 0.77 mmol) in a mixture of chloroform (20 ml) and acetic acid (20 ml), bromine (0.08 ml, 1.55 mmol) in acetic acid (0.1 ml) was added dropwise at 0 °C. After the reaction mixture had been stirred for 2 hours at room temperature, it was quenched with water and extracted with chloroform. The organic layer was dried over  $MgSO_4$  and concentrated in vacuum. Purification by recrystallization from ethanol afforded Chemical Compound 6 (0.53 g, 85%): MS (M+) calculated for  $C_{50}H_{29}Br_2N$  801, found 801.

#### Example 30: Synthesis of Chemical Compound 403

**[0117]** To a suspension of Chemical Compound 6 (0.70 g, 0.87 mmol), *N*-phenyl-1-naphtylamine (0.57 g, 2.61 mmol), and sodium *tert*-butoxide (0.5 g, 5.22 mmol) in xylene (30 ml) were added palladium acetate (0.01 g, 0.05 mmol) and tri-*tert*-butylphosphine (50 mg, 0.05 mmol). After the reaction mixture had been stirred while refluxing for 24 hours, it was cooled to room temperature, quenched with water, and extracted with ethyl acetate. The organic extract was dried over  $MgSO_4$  and concentrated under vacuum. Purification by column chromatography (1:2 chloroform-hexane) afforded Chemical Compound 403 (0.39 g, 45%): mp 413.0 °C;  $^1H$  NMR (300 MHz,  $CDCl_3$ )  $\delta$  7.93 (dd,  $J$  = 4.3, 7.5 Hz, 3H), 7.82 (t,  $J$  = 8.1 Hz, 3H), 7.67 (d,  $J$  = 8.0 Hz, 2H), 7.56 (s, 2H), 7.43-7.13 (m, 22H), 7.07 (t,  $J$  = 7.9 Hz, 4H), 6.94 (dd,  $J$  = 2.2, 8.8 Hz, 3H), 6.88-6.65 (m, 10H), 6.58-6.40 (m, 3H); MS (M+) calculated for  $C_{82}H_{53}N_3$  1079, found 1079.

#### Example 31: Synthesis of Chemical Compound 11

**[0118]** To a suspension of Chemical Compound 1 (1.12 g, 2.00 mmol), diphenylamine (0.51 g, 3.00 mmol), and sodium *tert*-butoxide (0.23 g, 2.40 mmol) in xylene (15 ml) were added palladium acetate (0.01 g, 0.04 mmol) and tri-*tert*-butylphosphine (33 mg, 0.16 mmol). After the reaction mixture had been stirred while refluxing for 15 hours, it was cooled to room temperature, quenched with water, and extracted with chloroform. The organic extract was dried over  $MgSO_4$  and concentrated under vacuum. Purification by recrystallization from chloroform and ethanol afforded Chemical Compound

11 (1.22 g, 94%): MS (M+) calculated for  $C_{50}H_{33}N$  647, found 647.

#### Example 32: Synthesis of Chemical Compound 7

[0119] To a solution of Chemical Compound 11 (1.09 g, 1.68 mmol) and benzoyl peroxide (10 mg) in dry  $CCl_4$  (70 ml) was added N-bromosuccinimide (0.64 g, 3.60 mmol) over a period of 10 minutes at room temperature. After the reaction mixture had been stirred for 36 hours at room temperature, it was quenched with saturated aqueous sodium bicarbonate solution and extracted with chloroform. The organic layer was dried over  $MgSO_4$  and concentrated in vacuum. Purification by recrystallization from chloroform and ethanol afforded Chemical Compound 7 (0.99 g, 73%): MS (M+) calculated for  $C_{50}H_{31}Br_2N$  803, found 803.


#### Example 33: Synthesis of Chemical Compound 308

[0120] Chemical Compound 7 (0.97 g, 1.20 mmol) was prepared by reacting Chemical Compound 11 and N-bromosuccinimide in carbon tetrachloride, diphenylamine (0.61 g, 3.60 mmol), and sodium *tert*-butoxide (0.28 g, 2.40 mmol). To a suspension of Chemical Compound 7 in xylene (20 ml), palladium acetate (12 mg, 0.05 mmol) and tri-*tert*-butylphosphine (39 mg, 0.20 mmol) were added. After the reaction mixture had been stirred while refluxing for 24 hours, it was cooled to room temperature, quenched with water, and extracted with ethyl acetate (3 x 50 ml). The combined organic extracts were dried over  $MgSO_4$  and concentrated under vacuum. Purification by recrystallization from ethanol and ethyl acetate afforded Chemical Compound 308 (0.84 g, 71%): mp 329.2 °C;  $^1H$  NMR (300 MHz,  $CDCl_3$ )  $\delta$  7.89 (d,  $J$  = 7.3 Hz, 8H), 7.77 (d,  $J$  = 6.5 Hz, 8H), 7.41-7.20 (m, 19H), 6.78-6.60 (m, 8H), 6.40-6.32 (m, 8H); MS (M+) calculated for  $C_{74}H_{51}N_3$  981, found 981.

#### Examples of Organic EL Devices


##### Example 34: Organic EL Device Using Chemical Compound

[0121] An organic light-emitting device having the construction as illustrated in Figure 2 was fabricated with Chemical Compound 12 in the light-emitting layer 9. The preparation of Chemical Compound 12 is disclosed in the article by Clarkson and Gomberg titled *Spirans With Four Aromatic Radicals on the Spiro Carbon Atoms* (*J. Am. Chem. Soc.* 52, 2881 (1930),) which is hereby incorporated herein by reference.



Chemical Compound 12

[0122] A glass substrate coated with a thin film of ITO (indium tin oxide) having thickness of about 1500 Å was ultrasonically cleaned in a solution of a cleaning agent, dried, and transferred into a plasma cleaning device. The substrate was cleaned with oxygen plasma for 5 minutes, and transferred to a thermal vapor deposition chamber. A hole-injecting layer having thickness of about 500 Å was formed by thermal vacuum deposition of the hexanitrile hexaazatriphenylene, a stable hole-injecting material, over the ITO (anode).

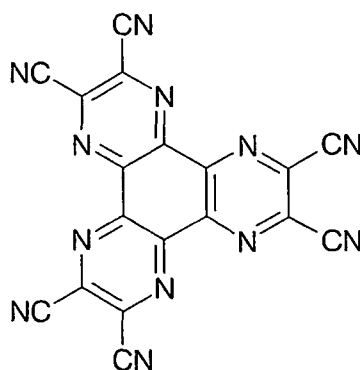

Hexanitride hexaazatriphenylene

**[0123]** A hole-transporting layer having thickness of about 600 Å was formed by thermal vacuum deposition of NPB, a hole-transporting material, over the hole-injecting layer. An emitting layer having thickness of about 150 Å was formed by thermally vacuum depositing Chemical Compound 12 over the hole-transporting layer. On top of the light-emitting layer, 8-hydroxyquinoline Aluminum salt (Alq<sub>3</sub>), an n-type organic semiconductor, was deposited with thickness of about 300 Å to form an electron-transporting layer. Then, a cathode electrode was formed by depositing 5 Å of LiF and about 2500 Å of aluminum on the electron-transporting layer. In the process, the deposition speed was controlled to maintain 1 Å/sec for organic material, 0.2 Å/sec for lithium fluoride, and 3-7 Å/sec for aluminum.

**[0124]** When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 476 nm was observed. The efficiency of the light-emitting device was 0.6 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 35: Organic EL Device Using Chemical Compound 109

**[0125]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 109 was used as the light-emitting material with thickness of about 400 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 452 nm was observed. The efficiency of the light-emitting device was 2.0 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 36: Organic EL Device Using Chemical Compound 102

**[0126]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 102 was used as the light-emitting material with thickness of about 400 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 464 nm was observed. The efficiency of the light-emitting device was 2.5 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 37: Organic EL Device Using Chemical Compound 118

**[0127]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 118 was used as the light-emitting material with thickness of 300 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 464 nm was observed. The efficiency of the light-emitting device was 2.1 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 38: Organic EL Device Using Chemical Compound 100

**[0128]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 100 was used as the light-emitting material with thickness of about 300 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 444 nm was observed. The efficiency of the light-emitting device was 0.64 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 39: Organic EL Device Using Chemical Compound 117

**[0129]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 117 was used as the light-emitting material with thickness of about 150 Å instead of Chemical Compound

12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 484 nm was observed. The efficiency of the light-emitting device was 2.4 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 40: Organic EL Device Using Chemical Compound 113

**[0130]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 113 was used as the light-emitting material with thickness of about 150 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 452 nm from the compound having a structure of Chemical Compound 113 was observed. The efficiency of the light-emitting device was 1.6 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 41: Organic EL Device Using Chemical Compound 111

**[0131]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 111 was used as the light-emitting material with thickness of 150 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 452 nm was observed. The efficiency of the light-emitting device was 2.1 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 42: Organic EL Device Using Chemical Compound 110

**[0132]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 110 was used as the light-emitting material with thickness of 150 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 440 nm was observed. The efficiency of the light-emitting device was 1.9 cd/A at a current density of 10 mA/cm<sup>2</sup>. Figure 7 shows the spectrum of light emission of this device.

#### Example 43: Organic EL Device Using Chemical Compound 134

**[0133]** An organic light-emitting device was produced in the same manner as in Example 34 except that Chemical Compound 134 was used as the light-emitting material with thickness of 300 Å instead of Chemical Compound 12. When forward bias was applied across the light-emitting device, green light emission centered at the wavelength of 508 nm was observed. The efficiency of the light-emitting device was 1.3 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 44: Organic EL Device Using Chemical Compound 200


**[0134]** An organic light-emitting device having the construction as illustrated in Figure 2 was manufactured, in which Chemical Compound 200 was used as an electron-transporting material.

**[0135]** A glass substrate coated with a thin film of ITO (indium tin oxide) having thickness of about 1500 Å was ultrasonically cleaned in a solution of a cleaning agent, dried, and transferred into a plasma cleaning device. The substrate was cleaned with oxygen plasma for 5 minutes, and transferred to a thermal vapor deposition chamber. A hole-injecting layer having thickness of about 500 Å was formed by thermal vacuum deposition of hexanitrile hexaazatriphenylene over the ITO coating (anode). A hole-transporting layer having thickness of about 600 Å was formed by thermal vacuum deposition of NPB over the hole-injecting layer. An emitting layer having thickness of about 150 Å was formed by thermal vacuum deposition of Chemical Compound 117. On top of the light-emitting layer, Chemical Compound 200 was deposited under vacuum with thickness of about 300 Å to form an electron-transporting layer. Then, an cathode electrode was formed by depositing 5 Å of LiF and about 2500 Å of aluminum on the electron-transporting layer. In the process, the depositing speed was controlled to maintain 1 Å/sec for organic material; 0.2 Å/sec for lithium fluoride, and 3-7 Å/sec for aluminum.

**[0136]** When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 464 nm was observed. The efficiency of the light-emitting device was 3.8 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 45: Organic EL Device Using Chemical Compound 110

**[0137]** An organic light-emitting device having the construction as illustrated in Figure 2 was manufactured, using Chemical Compound 110 as a host light-emitting molecule and tetra t-butyl perylene as a dopant molecule.




Tetra t-butyl perylene

**[0138]** A glass substrate coated with a thin film of ITO (indium tin oxide) having thickness of about 1500 Å was ultrasonically cleaned in a solution of a cleaning agent, dried, and transferred into a plasma cleaning device. The substrate was cleaned with oxygen plasma for 5 minutes, and transferred to a thermal vapor deposition chamber. A hole-injecting layer having thickness of about 500Å was formed by thermal vacuum deposition of hexanitride hexaazatriphenylene over the ITO (anode). A hole-transporting layer having thickness of about 600Å was formed by thermal vacuum deposition of NPB over the hole-injecting layer. An emitting layer having thickness of about 150Å was formed by co-deposition of Chemical Compound 110 and 1 wt% of tetra t-butyl perylene. On top of the light-emitting layer, 8-hydroxyquinoline Aluminum salt (Alq3) was deposited with a thickness of about 300 Å to form an electron-transporting layer. Then, a cathode electrode was formed by depositing 5 Å of LiF and about 2500 Å of aluminum on the electron-transporting layer. In the process, the depositing speed was controlled to maintain 3 Å/sec for the host material and 0.2 Å/sec for lithium fluoride, and 3-7 Å/sec for aluminum.

**[0139]** When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 464 nm was observed. The efficiency of the light-emitting device was 3.0 cd/A at a current density of 10 mA/cm<sup>2</sup>. Figure 8 shows the light-emission spectrum of this device. The center wavelength (464 nm) of this spectrum is longer than that in the spectrum of Figure 7 (440 nm) where Chemical compound 110 was used as the only light-emitting material. This explains that most of the light emission was made in the dopant molecules rather than in the host molecule Chemical compound 110.

#### Example 46: Organic EL Device Using Chemical Compound 110

**[0140]** An organic light-emitting device having the construction as illustrated in Figure 2 was manufactured, using Chemical Compound 110 as a host light-emitting molecule and DSA amine as a dopant molecule.

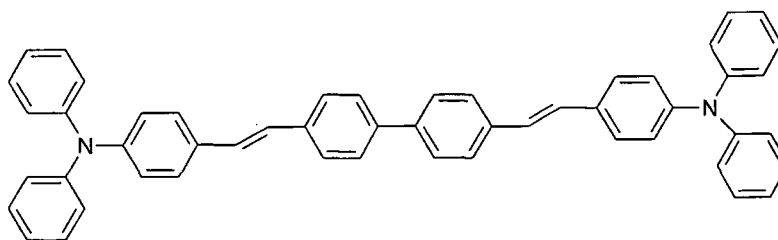

DSA amine

The organic light-emitting device was obtained in the same manner as in Example 45 except that the thickness of the emitting layer was about 300 Å and DSA amine was used codeposited with Chemical Compound 110 as a dopant material instead of tetra t-butyl perylene. When forward bias was applied across the light-emitting device, blue light emission centered at the wavelength of 460 nm was observed. The efficiency of the light-emitting device was 4.6 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 47: Organic EL Device Using Chemical Compound 301

**[0141]** An organic light-emitting device having the construction shown in Figure 3 was manufactured, using Chemical Compound 301 as a hole-transporting material.

**[0142]** A glass substrate coated with a thin film of ITO (indium tin oxide) having thickness of about 1500 Å was ultrasonically cleaned in a solution of a cleaning agent, dried, and transferred into a plasma cleaning device. The substrate

was cleaned with oxygen plasma for 5 minutes, and transferred to a thermal vapor deposition chamber. A hole-injecting layer having thickness of about 500 Å was formed by thermal vacuum deposition of hexanitrile hexaazatriphenylene over the ITO coating (anode). A hole-transporting layer having thickness of about 400 Å was formed by thermal vacuum deposition of Chemical Compound 301 over the hole-injecting layer. On top of the hole-transporting layer, about 600 Å of 8-hydroxyquinoline Aluminum salt (Alq3) was deposited to form an emitting layer having electron-transporting properties as well. Then, an cathode electrode was formed by depositing 5 Å of LiF and about 2500 Å of aluminum on the electron-transporting layer. In the process, the depositing speed was controlled to maintain 1 Å/sec for organic material, 0.2 Å/sec for lithium fluoride, and 3-7 Å/sec for aluminum.

[0143] When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 512 nm was observed. The efficiency of the light-emitting device was 4.6 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 48: Organic EL Device Using Chemical Compound 400

[0144] An organic light-emitting device was obtained in the same manner as in Example 47 except that Chemical Compound 400 was used as a hole-transporting material instead of Chemical Compound 301. When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 536 nm was observed. The efficiency of the light-emitting device was 3.4 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 49: Organic EL Device Using Chemical Compound 303

[0145] An organic light-emitting device was obtained in the same manner as in Example 47 except that Chemical Compound 303 was used as a hole-transporting material instead of Chemical Compound 301. When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 536 nm was observed. The efficiency of the light-emitting device was 4.3 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 50: Organic EL Device Using Chemical Compound 403

[0146] An organic light-emitting device was obtained in the same manner as in Example 47 except that Chemical Compound 403 was used as a hole-transporting material instead of Chemical Compound 301. When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 540 nm was observed. The efficiency of the light-emitting device was 3.7 cd/A at a current density of 10 mA/cm<sup>2</sup>.

#### Example 51: Organic EL Device Using Chemical Compound 305


[0147] An organic light-emitting device was obtained in the same manner as in Example 47 except that Chemical Compound 305 was used as a hole-transporting material instead of Chemical Compound 301. When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 540 nm was observed. The efficiency of the light-emitting device was 4.8 cd/A at a current density of 10 mA/cm<sup>2</sup>. Figure 9 illustrates the light-emission spectrum of this device. Chemical Compound 305 used in the hole-transporting layer 7 has the band gap corresponding to blue light emission. Because the emitted light is green, not blue, Chemical Compound 305 is assumed to transport holes from the hole-injecting layer 5 to the light-emitting layer 9, rather than emitting light from itself.

#### Example 52: Organic EL Device Using Chemical Compound 308

[0148] An organic light-emitting device was obtained in the same manner as in Example 47 except that Chemical Compound 308 was used as a hole-transporting material instead of Chemical Compound 301. When forward bias was applied across the light-emitting device, green light emission from the Alq3 centered at the wavelength of 540 nm was observed. The efficiency of the light-emitting device was 2.3 cd/A at a current density of 10 mA/cm<sup>2</sup>.

## Claims

1. A chemical compound of Chemical Formula I:

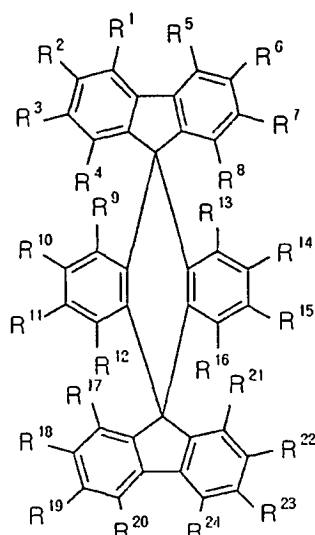


Chemical Formula 1


wherein R1 through R24 are substituent groups, identical or different, and wherein not all of R1 through R24 are hydrogen.

2. The chemical compound of Claim 1, wherein one or more of R1-R24 are selected from the aryl group consisting of phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl, and heteroaryl, which are either substituted or unsubstituted.
3. The chemical compound of Claim 2, wherein the aryl groups are further substituted with one or more phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl or heteroaryl, which are either substituted or unsubstituted.
4. The chemical compound of Claim 1, wherein one or more of the R1-R24 are selected from the heteroaryl group consisting of thiophenyl, thiazolyl, oxazolyl, imidazolyl, and pyrazinyl, either substituted or unsubstituted.
5. The chemical compound of Claim 1, wherein one or more of R1-R24 are selected from the group consisting of amines with at least one aryl substituent and aryl including phenyl, biphenyl, terphenyl, benzyl, naphthyl, anthracyl, tetracenyl, pentacenyl, perylenyl, coronenyl and heteroaryl.
6. The chemical compound of Claim 1, wherein at least one of R1-R24 is anthracene or heteroaryl.
7. The chemical compound of Claim 1, wherein the substituent groups R1 through R24 can be substituted by one or more organic moieties satisfying General Formula I.
8. The chemical compound of Claim 1, wherein one or more of the R3, R7, R10, R11, R14, R15, R18, and R22 are substituted with non-hydrogen substituent groups.
9. The chemical compound of Claim 1, wherein one or more pairs of R3 and R7; R18 and R22; R10 and R15; and R11 and R14 are substituted with non-hydrogen substituent groups.
10. The chemical compound of Claim 1, wherein the compound is selected from the group consisting of Chemical Compounds 1-11, 100-137, 200-222, 300-308, and 400-413 as shown below, and wherein "Br" in Chemical Compounds 1, 2 and 5-7 may be substituted with another leaving group:







Chemical Compound 1




Chemical Compound 2




Chemical Compound 3




Chemical Compound 4




Chemical Compound 5




Chemical Compound 6




Chemical Compound 7




Chemical Compound 8




Chemical Compound 9




Chemical Compound 10




Chemical Compound 11

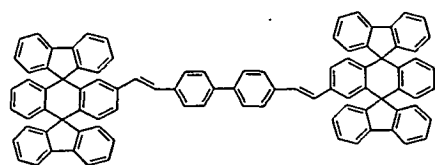


Chemical Compound 100

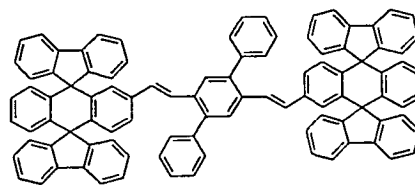


Chemical Compound 101




Chemical Compound 102



Chemical Compound 103




Chemical Compound 104




Chemical Compound 105

5




Chemical Compound 106

10




Chemical Compound 107

15




Chemical Compound 108

20




Chemical Compound 109

25




Chemical Compound 110

30




Chemical Compound 111

35




Chemical Compound 112

40




Chemical Compound 113

45

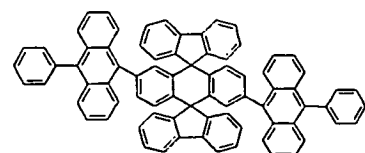


Chemical Compound 114

50

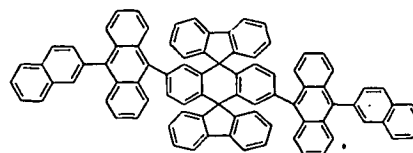


Chemical Compound 115


55




Chemical Compound 116




Chemical Compound 117




Chemical Compound 118




Chemical Compound 119




Chemical Compound 120

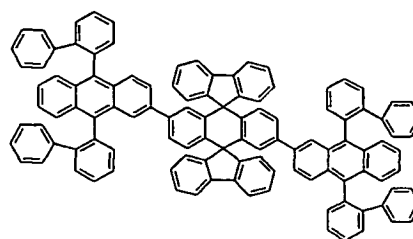


Chemical Compound 121

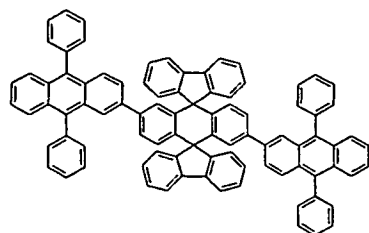


Chemical Compound 122

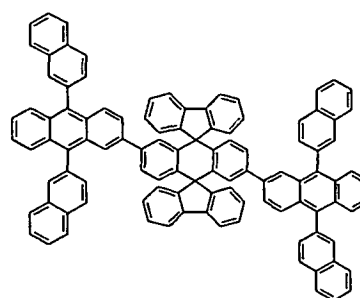


Chemical Compound 123




Chemical Compound 124




Chemical Compound 125

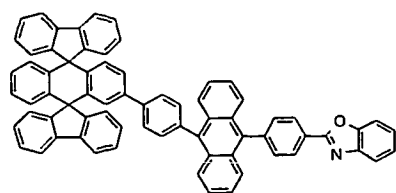


Chemical Compound 126



Chemical Compound 127

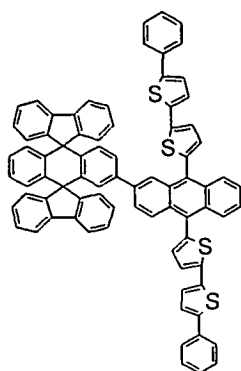

Chemical Compound 128

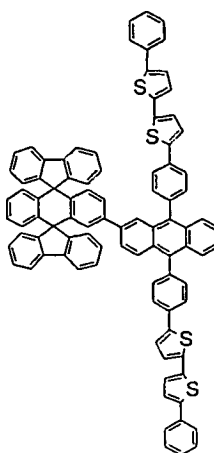


Chemical Compound 129

5


10

15

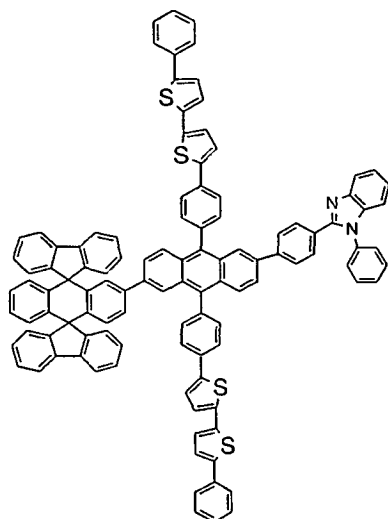


Chemical Compound 130

20

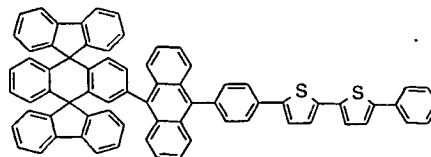


Chemical Compound 131

25

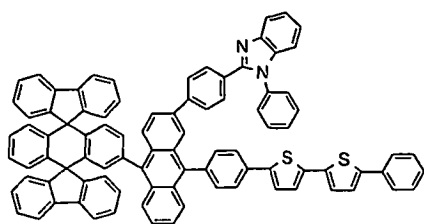


Chemical Compound 132

30

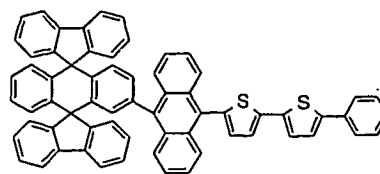


Chemical Compound 133

35




Chemical Compound 134

40




Chemical Compound 135

45




Chemical Compound 136

50




Chemical Compound 137


55




Chemical Compound 200




Chemical Compound 201




Chemical Compound 202

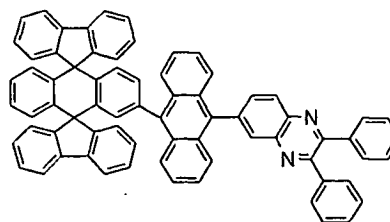


Chemical Compound 203




Chemical Compound 204




Chemical Compound 205




Chemical Compound 206




Chemical Compound 207




Chemical Compound 208




Chemical Compound 209




Chemical Compound 210

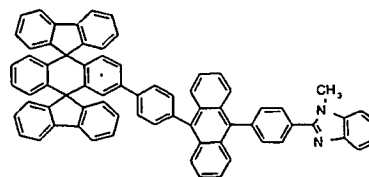


Chemical Compound 211




Chemical Compound 212



Chemical Compound 213




Chemical Compound 214




Chemical Compound 215







Chemical Compound 216




Chemical Compound 217




Chemical Compound 218




Chemical Compound 219




Chemical Compound 220




Chemical Compound 221

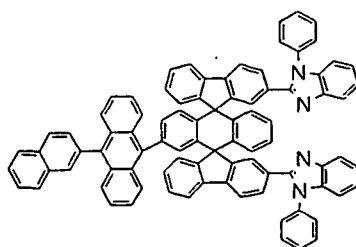


Chemical Compound 222




Chemical Compound 300




Chemical Compound 301




Chemical Compound 302




Chemical Compound 303




Chemical Compound 304




Chemical Compound 305




Chemical Compound 306




Chemical Compound 307




Chemical Compound 308




Chemical Compound 400




Chemical Compound 401

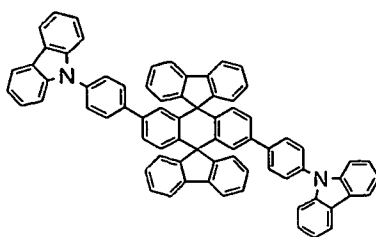


Chemical Compound 402




Chemical Compound 403




Chemical Compound 404




Chemical Compound 405




Chemical Compound 406




Chemical Compound 407

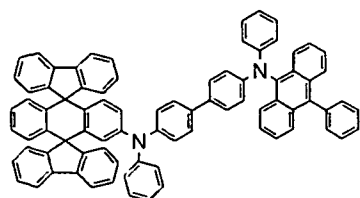


Chemical Compound 408

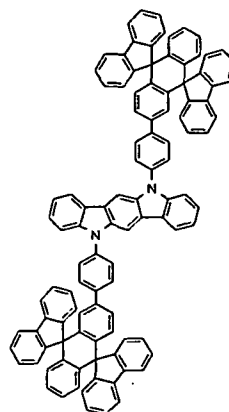


Chemical Compound 409




Chemical Compound 410



Chemical Compound 411



Chemical compound 412




Chemical Compound 413.

11. The chemical compound of Claim 1, wherein the compound has a melting point above about 300°C.
12. The chemical compound of Claim 1, wherein the compound has a band-gap corresponding to visible light emission.
13. The chemical compound of Claim 12, wherein the band-gap for the visible light emission is from about 1.8 eV to about 3.5 eV.
14. The chemical compound of Claim 12, wherein the band-gap corresponds to blue, green or red light emission.
15. The chemical compound of Claim 1, wherein the compound has a hole-transporting property.
16. The chemical compound of Claim 1, wherein hole mobility in the compound is about  $1 \times 10^{-7}$  cm<sup>2</sup>/Vs or greater.
17. The chemical compound of Claim 1, wherein the compound has an electron-transporting property.

18. The chemical compound of Claim 1, wherein electron mobility in the compound is about  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  or greater.
19. The chemical compound of Claim 1, wherein the compound has a hole-injecting property.
20. The chemical compound of Claim 1, wherein the compound has the highest occupied molecular orbital (HOMO) level from about -4.0 eV to about -6.0 eV.
21. The chemical compound of Claim 1, wherein the compound has an electron-injecting property.
22. The chemical compound of Claim 1, wherein the compound has the lowest unoccupied molecular orbital (LUMO) level from about -2.5 eV to about -4.0 eV.
23. A light-emitting material comprising one or more of the chemical compounds of Claim 1.
24. The light-emitting material of Claim 23, wherein the chemical compounds are selected from the group consisting of Chemical Compounds 100-137, 200-222, and 400-413 according to claim 10.
25. A hole-transporting material comprising one or more of the chemical compounds of Claim 1:
26. The hole-transporting material of Claim 25, wherein the chemical compounds are selected from the group consisting of Chemical Compounds 300-308 and 400-413 according to claim 10.
27. An electron-transporting material comprising one or more of the chemical compounds of Claim 1.
28. The electron-transporting material of Claim 27, wherein the chemical compounds are selected from the group consisting of Chemical Compounds 200-222 according to Claim 10.

## Patentansprüche

1. Chemische Verbindung der Chemischen Formel I:

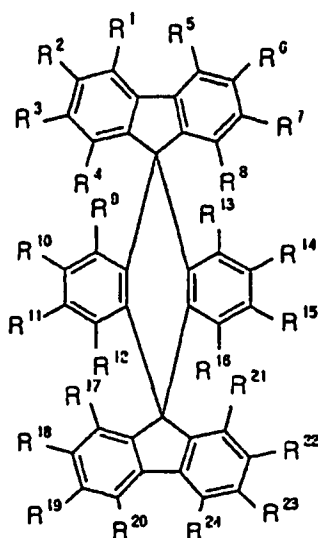


Chemische Formel 1

wobei  $R^1$  bis  $R^{24}$  gleiche oder verschiedene Substituentengruppen sind und nicht alle von  $R^1$  bis  $R^{24}$  Wasserstoff sind.


2. Chemische Verbindung nach Anspruch 1, wobei eines oder mehrere von  $R^1$  bis  $R^{24}$  ausgewählt sind aus der

Arylgruppe, die aus Phenyl, Biphenyl, Terphenyl, Benzyl, Naphthyl, Anthracyl, Tetracenyl, Pentacenyl, Perylenyl, Coronenyl und Heteroaryl besteht, die entweder substituiert oder nicht substituiert sind.


3. Chemische Verbindung nach Anspruch 2, wobei die Arylgruppen ferner mit einem oder mehreren von Phenyl, Biphenyl, Terphenyl, Benzyl, Naphthyl, Anthracyl, Tetracenyl, Pentacenyl, Perylenyl, Coronenyl oder Heteroaryl substituiert sind, die entweder substituiert oder nicht substituiert sind.
4. Chemische Verbindung nach Anspruch 1, wobei eines oder mehrere von  $R^1$  bis  $R^{24}$  ausgewählt sind aus der Heteroarylgruppe, die aus substituiertem oder nicht substituiertem Thiophenyl, Thiazolyl, Oxazolyl, Imidazolyl und Pyrazinyl besteht.
5. Chemische Verbindung nach Anspruch 1, wobei eines oder mehrere von  $R^1$  bis  $R^{24}$  ausgewählt sind aus der aus Aminen mit mindestens einem Arylsubstituenten und Aryl einschließlich Phenyl, Biphenyl, Terphenyl, Benzyl, Naphthyl, Anthracyl, Tetracenyl, Pentacenyl, Perylenyl, Coronenyl und Heteroaryl bestehenden Gruppe.
6. Chemische Verbindung nach Anspruch 1, wobei mindestens eines von  $R^1$  bis  $R^{24}$  Anthracen oder Heteroaryl ist.
7. Chemische Verbindung nach Anspruch 1, wobei die Substituentengruppen  $R^1$  bis  $R^{24}$  durch eine oder mehrere organische Komponenten substituiert sein können, die der Allgemeinen Formel I entsprechen.
8. Chemische Verbindung nach Anspruch 1, wobei eines oder mehrere von  $R^3$ ,  $R^7$ ,  $R^{10}$ ,  $R^{11}$ ,  $R^{14}$ ,  $R^{15}$ ,  $R^{18}$  und  $R^{22}$  mit Substituentengruppen substituiert sind, die nicht Wasserstoff sind.
9. Chemische Verbindung nach Anspruch 1, wobei eines oder mehrere der Paare  $R^3$  und  $R^7$ ;  $R^{18}$  und  $R^{22}$ ;  $R^{10}$  und  $R^{15}$ ; und  $R^{11}$  und  $R^{14}$  mit Substituentengruppen substituiert sind, die nicht Wasserstoff sind.
10. Chemische Verbindung nach Anspruch 1, wobei die Verbindung ausgewählt ist aus der aus den nachfolgend dargestellten Chemischen Verbindungen 1-11, 100-137, 200-222, 300-308 und 400-413 bestehenden Gruppe, und wobei "Br" in den Chemischen Verbindungen 1, 2 und 5-7 mit einer anderen Abgangsgruppe substituiert sein kann:




Chemische Verbindung 1




Chemische Verbindung 2




Chemische Verbindung 3




Chemische Verbindung 4




Chemische Verbindung 5




Chemische Verbindung 6




Chemische Verbindung 7




Chemische Verbindung 8




Chemische Verbindung 9




Chemische Verbindung 10




Chemische Verbindung 11

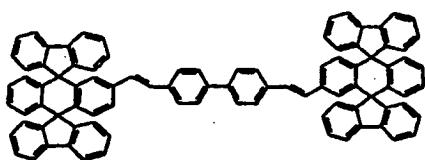


Chemische Verbindung 100

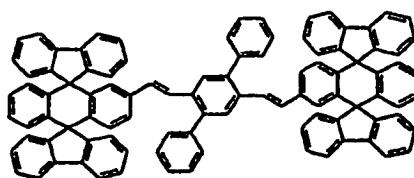


Chemische Verbindung 101




Chemische Verbindung 102




Chemische Verbindung 103




Chemische Verbindung 104




Chemische Verbindung 105




Chemische Verbindung 106



Chemische Verbindung 107




Chemische Verbindung 108



Chemische Verbindung 109




5




Chemische Verbindung 110

10




Chemische Verbindung 111

15




Chemische Verbindung 112

20




Chemische Verbindung 113

25

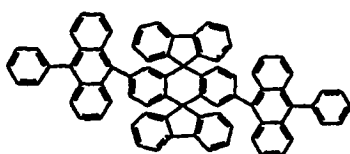


Chemische Verbindung 114

30

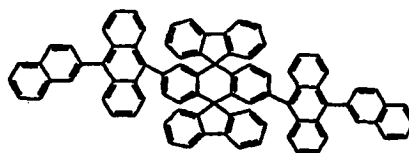


Chemische Verbindung 115

35




Chemische Verbindung 116

40




Chemische Verbindung 117

45




Chemische Verbindung 118

50




Chemische Verbindung 119


55




Chemische Verbindung 120

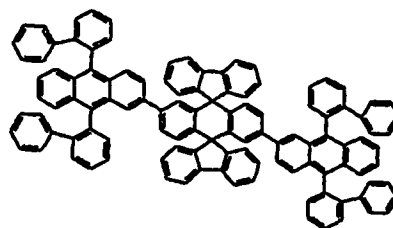


Chemische Verbindung 121

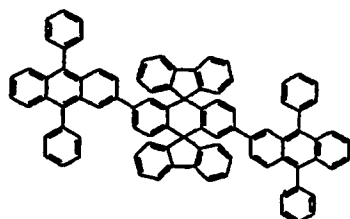


Chemische Verbindung 122




Chemische Verbindung 123




Chemische Verbindung 124



Chemische Verbindung 125

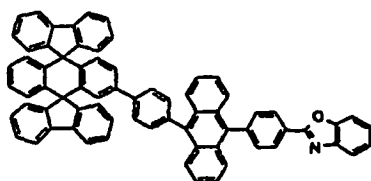

Chemische Verbindung 126




Chemische Verbindung 127


5

10

15

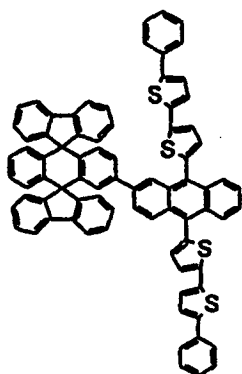

Chemische Verbindung 128

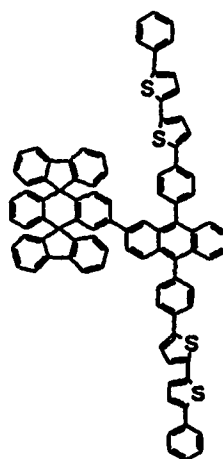


Chemische Verbindung 129

20


25

30

35

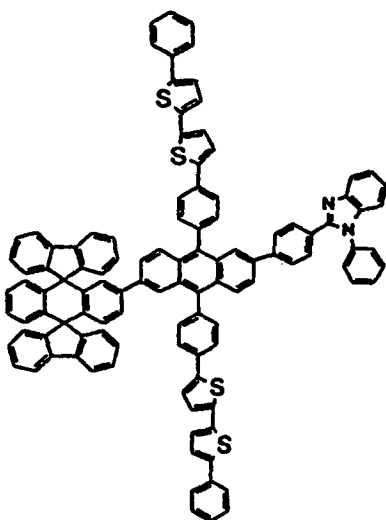

Chemische Verbindung 130

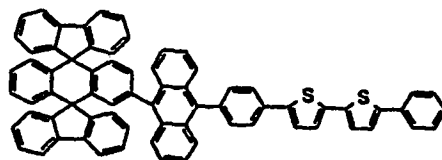


Chemische Verbindung 131

40


45

50


55

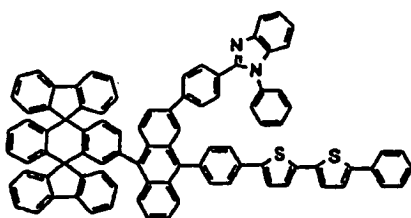


Chemische Verbindung 132

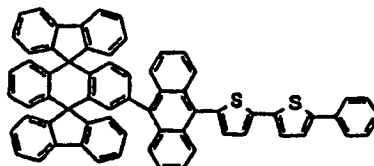


Chemische Verbindung 133




Chemische Verbindung 134




Chemische Verbindung 135




Chemische Verbindung 136




Chemische Verbindung 137




Chemische Verbindung 200




Chemische Verbindung 201




Chemische Verbindung 202

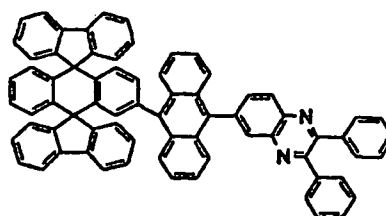


Chemische Verbindung 203




Chemische Verbindung 204




Chemische Verbindung 205




Chemische Verbindung 206




Chemische Verbindung 207




Chemische Verbindung 208




Chemische Verbindung 209

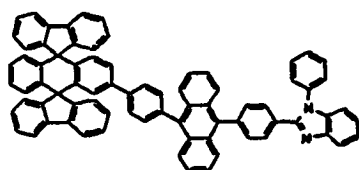


Chemische Verbindung 210

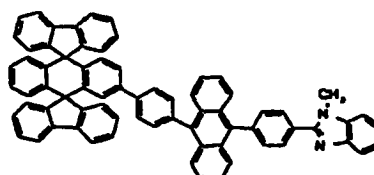


Chemische Verbindung 211




Chemische Verbindung 212




Chemische Verbindung 213




Chemische Verbindung 214




Chemische Verbindung 215




Chemische Verbindung 216




Chemische Verbindung 217




Chemische Verbindung 218




Chemische Verbindung 219




Chemische Verbindung 220




Chemische Verbindung 221




Chemische Verbindung 222




Chemische Verbindung 300




Chemische Verbindung 301




Chemische Verbindung 302




Chemische Verbindung 303




Chemische Verbindung 304




Chemische Verbindung 305




Chemische Verbindung 306




Chemische Verbindung 307




Chemische Verbindung 308




Chemische Verbindung 400




Chemische Verbindung 401

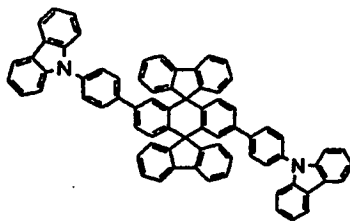


Chemische Verbindung 402



Chemische Verbindung 403




Chemische Verbindung 404




Chemische Verbindung 405







Chemische Verbindung 406




Chemische Verbindung 407




Chemische Verbindung 408

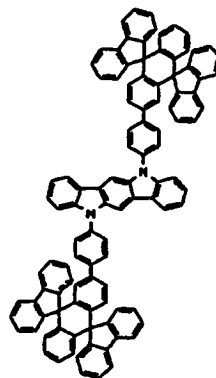


Chemische Verbindung 409




Chemische Verbindung 410



Chemische Verbindung 411



Chemische Verbindung 412




Chemische Verbindung 413.

11. Chemische Verbindung nach Anspruch 1, wobei die Verbindung einen Schmelzpunkt über etwa 300°C hat.
12. Chemische Verbindung nach Anspruch 1, wobei die Verbindung einen der Emission von sichtbarem Licht entsprechenden Bandabstand hat.
13. Chemische Verbindung nach Anspruch 12, wobei der Bandabstand für die Emission von sichtbarem Licht von etwa 1,8 eV bis etwa 3,5 eV beträgt.

14. Chemische Verbindung nach Anspruch 12, wobei der Bandabstand der Emission von blauem, grünem oder rotem Licht entspricht.
15. Chemische Verbindung nach Anspruch 1, wobei die Verbindung eine löchertransportierende Eigenschaft hat.
16. Chemische Verbindung nach Anspruch 1, wobei die Löcherbeweglichkeit in der Verbindung etwa  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  oder mehr beträgt.
17. Chemische Verbindung nach Anspruch 1, wobei die Verbindung eine elektronentransportierende Eigenschaft hat.
18. Chemische Verbindung nach Anspruch 1, wobei die Elektronenbeweglichkeit in der Verbindung etwa  $1 \times 10^{-7} \text{ cm}^2/\text{Vs}$  oder mehr beträgt.
19. Chemische Verbindung nach Anspruch 1, wobei die Verbindung eine löcherinjizierende Eigenschaft hat.
20. Chemische Verbindung nach Anspruch 1, wobei die Verbindung ein Niveau des höchsten besetzten Molekülorbitals (HOMO-Niveau) von etwa -4,0 eV bis etwa -6,0 eV hat.
21. Chemische Verbindung nach Anspruch 1, wobei die Verbindung eine elektroneninjizierende Eigenschaft hat.
22. Chemische Verbindung nach Anspruch 1, wobei die Verbindung ein Niveau des niedrigsten unbesetzten Molekülorbitals (LUMO-Niveau) von etwa -2,5 eV bis etwa -4,0 eV hat.
23. Lichtemittierendes Material, das eine oder mehrere der chemischen Verbindungen von Anspruch 1 umfaßt.
24. Lichtemittierendes Material nach Anspruch 23, wobei die chemischen Verbindungen ausgewählt sind aus der aus den Chemischen Verbindungen 100-137, 200-222 und 400-413 gemäß Anspruch 10 bestehenden Gruppe.
25. Löchertransportierendes Material, das eine oder mehrere der chemischen Verbindungen von Anspruch 1 umfaßt.
26. Löchertransportierendes Material nach Anspruch 25, wobei die chemischen Verbindungen ausgewählt sind aus der aus den Chemischen Verbindungen 300-308 und 400-413 gemäß Anspruch 10 bestehenden Gruppe.
27. Elektronentransportierendes Material, das eine oder mehrere der chemischen Verbindungen von Anspruch 1 umfaßt.
28. Elektronentransportierendes Material nach Anspruch 27, wobei die chemischen Verbindungen ausgewählt sind aus der aus den Chemischen Verbindungen 200-222 gemäß Anspruch 10 bestehenden Gruppe.

## Revendications


1. Composé chimique de formule chimique 1 suivante :

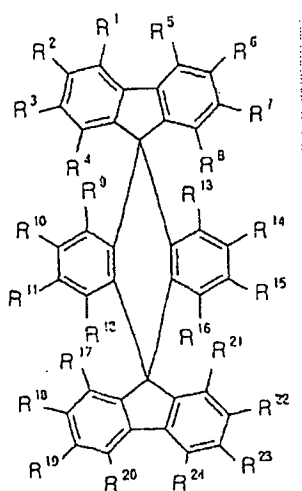


Formule chimique 1

dans laquelle les symboles  $R^1$  à  $R^{24}$  représentent des substituants identiques ou différents et ne représentent pas tous des atomes d'hydrogène.


2. Composé chimique conforme à la revendication 1, dans lequel un ou plusieurs des substituants représentés par les symboles  $R^1$  à  $R^{24}$  sont choisis dans l'ensemble de groupes aryle formé par les groupes phényle, biphenyle, terphényle, benzyle, naphtyle, anthryle, tétracényle, pentacényle, pérylényle, coronényle et les groupes hétéroaryle, groupes dotés ou non de substituant(s).
3. Composé chimique conforme à la revendication 2, dans lequel lesdits groupes aryle portent encore un ou plusieurs substituants phényle, biphenyle, terphényle, benzyle, naphtyle, anthryle, tétracényle, pentacényle, pérylényle, coronényle ou hétéroaryle, eux-mêmes dotés ou non de substituant(s).
4. Composé chimique conforme à la revendication 1, dans lequel un ou plusieurs des substituants représentés par les symboles  $R^1$  à  $R^{24}$  sont choisis dans l'ensemble de groupes hétéroaryle formé par les groupes thiényl, thiazolyle, oxazolyle, imidazolyle et pyrazinyle, groupes dotés ou non de substituant(s).
5. Composé chimique conforme à la revendication 1, dans lequel un ou plusieurs des substituants représentés par les symboles  $R^1$  à  $R^{24}$  sont choisis dans l'ensemble des groupes amino comportant au moins un substituant aryle, lequel substituant aryle englobe les groupes phényle, biphenyle, terphényle, benzyle, naphtyle, anthryle, tétracényle, pentacényle, pérylényle, coronényle et hétéroaryle,
6. Composé chimique conforme à la revendication 1, dans lequel au moins l'un des substituants représentés par les symboles  $R^1$  à  $R^{24}$  est un groupe anhryle ou hétéroaryle.
7. Composé chimique conforme à la revendication 1, dans lequel les substituants représentés par les symboles  $R^1$  à  $R^{24}$  peuvent eux-mêmes porter, en tant que substituant(s), un ou plusieurs fragments organiques correspondant à la formule générale I.
8. Composé chimique conforme à la revendication 1, dans lequel un ou plusieurs des groupes représentés par les symboles  $R^3$ ,  $R^7$ ,  $R^{10}$ ,  $R^{11}$ ,  $R^{14}$ ,  $R^{15}$ ,  $R^{18}$  et  $R^{22}$  portent des substituants qui ne sont pas des atomes d'hydrogène.
9. Composé chimique conforme à la revendication 1, dans lequel une ou plusieurs des paires de groupes représentés par les symboles  $R^3$  et  $R^7$ ,  $R^{18}$  et  $R^{22}$ ,  $R^{10}$  et  $R^{15}$ , et  $R^{11}$  et  $R^{14}$ , portent des substituants qui ne sont pas des atomes d'hydrogène.
10. Composé chimique conforme à la revendication 1, lequel composé est choisi dans l'ensemble des composés chimiques 1 à 11, 100 à 137, 200 à 222, 300 à 308 et 400 à 413 présentés ci-dessous, l'atome de brome des composés chimiques 1, 2 et 5 à 7 pouvant être remplacé par un autre groupe partant :




Composé chimique 1




Composé chimique 2




Composé chimique 3




Composé chimique 4




Composé chimique 5




Composé chimique 6




Composé chimique 7




Composé chimique 8




Composé chimique 9




Composé chimique 10




Composé chimique 11




Composé chimique 100

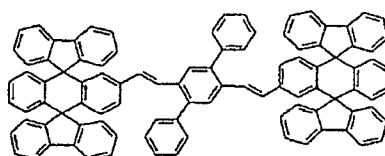

Composé chimique 101




Composé chimique 102




Composé chimique 103

5



10


Composé chimique 104



Composé chimique 105


15

20




25

Composé chimique 106




Composé chimique 107

30



35


Composé chimique 108



40


Composé chimique 109

45



50



Composé chimique 110



55

Composé chimique 111

5





10

Composé chimique 112

Composé chimique 113

15

20





25

Composé chimique 114

Composé chimique 115

30





35

Composé chimique 116

Composé chimique 117

40

45




50


Composé chimique 118

Composé chimique 119


55




Composé chimique 120

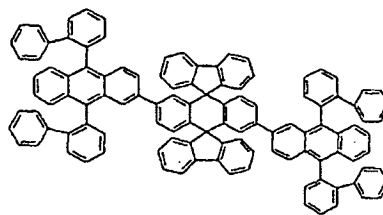


Composé chimique 121




Composé chimique 122




Composé chimique 123




Composé chimique 124



Composé chimique 125

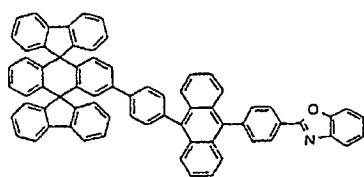

Composé chimique 126




Composé chimique 127




5

10

15



Composé chimique 128

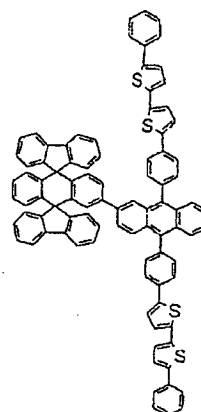


Composé chimique 129

20


25

30

35

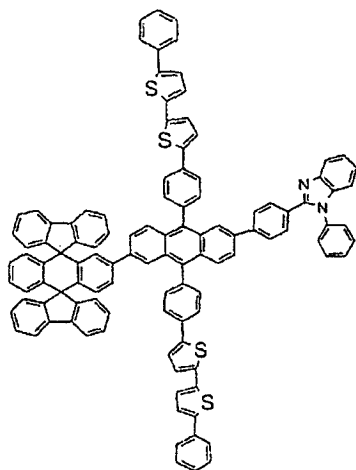


Composé chimique 130




Composé chimique 131

40

45

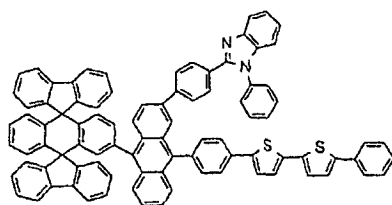


Composé chimique 132

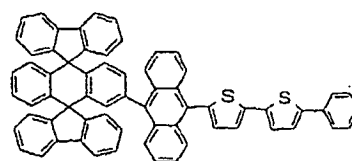

Composé chimique 133


55

5




Composé chimique 134

10




Composé chimique 135

15



Composé chimique 136


20



Composé chimique 137


25

30




Composé chimique 200

35




Composé chimique 201

40



Composé chimique 202

45

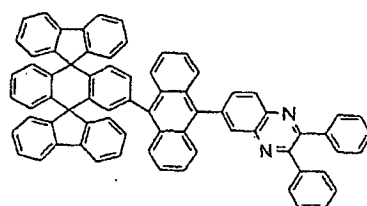


Composé chimique 203


50

55

5




Composé chimique 204



Composé chimique 205


10

15



Composé chimique 206

20




Composé chimique 207

25


30

35



Composé chimique 208


40




Composé chimique 209

45

50




Composé chimique 210




Composé chimique 211


55




Composé chimique 212




Composé chimique 213




Composé chimique 214




Composé chimique 215




Composé chimique 216




Composé chimique 217




Composé chimique 218




Composé chimique 219




Composé chimique 220




Composé chimique 221




Composé chimique 222




Composé chimique 300




Composé chimique 301




Composé chimique 302




Composé chimique 303




Composé chimique 304




Composé chimique 305




Composé chimique 306




Composé chimique 307




Composé chimique 308




Composé chimique 400




Composé chimique 401




Composé chimique 402




Composé chimique 403




Composé chimique 404




Composé chimique 405




Composé chimique 406




Composé chimique 407




Composé chimique 408

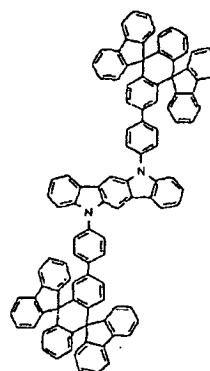


Composé chimique 409




Composé chimique 410



Composé chimique 411



Composé chimique 412



Composé chimique 413

11. Composé chimique conforme à la revendication 1, lequel composé présente un point de fusion supérieur à environ 300 °C.
12. Composé chimique conforme à la revendication 1, lequel composé présente une bande interdite dont la largeur correspond à l'émission d'une lumière visible.
13. Composé chimique conforme à la revendication 12, dans lequel la bande interdite de largeur correspondant à l'émission d'une lumière visible est large d'à peu près 1,8 à 3,5 eV.
14. Composé chimique conforme à la revendication 12, dans lequel la largeur de la bande interdite correspond à l'émission d'une lumière bleue, verte ou rouge.
15. Composé chimique conforme à la revendication 1, lequel composé présente une propriété de transport de trous.
16. Composé chimique conforme à la revendication 1, au sein duquel la mobilité des trous vaut au moins à peu près  $1 \cdot 10^{-7} \text{ cm}^2/\text{V.s}$ .
17. Composé chimique conforme à la revendication 1, lequel composé présente une propriété de transport d'électrons.
18. Composé chimique conforme à la revendication 1, au sein duquel la mobilité des électrons vaut au moins à peu près  $1 \cdot 10^{-7} \text{ cm}^2/\text{V.s}$ .
19. Composé chimique conforme à la revendication 1, lequel composé présente une propriété d'injection de trous.
20. Composé chimique conforme à la revendication 1, dans lequel le niveau de la HOMO (la plus haute orbitale moléculaire occupée) vaut à peu près de -4,0 à -6,0 eV.
21. Composé chimique conforme à la revendication 1, lequel composé présente une propriété d'injection d'électrons.
22. Composé chimique conforme à la revendication 1, dans lequel le niveau de la LUMO (la plus basse orbitale moléculaire vacante) vaut à peu près de -2,5 à -4,0 eV.



## EP 1 294 823 B1

- 23.** Matériau photo-émetteur comprenant un ou plusieurs des composés chimiques conformes à la revendication 1.
- 24.** Matériau photo-émetteur conforme à la revendication 23, dans lequel les composés chimiques sont choisis parmi les Composés chimiques 100 à 137, 200 à 222 et 400 à 413 indiqués dans la revendication 10.
- 25.** Matériau transporteur de trous, comprenant un ou plusieurs des composés chimiques conformes à la revendication 1.
- 26.** Matériau transporteur de trous, conforme à la revendication 25, dans lequel les composés chimiques sont choisis parmi les Composés chimiques 300 à 308 et 400 à 413 indiqués dans la revendication 10.
- 27.** Matériau transporteur d'électrons, comprenant un ou plusieurs des composés chimiques conformes à la revendication 1.
- 28.** Matériau transporteur d'électrons, conforme à la revendication 27, dans lequel les composés chimiques sont choisis parmi les Composés chimiques 200 à 222 indiqués dans la revendication 10.

FIG.1

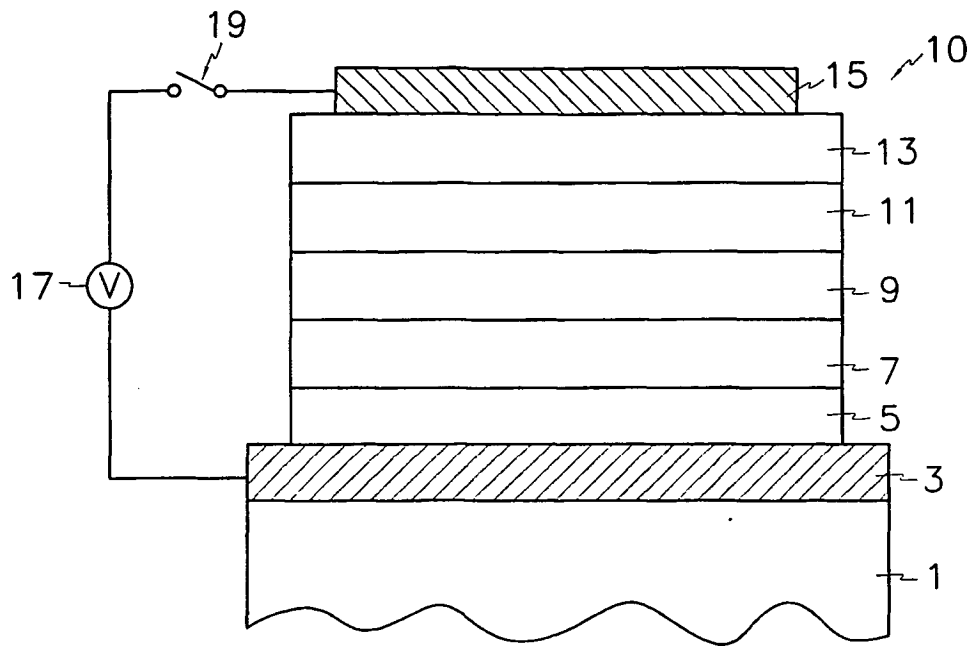


FIG.2

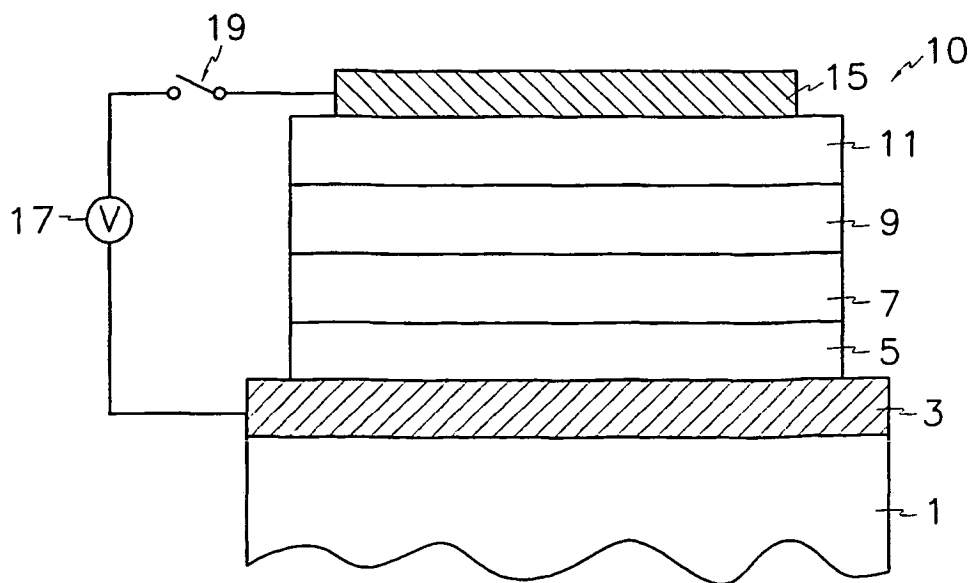


FIG.3

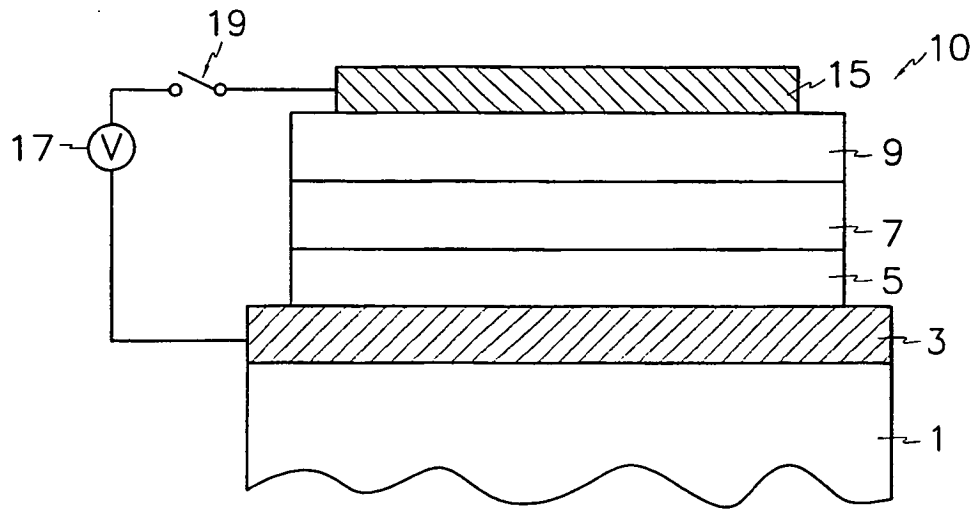


FIG.4

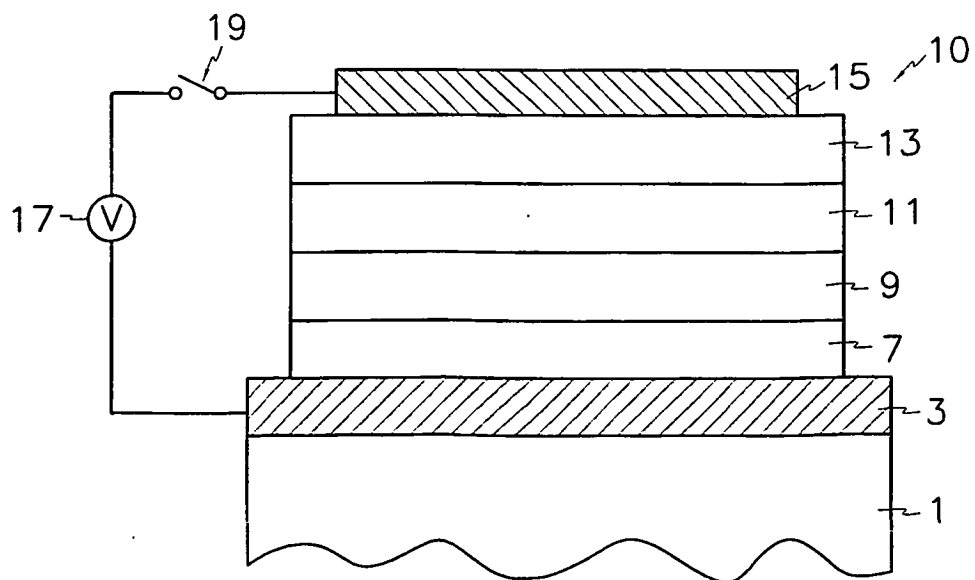


FIG.5

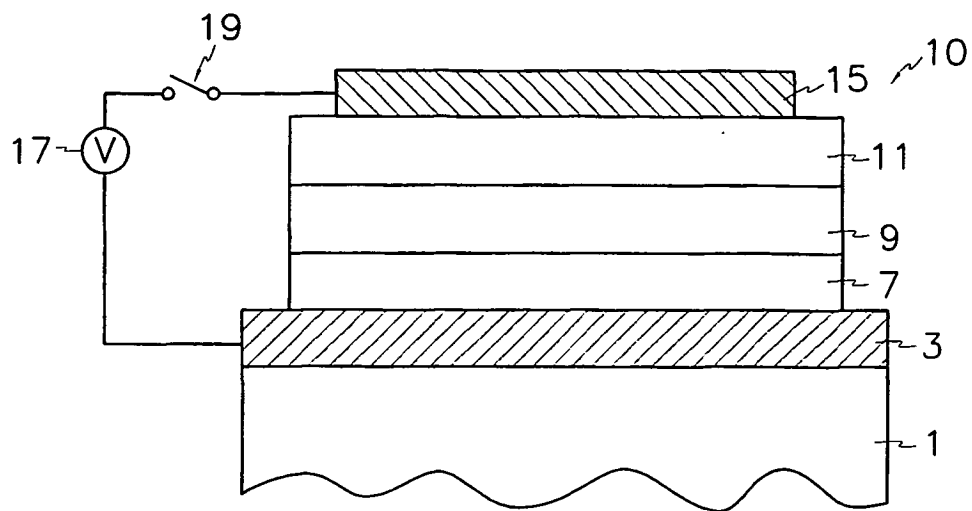


FIG.6

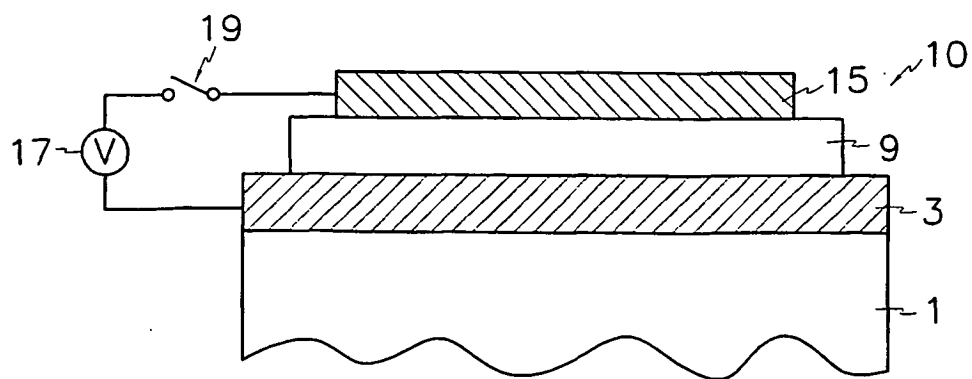


FIG. 7

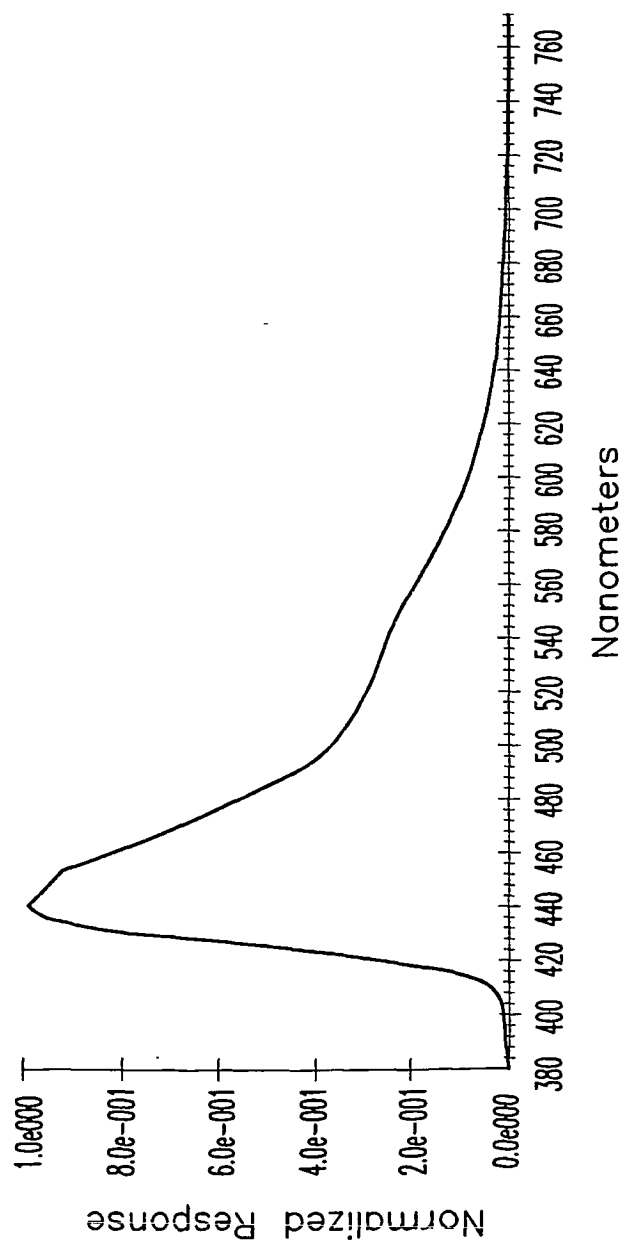


FIG. 8


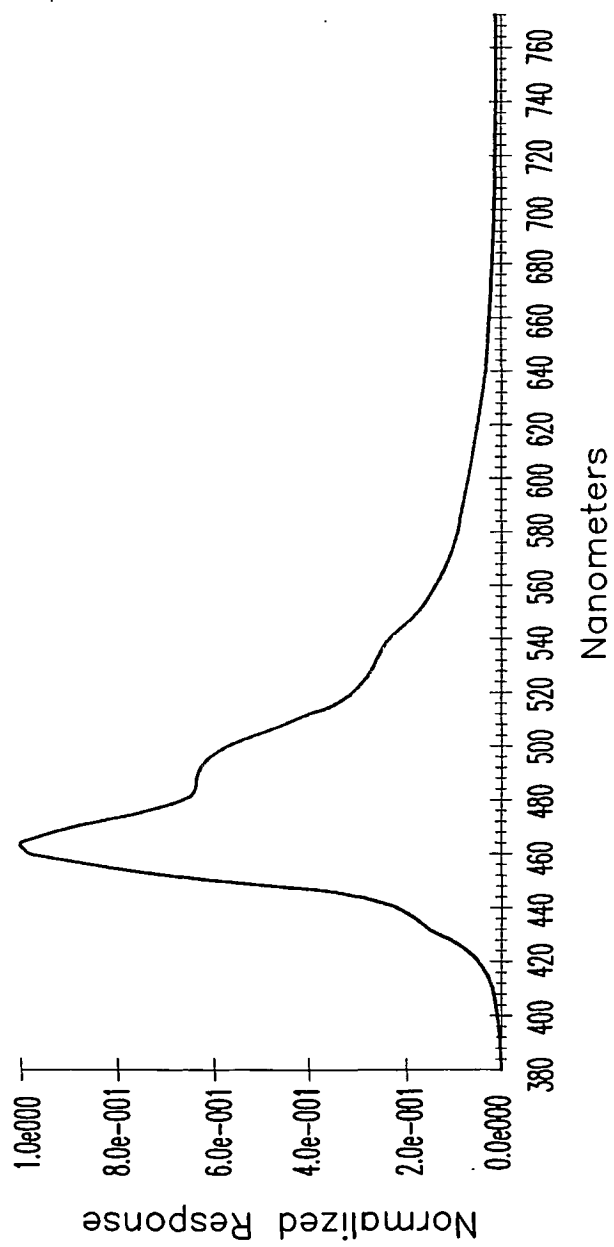


FIG. 9

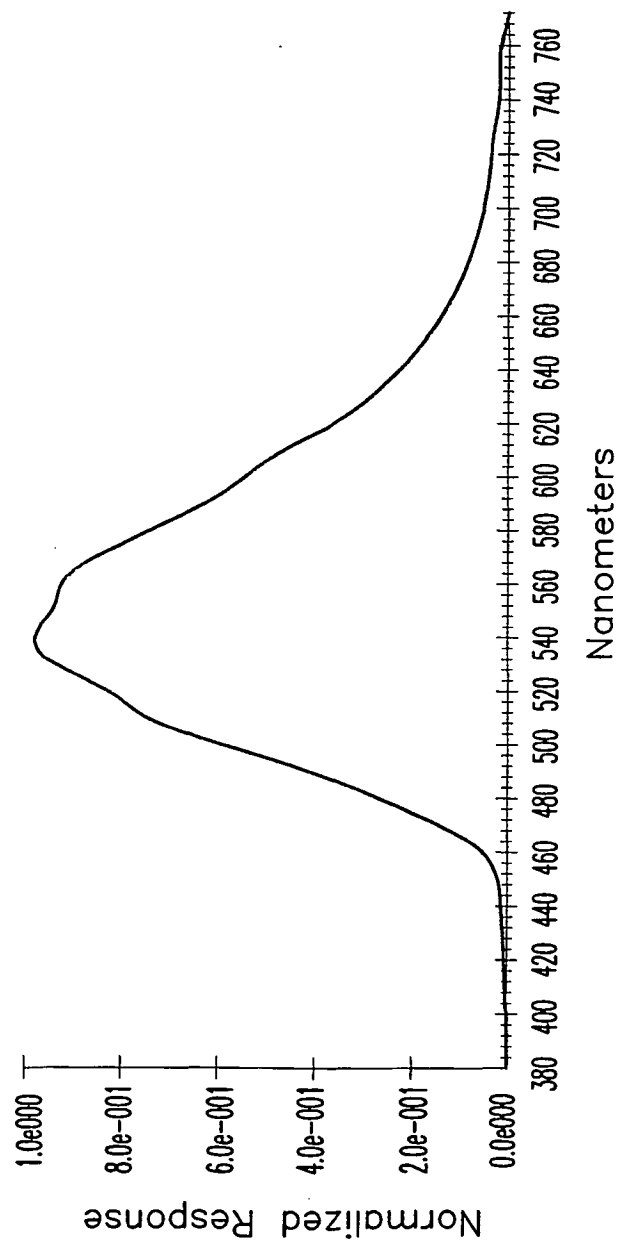


专利名称(译)	双螺环有机化合物和电致发光器件		
公开(公告)号	<a href="#">EP1294823B1</a>	公开(公告)日	2006-12-13
申请号	EP2002705589	申请日	2002-03-18
[标]申请(专利权)人(译)	乐金化学股份有限公司		
申请(专利权)人(译)	LG化学有限公司.		
当前申请(专利权)人(译)	LG化学有限公司.		
[标]发明人	KIM KONG KYEUM SON SE HWAN YOON SEOK HEE BAE JAE SOON LEE YOUN GU IM SUNG GAP KIM JI EUN LEE JAE CHOL		
发明人	KIM, KONG-KYEUM SON, SE-HWAN YOON, SEOK-HEE BAE, JAE-SOON LEE, YOUN-GU IM, SUNG-GAP KIM, JI-EUN LEE, JAE-CHOL		
IPC分类号	C09K11/06 C07C13/72 H01L51/50 C07C17/35 C07C25/22 C07C47/546 C07C211/54 C07C211/61 C07D209/86 C07D209/88 C07D235/18 C07D241/42 C07D263/56 C07D263/57 C07D277/66 C07D333 /08 C07D333/18 C07D409/10 C07D471/04 C07D487/04 C07D519/00 C07F5/02 H01L51/00		
CPC分类号	H01L51/0058 C07C13/72 C07C17/12 C07C17/35 C07C25/22 C07C47/546 C07C211/54 C07C211/61 C07C2603/14 C07C2603/18 C07C2603/24 C07C2603/42 C07C2603/96 C07C2603/97 C07D209/82 C07D209/86 C07D209/88 C07D235/18 C07D241/42 C07D263/57 C07D277/66 C07D333/08 C07D333 /18 C07D409/04 C07D409/10 C07D409/14 C07D471/04 C07D487/04 C07F5/025 C09K11/06 C09K2211/1003 C09K2211/1007 C09K2211/1011 C09K2211/1014 C09K2211/1037 C09K2211/1044 C09K2211/1092 H01L51/0052 H01L51/006 H01L51/0067 H01L51/0068 H01L51/0069 H01L51/0071 H01L51/008 H01L51/5012 H01L51/5048 H01L51/5088 H01L51/5092 H05B33/14 Y10S428/917		
代理机构(译)	CASALONGA , AXEL		
优先权	1020010023038 2001-04-27 KR 1020010023039 2001-04-27 KR		
其他公开文献	EP1294823A1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

公开了用于有机电致发光的双螺环有机化合物。双螺环有机化合物具有包括至少三个平面部分的构型或结构，其基本上线性构型，使得一个平面部分介于两个相邻的平面部分之间，并且插入的平面部分与两个中的每一个共享原子。相邻的平面部分。插入的平面部分基本垂直于两个相邻的平面部分。与相邻平面部分共享的两个原子优选在插入的平面部分中彼此最远离。双螺环化合物通常具有高于约300°C的高熔点和低结晶度，这为有机EL器件提供热稳定性。此外，双螺环有机化合物具有良好的升华性，这为物理气相



沉积提供了适用性。此外，双螺环化合物具有发光，空穴注入，空穴传输，电子注入，电子传输性质和特性，这在有机EL器件中是有利的。还公开了一种有机电致发光 ( EL ) 器件，其具有至少一层含有一种或多种双螺环有机化合物的层。

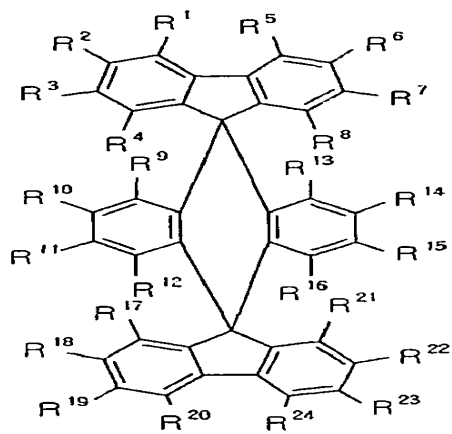

**Chemical Formula 1**