

(19)



(11)

EP 2 439 940 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.10.2015 Bulletin 2015/41

(51) Int Cl.:

H01L 27/32 ^(2006.01) **H04N 5/66** ^(2006.01)
H04N 5/60 ^(2006.01) **H01L 51/50** ^(2006.01)
G06F 1/16 ^(2006.01) **H04N 5/64** ^(2006.01)
H04R 1/02 ^(2006.01)

(21) Application number: **10783560.5**

(22) Date of filing: **01.06.2010**

(86) International application number:

PCT/KR2010/003491

(87) International publication number:

WO 2010/140811 (09.12.2010 Gazette 2010/49)

(54) **SOUND-TRANSMITTING DISPLAY DEVICE FOR OUTPUTTING A SOUND CORRESPONDING TO THE COORDINATES OF AN OBJECT IN A SCENE**

KLANGÜBERTRAGENDE ANZEIGEVORRICHTUNG ZUR AUSGABE EINES DEN KOORDINATEN
EINES OBJEKTS IN EINER SZENE ENTSPRECHENDEN KLANGS

DISPOSITIF D’AFFICHAGE QUI TRANSMET DES SONS DESTINÉ À DÉLIVRER EN SORTIE UN
SON QUI CORRESPOND AUX COORDONNÉES D’UN OBJET QUI SE SITUE DANS UNE SCÈNE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

(30) Priority: **02.06.2009 KR 20090048528**

(43) Date of publication of application:
11.04.2012 Bulletin 2012/15

(73) Proprietor: **Sonic Tier Inc.**
Gyeonggi-do (KR)

(72) Inventor: **Park, Seung-Min**
Seoul 121-040 (KR)

(74) Representative: **Zacco Denmark A/S**
Arne Jacobsens Allé 15
2300 Copenhagen S (DK)

(56) References cited:

WO-A1-2008/035878 WO-A1-2008/093721
JP-A- 2001 133 888 JP-A- 2001 133 888
JP-A- 2005 117 267 JP-A- 2005 117 267
JP-A- 2007 129 511 KR-A- 20080 037 739
US-A1- 2002 141 164 US-A1- 2008 010 876

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 439 940 B1

Description

Technical Field

[0001] The present invention relates to a sound penetrating display apparatus, and in particular to a sound penetrating display apparatus for outputting the sounds having object location effect in a scene.

Background Art

[0002] In recent years, as life standard advances, a lot of people tend to enjoy television programs and movies with a home theater system. The common display apparatus of a television or a home theater system changes from a conventional CRT to a LCD and a PDP, and a new display apparatus such as an OLED (Organic Light Emitting Diodes) is under development, with the size of a display screen increasing.

[0003] As shown in Figure 1, in order to develop a common home theater system, there are needed front left and right speakers, a subwoofer, surround back speakers, surround left and right speakers and a center speaker. Among the above speakers, the center speaker is positioned at the center between the front left and right speakers, thus enhancing the propagation of sound, which leads to output a relatively perfect sound image. The center speaker is generally installed at a lower side of a display panel, thus outputting dialogue; however a display panel is made bigger and bigger, the dimension of the screen increases. At this time, even when the positions of an object displayed on the screen are located at the left side or the right side, since the sound is outputted from the center speaker, namely, from the central portion, the portions where sounds are outputted and the positions of the objects of the screen do not match, so it is impossible to hear unmatched sounds.

[0004] In order to overcome the above problems, the patent publication number EP2268012 of the applicant same as that of the present application (entitled "Display apparatus having object-based 3D sound coordinate indications") is directed to a display apparatus having matrix speakers, thus generating 3D sounds from the back of the display panel.

[0005] JP 2005/117267 A relates to an information transmission system, screen apparatus and manufacturing method of projection screen. To provide an information transmission system for obtaining video and audio with greater presence by making image localization of a display image coincident with localization of an output audio, the information transmission system comprises a screen apparatus 10 including: a projection screen 20 on which light with narrow three-primary color wavelength band is emitted to display an image and on the entire display face of which a plurality of holes whose diameter is sufficiently smaller than that of one pixel of the image are opened; and at least four speakers 31 or over arranged at different positions of the rear side facing the

image display face of the projection screen so that the direction of sound emission is directed to the projection screen 20. A signal supply apparatus 60 is controlled so as to supply a sound signal corresponding to the video signal to the speakers 31 arranged in the vicinity of the position on the projection screen 20 on which an object image for generating sound is displayed among the images displayed on the projection screen 20.

[0006] JP 2001/133888 A discloses a transmission type screen capable of promoting the miniaturization of an entire device, and a rear projector using the same device, comprising a plurality of spherical light diffusion particles 42 diffusing and emitting image light made incident on a transmission type screen 10 are arrayed, and a sound hole 45 being a path for a sound wave is formed between the adjacent particles 42. Thus, the image light passing through the particles 42 arrayed on the screen 10 is independently diffused so that a high-contrast display picture is obtained. Besides, since a plurality of holes 45 are formed in the gaps of the particles 42, the sound wave passes through the holes 45 and sound can be outputted from the screen 10.

[0007] WO 2008 09 3721 discloses in figure 9B an OLED display with holes. Said document does not disclose a one to one correspondance between OLED pixels and holes.

Disclosure of Invention

[0008] Accordingly, it is an object of the present invention to provide a method of forming a sound pass hole at a display panel, thus letting sounds with a position coordinate effect from a matrix speaker to penetrate in the forward direction through the display panel wherein the matrix speaker is disposed at a backside of the display panel, and to provide a sound penetrating display panel, and a display apparatus.

[0009] To achieve the above objects, a sound penetrating display panel for outputting sounds having an object-based position coordinate effect comprises a panel with a plurality of pixels, with the panel consisting of a plurality of holes formed at the whole portions of the panel to help sound penetrate. The panel might be formed of an OLED panel in which holes can be easily formed. The size of each hole formed at the panel is similar with the size of each pixel.

[0010] The display apparatus for an object-based sound output according to an embodiment of the present invention comprises a speaker system formed of a plurality of holes for the penetration of pixels and sound, a sound penetration display panel with a driving circuit, a protecting layer for absorbing the sound emitted through the portions except through the holes of the display panel, and a plurality of speakers which are attached to the back side of the sound penetrating display panel or disposed closer thereto and are arranged in 2 dimensions.

[0011] Disclosed is a sound penetrating OLED display apparatus for displaying images, comprising: a plurality

of matrix speakers; a plurality of pixels; a plurality of holes which are distributed in an OLED (Organic Light Emitting Diode) display panel in such a way that one hole is assigned to each pixel in order for sound from the matrix speakers disposed at a back side of the OLED display panel to penetrate; a driving circuit for driving the OLED display panel; a protecting layer (301) which is attached to a back side of the OLED display panel or is disposed close to the same and is formed of holes matching with the holes of the panel; wherein the plurality of matrix speakers are positioned such that the sound from the plurality of matrix speakers passes through the protecting layer.

ADVANTAGEOUS EFFECTS

[0012] The sound penetrating apparatus according to the present invention is equipped with sound penetrating holes between the pixels of the display panel, thus letting the sounds from the matrix speakers disposed at the back side of the display panel to penetrate, so it is possible to hear the sounds from a corresponding speaker depending on the position of an object of a screen, thus allowing a user to hear the sounds with a 3D effects having a sound coordinate effect depending on the positions of the objects of a screen.

Brief Description of the Drawings

[0013] The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein;

Figure 1 is a view illustrating a construction of a conventional home theater;

Figure 2 is a view illustrating a conventional OLED display apparatus;

Figure 3 is a view illustrating a construction of a pixel of Figure 2;

Figure 4 is a view illustrating a different construction of a pixel;

Figure 5 is a view illustrating a construction of a sound penetrating display panel according to an embodiment of the present invention;

Figure 6 is a view illustrating an example of a construction of a pixel according to an embodiment of the present invention;

Figure 7 is a view illustrating a construction of a pixel according to another embodiment of the present invention;

Figure 8 is a view illustrating a construction of a pixel according to further another embodiment of the present invention;

Figure 9 is a schematic view illustrating a construction of a display apparatus for outputting an object-based sound according to an embodiment of the present invention; and

Figure 10 is a block diagram illustrating a functional construction of a display apparatus according to an embodiment of the present invention.

5 Modes for carrying out the invention

[0014] The preferred embodiments of the present invention will be described with reference to the accompanying drawings.

10 **[0015]** Figure 2 is a view illustrating a conventional OLED display apparatus.

[0016] The OLED display apparatus comprises a panel 30 formed of a plurality of pixels, and driving circuits 10 and 20 for driving the panel 30. The pixel 31 of the panel 30 is formed of sub-pixels 32 of three colors R, G and B. The driving circuits 10 and 20 comprise a scan driving circuit 10 and a data driving circuit 20. Each pixel 31 is connected with a scan line 11 and a data line 21. The data driving circuit 20 applies a data signal to each pixel 31 through the data line 21, and the scan driving circuit 10 applies a scan signal to the pixel 31 through the scan line 11.

20 **[0017]** As shown in Figure 2, the pixel 31 is formed of R, G and B sub-pixels having the same sizes. Since the light emission efficiencies and life spans of the R, G and B sub-pixels generally have differences, so the pixels might be constituted with difference surface area ratios between sub-pixels.

25 **[0018]** Figure 5 is a view illustrating a construction of a sound penetrating display panel according to an embodiment of the present invention. Like the conventional display apparatus, the sound penetrating display panel 100 comprises a panel 130, and driving circuits 110 and 120 for driving the panel 130. The panel 130 is formed of a plurality of pixels 131, each pixel being formed of sub-pixels 132 of three colors for generating colors. Unlike the conventional display apparatus, the panel 130 according to the present invention comprises holes H for penetrating sound. As shown in Figure 5, there is provided a sound penetrating display panel 100 in the panel 130 in uniform dense in a 2D structure. It is preferred that the size of each hole H of the panel 130 is smaller than the size of the pixel, and the hole H generally has the size of the sub-pixel.

30 **[0019]** The sound penetrating display panel according to the present invention is constructed in such a way that one hole is assigned to each pixel. As shown in Figures 6 through 8, the holes might be formed in various shapes. As shown in Figure 6, the pixel 131 has square-shaped R, G and B sub-pixels, and square-shaped holes H. The sizes of the R, G and B sub-pixels and the holes H are same.

35 **[0020]** As shown in Figure 7, the pixel 140 is formed of two square-shaped R sub-pixels, and one square-shaped G sub-pixel, and two square-shaped B sub-pixels and holes H. The sizes of the R, G and B sub-pixels and the holes H are same. As shown in Figure 8, the pixels 150 have rectangular shaped R, G and B sub-pixels, and

holes, and the sizes of the R, G and B sub-pixels are same. The sizes of the holes H might be different from the sizes of the R, G and B sub-pixels.

[0021] The constructions of the pixels of Figures 6 through 8 are provided for illustrative purposes, and the pixels might be implemented in various shapes.

[0022] As shown in Figure 5, the driving circuits 110 and 120 comprise a scan driving circuit 110 and a data driving circuit 120 like the conventional display apparatus. Each pixel 131 is connected with the scan line 111 and the data line 121. The data driving circuit 120 applies a data signal to each pixel through the data line 121, and the scan driving circuit 110 applies a scan signal to the pixel 131 through the scan line 111.

[0023] The sound penetrating display panel 100 having the above holes might be implemented in various display methods; however it is most preferred that the sound penetrating display panel is implemented in the OLED method. In the future, various advanced methods might be utilized as technology advances.

[0024] Figure 9 is a schematic view illustrating a sound penetrating display apparatus for outputting an object-based position coordinate effect according to an embodiment of the present invention.

[0025] The display apparatus according to the present invention comprises a sound penetrating display panel 300 formed of a plurality of pixels, a plurality of holes for penetrating sound, and a driving circuit, and a speaker system 400 formed of a protecting layer engaged at a rear side of the display panel and a plurality of matrix speakers which are attached to a back side of the sound penetrating display panel or arranged in a 2D close to the sound penetrating display panel.

[0026] The protecting layer 301 serves to protect the panel from vibrations generating when the speaker 401 outputs sound. The protecting layer 301 is attached to a back side of the panel or is disposed close to the same and is equipped with the holes matching with the holes of the panel.

[0027] The protecting layer 301 comprises a sound absorption layer for protecting the panel. In other words, the sound outputted in the direction of the holes of the panel among the sound generated from the speaker system 400 is outputted in the direction of the front side of the sound penetrating display panel 300 through the holes of the protecting layer and the holes of the panel; however the sound outputted in the direction except for the holes of the panel is absorbed by the sound absorption layer contained in the panel of the protecting layer 301 before the sound reaches the panel. The protecting layer 301 might further comprise a reflection layer for enhancing a sound absorption efficiency in addition to the sound absorption layer. At this time, the sound absorption layer faces in the direction of the panel, and the reflection layer faces in the opposite direction of the panel (speaker system). The sound outputted in the direction of the holes of the panel among the sound generated from the speaker system 400 passes through the sound

penetrating display panel 300 via the holes of the protecting layer and the holes of the panel. The sound outputted in the direction except for the holes of the panel is reflected toward the speaker system 400 by means of the reflection layer, and the reflected sound collides with the speaker system 400 and outputs toward the protecting layer 301. Part of the sound headed to the protecting layer 301 is outputted toward the front side of the sound penetrating display panel 300 via the holes of the protecting layer 301 and the holes of the panel. The sound absorption layer absorbs the vibrations so that the vibrations occurring when the sound is reflected by the reflecting layer are not transferred to the panel side.

[0028] Like the embodiment of Figure 9, the speaker system 400 is attached to a back side of the sound penetrating display panel 300 or is disposed close to the same. Since the protecting layer 301 is positioned at the backward most portion of the sound penetrating display panel 300, the sound from the speaker system 400 passes through the protecting layer 301.

[0029] Like the embodiment of the present invention of Figure 9, the sound of the speaker system passes through the small holes, and the final sound that a user listens to might be distorted as compared to original sounds. It is possible for a user to listen to sound similar with the original sound in such a way to distort the distortions of the sounds in advance.

[0030] As shown in Figure 10, the display apparatus 500 for outputting an object-based sound comprises a panel formed of a plurality of pixel and a plurality of holes for the penetration of sound, a sound penetrating display panel 520 formed of a driving circuit for receiving a video signal and driving the panel, and a speaker system 510 formed of a plurality of speakers, and a pre-distortion part 530.

[0031] The speaker system 510 comprises a plurality of speakers which are attached to a back side of the sound penetrating display panel 520 or are disposed close to the same and are arranged in a 2D structure (arranged in a matrix shape), and an audio output circuit corresponds to one or a plurality of speakers determined depending on the position information of the sound, thus outputting audio signals.

[0032] The pre-distortion part 530 serves to previously distort the audio signal and provide to the audio output circuit in an attempt to prevent the sound outputted from the speakers from being distorted while the sound passes through the sound penetrating display panel 520.

[0033] The sound distortion phenomenon when the sound passes through the sound penetrating display panel 52 might change depending on the sizes of the holes of the panel and the density and arrangement. The sound before and after the distortion might be modeled as in the formula 1.

[Formula 1]

$$S2(s) = H(s) \times S1(s)$$

[0034] In the formula 1, S1(s) means the sound before distortion, and S2(s) means the sound after distortion, and H(s) means transfer function.

[0035] When it is assumed that the audio signal first inputted into the pre-input part is S0(s), and the transfer function of the pre-distorter 530 is H'(s), S1(s) might be expressed in the following formula 2.

[Formula 2]

$$S1(s) = H'(s) \times S0(s)$$

[0036] The formula 1 and the formula 2 might be rearranged, thus defining the sound S2(s), which has passed through the panel, in the following formula 3.

[Formula 3]

$$S2(s) = H(s) \times H'(s) \times S0(s)$$

[0037] In other words, when the transfer function H'(s) of the pre-distortion part 530 is designed to be closest to 1/H(s), it is possible to minimize the distortion of the sound generated while passing through the sound penetrating display panel 520.

[0038] The above-described embodiments of the present invention are provided for illustrative purposes, and it is obvious that the technical range of the present invention should be interpreted by means of the following accompanying claims.

Claims

1. A sound penetrating OLED, Organic Light Emitting Diode, display (100,300,520) apparatus for displaying images, comprising:

an OLED display panel with a plurality of pixels (131);
 a plurality of matrix speakers;
 a plurality of holes which are distributed in the OLED display panel in such a way that one hole is assigned to each pixel (31,131) in order for sound from the matrix speakers disposed at a back side of the OLED display panel to penetrate;
 a driving circuit (110,120) for driving the OLED

display panel;

a protecting layer (301) which is attached to a back side of the OLED display panel or is disposed close to the same and is formed of holes matching with the holes of the panel;
 wherein the plurality of matrix speakers are positioned such that the sound from the plurality of matrix speakers passes through the protecting layer (301).

2. The apparatus of claim 1, wherein each pixel is formed of subpixels (132) of three colors for generating colors, and wherein the sizes of the holes of the OLED display apparatus are same as the sizes of the sub-pixels (32,132).
3. The apparatus of claim 1, wherein said protecting layer (301) comprises a sound absorption layer.
4. The apparatus of claim 3, wherein said protecting layer (301) further comprises a reflection layer, and said sound absorption layer is positioned in the direction of the panel, and said reflection layer is positioned in the opposite direction of the panel.

Patentansprüche

1. Klangpenetrante OLED- (organische lichtemittierende Diode) Anzeigevorrichtung (100, 300, 520) für die Darstellung von Bildern, umfassend:

eine OLED-Anzeigetafel mit einer Mehrzahl von Pixeln (131);
 eine Mehrzahl von Matrix Lautsprechern;
 eine Mehrzahl von Löchern, die in der OLED-Anzeigetafel derart verteilt sind, dass jeder Pixel (31, 131) ein Loch zugeordnet ist, damit Klang von den an einer Rückseite der OLED-Anzeigetafel angeordneten Matrix Lautsprechern penetrieren kann;
 eine Antriebsschaltung (110, 120) zum Antreiben der OLED-Anzeigetafel;
 eine Schutzschicht (301), die an einer Rückseite der OLED-Anzeigetafel befestigt ist oder dicht bei dieser angeordnet ist und aus Löchern gebildet ist, die den Löchern der Tafel entsprechen;
 wobei die Mehrzahl von Matrix Lautsprechern derart positioniert sind, dass der Klang von der Mehrzahl von Matrix Lautsprechern durch die Schutzschicht (301) durchgeht.

2. Vorrichtung nach Anspruch 1, wobei jede Pixel aus Subpixeln (132) in drei Farben zum Erzeugen von Farben gebildet ist, und wobei die Größen der Löcher der OLED-Anzeigevorrichtung die gleichen wie die Größen der Sub-pixel (32, 132) sind.

3. Vorrichtung nach Anspruch 1, wobei die Schutzschicht (301) eine Klangabsorptionsschicht aufweist.
4. Vorrichtung nach Anspruch 3, wobei die Schutzschicht (301) ferner eine Reflexionsschicht aufweist, und die Klangabsorptionsschicht in Richtung der Tafel angeordnet ist, und die Reflexionsschicht in entgegengesetzter Richtung der Tafel angeordnet ist.

10

Revendications

1. Dispositif d'affichage DELO (diode électroluminescente organique) pénétrant du son (100,300,520) pour afficher des images, comprenant:
 - un panneau d'affichage DELO avec une pluralité de pixels (131);
 - une pluralité de haut-parleurs de la matrice;
 - une pluralité de trous qui sont distribués dans le panneau d'affichage DELO si bien qu'un trou est assigné à chaque pixel (31,131) permettant au son issu des haut-parleurs de la matrice disposés à un côté arrière du panneau DELO de pénétrer;
 - un circuit de commande (110,120) pour commander le panneau d'affichage DELO;
 - une couche de protection (301) qui est fixée à un côté arrière du panneau d'affichage DELO ou est disposée à proximité de celui-ci et qui est formée de trous correspondant aux trous du panneau;
 - dans lequel la pluralité de haut-parleurs de la matrice sont positionnés si bien que le son issu de la pluralité de haut-parleurs de la matrice passe à travers la couche de protection (301).
2. Dispositif selon la revendication 1, dans lequel chaque pixel est formé de subpixels (132) de trois couleurs pour générer des couleurs, et dans lequel les dimensions des trous du dispositif d'affichage DELO sont les mêmes que les dimensions des subpixels (32,132).
3. Dispositif selon la revendication 1, dans lequel ladite couche de protection (301) comprend une couche d'absorption acoustique.
4. Dispositif selon la revendication 3, dans lequel ladite couche de protection (301) comprend en outre une couche de réflexion, et dans lequel ladite couche d'absorption acoustique est positionnée dans la direction du panneau, et ladite couche de réflexion est positionnée dans la direction opposée du panneau.

Figure 1

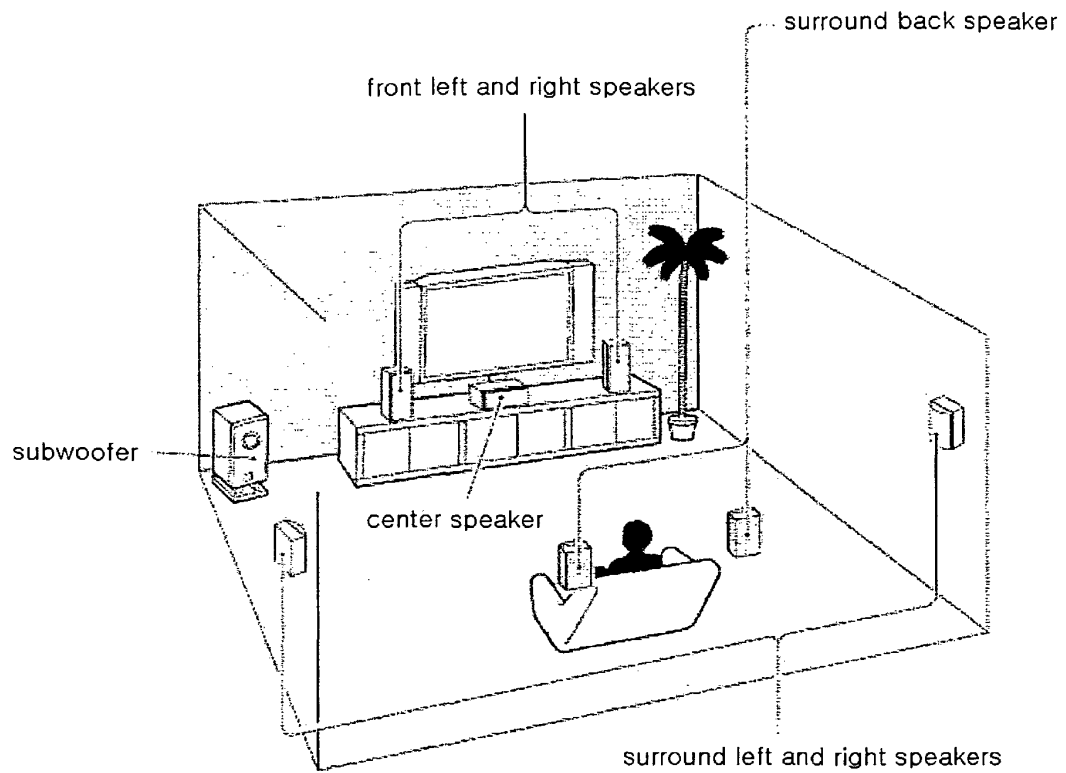


Figure 2

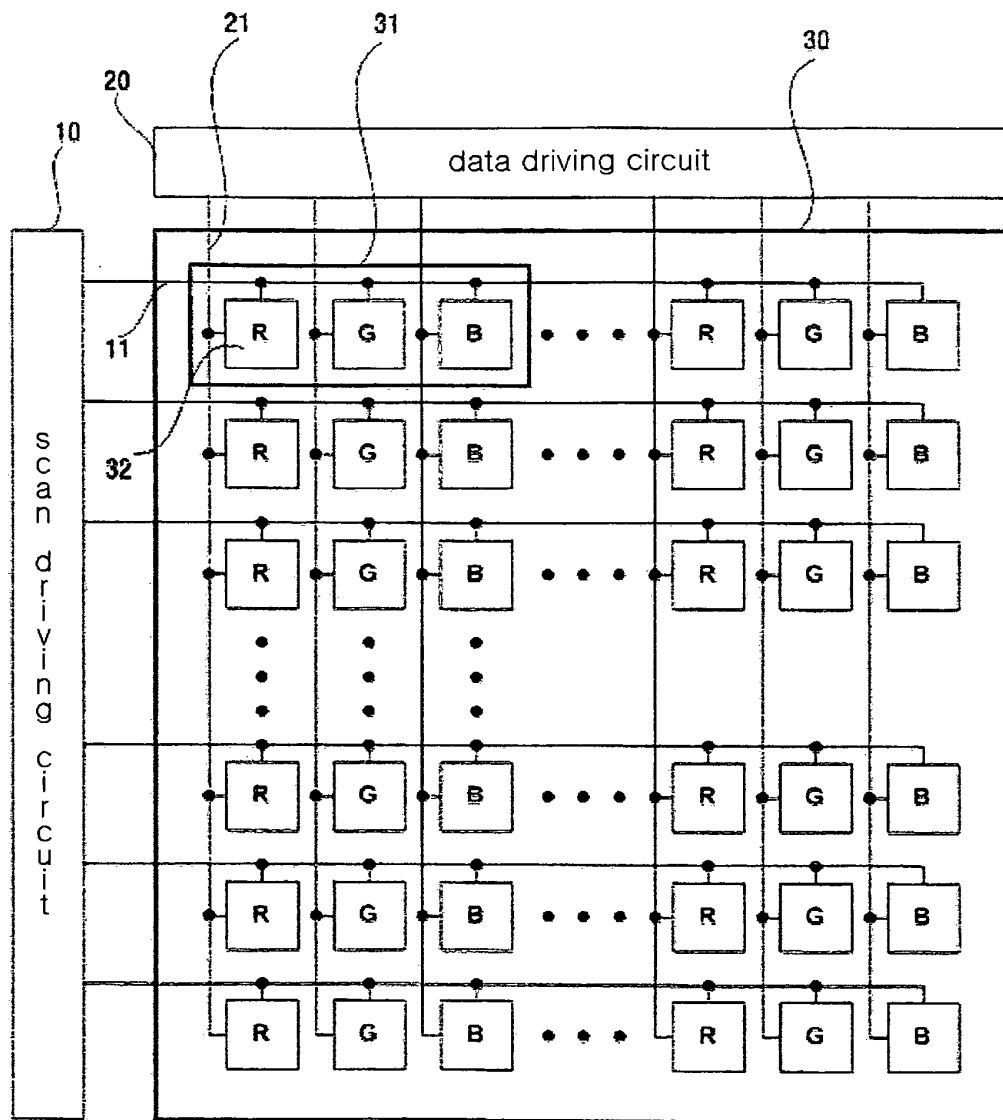


Figure 3

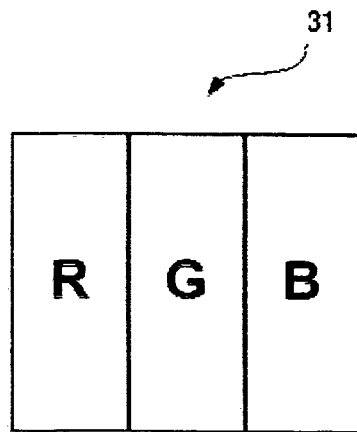


Figure 4

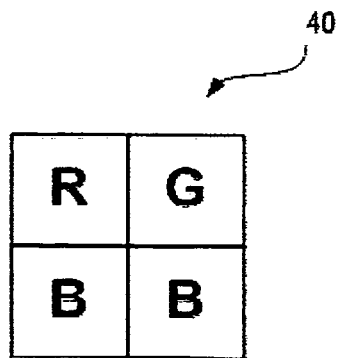


Figure 5

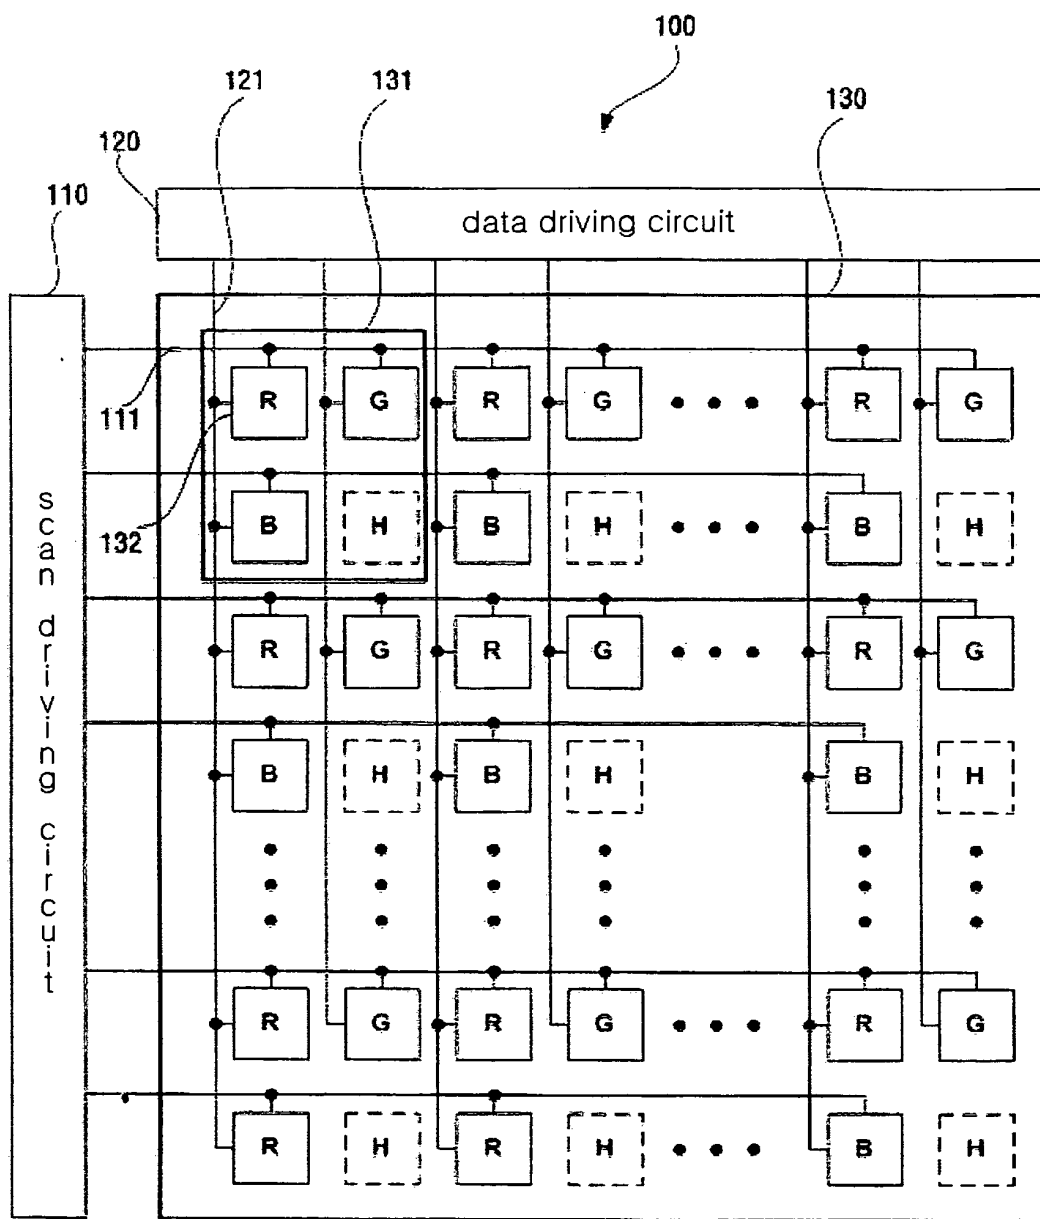


Figure 6




Figure 7




Figure 8

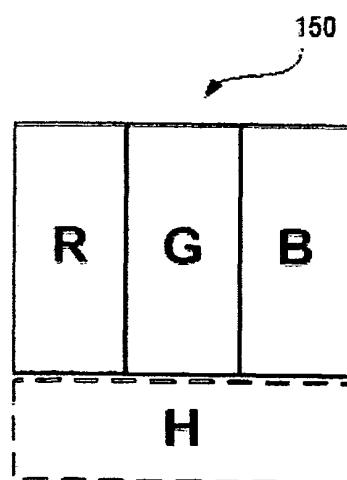


Figure 9


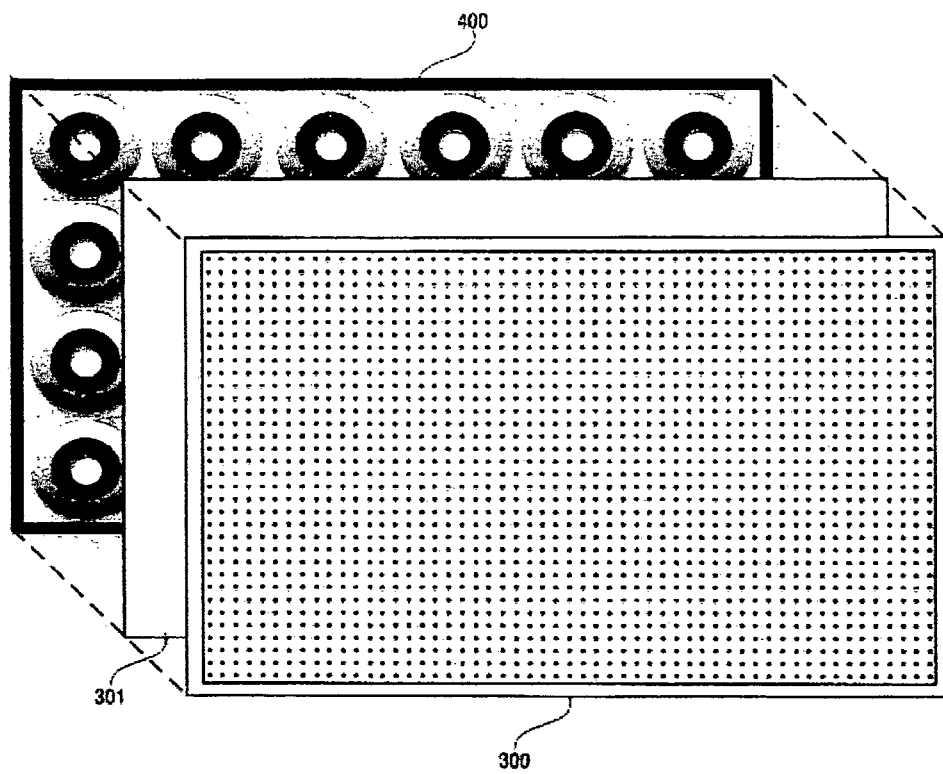


Figure 10

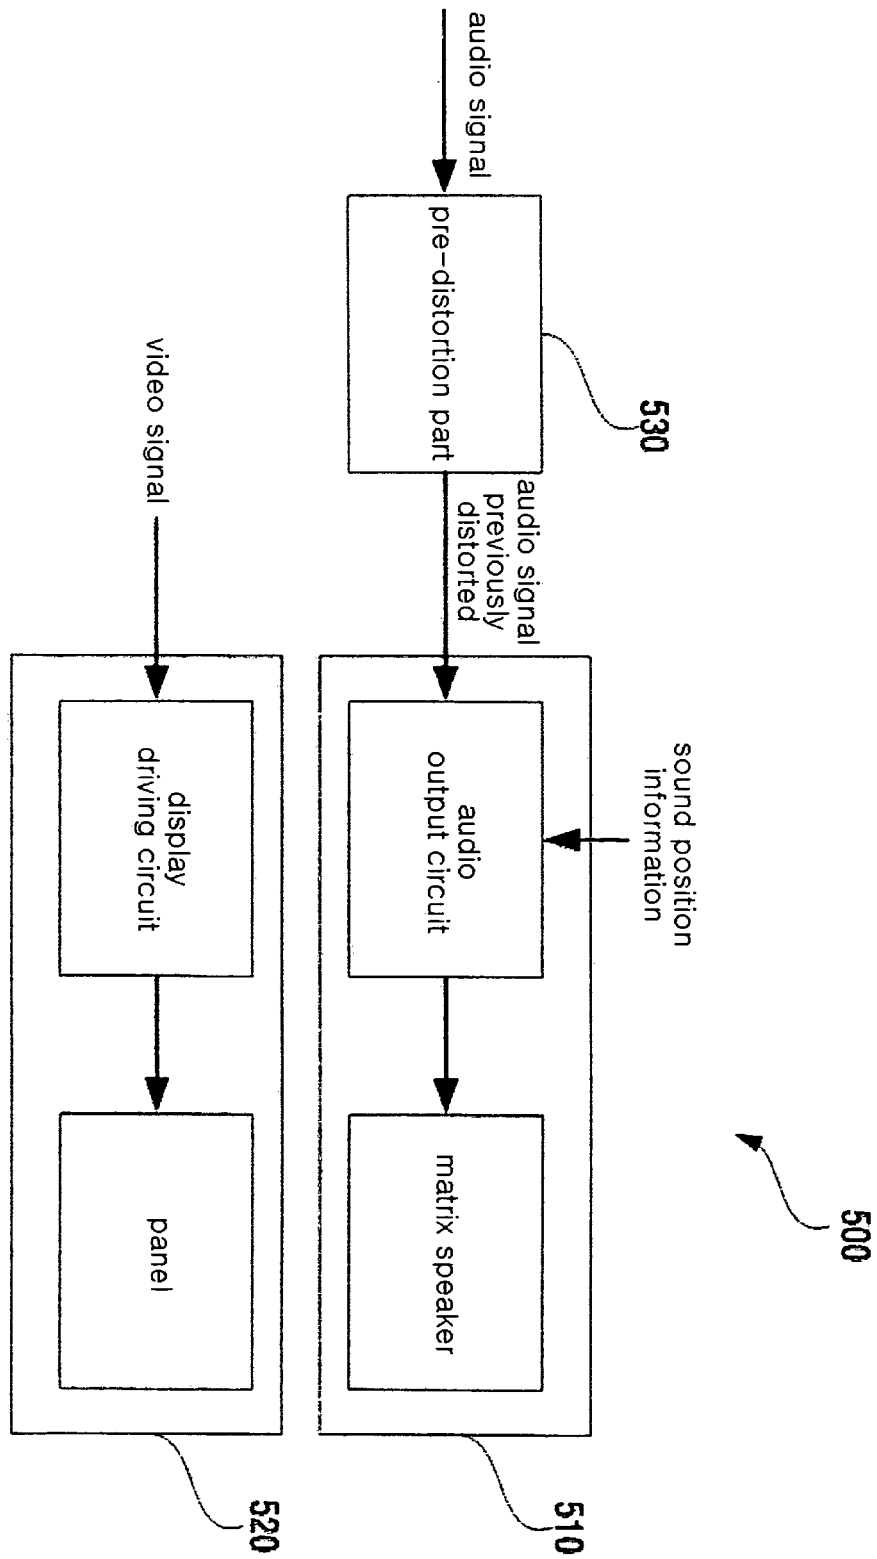

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2268012 A [0004]
- JP 2005117267 A [0005]
- JP 2001133888 A [0006]
- WO 2008093721 A [0007]

专利名称(译)	用于输出与场景中的对象的坐标对应的声音的声音传输显示设备		
公开(公告)号	EP2439940B1	公开(公告)日	2015-10-07
申请号	EP2010783560	申请日	2010-06-01
[标]申请(专利权)人(译)	PARK柳承敏		
申请(专利权)人(译)	PARK , SEUNG-MIN		
当前申请(专利权)人(译)	SONIC TIER公司		
[标]发明人	PARK SEUNG MIN		
发明人	PARK, SEUNG-MIN		
IPC分类号	H01L27/32 H04N5/66 H04N5/60 H01L51/50 G06F1/16 H04N5/64 H04R1/02		
CPC分类号	H04N5/60 H01L27/3211 H04N5/642 H04R1/028 H04R2499/15		
优先权	1020090048528 2009-06-02 KR		
其他公开文献	EP2439940A4 EP2439940A1		
外部链接	Espacenet		

摘要(译)

本发明公开了一种用于输出具有基于物体的位置坐标效果的声音的透声显示装置，该装置包括多个像素，多个孔分布在一定密集的OLED（有机发光二极管）显示面板中。来自设置在OLED显示面板的后侧的扬声器的声音的穿透顺序，用于驱动OLED显示面板的驱动电路，附接到OLED显示面板的后侧的保护层或者靠近它们由与面板的孔匹配的孔和多个矩阵扬声器形成，多个矩阵扬声器设置在OLED显示面板的后侧。

[Formula 1]

$$S2(s) = H(s) \times S1(s)$$