



(11)

EP 2 582 768 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.06.2014 Bulletin 2014/26

(51) Int Cl.:
C09K 11/06 ^(2006.01) **H05B 33/10** ^(2006.01)
H05B 33/14 ^(2006.01) **C07D 213/00** ^(2006.01)
C07D 401/00 ^(2006.01)

(21) Application number: **11726756.7**

(86) International application number:
PCT/EP2011/059990

(22) Date of filing: **16.06.2011**

(87) International publication number:
WO 2011/157779 (22.12.2011 Gazette 2011/51)

(54) **ORGANIC ELECTRONIC DEVICES COMPRISING A LAYER OF A PYRIDINE COMPOUND AND A 8-HYDROXYQUINOLINOLATO EARTH ALKALINE METAL, OR ALKALI METAL COMPLEX**

ORGANISCHE ELEKTRONISCHE VORRICHTUNGEN MIT EINER SCHICHT AUS EINER
PYRIDINVERBINDUNG UND EINEM 8-HYDROXYCHINOLINOLAT-ERDALKALIMETALL ODER
ALKALIMETALLKOMPLEX

DISPOSITIFS ÉLECTRONIQUES ORGANIQUES COMPRENANT UNE COUCHE D'UN COMPOSÉ
DE PYRIDINE ET UN MÉTAL ALCALINO-TERREUX DE 8 HYDROXYQUINOLINOLATO OU UN
COMPLEXE ALCALINO-TERREUX

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(74) Representative: **Leybach, Holger Hugo**
BASF Schweiz AG
Global Intellectual Property
Klybeckstrasse 141
4057 Basel (CH)

(30) Priority: **18.06.2010 EP 10166509**

(43) Date of publication of application:
24.04.2013 Bulletin 2013/17

(56) References cited:
JP-A- 2008 127 326

(73) Proprietor: **BASF SE**
67056 Ludwigshafen (DE)

- **XU W ET AL: "High-efficiency p-i-n organic light-emitting diodes with a novel n-doping electron transport layer", CURRENT APPLIED PHYSICS, NORTH-HOLLAND, vol. 9, no. 4, 1 July 2009 (2009-07-01), pages 732-736, XP025980719, ISSN: 1567-1739, DOI: 10.1016/J.CAP.2008.06.015 [retrieved on 2008-07-03]**
- **KWON J H ET AL: "High efficiency and long lifetime in organic light-emitting diodes using bilayer electron injection structure", SYNTHETIC METALS, ELSEVIER SEQUOIA, LAUSANNE, CH, vol. 159, no. 13, 1 July 2009 (2009-07-01) , pages 1292-1294, XP026218412, ISSN: 0379-6779, DOI: 10.1016/J.SYNTHMET.2009.02.030 [retrieved on 2009-03-25]**

(72) Inventors:

- **WATANABE, Soichi**
68165 Mannheim (DE)
- **SCHILDKNECHT, Christian**
68307 Mannheim (DE)
- **WAGENBLAST, Gerhard**
67157 Wachenheim (DE)
- **LENNARTZ, Christian**
67105 Schifferstadt (DE)
- **WOLLEB, Heinz**
CH-4232 Fehren (CH)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 582 768 B1

- **SHI-JIAN SU ET AL: "Highly Efficient Organic Blue-and White-Light-Emitting Devices Having a Carrier- and Exciton-Confining Structure for Reduced Efficiency Roll-Off", ADVANCED MATERIALS, 6 October 2008 (2008-10-06), pages NA-NA, XP55006713, ISSN: 0935-9648, DOI: 10.1002/adma.200801375**

Description

[0001] The present invention provides an organic electronic device including a first electrode, a second electrode, and an organic layer interposed between the first electrode and the second electrode, wherein the organic layer comprises an organic metal complex of formula I and a compound of formula II.

[0002] WO10072300 relates to organic electroluminescent devices which comprise triazine derivatives optionally in combination with an organic alkali metal compound as the electron transport material. As an example of an organic alkali metal compound lithium quinolate is mentioned.


[0003] M. Thelakkat et al., Chem. Mater. 12 (2000) 3012-3019 describes the synthesis of lithium-quinolate complexes, 8-hydroxyquinolinolitolithium (Liq) and 2-methyl-8-hydroxyquinolinolitolithium (LiMeq) and their use as emitter and electron injection/transport materials in conventional two-layer organic light-emitting diodes in combination with N,N"-bis(p-methoxyphenyl)-N,N'-diphenylbenzidine (DMeOTPD) as hole transport material (HTL). The lithium complexes were also examined as interface materials in combination with 8-hydroxyquinolinolato-Al(III) (Alq₃) as emitter material. The lithium complexes increase the efficiency of an optimized indium-tin oxide (ITO)/DMeOTPD/Alq₃/Al device considerably when used as a thin interface layer between Alq₃ and aluminum. The improvement of device characteristics with lithium quinolates is similar to that obtained with LiF salt.

[0004] Z.L. Zhang et al., Synthetic Metals 158 (2008) 810-814 describes organic light-emitting diodes with 8-hydroxyquinolinato lithium doped 4',7-diphenyl-1,10-phenanthroline as electron transport layer (ETL), and tetrafluoro-tetracyanoquinodimethane doped 4,4',4''-tris(3-methylphenylphenylamino)triphenylamine as hole transport layer (HTL). Compared with the referenced device (without doping), the current efficiency and power efficiency of the p-i-n device are enhanced by approximately 51% and 89%, respectively. This improvement is attributed to the improved conductivity of the transport layers and the efficient charge balance in the emission zone.

[0005] US2007252521A1 describes an electroluminescent device comprising a cathode, an anode, and has therebetween a light emitting layer (LEL), the device further containing an electron transport layer (ETL) on the cathode side of the LEL and an organic electron injection layer (EIL) contiguous to the ETL on the cathode side, wherein the ETL contains a monoanthracene compound bearing aromatic groups in the 2-, 9-, and 10-positions.

[0006] KWON J H et.al., Synthetic Metals 159 (2009) 1292-1294 discloses OLEDs incorporating an n-doping transport layer of Liq in different percentages doped into the organic material Bphen as electron transport layer.


[0007] A material represented by formula



may be included in the electron injection layer. M² represents an alkali or alkaline earth metal. r^a and r^b represents an independently selected substituent, provided two substituents may combine to form a fused ring group. Examples, of such substituents include a methyl group, a phenyl group, a fluoro substituent and a fused benzene ring group formed by combining two substituents. h and i are independently 1-3, and q is an integer from 1 to 6.

[0008] An example of a material of Formula (6b) is lithium quinolate. In one embodiment, a lithium complex of an 8-hydroxyquinolate group is included in the electron injection layer.


[0009] A 2,2'-bipyridyl material, such as, for example,

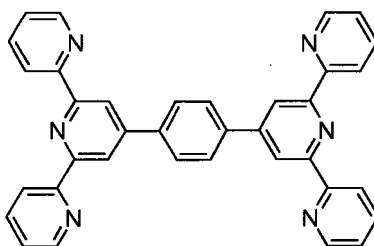

may be included in the electron injection layer.


[0010] It was the object of the present invention to provide organic electronic devices, especially organic light emitting devices showing good efficiencies, good operative lifetimes and a high stability to thermal stress, and a low operating voltage.

[0011] Said object has been solved by an organic electronic device including a first electrode, a second electrode, and an organic layer interposed between the first electrode and the second electrode, wherein the organic layer comprises an organic metal complex of formula



and

a compound of formula

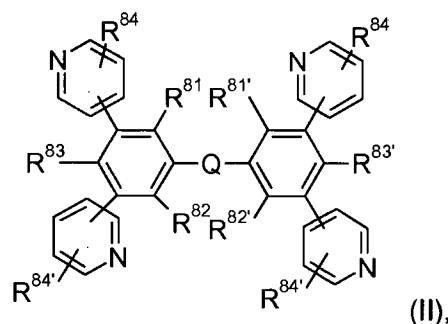

wherein

R¹ and R² are independently of each other F, C₁-C₈alkyl, or C₆-C₁₈aryl, which may optionally be substituted by one, or more C₁-C₈alkyl groups, or two substituents R¹ and/or R² combine to form a fused benzene ring group, which may optionally be substituted by one, or more C₁-C₈alkyl groups,

a and b are independently of each other 0, or an integer 1 to 3,

R⁸¹, R⁸², R⁸³, R⁸⁴, R⁸¹', R⁸²', R⁸³', and R⁸⁴' are independently of each other H, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is substituted by E and/or interrupted by D, C₆-C₂₄aryl, C₆-C₂₄aryl which is substituted by G, C₂-C₂₀heteroaryl, or C₂-C₂₀heteroaryl which is substituted by G,

Q is an arylene or heteroarylene group, each of which may optionally be substituted by G; D is -CO-; -COO-; -S-; -SO-; -SO₂-; -O-; -NR²⁵-; -SiR³⁰R³¹-; -POR³²-; -CR²³=CR²⁴-; or -C≡C-; and

E is -OR²⁹; -SR²⁹; -NR²⁵R²⁶; -COR²⁸; -COOR²⁷; -CONR²⁵R²⁶; -CN; or F; G is E, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is interrupted by D, C₁-C₁₈perfluoroalkyl, C₁-C₁₈alkoxy, or C₁-C₁₈alkoxy which is substituted by E and/or interrupted by D, wherein

R²³ and R²⁴ are independently of each other H, C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;

R²⁵ and R²⁶ are independently of each other C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-; or

R²⁵ and R²⁶ together form a five or six membered ring, R²⁷ and R²⁸ are independently of each other C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;

R²⁹ is C₆-C₁₈aryl; C₆-C₁₈aryl, which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;

R³⁰ and R³¹ are independently of each other C₁-C₁₈alkyl, C₆-C₁₈aryl, or C₆-C₁₈aryl, which is substituted by

C_1-C_{18} alkyl,


R^{32} is C_1-C_{18} alkyl, C_6-C_{18} aryl, or C_6-C_{18} aryl, which is substituted by C_1-C_{18} alkyl

M is an alkali metal atom, or an earth alkaline metal atom,


n is 1, if M is an alkali metal atom, n is 2, if M is an earth alkali metal atom.

[0012] OLEDs having superior life time, power efficiency, quantum efficiency and/or a low operating voltage are obtained, when the organic layer comprising the compounds of formula I and II constitutes the electron transport layer of an OLED.


[0013] Examples of M are Li, Na, K, Rb, Cs, Be, Mg, Ca, Sr, or Ba. Li, Na and K are preferred, Li is most preferred. Examples of the metal complex of formula I are 8-hydroxyquinolinolato lithium (Liq) and 2-methyl-8-hydroxyquinolinolato lithium (LiMeq). The most preferred metal complex is



which can exist as the single species, or in other forms such as Li_gQ_g , where g is an integer, for example Li_6Q_6 . Q represents 8-hydroxyquinolate ligand or a derivative of 8-hydroxyquinolate




R^{81} , R^{82} , R^{83} , and R^{84} are preferably independently of each other H, or C_1-C_{18} alkyl, more preferably H. $R^{81'}$, $R^{82'}$, $R^{83'}$, and $R^{84'}$ are preferably independently of each other H, or C_1-C_{18} alkyl, more preferably H. Q is preferably a group of formula

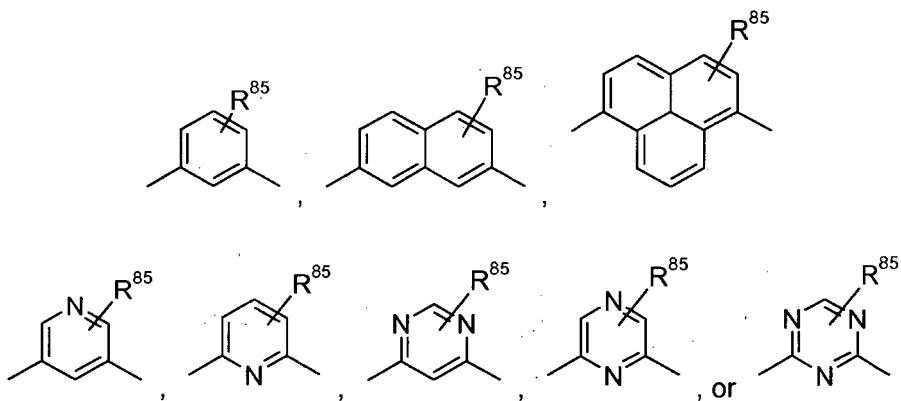


wherein R^{85} is H, C_1-C_{18} alkyl, C_1-C_{18} alkyl which is substituted by E and/or interrupted by D, C_6-C_{24} aryl, C_6-C_{24} aryl which is substituted by G, C_2-C_{20} heteroaryl, or C_2-C_{20} heteroaryl which is substituted by G, and D, E and G are as defined above.

[0014] Compounds of formula II are even more preferred, wherein Q is a group of formula




R⁸⁵ is H, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is substituted by E and/or interrupted by D, C₆-C₂₄aryl, C₆-C₂₄aryl which is substituted by G, C₂-C₂₀heteroaryl, or C₂-C₂₀heteroaryl which is substituted by G, and D, E and G are as defined above.
[0015] Groups of formula

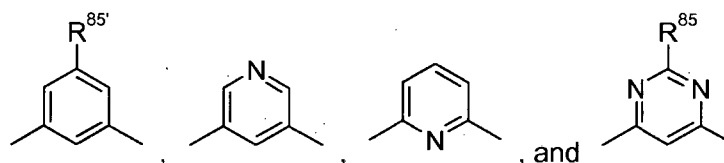


are most preferred.

[0016] Compounds of formula

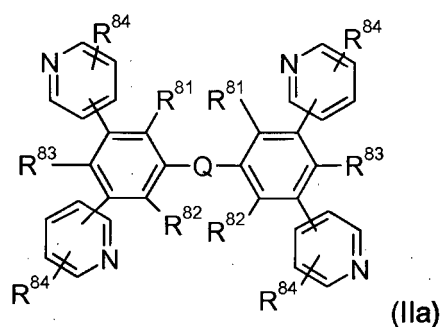


are preferred, wherein Q is a group of formula




R⁸⁵ is H, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is substituted by E and/or interrupted by D, C₆-C₂₄aryl, C₆-C₂₄aryl which is substituted by G, C₂-C₂₀heteroaryl, or C₂-C₂₀heteroaryl which is substituted by G, and D, E and G are as defined above. In said embodiment R⁸¹, R⁸², R⁸³, and R⁸⁴ are preferably independently of each other H, or C₁-C₁₈alkyl.


[0017] Compounds of formula

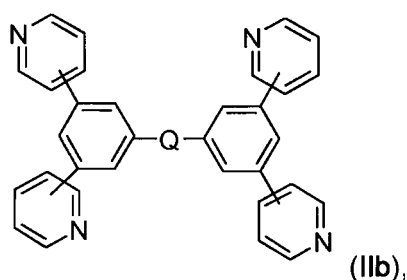


such as, for example,

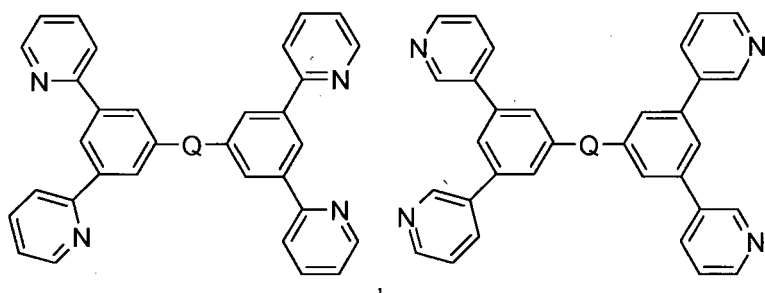


and

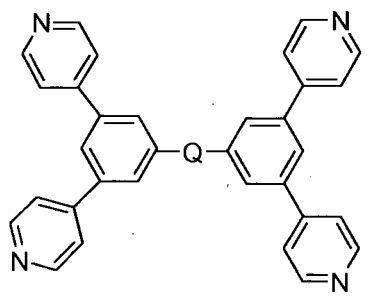

are even more preferred, wherein Q is

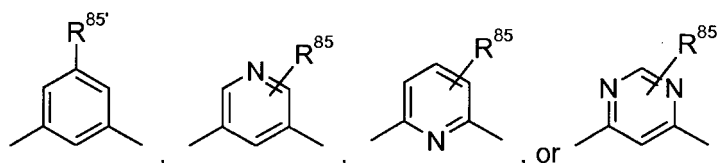


R⁸⁵ is H, or C₁-C₁₈alkyl and R^{85'} is H, C₁-C₁₈alkyl, or



[0018] Particularly preferred compounds of formula II are compounds A-1 to A-27. Reference is made to claim 4. Compound A-1 is at present most preferred.

[0019] In a particularly preferred embodiment the organic layer, especially the electron transport layer comprises a mixture of a compound of formula



and a compound A-1.

[0020] The organic electronic device according to the present invention is preferably an organic light emitting device (OLED), comprising an anode, a hole injection layer, a hole transport layer, a light emitting layer, a hole and exciton blocking layer, an electron transport layer, an electron injection layer and a cathode, wherein the organic layer comprising the compounds of formula I and II constitutes the electron transport layer. An exciton blocking layer, may be arranged

between the hole transport layer and the light emitting layer.

[0021] Accordingly, the present invention is also directed to an electron transport layer, comprising an organic metal complex of formula I and a compound of formula II.

[0022] The organic metal complex of formula I is contained in the organic layer, especially the electron transport layer of an OLED in an amount of 99 to 1 % weight, preferably 75 to 25 % by weight, more preferably about 50 % by weight, based on the amount of compound of formula I and II.

[0023] The synthesis of the compounds of formula II is described in J. Kido et al., Chem. Commun. (2008) 5821-5823, J. Kido et al., Chem. Mater. 20 (2008) 5951-5953 and JP2008-127326, or can be done in analogy to the methods described therein.

[0024] The synthesis of the compounds of formula I is described, for example, in Christoph Schmitz et al. Chem. Mater. 12 (2000) 3012-3019 and WO00/32717, or can be done in analogy to the methods described therein.

[0025] C₁-C₁₈alkyl is typically linear or branched, where possible. Examples are methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethylpropyl, 1,1,3,3-tetramethylpentyl, n-hexyl, 1-methylhexyl, 1,1,3,3,5,5-hexamethylhexyl, n-heptyl, isoheptyl, 1,1,3,3-tetramethylbutyl, 1-methylheptyl, 3-methylheptyl, n-octyl, 1,1,3,3-tetramethylbutyl and 2-ethylhexyl, n-nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, or octadecyl. C₁-C₈alkyl is typically methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl, n-pentyl, 2-pentyl, 3-pentyl, 2,2-dimethylpropyl, n-hexyl, n-heptyl, n-octyl, 1,1,3,3-tetramethylbutyl and 2-ethylhexyl. C₁-C₄alkyl is typically methyl, ethyl, n-propyl, isopropyl, n-butyl, sec.-butyl, isobutyl, tert.-butyl.

[0026] C₁-C₁₈alkoxy groups are straight-chain or branched alkoxy groups, e.g. methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, n-butoxy, sec-butoxy, tert-butoxy, amyloxy, isoamyloxy or tert-amyloxy, heptyloxy, octyloxy, isooctyloxy, nonyloxy, decyloxy, undecyloxy, dodecyloxy, tetradecyloxy, pentadecyloxy, hexadecyloxy, heptadecyloxy and octadecyloxy. Examples of C₁-C₈alkoxy are methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, sec.-butoxy, isobutoxy, tert.-butoxy, n-pentyloxy, 2-pentyloxy, 3-pentyloxy, 2,2-dimethylpropoxy, n-hexyloxy, n-heptyloxy, n-octyloxy, 1,1,3,3-tetramethylbutoxy and 2-ethylhexyloxy, preferably C₁-C₄alkoxy such as typically methoxy, ethoxy, n-propoxy, isopropoxy, n-butoxy, sec.-butoxy, isobutoxy, tert.-butoxy.

[0027] C₁-C₁₈perfluoroalkyl, especially C₁-C₄perfluoroalkyl, is a branched or unbranched radical such as for example -CF₃, -CF₂CF₃, -CF₂CF₂CF₃, -CF(CF₃)₂, -(CF₂)₃CF₃, and -C(CF₃)₃.

[0028] C₆-C₂₄aryl (C₆-C₁₈aryl), which optionally can be substituted, is typically phenyl, 4-methylphenyl, 4-methoxyphenyl, naphthyl, especially 1-naphthyl, or 2-naphthyl, biphenyl, terphenyl, pyrenyl, 2- or 9-fluorenyl, phenanthryl, or anthryl, which may be unsubstituted or substituted.

[0029] C₂-C₂₀heteroaryl represents a ring with five to seven ring atoms or a condensed ring system, wherein nitrogen, oxygen or sulfur are the possible hetero atoms, and is typically a heterocyclic group with five to 30 atoms having at least six conjugated π -electrons such as thienyl, benzothiophenyl, dibenzothiophenyl, thianthrenyl, furyl, furfuryl, 2H-pyran, benzofuranyl, isobenzofuranyl, dibenzofuranyl, phenoxythienyl, pyrrolyl, imidazolyl, pyrazolyl, pyridyl, bipyridyl, triazinyl, pyrimidinyl, pyrazinyl, pyridazinyl, indolizyl, isoindolyl, indolyl, indazolyl, purinyl, quinolizyl, chinolyl, isochinolyl, phthalazinyl, naphthyridinyl, chinoxalyl, chinazolyl, cinnolyl, pteridinyl, carbazolyl, carbolinyl, benzotriazolyl, benzoxazolyl, phenanthridinyl, acridinyl, pyrimidinyl, phenanthrolinyl, phenazinyl, isothiazolyl, phenothiazinyl, isoxazolyl, furazanyl or phenoxazinyl, which can be unsubstituted or substituted.

[0030] The C₆-C₂₄aryl (C₆-C₁₈aryl) and C₂-C₂₀heteroaryl groups are preferably substituted by one, or more C₁-C₈alkyl groups.

[0031] Examples of arylene radicals are phenylene, naphthylene, phenalenyne, antracylene and phenantrylene, which may optionally be substituted by one or more C₁-C₁₈alkyl groups. A preferred arylene radical is 1,3-phenylene, which may optionally be substituted by one or more C₁-C₁₈alkyl groups.

[0032] Examples of heteroarylene radicals are 1,3,4-thiadiazol-2,5-ylene, 1,3-thiazol-2,4-ylene, 1,3-thiazol-2,5-ylene, 2,4-thiophenylene, 2,5-thiophenylene, 1,3-oxazol-2,4-ylene, 1,3-oxazol-2,5-ylene and 1,3,4-oxadiazol-2,5-ylene, 2,5-indenylene, 2,6-indenylene, especially pyrazinylene, pyridinylene, pyrimidinylene, and triazolylene, which may optionally be substituted by one or more C₁-C₁₈alkyl groups. Preferred heteroarylene radicals are 2,6-pyrazinylene, 3,5-pyridinylene, 2,6-pyridinylene, 4,6-pyrimidinylene, and 2,6-triazolylene, which may optionally be substituted by one or more C₁-C₁₈alkyl groups.

[0033] D is preferably -CO-, -COO-, -S-, -SO-, -SO₂-, -O-, -NR²⁵-, wherein R²⁵ is C₁-C₁₂alkyl, such as methyl, ethyl, n-propyl, iso-propyl, n-butyl, isobutyl, or sec-butyl, or C₆-C₁₈aryl, such as phenyl, tolyl, naphthyl, or biphenyl.

[0034] E is preferably -OR²⁹-, -SR²⁹-, -NR²⁵R²⁵-, -COR²⁸-, -COOR²⁷-, -CONR²⁵R²⁵-, or -CN; wherein R²⁵, R²⁷, R²⁸ and R²⁹ are independently of each other C₁-C₁₂alkyl, such as methyl, ethyl, n-propyl, iso-propyl, n-butyl, isobutyl, sec-butyl, hexyl, octyl, or 2-ethyl-hexyl, or C₆-C₁₈aryl, such as phenyl, tolyl, naphthyl, or biphenyl, which may optionally be substituted.

[0035] G has the same preferences as E, or is C₁-C₁₈alkyl, especially C₁-C₁₂alkyl, such as methyl, ethyl, n-propyl, iso-propyl, n-butyl, isobutyl, sec-butyl, hexyl, octyl, or 2-ethyl-hexyl, or is C₁-C₁₈perfluoroalkyl, such, for example, -CF₃.

[0036] The organic electronic device of the present application is, for example, an organic solar cell (organic photo-

voltaics), a switching element. such as an organic transistors, for example organic FET and organic TFT, organic light emitting field effect transistor (OLEFET), or an organic light-emitting diode (OLED), preference being given to OLEDs.

[0037] The present application relates to the use of the organic metal complex of formula I in combination with the compound of formula II as organic layer, especially electron transport layer in an organic electronic device.

[0038] Accordingly, the present application is directed to an organic layer, especially electron transport layer, comprising an organic metal complex of formula I and a compound of formula II.

[0039] Suitable structures of organic electronic devices are known to those skilled in the art and are specified below.

[0040] The organic transistor generally includes a semiconductor layer formed from an organic layer with hole transport capacity and/or electron transport capacity; a gate electrode formed from a conductive layer; and an insulating layer introduced between the semiconductor layer and the conductive layer. A source electrode and a drain electrode are mounted on this arrangement in order thus to produce the transistor element. In addition, further layers known to those skilled in the art may be present in the organic transistor.

[0041] The organic solar cell (photoelectric conversion element) generally comprises an organic layer present between two plate-type electrodes arranged in parallel. The organic layer may be configured on a comb-type electrode. There is no particular restriction regarding the site of the organic layer and there is no particular restriction regarding the material of the electrodes. When, however, plate-type electrodes arranged in parallel are used, at least one electrode is preferably formed from a transparent electrode, for example an ITO electrode or a fluorine-doped tin oxide electrode. The organic layer is formed from two sublayers, i.e. a layer with p-type semiconductor properties or hole transport capacity, and a layer formed with n-type semiconductor properties or electron transport capacity. In addition, it is possible for further layers known to those skilled in the art to be present in the organic solar cell. The layer with electron transport capacity may comprise the organic metal complex of formula I and the compound of formula II.

[0042] The present invention further relates to an organic light-emitting diode comprising an anode An and a cathode Ka, a light-emitting layer E arranged between the anode An and the cathode Ka, an electron transport layer arranged between the cathode Ka and the light-emitting layer E, and if appropriate at least one further layer selected from the group consisting of at least one blocking layer for holes/excitons, at least one blocking layer for electrons/excitons, at least one hole injection layer, at least one hole transport layer and at least one electron injection layer, wherein the electron transport layer comprises an organic metal complex of formula I and a compound of formula II.

Structure of the inventive OLED

[0043] The inventive organic light-emitting diode (OLED) thus generally has the following structure:

an anode (An) and a cathode (Ka) and a light-emitting layer E arranged between the anode (An) and the cathode (Ka) and an electron transport layer arranged between the cathode Ka and the light-emitting layer E.

[0044] The inventive OLED may, for example - in a preferred embodiment - be formed from the following layers:

1. Anode
2. Hole transport layer
3. Light-emitting layer
4. Blocking layer for holes/excitons
5. Electron transport layer
6. Cathode

[0045] Layer sequences different than the aforementioned structure are also possible, and are known to those skilled in the art. For example, it is possible that the OLED does not have all of the layers mentioned; for example, OLEDs which have layers (1), (3), (4), (5) and (6), are likewise suitable. In addition, the OLEDs may have a blocking layer for electrons/excitons between the hole transport layer (2) and the light-emitting layer (3).

[0046] It is additionally possible that a plurality of the aforementioned functions (electron/exciton blocker, hole/exciton blocker, hole injection, hole transport, electron injection, electron transport) are combined in one layer and are assumed, for example, by a single material present in this layer. For example, a material used in the hole transport layer, in one embodiment, may simultaneously block excitons and/or electrons.

[0047] Furthermore, the individual layers of the OLED among those specified above may in turn be formed from two or more layers. For example, the hole transport layer may be formed from a layer into which holes are injected from the electrode, and a layer which transports the holes away from the hole-injecting layer into the light-emitting layer. The electron transport layer may likewise consist of a plurality of layers, for example a layer in which electrons are injected by the electrode, and a layer which receives electrons from the electron injection layer and transports them into the light-emitting layer. These layers mentioned are each selected according to factors such as energy level, thermal resistance


and charge carrier mobility, and also energy difference of the layers specified with the organic layers or the metal electrodes. The person skilled in the art is capable of selecting the structure of the OLEDs such that it is matched optimally to the organic compounds used as emitter substances in accordance with the invention.

[0048] In order to obtain particularly efficient OLEDs, for example, the HOMO (highest occupied molecular orbital) of the hole transport layer should be matched to the work function of the anode, and the LUMO (lowest unoccupied molecular orbital) of the electron transport layer should be matched to the work function of the cathode, provided that the aforementioned layers are present in the inventive OLEDs.


[0049] The anode (1) is an electrode which provides positive charge carriers. It may be formed, for example, from materials which comprise a metal, a mixture of various metals, a metal alloy, a metal oxide or a mixture of various metal oxides. Alternatively, the anode may be a conductive polymer. Suitable metals comprise metals and alloys of the metals of the main groups, transition metals and of the lanthanoids, especially the metals of groups Ib, IVa, Va and VIa of the periodic table of the elements, and the transition metals of group VIIa. When the anode is to be transparent, generally mixed metal oxides of groups IIb, IIIb and IVb of the periodic table of the elements (IUPAC version) are used, for example indium tin oxide (ITO). It is likewise possible that the anode (1) comprises an organic material, for example polyaniline, as described, for example, in Nature, Vol. 357, pages 477 to 479 (June 11, 1992). At least either the anode or the cathode should be at least partly transparent in order to be able to emit the light formed. The material used for the anode (1) is preferably ITO.

[0050] Suitable hole transport materials for layer (2) of the inventive OLEDs are disclosed, for example, in Kirk-Othmer Encyclopedia of Chemical Technology, 4th edition, Vol. 18, pages 837 to 860, 1996. Both hole-transport molecules and polymers can be used as the hole transport material. Hole-transport molecules typically used are selected from the group consisting of tris[N-(1-naphthyl)-N-(phenylamino)]triphenylamine (1-NaphDATA), 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (α -NPD), N,N'-diphenyl-N,N'-bis(3-methylphenyl)-[1,1'-biphenyl]-4,4'-diamine (TPD), 1,1-bis[(di-4-tolylamino)phenyl]cyclohexane (TAPC), N,N'-bis(4-methylphenyl)-N,N'-bis(4-ethylphenyl)-[1,1'-(3,3'-dimethyl)biphenyl]-4,4'-diamine (ETPD), tetrakis(3-methylphenyl)-N,N,N',N'-2,5-phenylenediamine (PDA), α -phenyl-4-N,N-diphenylaminostyrene (TPS), p-(diethylamino)benzaldehyde diphenylhydrazone (DEH), triphenylamine (TPA), bis[4-(N,N-diethylamino)-2-methylphenyl](4-methylphenyl)methane (MPMP), 1-phenyl-3-[p-(diethylamino)styryl]-5-[p-(diethylamino)phenyl]pyrazoline (PPR or DEASP), 1,2-trans-bis(9H-carbazol-9-yl)cyclobutane (DCZB), N,N,N',N'-tetrakis(4-methylphenyl)-(1,1'-biphenyl)-4,4'-diamine (TTB), 4,4',4"-tris(N,N-diphenylamino)triphenylamine (TDTA), 4,4',4"-tris(N-carbazolyl)triphenylamine (TCTA), N,N'-bis(naphthalen-2-yl)-N,N'-bis(phenyl)benzidine (β -NPB), N,N'-bis(3-methylphenyl)-N,N'-bis(phenyl)-9,9-spirobifluorene (Spiro-TPD), N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)-9,9-spirobifluorene (Spiro-NPB), N,N'-bis(3-methylphenyl)-N,N'-bis(phenyl)-9,9-dimethylfluorene (DMFL-TPD), di[4-(N,N-ditolylamino)phenyl]cyclohexane, N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)-9,9-dimethylfluorene, N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)-2,2-dimethylbenzidine, N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)benzidine, N,N'-bis(3-methylphenyl)-N,N'-bis(phenyl)benzidine, 2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane (F4-TCNQ), 4,4',4"-tris(N-3-methylphenyl-N-phenylamino)triphenylamine, 4,4',4"-tris(N-(2-naphthyl)-N-phenyl-amino)triphenylamine, pyrazino[2,3-f][1,10]phenanthroline-2,3-dicarbonitrile (PPDN), N,N,N',N'-tetrakis(4-methoxyphenyl)benzidine (MeO-TPD), 2,7-bis[N,N-bis(4-methoxyphenyl)amino]-9,9-spirobifluorene (MeO-Spiro-TPD), 2,2'-bis[N,N-bis(4-methoxyphenyl)amino]-9,9-spirobifluorene (2,2-MeO-Spiro-TPD), N,N'-diphenyl-N,N'-di[4-(N,N-ditolylamino)phenyl]benzidine (NTNPB), N,N'-diphenyl-N,N'-di[4-(N,N-diphenylamino)phenyl]benzidine (NPNPB), N,N'-di(naphthalen-2-yl)-N,N'-diphenylbenzene-1,4-d i a m i n e (β -NPP), N,N'-bis(3-methylphenyl)-N,N'-bis(phenyl)-9,9-diphenylfluorene (DPFL-TPD), N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)-9,9-diphenylfluorene (DPFL-NPB), 2,2',7,7'-tetrakis(N,N-diphenylamino)-9,9'-spirobifluorene (Spiro-TAD), 9,9-bis[4-(N,N-bis(biphenyl-4-yl)amino)phenyl]-9H-fluorene (BPAPF), 9,9-bis[4-(N,N-bis(naphthalen-2-yl)amino)phenyl]-9H-fluorene (NPAPF), 9,9-bis[4-(N,N-bis(naphthalen-2-yl)-N,N'-bisphenylamino)phenyl]-9H-fluorene (NPBAPF), 2,2',7,7'-tetrakis[N-naphthalenyl(phenyl)amino]-9,9'-spirobifluorene (Spiro-2NPB), N,N'-bis(phenanthren-9-yl)-N,N'-bis(phenyl)benzidine (PAPB), 2,7-bis[N,N-bis(9,9-spirobifluoren-2-yl)amino]-9,9-spirobifluorene (Spiro-5), 2,2'-bis[N,N-bis(biphenyl-4-yl)amino]-9,9-spirobifluorene (2,2'-Spiro-DBP), 2,2'-bis(N,N-diphenylamino)-9,9-spirobifluorene (Spiro-BPA), 2,2',7,7'-tetra(N,N-ditolyl)aminospirobifluorene (Spiro-TTB), N,N,N',N'-tetranaphthalen-2-ylbenzidine (TNB), porphyrin compounds and phthalocyanines such as copper phthalocyanines and titanium oxide phthalocyanines. Hole-transporting polymers typically used are selected from the group consisting of polyvinylcarbazoles, (phenylmethyl)polysilanes and polyanilines. It is likewise possible to obtain hole-transporting polymers by doping hole-transporting molecules into polymers such as polystyrene and polycarbonate. Suitable hole-transporting molecules are the molecules already mentioned above.

[0051] In addition - in one embodiment - it is possible to use carbene complexes as hole transport materials, the band gap of the at least one hole transport material generally being greater than the band gap of the emitter material used. In the context of the present application, "band gap" is understood to mean the triplet energy. Suitable carbene complexes are, for example, carbene complexes as described in WO 2005/019373 A2, WO 2006/056418 A2, WO 2005/113704, WO 2007/115970, WO 2007/115981 and WO 2008/000727. One example of a suitable carbene complex is fac-Iridium-tris(1,3-diphenylbenzimidazolin-2-yliden-C,C^{2'}) (Ir(dpbc)₃) with the formula:



which is disclosed, for example, in WO2005/019373. Preferably, the hole transport layer comprises a compound of formula




doped with molybdenum oxide (MoO_x), especially MoO_3 , or rhenium oxide (ReO_x), especially ReO_3 . The dopant is contained in an amount of from 0.1 % by weight, preferably 1 to 8 % by weight, more preferably 3 to 5 % by weight, based on the amount of dopant and carbene complex.

[0052] The light-emitting layer (3) comprises at least one emitter material. In principle, it may be a fluorescence or phosphorescence emitter, suitable emitter materials being known to those skilled in the art. The at least one emitter material is preferably a phosphorescence emitter. The phosphorescence emitter compounds used with preference are based on metal complexes, and especially the complexes of the metals Ru, Rh, Ir, Pd and Pt, in particular the complexes of Ir, have gained significance.

[0053] Suitable metal complexes for use in the inventive OLEDs are described, for example, in documents WO02/60910 A1, US 2001/0015432 A1, US 2001/0019782 A1, US 2002/0055014 A1, US 2002/0024293 A1, US 2002/0048689 A1, EP 1 191 612 A2, EP 1 191 613 A2, EP 1 211 257 A2, US 2002/0094453 A1, WO 02/02714 A2, WO 00/70655 A2, WO 01/41512 A1, WO 02/15645 A1, WO 2005/019373 A2, WO 2005/113704 A2, WO 2006/115301 A1, WO 2006/067074 A1, WO 2006/056418, WO 2006/121811 A1, WO 2007/095118 A2, WO 2007/115970, WO 2007/115981 and WO 2008/000727, WO2010/129323, WO2010/056669 and WO10086089.

[0054] The light emitting layer comprises preferably a compound of the formula



which are described in WO 2005/019373 A2, wherein the symbols have the following meanings:

M^1 is a metal atom selected from the group consisting of Co, Rh, Ir, Nb, Pd, Pt, Fe, Ru, Os, Cr, Mo, W, Mn, Tc, Re, Cu, Ag and Au in any oxidation state possible for the respective metal atom;

Carbene is a carbene ligand which may be uncharged or monoanionic and monodentate, bidentate or tridentate, with the carbene ligand also being able to be a biscarbene or triscarbene ligand;


L is a monoanionic or dianionic ligand, which may be monodentate or bidentate;


K is an uncharged monodentate or bidentate ligand selected from the group consisting of phosphines; phosphonates and derivatives thereof, arsenates and derivatives thereof; phosphites; CO; pyridines; nitriles and conjugated dienes which form a π complex with M^1 ; $n-1$ is the number of carbene ligands, where $n-1$ is at least 1 and when $n-1 > 1$ the carbene ligands in the complex of the formula I can be identical or different;







m is the number of ligands L, where m can be 0 or ≥ 1 and when $m > 1$ the ligands L can be identical or different;

o is the number of ligands K, where o can be 0 or ≥ 1 and when $o > 1$ the ligands K can be identical or different; where the sum $n1 + m + o$ is dependent on the oxidation state and coordination number of the metal atom and on the denticity of the ligands carbene, L and K and also on the charge on the ligands, carbene and L, with the proviso that n1 is at least 1.


[0055] The compound of formula IX is preferably a compound of the formula:

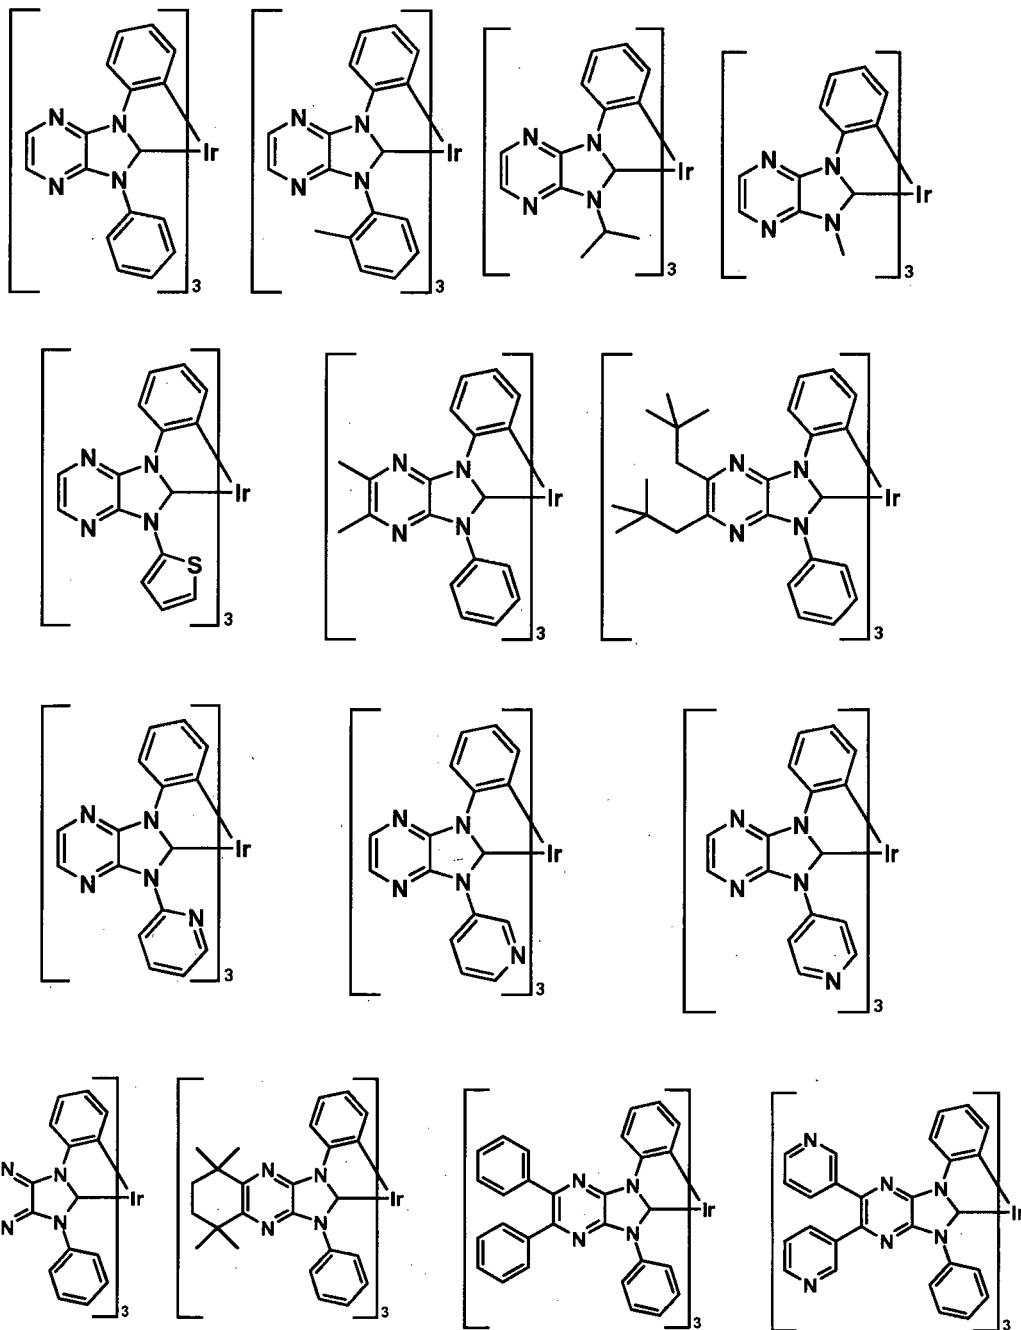

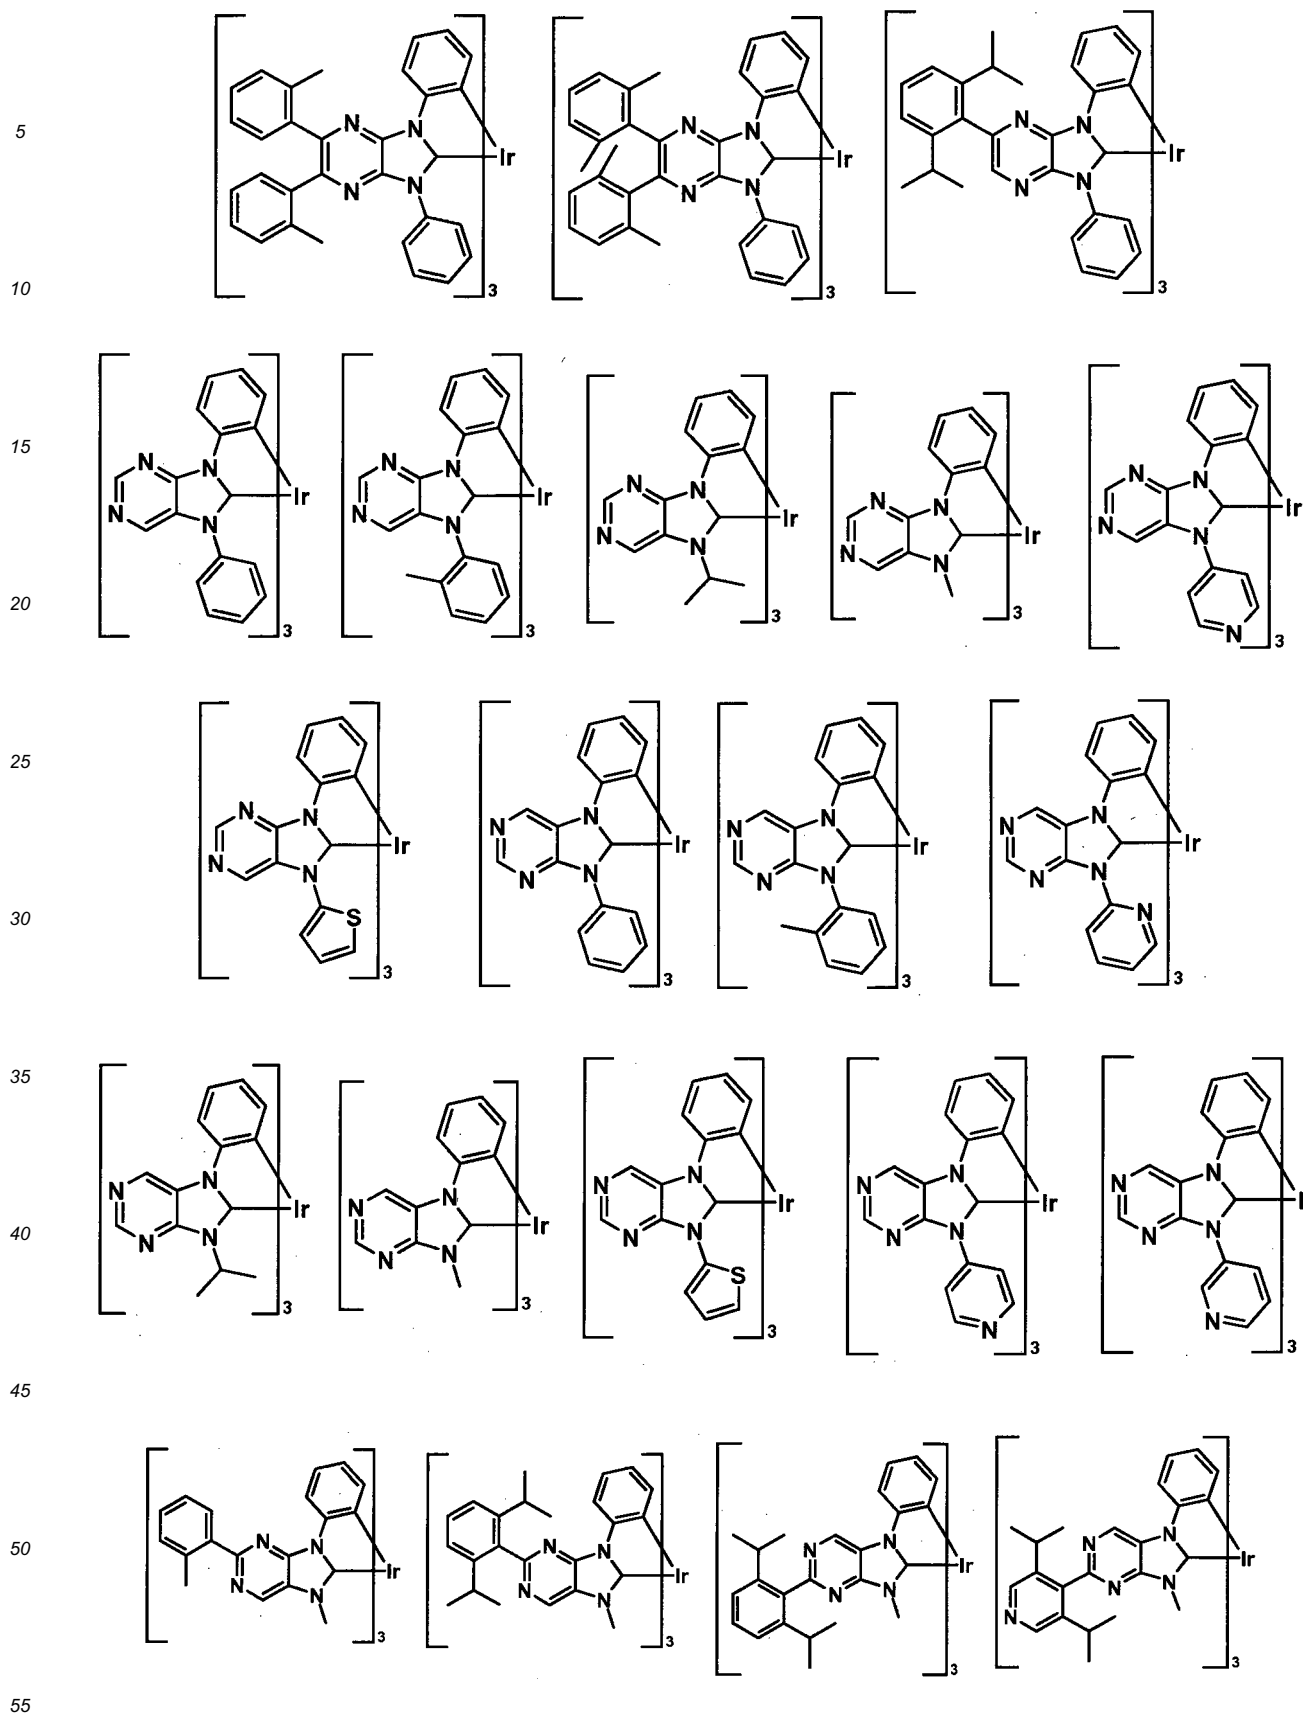

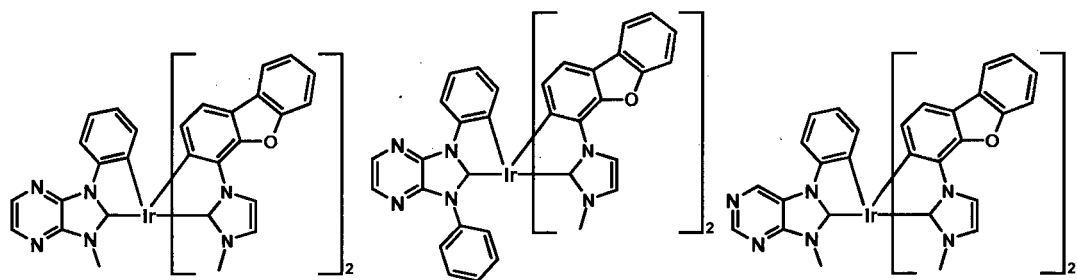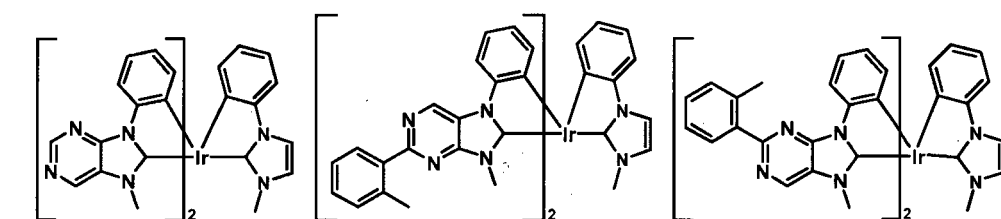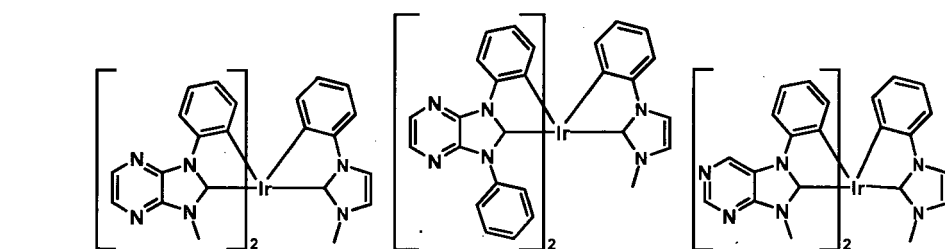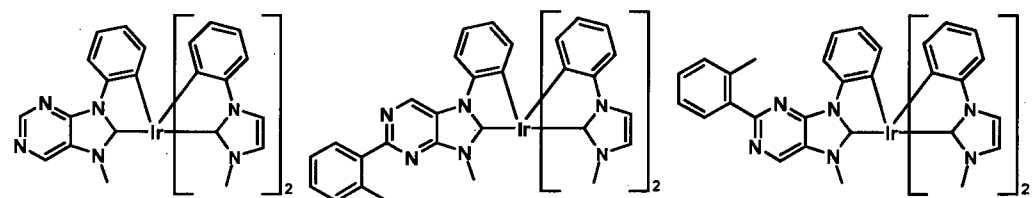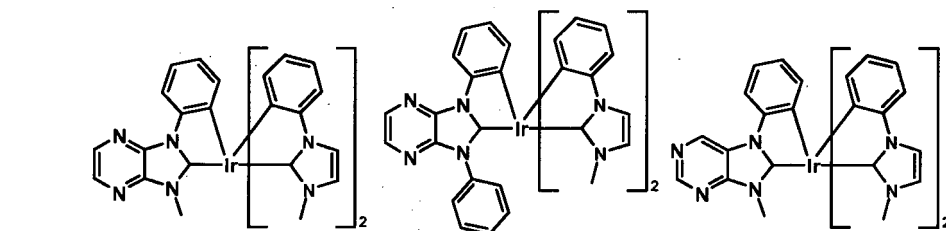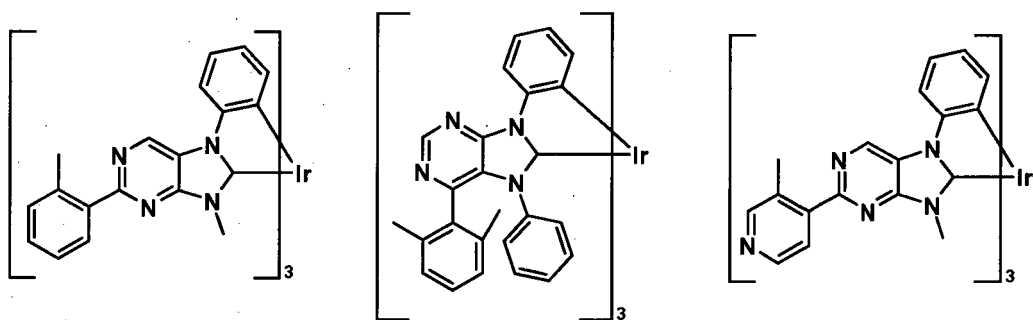


5

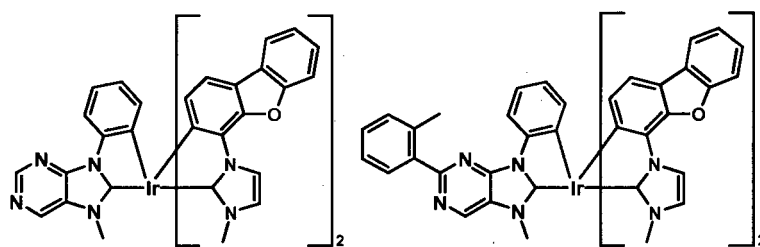


10

15

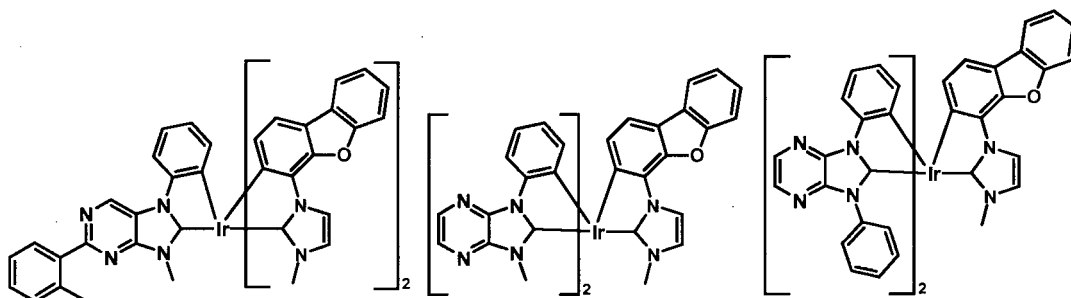


20

25

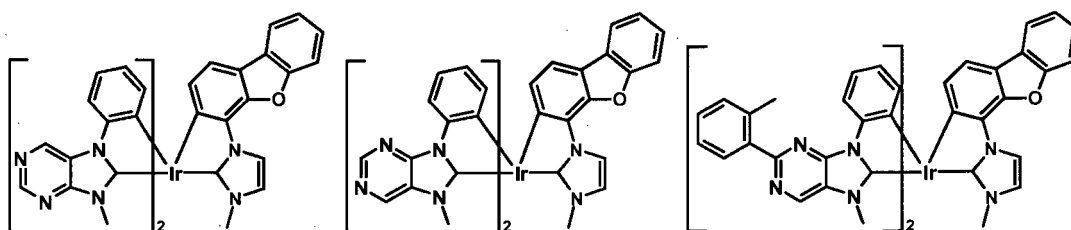


30

35

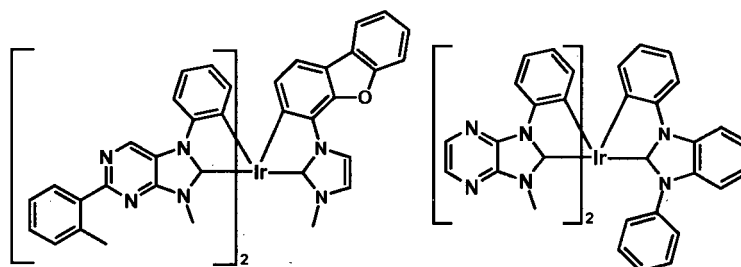


40


45






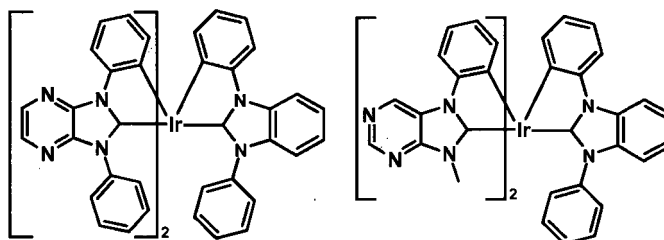







50


55

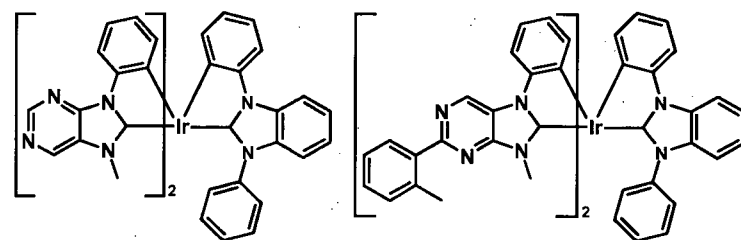

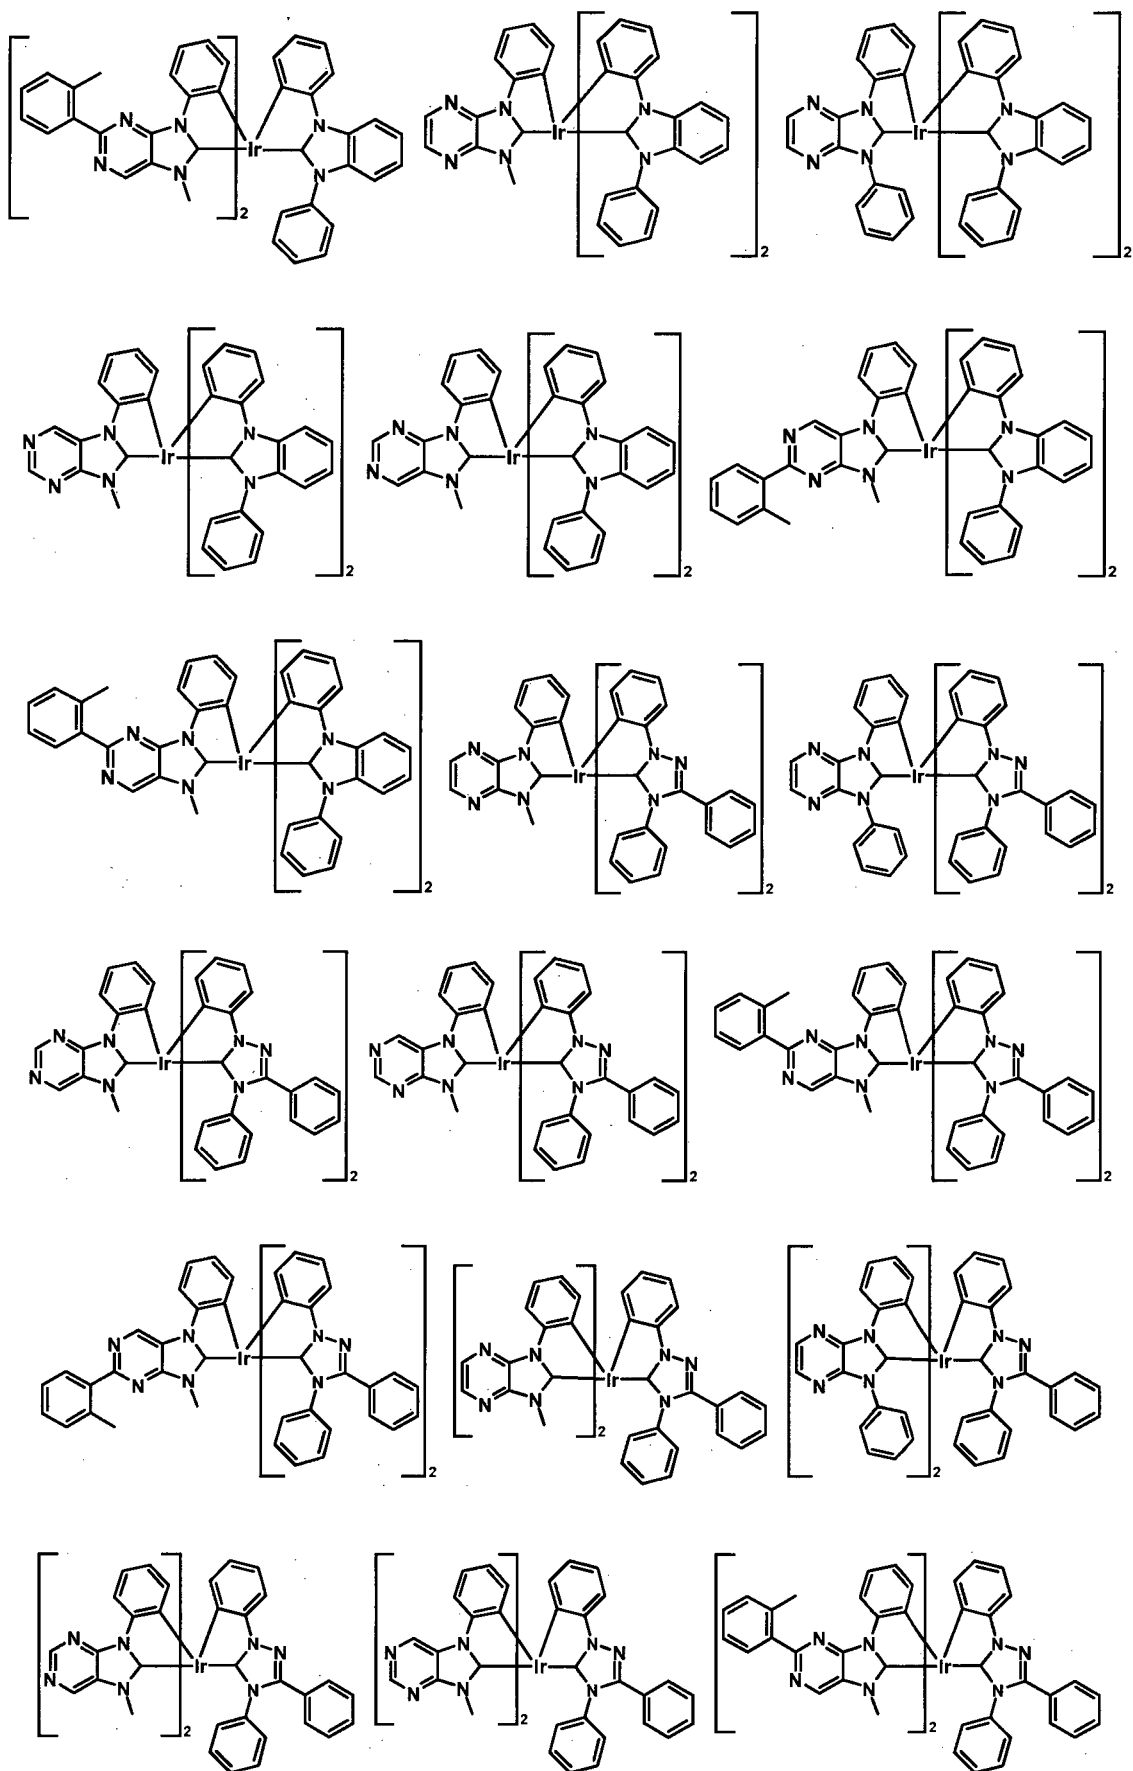

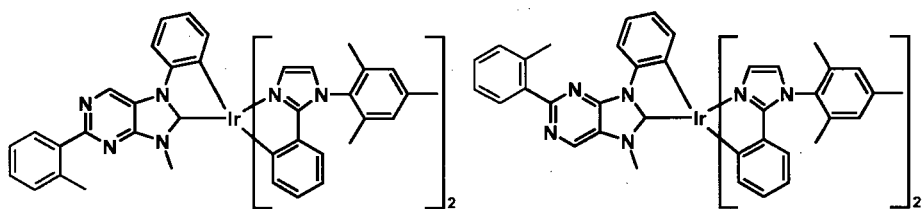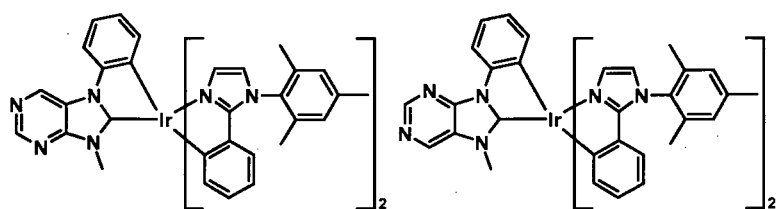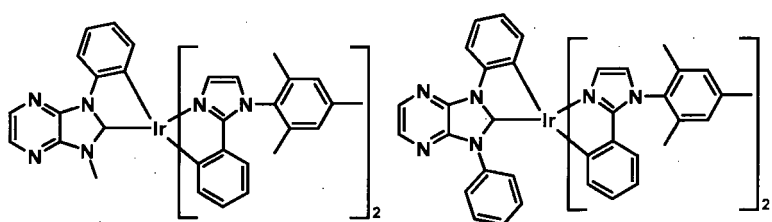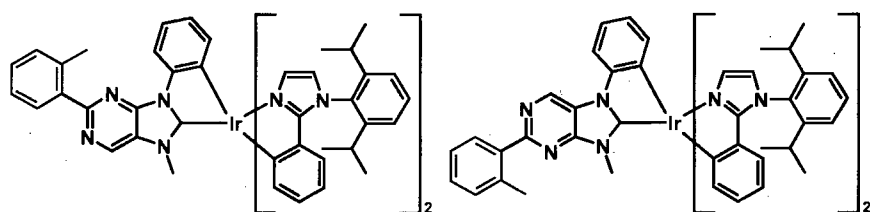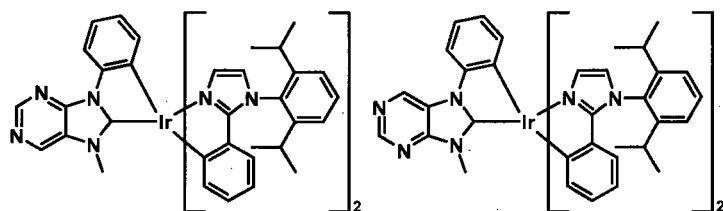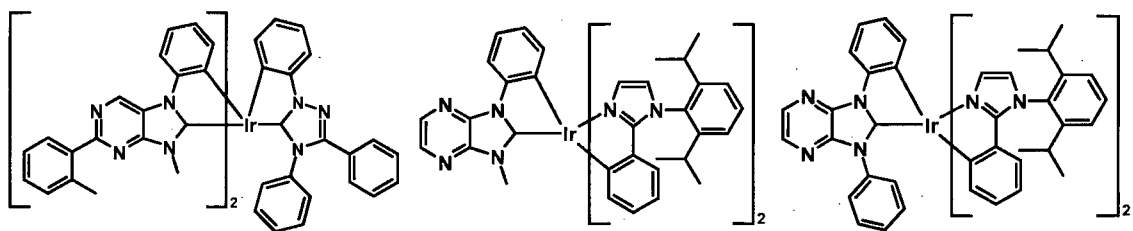

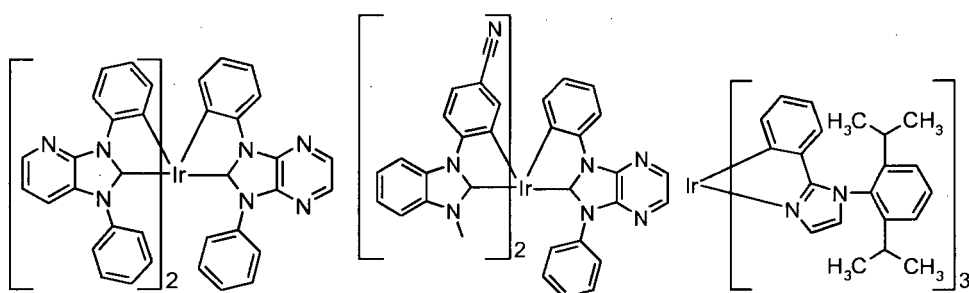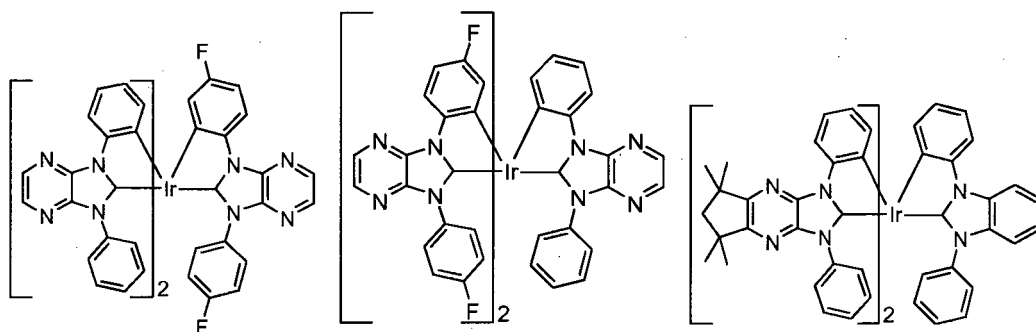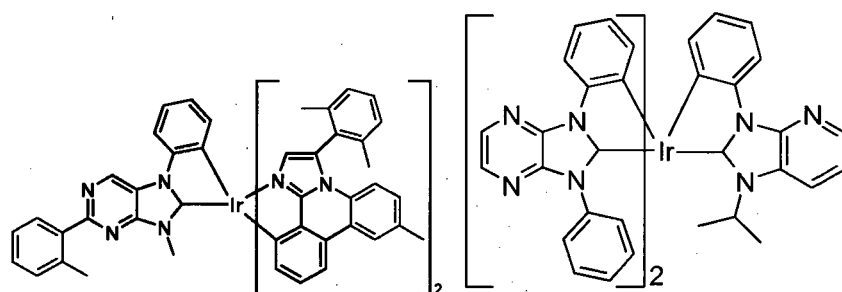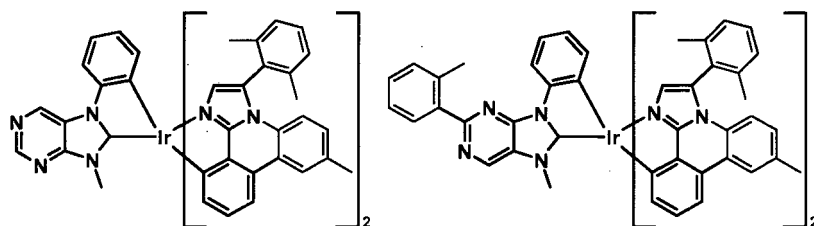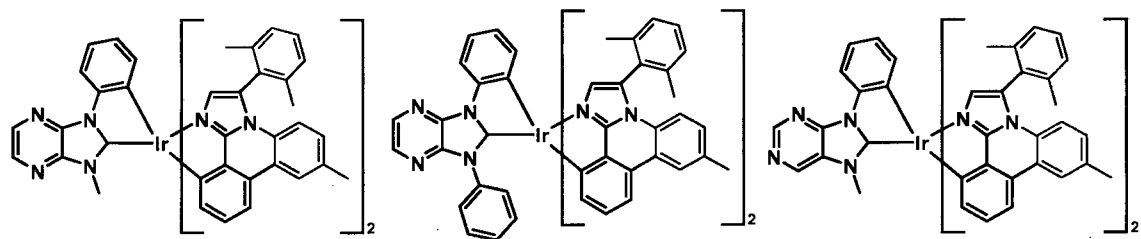


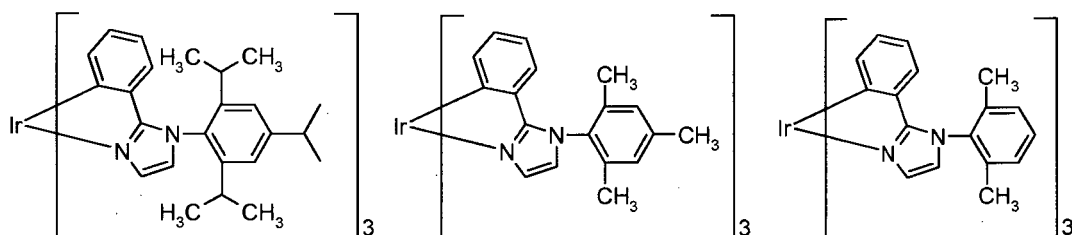

[0056] The homoleptic metal-carbene complexes may be present in the form of facial or meridional isomers, preference being given to the facial isomers.

[0057] In the case of the heteroleptic metal-carbene complexes, four different isomers may be present, preference being given to the pseudo-facial isomers.


[0058] The compound of the formula IX is more preferably a compound of the formula



[0059] Further suitable metal complexes are the commercially available metal complexes tris(2-phenylpyridine)iridium(III), iridium(III) tris(2-(4-tolyl)pyridinato-N,C^{2'}), bis(2-phenylpyridine)(acetylacetonato)iridium(III), iridium(III) tris(1-phenylisoquinoline), iridium(III) bis(2,2'-benzothienyl)pyridinato-N,C^{3'}(acetylacetonate), tris(2-phenylquinoline)iridium(III), iridium(III) bis(2-(4,6-difluorophenyl)pyridinato-N,C^{2'})picolinate, iridium(III) bis(1-phenylisoquinoline)(acetylacetonate), bis(2-phenylquinoline)(acetylacetonato)iridium(III), iridium(III) bis(di-benzo[f,h]quinoxaline)(acetylacetonate), iridium(III) bis(2-methyldibenzo[f,h]quinoxaline)(acetylacetonate) and tris(3-methyl-1-phenyl-4-trimethylacetyl-5-pyrazolino)terbium(III), bis[1-(9,9-dimethyl-9H-fluoren-2-yl)isoquinoline](acetylacetonato)iridium(III), bis(2-phenylbenzothiazolato)(acetylacetonato)iridium(III), bis(2-(9,9-dihexylfluorenyl)-1-pyridine)(acetylacetonato)iridium(III), bis(2-benzo[b]thiophen-2-yl-pyridine)(acetylacetonato)iridium(III).

[0060] In addition, the following commercially available materials are suitable: tris(dibenzoylmethane)mono(phenanthroline)europium(III), tris(dibenzoylmethane)-mono(phenanthroline)europium(III), tris(dibenzoylmethane)mono(5-aminophenanthroline)-europium(III), tris(di-2-naphthoylmethane)mono(phenanthroline)europium(III), tris(4-bromobenzoylmethane)mono(phenanthroline)europium(III), tris(di(biphenyl)methane)-mono(phenanthroline)europium(III), tris(dibenzoylmethane)mono(4,7-diphenyl-phenanthroline)europium(III), tris(dibenzoylmethane)mono(4,7-di-methyl-phenanthroline)europium(III), tris(dibenzoylmethane)mono(4,7-dimethylphenanthroline)disulfonic acid)europium(III) disodium salt, tris[di(4-(2-(2-ethoxyethoxy)ethoxy)-benzoylmethane)]mono(phenanthroline)europium(III) and tris[di(4-(2-(2-ethoxy-ethoxy)ethoxy)benzoylmethane)]mono(5-aminophenanthroline)europium(III), osmium(II) bis(3-(trifluoromethyl)-5-(4-tert-butylpyridyl)-1,2,4-triazolato)diphenylmethylphosphine, osmium(II) bis(3-(trifluoromethyl)-5-(2-pyridyl)-1,2,4-triazole)dimethylphenylphosphine, osmium(II) bis(3-(trifluoromethyl)-5-(4-tert-butylpyridyl)-1,2,4-triazolato)dimethylphenylphosphine, osmium(II) bis(3-(trifluoromethyl)-5-(2-pyridyl)-pyrazolato)dimethylphenylphosphine, tris[4,4'-di-tert-butyl(2,2')-bipyridine]ruthenium(III), osmium(II) bis(2-(9,9-dibutylfluorenyl)-1-isoquinoline)(acetylacetonate).

[0061] Suitable triplet emitters are, for example, carbene complexes. In one embodiment of the present invention, the compounds of the formula X are used in the light-emitting layer as matrix material together with carbene complexes as triplet emitters.

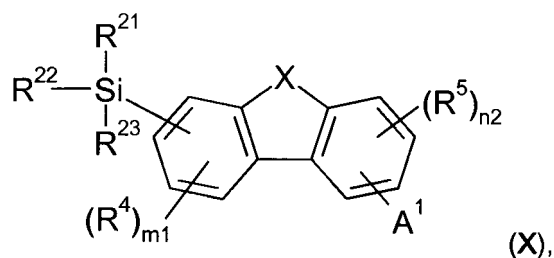

wherein

X is NR, S, O or PR;

R is aryl, heteroaryl, alkyl, cycloalkyl, or heterocycloalkyl;

A¹ is -NR⁶R⁷, -P(O)R⁸R⁹, -PR¹⁰R¹¹, -S(O)₂R¹², -S(O)R¹³, -SR¹⁴, or -OR¹⁵;


R²¹, R²² and R²³ are independently of each other aryl, heteroaryl, alkyl, cycloalkyl, or heterocycloalkyl, wherein at least one of the groups R¹, R², or R³ is aryl, or heteroaryl;

R⁴ and R⁵ are independently of each other alkyl, cycloalkyl, heterocycloalkyl, aryl, heteroaryl, a group A¹, or a group having donor, or acceptor characteristics;

n₂ and m₁ are independently of each other 0, 1, 2, or 3;


R⁶, R⁷ form together with the nitrogen atom a cyclic residue having 3 to 10 ring atoms, which can be unsubstituted, or which can be substituted with one, or more substituents selected from alkyl, cycloalkyl, heterocycloalkyl, aryl, heteroaryl and a group having donor, or acceptor characteristics; and/or which can be annulated with one, or more further cyclic residues having 3 to 10 ring atoms, wherein the annulated residues can be unsubstituted, or can be substituted with one, or more substituents selected from alkyl, cycloalkyl, heterocycloalkyl, aryl, heteroaryl and a group having donor, or acceptor characteristics; and

R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴ and R¹⁵ are independently of each other aryl, heteroaryl, alkyl, cycloalkyl, or heterocycloalkyl. Compounds of formula X, such as, for example,

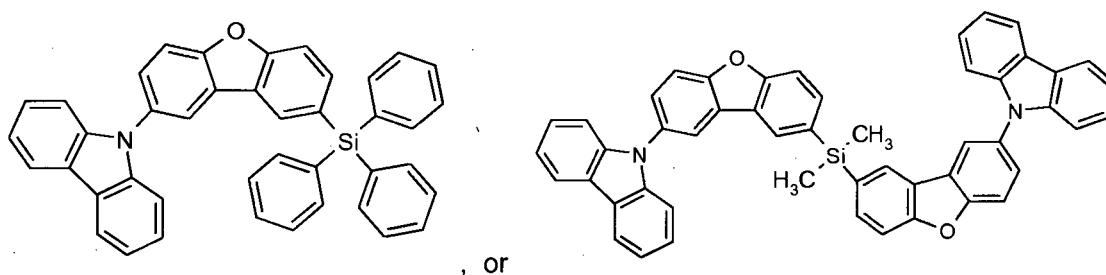


are described in WO2010079051 (PCT/EP2009/067120; in particular pages on 19 to 26 and in tables on pages 27 to 34, pages 35 to 37 and pages 42 to 43).


[0062] Additional matrix materials on basis of dibenzofuran are, for example, described in US2009066226, EP1885818B1, EP1970976, EP1998388 and EP2034538. Examples of particularly preferred matrix materials are shown below:

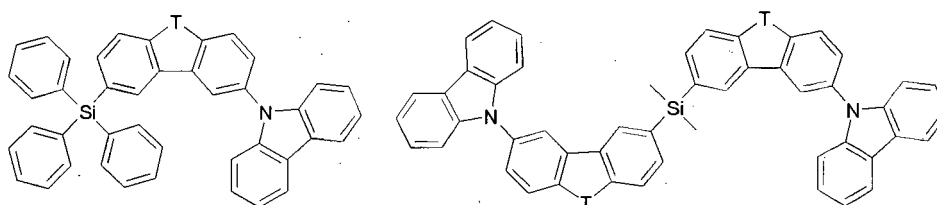

5
10
15
20
25
30
35
40
45
50
55

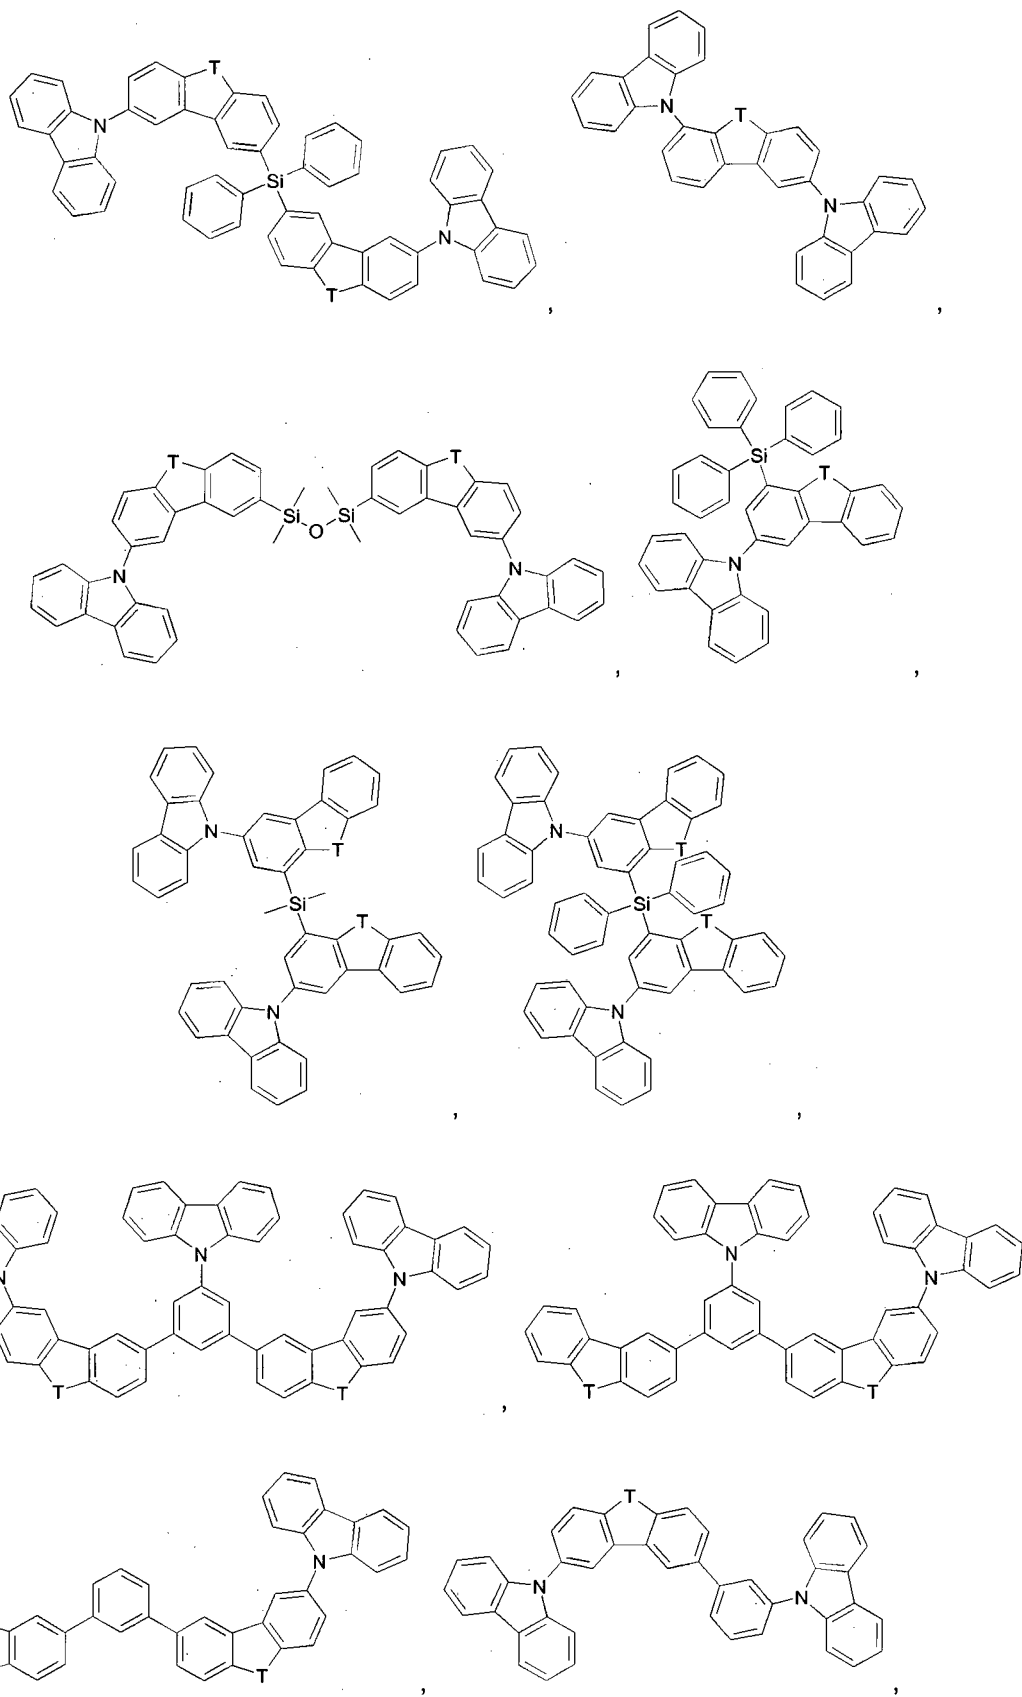


5

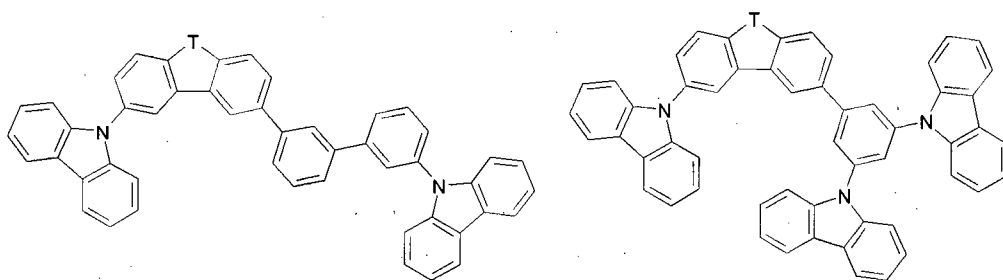


10

15

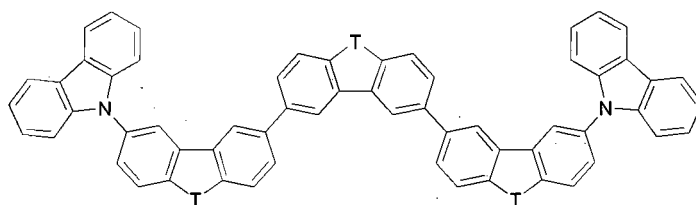


20

25

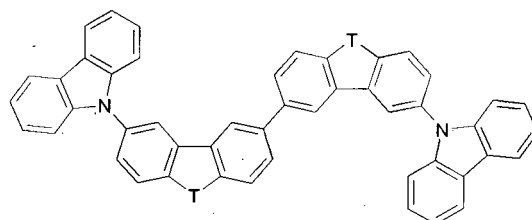


30

35

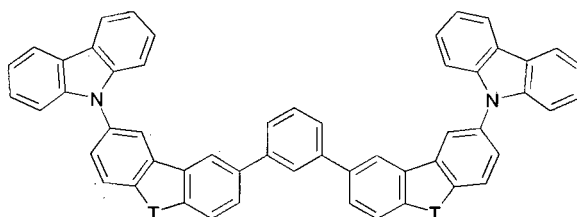


40






45


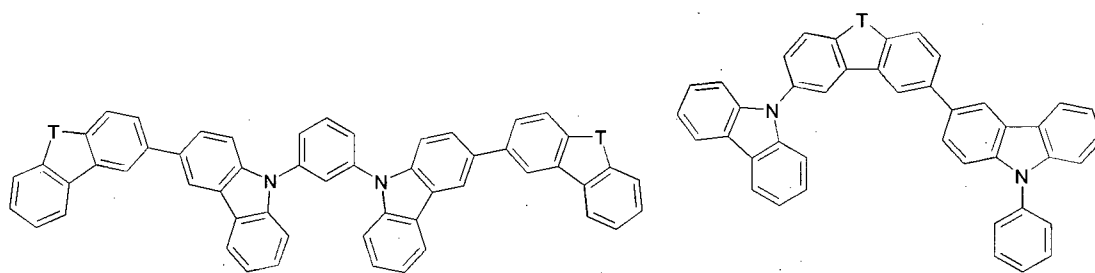


50


55

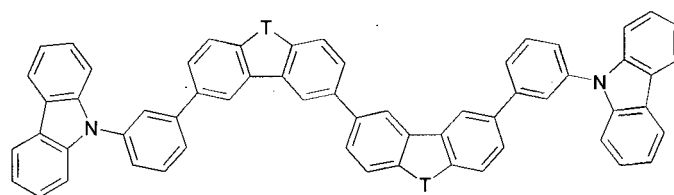

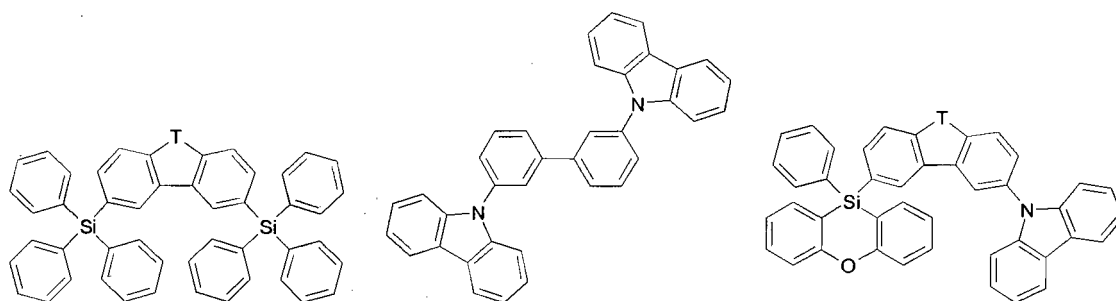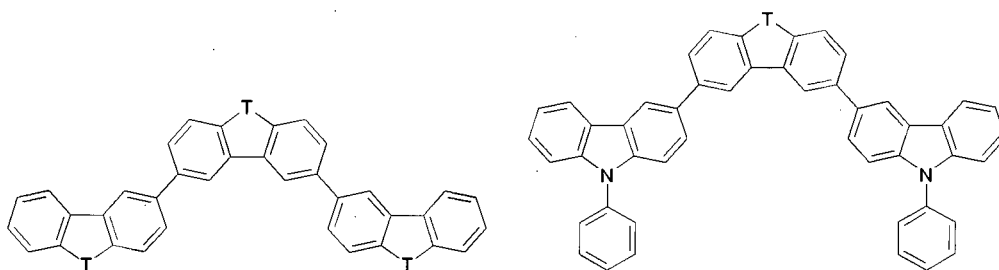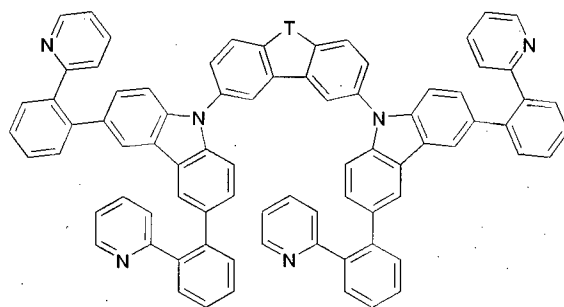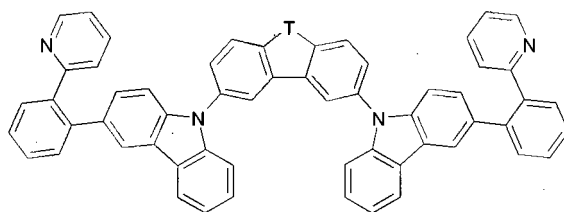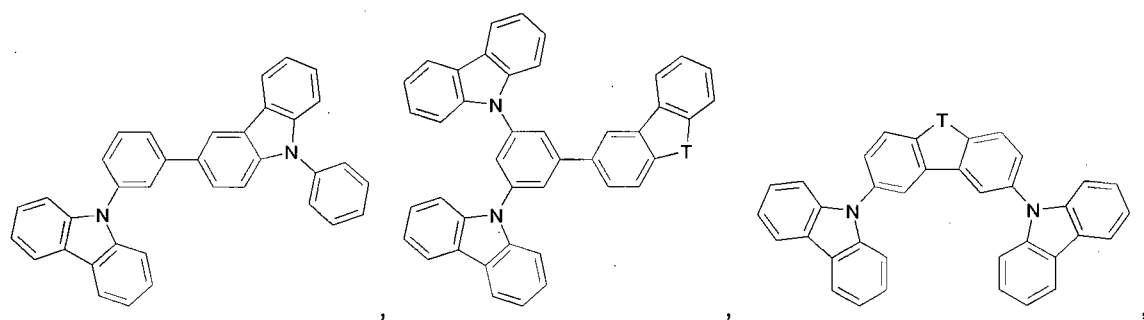

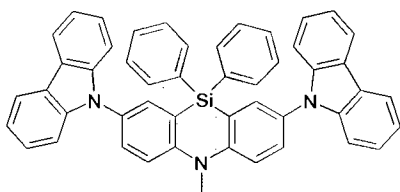

and




[0063] In the above-mentioned compounds T is O, or S, preferably O. If T occurs more than one time in a molecule, all groups T have the same meaning.

[0064] Suitable carbene complexes are known to those skilled in the art and are described, for example, in W O 2005/019373 A2, WO 2006/056418 A2, WO 2005/113704, WO 2007/115970, WO 2007/115981 and WO 2008/000727.


[0065] The light-emitting layer may comprise further components in addition to the emitter material. For example, a fluorescent dye may be present in the light-emitting layer in order to alter the emission color of the emitter material. In addition - in a preferred embodiment - a matrix material can be used. This matrix material may be a polymer, for example poly(N-vinylcarbazole) or polysilane. The matrix material may, however, be a small molecule, for example 4,4'-N,N'-dicarbazolebiphenyl (CDP=CBP) or tertiary aromatic amines, for example TCTA. In a preferred embodiment of the present invention, at least one of the above-mentioned matrix materials on basis of dibenzofurane, especially at least one of the compounds of the formula X is used as matrix material.

[0066] In a preferred embodiment, the light-emitting layer is formed from 2 to 20% by weight, preferably 5 to 17% by weight, of at least one of the aforementioned emitter materials and 80 to 98% by weight, preferably 83 to 95% by weight, of at least one of the aforementioned matrix materials - in one embodiment at least one compound of the formula X - where the sum total of the emitter material and of the matrix material adds up to 100% by weight.


[0067] In a preferred embodiment, the light-emitting layer comprises a compound of formula X, such as, for example,

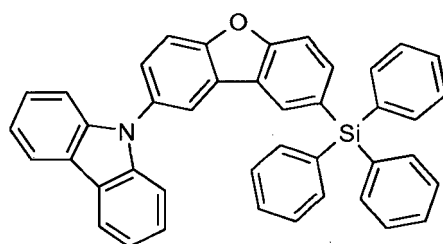


or

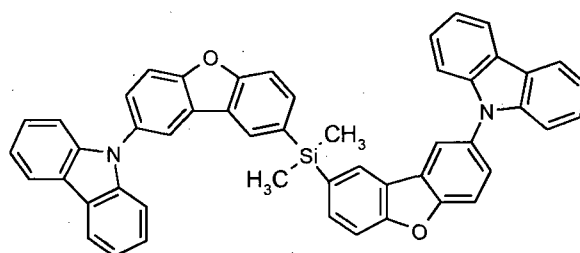


and two carbene complexes, preferably of formula

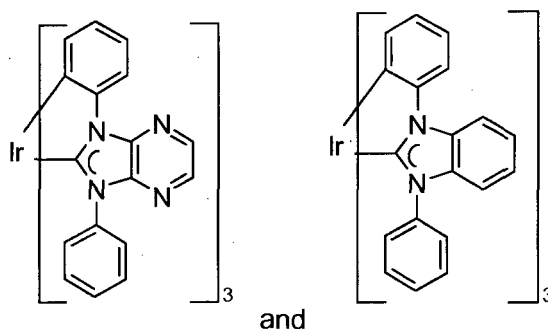

15 In said embodiment, the light-emitting layer is formed from 2 to 40% by weight, preferably 5 to 35% by weight, of



and 60 to 98% by weight, preferably 65 to 95% by weight, of a compound of the formula X and



where the sum total of the carbene complexes and of the compound of formula X adds up to 100% by weight.

[0068] In a further embodiment, the above-mentioned matrix materials on basis of dibenzofurane, especially the compounds of the formula X are used as hole/exciton blocker material, preferably together with carbene complexes as triplet emitters. The above-mentioned matrix materials on basis of dibenzofurane, especially compounds of the formula X may be used as matrix materials or both as matrix materials and as hole/exciton blocker materials together with carbene complexes as triplet emitters.

[0069] Suitable metal complexes for use together with the above-mentioned matrix materials on basis of dibenzofurane, especially the compounds of the formula X as matrix material and/or hole/exciton blocker material, in OLEDs are thus, for example, also carbene complexes as described in WO 2005/019373 A2, WO 2006/056418 A2, WO 2005/113704, WO 2007/115970, WO 2007/115981 and WO 2008/000727. Explicit reference is made here to the disclosure of the WO applications cited, and these disclosures shall be considered to be incorporated into the content of the present application.

[0070] Hole blocker materials typically used in OLEDs are the above-mentioned matrix materials on basis of dibenzofurane, especially compounds of formula X, 2,6-bis(N-carbazolyl)pyridine (mCPy), 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (bathocuproin, (BCP)), bis(2-methyl-8-quinolinato)-4-phenylphenylaluminum(III) (BALq), phenothiazine S,S-dioxide derivatives and 1,3,5-tris(N-phenyl-2-benzylimidazolyl)benzene (TPBI), TPBI also being suitable as electron-conducting material. Further suitable hole blockers and/or electron transport materials are 2,2',2''-(1,3,5-benzenetriyl)tris(1-phenyl-1-H-benzimidazole), 2-(4-biphenyl)-5-(4-tert-butylphenyl)-1,3,4-oxadiazole, 8-hydroxyquino-

linolatolithium, 4-(naphthalen-1-yl)-3,5-diphenyl-4H-1,2,4-triazole, 1,3-bis[2-(2,2'-bipyridin-6-yl)-1,3,4-oxadiazol-5-yl]benzene, 4,7-diphenyl-1,10-phenanthroline, 3-(4-biphenyl)-4-phenyl-5-tert-butylphenyl-1,2,4-triazole, 6,6'-bis[5-(biphenyl-4-yl)-1,3,4-oxadiazol-2-yl]-2,2'-bipyridyl, 2-phenyl-9,10-di(naphthalene-2-yl)anthracene, 2,7-bis[2-(2,2'-bipyridin-6-yl)-1,3,4-oxadiazol-5-yl]-9,9-dimethylfluorene, 1,3-bis[2-(4-tert-butylphenyl)-1,3,4-oxadiazol-5-yl]benzene, 2-(naphthalene-2-yl)-4,7-diphenyl-1,10-phenanthroline, tris-(2,4,6-trimethyl-3-(pyridin-3-yl)phenyl)borane, 2,9-bis(naphthalene-2-yl)-4,7-diphenyl-1,10-phenanthroline, 1-methyl-2-(4-(naphthalene-2-yl)phenyl)-1H-imidazo[4,5-f][1,10]-phenanthroline. In a further embodiment, it is possible to use compounds which comprise aromatic or heteroaromatic rings joined via groups comprising carbonyl groups, as disclosed in WO2006/100298, disilyl compounds selected from the group consisting of disilyl-carbazoles, disilylbenzofurans, disilylbenzothiophenes, disilylbenzophospholes, disilylbenzothiophene S-oxides and disilylbenzothiophene S,S-dioxides, as specified, for example, in WO2009003919 (PCT/EP2008/058207) and WO2009003898 (PCT/EP2008/058106) and disilyl compounds as disclosed in WO2008/034758, as a blocking layer for holes/excitons (4) or as matrix materials in the light-emitting layer (3).

[0071] In a preferred embodiment, the present invention relates to an inventive OLED comprising the layers (1) anode, (2) hole transport layer, (3) light-emitting layer, (4) blocking layer for holes/excitons, (5) electron transport layer and (6) cathode, and if appropriate further layers, wherein the electron transport layer comprises the organic metal complex of formula I and the compound of formula II.

[0072] The electron transport layer (5) of the inventive OLEDs comprises the organic metal complex of formula I and the compound of formula II. The layer (5) preferably improves the mobility of the electrons.

[0073] Among the materials mentioned above as hole transport materials and electron transport materials, some may fulfil several functions. For example, some of the electron-transporting materials are simultaneously hole-blocking materials when they have a low-lying HOMO. These can be used, for example, in the blocking layer for holes/excitons (4).

[0074] The charge transport layers can also be electronically doped in order to improve the transport properties of the materials used, in order firstly to make the layer thicknesses more generous (avoidance of pinholes/short circuits) and in order secondly to minimize the operating voltage of the device. For example, the hole transport materials can be doped with electron acceptors; for example, phthalocyanines or arylamines such as TPD or TDTA can be doped with tetrafluorotetracyanoquinodimethane (F4-TCNQ) or with molybdenum oxide (MoO_x), especially MoO_3 , or with rhenium oxide (ReO_x), especially ReO_3 , or WO_3 . Electronic doping is known to those skilled in the art and is disclosed, for example, in W. Gao, A. Kahn, J. Appl. Phys., Vol. 94, No. 1, 1 July 2003 (p-doped organic layers); A. G. Werner, F. Li, K. Harada, M. Pfeiffer, T. Fritz, K. Leo, Appl. Phys. Lett., Vol. 82, No. 25, 23 June 2003 and Pfeiffer et al., Organic Electronics 2003, 4, 89 - 103. For example, the hole transport layer may, in addition to a carbene complex, e.g. $\text{Ir}(\text{dpbc})_3$, be doped with molybdenum oxide (MoO_x), especially MoO_3 , or with rhenium oxide (ReO_x), especially ReO_3 , or WO_3 .

[0075] The cathode (6) is an electrode which serves to introduce electrons or negative charge carriers. Suitable materials for the cathode are selected from the group consisting of alkali metals of group Ia, for example Li, Cs, alkaline earth metals of group IIa, for example calcium, barium or magnesium, metals of group IIb of the periodic table of the elements (old IUPAC version), comprising the lanthanides and actinides, for example samarium. In addition, it is also possible to use metals such as aluminum or indium, and combinations of all metals mentioned. In addition, lithium-comprising organometallic compounds or potassium fluoride (KF) can be applied between the organic layer and the cathode in order to reduce the operating voltage.

[0076] The OLED according to the present invention may additionally comprise further layers which are known to those skilled in the art. For example, a layer which facilitates the transport of the positive charge and/or matches the band gaps of the layers to one another may be applied between the layer (2) and the light-emitting layer (3). Alternatively, this further layer may serve as a protective layer. In an analogous manner, additional layers may be present between the light-emitting layer (3) and the layer (4) in order to facilitate the transport of negative charge and/or to match the band gaps between the layers to one another. Alternatively, this layer may serve as a protective layer.

[0077] In a preferred embodiment, the inventive OLED, in addition to layers (1) to (6), comprises at least one of the following layers mentioned below:

- a hole injection layer between the anode (1) and the hole-transport layer (2);
- a blocking layer for electrons between the hole-transport layer (2) and the light-emitting layer (3);
- an electron injection layer between the electron-transport layer (5) and the cathode (6).

[0078] Materials for a hole injection layer may be selected from copper phthalocyanine, 4,4',4"-tris(N-3-methylphenyl-N-phenylamino)triphenylamine (m-MTDATA), 4,4',4"-tris(N-(2-naphthyl)-N-phenylamino)triphenylamine (2T-NATA), 4,4',4"-tris(N-(1-naphthyl)-N-phenylamino)triphenylamine (1T-NATA), 4,4',4"-tris(N,N-diphenylamino)triphenylamine (NATA), titanium oxide phthalocyanine, 2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane (F4-TCNQ), pyrazino[2,3-f][1,10]phenanthroline-2,3-dicarbonitrile (PPDN), N,N,N',N'-tetrakis(4-methoxyphenyl)benzidine (MeO-TPD), 2,7-bis[N,N-bis(4-methoxyphenyl)amino]-9,9-spirobifluorene (MeO-Spiro-TPD), 2,2'-bis[N,N-bis(4-methoxyphenyl)amino]-9,9-spirobifluorene (2,2'-MeO-Spiro-TPD), N,N'-diphenyl-N,N'-di-[4-(N,N-ditolylamino)phenyl]benzidine (NTNPB),

N,N'-diphenyl-N,N'-di-[4-(N,N-diphenyl-amino)phenyl]benzidine (NPNPB), N,N'-di(naphthalen-2-yl)-N,N'-diphenylbenzene-1,4-diamine (α -NPP). In principle, it is possible that the hole injection layer comprises at least one of the above-mentioned matrix materials on basis of dibenzofurane, especially at least one compound of the formula X as hole injection material.

[0079] As a material for the electron injection layer, KF, or Liq, for example, can be selected. KF is more preferred than Liq.

[0080] The person skilled in the art is aware (for example on the basis of electrochemical studies) of how suitable materials have to be selected. Suitable materials for the individual layers are known to those skilled in the art and are disclosed, for example, in WO 00/70655.

[0081] In addition, it is possible that some of the layers used in the inventive OLED have been surface-treated in order to increase the efficiency of charge carrier transport. The selection of the materials for each of the layers mentioned is preferably determined by obtaining an OLED with a high efficiency and lifetime.

[0082] The inventive OLED can be produced by methods known to those skilled in the art. In general, the inventive OLED is produced by successive vapor deposition of the individual layers onto a suitable substrate. Suitable substrates are, for example, glass, inorganic semi-transporters, typically ITO, or IZO, or polymer films. For vapor deposition, it is possible to use customary techniques, such as thermal evaporation, chemical vapor deposition (CVD), physical vapor deposition (PVD) and others. In an alternative process, the organic layers of the OLED can be applied from solutions or dispersions in suitable solvents, employing coating techniques known to those skilled in the art.

[0083] In general, the different layers have the following thicknesses: anode (1) 50 to 500 nm, preferably 100 to 200 nm; hole-conducting layer (2) 5 to 100 nm, preferably 20 to 80 nm, light-emitting layer (3) 1 to 100 nm, preferably 10 to 80 nm, blocking layer for holes/excitons (4) 2 to 100 nm, preferably 5 to 50 nm, electron-conducting layer (5) 5 to 100 nm, preferably 20 to 80 nm, cathode (6) 20 to 1000 nm, preferably 30 to 500 nm. The relative position of the recombination zone of holes and electrons in the inventive OLED in relation to the cathode and hence the emission spectrum of the OLED can be influenced, among other factors, by the relative thickness of each layer. This means that the thickness of the electron transport layer should preferably be selected such that the position of the recombination zone is matched to the optical resonator property of the diode and hence to the emission wavelength of the emitter. The ratio of the layer thicknesses of the individual layers in the OLED depends on the materials used. The layer thicknesses of any additional layers used are known to those skilled in the art. It is possible that the electron-conducting layer and/or the hole-conducting layer have greater thicknesses than the layer thicknesses specified when they are electrically doped.

[0084] Use of the electron transport layer of the present application makes it possible to obtain OLEDs with high efficiency and with low operating voltage. Frequently, the OLEDs obtained by the use of the electron transport layer of the present application additionally have high lifetimes. The efficiency of the OLEDs can additionally be improved by optimizing the other layers of the OLEDs. Shaped substrates and novel hole-transport materials which bring about a reduction in the operating voltage or an increase in the quantum efficiency are likewise usable in the inventive OLEDs. Moreover, additional layers may be present in the OLEDs in order to adjust the energy level of the different layers and to facilitate electroluminescence.

[0085] The OLEDs may further comprise at least one second light-emitting layer. The overall emission of the OLEDs may be composed of the emission of the at least two light-emitting layers and may also comprise white light.

[0086] The OLEDs can be used in all apparatus in which electroluminescence is useful. Suitable devices are preferably selected from stationary and mobile visual display units and illumination units. Stationary visual display units are, for example, visual display units of computers, televisions, visual display units in printers, kitchen appliances and advertising panels, illuminations and information panels. Mobile visual display units are, for example, visual display units in cellphones, laptops, digital cameras, MP3 players, vehicles and destination displays on buses and trains. Further devices in which the inventive OLEDs can be used are, for example, keyboards; items of clothing; furniture; wallpaper.

[0087] In addition, the electron transport layer of the present application can be used in OLEDs with inverse structure. The structure of inverse OLEDs and the materials typically used therein are known to those skilled in the art.

[0088] In addition, the present invention relates to an apparatus selected from the group consisting of stationary visual display units such as visual display units of computers, televisions, visual display units in printers, kitchen appliances and advertising panels, illuminations, information panels, and mobile visual display units such as visual display units in cellphones, laptops, digital cameras, MP3 players, vehicles and destination displays on buses and trains; illumination units; keyboards; items of clothing; furniture; wallpaper, comprising the inventive organic electronic device, or the inventive organic layer, especially electron transport layer.


[0089] The following examples are included for illustrative purposes only and do not limit the scope of the claims. Unless otherwise stated, all parts and percentages are by weight.

Examples

Comparative Application Example 1


[0090] The ITO substrate used as the anode is first cleaned with commercial detergents for LCD production (Deconex® 20NS, and 25ORGAN-ACID® neutralizing agent) and then in an acetone/isopropanol mixture in an ultrasound bath. To eliminate any possible organic residues, the substrate is exposed to a continuous ozone flow in an ozone oven for a further 25 minutes. This treatment also improves the hole injection properties of the ITO. Then AJ20-1000 (commercially available from Plexcore) is spin-coated and dried to form a hole injection layer (~40 nm).

[0091] Thereafter, the organic materials specified below are applied by vapor deposition to the clean substrate at a rate of approx. 0.5-5 nm/min at about 10^{-8} mbar. As a hole transport and exciton blocker, Ir(dpbc)₃ (V1) is applied to the substrate with a thickness of 45 nm, wherein the first 35 nm are doped with MoO_x (~50%) to improve the conductivity.

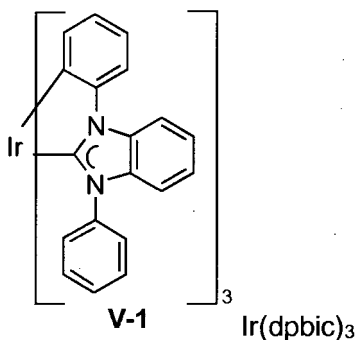


(for preparation, see Ir complex (7) in the application WO 2005/019373).

[0092] Subsequently, a mixture of 30% by weight of compound




35% by weight of compound (V1) and 35% by weight of compound

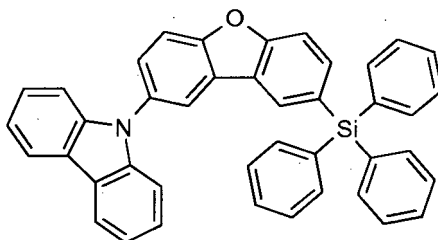


(V3, described in PCT/EP2009/067120) is applied by vapor deposition in a thickness of 20 nm.

[0093] Subsequently, the material

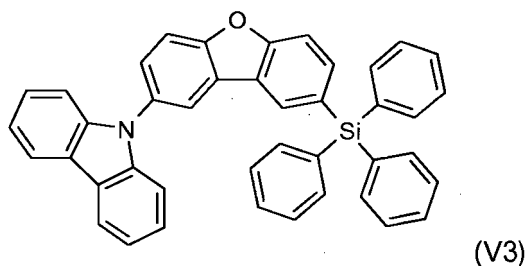


is applied by vapor deposition with a thickness of 5 nm as exciton and hole blocker.

[0094] Next, a mixture of 50 % by weight of

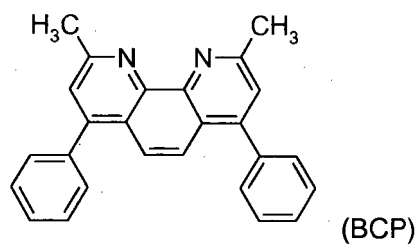


and 50 % by weight of



(8-hydroxyquinolinolato-lithium (Liq)) is applied as electron transport layer by vapor deposition in a thickness of 40 nm, as are a 2 nm-thick potassium fluoride layer (electron injection layer) and finally a 100 nm-thick Al electrode.

Comparative Application Example 2

[0095] Production and construction of an OLED as in the comparative application example 1, except compound

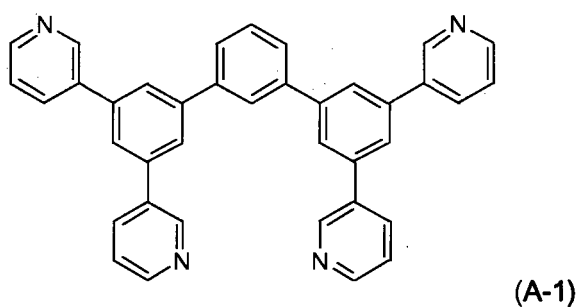

is used alone instead of the mixture of BCP and Liq.

Comparative Application Example 3

[0096] Production and construction of an OLED as in the comparative application example 1, except Liq is used alone instead of the mixture of BCP and Liq.

Application Example 1

[0097] Production and construction of an OLED as in the comparative application example 1, except a mixture of 75 % by weight of compound **A-1** and 25 % by weight of **Liq** is used instead of the mixture of **BCP** and **Liq**.

Application Example 2

[0098] Production and construction of an OLED as in the comparative application example 1, except a mixture of 50 % by weight of compound **A-1** and 50 % by weight of **Liq** is used instead of the mixture of **BCP** and **Liq**.

Application Example 3

[0099] Production and construction of an OLED as in the comparative application example 1, except a mixture of 25 % by weight of compound **A-1** and 75 % by weight of **Liq** is used instead of the mixture of **BCP** and **Liq**.

[0100] To characterize the OLED, electroluminescence spectra are recorded at various currents and voltages. In addition, the current-voltage characteristic is measured in combination with the light output emitted. The light output can be converted to photometric parameters by calibration with a photometer. To determine the lifetime, the OLED is operated at a constant current density and the decrease in the light output is recorded. The lifetime is defined as that time which lapses until the luminance decreases to half of the initial luminance.

[0101] V at 300 cd/m², lm/W at 300 cd/m², EQE (%) at 300 cd/m² and lifetime (h) at 300 cd/m² measured for the devices of the Application Examples and Comparative Application Examples are shown in the Tables 1-1 and 1-2 below, wherein the measured data of the Comparative Application Example 1 (Table 1-1) and 3 (Table 1-2), respectively are set to 100 and the data of the Application Examples are specified in relation to those of Comparative Application Example 1 and 3, respectively.

Table 1-1

Device	ET Layer	V at 300 cd/m ²	lm/W at 300 cd/m ²	EQE ⁴⁾ (%) at 300 cd/m ²	Lifetime (h) at 300 cd/m ²	Color
Appl. Ex. 2	Liq¹⁾ Cpd. A-1¹⁾	86	177	144	567	X=0.174 Y=0.310
Comp. Appl. Ex. 1	Liq¹⁾ BCP¹⁾	100	100	100	100	X=0.167 Y=0.282

Table 1-2

Device	ET Layer	V at 300 cd/m ²	lm/W at 300 cd/m ²	EQE ⁴⁾ (%) at 300 cd/m ²	Lifetime (h) at 300 cd/m ²	Color
Appl. Ex. 1	Liq²⁾ Cpd. A-1³⁾	43	297	124	206	X=0.174 Y=0.312
Appl. Ex. 2	Liq¹⁾ Cpd. A-1¹⁾	44	271	116	272	X=0.174 Y=0.310
Appl. Ex. 3	Liq³⁾ Cpd. A-1²⁾	51	230	114	392	X=0.173 Y=0.309
Comp. Appl. Ex. 2	Cpd. A-1	44	264	112	132	X=0.175 Y=0.314


(continued)

Device	ET Layer	V at 300 cd/m ²	lm/W at 300 cd/m ²	EQE ⁴⁾ (%) at 300 cd/m ²	Lifetime (h) at 300 cd/m ²	Color
Comp. Appl. Ex. 3	Liq	100	100	100	100	X=0.171 Y=0.300
1) 50% by weight. 2) 25% by weight 3) 75% by weight 4) External quantum efficiency (EQE) is # a of generated photons escaped from a substance or a device / # of electrons flowing through it. ET Layer = Electron Transport Layer. EI Layer = Electron Injection Layer.						


[0102] The life time, power efficiency, quantum efficiency and/or voltage at 300 cd/m² of the devices of the Application Examples are superior as compared with the devices of the Comparative Application Examples.

Claims

1. An organic electronic device including a first electrode, a second electrode, and an organic layer interposed between the first electrode and the second electrode, wherein the organic layer comprises an organic metal complex of formula



and
a compound of formula

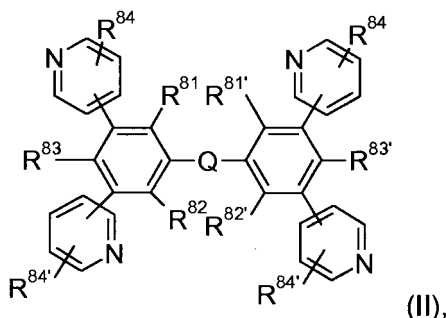

wherein

R¹ and R² are independently of each other F, C₁-C₈alkyl, or C₆-C₁₈aryl, which may optionally be substituted by one, or more C₁-C₈alkyl groups, or
 two substituents R¹ and/or R² combine to form a fused benzene ring group, which may optionally be substituted by one, or more C₁-C₈alkyl groups,
 a and b are independently of each other 0, or an integer 1 to 3,
 R⁸¹, R⁸², R⁸³, R⁸⁴, R^{81'}, R^{82'}, R^{83'}, and R^{84'} are independently of each other H, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is substituted by E and/or interrupted by D, C₆-C₂₄aryl, C₆-C₂₄aryl which is substituted by G, C₂-C₂₀heteroaryl,

or C₂-C₂₀heteroaryl which is substituted by G,

Q is an arylene or heteroarylene group, each of which may optionally be substituted by G;

D is -CO-; -COO-; -S-; -SO-; -SO₂-; -O-; -NR²⁵; -SiR³⁰R³¹-; -POR³²-; -CR²³=CR²⁴-; or -C≡C-; and

E is -OR²⁹; -SR²⁹; -NR²⁵R²⁶; -COR²⁸; -COOR²⁷; -CONR²⁵R²⁶; -CN; or F; G is E, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is interrupted by D, C₁-C₁₈perfluoroalkyl, C₁-C₁₈alkoxy, or C₁-C₁₈alkoxy which is substituted by E and/or interrupted by D, wherein

R²³ and R²⁴ are independently of each other H, C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;

R²⁵ and R²⁶ are independently of each other C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-; or

R²⁵ and R²⁶ together form a five or six membered ring, R²⁷ and R²⁸ are independently of each other C₆-C₁₈aryl; C₆-C₁₈aryl which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;

R²⁹ is C₆-C₁₈aryl; C₆-C₁₈aryl, which is substituted by C₁-C₁₈alkyl, or C₁-C₁₈alkoxy; C₁-C₁₈alkyl; or C₁-C₁₈alkyl which is interrupted by -O-;


R³⁰ and R³¹ are independently of each other C₁-C₁₈alkyl, C₆-C₁₈aryl, or C₆-C₁₈aryl, which is substituted by C₁-C₁₈alkyl,

R³² is C₁-C₁₈alkyl, C₆-C₁₈aryl, or C₆-C₁₈aryl, which is substituted by C₁-C₁₈alkyl

M is an alkali metal atom, or an earth alkaline metal atom,


n is 1, if M is an alkali metal atom, n is 2, if M is an earth alkaline metal atom.

2. The organic electronic device according to claim 1, wherein Q is a group of formula

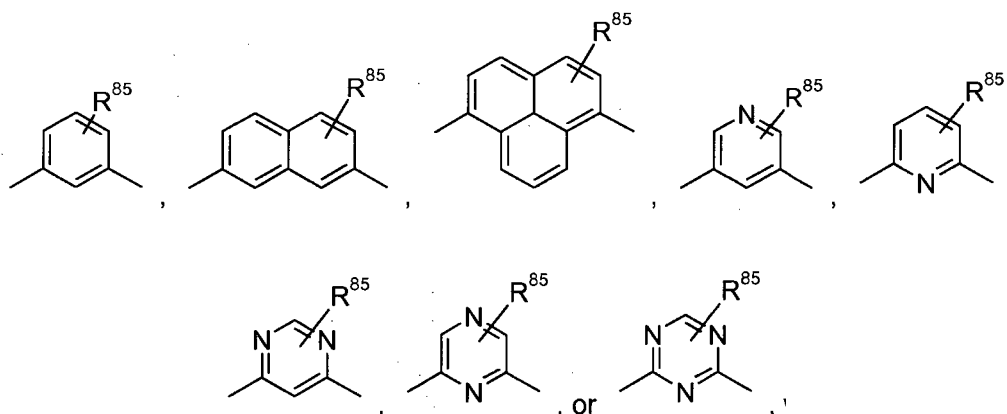


wherein R⁸⁵ is H, C₁-C₁₈alkyl, C₁-C₁₈alkyl which is substituted by E and/or interrupted by D, C₆-C₂₄aryl, C₆-C₂₄aryl which is substituted by G, C₂-C₂₀heteroaryl, or C₂-C₂₀heteroaryl which is substituted by G, and D, E and G are as defined in claim 1.


3. The organic electronic device according to claim 2, wherein the compound of formula II is a compound of formula

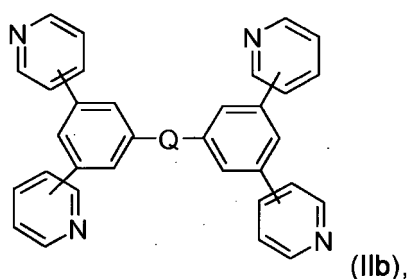




wherein Q is

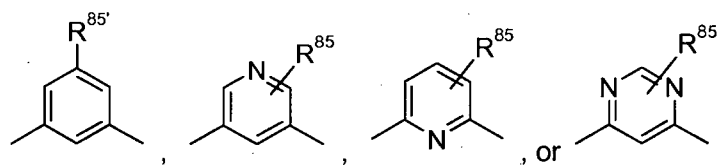


10
 R^{85} is H, or C_1 - C_{18} alkyl and
 $R^{85'}$ is H, C_1 - C_{18} alkyl, or




4. The organic electronic device according to claim 3, wherein the compound of formula IIb is a compound of formula

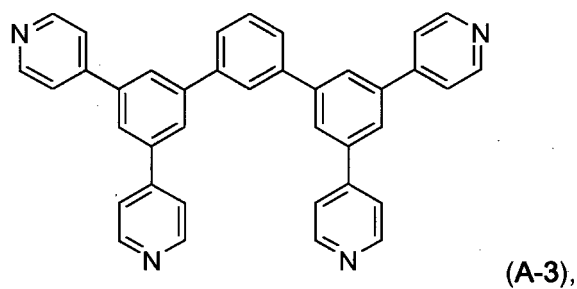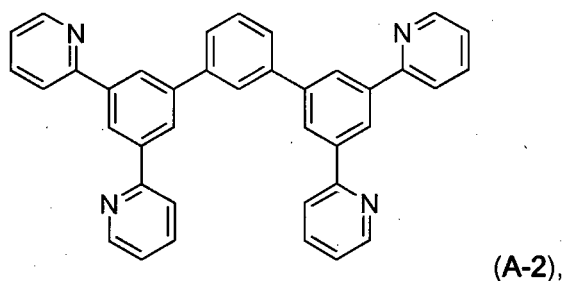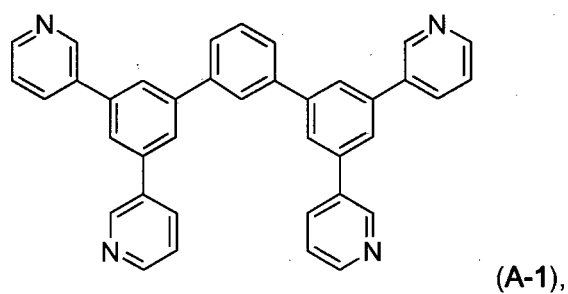


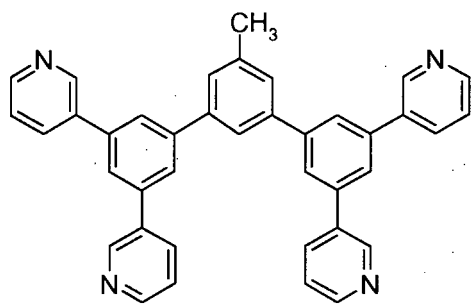


(A-4),

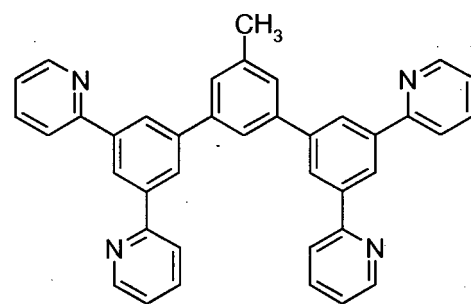


(A-5),

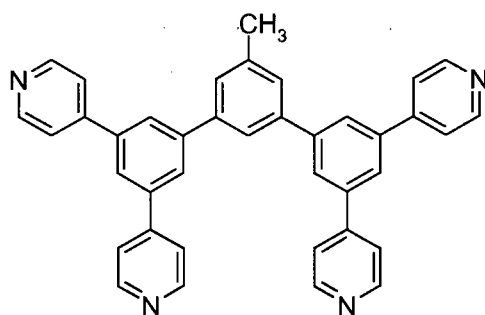


(A-6),

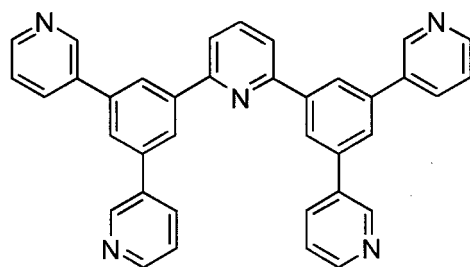


(A-7),

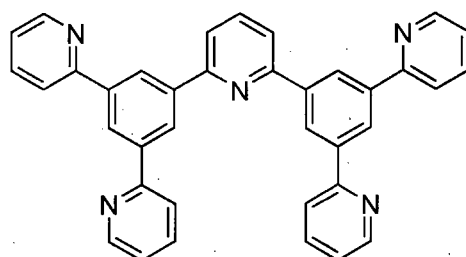


(A-8),

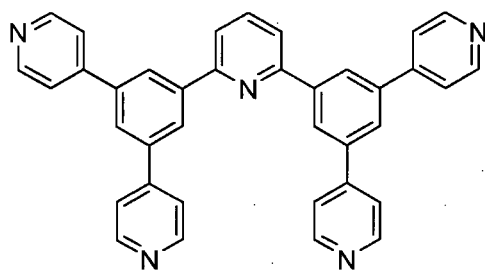


(A-9),

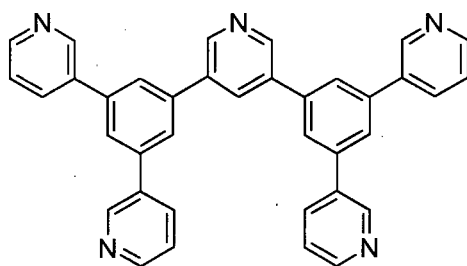


(A-10),

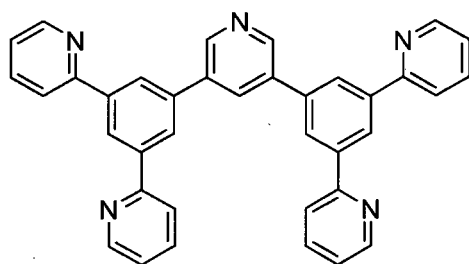


(A-11),

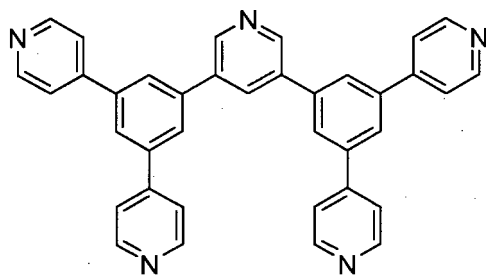


(A-12),

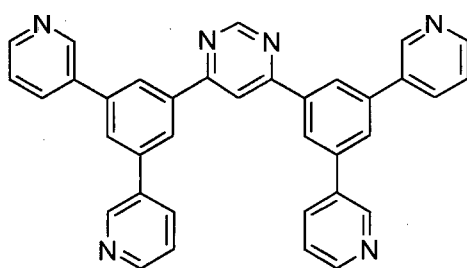


(A-13),

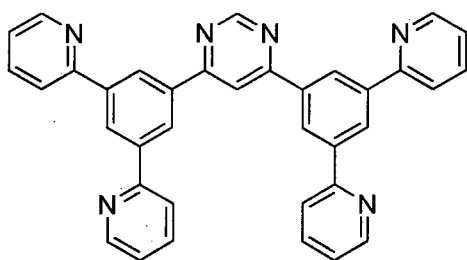


(A-14),

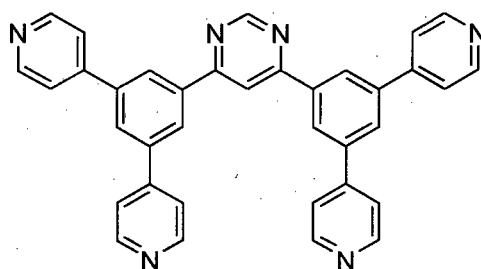


(A-15),

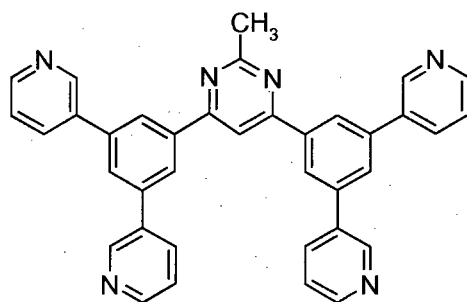


(A-16),

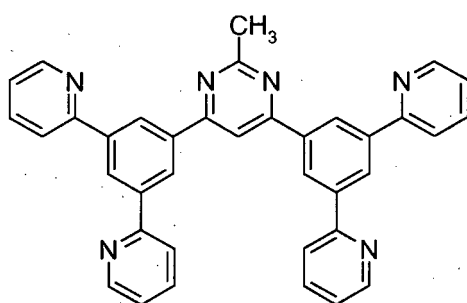


(A-17),

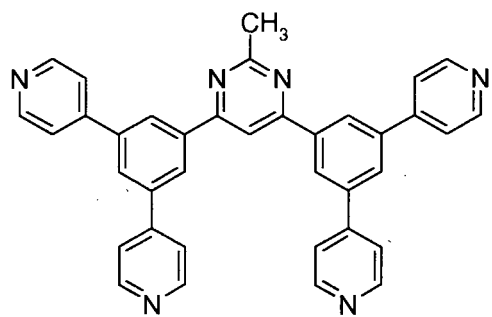


(A-18),

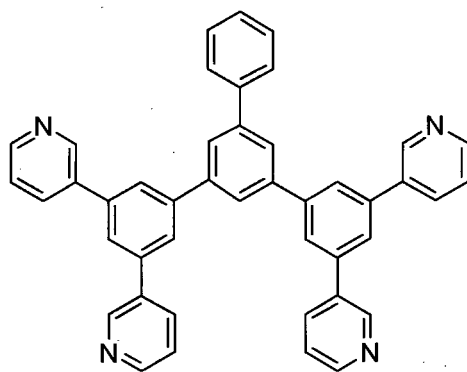


(A-19),

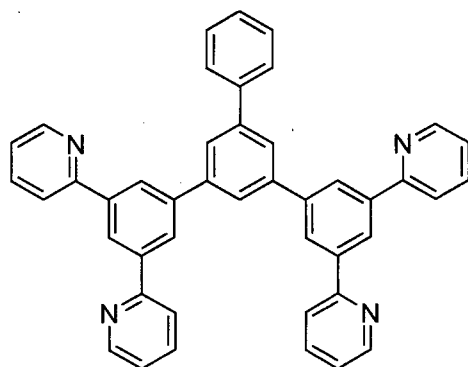


(A-20),

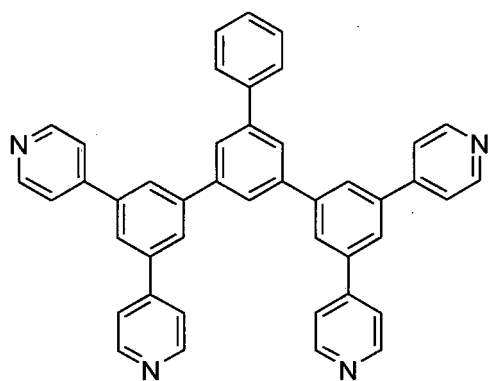


(A-21),

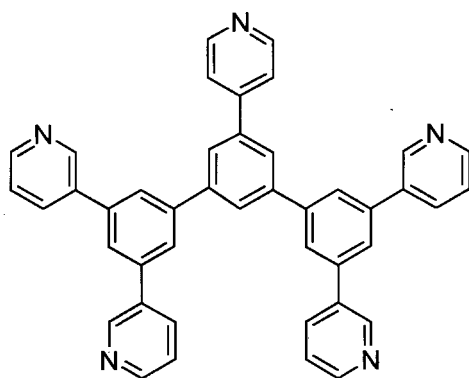


(A-22),

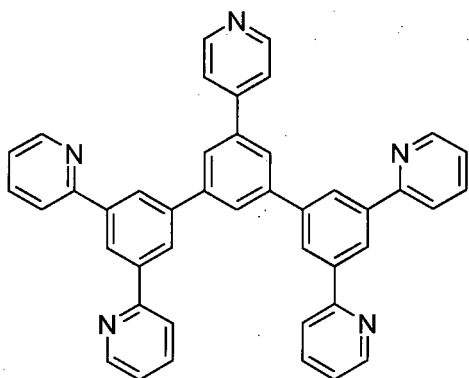


(A-23),

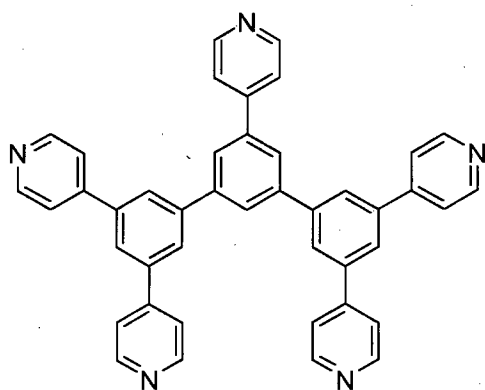

(A-24),

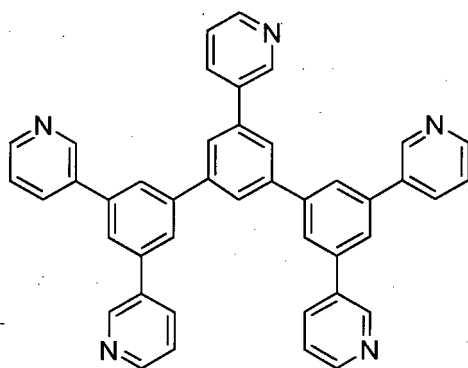


(A-25),

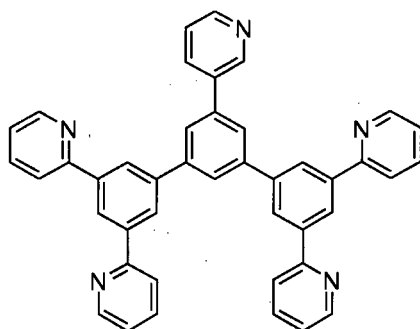


(A-26),

or

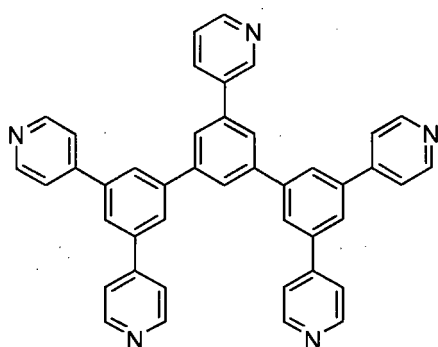


(A-27).

5. The organic electronic device according to any of claims 1 to 4, wherein M is Li, Na, or K and n is 1.
6. The organic electronic device according to claim 5, wherein the compound of formula I is a compound of formula



(Liq).


7. The organic electronic device according to any of claims 1 to 6, which is an organic light emitting device, comprising an anode, a hole injection layer, a hole transport layer, a light emitting layer, a hole and exciton blocking layer, an electron transport layer, an electron injection layer and a cathode, wherein the organic layer comprising the compounds of formula I and II constitutes the electron transport layer.
8. The organic electronic device according to claim 7, wherein the electron transport layer comprises a mixture of a compound of formula



(Liq)

and a compound of formula (A-1).

9. The organic electronic device according to claim 7, or 8, wherein the electron injection layer comprises, or consists of potassium fluoride.
10. The organic electronic device according to any of claims 7 to 9, wherein the light emitting layer comprises a compound of the formula




wherein the symbols have the following meanings:


M^1 is a metal atom selected from the group consisting of Co, Rh, Ir, Nb, Pd, Pt, Fe, Ru, Os, Cr, Mo, W, Mn, Tc, Re, Cu, Ag and Au in any oxidation state possible for the respective metal atom;
 carbene is a carbene ligand which may be uncharged or monoanionic and monodentate, bidentate or tridentate, with the carbene ligand also being able to be a biscarbene or triscarbene ligand;
 L is a monoanionic or dianionic ligand, which may be monodentate or bidentate;
 K is an uncharged monodentate or bidentate ligand selected from the group consisting of phosphines; phosphonates and derivatives thereof, arsenates and derivatives thereof; phosphites; CO; pyridines; nitriles and conjugated dienes which form a π complex with M^1 ;
 $n1$ is the number of carbene ligands, where $n1$ is at least 1 and when $n1 > 1$ the carbene ligands in the complex of the formula I can be identical or different;
 m is the number of ligands L, where m can be 0 or ≥ 1 and when $m > 1$ the ligands L can be identical or different;
 o is the number of ligands K, where o can be 0 or ≥ 1 and when $o > 1$ the ligands K can be identical or different;

where the sum $n1 + m + o$ is dependent on the oxidation state and coordination number of the metal atom and on the denticity of the ligands carbene, L and K and also on the charge on the ligands, carbene and L, with the proviso that $n1$ is at least 1.

11. The organic electronic device according to claim 10, wherein the compound of the formula IX is a compound of the formula



12. The organic electronic device according to any of claims 7 to 11, wherein the hole transport layer comprises a compound of formula




doped with molybdenum oxide (MoO_x), especially MoO_3 , or rhenium oxide (ReO_x), especially ReO_3 .

13. An organic layer, especially an electron transport layer, comprising an organic metal complex of formula I as defined in claim 1 and a compound of formula II as defined in claim 1.
14. Use of the organic layer according to claim 13 in an organic electronic device.
15. An apparatus comprising an organic electronic device according to any of claims 1 to 12, or the organic layer according to claim 13.


Patentansprüche

1. Organische elektronische Vorrichtung mit einer ersten Elektrode, einer zweiten Elektrode und einer zwischen der ersten Elektrode und der zweiten Elektrode angeordneten organischen Schicht, wobei die organische Schicht einen organischen Metallkomplex der Formel



(I)

und eine Verbindung der Formel

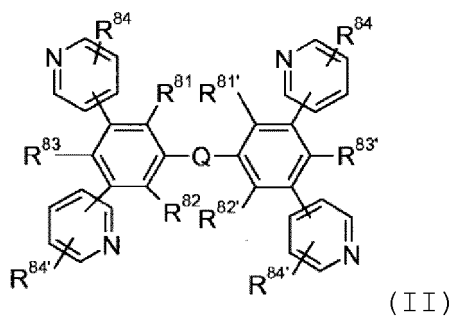

(II)

umfasst, wobei

R¹ und R² unabhängig voneinander für F, C₁-C₈-Alkyl oder C₆-C₁₈-Aryl, das gegebenenfalls durch eine oder mehrere C₁-C₈-Alkylgruppen substituiert sein kann, stehen, oder zwei Substituenten R¹ und/oder R² zusammen eine anellierte Benzolringgruppe, die gegebenenfalls durch eine oder mehrere C₁-C₈-Alkylgruppen substituiert sein kann, bilden,

a und b unabhängig voneinander für 0 oder eine ganze Zahl von 1 bis 3 stehen,

R⁸¹, R⁸², R⁸³, R⁸⁴, R^{81'}, R^{82'}, R^{83'} und R^{84'} unabhängig voneinander für H, C₁-C₁₈-Alkyl, C₁-C₁₈-Alkyl, das durch E substituiert und/oder durch D unterbrochen ist, C₆-C₂₄-Aryl, C₆-C₂₄-Aryl, das durch G substituiert ist, C₇-C₂₀-Heteroaryl oder C₇-C₂₀-Heteroaryl, das durch G substituiert ist, stehen,

Q für eine Arylen- oder Heteroarylengruppe steht, wobei jede dieser Gruppen gegebenenfalls durch G substituiert sein kann:

D für -CO-; -COO-; -S-; -SO-; -SO₂-; -O-; -NR²⁵-; -SiR³⁰R³¹-; -POR³²-; -CR²³=CR²⁴- oder -C=C- steht und E für -OR²⁹-; -SR²⁹-; -NR²⁵R²⁶-; -COR²⁸-; -COOR²⁷-; -CONR²⁵R²⁶-; -CN oder F steht; G für E, C₁-C₁₈-Alkyl, C₁-C₁₈-Alkyl, das durch D unterbrochen ist, C₁-C₁₈-Perfluoralkyl, C₁-C₁₈-Alkoxy oder C₁-C₁₈-Alkoxy, das durch E substituiert und/oder durch D unterbrochen ist, steht, wobei

R²³ und R²⁴ unabhängig voneinander für H, C₆-C₁₈-Aryl; C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkoxy substituiert ist; C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkyl, das durch -O- unterbrochen ist; stehen;

R²⁵ und R²⁶ unabhängig voneinander für C₆-C₁₈-Aryl; C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkoxy substituiert ist; C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkyl, das durch -O- unterbrochen ist; stehen; oder

R²⁵ und R²⁶ zusammen einen fünf- oder sechsgliedrigen Ring bilden, R²⁷ und R²⁸ unabhängig voneinander für C₆-C₁₈-Aryl; C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkoxy substituiert ist; C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkyl, das durch -O- unterbrochen ist; stehen,

R²⁹ für C₆-C₁₈-Aryl; C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkoxy substituiert ist; C₁-C₁₈-Alkyl oder C₁-C₁₈-Alkyl, das durch -O- unterbrochen ist; steht,


R³⁰ und R³¹ unabhängig voneinander für C₁-C₁₈-Alkyl, C₆-C₁₈-Aryl oder C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl substituiert ist, stehen.

R³² für C₁-C₁₈-Alkyl, C₆-C₁₈-Aryl oder C₆-C₁₈-Aryl, das durch C₁-C₁₈-Alkyl substituiert ist, steht,

M für ein Alkalimetallatom oder ein Erdalkalimetallatom steht.


n für 1 steht, wenn M für ein Alkalimetallatom steht, n für 2 steht, wenn M für ein Erdalkalimetallatom steht.

2. Organische elektronische Vorrichtung nach Anspruch 1, wobei Q für eine Gruppe der Formel

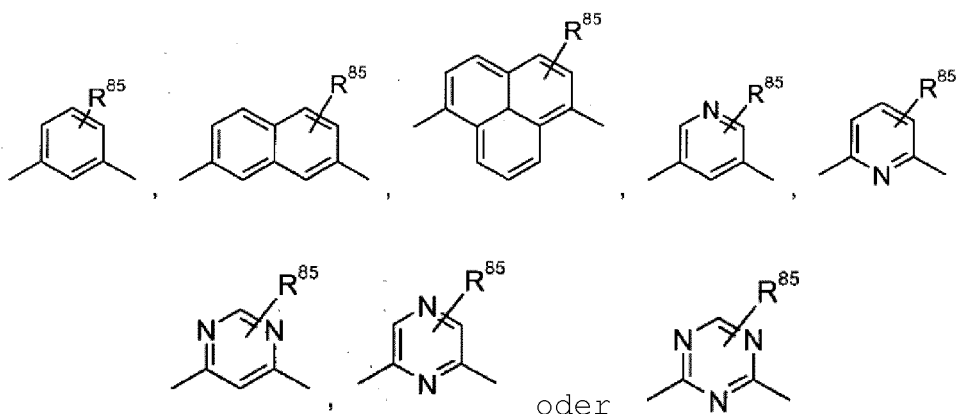


steht, wobei R⁸⁵ für H, C₁-C₁₈-Alkyl, C₁-C₁₈-Alkyl, das durch E substituiert und/oder durch D unterbrochen ist, C₆-C₂₄-Aryl; C₆-C₂₄-Aryl, das durch G substituiert ist; C₂-C₂₀-Heteroaryl oder C₂-C₂₀-Heteroaryl, das durch G substituiert ist, steht und G und D, E und G wie in Anspruch 1 definiert sind.


3. Organische elektronische Vorrichtung nach Anspruch 2, wobei es sich bei der Verbindung der Formel II um eine Verbindung der Formel

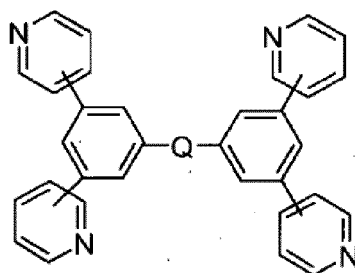


(IIb) handelt, wobei Q für

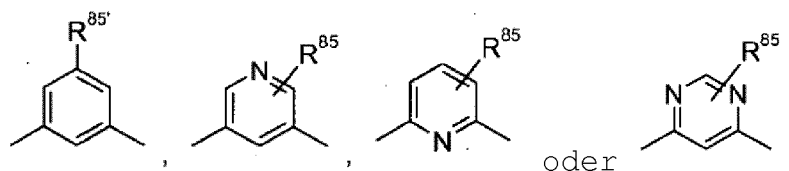

steht,
 R^{85} für H oder C_1-C_{18} -Alkyl steht und
 $R^{85'}$ für H, C_1-C_{18} -Alkyl oder




oder




steht.


4. Organische elektronische Vorrichtung nach Anspruch 3, wobei es sich bei der Verbindung der Formel IIb um eine Verbindung der Formel

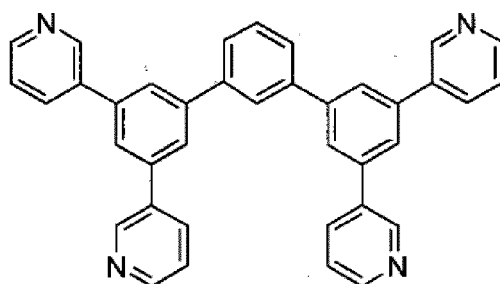


(A-1),

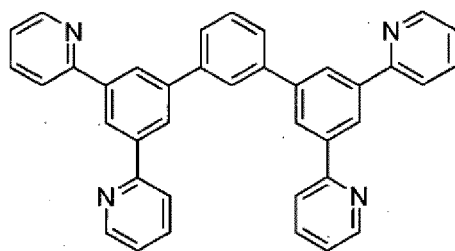


(A-2),

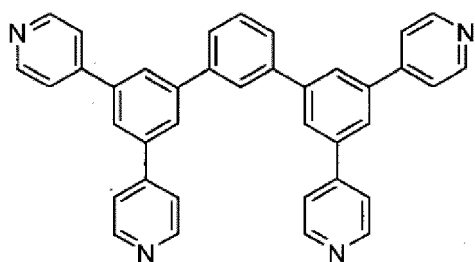


(A-3),

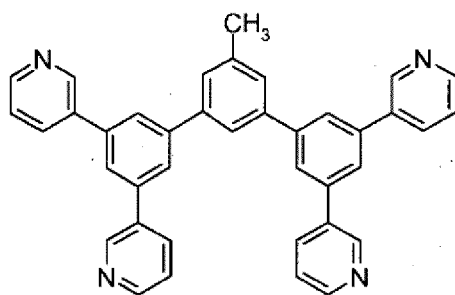


(A-4),

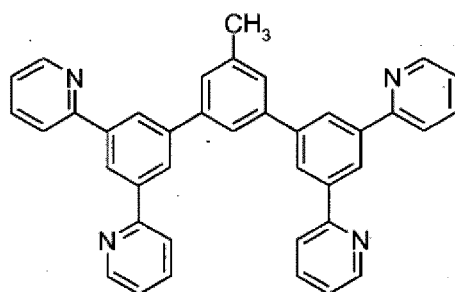


(A-5),

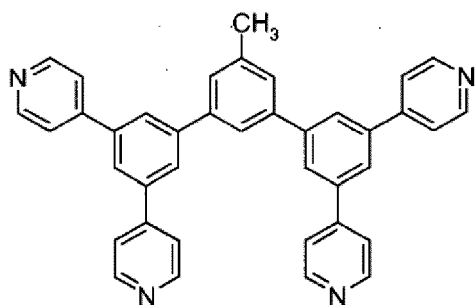


(A-6).

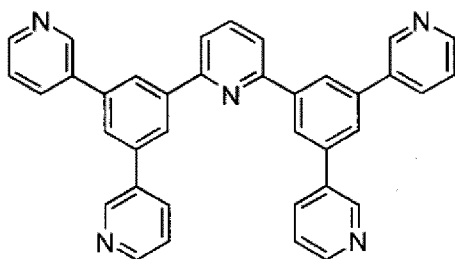


(A-7),

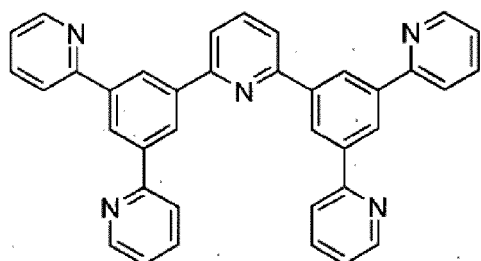


(A-8),

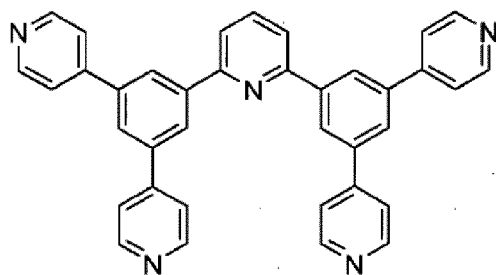


(A-9),

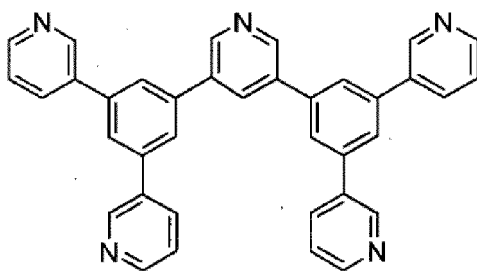


(A-10),

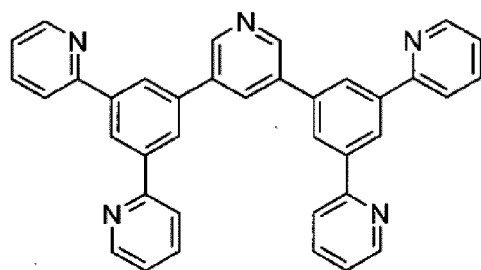


(A-11),

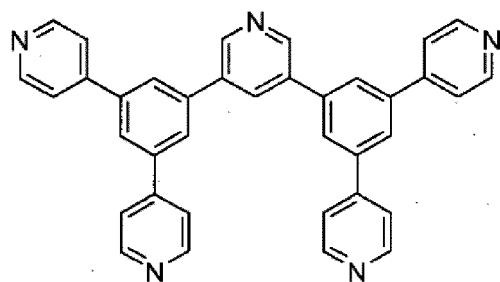


(A-12),

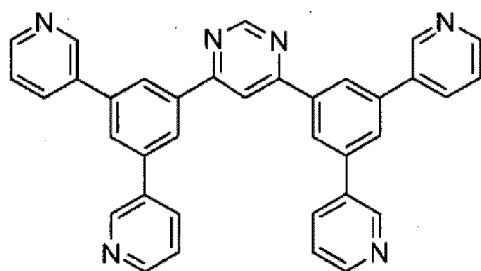


(A-13),

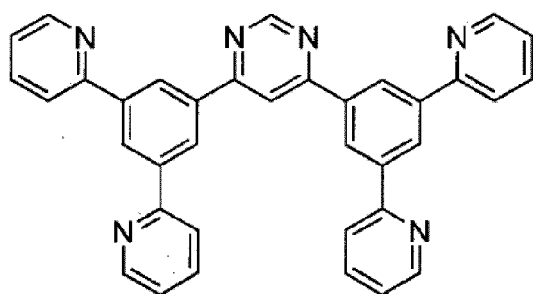


(A-14),

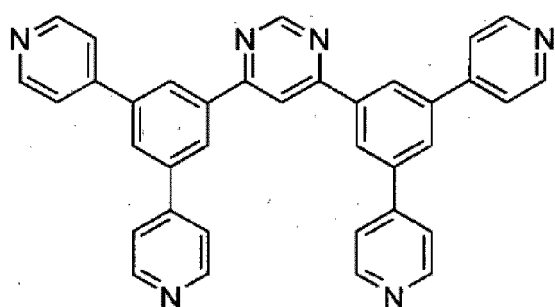


(A-15),

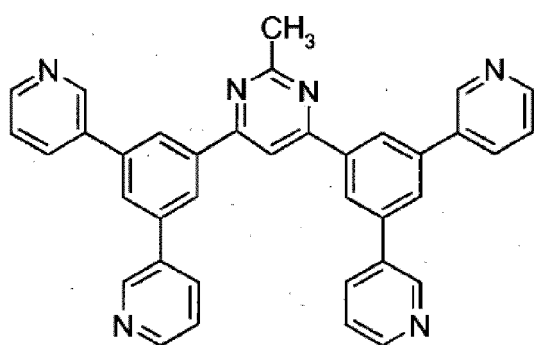


(A-16),

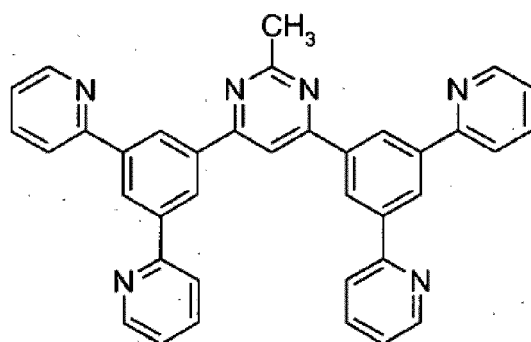


(A-17),

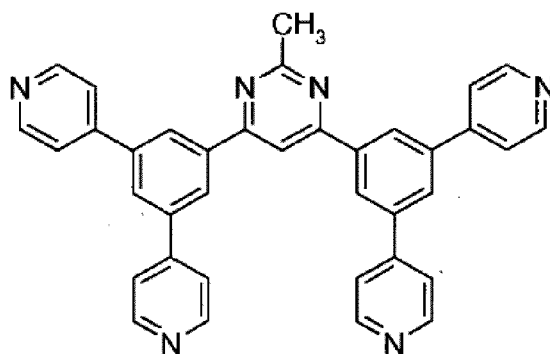


(A-18),

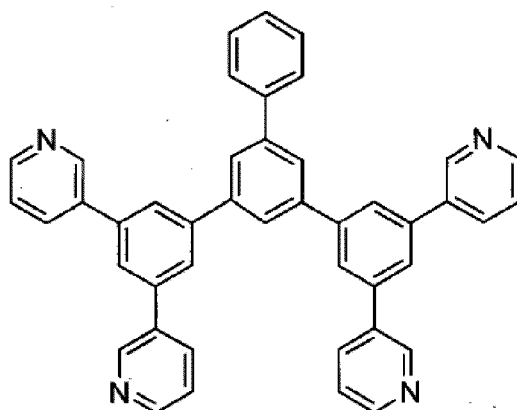


(A-19),

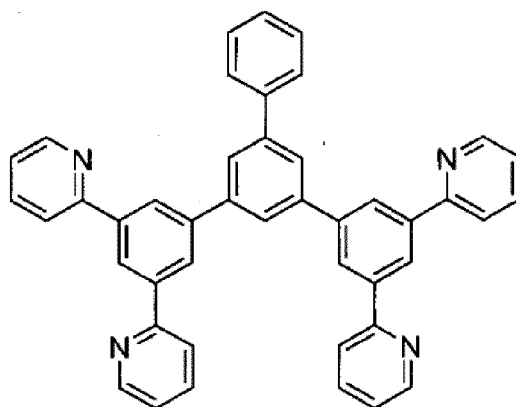


(A-20),

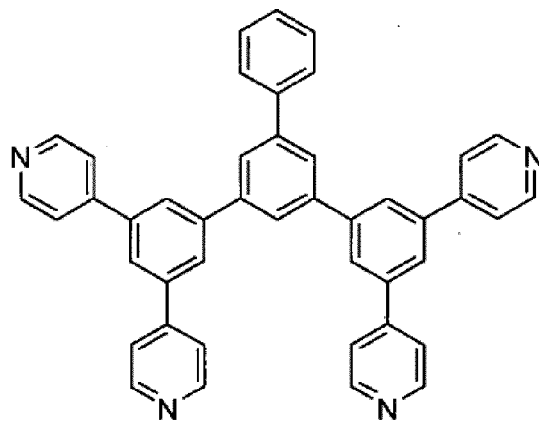


(A-21).

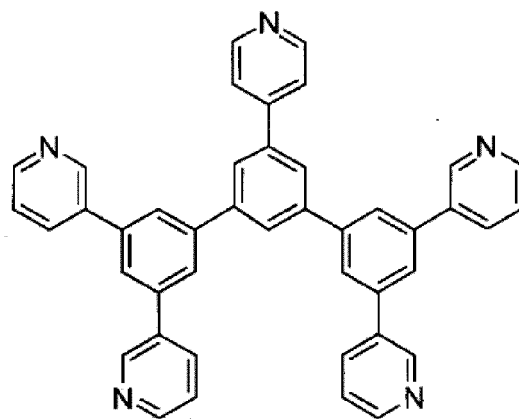


(A-22).

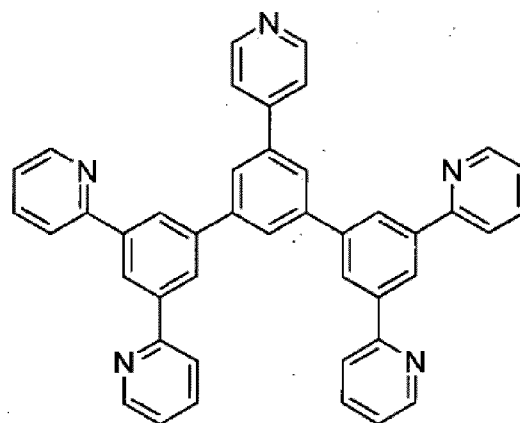


(A-23).

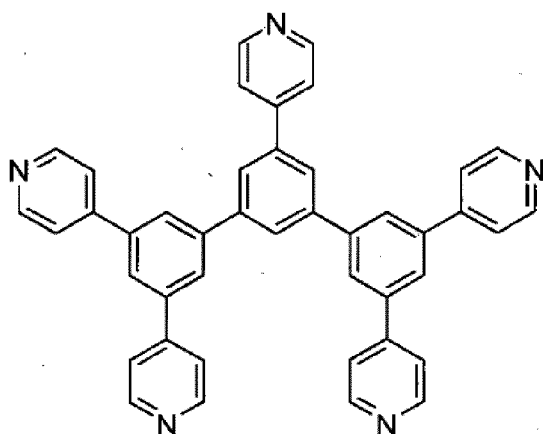

(A-24),

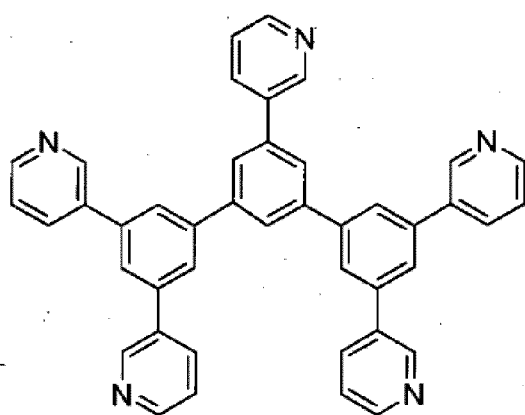


(A-25),

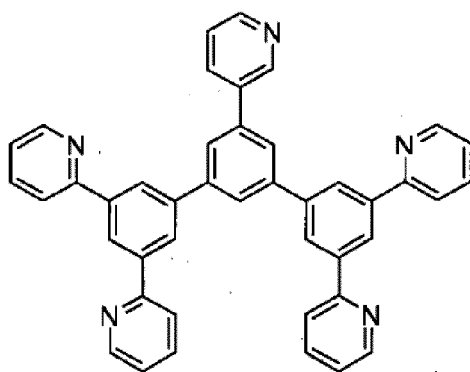

(A-26),


oder

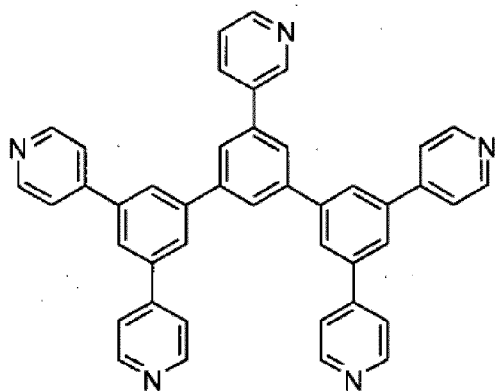

(A-27)

handelt.


5. Organische elektronische Vorrichtung nach einem der Ansprüche 1 bis 4, wobei M für Li, Na oder K steht und n für 1 steht.
6. Organische elektronische Vorrichtung nach Anspruch 5, wobei es sich bei der Verbindung der Formel I um eine Verbindung der Formel



(Liq)

handelt.

7. Organische elektronische Vorrichtung nach einem der Ansprüche 1 bis 6, bei der es sich um eine organische lichtemittierende Vorrichtung mit einer Anode, einer Lochinjektionsschicht, einer Lochtransportschicht, einer lichtemittierenden Schicht, einer Loch- und Excitonblockierungsschicht, einer Elektronentransportschicht, einer Elektroneninjectionsschicht und einer Kathode handelt, wobei die organische Schicht, die die Verbindungen der Formel I und II umfasst, die Elektronentransportschicht darstellt.
8. Organische elektronische Vorrichtung nach Anspruch 7, wobei die Elektronentransportschicht eine Mischung einer Verbindung der Formel



(Liq)

und einer Verbindung der Formel (A-1) umfasst.

9. Organische elektronische Vorrichtung nach Anspruch 7 oder 8, wobei die Elektronentransportschicht Kaliumfluorid umfasst oder aus Kaliumfluorid besteht.

10. Organische elektronische Vorrichtung nach einem der Ansprüche 7 bis 9, wobei die lichtemittierende Schicht eine Verbindung der Formel




(IX)

umfasst,
wobei die Symbole die folgenden Bedeutungen aufweisen:

M^1 Metallatom, ausgewählt aus der Gruppe bestehend aus Co, Rh, Ir, Nb, Pd, Pt, Fe, Ru, Os, Cr, Mo, W, Mn, Tc, Re, Cu, Ag und Au in jeder für das entsprechende Metallatom möglichen Oxidationsstufe;
Carben Carbenligand, der neutral oder monoanionisch und mono-, bi- oder tridentat sein kann; wobei es sich bei dem Carbenliganden auch um einen Bis- oder Triscarbenliganden handeln kann;
L mono- oder dianionischer Ligand, der mono- oder bidentat sein kann;
K neutraler mono- oder bidentater Ligand aus der Gruppe bestehend aus Phosphinen; Phosphonaten und Derivaten davon, Arsenaten und Derivaten davon; Phosphiten; CO; Pyridinen; Nitrilen und konjugierten Dienen, die einen π -Komplex mit M^1 bilden;
 $n1$ Zahl der Carbenliganden, wobei $n1$ mindestens 1 ist und die Carbenliganden in dem Komplex der Formel I bei $n1 > 1$ gleich oder verschieden sein können;
 m Zahl der Liganden L, wobei m 0 oder ≥ 1 sein kann und die Liganden L bei $m > 1$ gleich oder verschieden sein können;
 o Zahl der Liganden K, wobei o 0 oder ≥ 1 sein kann und die Liganden K bei $o > 1$ gleich oder verschieden sein können;


wobei die Summe $n1 + m + o$ von der Oxidationsstufe und Koordinationszahl des Metallatoms und von der Zähigkeit der Liganden Carben, L und K sowie von der Ladung der Liganden Carben und L abhängig ist, mit der Maßgabe, dass $n1$ mindestens 1 ist.

11. Organische elektronische Vorrichtung nach Anspruch 10, wobei es sich bei der Verbindung der Formel IX um eine Verbindung der Formel



handelt.

12. Organische elektronische Vorrichtung nach einem der Ansprüche 7 bis 11, wobei die Lochtransportschicht eine Verbindung der Formel



die mit Molybdänoxid (MoO_x), insbesondere MoO_3 , oder Rheniumoxid (ReO_x), insbesondere ReO_3 , dotiert ist, umfasst.


13. Organische Schicht, insbesondere Elektronentransportschicht, umfassend einen organischen Metallkomplex der Formel I gemäß Anspruch 1 und eine Verbindung der Formel II gemäß Anspruch 1.

14. Verwendung der organischen Schicht nach Anspruch 13 in einer organischen elektronischen Vorrichtung.


15. Apparatur, umfassend eine organische elektronische Vorrichtung nach einem der Ansprüche 1 bis 12 oder die organische Schicht nach Anspruch 13.

Revendications

1. Dispositif électronique organique comportant une première électrode, une deuxième électrode, et une couche organique intercalée entre la première électrode et la deuxième électrode, la couche organique comprenant un complexe organométallique de formule



et
un composé de formule

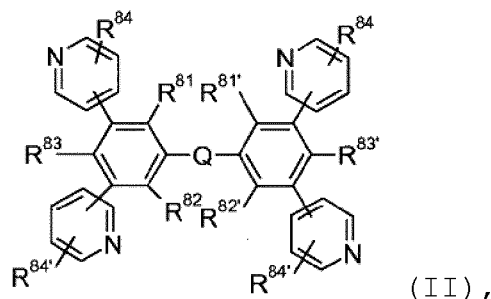

dans lesquels

R^1 et R^2 représentent indépendamment l'un de l'autre F, un alkyle en C_1 - C_8 , ou un aryle en C_6 - C_{18} qui peut éventuellement être substitué par un ou plusieurs groupes alkyle en C_1 - C_8 , ou deux substituants R^1 et/ou R^2 se combinent pour former un groupe cyclique benzénique condensé, qui peut

éventuellement être substitué par un ou plusieurs groupes alkyle en C₁-C₈ ;

a et b représentent indépendamment l'un de l'autre 0, ou un entier de 1 à 3 ;

R⁸¹, R⁸², R⁸³, R⁸⁴, R^{81'}, R^{82'}, R^{83'} et R^{84'} représentent indépendamment les uns des autres H, un alkyle en C₁-C₁₈, un alkyle en C₁-C₁₈ qui est substitué par E et/ou interrompu par D, un aryle en C₆-C₂₄, un aryle en C₆-C₂₄ qui est substitué par G, un hétéroaryle en C₂-C₂₀, ou un hétéroaryle en C₂-C₂₀ qui est substitué par G ;

Q est un groupe arylène ou hétéroarylène, chacun d'eux pouvant éventuellement être substitué par G ;

D représente -CO-, -COO-, -S-, -SO-, -SO₂-, -O-, -NR²⁵-, -SiR³⁰R³¹-, -POR³²-, -CR²³=R²⁴-, ou -C≡C- ;

E représente -OR²⁹-, -SR²⁹-, -NR²⁵R²⁶-, -COR²⁸-, -COOR²⁷-, -CONR²⁵R²⁶-, -CN, ou F ;

G représente E, un alkyle en C₁-C₁₈, un alkyle en C₁-C₁₈ qui est interrompu par D, un perfluoroalkyle en C₁-C₁₈, un alcoxy en C₁-C₁₈, ou un alcoxy en C₁-C₁₈ qui est substitué par E et/ou interrompu par D, dans lequel R²³ et R²⁴ représentent indépendamment l'un de l'autre H, un aryle en C₆-C₁₈, un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ou alcoxy en C₁-C₁₈, un alkyle en C₁-C₁₈, ou un alkyle en C₁-C₁₈ qui est interrompu par -O- ;

R²⁵ et R²⁶ représentent indépendamment l'un de l'autre un aryle en C₆-C₁₈, un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ou alcoxy en C₁-C₁₈, un alkyle en C₁-C₁₈, ou un alkyle en C₁-C₁₈ qui est interrompu par -O-, ou

R²⁵ et R²⁶ forment ensemble un cycle à cinq ou six chaînons ;

R²⁷ et R²⁸ représentent indépendamment l'un de l'autre un aryle en C₆-C₁₈, un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ou alcoxy en C₁-C₁₈, un alkyle en C₁-C₁₈, ou un alkyle en C₁-C₁₈ qui est interrompu par -O- ;

R²⁹ représente un aryle en C₆-C₁₈, un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ou alcoxy en C₁-C₁₈, un alkyle en C₁-C₁₈, ou un alkyle en C₁-C₁₈ qui est interrompu par -O- ;


R³⁰ et R³¹ représentent indépendamment l'un de l'autre un alkyle en C₁-C₁₈, un aryle en C₆-C₁₈, ou un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ;

R³² représente un alkyle en C₁-C₁₈, un aryle en C₆-C₁₈, ou un aryle en C₆-C₁₈ qui est substitué par un groupe alkyle en C₁-C₁₈ ;

M est un atome de métal alcalin, ou un atome de métal alcalino-terreux ; et


n vaut 1 si M est un atome de métal alcalin, n vaut 2 si M est un atome de métal alcalino-terreux.

2. Dispositif électronique organique selon la revendication 1, dans lequel Q est un groupe de formule

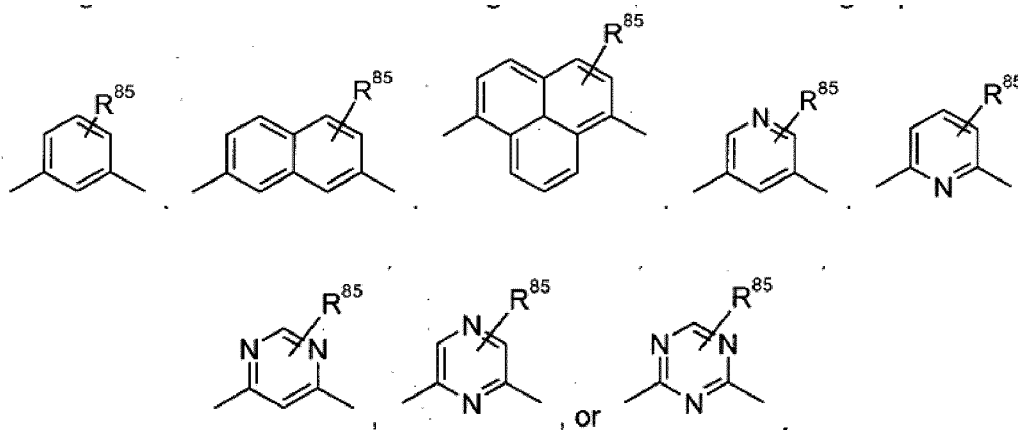


dans lesquelles R⁸⁵ représente H, un alkyle en C₁-C₁₈, un alkyle en C₁-C₁₈ qui est substitué par E et/ou interrompu par D, un aryle en C₆-C₂₄, un aryle en C₆-C₂₄ qui est substitué par G, un hétéroaryle en C₂-C₂₀, ou un hétéroaryle en C₂-C₂₀ qui est substitué par G, et D, E et G sont tels que définis dans la revendication 1.


3. Dispositif électronique organique selon la revendication 2, dans lequel le composé de formule II est un composé de formule

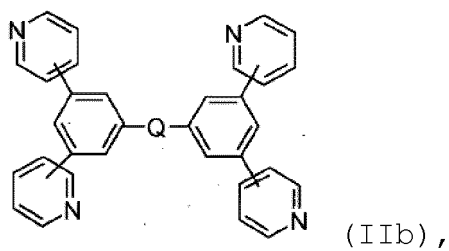


dans laquelle
Q est

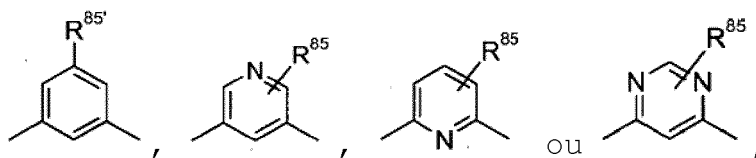


R⁸⁵ représente H ou un alkyle en C₁-C₁₈, et
R^{85'} représente H, un alkyle en C₁-C₁₈, ou




ou




4. Dispositif électronique organique selon la revendication 3, dans lequel le composé de formule IIb est un composé de formule

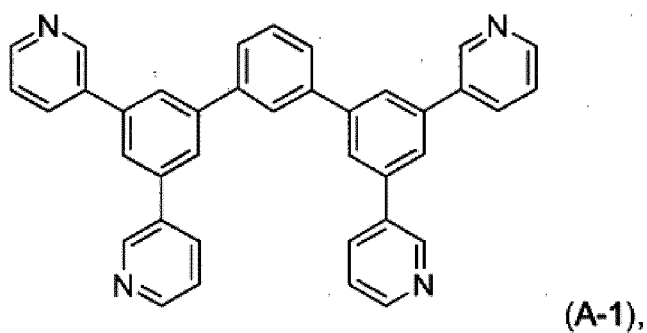


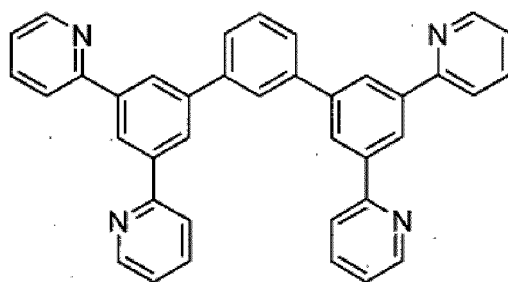


(A-2),

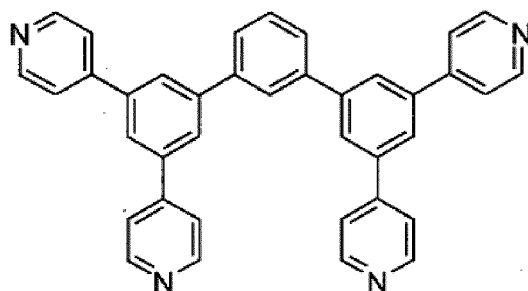






(A-3).

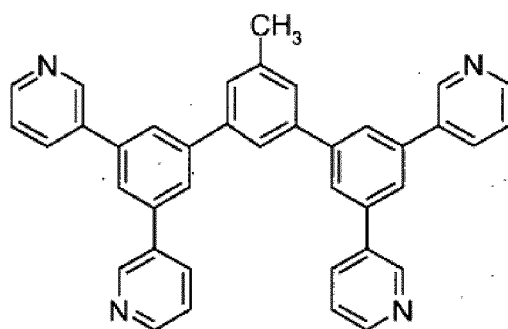


(A-4),

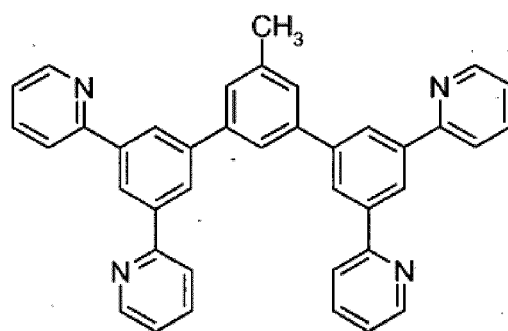


(A-5),

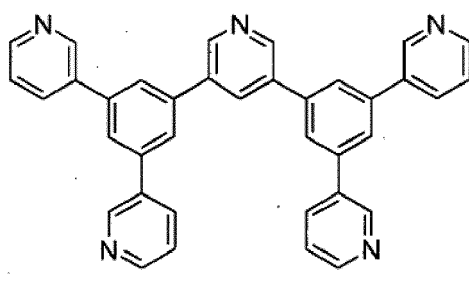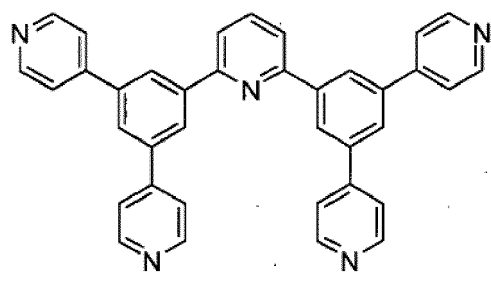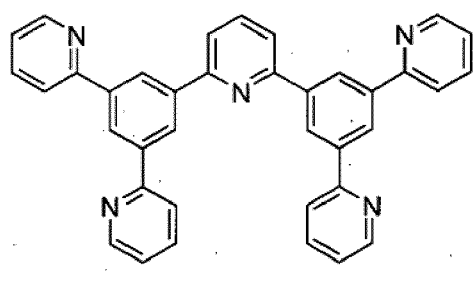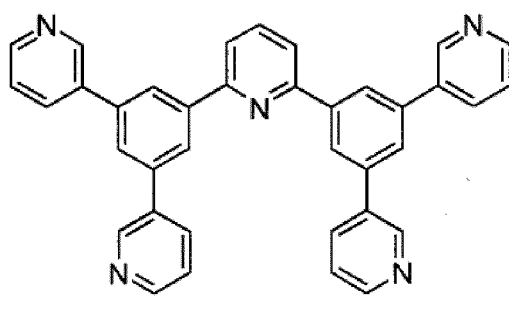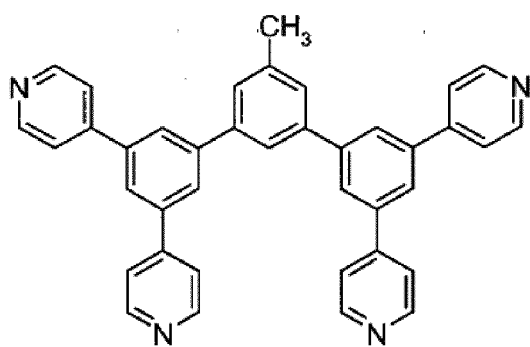


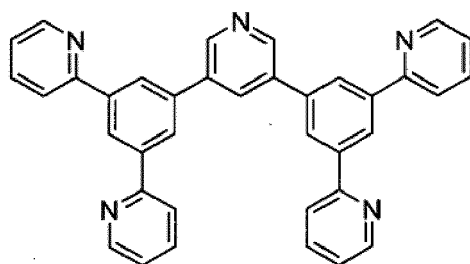


(A-11),

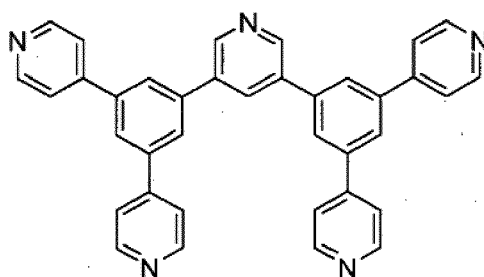


(A-12),

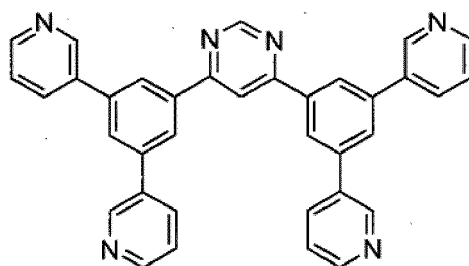


(A-13),

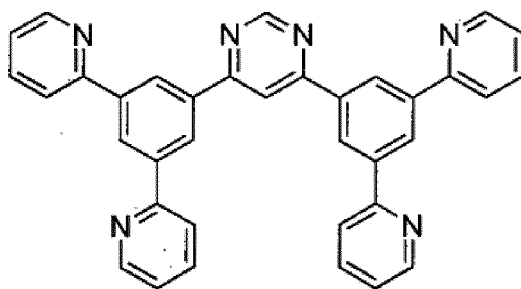


(A-14),

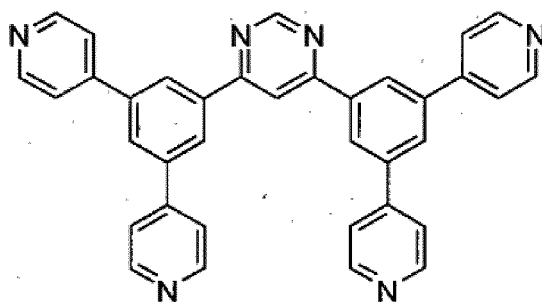


(A-15),

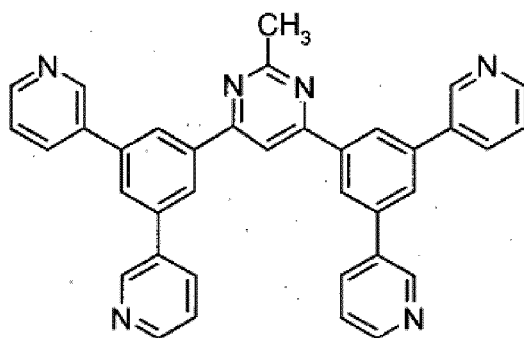


(A-16),

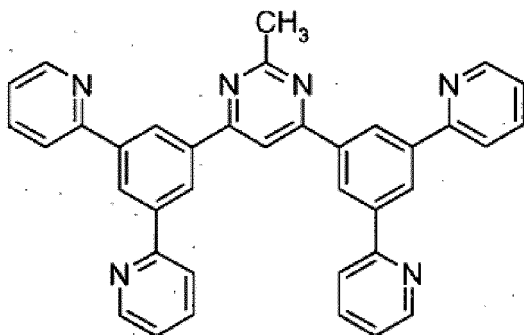


(A-17),

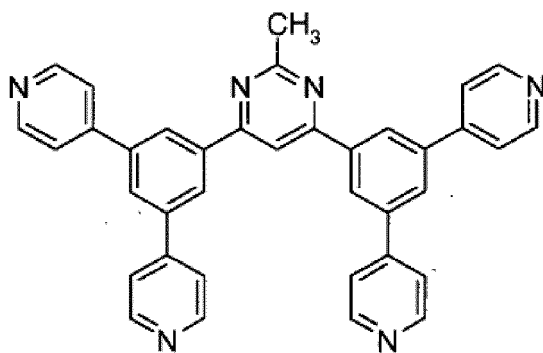


(A-18),

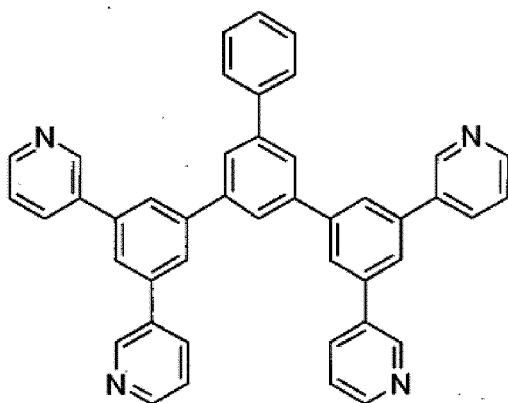


(A-19),

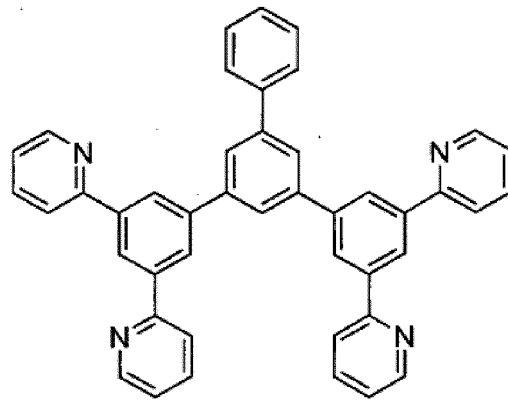


(A-20),

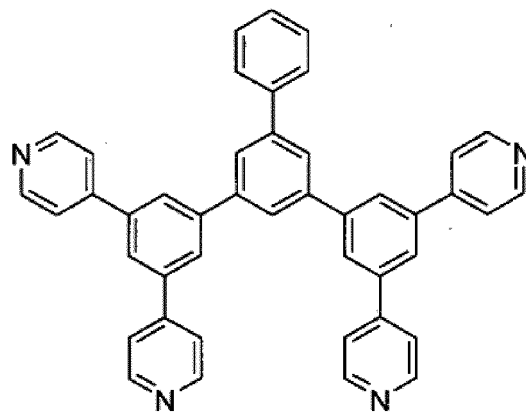


(A-21),

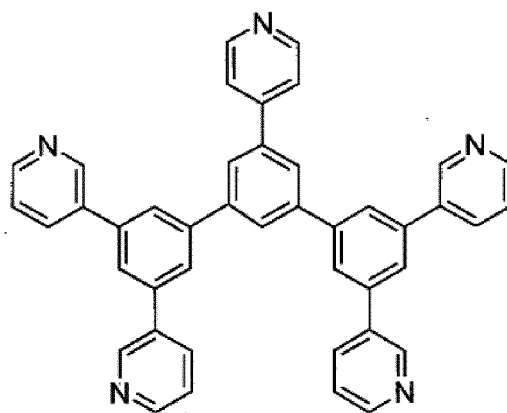


(A-22),

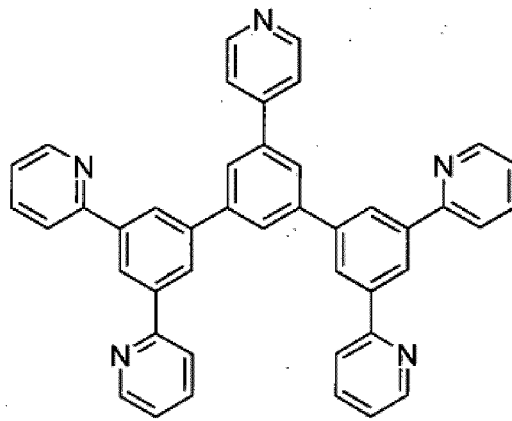


(A-23).

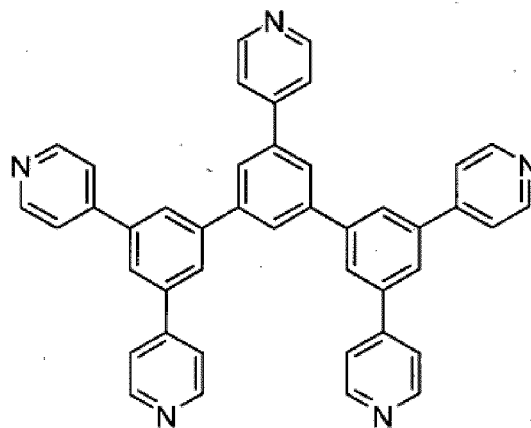

(A-24).

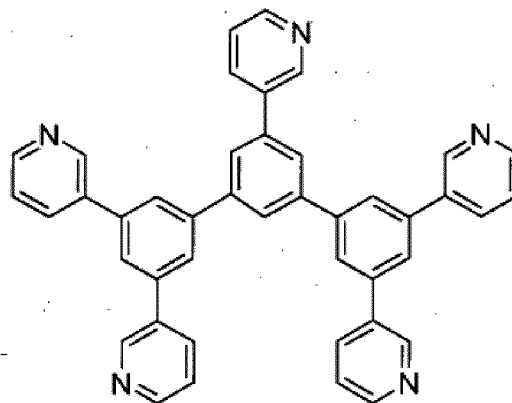


(A-25).

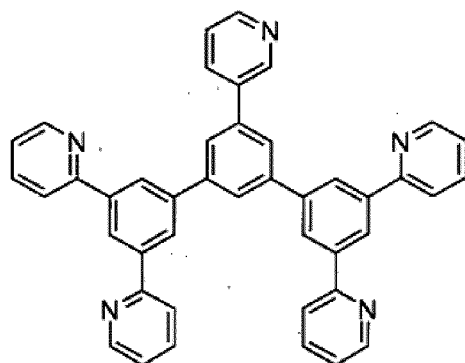


(A-26),

or

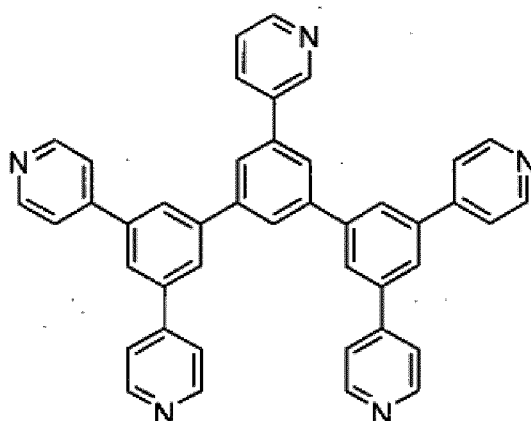


(A-27).

5. Dispositif électronique organique selon l'une quelconque des revendications 1 à 4, dans lequel M est Li, Na ou K, et n vaut 1.
6. Dispositif électronique organique selon la revendication 5, dans lequel le composé de formule I est un composé de formule




(Liq).

7. Dispositif électronique organique selon l'une quelconque des revendications 1 à 6, qui est un dispositif organique émetteur de lumière, comprenant une anode, une couche d'injection de trous, une couche de transport de trous, une couche émettrice de lumière, une couche de blocage de trous et d'excitons, une couche de transport d'électrons, une couche d'injection d'électrons et une cathode, la couche organique comprenant les composés de formule I et II constituant la couche de transport d'électrons.
8. Dispositif électronique organique selon la revendication 7, dans lequel la couche de transport d'électrons comprend un mélange d'un composé de formule



et d'un composé de formule (A-1).

9. Dispositif électronique organique selon la revendication 7 ou 8, dans lequel la couche d'injection d'électrons comprend ou consiste en du fluorure de potassium.
10. Dispositif électronique organique selon l'une quelconque des revendications 7 à 9, dans lequel la couche émettrice de lumière comprend un composé de formule



dans laquelle les symboles ont les significations suivantes :

M^1 est un atome métallique choisi dans le groupe constitué par Co, Rh, Ir, Nb, Pd, Pt, Fe, Ru, Os, Cr, Mo, W, Mn, Tc, Re, Cu, Ag et Au dans tout état d'oxydation possible pour l'atome métallique respectif ;

carbène est un ligand carbénique qui peut être non chargé ou monoanionique et monodenté, bidenté ou tridenté, le ligand carbénique étant également susceptible d'être un ligand biscarbénique ou triscarbénique ;

L est un ligand monoanionique ou dianionique, qui peut être monodenté ou bidenté ;

K est un ligand monodenté ou bidenté non chargé choisi dans le groupe constitué par les phosphines, les phosphonates et leurs dérivés, les arsénates et leurs dérivés, les phosphites, CO, les pyridines, les nitriles et les diènes conjugués qui forment un complexe π avec M^1 ;


$n1$ est le nombre de ligands carbéniques, $n1$ valant au moins 1, et quand $n1 > 1$, les ligands carbéniques dans le complexe de formule I peuvent être identiques ou différents ;

m est le nombre de ligands L, m pouvant valoir 0 ou être ≥ 1 , et quand $m > 1$, les ligands L peuvent être identiques ou différents ;


o est le nombre de ligands K, o pouvant valoir 0 ou être ≥ 1 , et quand $o > 1$, les ligands K peuvent être identiques ou différents ;

la somme $n1+m+o$ dépendant de l'état d'oxydation et du nombre de coordination de l'atome métallique et de la denticité des ligands carbéniques, L et K, mais aussi de la charge des ligands carbéniques et L, à condition que $n1$ soit au moins égal à 1.

11. Dispositif électronique organique selon la revendication 10, dans lequel le composé de formule IX est un composé de formule



12. Dispositif électronique organique selon l'une quelconque des revendications 7 à 11, dans lequel la couche de transport de trous comprend un composé de formule



dopé avec un oxyde de molybdène (MoO_x), en particulier MoO_3 , ou un oxyde de rhénium (ReO_x), en particulier ReO_3 .

13. Couche organique, en particulier couche de transport d'électrons, comprenant un complexe organométallique de formule I tel que défini dans la revendication 1 et un composé de formule II tel que défini dans la revendication 1.

14. Utilisation de la couche organique selon la revendication 13 dans un dispositif électronique organique.

15. Appareil comprenant un dispositif électronique organique selon l'une quelconque des revendications 1 12, ou la couche organique selon la revendication 13.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 10072300 A [0002]
- US 2007252521 A1 [0005]
- JP 2008127326 A [0023]
- WO 0032717 A [0024]
- WO 2005019373 A2 [0051] [0053] [0054] [0064] [0069]
- WO 2006056418 A2 [0051] [0064] [0069]
- WO 2005113704 A [0051] [0064] [0069]
- WO 2007115970 A [0051] [0053] [0064] [0069]
- WO 2007115981 A [0051] [0053] [0064] [0069]
- WO 2008000727 A [0051] [0053] [0064] [0069]
- WO 2005019373 A [0051] [0091]
- WO 0260910 A1 [0053]
- US 20010015432 A1 [0053]
- US 20010019782 A1 [0053]
- US 20020055014 A1 [0053]
- US 20020024293 A1 [0053]
- US 20020048689 A1 [0053]
- EP 1191612 A2 [0053]
- EP 1191613 A2 [0053]
- EP 1211257 A2 [0053]
- US 20020094453 A1 [0053]
- WO 0202714 A2 [0053]
- WO 0070655 A2 [0053]
- WO 0141512 A1 [0053]
- WO 0215645 A1 [0053]
- WO 2005113704 A2 [0053]
- WO 2006115301 A1 [0053]
- WO 2006067074 A1 [0053]
- WO 2006056418 A [0053]
- WO 2006121811 A1 [0053]
- WO 2007095118 A2 [0053]
- WO 2010129323 A [0053]
- WO 2010056669 A [0053]
- WO 10086089 A [0053]
- WO 2010079051 A [0061]
- EP 2009067120 W [0061] [0092]
- US 2009066226 A [0062]
- EP 1885818 B1 [0062]
- EP 1970976 A [0062]
- EP 1998388 A [0062]
- EP 2034538 A [0062]
- WO 2006100298 A [0070]
- WO 2009003919 A [0070]
- EP 2008058207 W [0070]
- WO 2009003898 A [0070]
- EP 2008058106 W [0070]
- WO 2008034758 A [0070]
- WO 0070655 A [0080]

Non-patent literature cited in the description

- **M. THELAKKAT et al.** *Chem. Mater.*, 2000, vol. 12, 3012-3019 [0003]
- **Z.L. ZHANG et al.** *Synthetic Metals*, 2008, vol. 158, 810-814 [0004]
- **KWON J. H.** *Synthetic Metals*, 2009, vol. 159, 1292-1294 [0006]
- **J. KIDO et al.** *Chem. Commun*, 2008, 5821-5823 [0023]
- **J. KIDO et al.** *Chem. Mater.*, 2008, vol. 20, 5951-5953 [0023]
- **CHRISTOPH SCHMITZ et al.** *Chem. Mater.*, 2000, vol. 12, 3012-3019 [0024]
- *Nature*, 11 June 1992, vol. 357, 477-479 [0049]
- Kirk-Othmer Encyclopedia of Chemical Technology. 1996, vol. 18, 837-860 [0050]
- **W. GAO ; A. KAHN.** *J. Appl. Phys.*, 01 July 2003, vol. 94 (1 [0074]
- **A. G. WERNER ; F. LI ; K. HARADA ; M. PFEIFFER ; T. FRITZ ; K. LEO.** *Appl. Phys. Lett.*, 23 June 2003, vol. 82 (25 [0074]
- **PFEIFFER et al.** *Organic Electronics*, 2003, vol. 4, 89-103 [0074]

专利名称(译)	有机电子器件，包括一层吡啶化合物和8-羟基喹啉碱土金属，或碱金属络合物		
公开(公告)号	EP2582768B1	公开(公告)日	2014-06-25
申请号	EP2011726756	申请日	2011-06-16
[标]申请(专利权)人(译)	巴斯夫欧洲公司		
申请(专利权)人(译)	BASF SE		
当前申请(专利权)人(译)	BASF SE		
[标]发明人	WATANABE SOICHI SCHILDKNECHT CHRISTIAN WAGENBLAST GERHARD LENNARTZ CHRISTIAN WOLLEB HEINZ		
发明人	WATANABE, SOICHI SCHILDKNECHT, CHRISTIAN WAGENBLAST, GERHARD LENNARTZ, CHRISTIAN WOLLEB, HEINZ		
IPC分类号	C09K11/06 H05B33/10 H05B33/14 C07D213/00 C07D401/00		
CPC分类号	C09K11/06 C07D401/14 C07D487/04 C09K2211/1007 C09K2211/1029 C09K2211/1044 C09K2211/181 H01L51/0067 H01L51/0077 H01L51/5072 H05B33/10 H05B33/14		
优先权	2010166509 2010-06-18 EP		
其他公开文献	EP2582768A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种有机电子器件，包括第一电极，第二电极和介于第一电极和第二电极之间的有机层，其中有机层包含式(I)的有机金属络合物，和式(II)。当包含式I和II化合物的有机层构成OLED的电子传输层时，获得具有优异寿命，功率效率，量子效率和/或低操作电压的有机发光器件(OLED)。

