



(11)

EP 2 790 239 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.02.2020 Bulletin 2020/06

(51) Int Cl.:
H01L 51/50 ^(2006.01) **C07D 209/86** ^(2006.01)
C09K 11/06 ^(2006.01)

(21) Application number: **12855216.3**

(86) International application number:
PCT/JP2012/081375

(22) Date of filing: **04.12.2012**

(87) International publication number:
WO 2013/084881 (13.06.2013 Gazette 2013/24)

(54) MATERIAL FOR ORGANIC ELECTROLUMINESCENT ELEMENT AND ORGANIC ELECTROLUMINESCENT ELEMENT

MATERIAL FÜR EIN ORGANISCHES ELEKTROLUMINESZENZELEMENT UND ORGANISCHES ELEKTROLUMINESZENZELEMENT

MATÉRIAU POUR ÉLÉMENT ÉLECTROLUMINESCENT ORGANIQUE ET ÉLÉMENT ÉLECTROLUMINESCENT ORGANIQUE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **NISHIMURA, Kazuki**
Chiba 2990293 (JP)
- **YOSHIDA, Kei**
Chiba 2990293 (JP)

(30) Priority: **05.12.2011 JP 2011266238**
30.03.2012 JP 2012083146

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(43) Date of publication of application:
15.10.2014 Bulletin 2014/42

(73) Proprietor: **Idemitsu Kosan Co., Ltd**
Tokyo 100-8321 (JP)

(56) References cited:
EP-A1- 1 798 804 EP-A1- 2 471 771
WO-A1-2012/165256 JP-A- 2009 120 582
KR-B1- 101 072 817 US-A1- 2008 174 237

(72) Inventors:

- **MIZUKI, Yumiko**
Chiba 2990293 (JP)
- **ITO, Mitsunori**
Chiba 2990293 (JP)
- **INOUE, Tetsuya**
Chiba 2990293 (JP)
- **HIBINO, Kumiko**
Chiba 2990293 (JP)

- **JAMES F. AMBROSE ET AL.: 'Electrochemical and Spectroscopic Properties of Cation Radicals' J. ELECTROCHEM. SOC.: ELECTROCHEMICAL SCIENCE AND TECHNOLOGY vol. 122, no. 7, June 1975, pages 876 - 894, XP000907676**
- **Prof. Falbe und Prof.Regitz: "Römpf Chemie Lexikon", 1989, Georg Thieme Verlag Stuttgart New York pages 260-3345,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

5 **[0001]** The present invention relates to materials for organic electroluminescence devices and organic electroluminescence devices employing the materials.

BACKGROUND ART

10 **[0002]** By applying voltage to an organic electroluminescence device (also referred to as "organic EL device"), holes from an anode and electrons from a cathode are injected into a light emitting layer. The holes and electrons injected into the light emitting layer recombine to form excitons. The singlet exciton and the triplet exciton are formed at a ratio of 25%:75% according to spin-statistics theorem. Since the fluorescence utilizes the emission from singlet excitons, it has been known that the internal quantum efficiency of a fluorescent organic EL device is limited to 25%. In contrast,

15 since the phosphorescence utilizes the emission from triplet excitons, it has been known that the internal quantum efficiency of a phosphorescent organic EL device can be increased to 100% if the intersystem crossing occurs efficiently. **[0003]** In the development of known organic EL devices, an optimum device design has been made depending upon the emission mechanism such as fluorescence and phosphorescence. It has been known in the art that a high-performance phosphorescent organic EL device cannot be obtained by a mere application of the fluorescent technique to the phosphorescent device, because the emission mechanisms are different from each other. This may be generally because

20 the following reasons. **[0004]** Since the phosphorescence utilizes the emission from triplet excitons, a compound with larger energy gap is required to be used in the light emitting layer. This is because that the singlet energy (energy difference between the lowest excited singlet state and the ground state) of a compound is generally larger than its triplet energy (energy difference between the lowest excited triplet state and the ground state).

25 **[0005]** Therefore, to effectively confine the triplet energy of a phosphorescent dopant material within a device, a host material having triplet energy larger than that of the phosphorescent dopant material should be used in the light emitting layer. In addition, if an electron transporting layer and a hole transporting layer is formed adjacent to the light emitting layer, a compound having triplet energy larger than that of the phosphorescent dopant material should be used also in the electron transporting layer and the hole transporting layer. Thus, the device design conventionally employed for

30 developing a phosphorescent organic EL device results in the use of a compound having an energy gap larger than that of a compound for use in a fluorescent organic EL device, thereby increasing the voltage for driving an organic EL device. **[0006]** A hydrocarbon compound highly resistant to oxidation and reduction, which has been known as a useful compound for a fluorescent device, has a small energy gap because of a broad distribution of π -electron cloud. Therefore,

35 such a hydrocarbon compound is not suitable for use in a phosphorescent organic EL device and, instead, an organic compound having a heteroatom, such as oxygen and nitrogen, has been selected. However, a phosphorescent organic EL device employing such an organic compound having a heteroatom has a shorter lifetime as compared with a fluorescent organic EL device. **[0007]** In addition, a phosphorescent dopant material has an extremely longer relaxation time of triplet excitons as compared with that of its singlet excitons, this largely affecting the device performance. Namely, in the emission from singlet excitons, since the relaxation speed which leads to emission is high, the diffusion of excitons into a layer adjacent to the light emitting layer (for example, a hole transporting layer and an electron transporting layer) is difficult to occur and efficient emission is expected. In contrast, the emission from triplet excitons is a spin-forbidden transition and the relaxation speed is low. Therefore, the diffusion of excitons into adjacent layers occurs easily and the thermal energy deactivation occurs in most compounds other than the specific phosphorescent compound. Thus, as compared with a

40 fluorescent organic EL device, it is more important for a phosphorescent organic EL device to control the region for recombining electrons and holes. **[0008]** For the above reasons, the development of a high performance phosphorescent organic EL device requires the selection of materials and the consideration of device design which are different from those for a fluorescent organic EL device.

50 **[0009]** A carbazole derivative having a high triplet energy and a carbazole skeleton known as a principal skeleton of hole transporting materials has been conventionally used as a useful phosphorescent host material.

[0010] Patent Document 1 describes, as a material for organic EL device, a compound in which a nitrogen-containing heterocyclic group is introduced into a biscarbazole skeleton which includes two carbazole structures connected to each other. The compound described in Patent Document 1 is molecularly designed to balance the charge transport by introducing an electron-deficient nitrogen-containing heterocyclic group to a hole transporting carbazole skeleton. Patent Document 2 describes that the charge injecting ability of a N,N-biscarbazole compound wherein two carbazole structures are bonded to each other via a biphenyl group is improved by introducing an electron-withdrawing group into the inter-

vening biphenyl group between two carbazole structures.

[0011] However, the improvement of the emission efficiency of organic EL device is still required and the development of a new material for organic EL device which realizes higher emission efficiency has been demanded.

PRIOR ART

Patent Documents

[0012]

Patent Document 1: WO 2011/132684

Patent Document 2: JP 2011-176258 Further reference is made to JP2009-120582.

SUMMARY OF THE INVENTION

Problem to Be Solved by the Invention


[0013] An object of the invention is to provide a material for organic electroluminescence device capable of realizing an organic electroluminescence device with good emission efficiency and an organic electroluminescence device employing the material.

Means for Solving Problem

[0014] As a result of extensive research, the inventors have found that a material for organic EL device represented by formula (I) realizes an organic EL device with excellent emission efficiency and made the invention based on this finding. The material for organic EL device represented by formula (I) has a central skeleton to which a cyano-substituted aromatic hydrocarbon group or a cyano-substituted heterocyclic group is bonded at a specific position.

[0015] The present invention provides:

1. A material for organic electroluminescence device represented by formula (I):

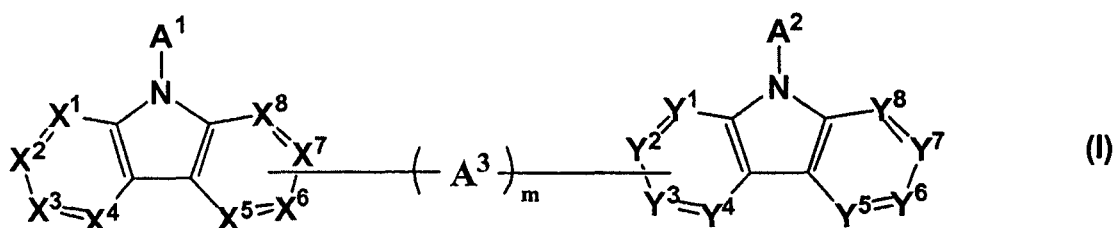

wherein:

A¹, A², A³, m, X¹ to X⁸, and Y¹ to Y⁸ are as defined in claim 1;

and the formula (I) satisfies at least one of the following requirements (i) and (ii):

(i) at least one of A¹ and A² represents a cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms wherein the heterocyclic group is selected from a dibenzofuran ring residue and a dibenzothiophene ring residue; and

(ii) at least one of X¹ to X⁴ and Y⁵ to Y⁸ represents CR^a, and at least one of R^a in X¹ to X⁴ and Y⁵ to Y⁸ represents a cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms, provided that when two or more R^a groups exist, the R^a groups may be the same or different;

2. The material for organic electroluminescence device according to item 1, which satisfies the requirement (i) but does not satisfy the requirement (ii);

3. The material for organic electroluminescence device according to item 1, which satisfies the requirement (ii) but does not satisfy the requirement (i);

4. The material for organic electroluminescence device according to item 1, which satisfies both the requirements

(i) and (ii);

5. The material for organic electroluminescence device according to any one of items 1 to 2 and 4, wherein at least one of A¹ and A² represents a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group;

6. The material for organic electroluminescence device according to any one of items 1 to 2, 4 and 5, wherein A¹ is substituted by a cyano group and A² is not substituted by a cyano group;

7. The material for organic electroluminescence device according to any one of items 1, 3 and 4 wherein at least one of X¹ to X⁴ and Y⁵ to Y⁸ represents CR^a, and at least one of R^a in X¹ to X⁴ and Y⁵ to Y⁸ represents a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group;

8. The material for organic electroluminescence device according to any one of items 1 to 7, wherein X⁶ and Y³ are bonded to each other via A³ or directly;

9. The material for organic electroluminescence device according to any one of items 1 to 7, wherein X⁶ and Y² are bonded to each other via A³ or directly;

10. The material for organic electroluminescence device according to any one of items 1 to 7, wherein X⁷ and Y³ are bonded to each other via A³ or directly;

11. The material for organic electroluminescence device according to any one of items 1 to 10, wherein m represents 0;

12. The material for organic electroluminescence device according to any one of items 1 to 10, wherein m represents 1;

13. An organic electroluminescence device comprising an organic thin film layer comprising one or more layers between a cathode and an anode, wherein the organic thin film layer comprises a light emitting layer, and at least one layer of the organic thin film layer comprises the material for organic electroluminescence device according to any one of items 1 to 12;

14. The organic electroluminescence device according to item 13, wherein the light emitting layer comprises the material for organic electroluminescence device;

15. The organic electroluminescence device according to item 13 or 14, wherein the light emitting layer comprises a phosphorescent material selected from ortho metallated complexes of a metal selected from iridium (Ir), osmium (Os), and platinum (Pt);

16. The organic electroluminescence device according to any one of items 13 to 15, which further comprises a layer adjacent to the light emitting layer between the cathode and the light emitting layer, and the layer adjacent to the light emitting layer comprises the material for organic electroluminescence device; and

17. The organic electroluminescence device according to any one of items 13 to 15, which further comprises a blocking layer adjacent to the light emitting layer between the cathode and the light emitting layer, and the blocking layer comprises the material for organic electroluminescence device according to any one of items 1 to 12.

EFFECT OF THE INVENTION

[0016] According to the present invention, an organic electroluminescence device with good emission efficiency and a material for organic electroluminescence device which realizes such organic electroluminescence device are provided.

BRIEF DESCRIPTION OF DRAWINGS

[0017]

Fig. 1 is a schematic cross-sectional view of an example of the organic EL device of the invention.

Fig. 2 is a diagram showing the result of molecular orbital calculation of HOMO and LUMO of the compound 1 within the material for organic EL device of the invention.


Fig. 3 is a diagram showing the result of molecular orbital calculation of HOMO and LUMO of the compound 2 within the material for organic EL device of the invention.

Fig. 4 is a diagram showing the result of molecular orbital calculation of HOMO and LUMO of the compound a described in Patent Document 2.

MODE FOR CARRYING OUT THE INVENTION

Material for Organic Electroluminescence Device

[0018] The material for organic electroluminescence device (hereinafter also referred to as "material for organic EL device") of the invention is represented by formula (I):

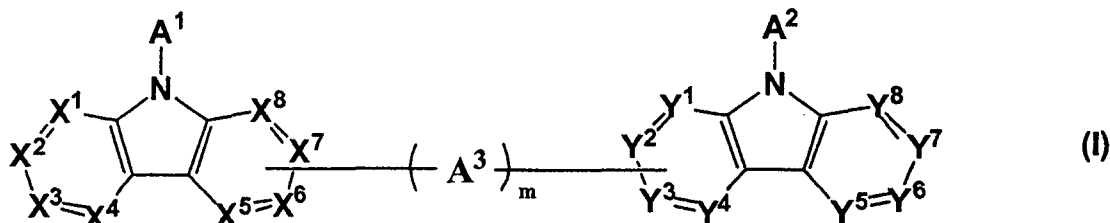

wherein:

each of A^1 and A^2 independently represents a substituted or unsubstituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a substituted or unsubstituted heterocyclic group having 5 to 30 ring atoms; wherein the heterocyclic group is selected from a dibenzofuran ring residue and a dibenzothiophene ring residue;

A^3 represents an unsubstituted monocyclic hydrocarbon group having 6 or less ring carbon atoms or an unsubstituted monocyclic heterocyclic group having 6 or less ring atoms;

m represents an integer of 0 to 3;

each of X^1 to X^8 and Y^1 to Y^8 independently represents N or CR^a ;

each of R^a independently represents a hydrogen atom, a substituted or unsubstituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms, a substituted or unsubstituted heterocyclic group having 5 to 30 ring atoms, a substituted or unsubstituted alkyl group having 1 to 30 carbon atoms, a substituted or unsubstituted silyl group, or a halogen atom, provided that one of X^5 to X^8 and one of Y^1 to Y^4 are bonded to each other via A^3 or directly; and the formula (I) satisfies at least one of the following requirements (i) and (ii):

(i) at least one of A^1 and A^2 represents a cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms; wherein the heterocyclic group is selected from a dibenzofuran ring residue and a dibenzothiophene ring residue; and

(ii) at least one of X^1 to X^4 and Y^5 to Y^8 represents CR^a , and at least one of R^a in X^1 to X^4 and Y^5 to Y^8 represents a cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms, provided that when two or more R^a groups exist, the R^a groups may be the same or different.

[0019] The cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms and the cyano-substituted heterocyclic group having 5 to 30 ring atoms of formula (I) may be further substituted by a group other than the cyano group.

[0020] The subscript m is preferably 0 to 2 and more preferably 0 or 1. When m is 0, one of X^5 to X^8 and one of Y^1 to Y^4 are bonded to each other via a single bond.

[0021] The aromatic hydrocarbon group having 6 to 30 ring carbon atoms represented by A^1 , A^2 and R^a may be a non-condensed aromatic hydrocarbon group or a condensed aromatic hydrocarbon group. Specific examples thereof include phenyl group, naphthyl group, phenanthryl group, biphenyl group, terphenyl group, quaterphenyl group, fluoranthenyl group, triphenylenyl group, phenanthrenyl group, fluorenyl group, spirofluorenyl group, 9,9-diphenylfluorenyl group, 9,9'-spirobi[9H-fluorene]-2-yl group, 9,9-dimethylfluorenyl group, benzo[c]phenanthrenyl group, benzo[a]triphenylenyl group, naphtho[1,2-c]phenanthrenyl group, naphtho[1,2-a]triphenylenyl group, dibenzo[a,c]triphenylenyl group, and benzo[b]fluoranthenyl group, with phenyl group, naphthyl group, biphenyl group, terphenyl group, phenanthryl group, triphenylenyl group, fluorenyl group, spirobifluorenyl group, and fluoranthenyl group being preferred, and phenyl group, 1-naphthyl group, 2-naphthyl group, biphenyl-2-yl group, biphenyl-3-yl group, biphenyl-4-yl group, phenanthrene-9-yl group, phenanthrene-3-yl group, phenanthrene-2-yl group, triphenylene-2-yl group, 9,9-dimethylfluorene-2-yl group, fluoranthene-3-yl group being more preferred.

[0022] The heterocyclic group having 5 to 30 ring atoms represented by A^1 , A^2 and R^a may be a non-condensed heterocyclic group or a condensed heterocyclic group. Specific examples thereof include the residues of pyrrole ring, isoindole ring, benzofuran ring, isobenzofuran ring, dibenzothiophene ring, isoquinoline ring, quinoxaline ring, phenanthridine ring, phenanthroline ring, pyridine ring, pyrazine ring, pyrimidine ring, pyridazine ring, triazine ring, indole ring,

quinoline ring, acridine ring, pyrrolidine ring, dioxane ring, piperidine ring, morpholine ring, piperazine ring, carbazole ring, furan ring, thiophene ring, oxazole ring, oxadiazole ring, benzoxazole ring, thiazole ring, thiadiazole ring, benzo-thiazole ring, triazole ring, imidazole ring, benzimidazole ring, pyran ring, dibenzofuran ring, and benzo[c]dibenzofuran ring, and the residues of derivatives of these rings, with the residues of dibenzofuran ring, carbazole ring, dibenzothiophene ring, and derivatives of these rings being preferred, and the residues of dibenzofuran-2-yl group, dibenzofuran-4-yl group, 9-phenylcarbazole-3-yl group, 9-phenylcarbazole-2-yl group, dibenzothiophene-2-yl group, and dibenzothiophene-4-yl group being more preferred.

[0023] Examples of the monocyclic hydrocarbon group having 6 or less ring carbon atoms represented by A³ include phenylene group, cyclopentenylene group, cyclopentadienylene group, cyclohexylene group, and cyclopentylene group, with phenylene group being preferred.

[0024] Examples of the monocyclic heterocyclic group having 6 or less ring atoms represented by A³ include pyrrolylene group, pyrazinylene group, pyridinylene group, furylene group, and thiophenylene group.

[0025] Examples of the alkyl group having 1 to 30 carbon atoms represented by R^a include methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, n-nonyl group, n-decyl group, n-undecyl group, n-dodecyl group, n-tridecyl group, n-tetradecyl group, n-pentadecyl group, n-hexadecyl group, n-heptadecyl group, n-octadecyl group, neopentyl group, 1-methylpentyl group, cyclopropyl group, cyclobutyl group, cyclopentyl group, cyclohexyl group, cyclooctyl group, and adamantyl group, with methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, cyclopentyl group, and cyclohexyl group being preferred.

[0026] Examples of the substituted or unsubstituted silyl group represented by R^a include trimethylsilyl group, triethylsilyl group, tributylsilyl group, dimethylethylsilyl group, t-butyl dimethylsilyl group, vinyl dimethylsilyl group, propyl dimethylsilyl group, dimethylisopropylsilyl group, dimethylpropylsilyl group, dimethylbutylsilyl group, dimethyltertiarybutylsilyl group, diethylisopropylsilyl group, phenyldimethylsilyl group, diphenylmethylsilyl group, diphenyltertiarybutylsilyl group, and triphenylsilyl group, with trimethylsilyl group, triethylsilyl group, t-butyl dimethylsilyl group, vinyl dimethylsilyl group, and propyl dimethylsilyl group being preferred.

[0027] Examples of the halogen atom represented by R^a include fluorine, chlorine, bromine, and iodine, with fluorine being preferred.

[0028] Also preferred as R^a is a hydrogen atom or a substituted or unsubstituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms.

[0029] Examples of the optional substituent indicated by "substituted or unsubstituted" and "may be substituted" referred to above or hereinafter include a halogen atom (fluorine, chlorine, bromine, iodine), a cyano group, an alkyl group having 1 to 20, preferably 1 to 6 carbon atoms, a cycloalkyl group having 3 to 20, preferably 5 to 12 carbon atoms, an alkoxy group having 1 to 20, preferably 1 to 5 carbon atoms, a haloalkyl group having 1 to 20, preferably 1 to 5 carbon atoms, a haloalkoxy group having 1 to 20, preferably 1 to 5 carbon atoms, an alkylsilyl group having 1 to 10, preferably 1 to 5 carbon atoms, an aryl group having 6 to 30, preferably 6 to 18 ring carbon atoms, an aryloxy group having 6 to 30, preferably 6 to 18 ring carbon atoms, an arylsilyl group having 6 to 30, preferably 6 to 18 carbon atoms, an aralkyl group having 7 to 30, preferably 7 to 20 carbon atoms, and a heteroaryl group having 5 to 30, preferably 5 to 18 ring atoms. The optional substituents of A¹ and A² are as defined in claim 1.

[0030] Examples of the optional alkyl group having 1 to 20 carbon atoms include methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, n-pentyl group, n-hexyl group, n-heptyl group, n-octyl group, n-nonyl group, n-decyl group, n-undecyl group, n-dodecyl group, n-tridecyl group, n-tetradecyl group, n-pentadecyl group, n-hexadecyl group, n-heptadecyl group, n-octadecyl group, neopentyl group, and 1-methylpentyl group.

[0031] Examples of the optional cycloalkyl group having 3 to 20 carbon atoms include cyclopropyl group, cyclobutyl group, cyclopentyl group, cyclohexyl group, cyclooctyl group, and adamantyl group.

[0032] Examples of the optional alkoxy group having 1 to 20 carbon atoms include those having an alkyl portion selected from the alkyl groups mentioned above.

[0033] Examples of the optional haloalkyl group having 1 to 20 carbon atoms include the alkyl groups mentioned above wherein the hydrogen atoms thereof are partly or entirely substituted by halogen atoms.

[0034] Examples of the optional haloalkoxy group having 1 to 20 carbon atoms include the alkoxy group mentioned above wherein the hydrogen atoms thereof are partly or entirely substituted by halogen atoms.

[0035] Examples of the optional alkylsilyl group having 1 to 10 carbon atoms include trimethylsilyl group, triethylsilyl group, tributylsilyl group, dimethylethylsilyl group, t-butyl dimethylsilyl group, vinyl dimethylsilyl group, propyl dimethylsilyl group, dimethylisopropylsilyl group, dimethylpropylsilyl group, dimethylbutylsilyl group, dimethyltertiarybutylsilyl group, and diethylisopropylsilyl group.

[0036] Examples of the optional aromatic hydrocarbon group having 6 to 30 ring carbon atoms include those selected from the aromatic hydrocarbon groups mentioned above with respect to A¹, A² and R^a.

[0037] Examples of the optional aryloxy group having 6 to 30 ring carbon atoms include those having an aryl portion

selected from the aromatic hydrocarbon groups mentioned above.

[0038] Examples of the optional arylsilyl group having 6 to 30 carbon atoms include phenyldimethylsilyl group, diphenylmethylsilyl group, diphenyltertiarybutylsilyl group, and triphenylsilyl group.

[0039] Examples of the optional aralkyl group having 7 to 30 carbon atoms include benzyl group, 2-phenylpropane-2-yl group, 1-phenylethyl group, 2-phenylethyl group, 1-phenylisopropyl group, 2-phenylisopropyl group, phenyl-t-butyl group, α -naphthylmethyl group, 1- α -naphthylethyl group, 2- α -naphthylethyl group, 1- α -naphthylisopropyl group, 2- α -naphthylisopropyl group, β -naphthylmethyl group, 1- β -naphthylethyl group, 2- β -naphthylethyl group, 1- β -naphthylisopropyl group, 2- β -naphthylisopropyl group, 1-pyrrolylmethyl group, 2-(1-pyrrolyl)ethyl group, p-methylbenzyl group, m-methylbenzyl group, o-methylbenzyl group, p-chlorobenzyl group, m-chlorobenzyl group, o-chlorobenzyl group, p-bromobenzyl group, m-bromobenzyl group, o-bromobenzyl group, p-iodobenzyl group, m-iodobenzyl group, o-iodobenzyl group, p-hydroxybenzyl group, m-hydroxybenzyl group, o-hydroxybenzyl group, p'-aminobenzyl group, m-aminobenzyl group, o-aminobenzyl group, p-nitrobenzyl group, m-nitrobenzyl group, o-nitrobenzyl group, p-cyanobenzyl group, m-cyanobenzyl group, o-cyanobenzyl group, 1-hydroxy-2-phenylisopropyl group, and 1-chloro-2-phenylisopropyl group.

[0040] Examples of the optional heteroaryl group having 5 to 30 ring atoms include those selected from the heterocyclic groups mentioned above with respect to A¹, A² and R^a.

[0041] The optional substituent is preferably fluorine atom, cyano group, the alkyl group having 1 to 20 carbon atoms, the aromatic hydrocarbon group having 6 to 30 ring carbon atoms, and the heteroaryl group having 5 to 30 ring atoms, more preferably fluorine atom, phenyl group, naphthyl group, biphenyl group, terphenyl group, phenanthryl group, triphenylenyl group, fluorenyl group, spirobifluorenyl group, fluoranthenyl group, residues of dibenzofuran ring, carbazole ring, dibenzothiophene ring, and their derivatives, methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, s-butyl group, isobutyl group, t-butyl group, cyclopentyl group, and cyclohexyl group.

[0042] The optional substituent mentioned above may be further substituted by the optional group mentioned above.


[0043] In formula (I), the optional substituent of the aromatic hydrocarbon group having 6 to 30 ring carbon atoms or the heterocyclic group having 5 to 30 ring atoms represented by A¹ and A² is at least one group selected from a cyano group, a halogen atom, an alkyl group having 1 to 20 carbon atoms, a cycloalkyl group having 3 to 20 carbon atoms, an alkoxy group having 1 to 20 carbon atoms, a haloalkyl group having 1 to 20 carbon atoms, a haloalkoxy group having 1 to 20 carbon atoms, an alkylsilyl group having 1 to 10 carbon atoms, a phenyl group, a naphthyl group, a biphenyl group, a terphenyl group, a phenanthryl group, a triphenylenyl group, a fluorenyl group, a spirobifluorenyl group, a fluoranthenyl group, an aryloxy group having 6 to 30 ring carbon atoms, an aralkyl group having 6 to 30 carbon atoms, and a heteroaryl group having 5 to 30 ring atoms. Examples of such substituents of A¹ and A² are the same as those described with respect to the optional substituents mentioned above.

[0044] In formula (I), at least one of A¹ and A² is preferably the cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or the cyano-substituted heterocyclic group having 5 to 30 ring atoms, at least one of X¹ to X⁴ and Y⁵ to Y⁸ is preferably CR^a, and at least one of R^a in X¹ to X⁴ and Y⁵ to Y⁸ is preferably the cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or the cyano-substituted heterocyclic group having 5 to 30 ring atoms.

[0045] The "carbon number of a to b" in the expression of "substituted or unsubstituted X group having carbon number of a to b" is the carbon number of the unsubstituted X group and does not include the carbon atom of the optional substituent.




[0046] The hydrogen atom referred to herein includes isotopes different from neutron numbers, i.e., light hydrogen (protium), heavy hydrogen (deuterium) and tritium.

[0047] In the material for organic EL device of the invention, the groups represented by formulae (a) and (b) are bonded to each other via -(A³)_m- at one of X⁵ to X⁸ and one of Y¹ to Y⁴. Specific examples of the bonding manner between formulae (a) and (b) are represented by X⁶-(A³)_m-Y³, X⁶-(A³)_m-Y², X⁶-(A³)_m-Y⁴, X⁶-(A³)_m-Y¹, X⁷-(A³)_m-Y³, X⁵-(A³)_m-Y³, X⁸-(A³)_m-Y³, X⁷-(A³)_m-Y², X⁷-(A³)_m-Y⁴, X⁷-(A³)_m-Y¹, X⁵-(A³)_m-Y², X⁸-(A³)_m-Y², X⁸-(A³)_m-Y⁴, X⁸-(A³)_m-Y¹, X⁵-(A³)_m-Y¹, and X⁵-(A³)_m-Y⁴.

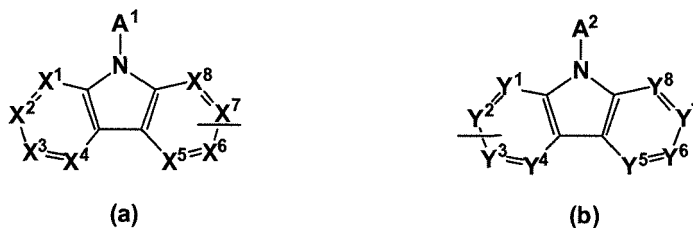

[0048] In preferred embodiments of the material for organic electroluminescence device of the invention, the bonding manner between formulae (a) and (b) are represented by X⁶-(A³)_m-Y³, X⁶-(A³)_m-Y², or X⁷-(A³)_m-Y³, namely the material

for organic electroluminescence device is preferably represented by formula (II), (III), or (IV):

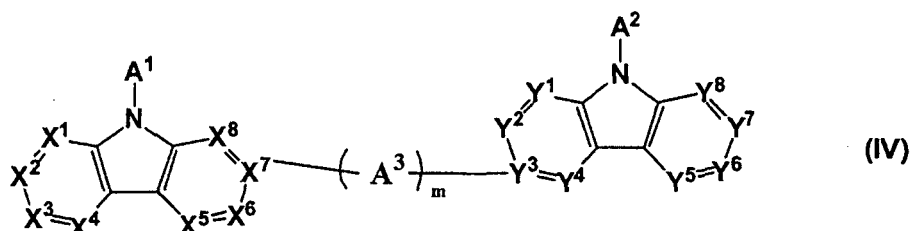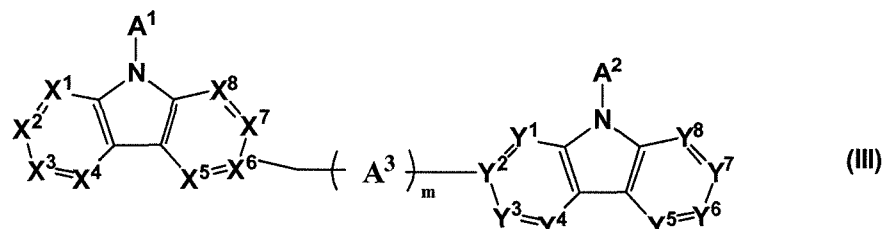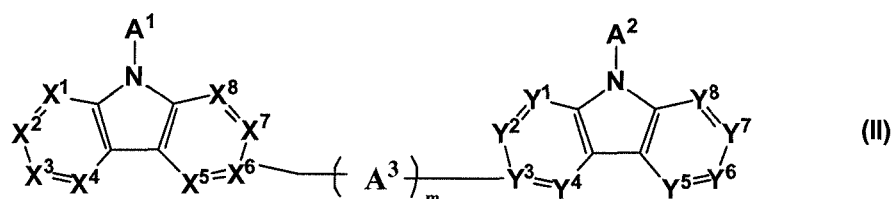

wherein X^1 to X^8 , Y^1 to Y^8 , A^1 to A^3 , and m are the same as X^1 to X^8 , Y^1 to Y^8 , A^1 to A^3 , m in formula (I), and each of formulae (II), (III), and (IV) satisfies at least one requirement (i) and (ii) as specified in the definition of formula (I).

[0049] A^3 in formulae (I) to (IV) represents a single bond, an unsubstituted monocyclic hydrocarbon group having 6 or less ring carbon atoms, or an unsubstituted monocyclic heterocyclic group having 6 or less ring atoms. A^3 minimizes the distortion of the ring (for example, carbazole ring) represented by formula (a) or (b) to make it easy to retain the conjugation of π -electrons. This allows HOMO (highest occupied molecular orbital) to extend throughout the whole carbazole skeleton, thereby to retain the hole injecting/transporting ability of the carbazole skeleton. A^3 is preferably a single bond or an unsubstituted phenylene group.

[0050] In formulae (I) to (IV), m is preferably 0 or 1. When m is 1, A^3 is preferably an unsubstituted phenylene group.

[0051] The material for organic EL device of the invention satisfies at least one of the requirements (i) and (ii):

- 40
- (i) at least one of A^1 and A^2 is substituted by a cyano group; and
 - (ii) at least one of X^1 to X^4 and Y^5 to Y^8 represents CR^a , and at least one of R^a in X^1 to X^4 and Y^5 to Y^8 represents the cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or the cyano-substituted heterocyclic group having 5 to 30 ring atoms.

45 **[0052]** Namely, the material for organic EL device of the invention is any one of the compounds:

- (1) satisfying the requirement (i), but not satisfying the requirement (ii);
- (2) satisfying the requirement (ii), but not satisfying the requirement (i); and
- (3) satisfying both the requirements (i) and (ii).

50 **[0053]** In the material for organic EL device of the invention, by introducing the cyano-substituted aromatic hydrocarbon group or the cyano-substituted heterocyclic group into the terminal end of the central skeleton comprising formulae (a) and (b), for example, a carbazolyl group, the hole injecting/transporting ability of the carbazolyl skeleton and the electron injecting/transporting ability of the cyano group are prevented from counteracting to each other, thereby making the carrier balance in the molecule good.

55 **[0054]** The electron injecting/transporting cyano-substituted aromatic hydrocarbon group and cyano-substituted heterocyclic group are more resistant to holes as compared with a nitrogen-containing heterocycle, such as a pyrimidine ring and a triazine ring, as described in Patent Document 1. Therefore, an organic EL device employing the material for

organic EL device of the invention has a longer lifetime as compared with the device employing the compound described in Patent Document 1.

[0055] When the material for organic EL device of the invention satisfies the requirement (i), at least one of A¹ and A² is preferably a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9'-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group, and more preferably 3'-cyanobiphenyl-2-yl group, 3'-cyanobiphenyl-3-yl group, 3'-cyanobiphenyl-4-yl group, 4'-cyanobiphenyl-3-yl group, 4'-cyanobiphenyl-4-yl group, 4'-cyanobiphenyl-2-yl group, 6-cyanonaphthalene-2-yl group, 4-cyanonaphthalene-1-yl group, 7-cyanonaphthalene-2-yl group, 8-cyanodibenzofuran-2-yl group, 6-cyanodibenzofuran-4-yl group, 8-cyanodibenzothiophene-2-yl group, 6-cyanodibenzothiophene-4-yl group, 7-cyano-9-phenylcarbazole-2-yl group, 6-cyano-9-phenylcarbazole-3-yl group, 7-cyano-9,9-dimethylfluorene-2-yl group, or 7-cyanotriphenylene-2-yl group.

[0056] The material for organic EL device of the invention wherein A¹ is substituted by a cyano group and A² is not substituted by a cyano group is preferred. In this case, the material for organic EL device of the invention which does not satisfy the requirement (ii) is more preferred.

[0057] When the material for organic EL device of the invention satisfies the requirement (ii), at least one of X¹ to X⁴ and Y⁵ to Y⁸ is preferably CR^a, and one of R^a in X¹ to X⁴ and Y⁵ to Y⁸ is preferably a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9'-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group, and more preferably 3'-cyanobiphenyl-2-yl group, 3'-cyanobiphenyl-3-yl group, 3'-cyanobiphenyl-4-yl group, 4'-cyanobiphenyl-3-yl group, 4'-cyanobiphenyl-4-yl group, 4'-cyanobiphenyl-2-yl group, 6-cyanonaphthalene-2-yl group, 4-cyanonaphthalene-1-yl group, 7-cyanonaphthalene-2-yl group, 8-cyanodibenzofuran-2-yl group, 6-cyanodibenzofuran-4-yl group, 8-cyanodibenzothiophene-2-yl group, 6-cyanodibenzothiophene-4-yl group, 7-cyano-9-phenylcarbazole-2-yl group, 6-cyano-9-phenylcarbazole-3-yl group, 7-cyano-9,9-dimethylfluorene-2-yl group, or 7-cyanotriphenylene-2-yl group.


[0058] It is preferred for the material for organic EL device of the invention to satisfy the requirement (ii), but not satisfy the requirement (i).

[0059] In the formulae (I) to (IV), A¹ and A² are preferably different from each other, and more preferably, A¹ is substituted by a cyano group but A² is not substituted by a cyano group. Namely, the material for organic EL device of the invention is preferably structurally asymmetric. If being asymmetric, the crystallinity and non-crystallinity are good. This enhances the quality of the films of an organic EL device employing the material for organic EL device, thereby achieving high performance, for example, organic EL properties, such as current efficiency.

[0060] The material for organic EL device of the invention is characterized by the central skeleton comprising the groups represented by formulae (a) and (b), to the terminal end of which a cyano group-containing aromatic hydrocarbon group or a cyano group-containing heterocyclic group is introduced.


[0061] The central skeleton comprising the groups represented by formulae (a) and (b) acts as a hole injecting/transporting unit, and each of the cyano group-containing aromatic hydrocarbon group and the cyano group-containing heterocyclic group acts as an electron injecting/transporting unit. Since the material for organic EL device of the invention has the cyano group-containing group which acts as an electron injecting/transporting unit outside the central skeleton, the distribution of the electron cloud of HOMO (highest occupied molecular orbital) is retained within the central skeleton, to maintain the hole injecting/transporting ability of the central skeleton good while retaining the electron injecting/transporting ability of the cyano group-containing group. Therefore, the carrier balance in the molecule of the material for organic EL device of the invention is good to realize an organic EL device with excellent emission efficiency.

[0062] As an example, the result of molecular orbital calculation on the compound 1 of the invention is shown in Fig. 2. As seen from Fig. 2, HOMO of the compound 1 is distributed through the central skeleton having two carbazoyl groups, to show a good hole injecting/transporting ability. LUMO (lowest unoccupied molecular orbital) of the compound 1 is distributed mainly through the cyano group-containing aromatic hydrocarbon group (4-cyanophenyl group). Since the electron distributions of HOMO and LUMO are separated, the carrier balance between the hole injecting/transporting ability and the electron injecting/transporting ability in the molecule of the compound 1 is well, to make it possible to realize an organic EL device with high emission efficiency.

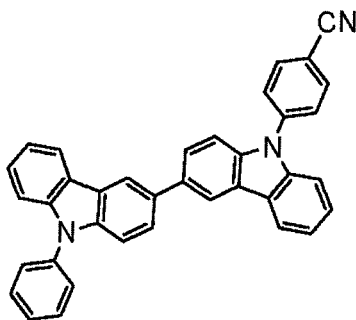

15


20

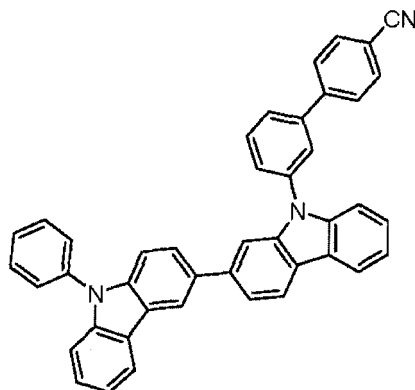

30

40

45

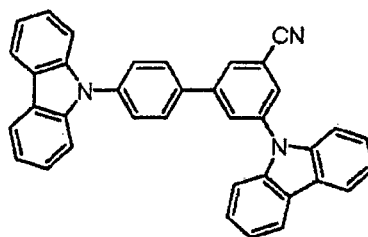



Compound a
















[0066] In an organic EL device, for example, which employs the material for organic EL device represented by formula (I) as a host material of a phosphorescent light emitting layer, the compound represented by formula (I) having a hole injecting/transporting unit will increase the amount of holes in the light emitting layer as compared with using the compound a described in Patent Document 2. In addition, the cyano group-containing aromatic hydrocarbon group and the cyano group-containing heterocyclic group which act as an electron injecting/transporting unit tend to be highly resistant to holes as compared with a nitrogen-containing heterocyclic compound, such as pyrimidine ring and triazine ring, which has been known as an electron injecting/transporting material. The long lifetime of the organic EL device employing the material for organic EL device of the invention is attributable to this high resistance to holes.


[0067] The production method of the derivative of the invention is not particularly limited and it is produced according to a known method, for example, by a coupling reaction of a carbazole derivative and an aromatic halogenated compound in the presence of a copper catalyst described in Tetrahedron 40 (1984) 1433 to 1456 or a palladium catalyst described in Journal of American Chemical Society 123 (2001) 7727 to 7729.


[0068] Specific examples of the material for organic EL device of the invention are shown below, although not limited thereto.

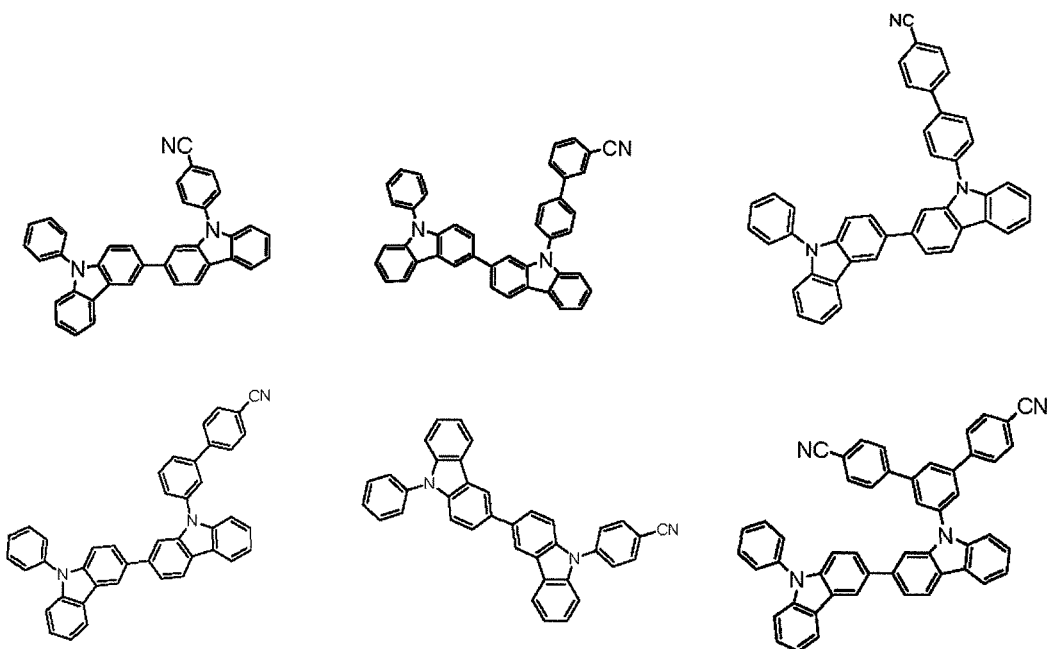

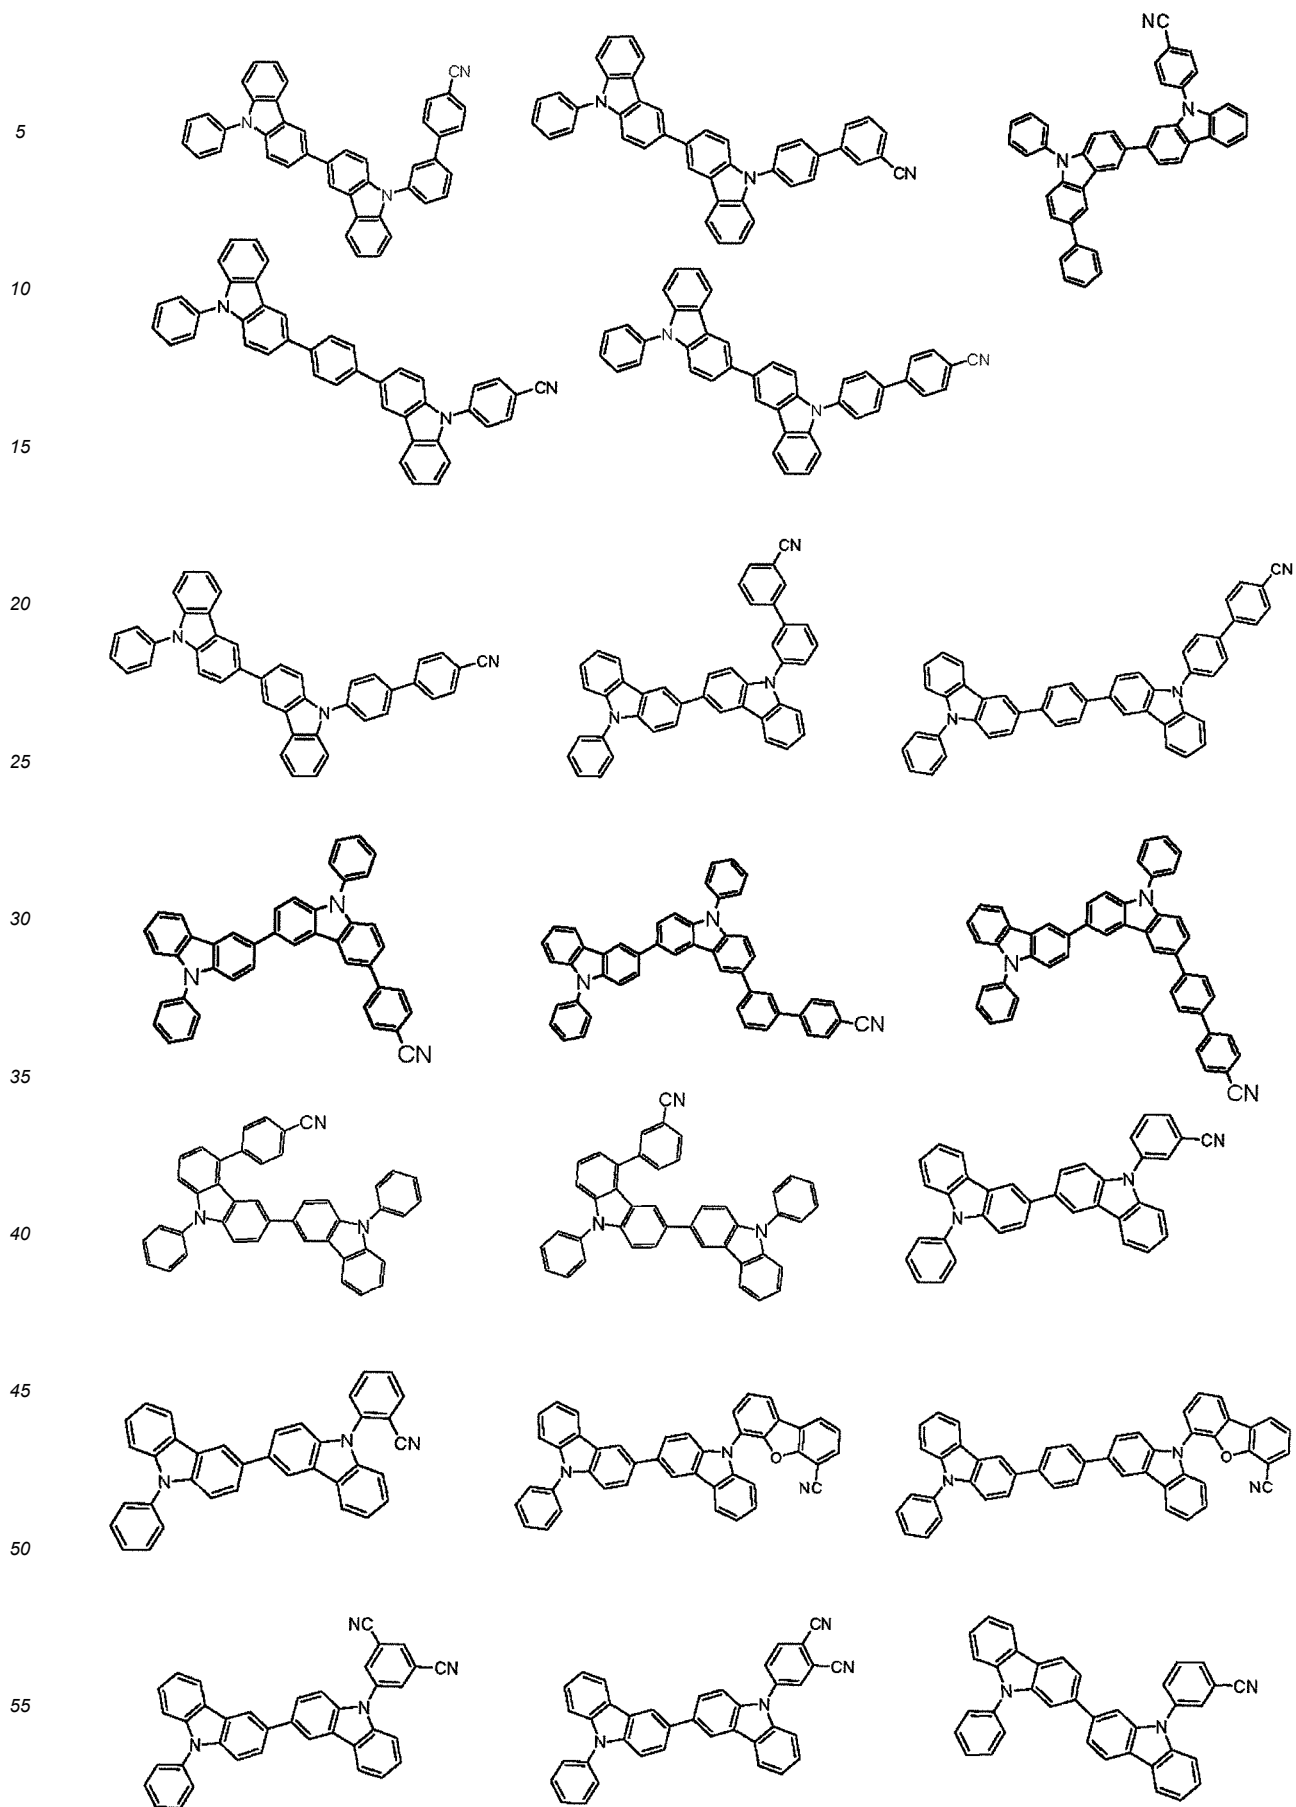

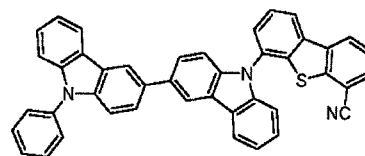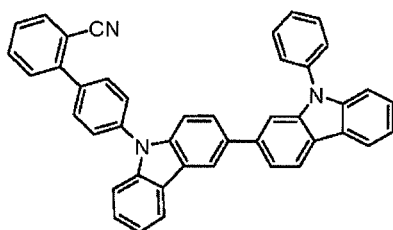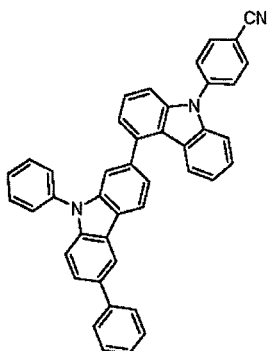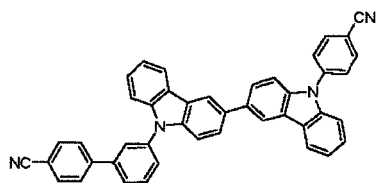

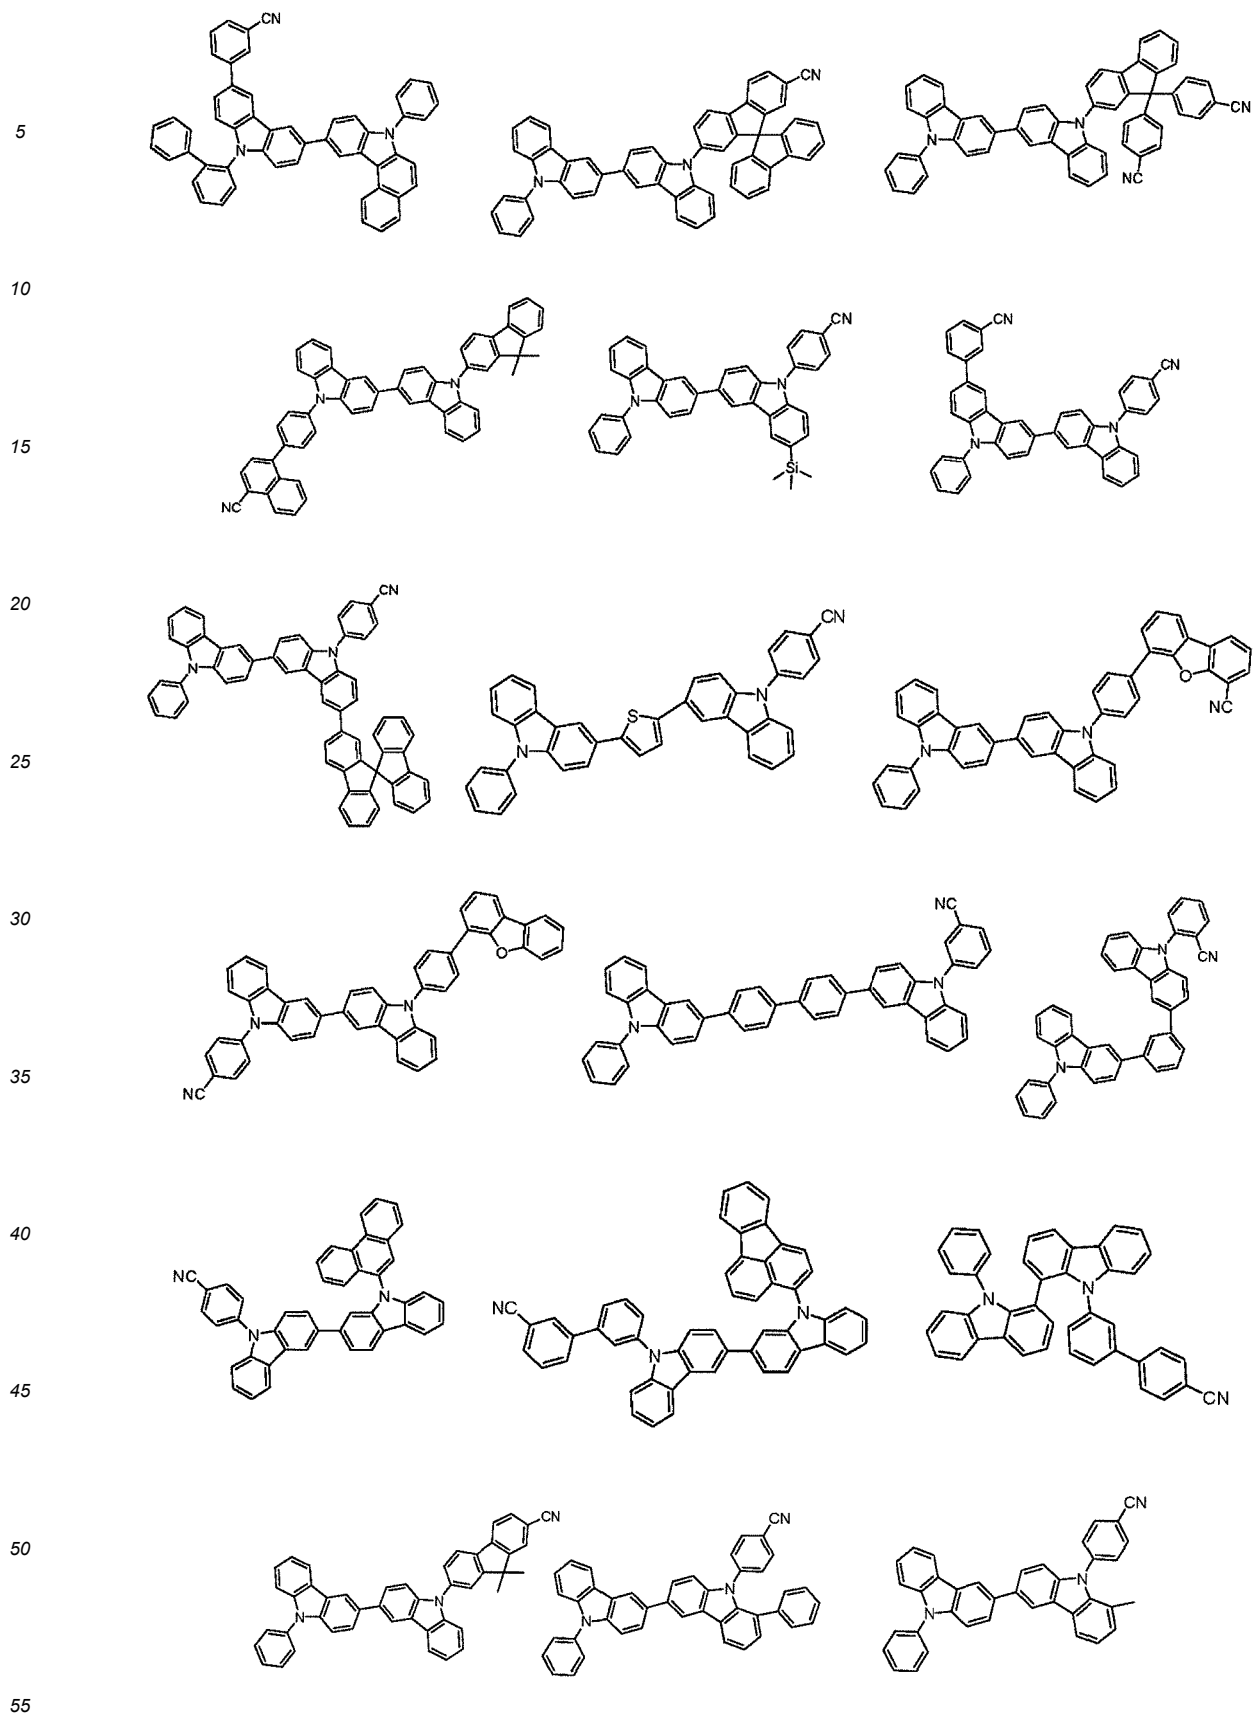

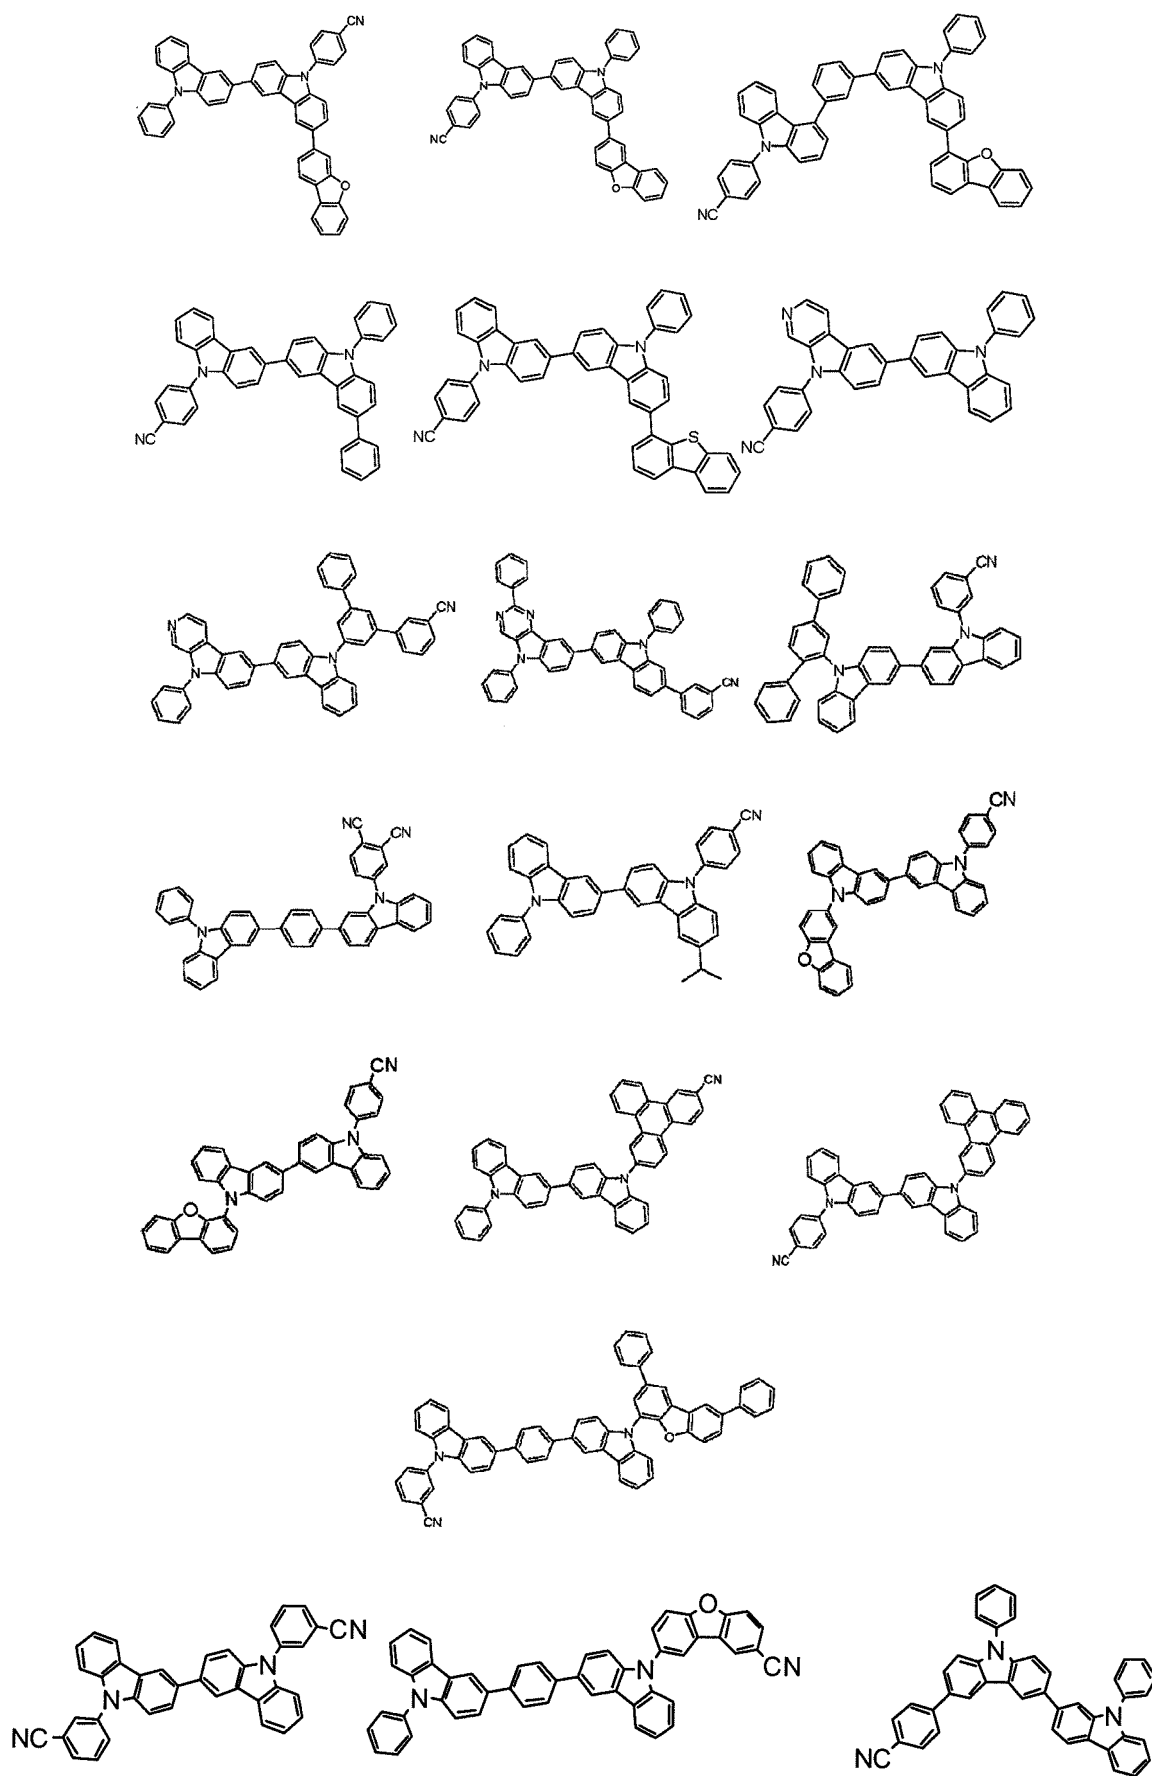

5

10

15

20

25

30














35














40

45

50

55

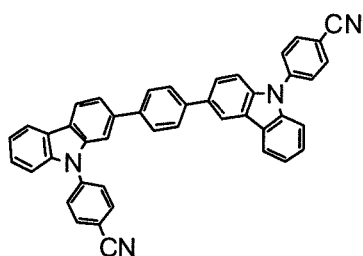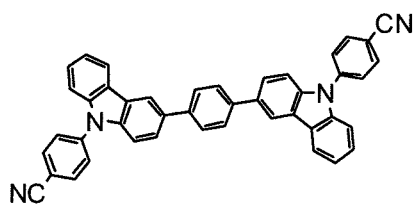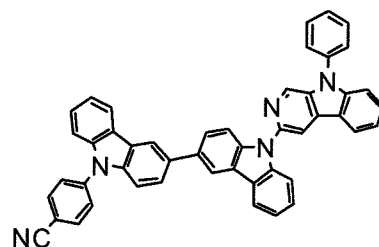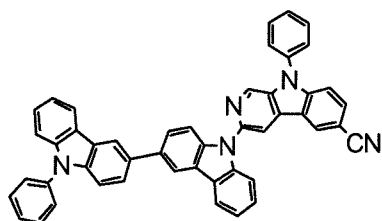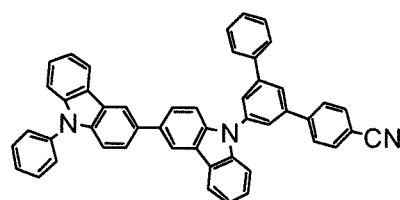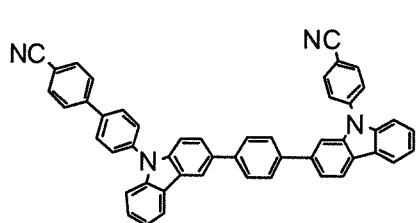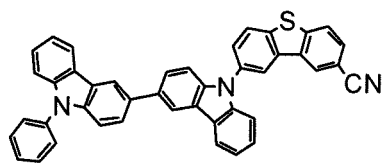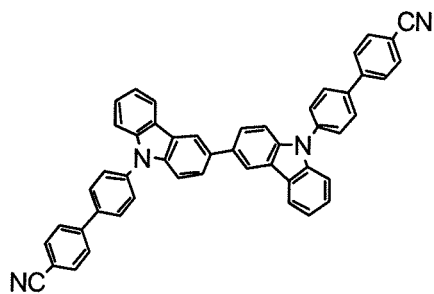

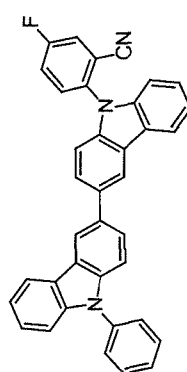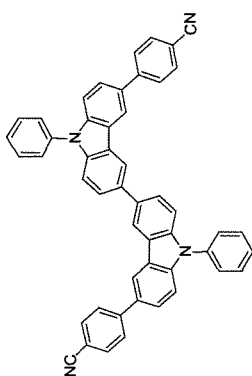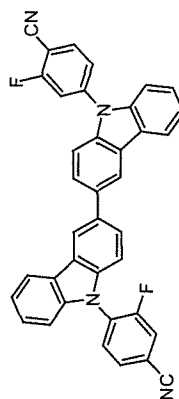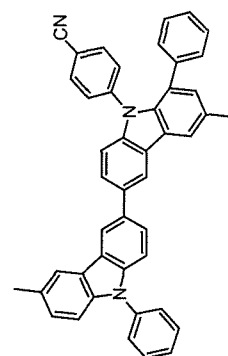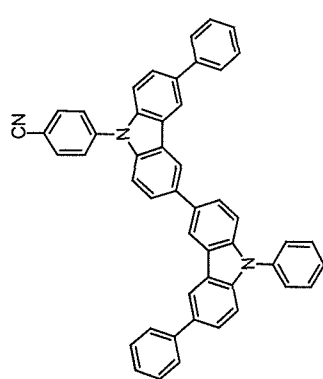

5

10

15

20

25

30














35

40




45

50




55

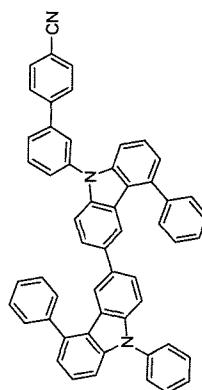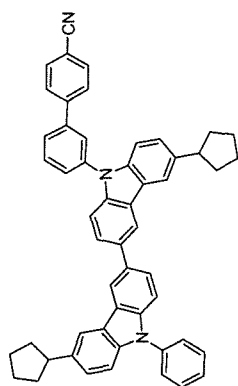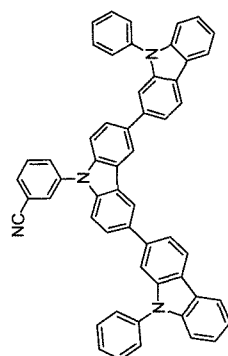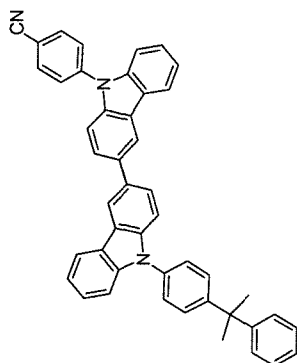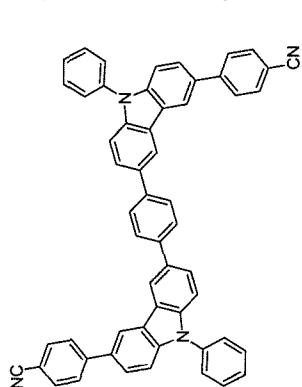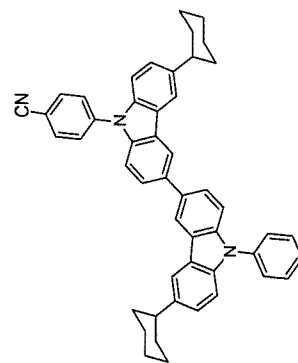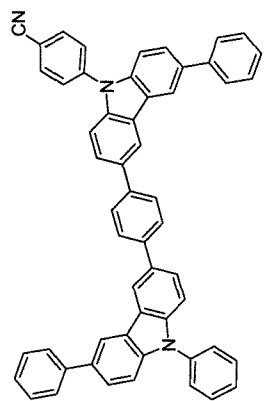




5






10

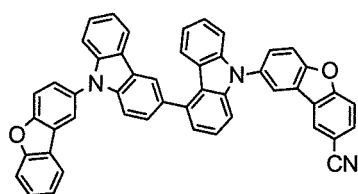




15

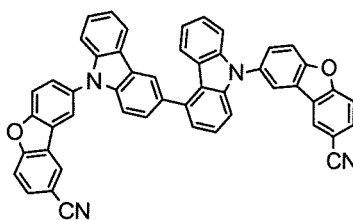

25






30



35



40

45

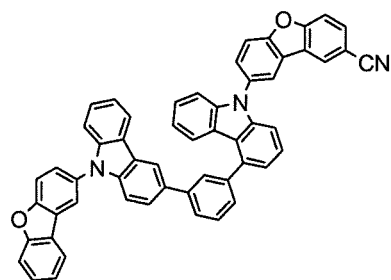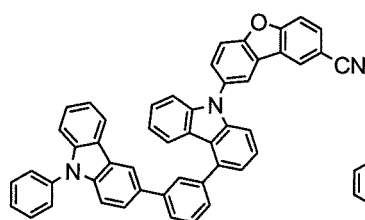

50

55

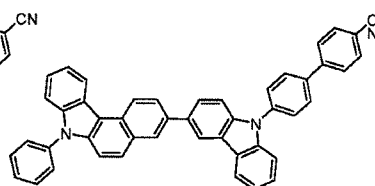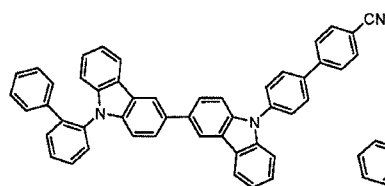

5

10

15

20

25

30


35


40


45

50

55

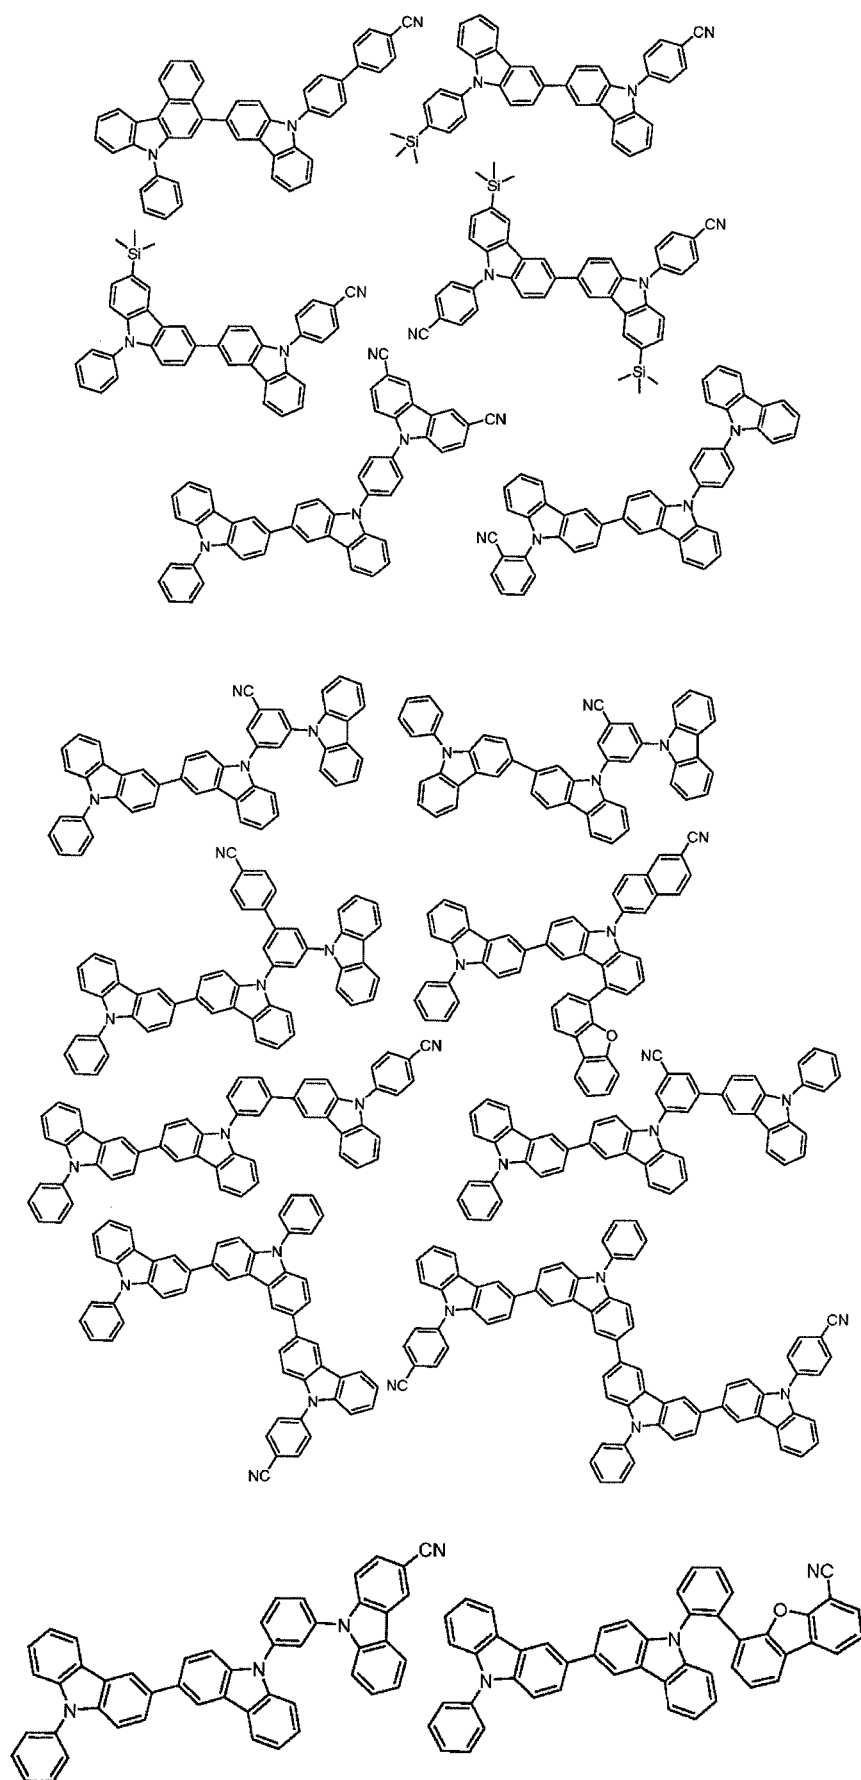

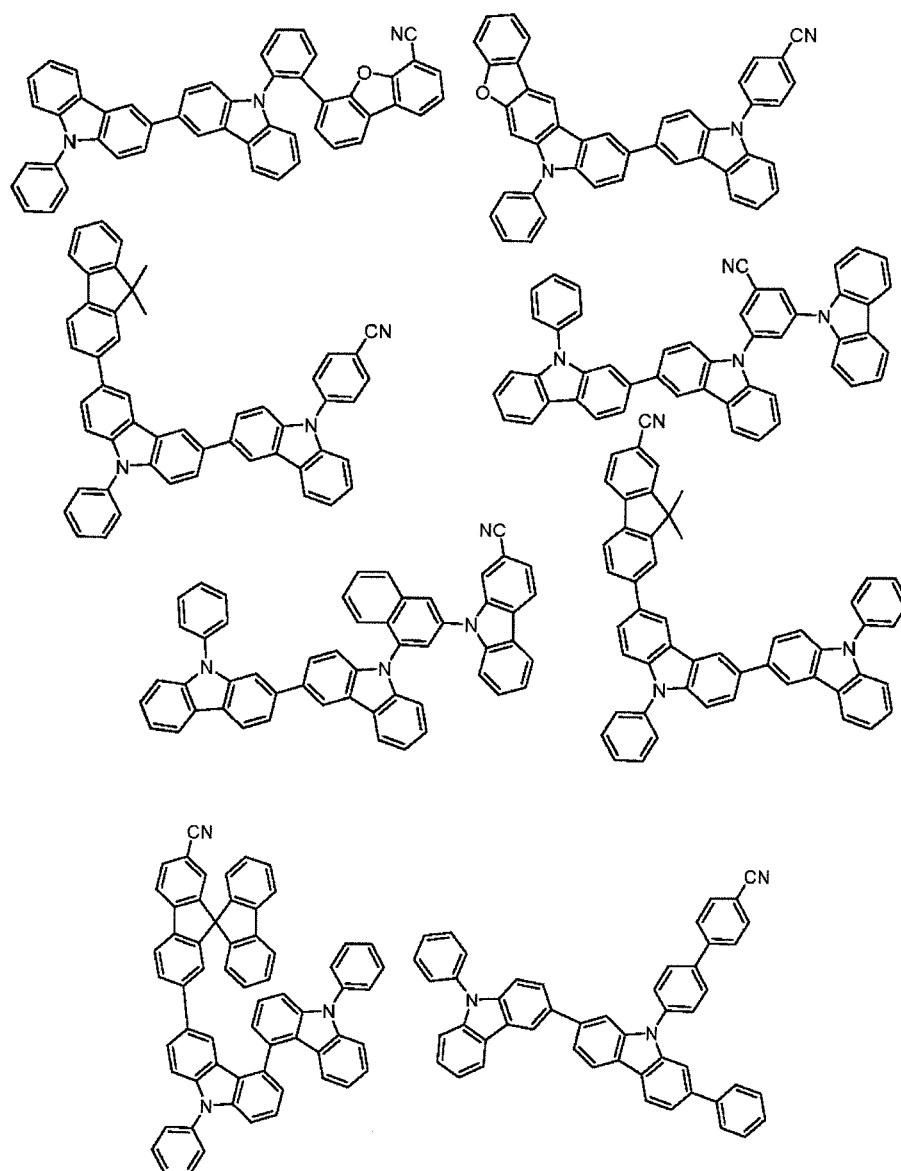

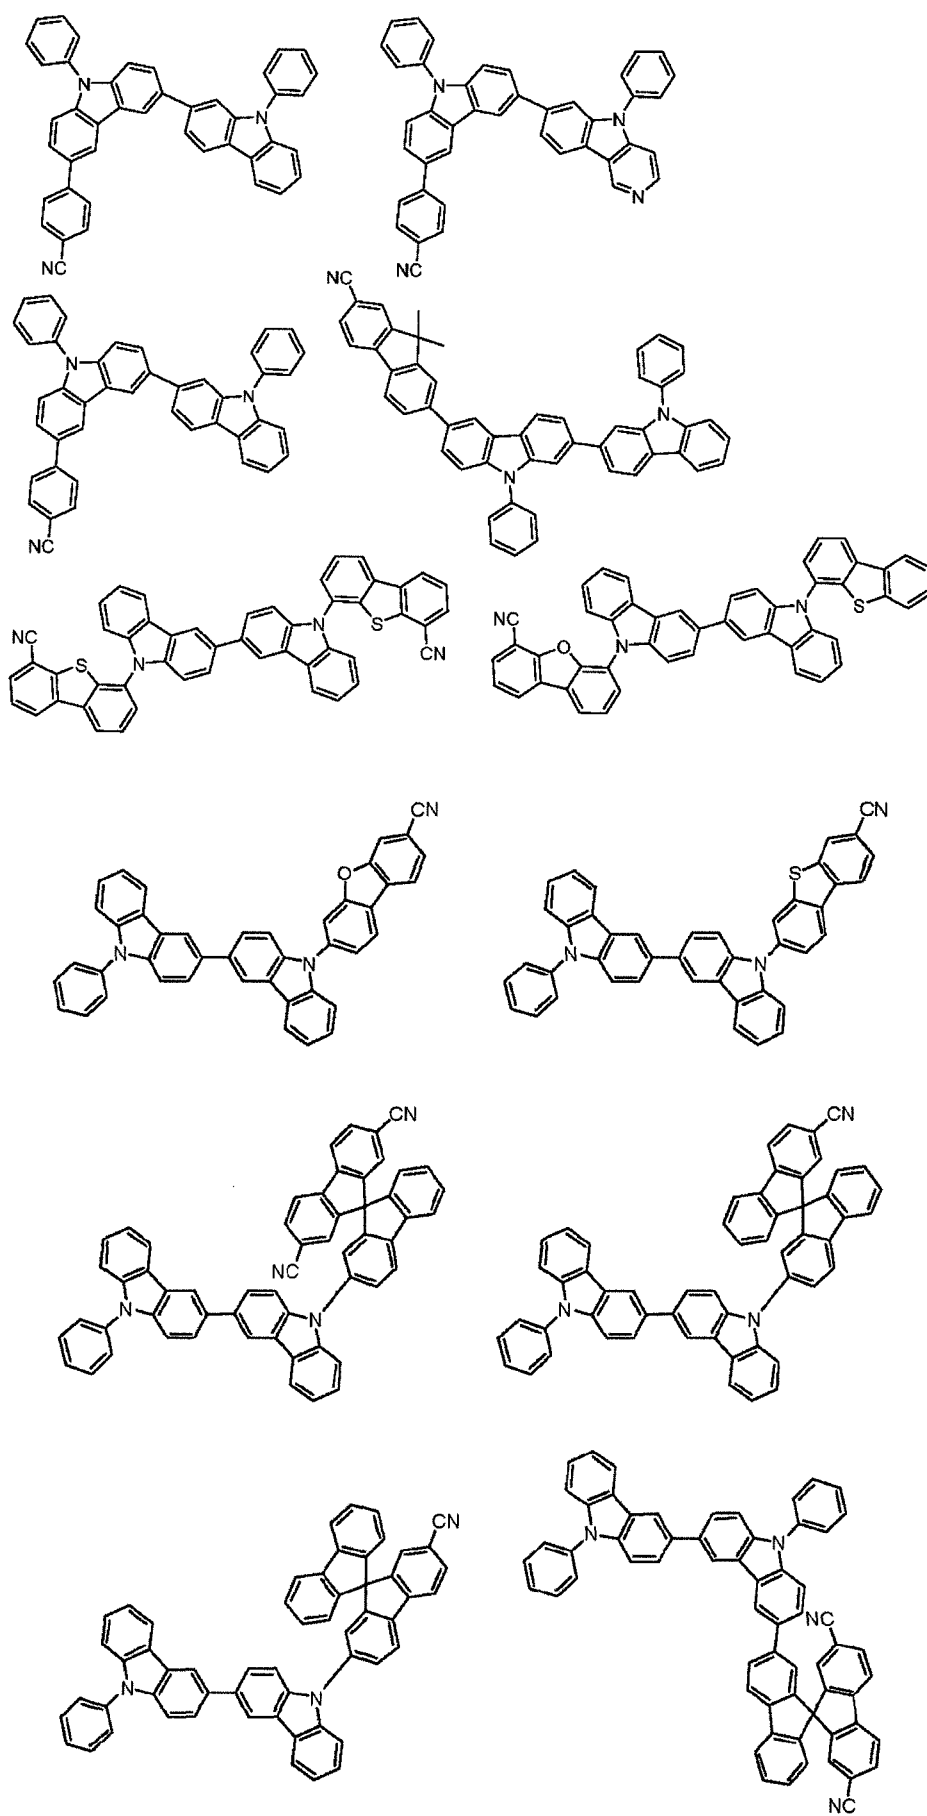

Organic EL Device

[0069] The embodiments of the organic EL device of the invention will be described below.

[0070] The organic EL device has an organic thin film layer between the cathode the anode. The organic thin film layer comprises a light emitting layer and at least one layer of the organic thin film layer comprises the material for organic EL device mentioned above. By allowing the material for organic EL device of the invention to be included in at least one layer of the organic thin film layer, an organic EL device with high emission efficiency is expected.

[0071] The organic thin film layer comprising the material for organic EL device of the invention may include a hole transporting layer, a light emitting layer, a space layer, an electron transporting layer, and a blocking layer, although not limited thereto. The material for organic EL device of the invention is preferably included in a light emitting layer and particularly preferably included in a light emitting layer as a host material. The light emitting layer preferably comprises a fluorescent material or a phosphorescent material, more preferably comprises a phosphorescent material. In another aspect of the invention, the material for organic EL device is preferably included in a blocking layer or an electron transporting each being adjacent to the light emitting layer.

[0072] The organic EL device of the invention may be any of a single color emitting device of fluorescent or phosphorescent type, a white-emitting device of fluorescent-phosphorescent hybrid type, an emitting device of a simple type having a single emission unit, and an emitting device of a tandem type having two or more emission units, with the phosphorescent device being preferred. The "emission unit" referred to herein is the smallest unit for emitting light by the recombination of injected holes and injected electrons, which comprises one or more organic layers wherein at least one layer is a light emitting layer.

[0073] Representative device structures of the simple-type organic EL device are shown below.

(1) anode/emission unit/cathode

[0074] The emission unit may be a laminate comprising two or more layers selected from a phosphorescent light emitting layer and a fluorescent light emitting layer. A space layer may be disposed between the light emitting layers to prevent the diffusion of excitons generated in the phosphorescent light emitting layer into the fluorescent light emitting layer. Representative layered structures of the emission unit are shown below.

- (a) hole transporting layer/light emitting layer (/electron transporting layer);
- (b) hole transporting layer/first phosphorescent light emitting layer/second phosphorescent light emitting layer (/electron transporting layer);
- (c) hole transporting layer/phosphorescent light emitting layer/space layer/fluorescent light emitting layer (/electron transporting layer);
- (d) hole transporting layer/first phosphorescent light emitting layer/second phosphorescent light emitting layer/space layer/fluorescent light emitting layer (/electron transporting layer);
- (e) hole transporting layer/first phosphorescent light emitting layer/space layer/second phosphorescent light emitting layer/space layer/fluorescent light emitting layer (/electron transporting layer);
- (f) hole transporting layer/phosphorescent light emitting layer/space layer/first fluorescent light emitting layer/second fluorescent light emitting layer (/electron transporting layer);
- (g) hole transporting layer/electron blocking layer/light emitting layer (/electron transporting layer);
- (h) hole transporting layer/light emitting layer/hole blocking layer (/electron transporting layer); and
- (i) hole transporting layer/fluorescent light emitting layer/triplet blocking layer (/electron transporting layer).

[0075] The emission color of the phosphorescent light emitting layer and that of the fluorescent light emitting layer may be different. For example, the layered structure of the laminated light emitting layer (d) may be hole transporting layer/first phosphorescent light emitting layer (red emission)/second phosphorescent light emitting layer (green emission)/space layer/fluorescent light emitting layer (blue emission)/electron transporting layer.

[0076] An electron blocking layer may be disposed between the light emitting layer and the hole transporting layer or between the light emitting layer and the space layer, if necessary. Also, a hole blocking layer may be disposed between the light emitting layer and the electron transporting layer, if necessary. With such a electron blocking layer or a hole blocking layer, electrons and holes are confined in the light emitting layer to increase the degree of charge recombination in the light emitting layer, thereby improving the emission efficiency.

[0077] Representative device structure of the tandem-type organic EL device is shown below.

(2) anode/first emission unit/intermediate layer/second emission unit/cathode

[0078] The layered structure of the first emission unit and the second emission unit may be selected from those

described above with respect to the emission unit.

[0079] Generally, the intermediate layer is also called an intermediate electrode, an intermediate conductive layer, a charge generation layer, an electron withdrawing layer, a connecting layer, or an intermediate insulating layer. The intermediate layer may be formed by known materials so as to supply electrons to the first emission unit and holes to the second emission unit.

[0080] A schematic structure of an example of the organic EL device of the invention is shown in Fig. 1 wherein the organic EL device 1 is constructed by a substrate 2, an anode 3, a cathode 4, and an emission unit 10 disposed between the anode 3 and the cathode 4. The emission unit 10 includes a light emitting layer 5 which comprises at least one phosphorescent light emitting layer containing a phosphorescent host and a phosphorescent dopant. A hole injecting/transporting layer 6, etc. may be disposed between the light emitting layer 5 and the anode 3, and an electron injecting/transporting layer 7, etc. may be disposed between the light emitting layer 5 and the cathode 4. An electron blocking layer may be disposed on the anode 3 side of the light emitting layer 5, and a hole blocking layer may be disposed on the cathode 4 side of the light emitting layer 5. With these blocking layers, electrons and holes are confined in the light emitting layer 5 to increase the degree of exciton generation in the light emitting layer 5.

[0081] In the present invention, the host is referred to as a fluorescent host when combinedly used with a fluorescent dopant and as a phosphorescent host when combinedly used with a phosphorescent dopant. Therefore, the fluorescent host and the phosphorescent host are not distinguished from each other merely by the difference in their molecular structures. Namely, the term "phosphorescent host" means a material for constituting a phosphorescent emitting layer containing a phosphorescent dopant and does not mean that the material is not usable as a material for constituting a fluorescent emitting layer. The same also applies to the fluorescent host.

Substrate

[0082] The organic EL device of the invention is formed on a light-transmissive substrate. The light-transmissive substrate serves as a support for the organic EL device and preferably a flat substrate having a transmittance of 50% or more to 400 to 700 nm visible light. Examples of the substrate include a glass plate and a polymer plate. The glass plate may include a plate made of soda-lime glass, barium-strontium-containing glass, lead glass, aluminosilicate glass, borosilicate glass, barium borosilicate glass, or quartz. The polymer plate may include a plate made of polycarbonate, acryl, polyethylene terephthalate, polyether sulfide, or polysulfone.

Anode

[0083] The anode of the organic EL device injects holes to the hole transporting layer or the light emitting layer, and an anode having a work function of 4.5 eV or more is effective. Examples of material for anode include indium tin oxide alloy (ITO), tin oxide (NESA), indium zinc oxide alloy, gold, silver, platinum, and copper. The anode is formed by making the electrode material into a thin film by a method, such as a vapor deposition method or a sputtering method. When getting the light emitted from the light emitting layer through the anode, the transmittance of anode to visible light is preferably 10% or more. The sheet resistance of anode is preferably several hundreds Ω/\square or less. The film thickness of anode depends upon the kind of material and generally 10 nm to 1 μm , preferably 10 to 200 nm.

Cathode

[0084] The cathode injects electrons to the electron injecting layer, the electron transporting layer or the light emitting layer, and preferably formed from a material having a small work function. Examples of the material for cathode include, but not limited to, indium, aluminum, magnesium, magnesium-indium alloy, magnesium-aluminum alloy, aluminum-lithium alloy, aluminum-scandium-lithium alloy, and magnesium-silver alloy. Like the anode, the cathode is formed by making the material into a thin film by a method, such as the vapor deposition method and the sputtering method. The emitted light may be taken from the cathode, if appropriate.

Light emitting layer

[0085] The light emitting layer is an organic layer having a light emitting function and contains a host material and a dopant material when a doping system is employed. The major function of the host material is to promote the recombination of electrons and holes and confine excitons in the light emitting layer. The dopant material causes the excitons generated by recombination to emit light efficiently.

[0086] In case of a phosphorescent device, the major function of the host material is to confine the excitons generated on the dopant in the light emitting layer.

[0087] To control the carrier balance in the light emitting layer, a double host (host and co-host) system may be used

for the light emitting layer, for example, by combinedly using an electron transporting host and a hole transporting host.

[0088] Also, a double dopant system may be used, in which two or more kinds of dopant materials having a high quantum yield are combinedly used and each dopant material emits light with its own color. For example, to obtain a yellow emission, a light emitting layer formed by co-depositing a host, a red-emitting dopant and a green-emitting dopant is used.

[0089] In a laminate of two or more light emitting layers, electrons and holes are accumulated in the interface between the light emitting layers, and therefore, the recombination region is localized in the interface between the light emitting layers, to improve the quantum efficiency.

[0090] The light emitting layer may be different in the hole injection ability and the electron injection ability, and also in the hole transporting ability and the electron transporting ability each being expressed by mobility.


[0091] The light emitting layer is formed, for example, by a known method, such as a vapor deposition method, a spin coating method, and LB method. Alternatively, the light emitting layer may be formed by making a solution of a binder, such as resin, and the material for the light emitting layer in a solvent into a thin film by a method such as spin coating.


[0092] The light emitting layer is preferably a molecular deposit film. The molecular deposit film is a thin film formed by depositing a vaporized material or a film formed by solidifying a material in the state of solution or liquid. The molecular deposit film can be distinguished from a thin film formed by LB method (molecular build-up film) by the differences in the assembly structures and higher order structures and the functional difference due to the structural differences.


[0093] The phosphorescent dopant (phosphorescent material) is a compound which emits light by releasing the energy of excited triplet state and preferably a organometallic complex comprising at least one metal selected from Ir, Pt, Os, Au, Cu, Re, and Ru and a ligand, although not particularly limited thereto as long as emitting light by releasing the energy of excited triplet state. A ligand having an ortho metal bond is preferred. In view of obtaining a high phosphorescent quantum yield and further improving the external quantum efficiency of electroluminescence device, a metal complex comprising a metal selected from Ir, Os, and Pt is preferred, with iridium complex, osmium complex, and platinum, particularly an ortho metallated complex thereof being more preferred, iridium complex and platinum complex being still more preferred, and an ortho metallated iridium complex being particularly preferred.


[0094] The content of the phosphorescent dopant in the light emitting layer is not particularly limited and selected according to the use of the device, and preferably 0.1 to 70% by mass, and more preferably 1 to 30% by mass. If being 0.1% by mass or more, the amount of light emission is sufficient. If being 70% by mass or less, the concentration quenching can be avoided.

[0095] Preferred examples of the organometallic complex usable as the phosphorescent dopant are shown below.

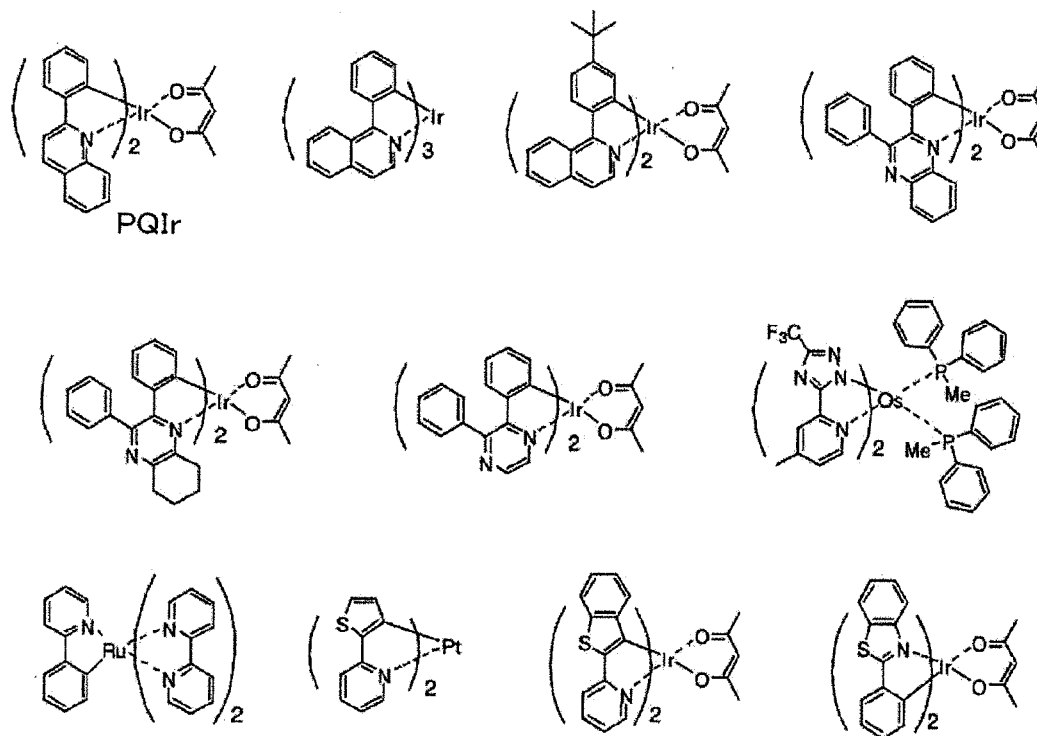

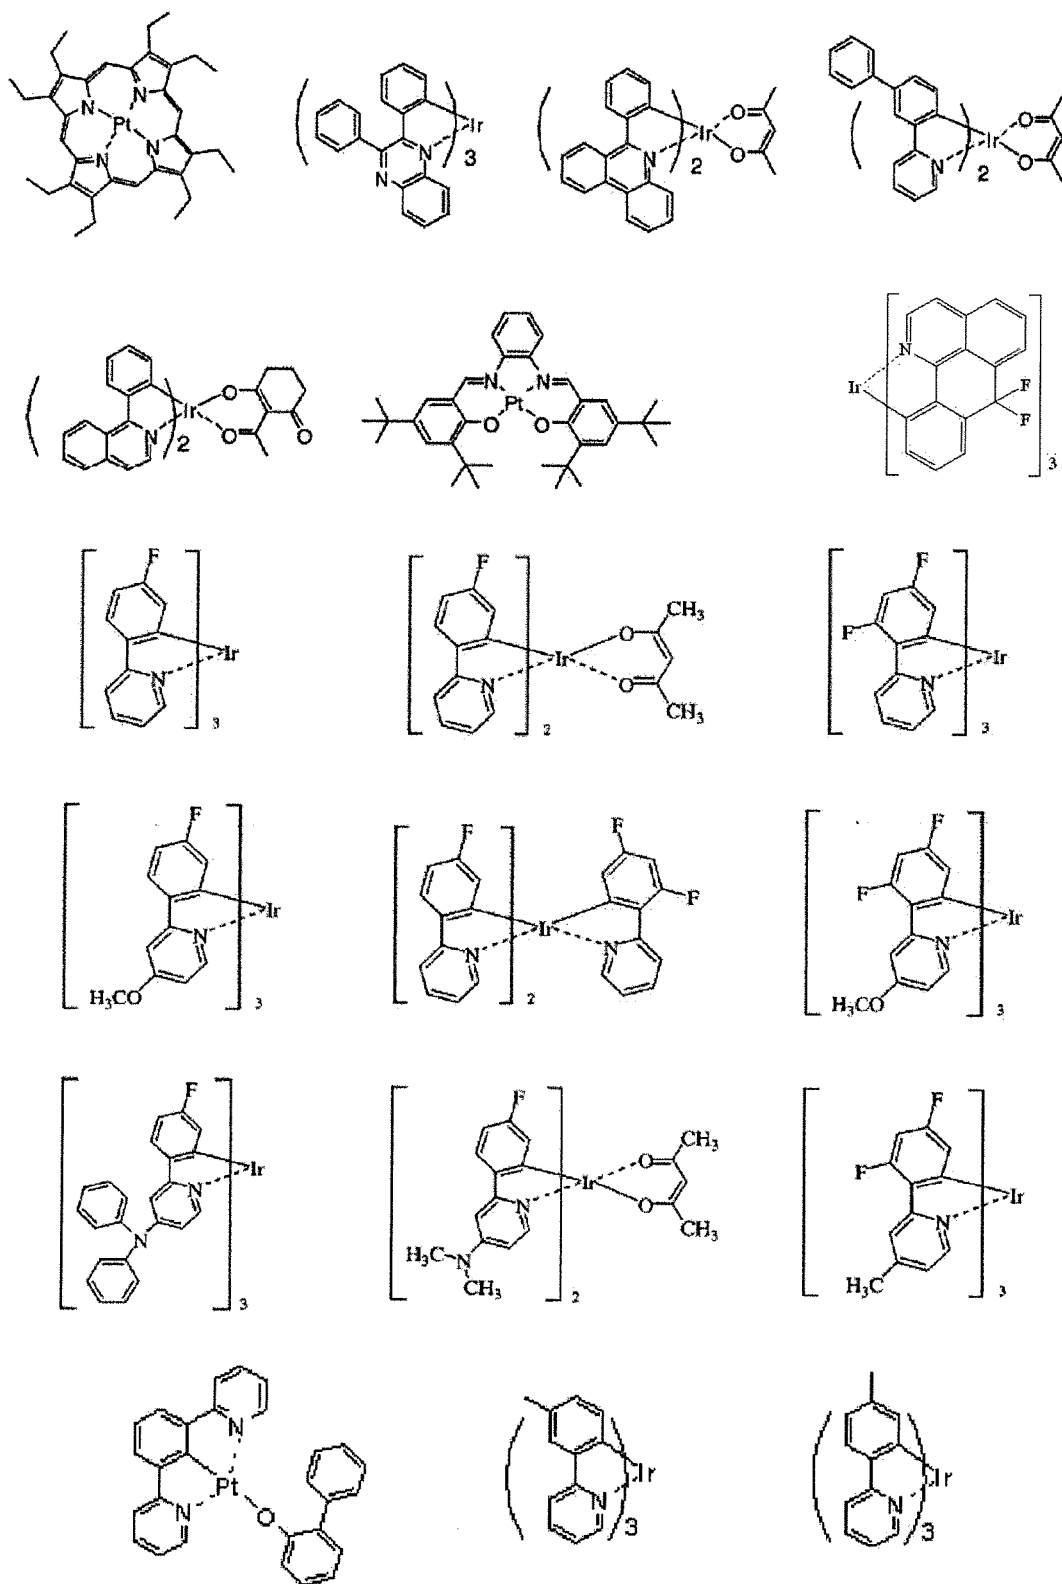



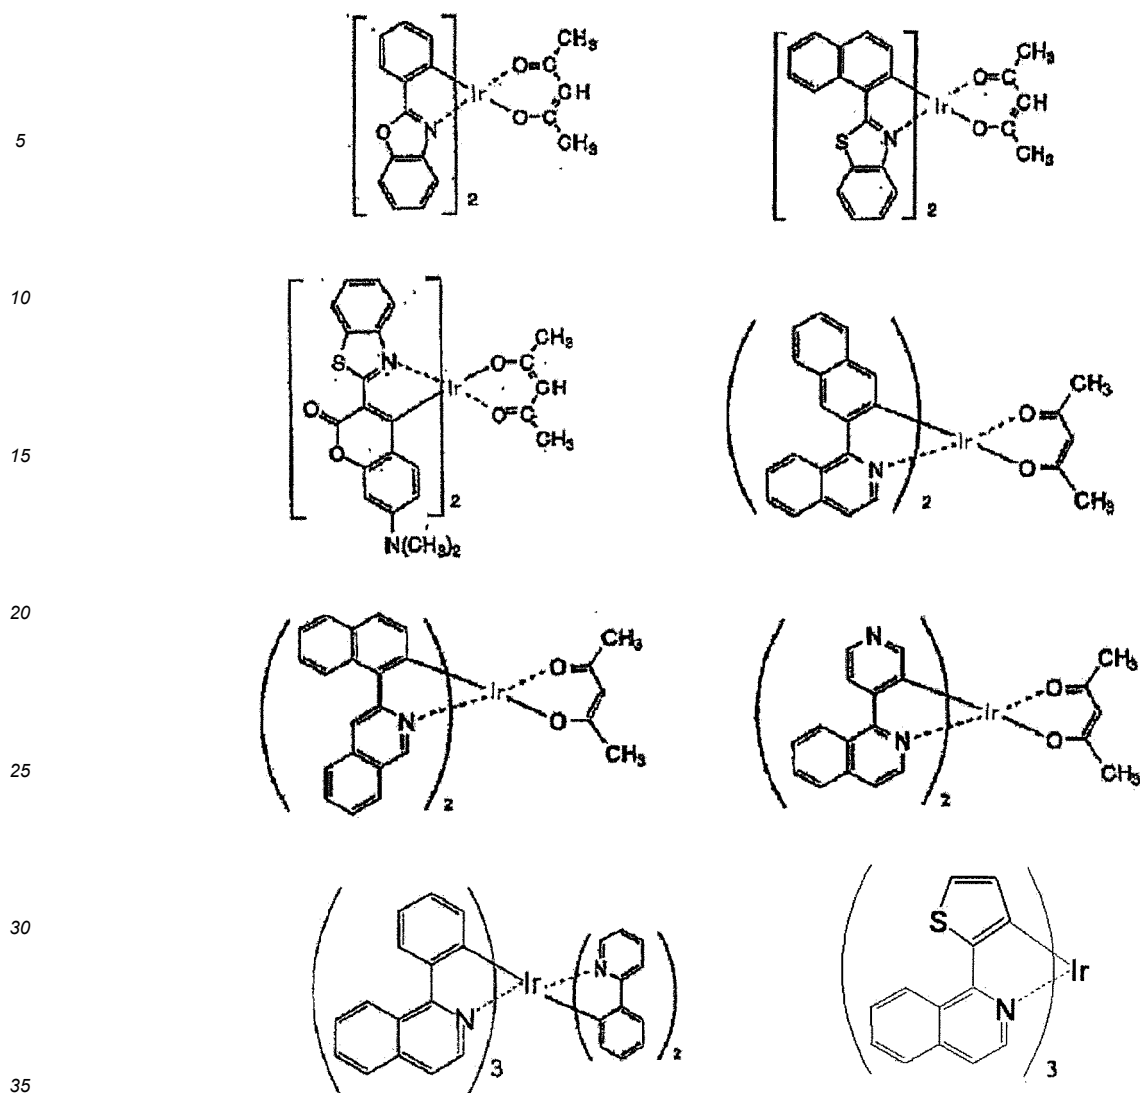


[0096] The phosphorescent host is a compound which confines the triplet energy of the phosphorescent dopant efficiently in the light emitting layer to cause the phosphorescent dopant to emit light efficiently. The material for organic EL device of the invention is useful as a phosphorescent host. In addition to the material for organic EL device of the invention, other compounds may be used as the phosphorescent host, if appropriate.

[0097] The material for organic EL device of the invention and a compound outside the invention may be combinedly used as the phosphorescent host in the same light emitting layer or may be separately used as the phosphorescent host in different light emitting layers. The material for organic EL device of the invention may be used in an organic layer other than the light emitting layer. If used in this manner, a compound outside the invention may be used as the phosphorescent host in the light emitting layer.

[0098] Examples of the compounds other than the material for organic EL device of the invention, which is suitable as the phosphorescent host, include a carbazole derivative, a triazole derivative, a oxazole derivative, an oxadiazole derivative, an imidazole derivative, a polyaryalkane derivative, a pyrazoline derivative, a pyrazolone derivative, a phenylenediamine derivative, an arylamine derivative, an amino-substituted chalcone derivative, a styrylanthracene derivative, a fluorenone derivative, a hydrazone derivative, a stilbene derivative, a silazane derivative, an aromatic tertiary amine compound, a styrylamine compound, an aromatic methylenide compound, a porphyrin compound, an anthraquinodimethane derivative, an anthrone derivative, a diphenylquinone derivative, a thiopyran dioxide derivative, a carbodiimide derivative, a fluorenylidene methane derivative, a distyrylpyrazine derivative, a tetracarboxylic anhydride of fused ring such as naphthalene and perylene, a phthalocyanine derivative, a metal complex of 8-quinolinol derivative, metal phthalocyanine, metal complexes having a ligand such as benzoxazole and benzothiazole, an electroconductive oligomer, such as a polysilane compound, a poly(N-vinylcarbazole) derivative, an aniline copolymer, thiophene oligomer, and a polythiophene, and a polymer such as a polythiophene derivative, a polyphenylene derivative, a polyphenylenevinylene derivative, and a polyfluorene derivative. These phosphorescent hosts may be used alone or in combination of

two or more. Specific examples thereof are shown below.

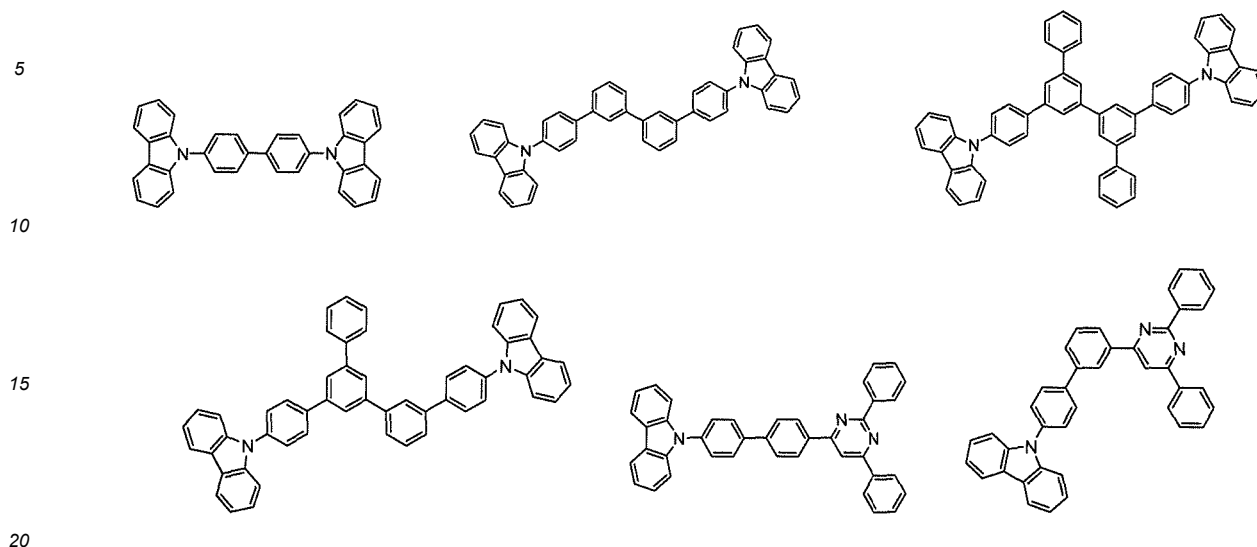

[0099] The thickness of the light emitting layer is preferably 5 to 50 nm, more preferably 7 to 50 nm, and still more preferably 10 to 50 nm. If being 5 nm or more, the light emitting layer is easily formed. If being 50 nm or less, the increase in driving voltage is avoided.

Electron-donating dopant

[0100] It is preferred for the organic EL device of the invention to contain an electron-donating dopant in the interfacial region between the cathode and the light emitting unit. With such a construction, the organic EL device has an improved luminance and an elongated lifetime. The electron-donating dopant is a metal having a work function of 3.8 eV or less or a compound containing such metal. Examples thereof include at least one compound selected from alkali metal, alkali metal complex, alkali metal compound, alkaline earth metal, alkaline earth metal complex, alkaline earth metal compound, rare earth metal, rare earth metal complex, and rare earth metal compound.

[0101] Examples of the alkali metal include Na (work function: 2.36 eV), K (work function: 2.28 eV), Rb (work function: 2.16 eV), and Cs (work function: 1.95 eV), with those having a work function of 2.9 eV or less being particularly preferred. Of the above, preferred are K, Rb, and Cs, more preferred are Rb and Cs, and most preferred is Cs. Examples of the alkaline earth metal include Ca (work function: 2.9 eV), Sr (work function: 2.0 to 2.5 eV), and Ba (work function: 2.52 eV), with those having a work function of 2.9 eV or less being particularly preferred. Examples of the rare earth metal include Sc, Y, Ce, Tb, and Yb, with those having a work function of 2.9 eV or less being particularly preferred.

[0102] Examples of the alkali metal compound include alkali oxide, such as Li_2O , Cs_2O , K_2O , and alkali halide, such as LiF, NaF, CsF, and KF, with LiF, Li_2O , and NaF being preferred. Examples of the alkaline earth metal compound include BaO, SrO, CaO, and mixture thereof, such as $\text{Ba}_x\text{Sr}_{1-x}\text{O}$ ($0 < x < 1$) and $\text{Ba}_x\text{Ca}_{1-x}\text{O}$ ($0 < x < 1$), with BaO, SrO, and CaO being preferred. Examples of the rare earth metal compound include YbF_3 , ScF_3 , ScO_3 , Y_2O_3 , Ce_2O_3 , GdF_3 , and TbF_3 , with YbF_3 , ScF_3 , and TbF_3 being preferred.

[0103] Examples of the alkali metal complex, alkaline earth metal complex, and rare earth metal are not particularly limited as long as containing at least one metal ion selected from alkali metal ions, alkaline earth metal ions, rare earth metal ions, respectively. The ligand is preferably, but not limited to, quinolinol, benzoquinolinol, acridinol, phenanthridinol, hydroxyphenyloxazole, hydroxyphenylthiazole, hydroxydiaryloxadiazole, hydroxydiarylthiadiazole, hydroxyphenylpyridine, hydroxyphenylbenzimidazole, hydroxybenzotriazole, hydroxyfulborane, bipyridyl, phenanthroline, phthalocyanine, porphyrin, cyclopentadiene, β -diketones, azomethines, and derivative thereof.

[0104] The electron-donating dopant is added to the interfacial region preferably into a form of layer or island. The electron-donating dopant is added preferably by co-depositing the electron-donating dopant with the organic compound (light emitting material, electron injecting material, etc.) for forming the interfacial region by a resistance heating deposition method, thereby dispersing the electron-donating dopant into the organic material. The disperse concentration expressed by the molar ratio of the organic material and the electron-donating dopant is 100:1 to 1:100 and preferably 5:1 to 1:5.

[0105] When the electron-donating dopant is formed into a form of layer, a light emitting material or an electron injecting material is made into a layer which serves as an organic layer in the interface, and then, the electron-donating dopant alone is deposited by a resistance heating deposition method into a layer having a thickness preferably 0.1 to 15 nm. When the electron-donating dopant is formed into a form of island, a light emitting material or an electron injecting

material is made into a form of island which serves as an organic layer in the interface, and then, the electron-donating dopant alone is deposited by a resistance heating deposition method into a form of island having a thickness preferably 0.05 to 1 nm.


[0106] The molar ratio of the main component and the electron-donating dopant in the organic electroluminescence device of the invention is preferably 5:1 to 1:5 and more preferably 2:1 to 1:2.

Electron transporting layer

[0107] The electron transporting layer is an organic layer disposed between the light emitting layer and the cathode and transports electrons from the cathode to the light emitting layer. If two or more electron transporting layers are provided, the organic layer closer to the cathode may be called an electron injecting layer in some cases. The electron injecting layer injects electrons from the cathode to the organic layer unit efficiently. The material for organic EL device of the invention may be used in the electron transporting layer as an electron transporting material.

[0108] An aromatic heterocyclic compound having one or more heteroatoms in its molecule is preferably used as the electron transporting material for the electron transporting layer, with a nitrogen-containing ring derivative being particularly preferred. The nitrogen-containing ring derivative is preferably an aromatic ring compound having a nitrogen-containing 6- or 5-membered ring or a condensed aromatic ring compound having a nitrogen-containing 6- or 5-membered ring.

[0109] The nitrogen-containing ring derivative is preferably, for example, a chelate metal complex having a nitrogen-containing ring represented by formula (A).

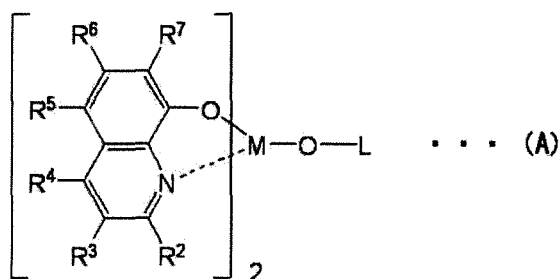

[0110] R² to R⁷ of formula (A) each independently represent a hydrogen atom, a deuterium atom, a halogen atom, a hydroxyl group, an amino group, a hydrocarbon group having 1 to 40 carbon atoms, an alkoxy group having 1 to 40 carbon atoms, an aryloxy group having 6 to 50 carbon atoms, an alkoxycarbonyl group, or a heterocyclic group having 5 to 50 carbon atoms, each being optionally substituted.

[0111] The halogen atom may include fluorine, chlorine, bromine, and iodine.

[0112] The substituted amino group may include an alkylamino group, an arylamino group, and an aralkylamino group.

[0113] The alkylamino group and the aralkylamino group are represented by -NQ¹Q², wherein Q¹ and Q² each independently represent an alkyl group having 1 to 20 carbon atoms or an aralkyl group having 1 to 20 carbon atoms. One of Q¹ and Q² may be a hydrogen atom or a deuterium atom.


[0114] The arylamino group is represented by -NAr¹Ar², wherein Ar¹ and Ar² each independently represent a non-condensed aromatic hydrocarbon group or a condensed aromatic hydrocarbon group each having 6 to 50 carbon atoms. One of Ar¹ and Ar² may be a hydrogen atom or a deuterium atom.


[0115] The hydrocarbon group having 1 to 40 carbon atoms may include an alkyl group, an alkenyl group, a cycloalkyl group, an aryl group, and an aralkyl group.

[0116] The alkoxycarbonyl group is represented by -COOY', wherein Y' is an alkyl group having 1 to 20 carbon atoms.

[0117] M is aluminum (Al), gallium (Ga), or indium (In), with In being preferred.

[0118] L is a group represented by formula (A') or (A''):






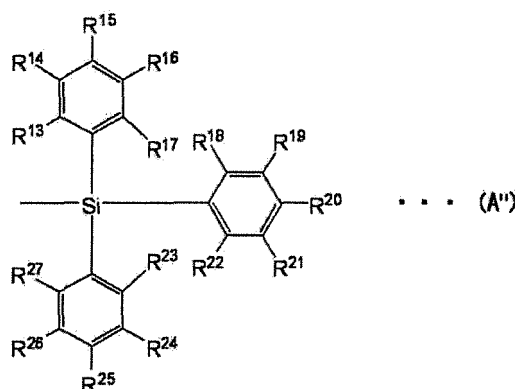

[0119] R^8 to R^{12} in formula (A') each independently represent a hydrogen atom, a deuterium atom, or a substituted or unsubstituted hydrocarbon group having 1 to 40 carbon atoms. The adjacent two groups may form a ring structure. R^{13} to R^{27} in formula (A'') each independently represent a hydrogen atom, a deuterium atom, or a substituted or unsubstituted hydrocarbon group having 1 to 40 carbon atoms. The adjacent two groups may form a ring structure.

[0120] Examples of the hydrocarbon group having 1 to 40 carbon atoms for R^8 to R^{12} and R^{13} to R^{27} in formulae (A') and (A'') are the same as those described above with respect to R^2 to R^7 . Examples of the divalent group formed by the adjacent two groups of R^8 to R^{12} and R^{13} to R^{27} which completes the ring structure include tetramethylene group, pentamethylene group, hexamethylene group, diphenylmethane-2,2'-diyl group, diphenylethane-3,3'-diyl group, and diphenylpropane-4,4'-diyl group.







[0121] The electron transporting compound for the electron transporting layer is preferably a metal complex including 8-hydroxyquinoline or its derivative, an oxadiazole derivative, and a nitrogen-containing heterocyclic derivative. Examples of the metal complex including 8-hydroxyquinoline or its derivative include a metal chelate oxinoid including a chelated oxine (generally, 8-quinolinol or 8-hydroxyquinoline), for example, tris(8-quinolinol)aluminum. Examples of the oxadiazole derivative are shown below.




[0122] In the above formulae, each of Ar^{17} , Ar^{18} , Ar^{19} , Ar^{21} , Ar^{22} , and Ar^{25} is a substituted or unsubstituted aromatic hydrocarbon group or a substituted or unsubstituted condensed aromatic hydrocarbon group each having 6 to 50 carbon atoms, and Ar^{17} and Ar^{18} , Ar^{19} and Ar^{21} , and Ar^{22} and Ar^{25} may be the same or different. Examples of the aromatic hydrocarbon group and the condensed aromatic hydrocarbon group include phenyl group, naphthyl group, biphenyl group, anthranyl group, perylenyl group, and pyrenyl group. The optional substituent may be an alkyl group having 1 to 10 carbon atoms, an alkoxy group having 1 to 10 carbon atoms or a cyano group.

[0123] Each of Ar^{20} , Ar^{23} , and Ar^{24} is a substituted or unsubstituted bivalent aromatic hydrocarbon group or a substituted or unsubstituted bivalent condensed aromatic hydrocarbon group each having 6 to 50 carbon atoms, and Ar^{23} and Ar^{24} may be the same or different. Examples of the bivalent aromatic hydrocarbon group or the bivalent condensed aromatic hydrocarbon group include phenylene group, naphthylene group, biphenylene group, anthranylene group, perylenylene group, and pyrenylene group. The optional substituent may be an alkyl group having 1 to 10 carbon atoms, an alkoxy group having 1 to 10 carbon atoms or a cyano group.

[0124] Electron transporting compounds which have a good thin film-forming property are preferably used. Examples of the electron transporting compound are shown below.

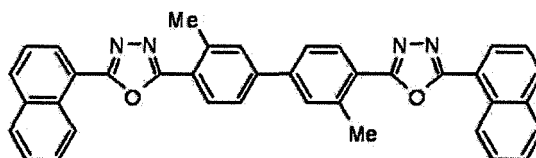

[0125] Examples of the nitrogen-containing heterocyclic derivative for use as the electron transporting compound include a nitrogen-containing heterocyclic derivative having the following formulae but exclusive of metal complex, for example, a compound having a 5- or 6-membered ring which has the skeleton represented by formula (B) or having the structure represented by formula (C).




[0126] In formula (C), X is a carbon atom or a nitrogen atom. Z₁ and Z₂ each independently represent a group of atoms for completing the nitrogen-containing heteroring.

[0127] The nitrogen-containing heterocyclic derivative is more preferably an organic compound which has a nitrogen-containing aromatic polycyclic ring comprising a 5-membered ring or a 6-membered ring. If two or more nitrogen atoms are included, the nitrogen-containing aromatic polycyclic compound preferably has a skeleton of a combination of (B) and (C) or a combination of (B) and (D).




[0128] The nitrogen-containing group of the nitrogen-containing aromatic polycyclic compound is selected, for example, from the nitrogen-containing heterocyclic groups shown below.

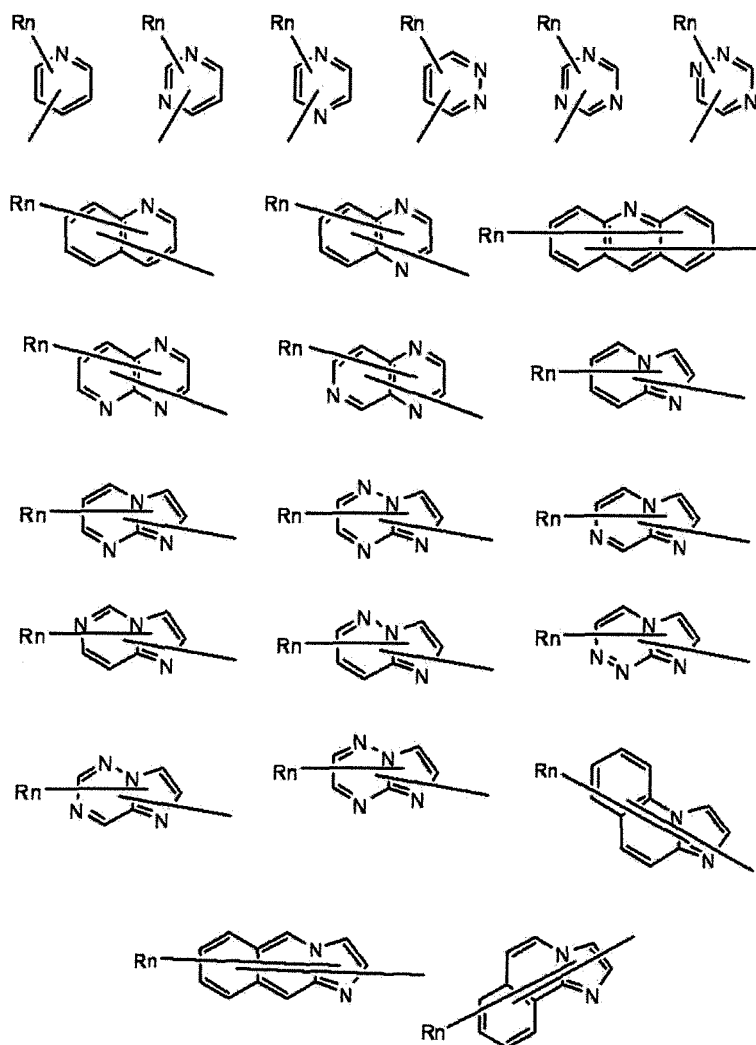


[0129] In the above formulae, R is an aromatic hydrocarbon group or a condensed aromatic hydrocarbon group each having 6 to 40 carbon atoms, an aromatic heterocyclic group or a condensed aromatic heterocyclic group each having 3 to 40 carbon atoms, an alkyl group having 1 to 20 carbon atoms, or an alkoxy group having 1 to 20 carbon atoms; and n is an integer of 0 to 5. If n is an integer of 2 or more, R groups may be the same or different.


[0130] More preferred is a nitrogen-containing heterocyclic derivative represented by the following formula:



wherein HAr is a substitute or unsubstituted nitrogen-containing heterocyclic group having 3 to 40 carbon atoms; L¹ is a single bond, a substituted or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group each having 6 to 40 carbon atoms, or a substituted or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group each having 3 to 40 carbon atoms; Ar¹ is a substitute or unsubstituted divalent aromatic hydrocarbon group having 6 to 40 carbon atoms; and Ar² is a substitute or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group each having 6 to 40 carbon atoms or a substituted or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group each having 3 to 40 carbon atoms.

[0131] HAr is selected, for example, from the following groups:





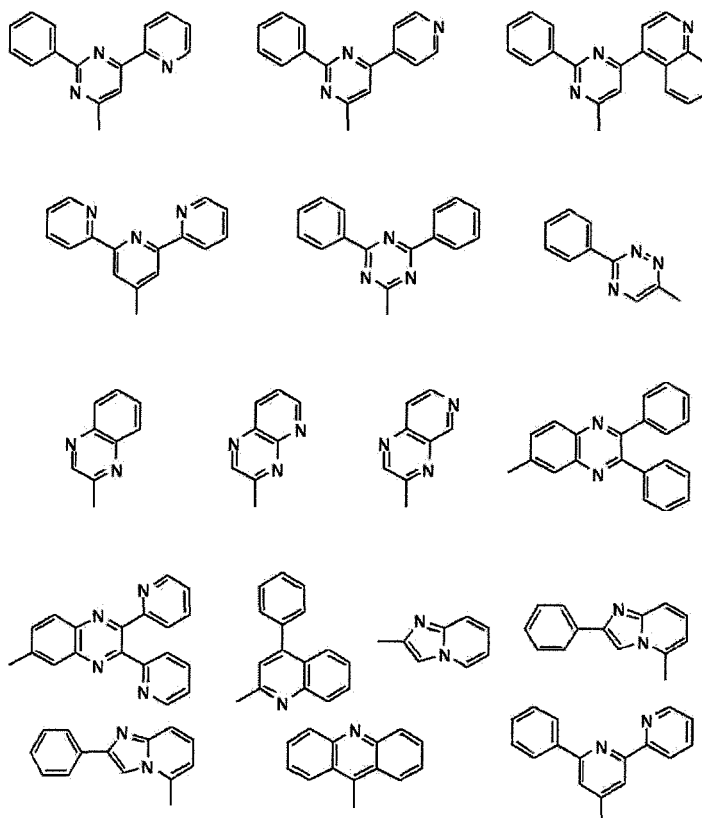

[0132] L¹ is selected, for example, from the following groups:




[0133] Ar¹ is selected, for example, from the following arylanthranyl groups represented by formula (D2) or (D3):

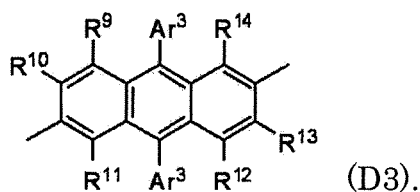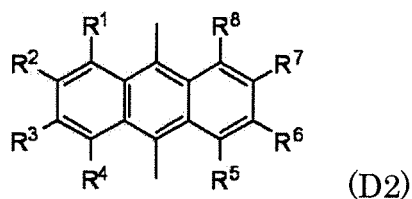


[0134] In the above formulae (D2) and (D3), R¹ to R¹⁴ are each independently a hydrogen atom, a deuterium atom, a halogen atom, an alkyl group having 1 to 20 carbon atoms, an alkoxy group having 1 to 20 carbon atoms, an aryloxy group having 6 to 40 carbon atoms, a substituted or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group each having 6 to 40 carbon atoms, or a substituted or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group each having 3 to 40 carbon atoms; and Ar³ is a substituted or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group each having 6 to 40 carbon atoms or a substituted

or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group each having 3 to 40 carbon atoms. R^1 to R^8 may be all selected from a hydrogen atom and a deuterium atom.

[0135] Ar^2 is selected, for example, from the following groups:

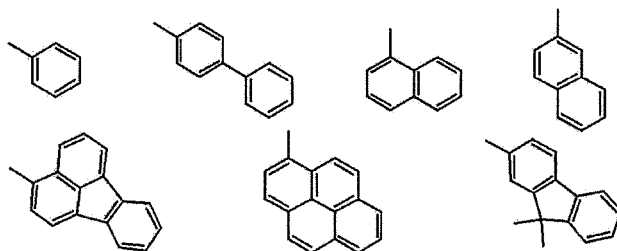


[0136] In addition, the following compound is preferably used as the nitrogen-containing aromatic polycyclic compound for use as the electron transporting compound.

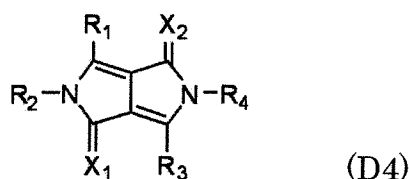


[0137] In the formula (D4), R_1 to R_4 each independently represent a hydrogen atom, a deuterium atom, a substituted or unsubstituted aliphatic group having 1 to 20 carbon atoms, a substituted or unsubstituted alicyclic group having 3 to 20 carbon atoms, a substituted or unsubstituted aromatic group having 6 to 50 carbon atoms, or a substituted or unsubstituted heterocyclic group having 3 to 50 carbon atoms; and X_1 and X_2 each independently represent an oxygen atom, a sulfur atom, or dicyanomethylene group.

[0138] Further, the following compound is also suitable as the electron transporting compound.

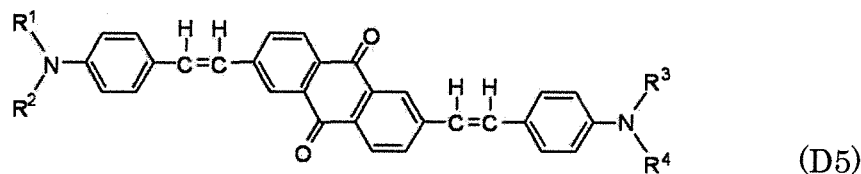




[0139] In the formula (D5), R^1 , R^2 , R^3 , and R^4 may be the same or different and each represents an aromatic hydrocarbon group or a condensed aromatic hydrocarbon group each represented by the following formula (D6):



[0140] In the formula (D6), R^5 , R^6 , R^7 , R^8 , and R^9 may be the same or different and each represents a hydrogen atom, a deuterium atom, a saturated or unsaturated alkoxy group having 1 to 20 carbon atoms, a saturated or unsaturated alkyl group having 1 to 20 carbon atoms, an amino group, or an alkylamino group having 1 to 20 carbon atoms. At least one of R^5 , R^6 , R^7 , R^8 , and R^9 is a group other than hydrogen atom and deuterium atom.

[0141] Further, a polymer having the nitrogen-containing heterocyclic group or the nitrogen-containing heterocyclic derivative is also usable as the electron transporting compound.

[0142] It is particularly preferred for the electron transporting layer of the organic EL of the invention to contain at least one of the nitrogen-containing heterocyclic derivatives represented by the following formulae (E) to (G).

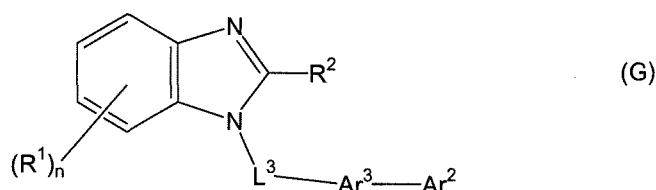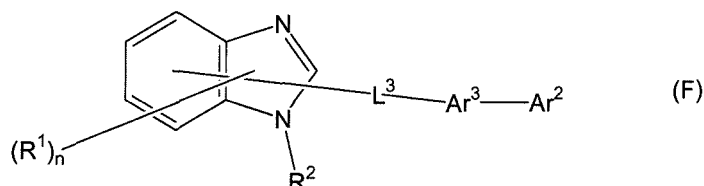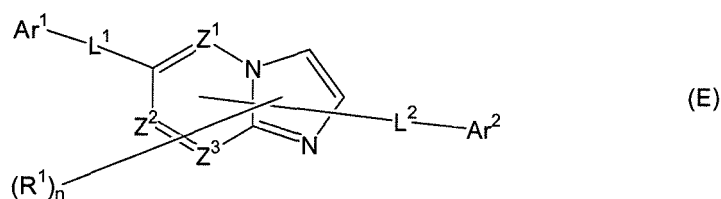

25 **[0143]** In the formulae (E) to (G), Z¹, Z², and Z³ each independently represent a nitrogen atom or a carbon atom.

[0144] R¹ and R² each independently represent a substituted or unsubstituted aryl group having 6 to 50 ring carbon atoms, a substituted or unsubstituted heteroaryl group having 5 to 50 ring atoms, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted haloalkyl group having 1 to 20 carbon atoms, or a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms.

30 **[0145]** The subscript n is an integer of 0 to 5. If n is an integer of 2 or more, R¹ groups may be the same or different from each other. The adjacent two R¹ groups may bond to each other to form a substituted or unsubstituted hydrocarbon ring.

[0146] Ar¹ represents a substituted or unsubstituted aryl group having 6 to 50 ring carbon atoms or a substituted or unsubstituted heteroaryl group having 5 to 50 ring atoms.

35 **[0147]** Ar² represents a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted haloalkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted alkoxy group having 1 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 50 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 5 to 50 ring atoms.

[0148] However, one of Ar¹ and Ar² is a substituted or unsubstituted condensed aromatic hydrocarbon group having 10 to 50 ring carbon atoms or a substituted or unsubstituted condensed aromatic heterocyclic group having 9 to 50 ring atoms.

[0149] Ar³ represents a substituted or unsubstituted arylene group having 6 to 50 ring carbon atoms or a substituted or unsubstituted heteroarylene group having 5 to 50 ring atoms.

45 **[0150]** L¹, L², and L³ each independently represent a single bond, a substituted or unsubstituted arylene group having 6 to 50 ring carbon atoms or a substituted or unsubstituted divalent condensed aromatic heterocyclic group having 9 to 50 ring atoms.

[0151] Examples of the aryl group having 6 to 50 ring carbon atoms include phenyl group, naphthyl group, anthryl group, phenanthryl group, naphthacenyl group, chrysenyl group, pyrenyl group, biphenyl group, terphenyl group, tolyl group, fluoranthenyl group, and fluorenyl group.

50 **[0152]** Examples of the heteroaryl group having 5 to 50 ring atoms include pyrrolyl group, furyl group, thienyl group, silolyl group, pyridyl group, quinolyl group, isoquinolyl group, benzofuryl group, imidazolyl group, pyrimidyl group, carbazolyl group, selenophenyl group, oxadiazolyl group, triazolyl group, pyrazinyl group, pyridazinyl group, triazinyl group, quinoxalinyl group, acridinyl group, imidazo[1,2-a]pyridinyl group, and imidazo[1,2-a]pyrimidinyl.

[0153] Examples of the alkyl group having 1 to 20 carbon atoms include methyl group, ethyl group, propyl group, butyl group, pentyl group, and hexyl group.

55 **[0154]** Examples of the haloalkyl group having 1 to 20 carbon atoms include the groups obtained by replacing one or more hydrogen atoms of the alkyl group mentioned above with at least one halogen atom selected from fluorine, chlorine, iodine, and bromine.

[0155] Examples of the alkyl moiety of the alkoxy group having 1 to 20 carbon atoms include the alkyl group mentioned above.

[0156] Examples of the arylene groups include the groups obtained by removing one hydrogen atom from the aryl group mentioned above.

[0157] Examples of the divalent condensed aromatic heterocyclic group having 9 to 50 ring atoms include the groups obtained by removing one hydrogen atom from the condensed aromatic heterocyclic group mentioned above as the heteroaryl group.

[0158] The thickness of the electron transporting layer is preferably 1 to 100 nm, although not particularly limited thereto.

[0159] The electron injecting layer which may be formed adjacent to the electron transporting layer preferably includes an inorganic compound, such as an insulating material and a semiconductor in addition to the nitrogen-containing ring derivative. The insulating material or semiconductor incorporated into the electron injecting layer effectively prevents the leak of electric current to enhance the electron injecting properties.

[0160] The insulating material is preferably at least one metal compound selected from the group consisting of alkali metal chalcogenides, alkaline earth metal chalcogenides, alkali metal halides and alkaline earth metal halides. The alkali metal chalcogenide, etc. incorporated into the electron injecting layer further enhances the electron injecting properties. Preferred examples of the alkali metal chalcogenides include Li_2O , K_2O , Na_2S , Na_2Se and Na_2O , and preferred examples of the alkaline earth metal chalcogenides include CaO , BaO , SrO , BeO , BaS and CaSe . Preferred examples of the alkali metal halides include LiF , NaF , KF , LiCl , KCl and NaCl . Examples of the alkaline earth metal halides include fluorides such as CaF_2 , BaF_2 , SrF_2 , MgF_2 and BeF_2 and halides other than fluorides.


[0161] Examples of the semiconductor may include oxide, nitride or oxynitride each containing at least one element selected from the group consisting of Ba, Ca, Sr, Yb, Al, Ga, In, Li, Na, Cd, Mg, Si, Ta, Sb and Zn. The semiconductor may be used singly or in combination of two or more. The inorganic compound forming the electron injecting layer preferably forms a microcrystalline or amorphous insulating thin film. When the electron injecting layer is formed from such an insulating thin film, the thin film is made more uniform to decrease the pixel defects such as dark spots. Examples of such inorganic compound include alkali metal chalcogenides, alkaline earth metal chalcogenides, alkali metal halides and alkaline earth metal halide, each being described above.

[0162] The thickness of the layer including the insulating material or the semiconductor is preferably about 0.1 to 15 nm. The electron injecting layer may be included with the electron-donating dopant described above.

Hole Transporting Layer

[0163] The hole transporting layer is an organic layer formed between the light emitting layer and the anode and has a function of transporting holes from the anode to the light emitting layer. When the hole transporting layer is formed by two or more layers, the layer closer to the anode may be defined as the hole injecting layer in some cases. The hole injecting layer has a function of efficiently injecting holes from the anode to the organic layer unit.

[0164] An aromatic amine compound, for example, the aromatic amine derivative represented by formula (H), is also preferably used as the material for forming the hole transporting layer.







[0165] In the formula (H), each of Ar^1 to Ar^4 represents a substituted or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group having 6 to 50 ring carbon atoms, a substituted or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group having 5 to 50 ring atoms, or a group wherein the aromatic hydrocarbon group or condensed aromatic hydrocarbon group and the aromatic heterocyclic group or condensed aromatic heterocyclic group are bonded to each other.





[0166] L represents a substituted or unsubstituted aromatic hydrocarbon group or condensed aromatic hydrocarbon group each having 6 to 50 ring carbon atoms or a substituted or unsubstituted aromatic heterocyclic group or condensed aromatic heterocyclic group each having 5 to 50 ring atoms.

[0167] Specific examples of the compound represented by the formula (H) are shown below.





5



10







15







20

25







30

35







40







45


50




55




[0168] The aromatic amine represented by the formula (J) is also preferably used as the material for forming the hole transporting layer.



[0169] In the formula (J), each of Ar¹ to Ar³ is defined in the same manner as in the definition of Ar¹ to Ar⁴ of the formula (H). The specific examples of the compounds represented by the formula (J) are shown below, although not limited thereto.

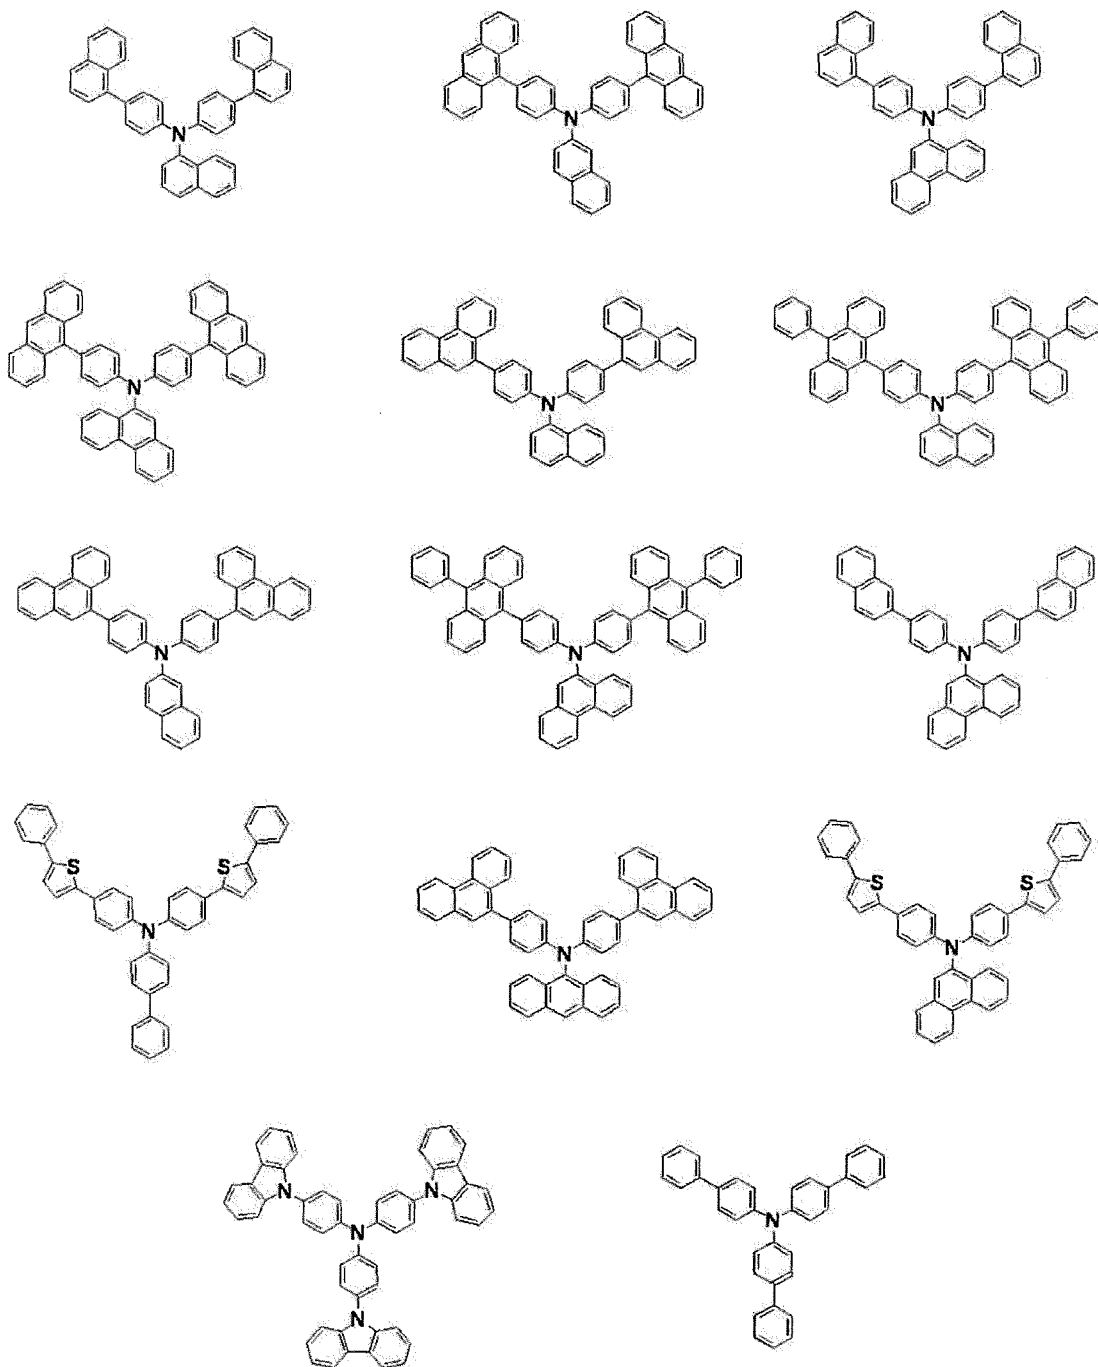

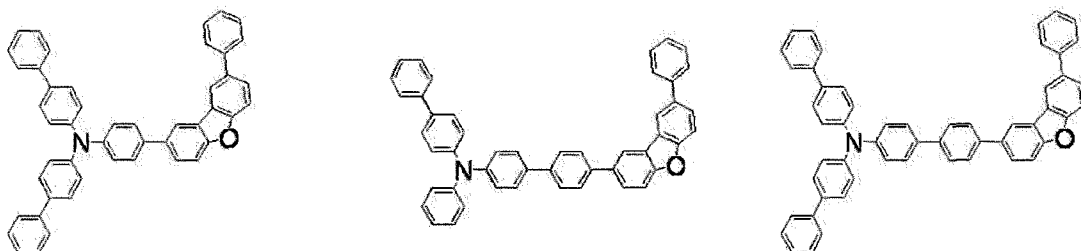


[0170] The hole transporting layer of the organic EL device of the invention may be made into two-layered structure of a first hole transporting layer (anode side) and a second hole transporting layer (cathode side).

[0171] The thickness of the hole transporting layer is preferably 10 to 200 nm, although not particularly limited thereto.

[0172] The organic EL device of the invention may have a layer comprising an acceptor material which is attached to the anode side of each of the hole transporting layer and the first hole transporting layer. With such a layer, it is expected that the driving voltage is lowered and the production cost is reduced.

[0173] The acceptor material is preferably a compound represented by the formula (K):

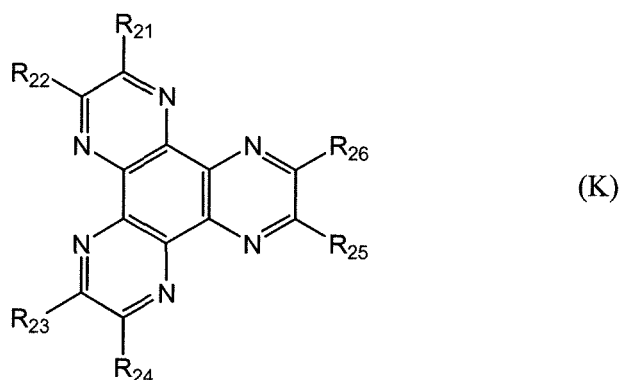

wherein R_{21} to R_{26} may be the same or different and each independently represent a cyano group, $-\text{CONH}_2$, a carboxyl group, or $-\text{COOR}_{27}$ wherein R_{27} represents an alkyl group having 1 to 20 carbon atoms or a cycloalkyl group having 3 to 20 carbon atoms. One or more of a pair of R_{21} and R_{22} , a pair of R_{23} and R_{24} , and a pair of R_{25} and R_{26} may bond to each other to form a group represented by $-\text{CO}-\text{O}-\text{CO}-$.

[0174] Examples of R_{27} include methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, isobutyl group, t-butyl group, cyclopentyl group, and cyclohexyl group.

[0175] The thickness of the layer comprising the acceptor material is preferably 5 to 20 nm, although not particularly limited thereto.

N/P Doping

[0176] The carrier injecting properties of the hole transporting layer and the electron transporting layer can be controlled by, as described in JP 3695714B, the doping (n) with a donor material or the doping (p) with an acceptor material.

[0177] A typical example of the n-doping is an electron transporting material doped with a metal, such as Li and Cs, and a typical example of the p-doping is a hole transporting material doped with an acceptor material such as, F_4TCNQ (2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane).

Space Layer

[0178] For example, in an organic EL device wherein a fluorescent light emitting layer and a phosphorescent light emitting layer are laminated, a space layer is disposed between the fluorescent light emitting layer and the phosphorescent light emitting layer to prevent the diffusion of excitons generated in the phosphorescent light emitting layer to the fluorescent light emitting layer or to control the carrier balance. The space layer may be disposed between two or more phosphorescent light emitting layers.

[0179] Since the space layer is disposed between the light emitting layers, a material combining the electron transporting ability and the hole transporting ability is preferably used for forming the space layer. To prevent the diffusion of triplet

energy in the adjacent phosphorescent light emitting layer, the triplet energy of the material for the space layer is preferably 2.6 eV or more. The materials described with respect to the hole transporting layer are usable as the material for the space layer.

Blocking Layer

[0180] The organic EL device of the invention preferably has a blocking layer, such as an electron blocking layer, a hole blocking layer, and a triplet blocking layer, which is disposed adjacent to the light emitting layer. The electron blocking layer is a layer which prevents the diffusion of electrons from the light emitting layer to the hole transporting layer. The hole blocking layer is a layer which prevents the diffusion of holes from the light emitting layer to the electron transporting layer. The material for organic EL device of the invention is also usable as the material for the hole blocking layer.

[0181] The triplet blocking layer prevents the diffusion of triplet excitons generated in the light emitting layer to adjacent layers and has a function of confining the triplet excitons in the light emitting layer, thereby preventing the deactivation of energy on molecules other than the emitting dopant of triplet excitons, for example, on molecules in the electron transporting layer.

[0182] If a phosphorescent device having a triplet blocking layer satisfies the following energy relationship:

$$E_{T_d} < E_{T_{TB}}$$

wherein E_{T_d} is the triplet energy of the phosphorescent dopant in the light emitting layer and $E_{T_{TB}}$ is the triplet energy of the compound forming the triplet blocking layer,

the triplet excitons of phosphorescent dopant are confined (not diffuse to other molecules). Therefore, the energy deactivation process other than the emission on the phosphorescent dopant may be prevented to cause the emission with high efficiency. However, even in case of satisfying the relationship of $E_{T_d} < E_{T_{TB}}$, the triplet excitons may move into other molecules if the energy difference ($\Delta E^T = E_{T_{TB}} - E_{T_d}$) is small, because the energy difference ΔE^T may be overcome by the absorption of ambient heat energy when driving a device at around room temperature as generally employed in practical drive of device. As compared with the fluorescent emission, the phosphorescent emission is relatively likely to be affected by the diffusion of excitons due to the heat absorption because the lifetime of triplet excitons is longer. Therefore, as for the energy difference ΔE^T , the larger as compared with the heat energy of room temperature, the better. The energy difference ΔE^T is more preferably 0.1 eV or more and particularly preferably 0.2 eV or more. In fluorescent devices, the material for organic EL device of the invention is usable as the material for triplet blocking layer of the TTF device described in WO 2010/134350A1.

[0183] The electron mobility of the material for the triplet blocking layer is preferably 10^{-6} cm²/Vs or more at an electric field strength in a range of 0.04 to 0.5 MV/cm. There are several methods for measuring the electron mobility of organic material, for example, Time of Flight method. In the present invention, the electron mobility is determined by impedance spectroscopy.

[0184] The electron mobility of the electron injecting layer is preferably 10^{-6} cm²/Vs or more at an electric field strength in a range of 0.04 to 0.5 MV/cm. Within the above range, the injection of electrons from the cathode to the electron transporting layer is promoted and the injection of electrons to the adjacent blocking layer and light emitting layer is also promoted, thereby enabling to drive a device at lower voltage.

EXAMPLES


[0185] The present invention will be described in more detail with reference to the examples. However, it should be noted that the scope of the invention is not limited to the following examples.

SYNTHESIS OF MATERIAL FOR ORGANIC EL DEVICE

SYNTHESIS EXAMPLE 1 (Synthesis of Compound H1)

SYNTHESIS EXAMPLE (1-1): Synthesis of Intermediate 1

[0186]

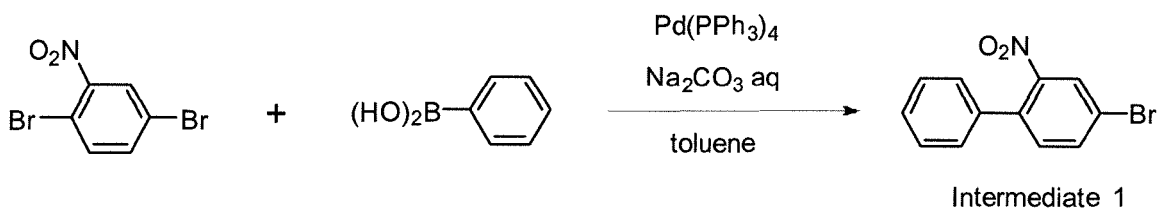


10 **[0187]** In argon stream, a mixture obtained by successively mixing 2-nitro-1,4-dibromobenzene (11.2 g, 40 mmol), phenylboronic acid (4.9 g, 40 mmol), tetrakis(triphenylphosphine)palladium (1.39 g, 1.2 mmol), toluene (120 mL), and a 2M aqueous solution of sodium carbonate (60 mL) was refluxed under heating for 8 h.

15 **[0188]** After cooling the reaction liquid to room temperature, the organic layer was separated and the organic solvent was removed from the organic layer by distillation under reduced pressure. The obtained residue was purified by a silica gel column chromatography to obtain the intermediate 1 (6.6 g, yield: 59%). The identification of the intermediate 1 was made by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (1-2): Synthesis of Intermediate 2

20 **[0189]**

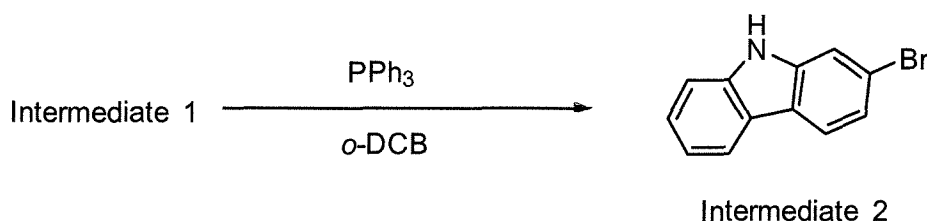


30 **[0190]** In argon stream, a mixture obtained by successively mixing the intermediate 1 (6.6 g, 23.7 mmol), triphenylphosphine (15.6 g, 59.3 mmol), and o-dichlorobenzene (24 mL) was heated at 180 °C for 8 h.

[0191] After cooling the reaction liquid to room temperature, the reaction product was purified by a silica gel column chromatography to obtain the intermediate 2 (4 g, yield: 68%). The identification of the intermediate 2 was made by FD-MS (field desorption mass spectrometry) analysis.

35 SYNTHESIS EXAMPLE (1-3): Synthesis of Intermediate 3


[0192]

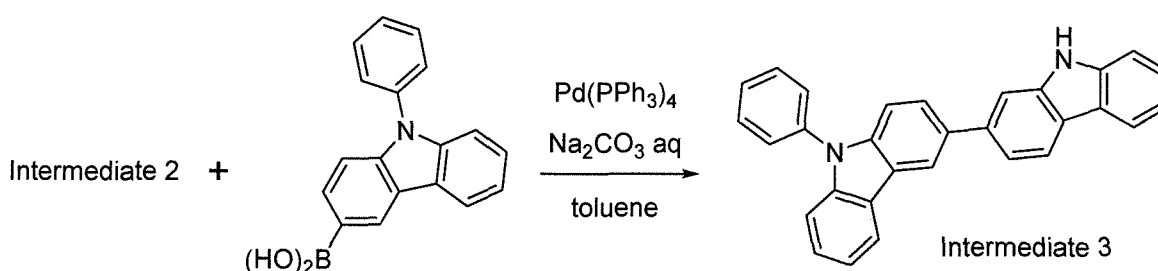

50 **[0193]** The procedure of Synthesis of Intermediate 1 was repeated except for using the intermediate 2 in place of 2-nitro-1,4-dibromobenzene and using 9-phenylcarbazole-3-ylboronic acid in place of phenylboronic acid. The obtained compound was identified as the intermediate 3 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (1-4): Synthesis of Compound H1

55 **[0194]**

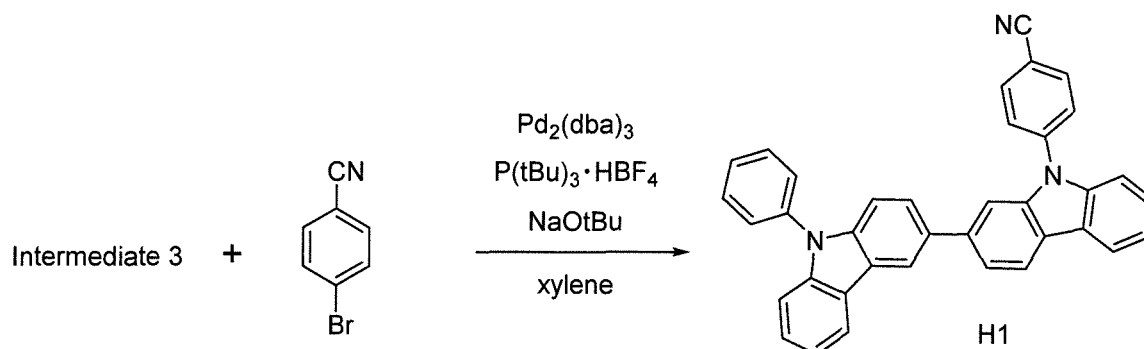

[0195] In argon stream, a mixture obtained by successively mixing the intermediate 3 (1.6 g, 3.9 mmol), 4-bromobenzonitrile (0.71 g, 3.9 mmol), tris(dibenzylideneacetone)dipalladium (0.071 g, 0.078 mmol), tri-*t*-butylphosphonium tetrafluoroborate (0.091 g, 0.31 mmol), sodium *t*-butoxide (0.53 g, 5.5 mmol), and dry toluene (20 mL) was refluxed under heating for 8 h.

[0196] After cooling the reaction liquid to room temperature, the organic layer was separated and the organic solvent was removed from the organic layer by distillation under reduced pressure. The obtained residue was purified by a silica gel column chromatography to obtain 0.79 g of white solid (H1).

[0197] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength (UV(PhMe) λ_{max}) in toluene, and maximum fluorescence wavelength (FL(PhMe, λ_{ex} = 300 nm) λ_{max}) in toluene. The results are shown below.


FDMS: calcd. for $\text{C}_{37}\text{H}_{23}\text{N}_3$ = 509, found m/z = 509 (M^+)

(UV(PhMe) λ_{max} : 324 nm

FL(PhMe, λ_{ex} = 300 nm) λ_{max} : 376 nm

SYNTHESIS EXAMPLE 2 (Synthesis of Compound H2)

[0198]

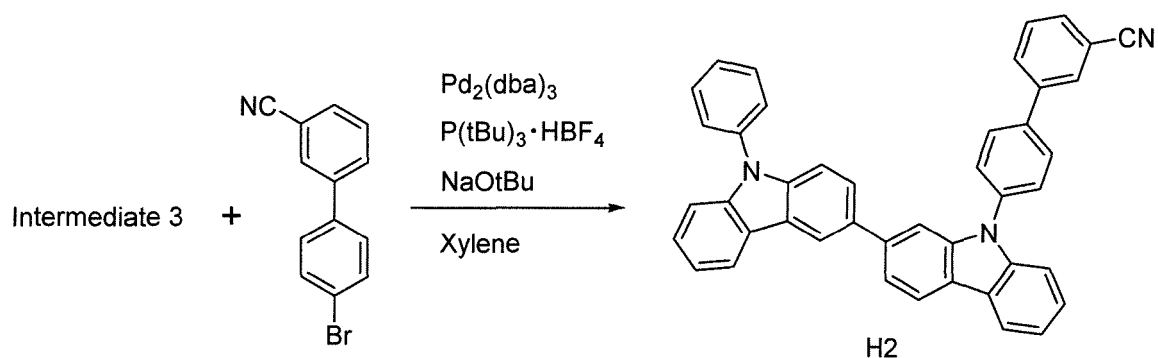

[0199] The procedure of Synthesis of Compound H1 was repeated except for using 4'-bromobiphenyl-3-carbonitrile in place of 4-bromobenzonitrile.

[0200] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength ((UV(PhMe) λ_{max}) in toluene, and maximum fluorescence wavelength (FL(PhMe, λ_{ex} = 300 nm) λ_{max}) in toluene. The results are shown below.


FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3$ = 585, found m/z = 585 (M^+)

(UV(PhMe) λ_{max} : 322 nm

FL(PhMe, λ_{ex} = 300 nm) λ_{max} : 375 nm

SYNTHESIS EXAMPLE 3 (Synthesis of Compound H3)

[0201]

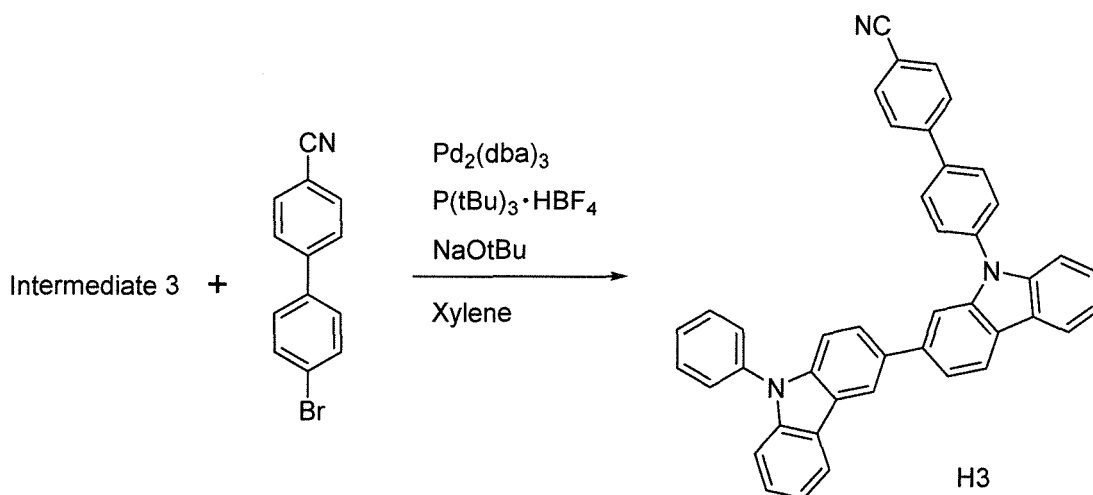

[0202] The procedure of Synthesis of Compound H1 was repeated except for using 4'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile.

[0203] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength ((UV(PhMe) λ_{max}) in toluene, and maximum fluorescence wavelength (FL(PhMe, λ_{ex} = 300 nm) λ_{max}) in toluene. The results are shown below.


FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3$ = 585, found m/z = 585 (M^+)

(UV(PhMe) λ_{max} : 324 nm

FL(PhMe, λ_{ex} = 300 nm) λ_{max} : 393 nm

SYNTHESIS EXAMPLE 4 (Synthesis of Compound H4)

[0204]

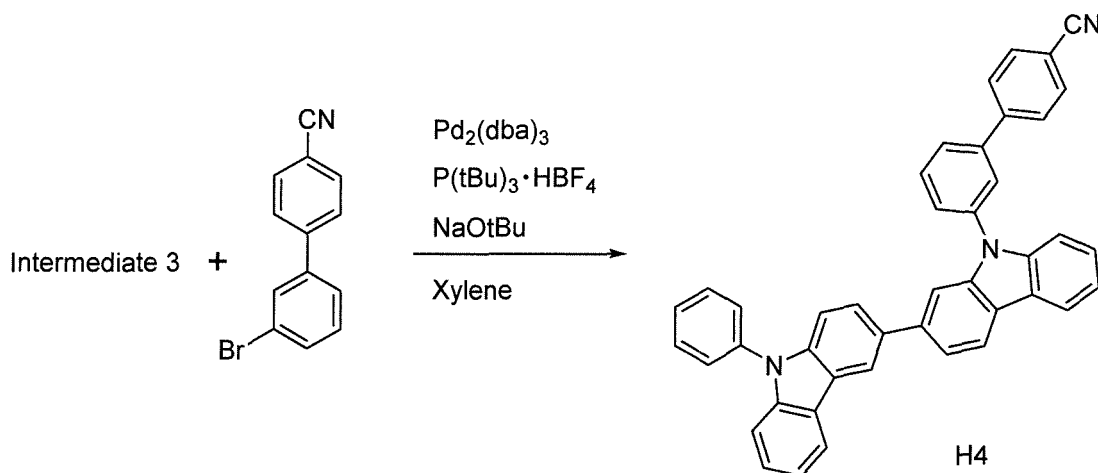

[0205] The procedure of Synthesis of Compound H1 was repeated except for using 3'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile.

[0206] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength ((UV(PhMe) λ_{max}) in toluene, and maximum fluorescence wavelength (FL(PhMe, λ_{ex} = 300 nm) λ_{max}) in toluene. The results are shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3$ = 585, found m/z = 585 (M^+)


(UV(PhMe) λ_{max} : 322 nm

FL(PhMe, λ_{ex} = 300 nm) λ_{max} : 376 nm

SYNTHESIS EXAMPLE 5 (Synthesis of Compound H5)

SYNTHESIS EXAMPLE (5-1): Synthesis of Intermediate 4

[0207]

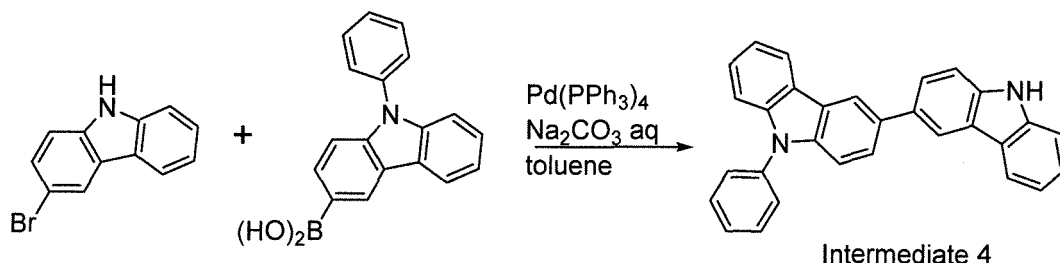


[0208] The procedure of Synthesis of Intermediate 1 was repeated except for using 3-bromocarbazole in place of 2-nitro-1,4-dibromobenzene and using 9-phenylcarbazole-3-ylboronic acid in place of phenylboronic acid.

[0209] The obtained compound was identified as the intermediate 4 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (5-2): Synthesis of Compound H5

[0210]

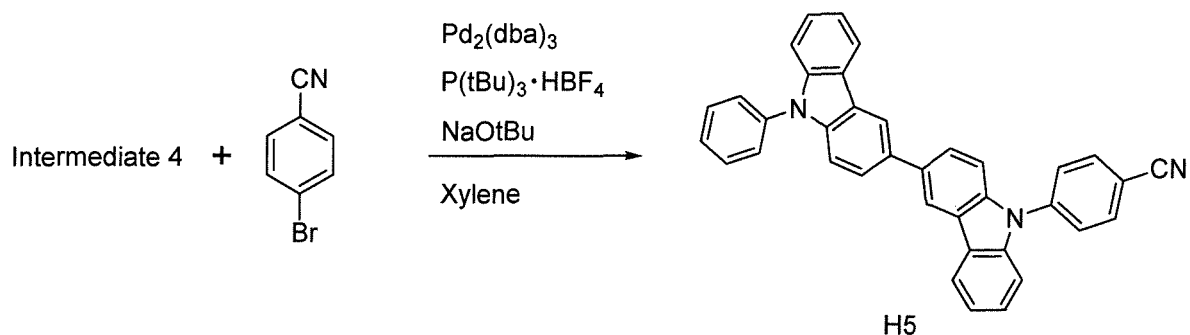

[0211] The procedure of Synthesis of Compound H1 was repeated except for using the intermediate 4 in place of the intermediate 3.

[0212] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength ((UV(PhMe) λ_{max}) in toluene, and maximum fluorescence wavelength (FL(PhMe, λ_{ex} = 300 nm) λ_{max}) in toluene. The results are shown below.


FDMS: calcd. for $\text{C}_{37}\text{H}_{23}\text{N}_3$ = 509, found m/z = 509 (M^+)

(UV(PhMe) λ_{max} : 339 nm

FL(PhMe, λ_{ex} = 300 nm) λ_{max} : 404 nm

SYNTHESIS EXAMPLE 6 (Synthesis of Compound H6)

[0213]

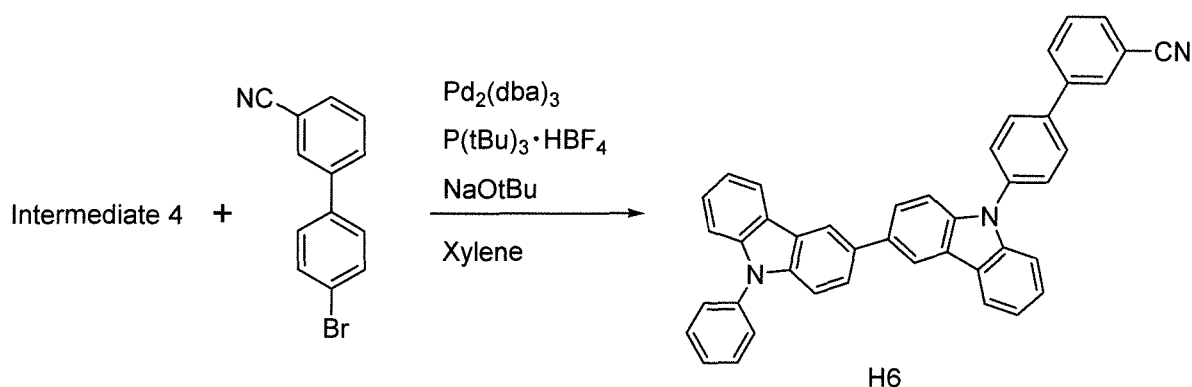


15 **[0214]** The procedure of Synthesis of Compound H1 was repeated except for using 4'-bromobiphenyl-3-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.

[0215] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)

SYNTHESIS EXAMPLE 7 (Synthesis of Compound H7)

[0216]

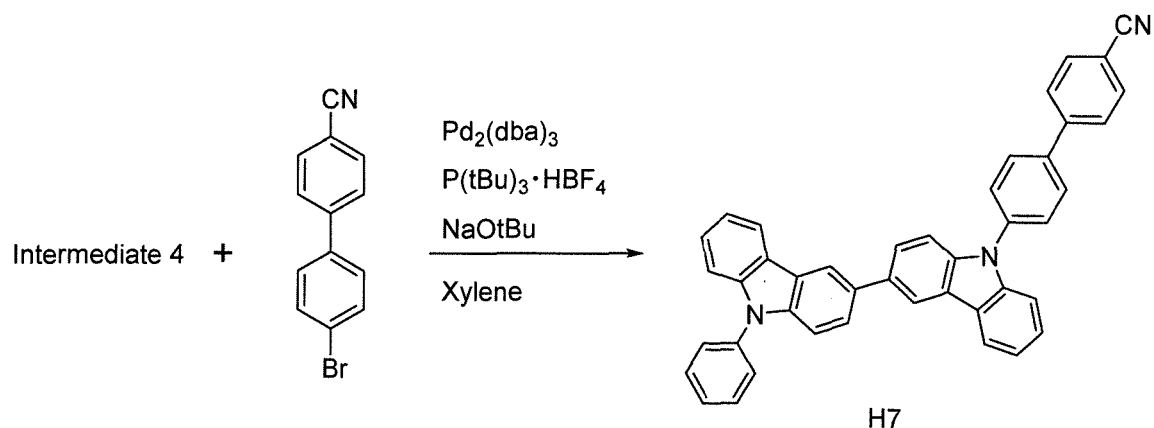


40 **[0217]** The procedure of Synthesis of Compound H1 was repeated except for using 4'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.

[0218] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)

SYNTHESIS EXAMPLE 8 (Synthesis of Compound H8)

[0219]

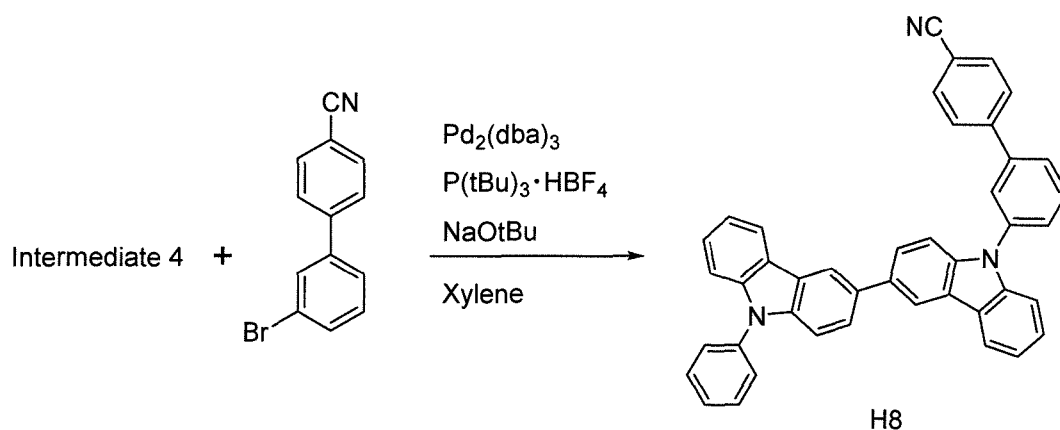


[0220] The procedure of Synthesis of Compound H1 was repeated except for using 3'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.

[0221] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)

SYNTHESIS EXAMPLE 9 (Synthesis of Compound H9)

[0222]

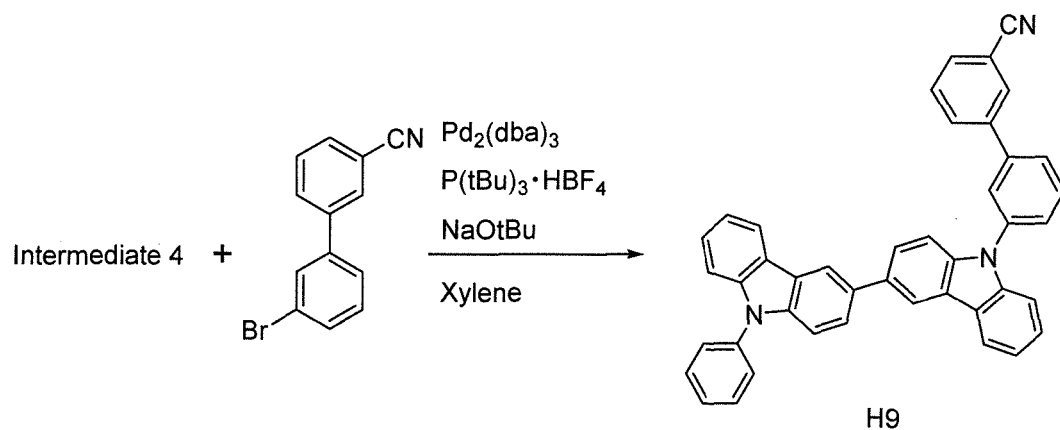

[0223] The procedure of Synthesis of Compound H1 was repeated except for using 3'-bromobiphenyl-3-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.


[0224] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)

SYNTHESIS EXAMPLE 10 (Synthesis of Compound H10)

SYNTHESIS EXAMPLE (10-1): Synthesis of Intermediate 5

[0225]

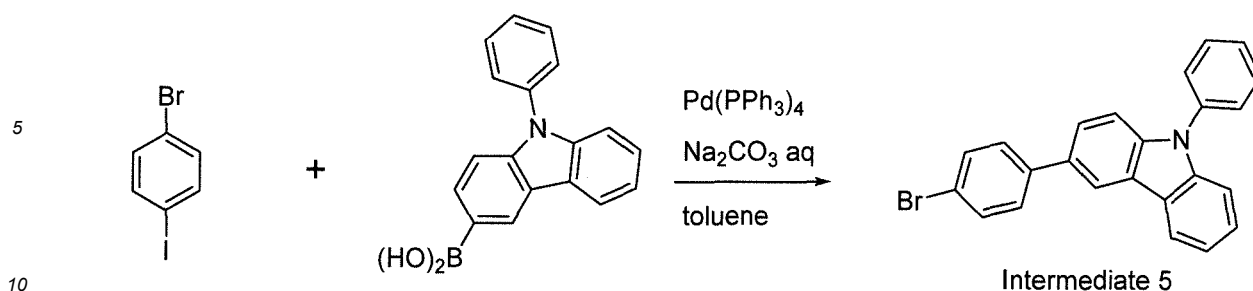


[0226] The procedure of Synthesis of Intermediate 1 was repeated except for using 1-bromo-4-iodobenzene in place of 2-nitro-1,4-dibromobenzene and using 9-phenylcarbazole-3-ylboronic acid in place of phenylboronic acid.

[0227] The obtained compound was identified as the intermediate 5 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (10-2): Synthesis of Intermediate 6

[0228]

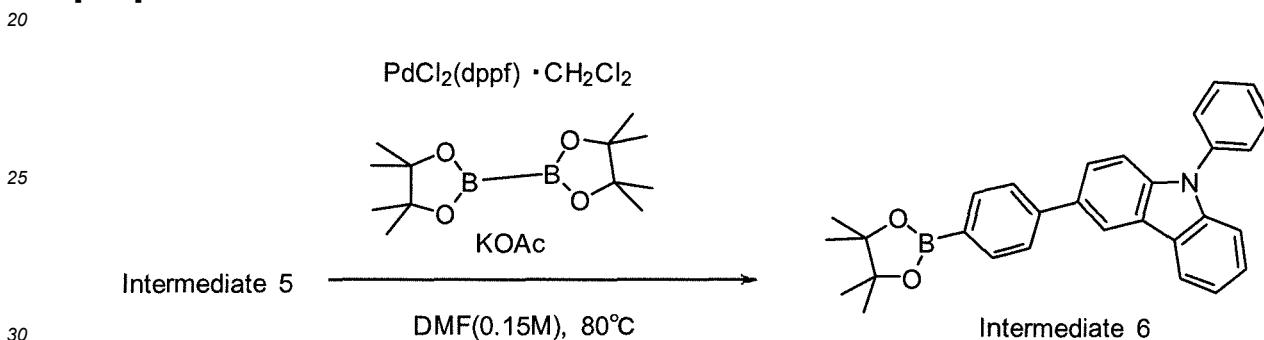


[0229] In argon stream, a mixture obtained by successively mixing the intermediate 5 (10 g, 25 mmol), bis(pinacolato)diboron (8.3 g, 33 mmol), dichloromethane adduct of [1,1'-bis(diphenylphosphino)ferrocene]palladium(II) dichloride (0.62 g, 0.75 mmol), potassium acetate (7.4 g, 75 mmol), and N,N-dimethylformamide (170 mL) was refluxed under heating for 8 h.

[0230] After cooling the reaction liquid to room temperature, the organic layer was separated and the organic solvent was removed from the organic layer by distillation under reduced pressure. The obtained residue was purified by a silica gel column chromatography to obtain the intermediate 6 (10 g, yield: 91%). The identification of the intermediate 6 was made by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (10-3): Synthesis of Intermediate 7


[0231]

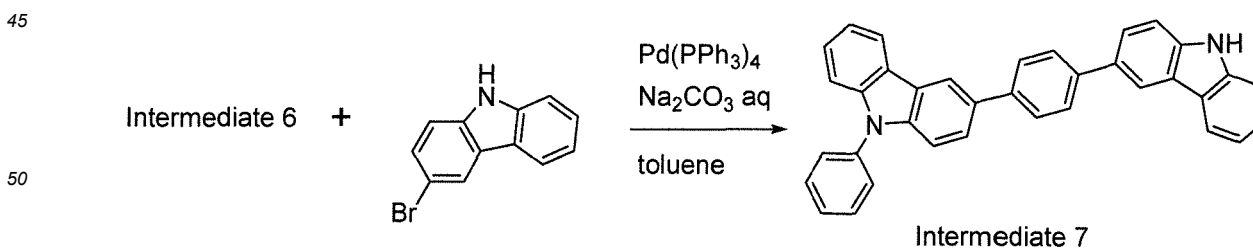

[0232] The procedure of Synthesis of Intermediate 1 was repeated except for using 3-bromocarbazole in place of 2-nitro-1,4-dibromobenzene and using the intermediate 6 in place of phenylboronic acid. The obtained compound was identified as the intermediate 7 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (10-4): Synthesis of H10

[0233]

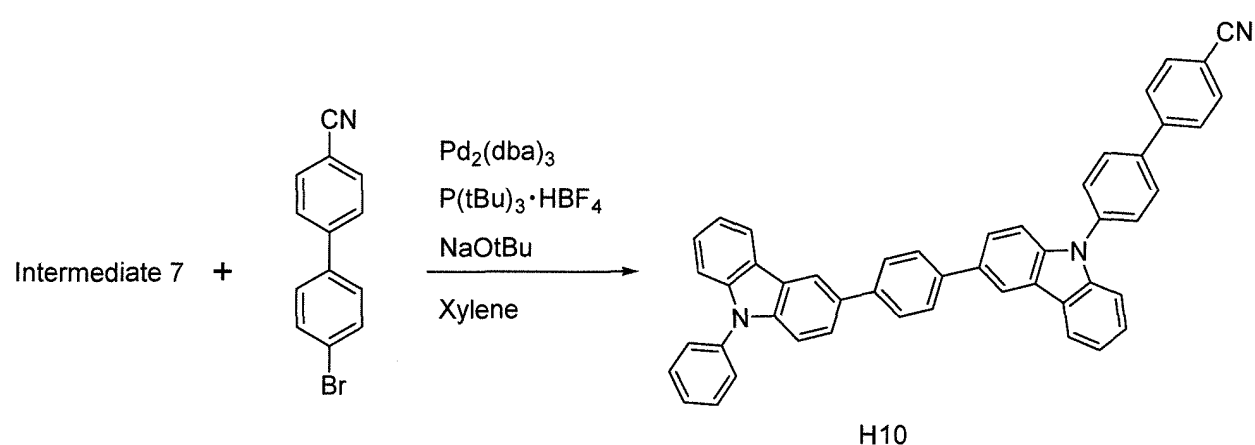


20 [0234] The procedure of Synthesis of Compound H1 was repeated except for using 4'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 7 in place of the intermediate 3.

[0235] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $C_{49}H_{31}N_3$ = 661, found m/z = 661 (M^+)

SYNTHESIS EXAMPLE 11 (Synthesis of Compound H11)

[0236]

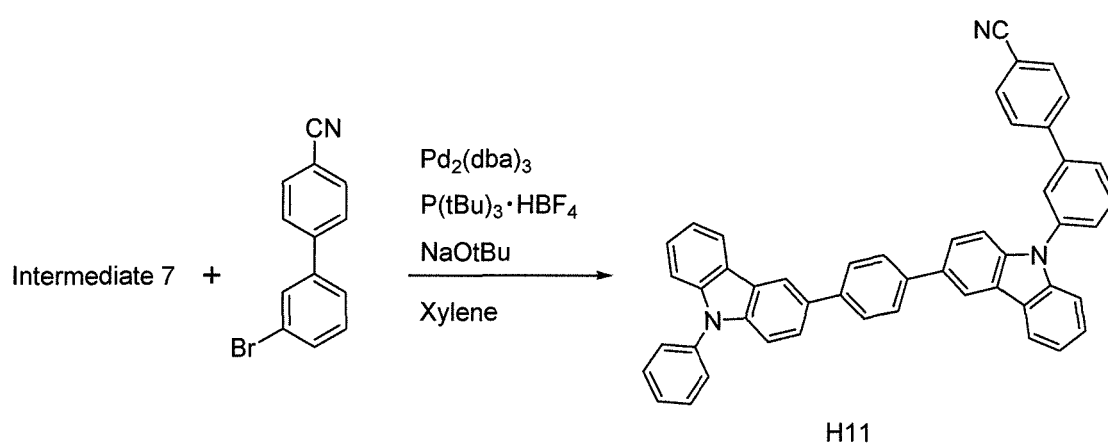


45 [0237] The procedure of Synthesis of Compound H1 was repeated except for using 3'-bromobiphenyl-4-carbonitrile in place of 4-bromobenzonitrile and using the intermediate 7 in place of the intermediate 3.

[0238] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $C_{49}H_{31}N_3$ = 661, found m/z = 661 (M^+)

SYNTHESIS EXAMPLE 12 (Synthesis of Compound H12)

[0239]

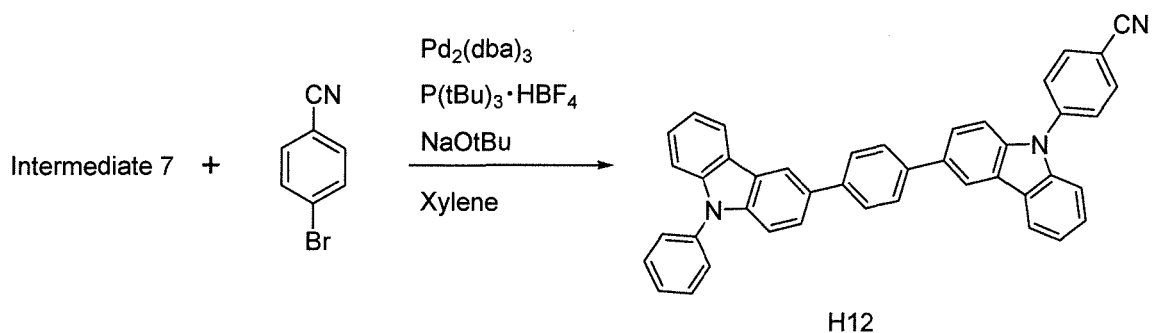


[0240] The procedure of Synthesis of Compound H1 was repeated except for using the intermediate 7 in place of the intermediate 3.

[0241] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3$ = 585, found m/z = 585 (M^+)

SYNTHESIS EXAMPLE 13 (Synthesis of Compound H13)

[0242]

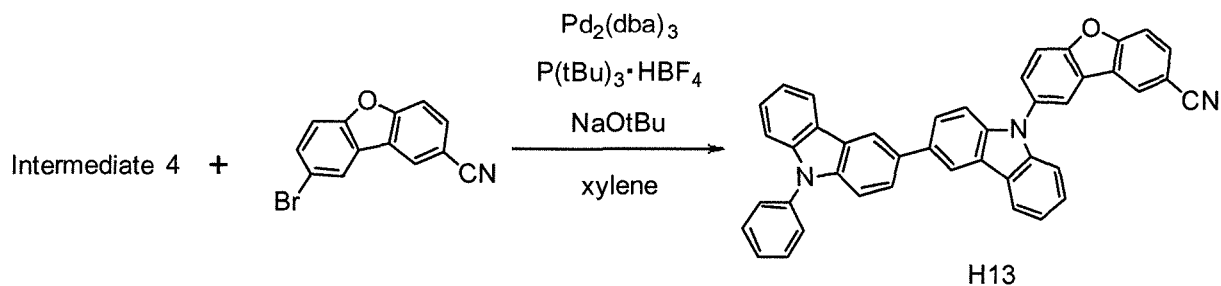


[0243] The procedure of Synthesis of Compound H1 was repeated except for using 2-bromo-8-cyanodibenzofuran in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.

[0244] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{43}\text{H}_{25}\text{N}_3\text{O}$ = 599, found m/z = 599 (M^+)

SYNTHESIS EXAMPLE 14 (Synthesis of Compound H14)

[0245]

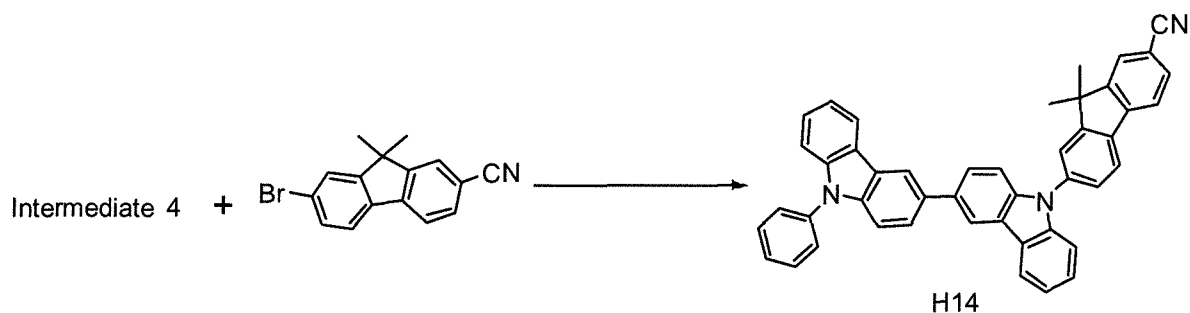

[0246] The procedure of Synthesis of Compound H1 was repeated except for using 2-bromo-7-cyano-9,9-dimethylfluorene in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3.


[0247] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $\text{C}_{46}\text{H}_{31}\text{N}_3$ = 625, found m/z = 625 (M^+)

SYNTHESIS EXAMPLE 15 (Synthesis of Compound H15)

SYNTHESIS EXAMPLE (15-1): Synthesis of Intermediate 8

[0248]

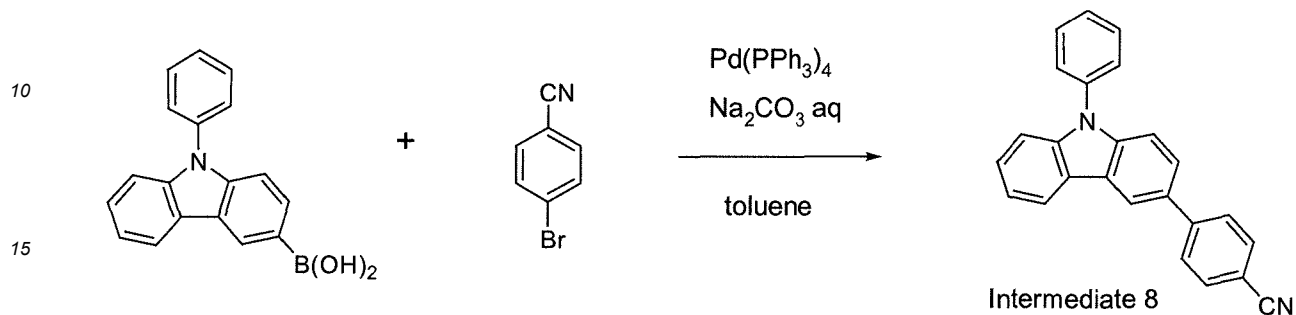

[0249] The procedure of Synthesis of Intermediate 1 was repeated except for using 4-bromobenzonitrile in place of 2-nitro-1,4-dibromobenzene and using 9-phenylcarbazole-3-ylboronic acid in place of phenylboronic acid.

[0250] The obtained compound was identified as the intermediate 8 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (15-2): Synthesis of Intermediate 9

[0251]




[0252] In argon stream, a mixture obtained by successively mixing N,N-dimethylformamide (80 mL), the intermediate 8 (5.6 g, 16.3 mmol), and N-bromosuccinimide (3.5 g, 19.5 mmol) was stirred at 0 °C for 8 h.

[0253] After returning the temperature to room temperature, the reaction liquid was added with distilled water and then filtered. The obtained solid was purified by silica gel column chromatography to obtain the intermediate 9 (6.2 g, yield: 90%). The identification of the intermediate 9 was made by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (15-3): Synthesis of Compound H15

[0254]

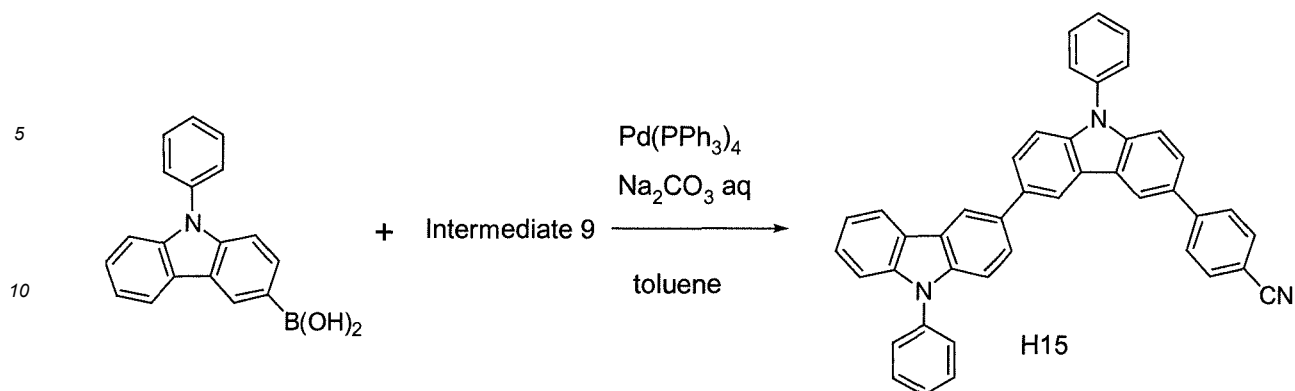

15 **[0255]** The procedure of Synthesis of Intermediate 1 was repeated except for using the intermediate 9 in place of 2-nitro-1,4-dibromobenzene and using 9-phenylcarbazole-3-ylboronic acid in place of phenylboronic acid.

[0256] The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.


FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)

20

SYNTHESIS EXAMPLE 16 (Synthesis of Compound H16)

SYNTHESIS EXAMPLE (16-1): Synthesis of Intermediate 10


25 **[0257]**

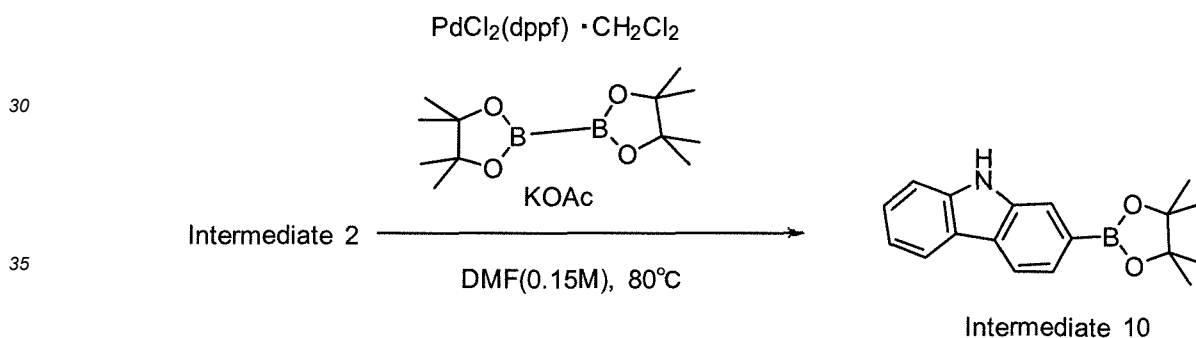

40 **[0258]** The procedure of Synthesis of Intermediate 6 was repeated except for using the intermediate 2 in place of the intermediate 5. The obtained compound was identified as the intermediate 10 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (16-2): Synthesis of Intermediate 11

45 **[0259]**

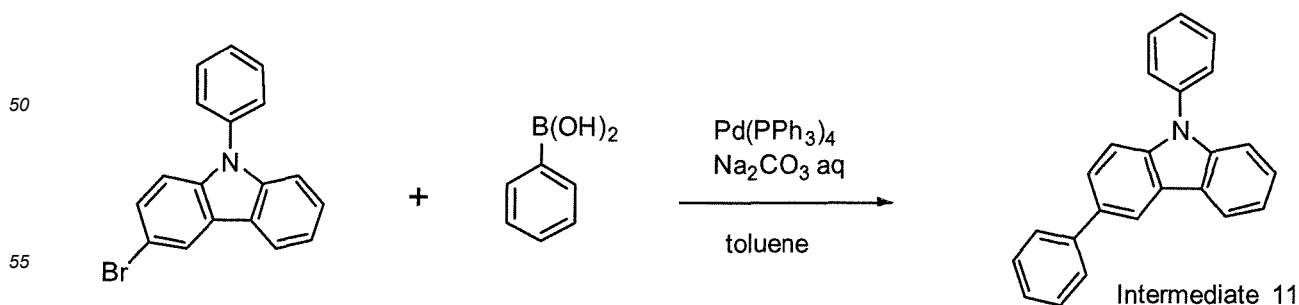


[0260] The procedure of Synthesis of Intermediate 1 was repeated except for using 3-bromo-9-phenylcarbazole in

place of 2-nitro-1,4-dibromobenzene. The obtained compound was identified as the intermediate 11 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (16-3): Synthesis of Intermediate 12


[0261]

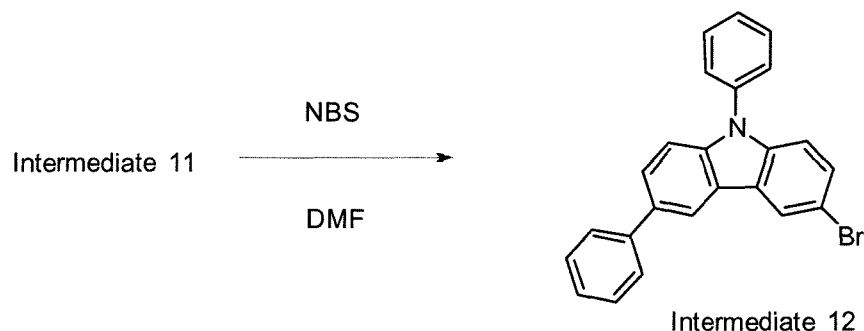

[0262] The procedure of Synthesis of Intermediate 9 was repeated except for using the intermediate 11 in place of the intermediate 8. The obtained compound was identified as the intermediate 12 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (16-4): Synthesis of Intermediate 13


[0263]

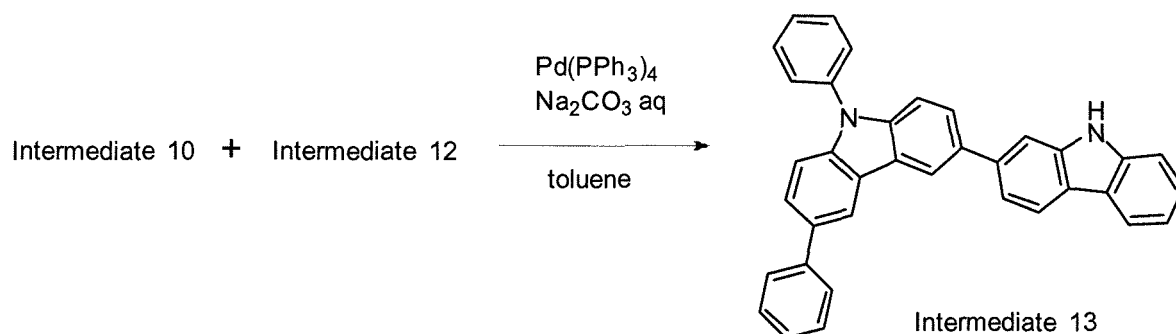

[0264] The procedure of Synthesis of Intermediate 1 was repeated except for using the intermediate 12 in place of 2-nitro-1,4-dibromobenzene and using the intermediate 10 in place of phenylboronic acid. The obtained compound was identified as the intermediate 13 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (16-5): Synthesis of Compound H16

[0265]

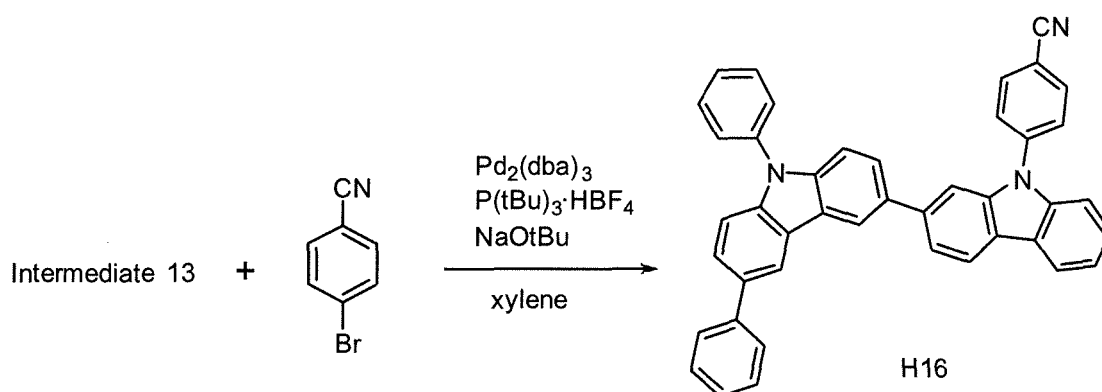

15 **[0266]** The procedure of Synthesis of Compound H1 was repeated except for using the intermediate 13 in place of the intermediate 3.

[0267] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength λ_{max} in toluene, and maximum fluorescence wavelength in toluene. The results are shown below. FDMS: calcd. for $\text{C}_{43}\text{H}_{27}\text{N}_3 = 585$, found $m/z = 585$ (M^+)


20 (UV(PhMe) λ_{max} : 310 nm

FL(PhMe, $\lambda_{\text{ex}} = 300$ nm) λ_{max} : 379 nm

SYNTHESIS EXAMPLE 17 (Synthesis of Compound H17)

25 SYNTHESIS EXAMPLE (17-1): Synthesis of Intermediate 14

[0268]

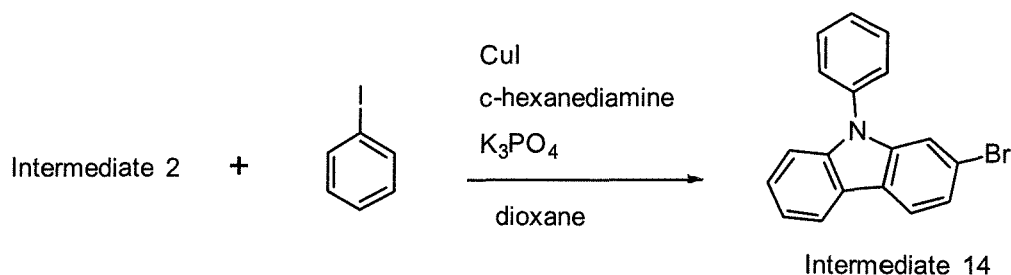


40 **[0269]** In argon stream, a mixture obtained by successively mixing the intermediate 2 (20 g, 81 mmol), iodobenzene (18.1 g, 89 mmol), copper iodide (1.5 g, 8 mmol), tripotassium phosphate (34.5 g, 163 mmol), dry dioxane (100 mL), and cyclohexanediamine (1.8g, 16 mmol) was stirred at 80 °C for 8 h.

[0270] After cooling the reaction liquid to room temperature, the organic layer was separated and the organic solvent was removed from the organic layer by distillation under reduced pressure. The obtained residue was purified by a silica gel column chromatography to obtain the intermediate 14 (18.3 g, yield: 70%). The identification of the intermediate 14 was made by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (17-2): Synthesis of Intermediate 15


[0271]

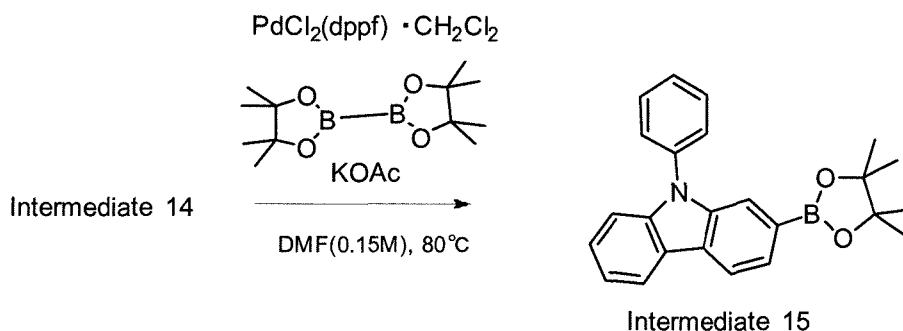

[0272] The procedure of Synthesis of Intermediate 6 was repeated except for using the intermediate 14 in place of the intermediate 5. The obtained compound was identified as the intermediate 15 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (17-3): Synthesis of Intermediate 16


[0273]

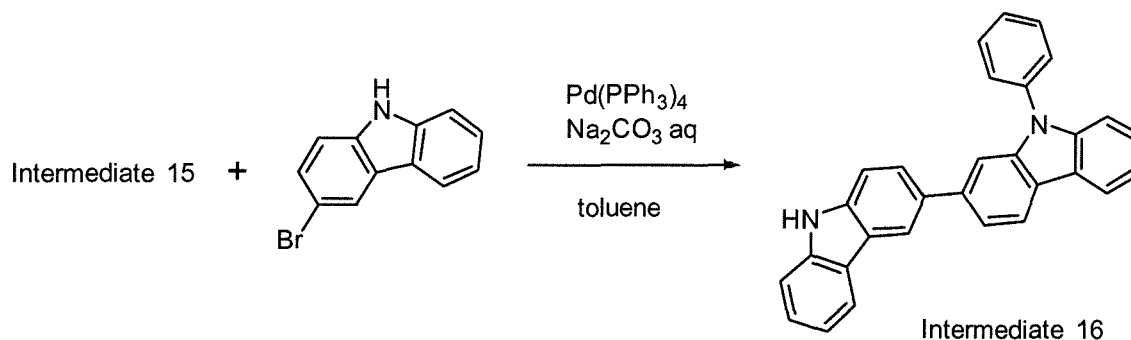

[0274] The procedure of Synthesis of Intermediate 1 was repeated except for using 3-bromocarbazole in place of 2-nitro-1,4-dibromobenzene and using the intermediate 15 in place of phenylboronic acid. The obtained compound was identified as the intermediate 16 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (17-4): Synthesis of Compound H17

[0275]

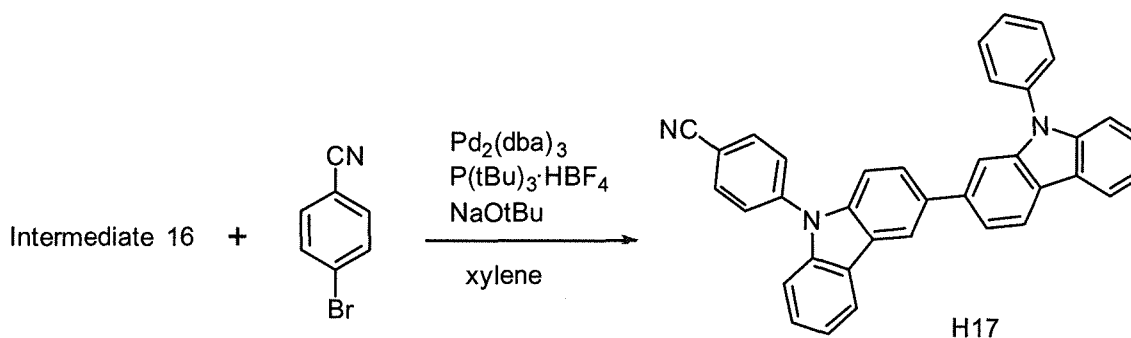


[0276] The procedure of Synthesis of Compound H1 was repeated except for using the intermediate 16 in place of the intermediate 3.

[0277] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength λ_{max} in toluene, and maximum fluorescence wavelength in toluene. The results are shown below. FDMS: calcd. for $\text{C}_{37}\text{H}_{23}\text{N}_3$ = 509, found m/z = 509 (M^+) (UV(PhMe) λ_{max} : 324 nm)

FL(PhMe, $\lambda_{\text{ex}} = 300 \text{ nm}$) λ_{max} : 376 nm

SYNTHESIS EXAMPLE 18 (Synthesis of Compound H18)

[0278]

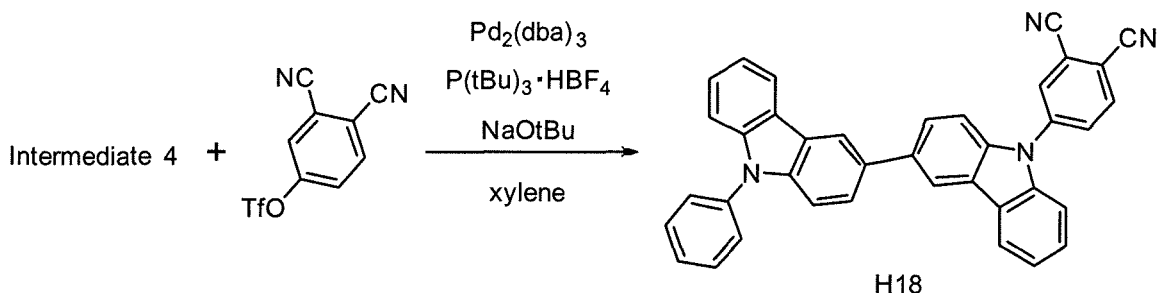

[0279] The procedure of Synthesis of Compound H1 was repeated except for using the intermediate 4 in place of the intermediate 3 and using 3,4-dicyanophenyl trifluoromethanesulfonate in place of 4-bromobenzonitrile.

[0280] The obtained compound was measured for FD-MS (field desorption mass spectrometry), maximum ultraviolet absorption wavelength λ_{max} in toluene, and maximum fluorescence wavelength in toluene. The results are shown below. FDMS: calcd. for $\text{C}_{38}\text{H}_{22}\text{N}_4 = 534$, found $m/z = 534 \text{ (M}^+)$


(UV(PhMe) λ_{max} : 377 nm

FL(PhMe, $\lambda_{\text{ex}} = 350 \text{ nm}$): λ_{max} : 488 nm

SYNTHESIS EXAMPLE 19 (Synthesis of Compound H19)

SYNTHESIS EXAMPLE (19-1): Synthesis of Intermediate 17


[0281]

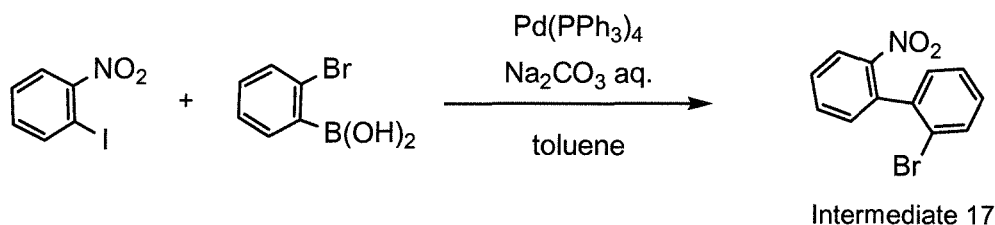

[0282] The procedure of Synthesis of Intermediate 1 was repeated except for using 2-iodonitrobenzene in place of 2-nitro-1,4-dibromobenzene and using 2-bromophenylboronic acid in place of phenylboronic acid. The obtained compound was identified as the intermediate 17 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (19-2): Synthesis of Intermediate 18

[0283]

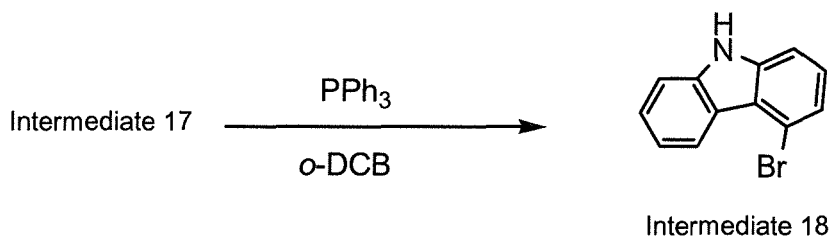


[0284] The procedure of Synthesis of Intermediate 2 was repeated except for using the intermediate 17 in place of

the intermediate 1. The obtained compound was identified as the intermediate 18 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (19-3): Synthesis of Intermediate 19


[0285]

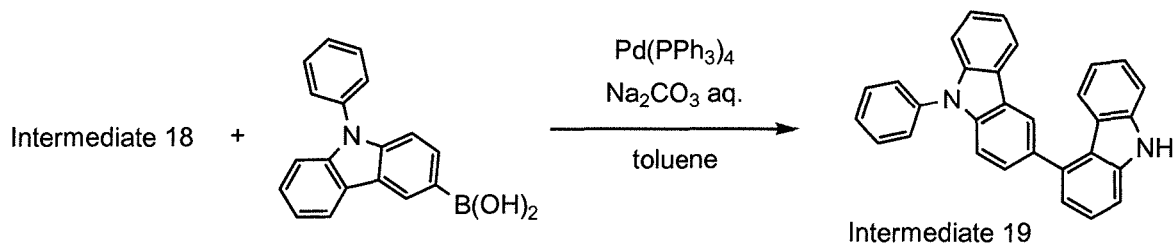

[0286] The procedure of Synthesis of Intermediate 3 was repeated except for using the intermediate 18 in place of the intermediate 2. The obtained compound was identified as the intermediate 19 by FD-MS (field desorption mass spectrometry) analysis.

SYNTHESIS EXAMPLE (19-4): Synthesis of Compound H19

[0287]

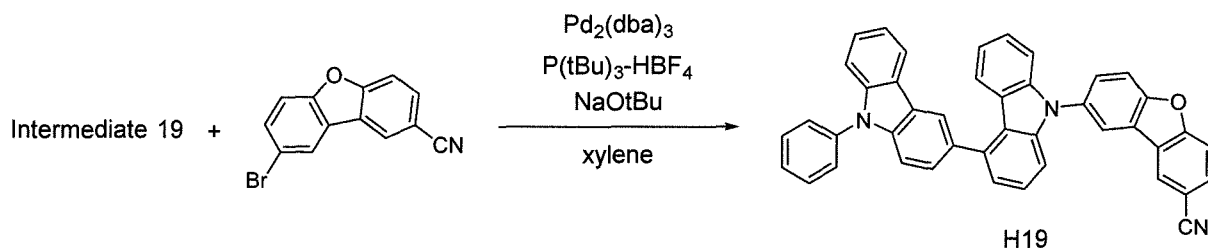


[0288] The procedure of Synthesis of Compound H13 was repeated except for using the intermediate 19 in place of the intermediate 4. The obtained compound was identified as the compound H19 by FD-MS (field desorption mass spectrometry) analysis.

FDMS: calcd. for $\text{C}_{43}\text{H}_{25}\text{N}_3\text{O}$ = 599, found m/z = 599 (M^+)

SYNTHESIS EXAMPLE 20: Synthesis of Compound H20

[0289]

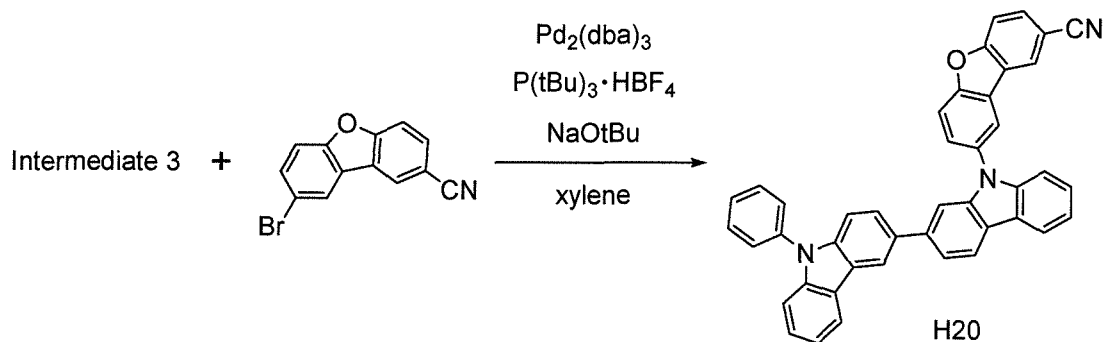


[0290] The procedure of Synthesis of Compound H1 was repeated except for using 2-bromo-8-cyanodibenzofuran in place of 4-bromobenzonitrile. The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $C_{43}H_{25}N_3O = 599$, found $m/z = 599$ (M^+)

SYNTHESIS EXAMPLE 21: Synthesis of Compound H21

[0291]

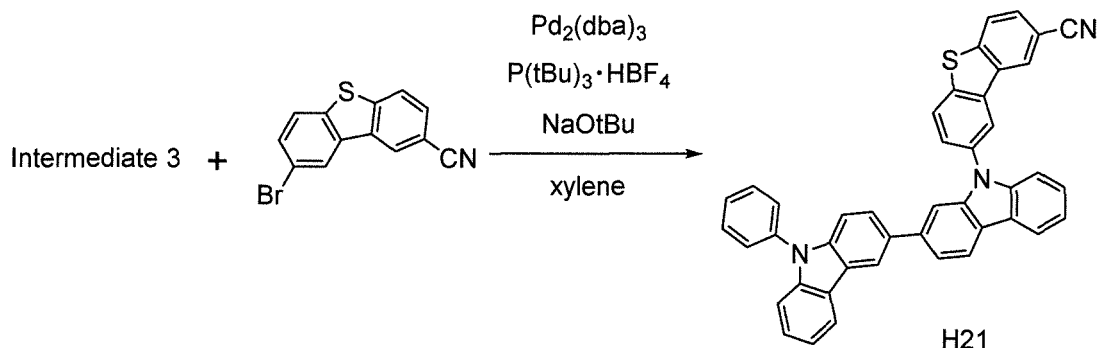


[0292] The procedure of Synthesis of Compound H1 was repeated except for using 2-bromo-8-cyanodibenzothiophene in place of 4-bromobenzonitrile. The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $C_{43}H_{25}N_3S = 615$, found $m/z = 615$ (M^+)

SYNTHESIS EXAMPLE 22: Synthesis of Compound H22

[0293]

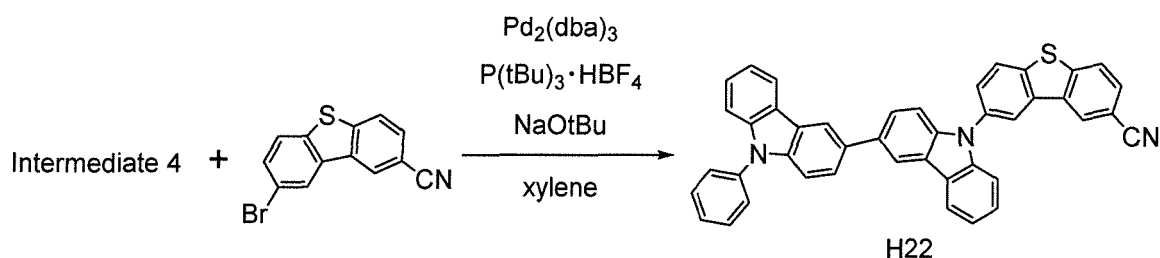

[0294] The procedure of Synthesis of Compound H1 was repeated except for using 2-bromo-8-cyanodibenzothiophene in place of 4-bromobenzonitrile and using the intermediate 4 in place of the intermediate 3. The obtained compound was measured for FD-MS (field desorption mass spectrometry). The result is shown below.

FDMS: calcd. for $C_{43}H_{25}N_3S = 615$, found $m/z = 615$ (M^+)

Production of Organic EL Device and Evaluation of Emission Performance

EXAMPLE 1

Production of organic EL device

[0295] A glass substrate of 25 mm \times 75 mm \times 1.1 mm thickness having an ITO transparent electrode (product of Geomatec Company) was cleaned by ultrasonic cleaning in isopropyl alcohol for 5 min and then UV ozone cleaning for 30 min.

[0296] The cleaned glass substrate was mounted to a substrate holder of a vacuum vapor deposition apparatus. The electron accepting compound C-1 (acceptor) shown below was vapor-deposited so as to cover the transparent electrode to form a compound C-1 film with a thickness of 5 nm. On the compound C-1 film, a first hole transporting material (aromatic amine derivative (compound X1) shown below) was vapor-deposited to form a first hole transporting layer with a thickness of 65 nm. Successively after forming the first hole transporting layer, a second hole transporting material (aromatic amine derivative (compound X2) shown below) was vapor-deposited to form a second hole transporting layer


with a thickness of 10 nm.

[0297] On the second hole transporting layer, the compound H1 (host material) obtained in Synthesis Example 1 and $\text{Ir}(\text{bzq})_3$ (phosphorescent material) shown below were co-deposited to form a phosphorescent light emitting layer with a thickness of 25 nm. The concentration of $\text{Ir}(\text{bzq})_3$ in the light emitting layer was 10.0% by mass. The co-deposited film works as a light emitting layer.


[0298] Successively after forming the light emitting layer, the compound ET shown below was vapor-deposited into a film with a thickness of 35 nm. The compound ET film works as an electron transporting layer.

[0299] Then, LiF was vapor-deposited into a film with a thickness of 1 nm at a film-forming speed of 0.1 Å/min to form an electron injecting electrode (cathode). On the LiF film, metallic Al was vapor-deposited to form a metallic cathode with a thickness of 80 nm, thereby obtaining an organic EL device.


[0300] The compounds used in the examples and comparative examples are shown below.





Compound C-1

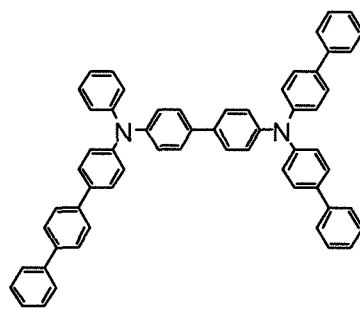


Compound X1

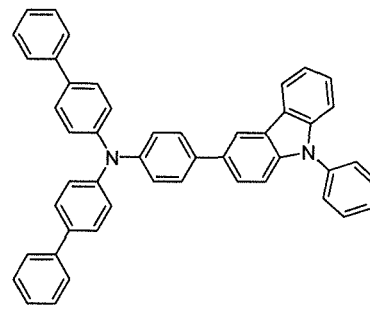


Compound X2

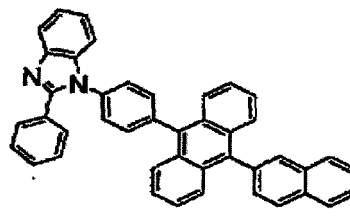 $\text{Ir}(\text{bzq})_3$ 


Compound ET




Compound H1




Compound H2




Compound H3




Compound H4




Compound H5

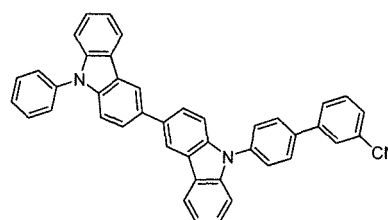


Compound H6




Compound F1

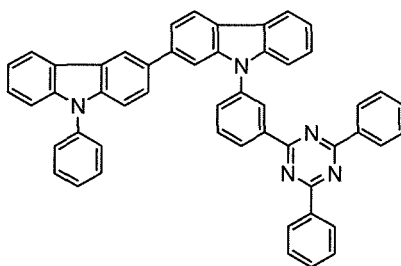


Compound F2



Compound F3

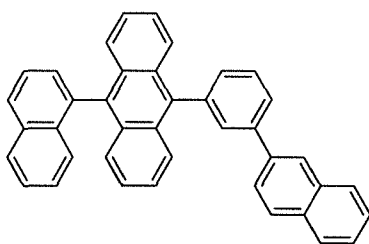

Compound BH1

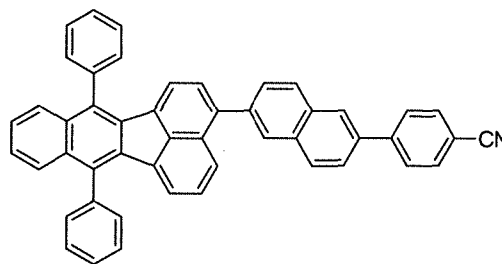

Compound BD1

Evaluation of emission performance of organic EL device

[0301] The obtained organic EL device was measured for the emission efficiency at room temperature by driving the device at constant DC current (current density: 1 mA/cm²). The results are shown in Table 1.

EXAMPLES 2-6 and COMPARATIVE EXAMPLE 1

[0302] In the same manner as in Example 1 except for forming the light emitting layer by using each compound shown in Table 1 in place of the host compound H1, each organic EL device was produced. The results of measuring the emission efficiency are shown in Table 1.

Table 1

	Host material of light emitting layer	Emission efficiency (cd/A)
Example 1	compound H1	59
Example 2	compound H2	59
Example 3	compound H3	61
Example 4	compound H4	62
Example 5	compound H5	58
Example 6	compound H6	45

(continued)

	Host material of light emitting layer	Emission efficiency (cd/A)
Comparative Example 1	compound F1	10

[0303] As seen from Table 1, the organic EL devices of Examples 1 to 6, wherein each of the compounds H1 to H5 each having a cyano-substituted group at the terminal end of the central skeleton comprising the carbazole derivative was used as the host material of the light emitting layer, showed high emission efficiency as compared with the organic EL device of Comparative Example 1 which employed the compound F1 having a similar central skeleton but having no cyano-substituted group at its terminal end.

EXAMPLE 7-10 and COMPARATIVE EXAMPLE 2

[0304] Each organic EL device was produced in the same manner as in Example 1 except for forming the light emitting layer by using the host material 1 and the host material 2 listed in Table 2 as the host material of the light emitting layer in place of the compound H1. Each concentration in the light emitting layer was 10.0% by mass for Ir(bzq)₃, 45.0% by mass for the host material 1, and 45.0% by mass for the host material 2.

[0305] Each of the obtained organic EL device was measured for the emission efficiency at room temperature by driving the device at constant DC current (current density: 1 mA/cm²) and measured for 80% lifetime at an initial luminance of 10,000 cd/m² (time taken until the luminance was reduced to 80% of the initial luminance when driving the device at constant current). The results are shown in Table 2.

Table 2

	Light emitting layer		Emission efficiency (cd/A)	80% Lifetime (h)
	Host material 1	Host material 2		
Example 7	compound H1	compound F2	68	1040
Example 8	compound H1	compound F3	68	800
Example 9	compound H3	compound F2	66	800
Example 10	compound H4	compound F2	70	1120
Example 11	compound H5	compound F2	60	1040
Comparative Example 2	compound F1	compound F3	50	480

[0306] As seen from Table 2, the organic EL devices of Examples 7 to 11, wherein the combination of the compounds H1 and H3 to H5 each having a cyano-substituted group at the terminal end of the central skeleton comprising the carbazole derivative with the compound F2 or F3 was used as the host material (co-host) of the light emitting layer, showed good emission efficiency. In addition, the organic EL devices of Examples 7 to 11 showed longer lifetime as compared with the organic EL device of Comparative Example 2 which employed the compound F1 and the compound F3 each having a similar central skeleton but having no cyano-substituted group at its terminal end.

EXAMPLE 12

[0307] An organic EL device having the following layered structure was produced:

ITO (130 nm)/C-1 (5 nm)/X1 (80 nm)/X2 (15 nm)/BH1:BD1 (25 nm, 5% by mass)/H3 (5 nm)/ET (20 nm)/LiF (1 nm)/Al (80 nm),

wherein each numeral in the parentheses represents the thickness and represent the content (% by mass) of the dopant materials for the light emitting layer.

[0308] The organic EL device of Example 12 was produced in the following manner.

[0309] A glass substrate of 25 mm × 75 mm × 0.7 mm thickness having an ITO transparent electrode (anode) (product of Geomatec Company) was cleaned by ultrasonic cleaning in isopropyl alcohol for 5 min and then UV ozone cleaning for 30 min.

[0310] The cleaned glass substrate was mounted to a substrate holder of a vacuum vapor deposition apparatus. The compound C-1 was vapor-deposited so as to cover the transparent electrode to form a compound C-1 film with a thickness of 5 nm, which works as a hole injecting layer.

[0311] Successively after forming the compound C-1 film, the compound X1 was vapor-deposited to form a compound X1 film with a thickness of 80 nm on the compound C-1 film. The compound X1 film works as a first hole transporting layer.

[0312] Successively after forming the compound X1 film, the compound X2 was vapor-deposited to form a compound X2 film with a thickness of 15 nm on the compound X1 film. The compound X2 film works as a second hole transporting layer.

[0313] On the compound X2 film, the compound BH1 (host material) and the compound BD1 (dopant material) were co-deposited in a ratio of 20:1 by mass to form a light emitting layer with a thickness of 25 nm.

[0314] On the light emitting layer, the compound H3 was vapor-deposited to form a blocking layer with a thickness of 5 nm.

[0315] On the blocking layer, the compound ET (electron transporting material) was vapor-deposited to form an electron injecting layer with a thickness of 20 nm.

[0316] On the electron injecting layer, LiF was vapor-deposited to form a LiF film with a thickness of 1 nm.

[0317] On the LiF film, metallic aluminum (Al) was vapor-deposited to form a metallic cathode with a thickness of 80 nm.

[0318] Thus, the organic EL device of Example 12 was produced.

[0319] The obtained organic EL device was measured for the spectral radiance of EL emission at room temperature by driving the device at constant DC current (current density: 1 mA/cm²) using a spectroradiometer (CS-1000 manufactured by Konica Minolta). The chromaticity (CIEx, CIEy), the emission efficiency (external quantum efficiency), and the main peak wavelength were determined from the obtained spectral radiance. The results are shown in Table 3.

Table 3

	CIEx	CIEy	External quantum yield (%)	Main peak wavelength (nm)
Example 12	0.141	0.130	8.60	453

[0320] As seen from Table 3, a high emission efficiency expressed by the external quantum yield as high as 8.60% was obtained by using the material for organic EL device of the invention (compound H3) as the material for the blocking layer of fluorescent device.

EXAMPLES 13 to 20

[0321] Each organic EL device was produced in the same manner as in Example 1 except for forming the light emitting layer by using each compound listed in Table 4 in place of the host compound H1. The results of measuring the emission efficiency are shown in Table 4.

Table 4

	Host material of light emitting layer	Emission efficiency (cd/A)
Example 13	compound H7	68
Example 14	compound H10	67
Example 15	compound H12	56
Example 16	compound H13	55
Example 17	compound H14	55
Example 18	compound H15	55
Example 19	compound H16	56
Example 20	compound H18	45

[0322] As seen from Table 4, the organic EL devices of Examples 13 to 20, wherein each of the compounds H7, H10, H12 to H16, and H18 each having a cyano-substituted group at the terminal end of the central skeleton comprising the carbazole derivative was used as the host material of the light emitting layer, showed high emission efficiency as compared with the organic EL device of Comparative Example 1 which employed the compound F1 having a similar central skeleton but having no cyano-substituted group at its terminal end.

EXAMPLE 21

[0323] A glass substrate of 25 mm × 75 mm × 1.1 mm thickness having an ITO transparent electrode (product of Geomatec Company) was cleaned by ultrasonic cleaning in isopropyl alcohol for 5 min and then UV ozone cleaning for

30 min.

[0324] The cleaned glass substrate was mounted to a substrate holder of a vacuum vapor deposition apparatus. The compound C-2 shown below was vapor-deposited so as to cover the transparent electrode to form a compound C-2 film with a thickness of 20 nm. On the compound C-2 film, an aromatic amine derivative (compound X1) used above was vapor-deposited to form a hole transporting layer with a thickness of 60 nm.

[0325] On the hole transporting layer, the compound F4 (host material) shown below and the compound BD2 (phosphorescent material) shown below were co-deposited to form a phosphorescent light emitting layer with a thickness of 50 nm. The concentration in the phosphorescent light emitting layer was 80% by mass for the compound F4 and 20% by mass for the compound BD2. The co-deposited film works as a light emitting layer.


[0326] Successively after forming the light emitting layer, the compound H13 obtained in Synthesis Example 13 was vapor-deposited into a film with a thickness of 10 nm. The compound H13 film works as a first electron transporting layer. Then, the compound ET was vapor-deposited into a film with a thickness of 10 nm. The compound ET film works as a second electron transporting layer.

[0327] Then, LiF was vapor-deposited into a film with a thickness of 1 nm at a film-forming speed of 0.1 Å/min to form an electron injecting electrode (cathode). On the LiF film, metallic Al was vapor-deposited to form a metallic cathode with a thickness of 80 nm, thereby obtaining an organic EL device.

EXAMPLE 22 and COMPARATIVE EXAMPLE 3

[0328] Each organic EL device was produced in the same manner as in Example 21 except for forming the first electron transporting layer by using each compound listed in Table 5 in place of the compound H13.

[0329] The compounds used in Example 21, Example 22, and Comparative Example 3 are shown below.

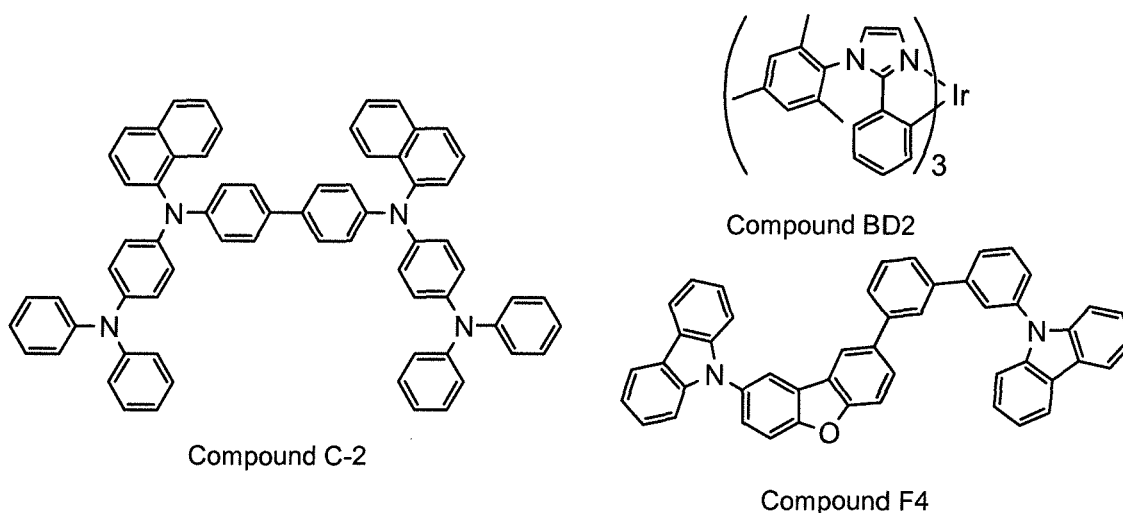

[0330] Each of the obtained organic EL devices was measured for the voltage and the emission efficiency (external quantum yield) at room temperature by driving the device at constant DC current (current density: 1 mA/cm²). The results are shown in Table 5.

Table 5

	Material of first electron transporting layer	Voltage (V)	External quantum yield (%)
Example 21	compound H13	4.0	18.4
Example 22	compound H19	3.7	19.8
Comparative example 3	compound F4	5.1	17.5

[0331] As seen from Table 5, the organic EL devices of Examples 21 and 22, wherein each of the compounds H13 and H19 each having a cyano-substituted group at the terminal end of the central skeleton comprising the carbazole derivative was used in the electron transporting layer adjacent to the light emitting layer, showed an improved emission efficiency and a low driving voltage, as compared with the organic EL device of Comparative Example 3 which employed the compound F4 having a similar central skeleton but having no cyano-substituted group at its terminal end.

INDUSTRIAL APPLICABILITY

[0332] As described above, the material for organic EL device of the invention is useful as a material for realizing an organic EL device with good emission efficiency.


REFERENCE NUMERALS

[0333]

- 1: Organic electroluminescence device
 2: Substrate
 3: Anode
 4: Cathode
 5: Phosphorescent light emitting layer
 6: Hole injecting/transporting layer
 7: Electron injecting/transporting layer
 10: Organic thin film layer

Claims

1. A compound for organic electroluminescence device represented by formula (I):

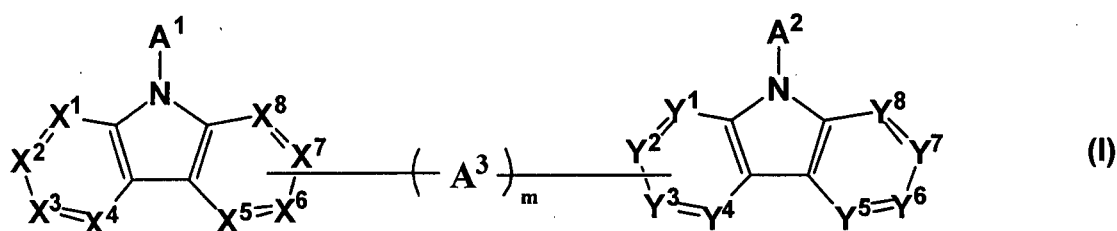

wherein:

each of A^1 and A^2 independently represents a substituted or unsubstituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a substituted or unsubstituted heterocyclic group having 5 to 30 ring atoms, wherein the heterocyclic group is selected from the group consisting of a dibenzofuran ring residue and a dibenzothiophene ring residue;

A^3 represents an unsubstituted monocyclic hydrocarbon group having 6 or less ring carbon atoms or an unsubstituted monocyclic heterocyclic group having 6 or less ring atoms;

wherein A^1 and A^2 may be independently substituted with at least one group selected from the group consisting of a cyano group, a halogen atom, an alkyl group having 1 to 20 carbon atoms, a cycloalkyl group having 3 to 20 carbon atoms, an alkoxy group having 1 to 20 carbon atoms, a haloalkyl group having 1 to 20 carbon atoms, a haloalkoxy group having 1 to 20 carbon atoms, an alkylsilyl group having 1 to 10 carbon atoms, an aryloxy group having 6 to 30 ring carbon atoms, an arylsilyl group having 6 to 30 carbon atoms, an aralkyl group having 6 to 30 carbon atoms, and a heteroaryl group having 5 to 30 ring atoms, a phenyl group, a naphthyl group, a biphenyl group, a terphenyl group, a phenanthryl group, a triphenylenyl group, a fluorenyl group, a spirobifluorenyl group, and a fluoranthenyl group;

m represents an integer of 0 to 3;

each of X^1 to X^8 and Y^1 to Y^8 independently represents N or CR^a ;

each of R^a independently represents a hydrogen atom, a substituted or unsubstituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms, a substituted or unsubstituted heterocyclic group having 5 to 30 ring atoms, a substituted or unsubstituted alkyl group having 1 to 30 carbon atoms, a substituted or unsubstituted silyl group, or a halogen atom, provided that one of X^5 to X^8 and one of Y^1 to Y^4 are bonded to each other via A^3 or directly; and

the formula (I) satisfies at least one of the following requirements (i) and (ii):

- (i) at least one of A^1 and A^2 represents a cyano-substituted aromatic hydrocarbon group having 6 to 30

ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms, wherein the heterocyclic group is selected from the group consisting of a dibenzofuran ring residue and a dibenzothiophene ring residue; and

(ii) at least one of X^1 to X^4 and Y^5 to Y^8 represents CR^a , and at least one of R^a in X^1 to X^4 and Y^5 to Y^8 represents a cyano-substituted aromatic hydrocarbon group having 6 to 30 ring carbon atoms or a cyano-substituted heterocyclic group having 5 to 30 ring atoms, provided that when two or more R^a groups exist, the R^a groups may be the same or different.

2. The compound for organic electroluminescence device according to claim 1, which satisfies the requirement (i) but does not satisfy the requirement (ii).
3. The compound for organic electroluminescence device according to claim 1, which satisfies the requirement (ii) but does not satisfy the requirement (i).
4. The compound for organic electroluminescence device according to claim 1, which satisfies both the requirements (i) and (ii).
5. The compound for organic electroluminescence device according to any one of claim 1 to 2 and 4, wherein at least one of A^1 and A^2 represents a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group.
6. The compound for organic electroluminescence device according to any one of claim 1 to 2, 4 and 5, wherein A^1 is substituted by a cyano group and A^2 is not substituted by a cyano group.
7. The compound for organic electroluminescence device according to any one of claim 1, 3 and 4, wherein at least one of X^1 to X^4 and Y^5 to Y^8 represents CR^a , and at least one of R^a in X^1 to X^4 and Y^5 to Y^8 represents a cyano-substituted phenyl group, a cyano-substituted naphthyl group, a cyano-substituted phenanthryl group, a cyano-substituted dibenzofuranyl group, a cyano-substituted dibenzothiophenyl group, a cyano-substituted biphenyl group, a cyano-substituted terphenyl group, a cyano-substituted 9,9-diphenylfluorenyl group, a cyano-substituted 9,9'-spirobi[9H-fluorene]-2-yl group, a cyano-substituted 9,9-dimethylfluorenyl group, or a cyano-substituted triphenylenyl group.
8. The compound for organic electroluminescence device according to any one of claims 1 to 7, wherein X^6 and Y^3 are bonded to each other via A^3 or directly.
9. The compound for organic electroluminescence device according to any one of claims 1 to 7, wherein X^6 and Y^2 are bonded to each other via A^3 or directly.
10. The compound for organic electroluminescence device according to any one of claims 1 to 7, wherein X^7 and Y^3 are bonded to each other via A^3 or directly.
11. The compound for organic electroluminescence device according to any one of claims 1 to 10, wherein m represents 0.
12. The compound for organic electroluminescence device according to any one of claims 1 to 10, wherein m represents 1.
13. An organic electroluminescence device comprising an organic thin film layer comprising one or more layers between a cathode and an anode, wherein the organic thin film layer comprises a light emitting layer, and at least one layer of the organic thin film layer comprises the compound for organic electroluminescence device according to any one of claims 1 to 12.
14. The organic electroluminescence device according to claim 13, wherein the light emitting layer comprises the compound for organic electroluminescence device.
15. The organic electroluminescence device according to claim 13 or 14, wherein the light emitting layer comprises a phosphorescent material selected from ortho metallated complexes of a metal selected from iridium (Ir), osmium


(Os), and platinum (Pt).

16. The organic electroluminescence device according to any one of claims 13 to 15, which further comprises a layer adjacent to the light emitting layer between the cathode and the light emitting layer, and the layer adjacent to the light emitting layer comprises the compound for organic electroluminescence device.
17. The organic electroluminescence device according to any one of claims 13 to 15, which further comprises a blocking layer adjacent to the light emitting layer between the cathode and the light emitting layer, and the blocking layer comprises the compound for organic electroluminescence device according to any one of claims 1 to 12.
18. The compound for organic electroluminescence device according to claim 1, wherein the monocyclic hydrocarbon group having 6 or less ring carbon atoms as A³ in formula (I) is selected from the group consisting of a phenylene group, a cyclopentenylene group, a cyclopentadienylene group, a cyclohexylene group, and a cyclopentylene group.
19. The compound for organic electroluminescence device according to claim 1, wherein the monocyclic heterocyclic group having 6 or less ring atoms as A³ in formula (I) is selected from the group consisting of a pyrrolylene group, a pyrazinylene group, a pyridinylene group, a furylene group, and a thiophenylene group.
20. The compound for organic electroluminescence device according to claim 1, wherein at least one of A¹ and A² is a dibenzofuran-2-yl group or a dibenzofuran-4-yl group.
21. The compound for organic electroluminescence device according to claim 1, wherein at least one of A¹ and A² is a dibenzothiophene-2-yl group or a dibenzothiophene-4-yl group.
22. The compound for organic electroluminescence device according to claim 1, wherein at least one of A¹ and A² is selected from the group consisting of a dibenzofuran ring residue and a dibenzothiophene ring residue.
23. The compound for organic electroluminescence device according to claim 1, wherein each of A¹ and A² of formula (I) independently represents the aromatic hydrocarbon group having 6 to 30 ring carbon atoms, a dibenzofuran ring residue, or a dibenzothiophene ring residue,
the aromatic hydrocarbon group being selected from the group consisting of a phenyl group, a naphthyl group, a phenanthryl group, a biphenyl group, a terphenyl group, a quaterphenyl group, a fluoranthenyl group, a triphenylenyl group, a phenanthrenyl group, a fluorenyl group, a spirofluorenyl group, a 9,9-diphenylfluorenyl group, a 9,9'-spiro-bi[9H-fluorene]-2-yl group, a 9,9-dimethylfluorenyl group, a benzo[c]phenanthrenyl group, a benzo[a]triphenylenyl group, a naphtho[1,2-c]phenanthrenyl group, a naphtho[1,2-a]triphenylenyl group, a dibenzo[a,c]triphenylenyl group, and a benzo[b]fluoranthenyl group.
24. The compound for organic electroluminescence device according to claim 1, wherein R^a of formula (I) independently represents the aromatic hydrocarbon group having 6 to 30 ring carbon atoms, the heterocyclic group having 5 to 30 ring atoms, the alkyl group having 1 to 30 carbon atoms, the silyl group, a cyclopentyl group, or a cyclohexyl group;
the aromatic hydrocarbon group being selected from the group consisting of a phenyl group, a naphthyl group, a phenanthryl group, a biphenyl group, a terphenyl group, a quaterphenyl group, a fluoranthenyl group, a triphenylenyl group, a phenanthrenyl group, a fluorenyl group, a spirofluorenyl group, a 9,9-diphenylfluorenyl group, a 9,9'-spiro-bi[9H-fluorene]-2-yl group, a 9,9-dimethylfluorenyl group, a benzo[c]phenanthrenyl group, a benzo[a]triphenylenyl group, a naphtho[1,2-c]phenanthrenyl group, a naphtho[1,2-a]triphenylenyl group, a dibenzo[a,c]triphenylenyl group, and a benzo[b]fluoranthenyl group;
the heterocyclic group being selected from the group consisting of a pyrrole ring residue, an isoindole ring residue, a benzofuran ring residue, an isobenzofuran ring residue, a dibenzothiophene ring residue, an isoquinoline ring residue, a quinoxaline ring residue, a phenanthridine ring residue, a phenanthroline ring residue, a pyridine ring residue, a pyrazine ring residue, a pyrimidine ring residue, a pyridazine ring residue, a triazine ring residue, an indole ring residue, a quinoline ring residue, an acridine ring residue, a pyrrolidine ring residue, a dioxane ring residue, a piperidine ring residue, a morpholine ring residue, a piperazine ring residue, a furan ring residue, a thiophene ring residue, an oxazole ring residue, an oxadiazole ring residue, a benzoxazole ring residue, a thiazole ring residue, a thiadiazole ring residue, a benzothiazole ring residue, a triazole ring residue, an imidazole ring residue, a benzimidazole ring residue, a pyran ring residue, a dibenzofuran ring residue, and a benzo[c]dibenzofuran ring residue;
the alkyl group being selected from the group consisting of a methyl group, an ethyl group, a n-propyl group, an isopropyl group, a n-butyl group, a s-butyl group, an isobutyl group, and a t-butyl group;
and

the silyl group being selected from the group consisting of a trimethylsilyl group, a triethylsilyl group, a t-butyldimethylsilyl group, a vinyl dimethylsilyl group, and a propyldimethylsilyl group.

Patentansprüche

1. Eine Verbindung für eine organische Elektrolumineszenzvorrichtung, die dargestellt ist durch die Formel (I):

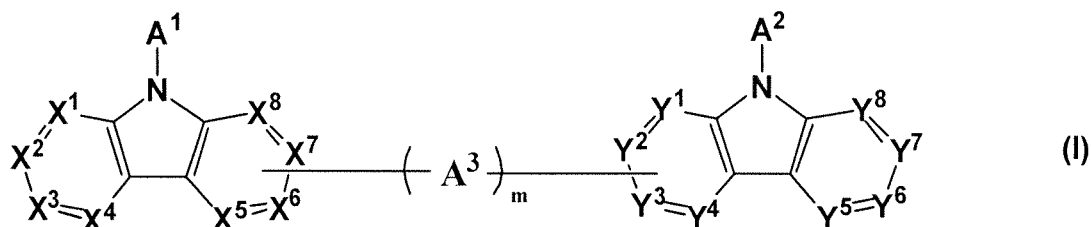

wobei:

jedes von A¹ und A² unabhängig eine substituierte oder unsubstituierte aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen oder eine substituierte oder unsubstituierte heterozyklische Gruppe mit 5 bis 30 Ringatomen darstellt, wobei die heterozyklische Gruppe ausgewählt ist aus der Gruppe bestehend aus einem Dibenzofuranring-Rest und einem Dibenzothiophenring-Rest;

A³ eine unsubstituierte monozyklische Kohlenwasserstoffgruppe mit 6 oder weniger Ringkohlenstoffatomen oder eine unsubstituierte monozyklische heterozyklische Gruppe mit 6 oder weniger Ringatomen darstellt;

wobei A¹ und A² unabhängig substituiert sein können mit mindestens einer Gruppe, ausgewählt aus der Gruppe bestehend aus einer Cyanogruppe, einem Halogenatom, einer Alkylgruppe mit 1 bis 20 Kohlenstoffatomen, einer Cycloalkylgruppe mit 3 bis 20 Kohlenstoffatomen, einer Alkoxygruppe mit 1 bis 20 Kohlenstoffatomen, einer Halogenalkylgruppe mit 1 bis 20 Kohlenstoffatomen, einer Halogenalkoxygruppe mit 1 bis 20 Kohlenstoffatomen, einer Alkylsilylgruppe mit 1 bis 10 Kohlenstoffatomen, einer Aryloxygruppe mit 6 bis 30 Ringkohlenstoffatomen, einer Arylsilylgruppe mit 6 bis 30 Kohlenstoffatomen, einer Aralkylgruppe mit 6 bis 30 Kohlenstoffatomen und einer Heteroarylgruppe mit 5 bis 30 Ringatomen, einer Phenylgruppe, einer Naphthylgruppe, einer Biphenylgruppe, einer Terphenylgruppe, einer Phenanthrylgruppe, einer Triphenylenylgruppe, einer Fluorenylgruppe, einer Spirobifluorenylgruppe und einer Fluoranthenyylgruppe;

m eine ganze Zahl von 0 bis 3 darstellt;

jedes von X¹ bis X⁸ und Y¹ bis Y⁸ unabhängig N oder CR^a darstellt;

jedes von R^a unabhängig ein Wasserstoffatom, eine substituierte oder unsubstituierte aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen, eine substituierte oder unsubstituierte heterozyklische Gruppe mit 5 bis 30 Ringatomen, eine substituierte oder unsubstituierte Alkylgruppe mit 1 bis 30 Kohlenstoffatomen, eine substituierte oder unsubstituierte Silylgruppe, oder ein Halogenatom darstellt, mit der Maßgabe, dass eines von X⁵ bis X⁸ und eines von Y¹ bis Y⁴ über ein A³ oder direkt miteinander verbunden sind; und die Formel (I) mindestens eine der folgenden Bedingungen (i) und (ii) erfüllt:

(i) mindestens eines von A¹ und A² stellt eine mit Cyano substituierte aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen oder eine mit Cyano substituierte heterozyklische Gruppe mit 5 bis 30 Ringatomen dar, wobei die heterozyklische Gruppe ausgewählt ist aus der Gruppe bestehend aus einem Dibenzofuranring-Rest und einem Dibenzothiophenring-Rest; und

(ii) mindestens eines von X¹ bis X⁴ und Y⁵ bis Y⁸ stellt CR^a dar und mindestens eines von R^a in X¹ bis X⁴ und Y⁵ bis Y⁸ stellt eine mit Cyano substituierte aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen oder eine mit Cyano substituierte heterozyklische Gruppe mit 5 bis 30 Ringatomen dar, mit der Maßgabe, dass, wenn zwei oder mehr R^a-Gruppen vorhanden sind, die R^a-Gruppen gleich oder verschieden sein können.

2. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, die die Bedingung (i) erfüllt, aber nicht die Bedingung (ii) erfüllt.
3. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, die die Bedingung (ii) erfüllt, aber nicht die Bedingung (i) erfüllt.

4. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, die die beiden Bedingungen (i) und (ii) erfüllt.
- 5 5. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 2 und 4, wobei mindestens eines von A¹ und A² eine mit Cyano substituierte Phenylgruppe, eine mit Cyano substituierte Naphthylgruppe, eine mit Cyano substituierte Phenanthrylgruppe, eine mit Cyano substituierte Dibenzofuranylgruppe, eine mit Cyano substituierte Dibenzothiophenylgruppe, eine mit Cyano substituierte Biphenylgruppe, eine mit Cyano substituierte Terphenylgruppe, eine mit Cyano substituierte 9,9-Diphenylfluorenylgruppe, eine mit Cyano substituierte 9,9'-Spirobi[9H-fluoren]-2-yl-Gruppe, eine mit Cyano substituierte 9,9-Dimethylfluorenylgruppe, oder eine mit Cyano substituierte Triphenylenylgruppe ist.
- 10 6. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 2, 4 und 5, wobei A¹ mit einer Cyanogruppe substituiert ist und A² nicht mit einer Cyanogruppe substituiert ist.
- 15 7. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1, 3 und 4, wobei mindestens eines von X¹ bis X⁴ und Y⁵ bis Y⁸ gleich CR^a darstellt, und mindestens eines von R^a in X¹ bis X⁴ und Y⁵ bis Y⁸ eine mit Cyano substituierte Phenylgruppe, eine mit Cyano substituierte Naphthylgruppe, eine mit Cyano substituierte Phenanthrylgruppe, eine mit Cyano substituierte Dibenzofuranylgruppe, eine mit Cyano substituierte Dibenzothiophenylgruppe, eine mit Cyano substituierte Biphenylgruppe, eine mit Cyano substituierte Terphenylgruppe, eine mit Cyano substituierte 9,9-Diphenylfluorenylgruppe, eine mit Cyano substituierte 9,9'-Spirobi[9H-fluoren]-2-yl-Gruppe, eine mit Cyano substituierte 9,9-Dimethylfluorenylgruppe, oder eine mit Cyano substituierte Triphenylenylgruppe darstellt.
- 20 8. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 7, wobei X⁶ und Y³ über A³ oder direkt miteinander verbunden sind.
- 25 9. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 7, wobei X⁶ und Y² über A³ oder direkt miteinander verbunden sind.
- 30 10. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 7, wobei X⁷ und Y³ über A³ oder direkt miteinander verbunden sind.
- 35 11. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 10, wobei m 0 darstellt.
12. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 10, wobei m 1 darstellt.
- 40 13. Eine organische Elektrolumineszenzvorrichtung, umfassend eine organische Dünnschicht umfassend eine oder mehrere Schichten zwischen einer Kathode und einer Anode, wobei die organische Dünnschicht eine Lichtemissionsschicht umfasst, und mindestens eine Schicht der organischen Dünnschicht die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 1 bis 12 umfasst.
- 45 14. Die organische Elektrolumineszenzvorrichtung gemäß Anspruch 13, wobei die Lichtemissionsschicht die Verbindung für eine organische Elektrolumineszenzvorrichtung umfasst.
- 50 15. Die organische Elektrolumineszenzvorrichtung gemäß Anspruch 13 oder 14, wobei die Lichtemissionsschicht ein phosphoreszierendes Material, ausgewählt aus orthometallierten Komplexen eines Metalls, ausgewählt aus Iridium (Ir), Osmium (Os) und Platin (Pt), umfasst.
- 55 16. Die organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 13 bis 15, die weiter eine Schicht angrenzend an die Lichtemissionsschicht zwischen der Kathode und der Lichtemissionsschicht umfasst und die an die Lichtemissionsschicht angrenzende Schicht die Verbindung für eine organische Elektrolumineszenzvorrichtung umfasst.
17. Die organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche 13 bis 15, die weiter eine an die Lichtemissionsschicht angrenzende Blockschicht zwischen der Kathode und der Lichtemissionsschicht umfasst, und die Blockschicht die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß einem der Ansprüche


1 bis 12 umfasst.

18. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei die monozyklische Kohlenwasserstoffgruppe mit 6 oder weniger Ringkohlenstoffatomen als A³ in Formel (I) ausgewählt ist aus der Gruppe bestehend aus einer Phenylengruppe, einer Cyclopentenylengruppe, einer Cyclopentadienylengruppe, einer Cyclohexylengruppe und einer Cyclopentylengruppe.
19. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei die monozyklische heterozyklische Gruppe mit 6 oder weniger Ringatomen als A³ in Formel (I) ausgewählt ist aus der Gruppe bestehend aus einer Pyrrolylengruppe, einer Pyrazinylengruppe, einer Pyridinylengruppe, einer Furylengruppe und einer Thiophenylengruppe.
20. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei mindestens eines von A¹ und A² eine Dibenzofuran-2-yl-Gruppe oder eine Dibenzofuran-4-yl-Gruppe ist.
21. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei mindestens eines von A¹ und A² eine Dibenzothiophen-2-yl-Gruppe oder eine Dibenzothiophen-4-yl-Gruppe ist.
22. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei mindestens eines von A¹ und A² ausgewählt ist aus der Gruppe bestehend aus einem Dibenzofuranring-Rest und einem Dibenzothiophenring-Rest.
23. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei jedes von A¹ und A² der Formel (I) unabhängig die aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen, einen Dibenzofuranring-Rest, oder einen Dibenzothiophenring-Rest darstellt, wobei die aromatische Kohlenwasserstoffgruppe ausgewählt ist aus der Gruppe bestehend aus einer Phenylgruppe, einer Naphthylgruppe, einer Phenanthrylgruppe, einer Biphenylgruppe, einer Terphenylgruppe, einer Quaterphenylgruppe, einer Fluoranthenylgruppe, einer Triphenylenylgruppe, einer Phenanthrenylgruppe, einer Fluorenylgruppe, einer Spirofluorenylgruppe, einer 9,9-Diphenylfluorenylgruppe, einer 9,9'-Spirobi[9H-fluoren]-2-yl-Gruppe, einer 9,9-Dimethylfluorenylgruppe, einer Benzo[c]phenanthrenylgruppe, einer Benzo[a]triphenylenylgruppe, einer Naphtho[1,2-c]phenanthrenylgruppe, einer Naphtho[1,2-a]triphenylenylgruppe, einer Dibenzo[a,c]triphenylenylgruppe und einer Benzo[b]fluoranthenylgruppe.
24. Die Verbindung für eine organische Elektrolumineszenzvorrichtung gemäß Anspruch 1, wobei R^a der Formel (I) unabhängig die aromatische Kohlenwasserstoffgruppe mit 6 bis 30 Ringkohlenstoffatomen, die heterozyklische Gruppe mit 5 bis 30 Ringatomen, die Alkylgruppe mit 1 bis 30 Kohlenstoffatomen, die Silylgruppe, eine Cyclopentylgruppe, oder eine Cyclohexylgruppe darstellt; die aromatische Kohlenwasserstoffgruppe ausgewählt ist aus der Gruppe bestehend aus einer Phenylgruppe, einer Naphthylgruppe, einer Phenanthrylgruppe, einer Biphenylgruppe, einer Terphenylgruppe, einer Quaterphenylgruppe, einer Fluoranthenylgruppe, einer Triphenylenylgruppe, einer Phenanthrenylgruppe, einer Fluorenylgruppe, einer Spirofluorenylgruppe, einer 9,9-Diphenylfluorenylgruppe, einer 9,9'-Spirobi[9H-fluoren]-2-yl-Gruppe, einer 9,9-Dimethylfluorenylgruppe, einer Benzo[c]phenanthrenylgruppe, einer Benzo[a]triphenylenylgruppe, einer Naphtho[1,2-c]phenanthrenylgruppe, einer Naphtho[1,2-a]triphenylenylgruppe, einer Dibenzo[a,c]triphenylenylgruppe und einer Benzo[b]fluoranthenylgruppe; die heterozyklische Gruppe ausgewählt ist aus der Gruppe bestehend aus einem Pyrrolringrest, einem Isoindolringrest, einem Benzofuranringrest, einem Isobenzofuranringrest, einem Dibenzothiophenringrest, einem Isochinolinringrest, einem Chinoxalinringrest, einem Phenanthridinringrest, einem Phenanthrolinringrest, einem Pyridinringrest, einem Pyrazinringrest, einem Pyrimidinringrest, einem Pyridazinringrest, einem Triazinringrest, einem Indolringrest, einem Chinolinringrest, einem Acridinringrest, einem Pyrrolidinringrest, einem Dioxanringrest, einem Piperidinringrest, einem Morpholinringrest, einem Piperazinringrest, einem Furanringrest, einem Thiophenringrest, einem Oxazolringrest, einem Oxadiazolringrest, einem Benzoxazolringrest, einem Thiazolringrest, einem Thiadiazolringrest, einem Benzothiazolringrest, einem Triazolringrest, einem Imidazolringrest, einem Benzimidazolringrest, einem Pyranringrest, einem Dibenzofuranringrest und einem Benzo [c] dibenzofuranringrest; die Alkylgruppe ausgewählt ist aus der Gruppe bestehend aus einer Methylgruppe, einer Ethylgruppe, einer n-Propylgruppe, einer Isopropylgruppe, einer n-Butylgruppe, einer s-Butylgruppe, einer Isobutylgruppe und einer t-Butylgruppe; und die Silylgruppe ausgewählt ist aus der Gruppe bestehend aus einer Trimethylsilylgruppe, einer Triethylsilylgruppe,

einer t-Butyldimethylsilylgruppe, einer Vinyltrimethylsilylgruppe und einer Propyldimethylsilylgruppe.

Revendications

1. Composé pour dispositif électroluminescent organique représenté par la formule (I) :

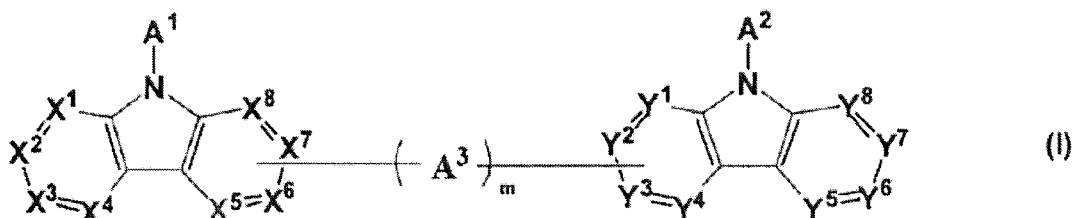

dans laquelle :

chacun des A^1 et A^2 représente indépendamment un groupe hydrocarbure aromatique substitué ou non substitué ayant 6 à 30 atomes de carbone de cycle ou un groupe hétérocyclique substitué ou non substitué ayant 5 à 30 atomes de cycle, où le groupe hétérocyclique est choisi dans le groupe constitué par un résidu cycle dibenzofurane et un résidu cycle dibenzothiophène ;

A^3 représente un groupe hydrocarbure monocyclique non substitué ayant 6 atomes de carbone de cycle ou moins ou un groupe hétérocyclique monocyclique non substitué ayant 6 atomes de cycle ou moins ;

où A^1 et A^2 peuvent être indépendamment substitués par au moins un groupe choisi dans le groupe constitué par un groupe cyano, un atome d'halogène, un groupe alkyle ayant 1 à 20 atomes de carbone, un groupe cycloalkyle ayant 3 à 20 atomes de carbone, un groupe alcoyle ayant 1 à 20 atomes de carbone, un groupe halogénoalkyle ayant 1 à 20 atomes de carbone, un groupe halogénoalcoyle ayant 1 à 20 atomes de carbone, un groupe alkylsilyle ayant 1 à 10 atomes de carbone, un groupe aryloxy ayant 6 à 30 atomes de carbone de cycle, un groupe arylsilyle ayant 6 à 30 atomes de carbone, un groupe aralkyle ayant 6 à 30 atomes de carbone, et un groupe hétéroaryle ayant 5 à 30 atomes de cycle, un groupe phényle, un groupe naphtyle, un groupe biphényle, un groupe terphényle, un groupe phénanthryle, un groupe triphénylényle, un groupe fluorényle, un groupe spirobifluorényle, et un groupe fluoranthényle ;

m représente un nombre entier de 0 à 3 ;

chacun des X^1 à X^8 et Y^1 à Y^8 représente indépendamment N ou CR^a ;

chacun des R^a représente indépendamment un atome d'hydrogène, un groupe hydrocarbure aromatique substitué ou non substitué ayant 6 à 30 atomes de carbone de cycle, un groupe hétérocyclique substitué ou non substitué ayant 5 à 30 atomes de cycle, un groupe alkyle substitué ou non substitué ayant 1 à 30 atomes de carbone, un groupe silyle substitué ou non substitué, ou un atome d'halogène, à condition qu'un des X^5 à X^8 et un des Y^1 à Y^4 soient liés l'un à l'autre par l'intermédiaire de A^3 ou directement ; et

la formule (I) satisfait au moins l'une des exigences (i) et (ii) suivantes :

(i) au moins un des A^1 et A^2 représente un groupe hydrocarbure aromatique substitué par un cyano ayant 6 à 30 atomes de carbone de cycle ou un groupe hétérocyclique substitué par un cyano ayant 5 à 30 atomes de cycle, où le groupe hétérocyclique est choisi dans le groupe constitué par un résidu cycle dibenzofurane ou un résidu cycle dibenzothiophène ; et

(ii) au moins un des X^1 à X^4 et Y^3 à Y^8 représente CR^a , et au moins un des R^a dans X^1 à X^4 et Y^3 à Y^8 représente un groupe hydrocarbure aromatique substitué par un cyano ayant 6 à 30 atomes de carbone de cycle ou un groupe hétérocyclique substitué par un cyano ayant 5 à 30 atomes de cycle, à condition que quand deux groupes R^a ou plus existent, les groupes R^a puissent être identiques ou différents.

2. Composé pour dispositif électroluminescent organique selon la revendication 1, qui satisfait l'exigence (i) mais ne satisfait pas l'exigence (ii).
3. Composé pour dispositif électroluminescent organique selon la revendication 1, qui satisfait l'exigence (ii) mais ne satisfait pas l'exigence (i).
4. Composé pour dispositif électroluminescent organique selon la revendication 1, qui satisfait à la fois les exigences

(i) et (ii).

- 5 **5.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 2 et 4, dans lequel au moins un des A¹ et A² représente un groupe phényle substitué par un cyano, un groupe naphthyle substitué par un cyano, un groupe phénanthryle substitué par un cyano, un groupe dibenzofuranyle substitué par un cyano, un groupe dibenzothiophényle substitué par un cyano, un groupe biphenyle substitué par un cyano, un groupe terphényle substitué par un cyano, un groupe 9,9-diphénylfluorényle substitué par un cyano, un groupe 9,9'-spiro-bi[9H-fluorén]-2-yle substitué par un cyano, un groupe 9,9-diméthylfluorényle substitué par un cyano, ou un groupe triphénylényle substitué par un cyano.
- 10 **6.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 2, 4 et 5, dans lequel A¹ est substitué par un groupe cyano et A² n'est pas substitué par un groupe cyano.
- 15 **7.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1, 3 et 4, dans lequel au moins un des X¹ à X⁴ et Y⁵ à Y⁸ représente CR^a, et au moins un des R^a dans X¹ à X⁴ et Y⁵ à Y⁸ représente un groupe phényle substitué par un cyano, un groupe naphthyle substitué par un cyano, un groupe phénanthryle substitué par un cyano, un groupe dibenzofuranyle substitué par un cyano, un groupe dibenzothiophényle substitué par un cyano, un groupe biphenyle substitué par un cyano, un groupe terphényle substitué par un cyano, un groupe 9,9-diphénylfluorényle substitué par un cyano, un groupe 9,9'-spiro-bi[9H-fluorén]-2-yle substitué par un cyano, un groupe 9,9-diméthylfluorényle substitué par un cyano, ou un groupe triphénylényle substitué par un cyano.
- 20 **8.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 7, dans lequel X⁶ et Y³ sont liés l'un à l'autre par l'intermédiaire de A³ ou directement.
- 25 **9.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 7, dans lequel X⁶ et Y² sont liés l'un à l'autre par l'intermédiaire de A³ ou directement.
- 30 **10.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 7, dans lequel X⁷ et Y³ sont liés l'un à l'autre par l'intermédiaire de A³ ou directement.
- 35 **11.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 10, dans lequel m représente 0.
- 40 **12.** Composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 10, dans lequel m représente 1.
- 45 **13.** Dispositif électroluminescent organique comprenant une couche en film mince organique comprenant une ou plusieurs couches entre une cathode et une anode, dans lequel la couche en film mince organique comprend une couche électroluminescente, et au moins une couche de la couche en film mince organique comprend le composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 12.
- 50 **14.** Dispositif électroluminescent organique selon la revendication 13, dans lequel la couche électroluminescente comprend le composé pour dispositif électroluminescent organique.
- 55 **15.** Dispositif électroluminescent organique selon la revendication 13 ou 14, dans lequel la couche électroluminescente comprend un matériau phosphorescent choisi parmi les complexes ortho-métallés à base d'un métal choisi parmi l'iridium (Ir), l'osmium (Os), et le platine (Pt).
- 60 **16.** Dispositif électroluminescent organique selon l'une quelconque des revendications 13 à 15, qui comprend en outre une couche adjacente à la couche électroluminescente entre la cathode et la couche électroluminescente, et la couche adjacente à la couche électroluminescente comprend le composé pour dispositif électroluminescent organique.
- 65 **17.** Dispositif électroluminescent organique selon l'une quelconque des revendications 13 à 15, qui comprend en outre une couche de blocage adjacente à la couche électroluminescente entre la cathode et la couche électroluminescente, et la couche de blocage comprend le composé pour dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 12.

18. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel le groupe hydrocarbure monocyclique ayant 6 atomes de carbone de cycle ou moins à titre de A³ dans la formule (I) est choisi dans le groupe constitué par un groupe phénylène, un groupe cyclopenténylène, un groupe cyclopentadiénylène, un groupe cyclohexylène, et un groupe cyclopentylène.
19. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel le groupe hétérocyclique monocyclique ayant 6 atomes de cycle ou moins à titre de A³ dans la formule (I) est choisi dans le groupe constitué par un groupe pyrrolylène, un groupe pyrazinylène, un groupe pyridinylène, un groupe furylène, et un groupe thiophénylène.
20. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel au moins un des A¹ et A² est un groupe dibenzofuran-2-yle ou un groupe dibenzofuran-4-yle.
21. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel au moins un des A¹ et A² est un groupe dibenzothiophén-2-yle ou un groupe dibenzothiophén-4-yle.
22. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel au moins un des A¹ et A² est choisi dans le groupe constitué par un résidu cycle dibenzofurane et un résidu cycle dibenzothiophène.
23. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel chacun des A¹ et A² dans la formule (I) représente indépendamment le groupe hydrocarbure aromatique ayant 6 à 30 atomes de carbone de cycle, un résidu cycle dibenzofurane, ou un résidu cycle dibenzothiophène, le groupe hydrocarbure aromatique étant choisi dans le groupe constitué par un groupe phényle, un groupe naphtyle, un groupe phénanthryle, un groupe biphényle, un groupe terphényle, un groupe quaterphényle, un groupe fluoranthényle, un groupe triphénylényle, un groupe phénanthrényle, un groupe fluorényle, un groupe spirofluorényle, un groupe 9,9-diphénylfluorényle, un groupe 9,9'-spirobi[9H-fluorén]-2-yle, un groupe 9,9-diméthylfluorényle, un groupe benzo[c]phénanthrényle, un groupe benzo[a]triphénylényle, un groupe naphto[1,2-c]phénanthrényle, un groupe naphto[1,2-a]triphénylényle, un groupe dibenzo[a,c]triphénylényle, et un groupe benzo[b]fluoranthényle.
24. Composé pour dispositif électroluminescent organique selon la revendication 1, dans lequel R^a dans la formule (I) représente indépendamment le groupe hydrocarbure aromatique ayant 6 à 30 atomes de carbone de cycle, le groupe hétérocyclique ayant 5 à 30 atomes de cycle, le groupe alkyle ayant 1 à 30 atomes de carbone, le groupe silyle, un groupe cyclopentyle, ou un groupe cyclohexyle ; le groupe hydrocarbure aromatique étant choisi dans le groupe constitué par un groupe phényle, un groupe naphtyle, un groupe phénanthryle, un groupe biphényle, un groupe terphényle, un groupe quaterphényle, un groupe fluoranthényle, un groupe triphénylényle, un groupe phénanthrényle, un groupe fluorényle, un groupe spirofluorényle, un groupe 9,9-diphénylfluorényle, un groupe 9,9'-spirobi[9H-fluorén]-2-yle, un groupe 9,9-diméthylfluorényle, un groupe benzo[c]phénanthrényle, un groupe benzo[a]triphénylényle, un groupe naphto[1,2-c]phénanthrényle, un groupe naphto[1,2-a]triphénylényle, un groupe dibenzo[a,c]triphénylényle, et un groupe benzo[b]fluoranthényle ; le groupe hétérocyclique étant choisi dans le groupe constitué par un résidu cycle pyrrole, un résidu cycle isoindole, un résidu cycle benzofurane, un résidu cycle isobenzofurane, un résidu cycle dibenzothiophène, un résidu cycle isoquinoline, un résidu cycle quinoxaline, un résidu cycle phénanthridine, un résidu cycle phénanthroline, un résidu cycle pyridine, un résidu cycle pyrazine, un résidu cycle pyrimidine, un résidu cycle pyridazine, un résidu cycle triazine, un résidu cycle indole, un résidu cycle quinoline, un résidu cycle acridine, un résidu cycle pyrrolidine, un résidu cycle dioxane, un résidu cycle pipéridine, un résidu cycle morpholine, un résidu cycle pipérazine, un résidu cycle furane, un résidu cycle thiophène, un résidu cycle oxazole, un résidu cycle oxadiazole, un résidu cycle benzoxazole, un résidu cycle thiazole, un résidu cycle thiadiazole, un résidu cycle benzothiazole, un résidu cycle triazole, un résidu cycle imidazole, un résidu cycle benzimidazole, un résidu cycle pyrane, un résidu cycle dibenzofurane, et un résidu cycle benzo[c]dibenzofurane ; le groupe alkyle étant choisi dans le groupe constitué par un groupe méthyle, un groupe éthyle, un groupe n-propyle, un groupe isopropyle, un groupe n-butyle, un groupe s-butyle, un groupe isobutyle, et un groupe t-butyle ; et le groupe silyle étant choisi dans le groupe constitué par un groupe triméthylsilyle, un groupe triéthylsilyle, un groupe t-butyldiméthylsilyle, un groupe vinylidiméthylsilyle, et un groupe propyldiméthylsilyle.

Fig. 1


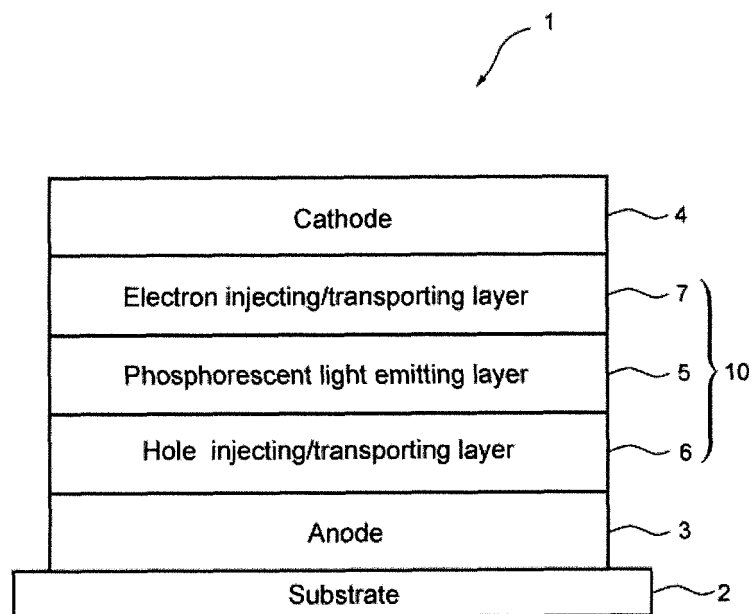


Fig. 2

HOMO

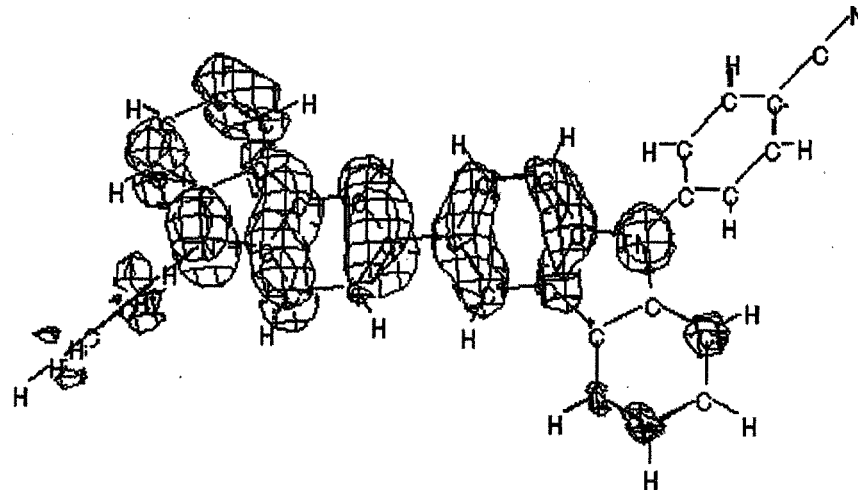

LUMO


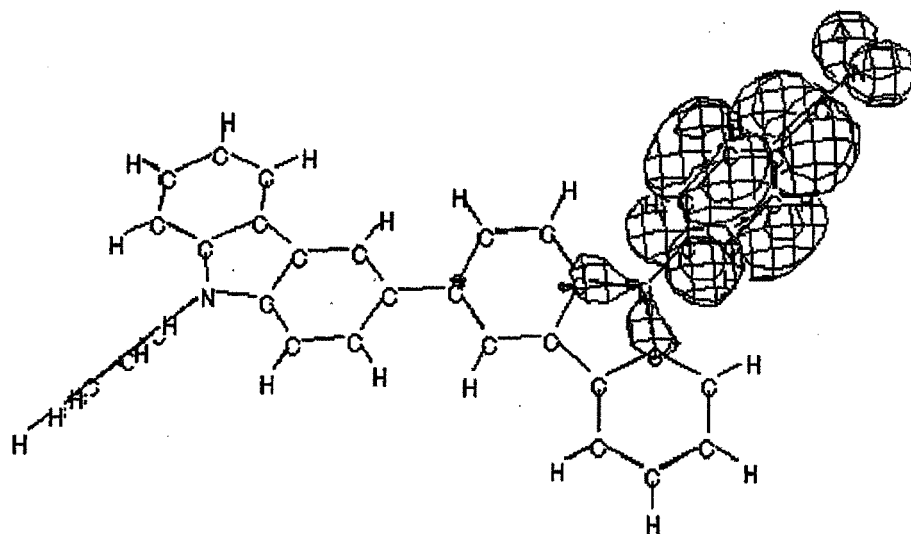


Fig. 3

HOMO

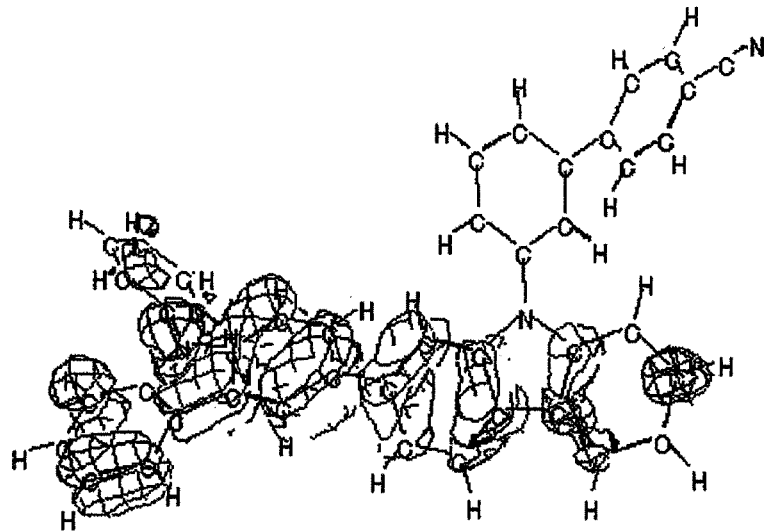

LUMO



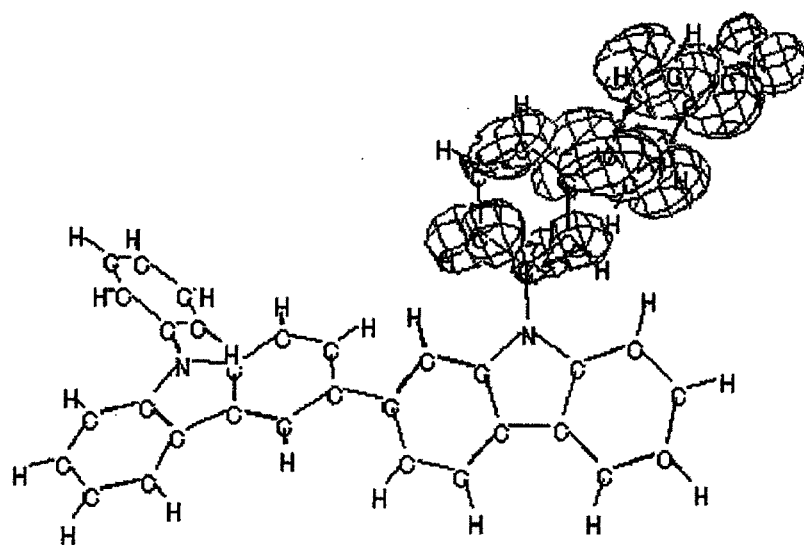


Fig. 4

HOMO

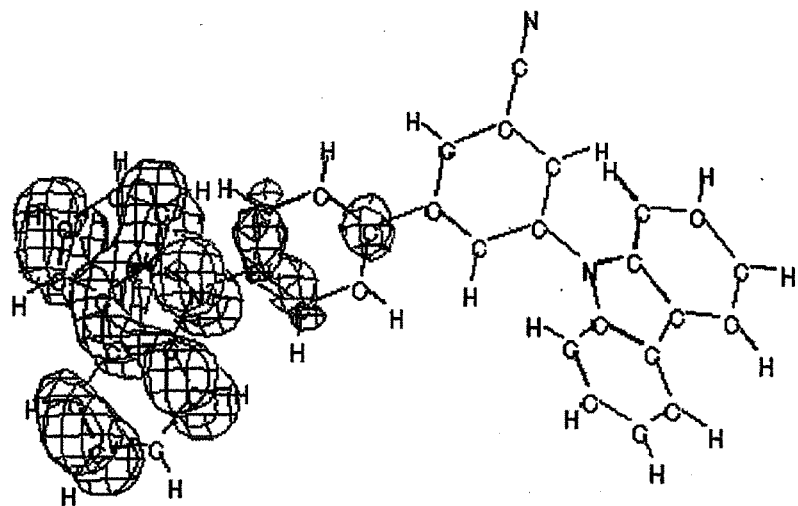

LUMO

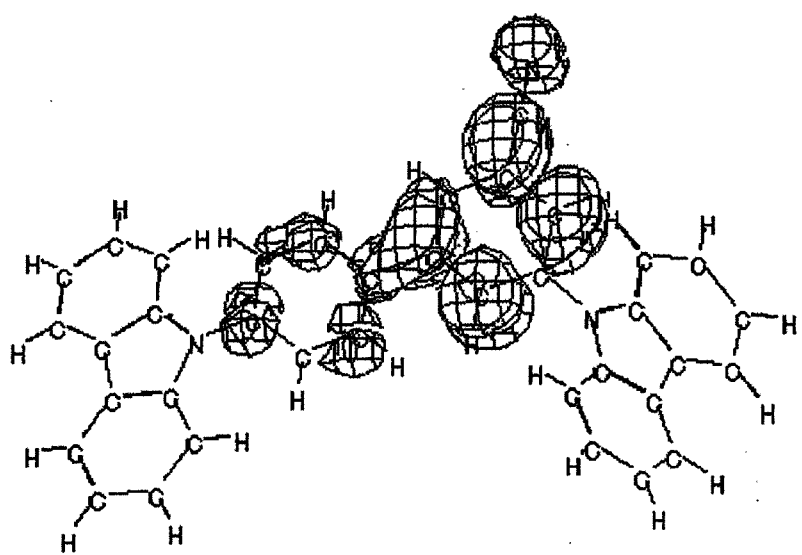

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2011132684 A [0012]
- JP 2011176258 A [0012]
- JP 2009120582 A [0012]
- JP 3695714 B [0176]
- WO 2010134350 A1 [0182]

Non-patent literature cited in the description

- *Tetrahedron*, 1984, vol. 40, 1433-1456 [0067]
- *Journal of American Chemical Society*, 2001, vol. 123, 7727-7729 [0067]

专利名称(译)	有机电致发光元件用材料和有机电致发光元件		
公开(公告)号	EP2790239B1	公开(公告)日	2020-02-05
申请号	EP2012855216	申请日	2012-12-04
[标]申请(专利权)人(译)	出光兴产株式会社		
申请(专利权)人(译)	出光兴产股份有限公司		
当前申请(专利权)人(译)	出光兴产股份有限公司		
[标]发明人	MIZUKI YUMIKO ITO MITSUNORI INOUE TETSUYA HIBINO KUMIKO NISHIMURA KAZUKI YOSHIDA KEI		
发明人	MIZUKI, YUMIKO ITO, MITSUNORI INOUE, TETSUYA HIBINO, KUMIKO NISHIMURA, KAZUKI YOSHIDA, KEI		
IPC分类号	H01L51/50 C07D209/86 C09K11/06		
CPC分类号	C07D209/80 C07D209/86 C07D405/14 C07D409/14 C09K11/06 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1088 C09K2211/1092 H01L51/0072 H01L51/5072 H05B33/10 H01L51/0052 H01L51/0071		
优先权	2011266238 2011-12-05 JP 2012083146 2012-03-30 JP		
其他公开文献	EP2790239A1 EP2790239A4		
外部链接	Espacenet		

摘要(译)

描述了用于有机电致发光器件的材料，该材料具有在其特定位置结合有氰基取代的芳族烃基或氰基取代的杂环基的特定中心骨架。进一步描述了一种有机电致发光器件，其包括在阳极和阴极之间的有机薄膜层。有机薄膜层包括发光层，并且有机薄膜层的至少一层包含用于有机电致发光器件的材料。用于有机电致发光器件的材料实现了具有良好发射效率的有机电致发光器件。

