



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**25.08.2004 Bulletin 2004/35**

(51) Int Cl.<sup>7</sup>: **G06F 3/033**

(21) Application number: **04075058.0**

(22) Date of filing: **08.01.2004**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(72) Inventor: **Cok, Ronald S.,**  
**Eastman Kodak Company**  
**Rochester, New York 14650-2201 (US)**

(30) Priority: **17.01.2003 US 346987**


(74) Representative: **Weber, Etienne Nicolas et al**  
**Kodak Industrie,**  
**Département Brevets,**  
**CRT,**  
**Zone Industrielle**  
**71102 Chalon sur Saône Cedex (FR)**

(71) Applicant: **EASTMAN KODAK COMPANY**  
**Rochester, New York 14650 (US)**

(54) **Oled display and touch screen**

(57) An OLED display and touch screen system including a substrate; an OLED display including an array of individually addressable OLEDs formed on the substrate; and a touch screen including an OLED light emitter formed on the substrate and a light sensor formed

on the substrate across the display from the light emitter, and optics located around the display above the light emitter and the light sensor for directing light emitted from the light emitter across the display to the light sensor.

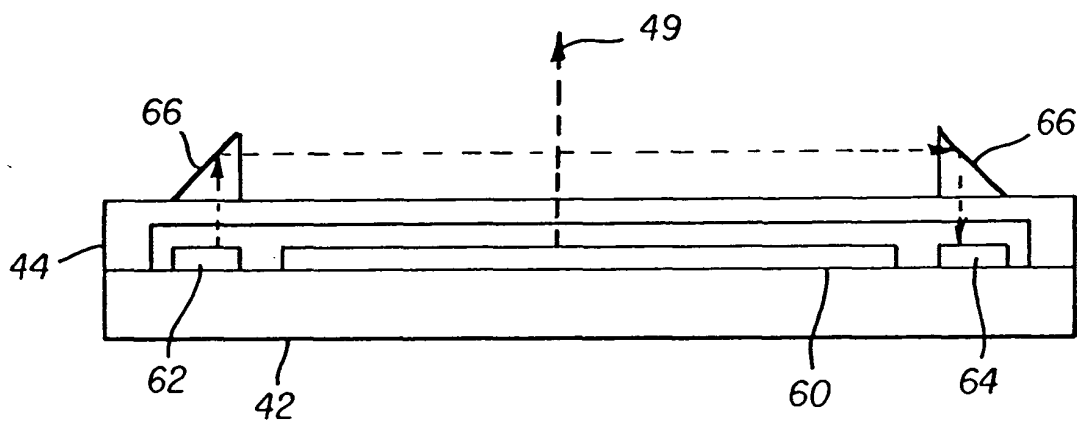

**FIG. 1**

## Description

**[0001]** This invention relates generally to organic light emitting diode (OLED) displays and, more particularly, to an OLED display with a touch screen.

**[0002]** Modern electronic devices provide an increasing amount of functionality with a decreasing size. By continually integrating more and more capabilities within electronic devices, costs are reduced and reliability increased. Touch screens are frequently used in combination with conventional soft displays such as cathode ray tubes (CRTs), liquid crystal displays (LCDs), plasma displays and electroluminescent displays. The touch screens are manufactured as separate devices and mechanically mated to the viewing surfaces of the displays.

**[0003]** US 2002/0175900 A1 by Armstrong, published November 28, 2002, describes a touch system for use with an information display system including a frame defining an opening corresponding in size and shape to an information display area of a display. On each side is positioned an array of light emitting devices with a light-transmissive prism positioned along each array of light emitting devices such that light emitted from the light emitting devices is directed across the touch input area. The system also includes light detection devices positioned at each corner of the frame. In a preferred embodiment, the light emitting devices are organic light emitting diodes.

**[0004]** When such a touch screen is used with a flat panel display, the touch screen is simply placed over the flat panel display and the two are held together by a mechanical mounting means such as an enclosure. These prior art arrangements combining touch screens and OLED displays suffer from a variety of drawbacks. The use of frames increases the parts count, weight, and cost of the device. The separation between the touch screen and display increases thickness. Redundant components found in the display and touch screen further increase cost and decrease performance as compared to more integrated solutions. Moreover, the need for separate cabling for the touch screen increases manufacturing costs.

**[0005]** Thus, there remains a need for an improved touch screen, flat panel display system that minimizes device weight, removes redundant materials, decreases cost, eliminates special mechanical mounting designs, increases reliability, and minimizes the degradation in image quality.

**[0006]** The need is met according to the present invention by providing an OLED display and touch screen system including a substrate; an OLED display including an array of individually addressable OLEDs formed on the substrate; and a touch screen including an OLED light emitter formed on the substrate and a light sensor formed on the substrate across the display from the light emitter, and optics located around the display above the light emitter and the light sensor for directing light emitted from the light emitter across the display to the light

sensor.

**[0007]** The display according to the present invention is advantageous in that it provides a thin, light, easily manufacturable display having reduced weight, size, and cost and a greater reliability.

Fig. 1 is a schematic side view showing the basic structure of an integrated OLED display and touch screen according to the present invention;

Fig. 2 is a schematic top view of the integrated OLED display and touch screen;

Fig. 3a, b, and c are schematic top views of an integrated OLED display and touch screen showing alternate locations of the emitters and sensors;

Fig. 4 is a schematic side view of an integrated OLED display and touch screen wherein the optics located around the frame are mirrored surfaces of the frame according to one embodiment of the invention;

Fig. 5 is a schematic side view of an integrated OLED display and touch screen wherein the optics located around the frame are light pipes; and

Fig. 6 is a schematic side view of an integrated OLED display and touch screen wherein the OLED display is a bottom emitting display.

**[0008]** Referring to Fig. 1, a top-emitting OLED display device with an integrated optical touch screen according to one embodiment of the present invention includes a rectangular substrate **42** with an encapsulating cover **44**. Located on the substrate is an OLED display **60** including electrodes and multiple layers of materials such as hole-injection layers and electron transport layers as is well known in the art (not shown). Light **49** emitted from the display passes through the encapsulating cover **44** or is reflected from the substrate **42** and is emitted through the encapsulating cover **44**. At one side of the rectangular substrate **42** is an array of infra red OLED light emitters **62**. Infrared OLED light emitters are known and can be made, for example, by doping OLED devices with rare-earth ions such as neodymium or erbium. At the opposite side of the rectangular substrate **42** is an array of infra-red light sensors **64**. Preferably, the infrared light sensors are fabricated on the substrate using organic semiconductor technology similar to that used to make the OLED display. Alternatively, the sensors can be made using thin film inorganic semiconductor technology. The sensors may include filters to improve their frequency response.

**[0009]** As shown in Fig. 2, a second pair of emitter and sensor arrays are arranged on the other two sides of the rectangular substrate **42**. According to the present invention, both the light emitters **62** and sensors **64** are integrated on the same substrate as the OLED display **60**. Optics, such as mirrors **66** are arranged over the encapsulating cover **44** directly above the emitter and sensor arrays for directing light emitted from the light emitters **62** across the display to the light sensors **64**.

The mirrors **66** can be constructed using glass or plastic prisms with a reflective side arranged at approximately **45** degrees to the cover **44**.

Alternatively, the mirrors can be supported at approximately **45** degree angles with respect to the cover **44**. A touch screen controller (not shown) is connected to the touch screen to operate the emitters **62** and sensors **64**.

**[0010]** Referring to Fig. 3a, b and c, a top view of alternative arrangements of the light emitters **62** and sensors **64** are shown. In the arrangement shown in Fig. 3a, the light emitters **62** are located in two arrays adjacent two contiguous edges of the display **60** and the sensors **64** are located in two arrays adjacent the other two edges of the display **60**. In the arrangement shown in Fig. 3b, the light emitters **62** and sensors **64** are interdigitated in arrays surrounding the display **60**. In the arrangement shown in Fig. 3c, emitter arrays are located on all four sides of the display area **60** and sensors **64** are located at the corners of the display **60**, similar to the arrangement shown by Armstrong in published US Patent Application 2002/0175900.

**[0011]** In operation, the infra-red OLED light emitters **62** emit light in every direction. The light is reflected from the **45** degree mirrors **66** located above the emitters and pass over the surface of the OLED display **60**. After passing over the surface of the OLED display, the light is reflected by the **45** degree mirrors located above the sensors **64** to the infra-red sensors **64**. The sensors **64** detect the light and produce feedback signals that are supplied to the touch screen controller and interpreted in a conventional manner to locate the position of an object that interrupts the light from the emitters **62**. Because the touch screen elements are integrated on a common substrate with the display, a single connector may be used for both the touch screen and the display. Elements of the touch screen controller and/or the display controller may be integrated on the substrate.

**[0012]** Because each infrared OLED light emitter **62** emits light in every direction, a single emitter can be used in conjunction with multiple sensors **64** to detect a touch. Alternatively, multiple emitters can be used in conjunction with a single sensor to detect a touch. The emitters and sensors can be energized sequentially or in common to optimize the performance of the touch screen under a wide variety of conditions, including high ambient light, low-power operation, a noisy environment, or high performance mode.

**[0013]** The emitters may be energized sequentially to provide multiple signals thereby increasing the signal-to-noise ratio of the result and providing a more detailed map of any touching implement that inhibits the transmission of the infrared light. In yet another mode, the emitters are energized simultaneously and the relative amount of light sensed by the sensors **64** are used to detect a touch. In this arrangement, the emitters **62** can be a single long emitter with a single control signal.

**[0014]** The use of multiple emitters and sensors ena-

bles a very robust sensing apparatus. Single-point failures can be overcome and convex shapes can be detected. High-reliability operation is possible by combining signals from various emitters sensed by various sensors. The infrared signal itself may be modulated to overcome background noise or different frequencies of infrared light may be emitted and detected.

**[0015]** Referring to Fig. 4, the **45** degree mirrors **66** located above the emitters **62** and sensors **64** may be formed by a reflective surface on an enclosure **70** enclosing the integrated display and touchscreen. Referring to Fig. 5, the optics for directing light emitted from the light emitter **62** across the display to the light sensor **64** may comprise light pipes **72**.

**[0016]** Referring to Fig. 6, a bottom-emitting OLED display device with an integrated optical touch screen according to another embodiment of the present invention includes a rectangular substrate **42** with an encapsulating cover **44**. Located on the substrate is an OLED display **60** including electrodes and multiple layers of materials such as hole-injection layers and electron transport layers as is well known in the art (not shown). Light **49** emitted from the display passes directly through the substrate **42** or is reflected from the encapsulating cover **44** and passes through the substrate **42**.

**[0017]** Because the present invention does not require a separate frame or substrate for the touch screen, it reduces the weight, size (thickness), and cost of a combined touch screen and OLED display device.

## Claims

1. An OLED display and touch screen system, comprising:
  - a) a substrate;
  - b) an OLED display including an array of individually addressable OLEDs formed on the substrate; and
  - c) a touch screen including an OLED light emitter formed on the substrate and a light sensor formed on the substrate across the display from the light emitter, and optics located around the display above the light emitter and the light sensor for directing light emitted from the light emitter across the display to the light sensor.
2. The OLED display and touch screen claimed in claim 1, wherein the OLED light emitter is a linear array of individually addressable OLEDs and the light sensor is a linear array of light detecting elements.
3. The OLED display and touch screen claimed in claim 2, wherein the OLEDs of the OLED light emitter and the light detecting elements are interspersed in a plurality of linear arrays.

4. The OLED display and touch screen claimed in claim 1, wherein the OLED light emitter is a linear OLED and the light sensor is a linear array of light detecting elements.
5. The OLED display and touch screen claimed in claim 1, wherein the OLED display is a top emitting display.
6. The OLED display and touch screen claimed in claim 1, wherein the OLED display is a bottom emitting display.
7. The OLED display and touch screen claimed in claim 1, wherein the OLED light emitter emits infra-red light.
8. The OLED display and touch screen claimed in claim 1, wherein the optics are 45 degree mirrors.
9. The OLED display and touch screen claimed in claim 1, further comprising a frame surrounding the OLED display, and wherein the 45 degree mirrors are supported by the frame.
10. The OLED display and touch screen claimed in claim 1, further comprising a frame surrounding the OLED display, and wherein the 45 degree mirrors are formed on the frame.
11. The OLED display and touch screen claimed in claim 1, wherein the optics are fiber optics.
12. The OLED display and touch screen claimed in claim 2, further comprising control electronics for sequentially activating the OLEDs of the OLED light emitter.
13. The OLED display and touch screen claimed in claim 2, further comprising control electronics for simultaneously activating the OLEDs of the OLED light emitter.
14. The OLED display and touch screen claimed in claim 1, further comprising control electronics for activating the OLED light emitter in a predetermined temporal pattern and for filtering an output from the light sensor to detect the predetermined pattern.
15. The OLED display and touch screen claimed in claim 1, further comprising unitary control electronics for controlling both the OLED display and the touch screen.
16. The OLED display and touch screen claimed in claim 15, wherein the control electronics are formed on the substrate.
17. The OLED display and touch screen claimed in claim 1, wherein the light sensor is a non-organic light detecting element.
18. The OLED display and touch screen claimed in claim 17, wherein the non-organic light detecting element is a silicon light detecting element.
19. The OLED display and touch screen claimed in claim 1, wherein the light sensor is an organic light sensor.
20. The OLED display and touch screen claimed in claim 10, including an enclosure for the display wherein the frame is a portion of the enclosure.

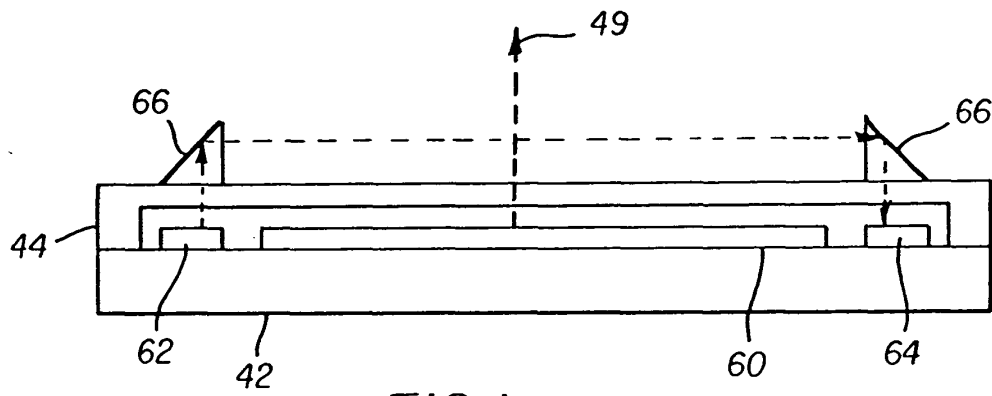


FIG. 1

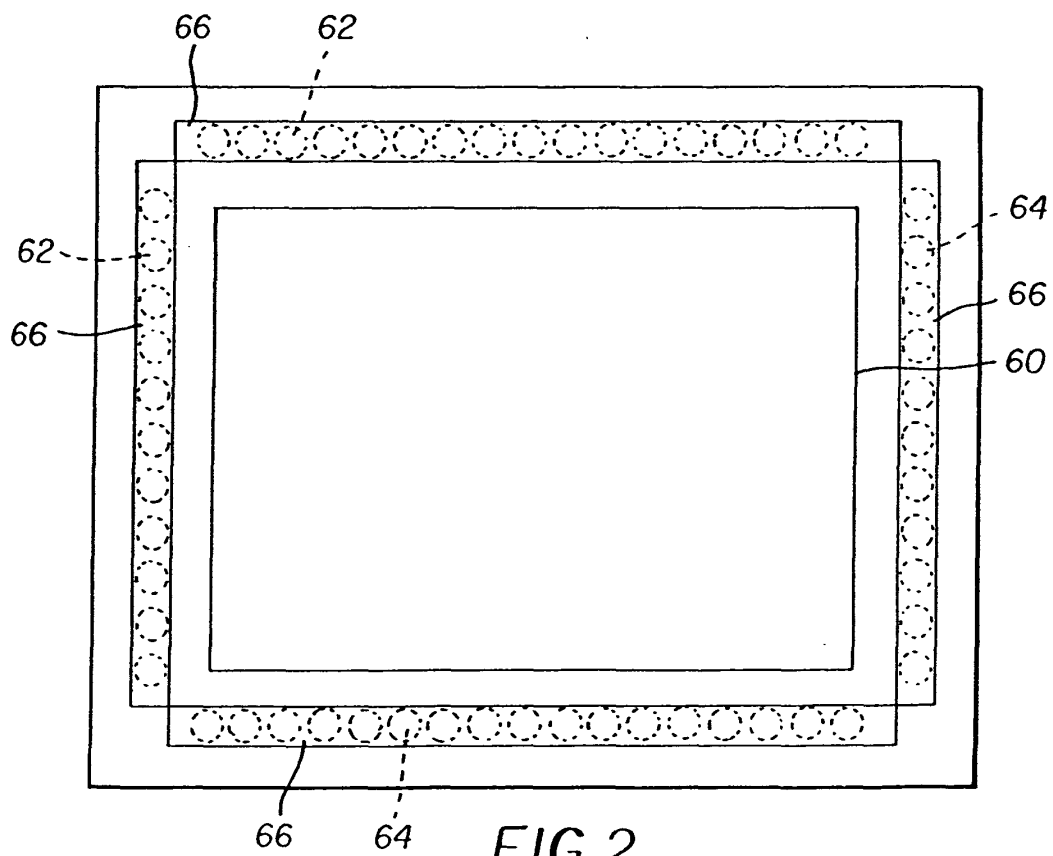
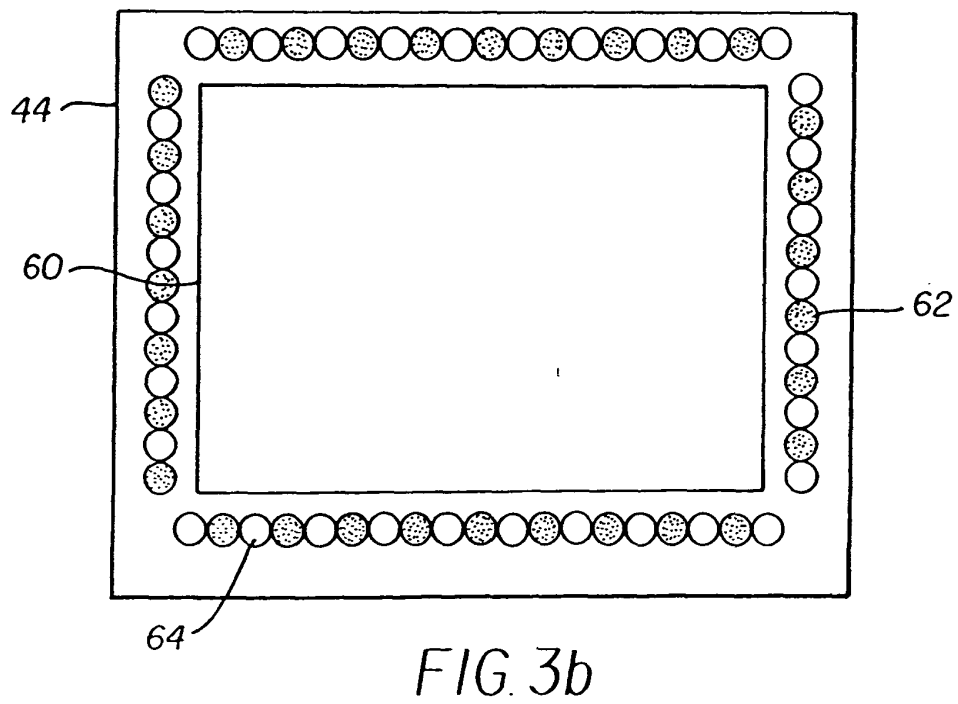
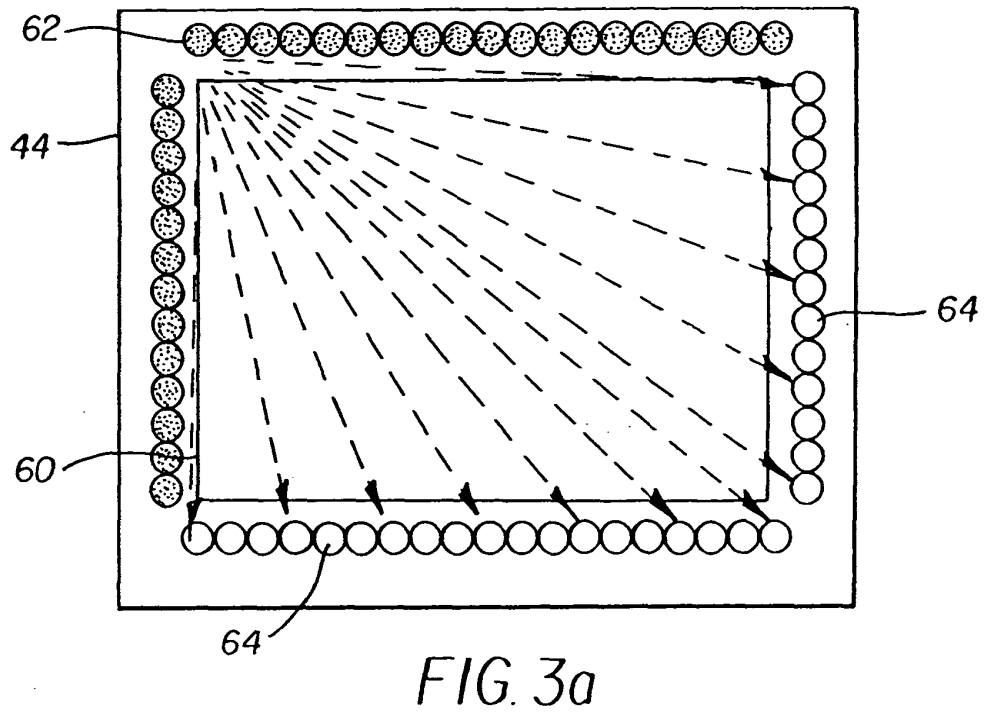


FIG. 2



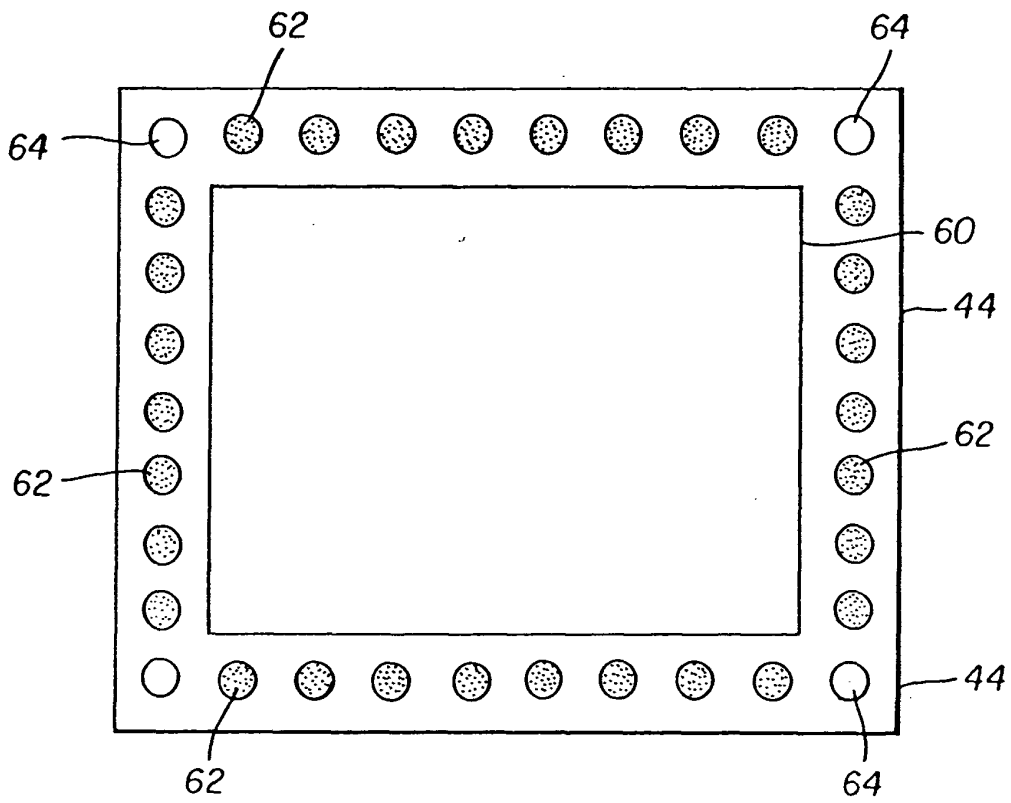


FIG. 3c

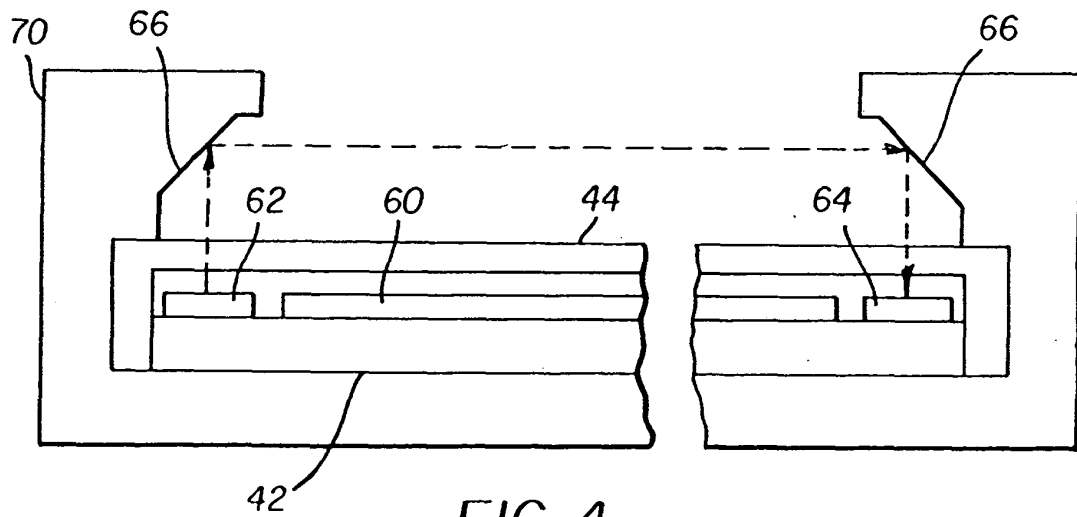


FIG. 4

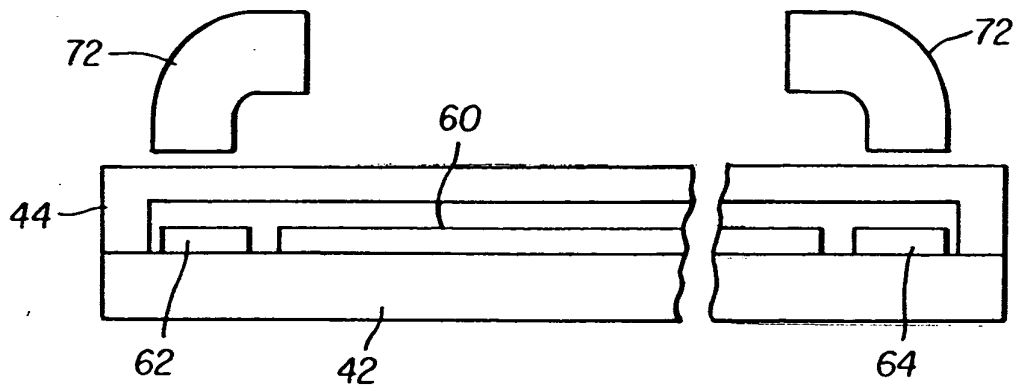


FIG. 5

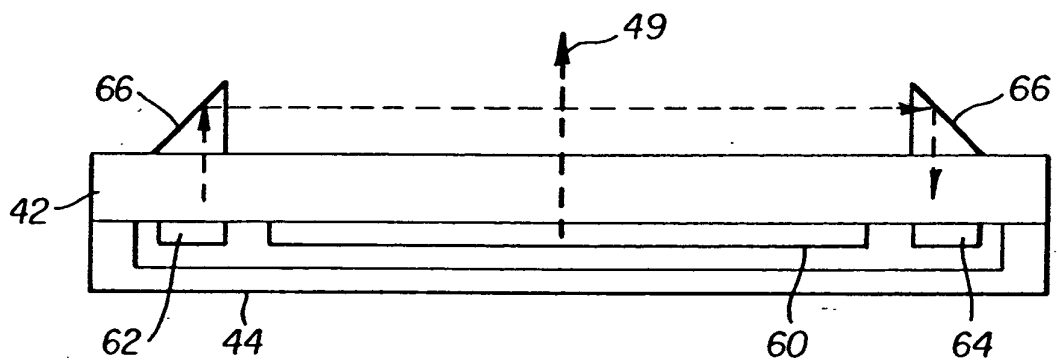


FIG. 6



专利名称(译)	Oled显示屏和触摸屏		
公开(公告)号	<a href="#">EP1450245A2</a>	公开(公告)日	2004-08-25
申请号	EP2004075058	申请日	2004-01-08
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	COK RONALD S EASTMAN KODAK COMPANY		
发明人	COK, RONALD S., EASTMAN KODAK COMPANY		
IPC分类号	H01L51/50 G06F3/03 G06F3/033 G06F3/041 G06F3/042 G09F9/00 G09F9/30 G09F9/33 G09G5/00 H01L27/32 H05B33/00 H05B33/14		
CPC分类号	H01L27/3227 H01L27/323 C01B32/366		
优先权	10/346987 2003-01-17 US		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

一种OLED显示器和触摸屏系统，包括基板；OLED显示器，包括在基板上形成的可单独寻址的OLED阵列；触摸屏，包括形成在基板上的OLED光发射器和从光发射器穿过显示器形成在基板上的光传感器，以及位于光发射器和光传感器上方的显示器周围的光学器件，用于引导从光发射的光发射器穿过显示器到达光传感器。

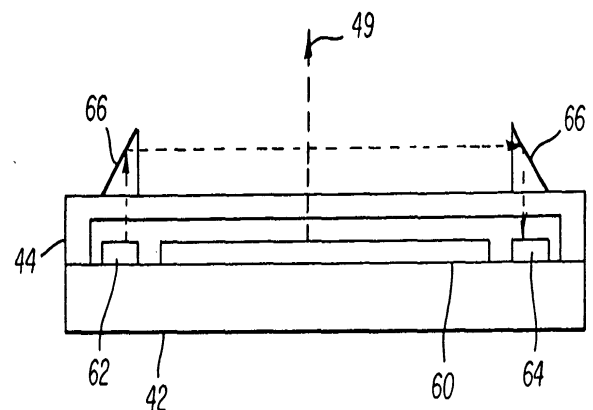


FIG. 1