

(19)



(11)

EP 1 469 448 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.10.2015 Bulletin 2015/43

(51) Int Cl.:

G09G 3/30 ^(2006.01)

G09G 3/20 ^(2006.01)

(86) International application number:

PCT/JP2002/013728

(21) Application number: **02792039.6**

(22) Date of filing: **26.12.2002**

(87) International publication number:

WO 2003/058593 (17.07.2003 Gazette 2003/29)

(54) **ORGANIC EL DISPLAY LUMINANCE CONTROL METHOD AND LUMINANCE CONTROL CIRCUIT**

LUMINANZSTEUERVERFAHREN FÜR EINE ORGANISCHE EL-ANZEIGE UND
LUMINANZSTEUERSCHALTUNG

PROCÉDÉ DE COMMANDE DE LA LUMINANCE D'UN ECRAN ELECTROLUMINESCENT
ORGANIQUE ET CIRCUIT DE COMMANDE DE LUMINANCE

(84) Designated Contracting States:

DE FR GB

(30) Priority: **28.12.2001 JP 2001400238**

28.03.2002 JP 2002091796

(43) Date of publication of application:

20.10.2004 Bulletin 2004/43

(73) Proprietor: **Panasonic Intellectual Property
Corporation**

**of America
Torrance, CA 90503 (US)**

(72) Inventors:

- **MORI, Yukio**
Moriguchi City, Osaka 570-8677 (JP)
- **TANASE, Susumu**
Moriguchi City, Osaka 570-8677 (JP)
- **YAMASHITA, Atsuhiko**
Moriguchi City, Osaka 570-8677 (JP)
- **INOUE, Masutaka**
Moriguchi City, Osaka 570-8677 (JP)

- **KINOSHITA, Shigeo**
Moriguchi City, Osaka 570-8677 (JP)

- **MURATA, Haruhiko**
Moriguchi City, Osaka 570-8677 (JP)

(74) Representative: **Glawe, Delfs, Moll**

**Partnerschaft mbB von
Patent- und Rechtsanwälten
Postfach 26 01 62
80058 München (DE)**

(56) References cited:

WO-A-98/39914	JP-A- 6 350 943
JP-A- 8 123 385	JP-A- 9 147 101
JP-A- 10 108 021	JP-A- 10 268 832
JP-A- 11 275 386	JP-A- 2000 056 730
JP-A- 2000 089 712	JP-A- 2000 221 945
JP-A- 2001 022 319	JP-A- 2001 109 434
JP-A- 2001 184 015	JP-A- 2001 320 454
JP-A- 2001 350 450	US-A1- 2001 036 312

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 469 448 B1

Description

Technical Field

[0001] The present invention relates to a luminance control circuit for an organic electroluminescence (EL) display and a portable telephone set comprising the organic EL display.

Background Art

[0002] Examples of organic EL displays include passive-type ones having a simple matrix structure and active-type ones using a TFT (Thin Film Transistor).

[0003] Fig. 1 illustrates the basic pixel structure of the active type organic EL display.

[0004] A circuit corresponding to one pixel in the active type organic EL display comprises a switching TFT 101, a capacitor 102, a driving TFT 103, and an organic EL element 104.

[0005] A display signal Data(Vin) is applied to the drain of the switching TFT 101 through a display signal line 111. A selection signal SCAN is applied to the base of the switching TFT 101 through a selection signal line 112. The switching TFT 101 has its source connected to the base of the driving TFT 103 and grounded through the capacitor 102.

[0006] A driving power supply voltage Vdd is applied to the drain of the driving TFT 103 through a power supply line 113. The driving TFT 103 has its source connected to the anode of the organic EL element 104. The cathode of the organic EL element 104 is grounded.

[0007] The switching TFT 101 is subjected to ON/OFF control by the selection signal SCAN. The capacitor 102 is charged by the display signal Data (Vin) fed through the switching TFT 101 when the switching TFT 101 is turned on. The capacitor 102 holds a charging voltage when the switching TFT 101 is turned off. The driving TFT 103 supplies to the organic EL element 104 a current corresponding to the voltage, held in the capacitor 102, which is applied to the base thereof.

[0008] Fig. 2 illustrates the relationship between the display signal Data(Vin) and a light-emitting luminance (a driving current) of the organic EL element 104 in the basic pixel structure shown in Fig. 1.

[0009] In Fig. 2, RefW and RefB respectively indicate a white-side reference voltage for defining a light-emitting luminance corresponding to the white level of an input signal and a black-side reference voltage for defining a light-emitting luminance corresponding to the black level of the input signal.

[0010] In the above-mentioned active type organic EL display, a large current flows through the organic EL element 104 with respect to an image which is bright on the whole screen. When the large current flows through the organic EL element 104, power consumption is increased. When the large current continues to flow through the organic EL element 104, the degradation of

the performance thereof is advanced.

[0011] Therefore, a technique for detecting the current flowing into the cathode of the organic EL element 104, and controlling the power supply voltage Vdd of the organic EL element 104 in response to the value of the detected current, thereby reducing the power supply voltage to reduce a driving current when the overall screen is bright, for example, has been developed (see JP-A-2000-267628).

[0012] The control of the power supply voltage by the above-mentioned prior art is feedback control for controlling the power supply voltage Vdd of the organic EL element 104 in response to the value of the detected current. In the case of the feedback control, when the brightness of a video is rapidly changed, for example, excessive control easily occurs. In the case, a luminance varies in a short period, which is so-called "hunting".

[0013] Furthermore, it is exemplarily referred to documents JP 10 108 021 A and EP 1 139 322 A2.

[0014] An object of the present invention is to provide a luminance control method and a luminance control circuit for an organic EL display capable of achieving power saving as well as restraining the degradation in the performance of an organic EL element and capable of preventing "hunting" from occurring.

[0015] Another object of the present invention is to provide a portable telephone set capable of changing the display luminance of an organic EL display depending on peripheral brightness.

[0016] A further object of the present invention is to provide a portable telephone set capable of changing the display luminance of an organic EL display depending on the direction of a portable telephone set.

Disclosure of Invention

[0017] When the video input signal is a digital video signal, a reference voltage supplied to a digital-to-analog (DA) converter for converting the digital video input signal into an analog video signal is controlled on the basis of the luminance accumulation value calculated in the first step, to control the amplitude of the video input signal in the second step.

[0018] The reference voltage supplied to the digital-to-analog converter includes a black-side reference voltage for defining a light-emitting luminance corresponding to the black level of the input signal and a white-side reference voltage for defining a light-emitting luminance corresponding to the white level of the input signal, and in the second step, the white-side reference voltage is controlled on the basis of the luminance accumulation value calculated in the first step.

[0019] A luminance control circuit according to claim 1 for an organic EL display is characterized by comprising a digital-to-analog converter for converting a digital video input signal into an analog video output signal on the basis of input/output characteristics defined by a given reference voltage, and feeding the analog video output

signal to the organic EL display; and a reference voltage control circuit for controlling the reference voltage supplied to the digital-to-analog converter on the basis of the digital video input signal, and in that the reference voltage control circuit comprises a luminance accumulation value calculation circuit for calculating a luminance accumulation value for each screen on the basis of the digital video input signal, and a voltage control circuit for controlling the reference voltage supplied to the digital-to-analog converter on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit, the reference voltage supplied to the digital-to-analog converter includes a black-side reference voltage for defining a light-emitting luminance corresponding to the black level of the input signal and a white-side reference voltage for defining a light-emitting luminance corresponding to the white level of the input signal, and the voltage control circuit controls, when the luminance accumulation value calculated by the luminance accumulation value calculation circuit exceeds a predetermined value, the white-side reference voltage such that the larger the difference between the luminance accumulation value and the predetermined value is, the lower the light-emitting luminance corresponding to the white level of the input signal becomes.

[0020] The voltage control circuit comprises a gain calculation circuit for calculating a gain for controlling the white-side reference voltage on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit, and a control circuit for controlling the white-side reference voltage on the basis of the gain calculated by the gain calculation circuit.

[0021] The gain calculation circuit has such input/output characteristics that a gain to be outputted is set to a constant value when the inputted luminance accumulation value is not more than a predetermined value, and the larger the inputted luminance accumulation value is, the smaller the gain to be outputted is made when the inputted luminance accumulation value exceeds the predetermined value, and the control circuit controls the white-side reference voltage such that the smaller the gain is, the lower the light-emitting luminance corresponding to the white level of the input signal becomes.

[0022] The voltage control circuit comprises a gain calculation circuit for calculating a first gain for controlling the white-side reference voltage on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit, a multiplication circuit for multiplying the first gain calculated by the gain calculation circuit by a second gain given from the exterior, and a control circuit for controlling the white-side reference voltage on the basis of a third gain which is the result of the multiplication by the multiplication circuit.

[0023] The gain calculation circuit has such input/output characteristics that a gain to be outputted is set to a constant value when the inputted luminance accumulation value is not more than a predetermined value, and

the larger the inputted luminance accumulation value is, the smaller the gain to be outputted is made when the inputted luminance accumulation value exceeds the predetermined value, and the control circuit controls the white-side reference voltage such that the smaller the third gain is, the lower the light-emitting luminance corresponding to the white level of the input signal becomes.

[0024] In a portable telephone set comprising a camera having an automatic exposure control function and an organic EL display, a first portable telephone set may comprise judgment means for judging peripheral brightness on the basis of exposure control information relating to the camera, and display luminance control means for controlling the display luminance of the organic EL display on the basis of the peripheral brightness judged by the judgment means.

[0025] The display luminance control means controls the display luminance of the organic EL display such that the display luminance of the organic EL display is reduced when the peripheral brightness judged by the judgment means is low, while being increased when the peripheral brightness judged by the judgment means is high.

[0026] The exposure control information relating to the camera is one selected from exposure time information and AGC gain information.

[0027] In a portable telephone set comprising an organic EL display, a second portable telephone set may comprise detection means for detecting the direction of a display surface of the organic EL display; and display luminance control means for controlling the display luminance of the organic EL display on the basis of the direction of the display surface of the organic EL display which is detected by the detection means.

[0028] The display luminance control means controls the display luminance of the organic EL display such that the display luminance of the organic EL display is increased when the display surface of the organic EL display is directed upward, while being reduced when the display surface of the organic EL display is directed downward.

Brief Description of Drawings

[0029]

Fig. 1 is a circuit diagram showing the basic pixel structure of an active type organic EL display.

Fig. 2 is a graph showing the relationship between a display signal Data(Vin) and a light-emitting luminance (a driving current) of an organic EL element in the basic pixel structure shown in Fig. 1.

Fig. 3 illustrates the configuration of a luminance control circuit for an organic EL display according to a first embodiment of the present invention.

Figs. 4(a) and 4(b) are graphs showing examples of the input/output characteristics of a gain calculation circuit 14.

Fig. 5 is a circuit diagram showing a reference voltage control circuit corresponding to R.

Fig. 6 is a graph showing the input/output characteristics of a DAC 2.

Fig. 7 illustrates the configuration of a luminance control circuit for an organic EL display according to a second embodiment of the present invention.

Fig. 8 is a graph showing an example of the setting of the input/output characteristics of each of gain correction circuits 61, 62, and 63.

Fig. 9 is a block diagram showing the schematic configuration of a portable telephone set according to a third embodiment of the present invention.

Fig. 10 is a block diagram showing the configuration of a luminance control circuit provided in a timing control IC 213 shown in Fig. 9, and an MPU 209 for controlling a luminance for the whole screen and its peripheral device.

Fig. 11 is a block diagram showing the schematic configuration of a portable telephone set according to a fourth embodiment of the present invention.

Fig. 12 is a block diagram showing the configuration of a luminance control circuit provided in a timing control IC 213 shown in Fig. 11, and an MPU 209 for controlling a luminance for the whole screen and its peripheral device.

Best Mode for Carrying Out the Invention

[0030] Referring now to Figs. 3 to 10, embodiments of the present invention will be described.

[1] Description of First Embodiment

[0031] Fig. 3 illustrates the configuration of a luminance control circuit for an organic EL display according to a first embodiment of the present invention.

[0032] The luminance control circuit for the organic EL display comprises a reference voltage control circuit 1 and a DAC (Digital-to-Analog Converter) 2. Digital video input signals R_{in}, G_{in}, and B_{in} are fed to the reference voltage control circuit 1 and are fed to the DAC 2. The reference voltage control circuit 1 controls a reference voltage supplied to the DAC 2. The reference voltage supplied to the DAC 2 includes black-side reference voltages R_{RefB}, G_{RefB}, and B_{RefB} (generically referred to as a RefB) and white-side reference voltages R_{RefW}, G_{RefW}, and B_{RefW} (generically referred to as RefW), respectively, with respect to colors R (Red), G (Green), and B (Blue).

[0033] The black-side reference voltage RefB is a reference voltage for defining a light-emitting luminance corresponding to the black level of an input signal, and is fixed in the present embodiment. The white-side reference voltage RefW is a reference voltage for defining a light-emitting luminance corresponding to the white level of an input signal, and is controlled by the reference voltage control circuit 1 in the present embodiment.

[0034] The DAC 2 respectively converts the digital video input signals R_{in}, G_{in}, and B_{in} into analog video output signals R_{out}, G_{out}, and B_{out} on the basis of input/output characteristics defined by the black-side reference voltage RefB and the white-side reference voltage RefW' which are fed from the reference voltage control circuit 1. The analog video output signals R_{out}, G_{out}, and B_{out} obtained by the DAC 2 are fed to the organic EL display 3. The analog video output signals R_{out}, G_{out}, and B_{out} correspond to the display signal Data(Vin) shown in Fig. 1.

[0035] The reference voltage control circuit 1 comprises a luminance signal generation circuit (Y generation circuit) 11, a luminance accumulation circuit 12, an LPF (Low-Pass Filter) 13, a gain calculation circuit 14, a reference voltage control circuit (Ref voltage control circuit) 15, and a plurality of DACs 16 to 21.

[0036] The luminance signal generation circuit 11 generates a luminance signal Y on the basis of the digital video input signals R_{in}, G_{in}, and B_{in}. The luminance accumulation circuit 12 calculates a luminance accumulation value for each frame on the basis of the luminance signal Y generated by the luminance signal generation circuit 11. The LPF 13 smoothes in the time direction the luminance accumulation value for each frame calculated by the luminance accumulation circuit 12. Although the LPF 13 is provided to slowly change a gain Gain, described later, with a rapid change in brightness, it may be omitted.

[0037] The gain calculation circuit 14 calculates the gain Gain for controlling the white-side reference voltage RefW depending on the luminance accumulation value for each frame obtained from the LPF 13. Figs. 4 (a) and 4 (b) respectively illustrate examples of input/output characteristics of the gain calculation circuit 14, that is, the characteristics of a gain against a luminance accumulation value for each frame.

[0038] In the characteristics shown in Fig. 4 (a), the gain is 1.00 when the luminance accumulation value for each frame is 0 to a, and gradually decreases when the luminance accumulation value for each frame exceeds a. In the characteristics shown in Fig. 4 (b), the gain is 1.00 when the luminance accumulation value for each frame is 0 to b, gently decreases when the luminance accumulation value for each frame is b to c, and somewhat rapidly decreases when the luminance accumulation value for each frame exceeds c.

[0039] The reference voltage control circuit 15 generates white-side reference voltages R_{RefW'}, G_{RefW'}, and B_{RefW'} after control for the colors R, G and B on the basis of the black-side reference voltages R_{RefB}, G_{RefB}, and B_{RefB} previously set for the colors R, G, and B, the white-side reference voltages R_{RefW}, G_{RefW}, and B_{RefW} previously set for the colors R, G, and B, and the gain Gain calculated by the gain calculation circuit 14.

[0040] Each of the black-side reference voltages R_{RefB}, G_{RefB}, B_{RefB} and each of the white-side

reference voltages R_RefW, G_RefW, B_RefW are respectively fed as digital signals.

[0041] Although the reference voltage control circuit 15 includes reference voltage control circuits respectively corresponding to the colors R, G, and B, their respective configurations are the same. Therefore, description is herein made of the reference voltage control circuit corresponding to the color R.

[0042] Fig. 5 illustrates the reference voltage control circuit corresponding to the color R.

[0043] The reference voltage control circuit comprises a subtracter 31, a multiplier 32, and a subtracter 33.

[0044] The subtracter 31 operates the difference ($R_RefB - R_RefW$) between the black-side reference voltage R_RefB corresponding to the color R and the white-side reference voltage R_RefW corresponding to the color R. The multiplier 32 multiplies an output of the subtracter 31 ($R_RefB - R_RefW$) by the gain Gain. The subtracter 33 subtracts an output of the multiplier 32 ($Gain \times (R_RefB - R_RefW)$) from the black-side reference voltage R_RefB , to calculate a white-side reference voltage R_RefW' after control.

[0045] When the gain is 1.00, the white-side reference voltage R_RefW' after control is equal to the white-side reference voltage R_RefW . The smaller the gain Gain becomes, that is, the larger the luminance accumulation value for each frame becomes, the larger the white-side reference voltage R_RefW' after control becomes, to come closer to the black-side reference voltage R_RefB . That is, the larger the luminance accumulation value for each frame becomes, the lower a light-emitting luminance (a driving current), corresponding to the white level of an input signal, of the organic EL element becomes.

[0046] The black-side reference voltages R_RefB , G_RefB , B_RefB are respectively converted into analog signals by DACs 16, 17, and 18, and are fed to the DAC 2. The white-side reference voltages R_RefW' , G_RefW' , B_RefW' after control are respectively converted into analog signals by the DACs 19, 20, and 21, and are fed to the DAC 2.

[0047] Fig. 6 illustrates the input/output characteristics of the DAC 2.

[0048] In Fig. 6, $RefW'1$ indicates a white-side reference voltage (= a white-side reference voltage $RefW$) supplied to the DAC 2 when the luminance accumulation value is small (in the case of a dark video). $RefW'3$ indicates a white-side reference voltage supplied to the DAC 2 when the luminance accumulation value is large (in the case of a bright video). $RefW'2$ indicates a white-side reference voltage supplied to the DAC 2 when the luminance accumulation value is an intermediate value (in the case of a video with intermediate brightness).

[0049] When the white-side reference voltage supplied to the DAC 2 is $RefW'1$, the input/output characteristics of the DAC 2 are characteristics indicated by a straight line L1. In this case, when an input signal which changes from a black level to a white level is periodically inputted to the DAC 2, an output waveform as indicated by a

curved line S1 is obtained.

[0050] When the white-side reference voltage supplied to the DAC 2 is $RefW'3$, the input/output characteristics of the DAC 2 are characteristics indicated by a straight line L3. In this case, when an input signal which changes from a black level to a white level is periodically inputted to the DAC 2, an output waveform as indicated by a curved line S3 is obtained.

[0051] When the white-side reference voltage supplied to the DAC 2 is $RefW'2$, the input/output characteristics of the DAC 2 are characteristics indicated by a straight line L2. In this case, when an input signal which changes from a black level to a white level is periodically inputted to the DAC 2, an output waveform as indicated by a curved line S2 is obtained.

[0052] That is, it is found by controlling the white-side reference voltage depending on the luminance accumulation value for each frame that the amplitude of the output signal of the DAC 2 is controlled.

[0053] In the above-mentioned embodiment, when the input video is a bright video, the amplitude of a video input signal (display signal) is reduced, thereby reducing the driving current for the organic EL element. Since the amplitude of the video input signal is controlled by controlling a reference voltage at the time of digital-to-analog conversion, the gray scale is not reduced.

[0054] Since the amplitude of the video input signal (display signal) is controlled by feed forward control, no "hunching" occurs.

[2] Description of an exemplary device

[0055] Fig. 7 illustrates the configuration of a luminance control circuit for an organic EL display according to an exemplary device of the present invention. In Fig. 7, the same components as those shown in Fig. 3 are assigned the same reference numerals and hence, the description thereof is not repeated.

[0056] The luminance control circuit for the organic EL display according to the second embodiment differs from the luminance control circuit for the organic EL display according to the first embodiment in the following points.

- (1) A multiplier 41 for controlling a luminance for the whole screen from the exterior is provided in a reference voltage control circuit 1.
- (2) Multipliers 51, 52, and 53 for allowing white balance control are provided in the reference voltage control circuit 1.
- (3) The characteristics of a light-emitting luminance corresponding to a display signal differ for colors R, G, and B, so that gain correction circuits 61, 62, and 63 for correcting a gain Gain are provided for the colors R, G, and B.

[0057] The differences will be described in more detail.

[0058] The gain Gain calculated by a gain calculation circuit 14 is inputted to the multiplier 41. A whole lumi-

nance control signal W _Gain for controlling the luminance for the whole screen from the exterior is fed to the multiplier 41. By controlling the signal W _Gain given to the multiplier 41, it is possible to make the screen bright when the display is used in a bright place and to make the screen dark after an elapse of a predetermined time period.

[0059] An output of the multiplier 41 is fed to each of the multipliers 51, 52, and 53. Arbitrary gains R _Gain, G _Gain, B _Gain are respectively fed for the colors R, G, and B to the multipliers 51, 52, and 53. Since the gains R _Gain, G _Gain, B _Gain respectively given to the multipliers 51, 52, and 53 can be individually controlled, white balance control can be made.

[0060] Outputs of the multipliers 51, 52, and 53 are respectively given to the corresponding gain correction circuits 61, 62, and 63. Each of the gain correction circuits 61, 62, and 63 sets input/output characteristics, as indicated by straight lines K1 and K2 shown in Fig. 8, for example, thereby correcting the inputted gain.

[0061] In a reference voltage control circuit 15, white-side reference voltages are corrected for the colors R, G, and B using the gains, respectively given from the gain correction circuits 61, 62, and 63, corresponding to the colors R, G, and B.

[3] Description of an exemplary device

[0062] Fig. 9 illustrates the schematic configuration of a portable telephone set.

[0063] An MPU (Microprocessor Unit) 209 carries out the overall control of the portable telephone set. An antenna 201 transmits and receives electric waves. A transmitting/receiving unit 202 receives the electric waves, and transmits the contents of the receiving to the MPU 209. Further, the transmitting/receiving unit 202 transmits a transmission signal outputted from the MPU 209 with the transmission signal on the electric waves.

[0064] A microphone 203 feeds an audio signal to the MPU 209. A speaker 204 outputs as an audio the audio signal outputted from the MPU 209. A first camera 205 is a camera mounted on a front surface of the main body of the portable telephone set provided with an organic EL display 214, and sends to the MPU 209 a video which it has picked up. A second camera 206 is a camera mounted on a rear surface of the main body of the portable telephone set, and sends to the MPU 209 a video which it has picked up. At the time of an imaging mode, the video picked up by the camera 205 or 206 is displayed on the organic EL display 214 in place of the content of the display at the time of a normal mode.

[0065] An operation unit 208 is provided in the main body of the portable telephone set, and comprises various buttons 221 and various switches 222, as shown in Fig. 10. A timer 211 is used for luminance control, described later.

[0066] A flash memory 210 stores data to be stored even when the power is turned off. A graphics memory

212 stores image data to be displayed on the display. Image data is written into a predetermined address in the graphics memory 212 on the basis of image data outputted from the MPU 209 and a writing control signal. Pixel data representing a corresponding pixel is outputted at the timing of scanning in conformity with a display period of the organic EL display 214 from the graphics memory 212.

[0067] A timing control IC 213 feeds image data and a driving signal to the organic EL display 214, and displays a video on the organic EL display 214. The timing control IC 213 comprises a luminance control circuit.

[0068] Fig. 10 illustrates the configuration of the luminance control circuit provided in the timing control IC 213, and the MPU 209 for controlling a luminance for the whole screen and its peripheral device.

[0069] In Fig. 10, the same components as those shown in Fig. 3 are assigned the same reference numerals and hence, the description thereof is not repeated.

The luminance control circuit shown in Fig. 10 is approximately the same as the luminance control circuit shown in Fig. 3 except that a multiplier 41 for controlling a luminance for the whole screen (a display luminance) is provided in a reference voltage control circuit 1. A whole luminance control signal W _Gain given to the multiplier 41 is generated by the MPU 209.

[0070] The various buttons 208 and the various switches 222 which are provided in the operation unit 208 are connected to the MPU 209. The MPU 209 comprises the timer 211. The cameras 205 and 206 are connected to the MPU 209. Each of the cameras 205 and 206 has an automatic exposure control function. In this example, exposure time information is sent to the MPU 209 from the first camera 205 mounted on the front surface of the main body of the portable telephone set.

[0071] The MPU 209 estimates peripheral brightness under current environments in which the portable telephone set is used on the basis of the exposure time information from the first camera 205, to generate the whole luminance control signal W _Gain. The whole luminance control signal W _Gain takes a value between 2.0 and 0.5, for example.

[0072] Specifically, when the exposure time is long, that is, the peripheral brightness is low, the whole luminance control signal W _Gain is reduced. As a result, a gain outputted from the multiplier 41 becomes smaller than a gain calculated by the gain calculation circuit 14, and a white-side reference voltage R _Refw' after control becomes high, so that the display luminance becomes low. Conversely, when the exposure time is short, that is, the peripheral brightness is high, the whole luminance control signal W _Gain is increased. As a result, the gain outputted from the multiplier 41 becomes larger than the gain calculated by the gain calculation circuit 14, and the white-side reference voltage R _Refw' after control becomes low, so that the display luminance becomes high.

[0073] The above-mentioned control may be carried out using AGC gain information relating to the first cam-

era 205 in place of the exposure time information relating to the first camera 205. In this case, when the AGC gain is large, it is judged that the peripheral brightness is low, to reduce the whole luminance control signal W _Gain. Conversely, when the AGC gain is small, it is judged that the peripheral brightness is high, to increase the whole luminance control signal W _Gain.

[0074] The MPU 209 reduces, when the various buttons 221 or the various switches 222 which are provided in the operation unit 208 are operated, the whole luminance control signal W _Gain is reduced, to increase the display luminance. When a predetermined time period has elapsed, the whole luminance control signal W _Gain is increased, to reduce the display luminance.

[0075] It is judged using the timer 211 whether or not a predetermined time period has elapsed. Specifically, the timer 211 is reset when the buttons 221 or the switches 222 are operated, to automatically start measurement of time. The luminance for the screen is controlled depending on the time measured by the timer 211. When not less than the predetermined time period has elapsed, the display luminance is reduced by half.

[4] Description of Fourth Embodiment

[0076] Fig. 11 illustrates the schematic configuration of a portable telephone set. In Fig. 11, the same components as those shown in Fig. 9 are assigned the same reference numerals and hence, the description thereof is not repeated.

[0077] The portable telephone set differs from the portable telephone set shown in Fig. 9 in that a direction sensor 207 for sensing the direction (upward, downward, sideward, etc.) of a display surface of an organic EL display 214 is provided. In the portable telephone set, display luminance control based on exposure time information from a first camera 205 is not carried out.

[0078] Fig. 12 illustrates the configuration of a luminance control circuit provided in a timing control IC 213, and an MPU 209 for controlling a luminance for the whole screen and its peripheral device.

[0079] In Fig. 12, the same components as those shown in Fig. 3 are assigned the same reference numerals and hence, the description thereof is not repeated. Although the luminance control circuit shown in Fig. 12 is approximately the same as the luminance control circuit shown in Fig. 3, it differs from the luminance control circuit shown in Fig. 3 in that a multiplier 41 for controlling a luminance for the whole screen (a display luminance) is provided in a reference voltage control circuit 1. A whole luminance control signal W _Gain given to the multiplier 41 is generated by the MPU 209.

[0080] Various buttons 221 and various switches 222 which are provided in an operation unit 208 are connected to the MPU 209. The MPU 209 comprises a timer 211. The direction sensor 207 is connected to the MPU 209.

[0081] The MPU 209 estimates the direction (upward, downward, sideward, etc.) of the display surface of the

organic EL display 214 on the basis of a detection signal of the direction sensor 207, to generate a whole luminance control signal W _Gain. The whole luminance control signal W _Gain takes a value between 2.0 and 0.5, for example.

[0082] Specifically, as the display surface of the organic EL display 214 is directed upward, the whole luminance control signal W _Gain is reduced, thereby making the display luminance higher. The whole luminance control signal W _Gain is controlled to a small value when the display surface of the organic EL display is directed upward, is controlled to a large value when the display surface of the organic EL display 214 is directed downward, and is controlled to an intermediate value when the display surface of the organic EL display 214 is directed sideward.

[0083] Furthermore, the MPU 209 reduces the whole luminance control signal W _Gain when the various buttons 221 or the various switches 222 which are provided in the operation unit 208 are operated, as in the above-mentioned third embodiment, thereby making the display luminance higher. When a predetermined time period has elapsed, the whole luminance control signal W _Gain is increased, thereby reducing the display luminance.

[0084] The direction (upward, downward, sideward, etc.) of the display surface of the organic EL display 214 may be detected from the exposure times and the AGC gains of two cameras 205 and 206.

[0085] That is, when the display surface of the organic EL display 214 is directed upward, the possibility that a front surface of the main body of the portable telephone set is brighter than a rear surface thereof is high. Therefore, it is considered that the exposure time of the first camera 205 attached to the front surface of the main body of the portable telephone set is shorter than the exposure time of the second camera 206 attached to the rear surface of the main body of the portable telephone set (the AGC gain thereof is reduced when the exposure times are the same).

[0086] Conversely, when the display surface of the organic EL display 214 is directed downward, the possibility that the rear surface of the main body of the portable telephone set is brighter than the front surface thereof is high. Therefore, it is considered that the exposure time of the second camera 206 attached to the rear surface of the main body of the portable telephone set is shorter than the exposure time of the first camera 205 attached to the front surface of the main body of the portable telephone set (the AGC gain thereof is reduced when the exposure times are the same).

[0087] Therefore, the direction of the display surface of the organic EL display 214 can be judged by the exposure times and the AGC gains of the two cameras 205 and 206.

Claims

1. A luminance control circuit for an organic electroluminescence display, comprising
a digital-to-analog converter (2) for converting a digital video input signal into an analog video output signal on the basis of input/output characteristics defined by a given reference voltage, and feeding the analog video output signal to the organic electroluminescence display; and
a reference voltage control circuit (1) for controlling the reference voltage supplied to the digital-to-analog converter (2) on the basis of the digital video input signal, and **characterized in that**
the reference voltage control circuit (1) comprises a luminance accumulation value calculation circuit (12) for calculating
a luminance accumulation value for each frame on the basis of the digital video input signal, and
a voltage control circuit (14, 15, 41, 51-53, 61-63) for controlling reference voltages supplied to the digital-to-analog converter (2) on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit (12), wherein the reference voltages supplied to the digital-to-analog converter (2) includes a black-side reference voltage for defining a light-emitting luminance corresponding to the black level of the input signal and a white-side reference voltage for defining a light-emitting luminance corresponding to the white level of the input signal, and
the voltage control circuit (14, 15, 41, 51-53, 61-63) when the luminance accumulated value calculated by the luminance accumulation value calculation circuit exceeds a predetermined value, controls the white-side reference voltage such that the larger the difference between the luminance accumulation value and the predetermined value, the smaller the difference between the white-side reference voltage and the black-side voltage is made, and wherein
the voltage control circuit (14, 15, 41, 51-53, 61-63) comprises a gain calculation circuit (14) for calculating a gain for controlling the white-side reference voltage on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit (12), and a control circuit (15) for controlling the white-side reference voltage on the basis of the gain calculated by the gain calculation circuit (14).
2. The luminance control circuit for the organic electroluminescence display according to claim 1, **characterized in that**
the gain calculation circuit (14) has such input/output characteristics that a gain to be outputted is set to a constant value when the inputted luminance accumulation value is not more than a predetermined value, and the larger the inputted luminance accumu-

lation value, the smaller the gain to be outputted is made when the inputted luminance accumulation value exceeds the predetermined value, and the control circuit (15) controls the white-side reference voltage such that the smaller the gain is, the smaller the difference between the white-side reference voltage and the black-side reference voltage is made.

3. The luminance control circuit for the organic electroluminescence display according to claim 1, **characterized in that**
the voltage control circuit (14, 15, 41, 51-53, 61-63) comprises a gain calculation circuit (14) for calculating a first gain for controlling the white-side reference voltage on the basis of the luminance accumulation value calculated by the luminance accumulation value calculation circuit (12), a multiplication circuit (41) for multiplying the first gain calculated by the gain calculation circuit by a second gain given from the exterior, and a control circuit (15, 51-53, 61-63) for controlling the white-side reference voltage on the basis of a third gain which is the result of the multiplication by the multiplication circuit (41).
4. The luminance control circuit for the organic electroluminescence display according to claim 3, **characterized in that**
the gain calculation circuit (14) has such input/output characteristics that a gain to be outputted is set to a constant value when the inputted luminance accumulation value is not more than a predetermined value, and the larger the inputted luminance accumulation value is, the smaller the gain to be outputted is made when the inputted luminance accumulation value exceeds the predetermined value, and the control circuit (15, 51-53, 61-63) controls the white-side reference voltage such that the smaller the third gain, the smaller the difference between the white-side reference voltage and the black-side reference voltage is made.

Patentansprüche

1. Helligkeitssteuerschaltung für eine organische Elektrolumineszenz-Anzeige, mit
einem Digital-Analog-Wandler (2) zum Wandeln eines digitalen Video-Eingangssignals in ein analoges Video-Ausgabesignal auf Grundlage der Eingabe-/Ausgabe-Charakteristika, die durch eine gegebene Bezugsspannung definiert sind, und zum Zuführen des analogen Video-Ausgabesignals an die organische Elektrolumineszenz-Anzeige, und
einer Bezugsspannung-Steuerschaltung (1) zum Steuern der Bezugsspannung, die dem Digital-Analog-Wandler (2) zugeführt wird, auf Grundlage des digitalen Video-Eingangssignals, **dadurch gekenn-**

zeichnet, dass

die Bezugsspannung-Steuerschaltung (1) aufweist eine Helligkeits-Sammelwert-Berechnungsschaltung (12) zum Berechnen eines Helligkeits-Sammelwertes für jeden Rahmen auf Grundlage des digitalen Video-Eingangssignals und eine Spannungssteuerschaltung (14, 15, 41, 51-53, 61-63) zum Steuern von Bezugsspannungen, die dem Digital-Analog-Wandler (2) zugeführt werden, auf Grundlage des Helligkeits-Sammelwertes, der durch die Helligkeits-Sammelwert-Berechnungsschaltung (12) berechnet wird, wobei die Bezugsspannungen, die dem Digital-Analog-Wandler (2) zugeführt werden, eine Schwarzseiten-Bezugsspannung zum Definieren einer Lichtausgabe-Helligkeit aufweist, die dem Schwarzpegel des Eingangssignals entspricht, und eine Weißseiten-Bezugsspannung zum Definieren einer Lichtausgabe-Helligkeit, die dem Weißpegel des Eingangssignals entspricht, und wobei die Spannungssteuerschaltung (14, 15, 41, 51-53, 61-63), wenn der Helligkeits-Sammelwert, der durch die Helligkeits-Sammelwert-Berechnungsschaltung, berechnet wurde, einen vorgegebenen Wert überschreitet, die Weißseiten-Bezugsspannung so steuert, dass, je größer die Differenz zwischen dem Helligkeits-Sammelwert und dem vorgegebenen Wert ist, desto kleiner die Differenz zwischen der Weißseiten-Bezugsspannung und der Schwarzseiten-Spannung gestaltet wird, und wobei die Spannungssteuerschaltung (14, 15, 41, 51-53, 61-63) eine Verstärkung-Berechnungsschaltung (14) aufweist zum Berechnen eines Verstärkungsfaktors zum Steuern der Weißseiten-Bezugsspannung auf Grundlage des Helligkeits-Sammelwertes, der durch die Helligkeits-Sammelwert-Berechnungsschaltung (12) berechnet wurde, und eine Steuerschaltung (15) zum Steuern der Weißseiten-Bezugsspannung auf Grundlage des Verstärkungsfaktors, der durch die Verstärkung-Berechnungsschaltung (14) berechnet wurde.

2. Helligkeit-Steuerschaltung für die organische Elektrolumineszenz-Anzeige nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verstärkung-Berechnungsschaltung (14) derartige Eingangs-/Ausgangs-Charakteristika aufweist, dass ein Verstärkungsfaktor, der auszugeben ist, auf einen konstanten Wert eingestellt wird, wenn der eingegebene Helligkeit-Sammelwert nicht größer ist als ein vorgegebener Wert, und je größer der eingegebene Helligkeit-Sammelwert ist, desto kleiner der auszugeben Verstärkungsfaktor gestaltet wird, wenn der eingegebene Helligkeit-Sammelwert den vorgegebenen Wert überschreitet, wobei die Steuerschaltung (15) die Weißseiten-Bezugsspannung so steuert, dass, je kleiner der Verstärkungsfaktor ist, desto kleiner die Differenz zwi-

schen der weiß Seiten-Bezugsspannung und der Schwarzseiten-Bezugsspannung gestaltet wird.

3. Helligkeit-Steuerschaltung für die organische Elektrolumineszenz-Anzeige nach Anspruch 1, **dadurch gekennzeichnet, dass** die Spannungssteuerschaltung (14, 15, 41, 51-53, 61-63) eine Verstärkung-Berechnungsschaltung (14) aufweist, um einen ersten Verstärkungsfaktor zum Steuern der Weißseite-Bezugsspannung auf Grundlage des Helligkeit-Sammelwertes zu berechnen, der durch die Helligkeit-Sammelwert-Berechnungsschaltung (12) berechnet wurde, eine Multiplikatorschaltung (14) zum Multiplizieren des ersten Verstärkungsfaktors, der durch die Verstärkung-Berechnungsschaltung berechnet wurde, mit einem zweiten Verstärkungsfaktor, der von außen gegeben wird, und eine Steuerschaltung (15, 51-53, 61-63) zum Steuern der Weißseiten-Bezugsspannung auf Grundlage eines dritten Verstärkungsfaktors, der das Resultat der Multiplikation durch die Multiplikatorschaltung (41) ist.
4. Helligkeit-Steuerschaltung für die organische Elektrolumineszenz-Anzeige nach Anspruch 3, **dadurch gekennzeichnet, dass** die Verstärkung-Berechnungsschaltung (14) derartige eingangs-/Ausgangs-Charakteristika aufweist, dass ein auszugeben der Verstärkungsfaktor auf einen konstanten Wert eingestellt wird, wenn der eingegebene Helligkeit-Sammelwert nicht größer ist als ein vorgegebener Wert, und je größer der eingegebene Helligkeit-Sammelwert ist, desto kleiner der auszugeben Verstärkungsfaktor gestaltet wird, wenn der eingegebene Helligkeit-Sammelwert den vorgegebenen Wert überschreitet, und wobei die Steuerschaltung (15, 51-53, 61-63) die Weißseiten-Bezugsspannung so steuert, dass je kleiner der dritte Verstärkungsfaktor ist, desto kleiner die Differenz zwischen der weißen Seiten-Bezugsspannung und der schwarze Seiten-Bezugsspannung gestaltet wird.

45 **Revendications**

1. Circuit de commande de luminance pour un afficheur électroluminescent organique, comprenant :
 - un convertisseur numérique-analogique (2) pour convertir un signal d'entrée vidéo numérique en un signal de sortie vidéo analogique sur la base de caractéristiques d'entrée-sortie définies par une tension de référence donnée, et pour fournir le signal de sortie vidéo analogique à l'afficheur électroluminescent organique ; et
 - un circuit de commande de tension de référence (1) pour commander la tension de référence ap-

pliquée au convertisseur numérique-analogique (2) sur la base du signal d'entrée vidéo numérique, et **caractérisé en ce que** le circuit de commande de tension de référence (1) comprend :

un circuit de calcul de valeur d'accumulation de luminance (12) pour calculer une valeur d'accumulation de luminance pour chaque trame sur la base du signal d'entrée vidéo numérique, et

un circuit de commande de tension (14, 15, 41, 51 à 53, 61 à 63) pour commander les tensions de référence appliquées au convertisseur numérique-analogique (2) sur la base de la valeur d'accumulation de luminance calculée par le circuit de calcul de valeur d'accumulation de luminance (12), dans lequel les tensions de référence appliquées au convertisseur numérique-analogique (2) comprennent une tension de référence côté noir pour définir une luminance d'émission de lumière correspondant au niveau de noir du signal d'entrée et une tension de référence côté blanc pour définir une luminance d'émission de lumière correspondant au niveau de blanc du signal d'entrée, et

le circuit de commande de tension (14, 15, 41, 51 à 53, 61 à 63), lorsque la valeur accumulée de luminance calculée par le circuit de calcul de valeur d'accumulation de luminance dépasse une valeur prédéterminée, commande la tension de référence côté blanc de sorte que plus la différence est grande entre la valeur d'accumulation de luminance et la valeur prédéterminée, plus la différence devient petite entre la tension de référence côté blanc et la tension côté noir, et dans lequel

le circuit de commande de tension (14, 15, 41, 51 à 53, 61 à 63) comprend un circuit de calcul de gain (14) pour calculer un gain pour commander la tension de référence côté blanc sur la base de la valeur d'accumulation de luminance calculée par le circuit de calcul de valeur d'accumulation de luminance (12), et un circuit de commande (15) pour commander la tension de référence côté blanc sur la base du gain calculé par le circuit de calcul de gain (14).

2. Circuit de commande de luminance pour l'afficheur électroluminescent organique selon la revendication 1, **caractérisé en ce que**

le circuit de calcul de gain (14) a des caractéristiques d'entrée-sortie telles qu'un gain à délivrer est fixé à une valeur constante lorsque la valeur d'accumula-

tion de luminance entrée est inférieure ou égale à une valeur prédéterminée, et plus la valeur d'accumulation de luminance entrée est grande, plus le gain à délivrer devient petit lorsque la valeur d'accumulation de luminance entrée dépasse la valeur prédéterminée, et

le circuit de commande (15) commande la tension de référence côté blanc de sorte que plus le gain est petit, plus la différence entre la tension de référence côté blanc et la tension de référence côté noir devient petite.

3. Circuit de commande de luminance pour l'afficheur électroluminescent organique selon la revendication 1, **caractérisé en ce que**

le circuit de commande de tension (14, 15, 41, 51 à 53, 61 à 63) comprend un circuit de calcul de gain (14) pour calculer un premier gain pour commander la tension de référence côté blanc sur la base de la valeur d'accumulation de luminance calculée par le circuit de calcul de valeur d'accumulation de luminance (12), un circuit de multiplication (41) pour multiplier le premier gain calculé par le circuit de calcul de gain par un deuxième gain donné à partir de l'extérieur, et un circuit de commande (15, 51 à 53, 61 à 63) pour commander la tension de référence côté blanc sur la base d'un troisième gain qui est le résultat de la multiplication effectuée par le circuit de multiplication (41).

4. Circuit de commande de luminance pour l'afficheur électroluminescent organique selon la revendication 3, **caractérisé en ce que**

le circuit de calcul de gain (14) a des caractéristiques d'entrée-sortie telles qu'un gain à délivrer est fixé à une valeur constante lorsque la valeur d'accumulation de luminance entrée est inférieure ou égale à une valeur prédéterminée, et plus la valeur d'accumulation de luminance entrée est grande, plus le gain à délivrer devient petit lorsque la valeur d'accumulation de luminance entrée dépasse la valeur prédéterminée, et

le circuit de commande (15, 51 à 53, 61 à 63) commande la tension de référence côté blanc de sorte que plus le troisième gain est petit, plus la différence entre la tension de référence côté blanc et la tension de référence côté noir devient petite.

FIG. 1

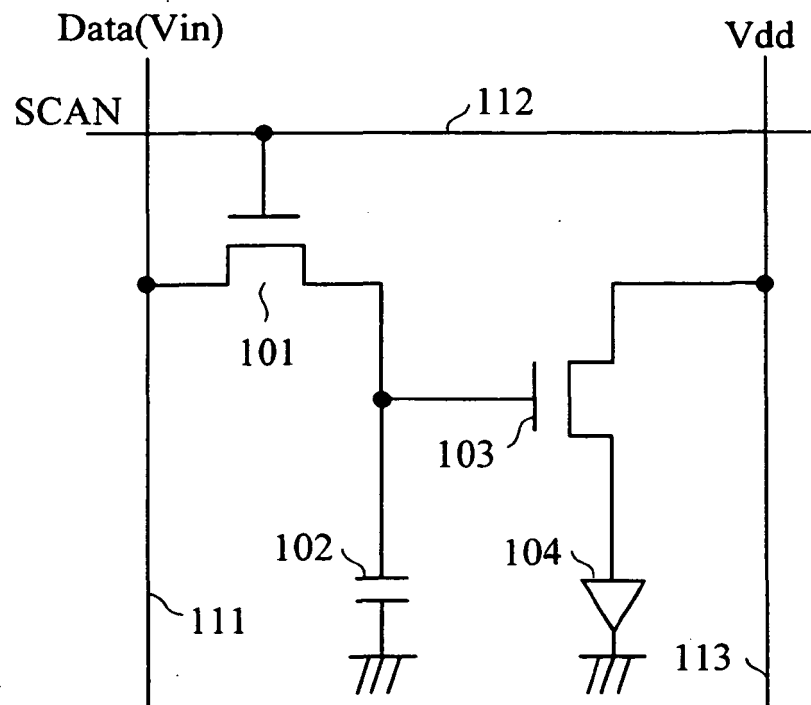


FIG. 2

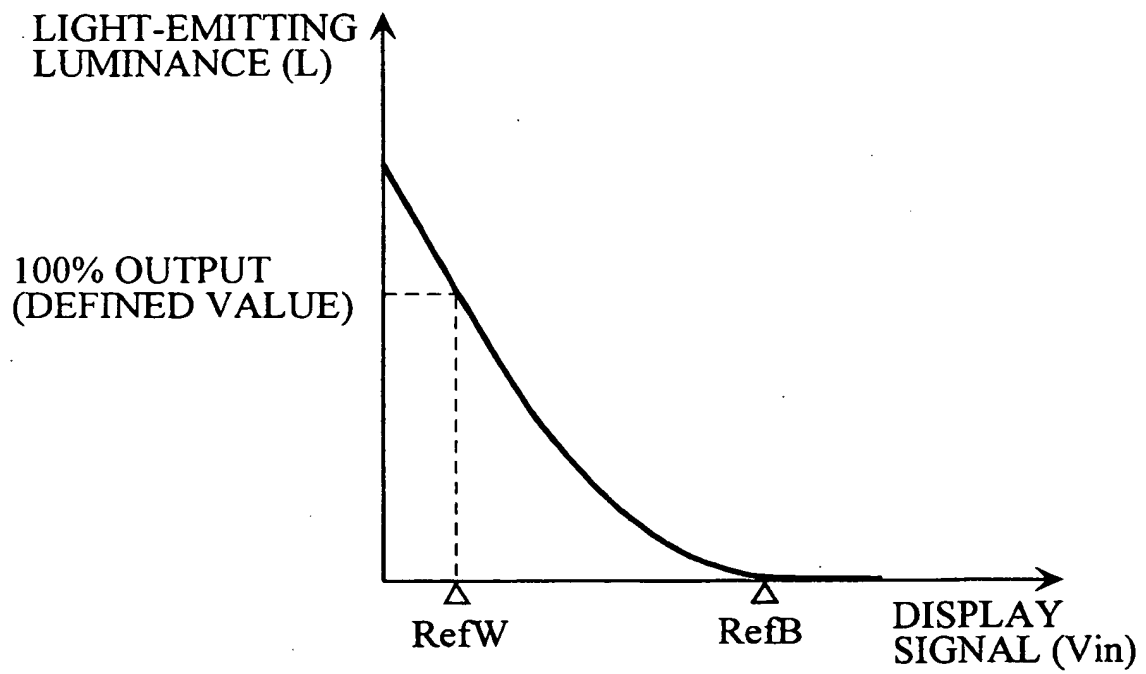


FIG. 3

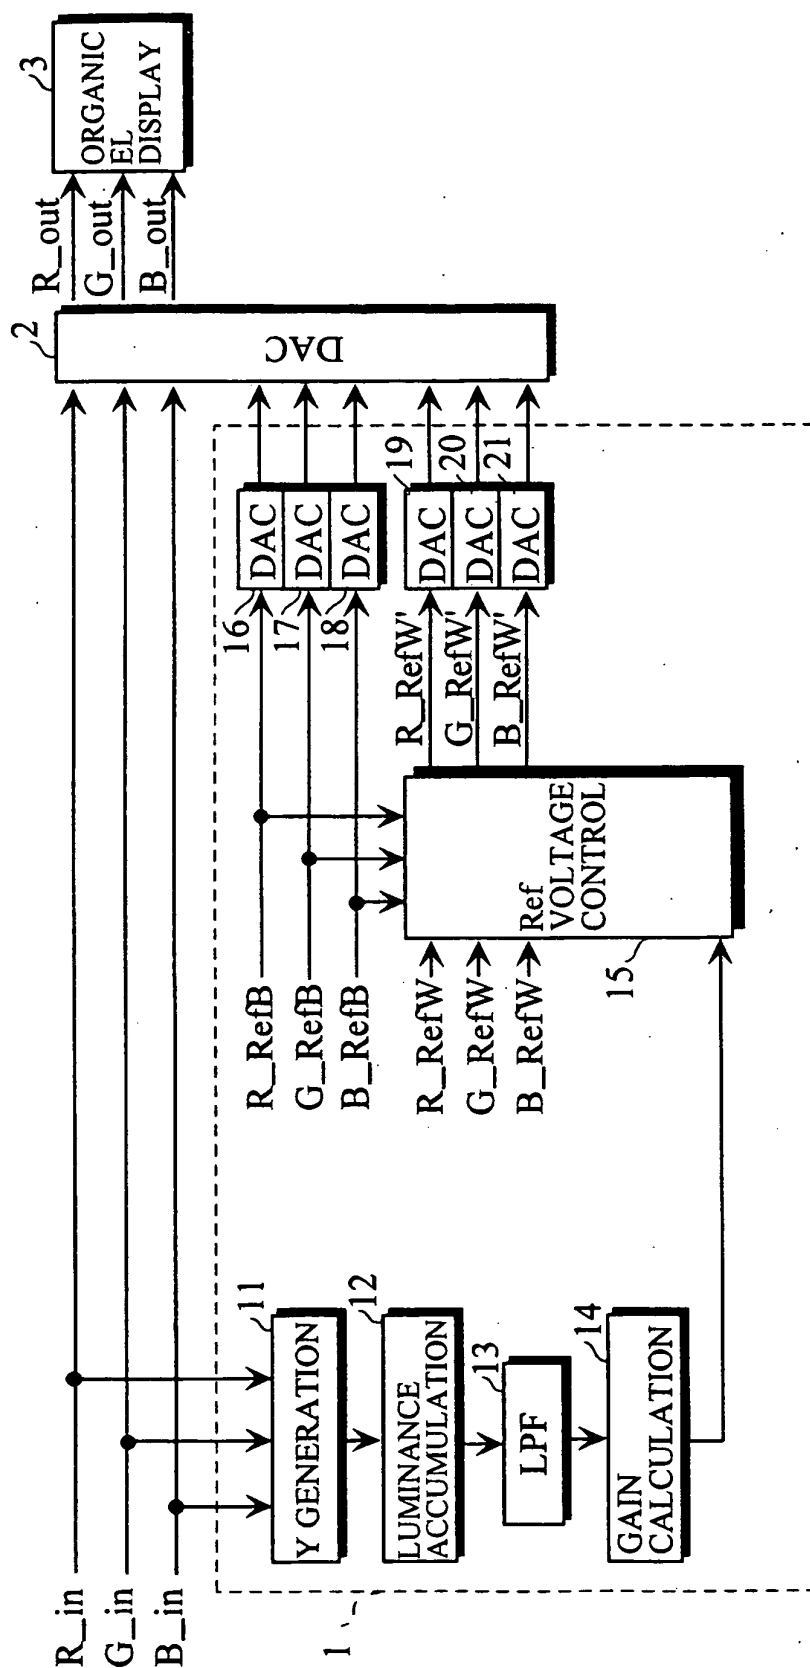


FIG. 4 (b)

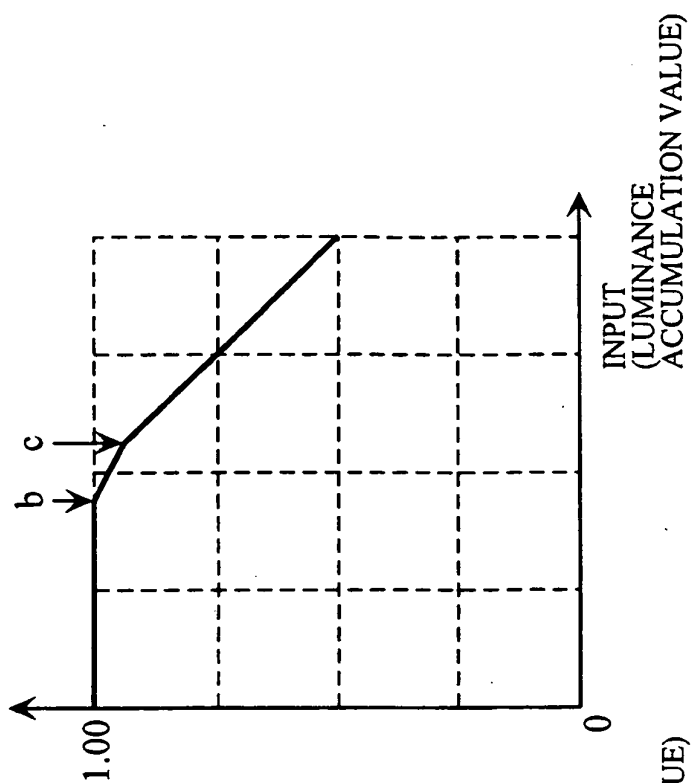


FIG. 4 (a)

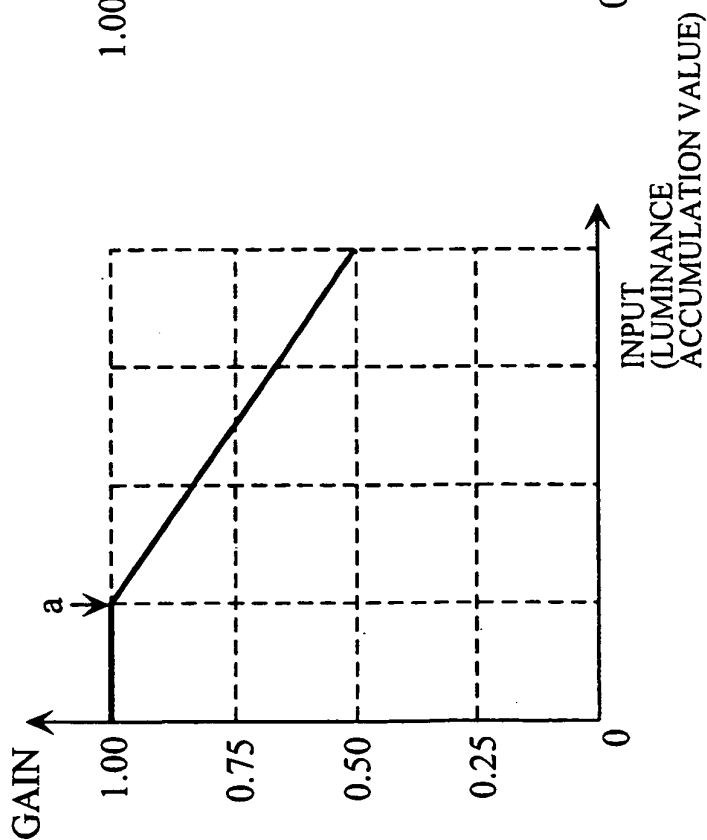


FIG. 5

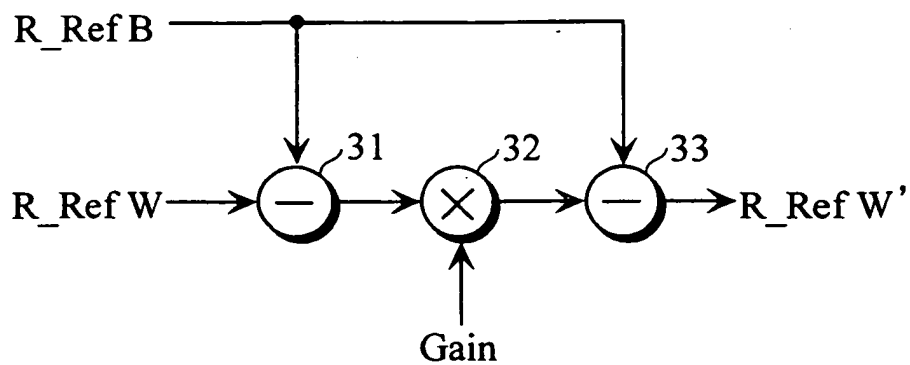


FIG. 6

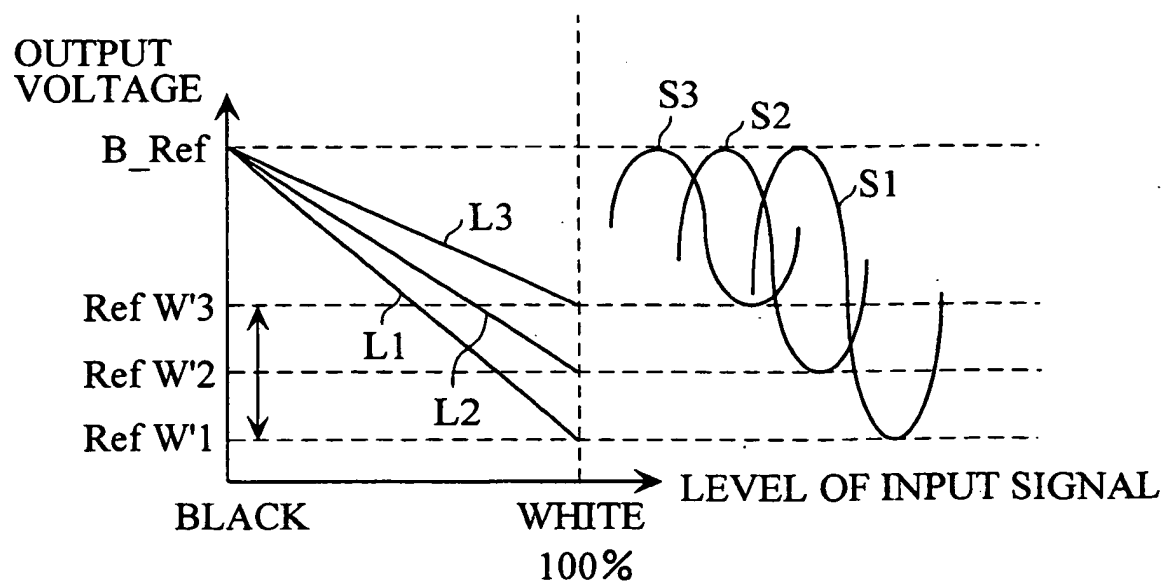


FIG. 7

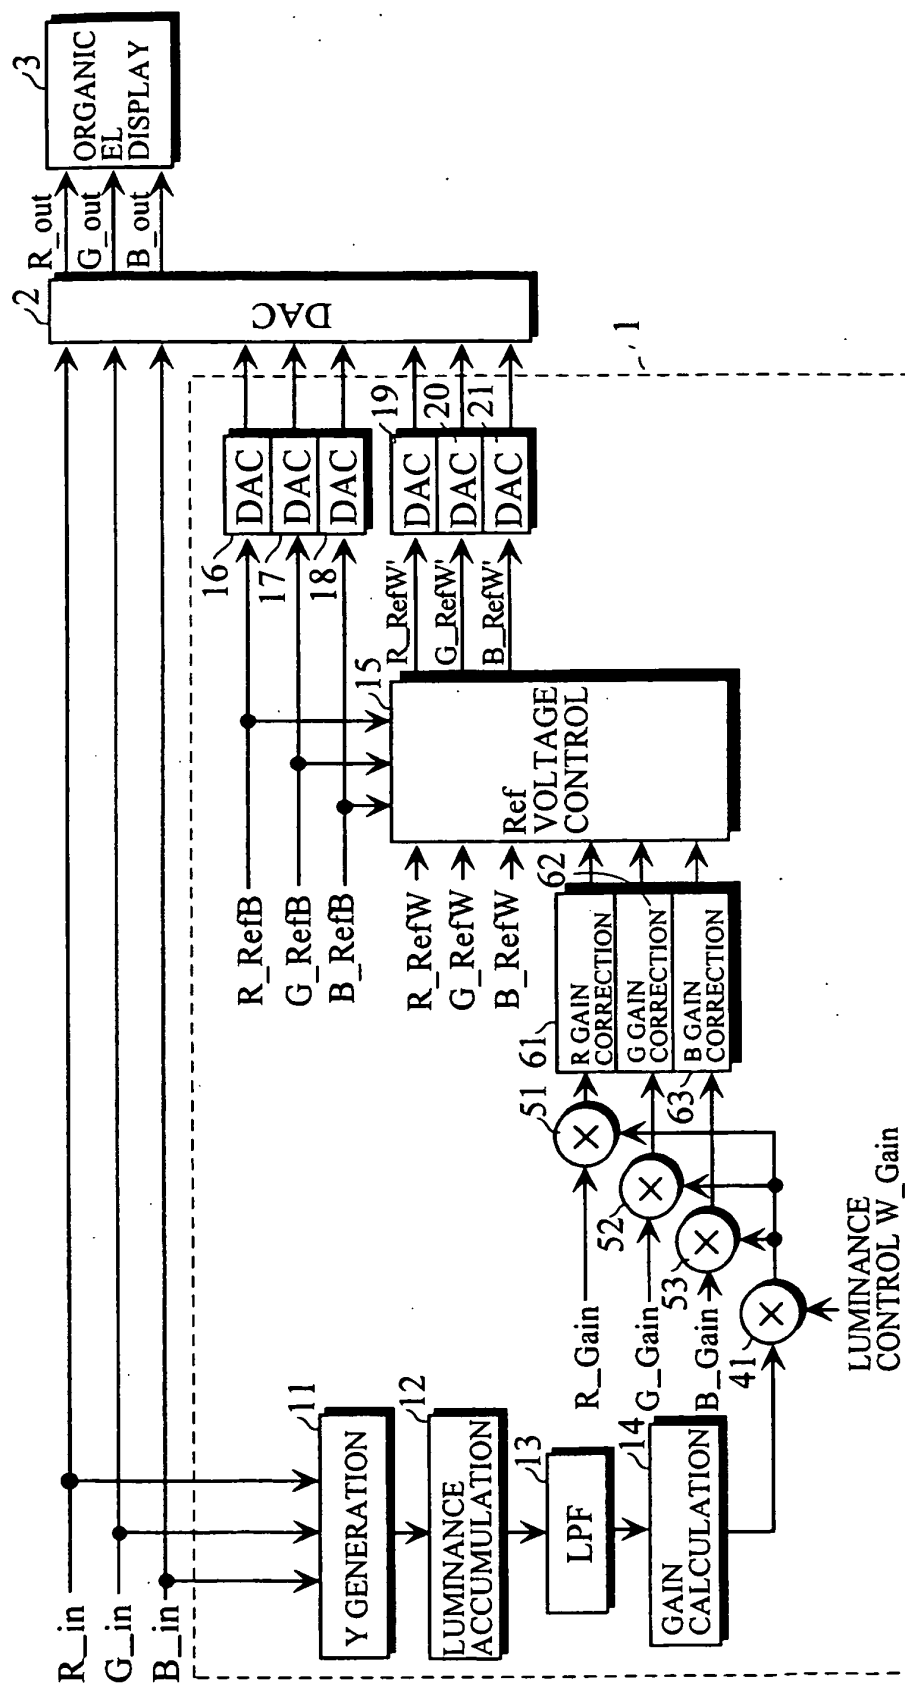


FIG. 8

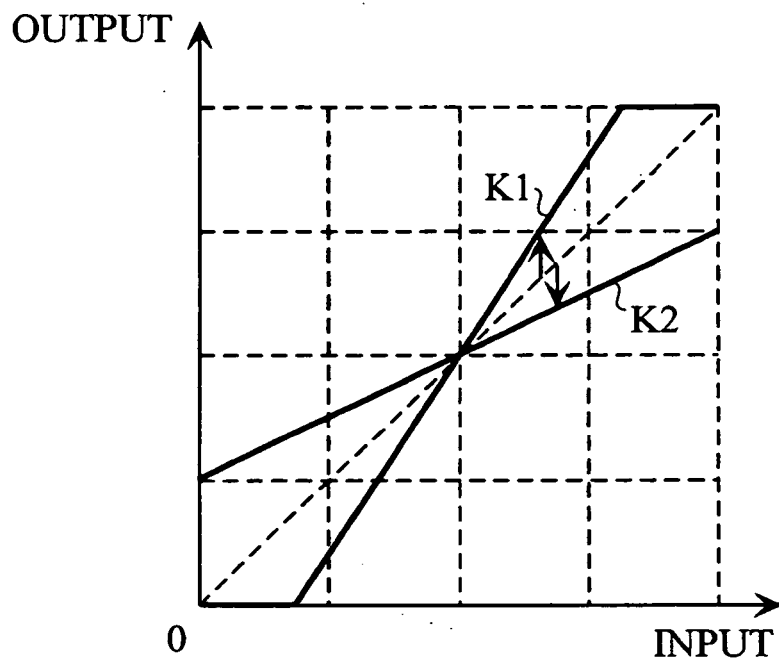


FIG. 9

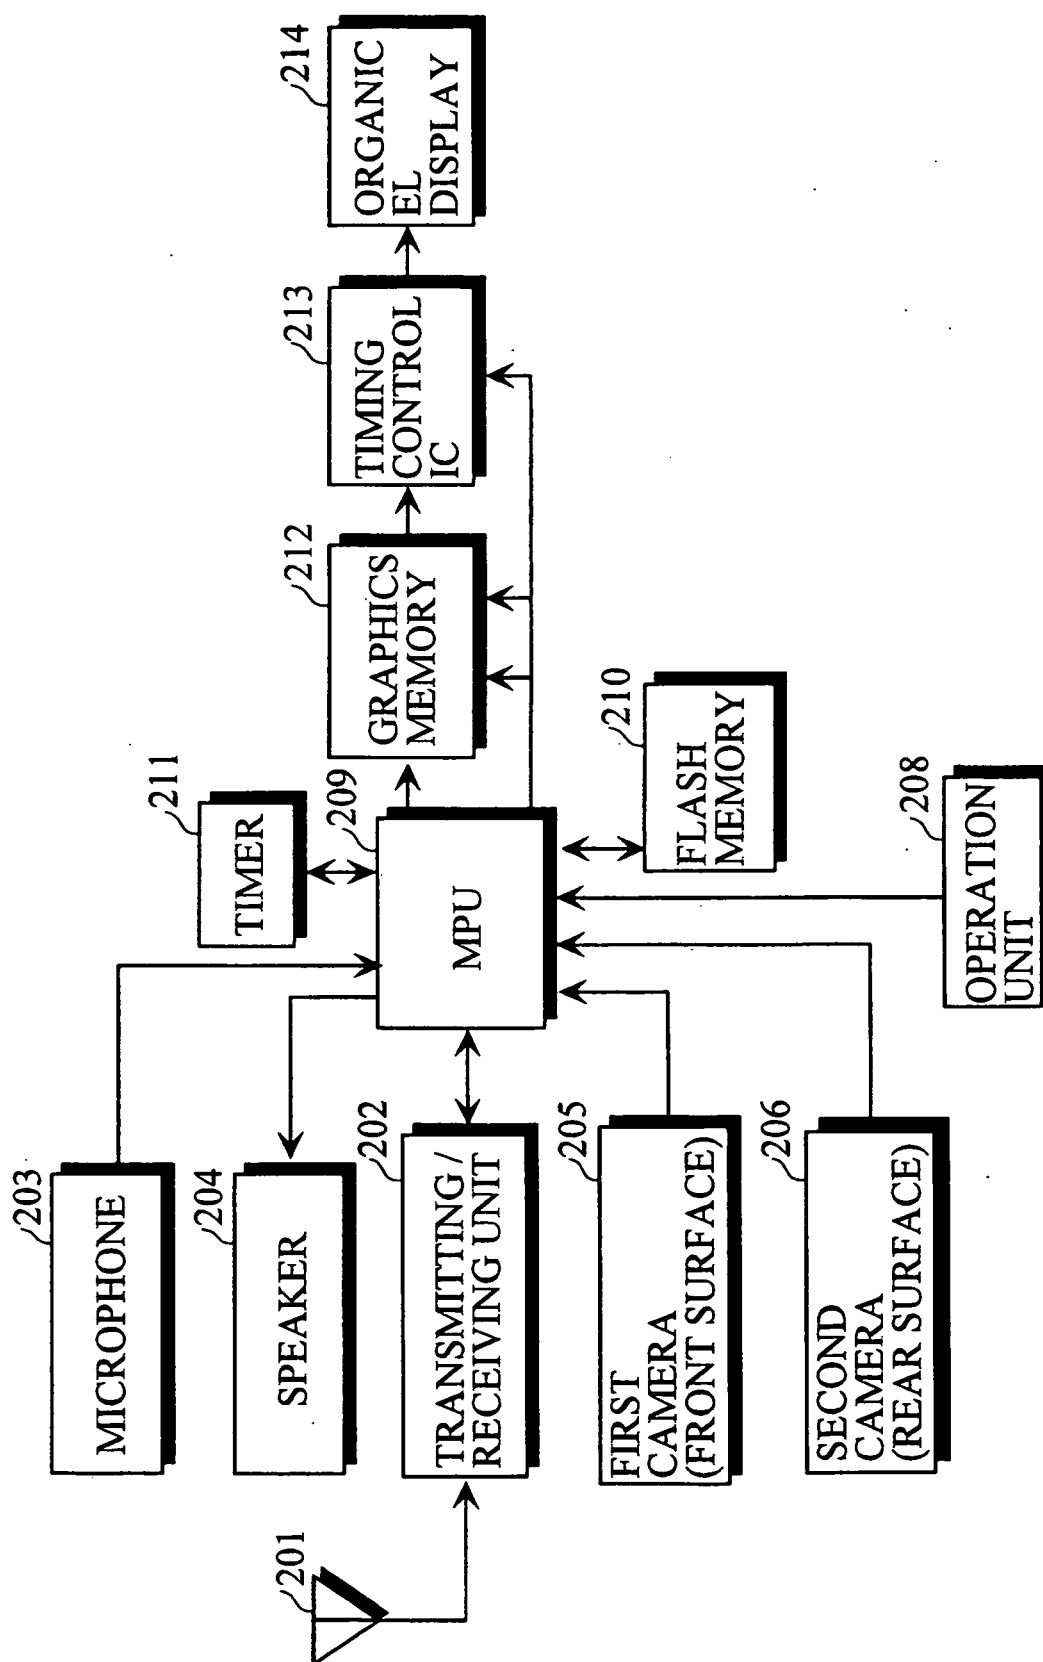


FIG. 10

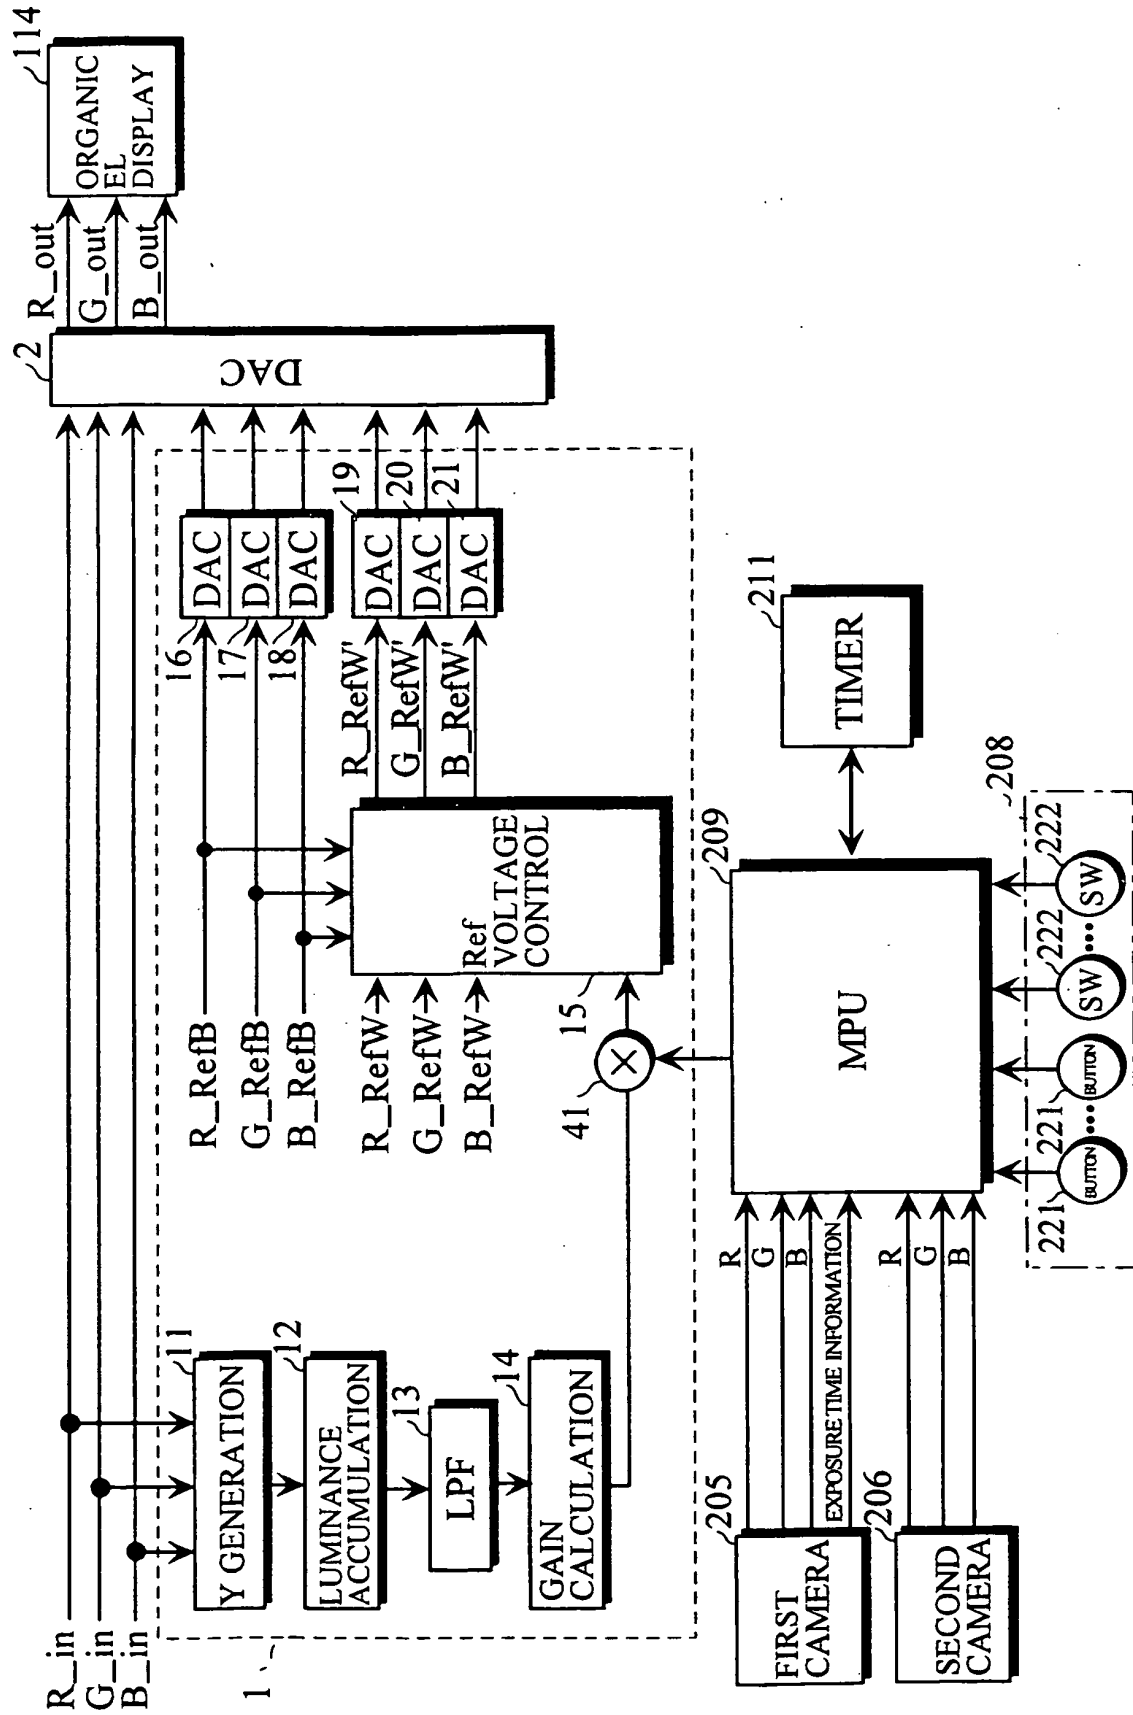


FIG. 11


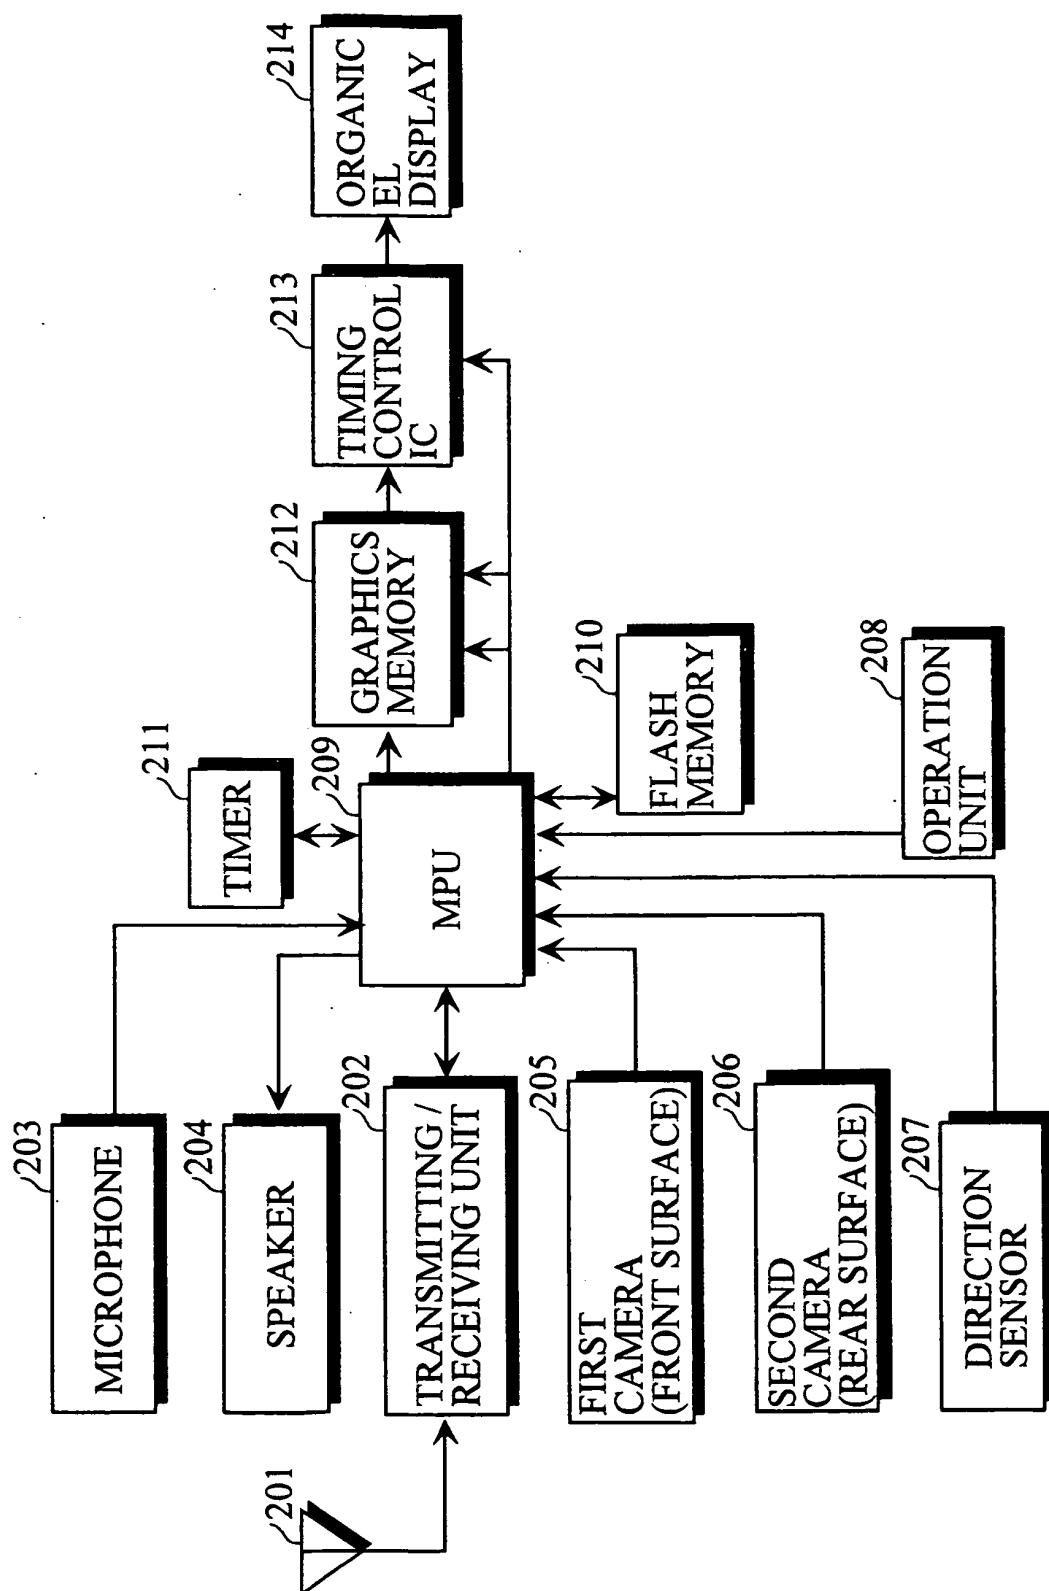


FIG. 12

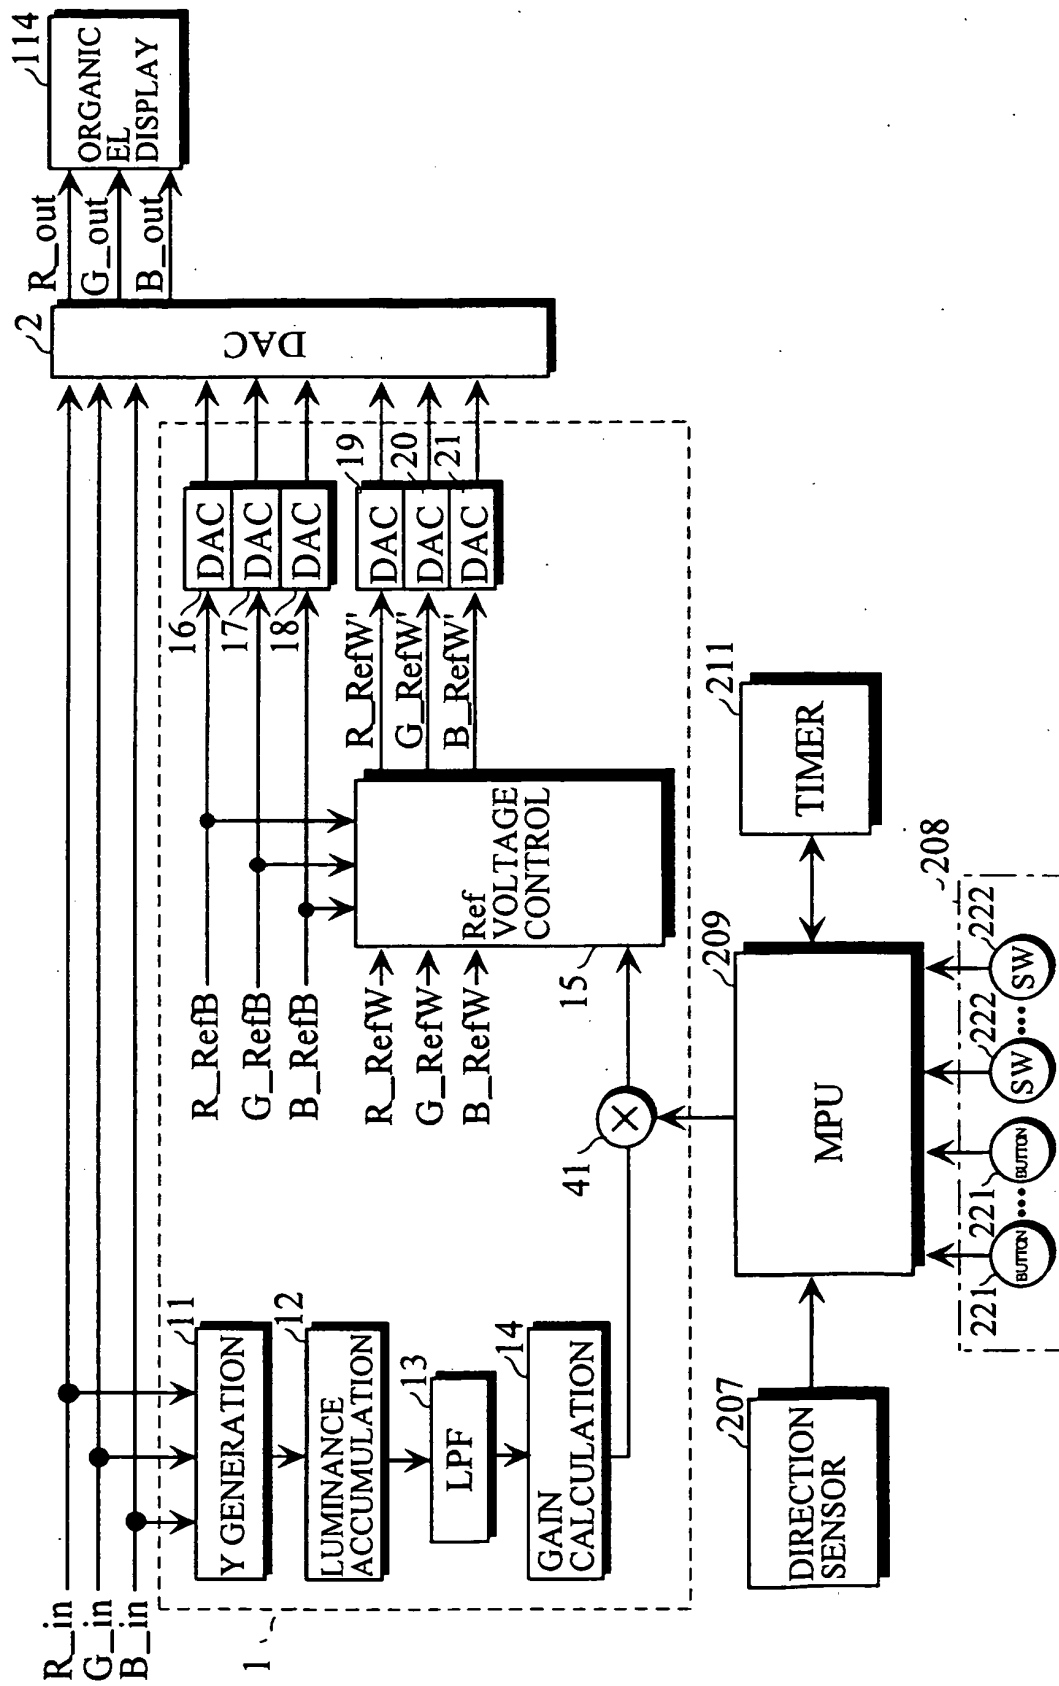

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000267628 A [0011]
- JP 10108021 A [0013]
- EP 1139322 A2 [0013]

FIG. 1