



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.12.2005 Bulletin 2005/51

(51) Int Cl.⁷: **H01L 27/00**

(21) Application number: **05012737.2**

(22) Date of filing: **14.06.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
AL BA HR LV MK YU

- **Kim, Hak Su**
Gangbuk-gu Seoul (KR)
- **Baik, Kwang Heum**
Gumi-si Gyeongsangbuk-do (KR)

(30) Priority: **14.06.2004 KR 2004043716**

(71) Applicant: **LG ELECTRONICS INC.**
Seoul (KR)

(74) Representative: **Zech, Stefan Markus et al**
Meissner, Bolte & Partner GbR
(Depotstrasse 5 1/2, 86199 Augsburg)
Postfach 10 26 05
86016 Augsburg (DE)

(72) Inventors:
 • **Kim, Kwang Young**
Seongnae-dong Gangdong-gu Seoul (KR)


(54) **Organic electro-luminescence display device and fabricating method thereof**

(57) An organic EL display device that is adaptive for improving luminous brightness and reducing power consumption, and a fabricating method thereof are disclosed.

An organic EL display device according to the

present invention includes a plurality of anode electrodes; and a conductive light shielding film which has conductivity and is formed on the anode electrode in a separate pattern so that the anode electrodes are insulated from one another.

FIG.4

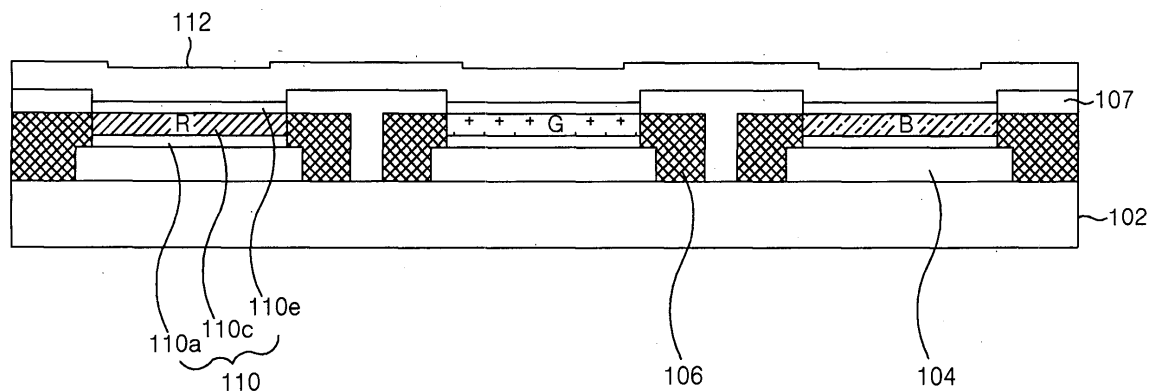

Description

[0001] This application claims the benefit of Korean Patent Application No. P2004-43716 filed in Korea on June 14, 2004, which is hereby incorporated by reference

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0002] This invention relates to an organic electro luminescence display device, and more particularly to an organic electro luminescence display device that is adaptive for improving luminous brightness and reducing power consumption, and a fabricating method thereof.

DESCRIPTION OF THE RELATED ART

[0003] Recently, there have been developed a variety of flat panel display devices that can reduce their weight and size, which are a disadvantage of a cathode ray tube CRT. The flat panel display device includes a liquid crystal display LCD, a field emission display FED, a plasma display panel PDP and an electro luminescence EL display device. Particularly, the EL display device has electrodes stuck to both of the sides of an organic light emitting layer basically composed of a hole transport layer, a light emitting layer and an electron transport layer, and becomes the center of attention as a next generation flat panel display device because of its characteristics such as wide viewing angle, high aperture ratio and high chromaticity.

[0004] The EL display device is largely divided into an inorganic EL display device and an organic EL display device in accordance with a material used. In the organic EL display device, electrons and holes form a pair and then become extinct to emit light if electric charges are injected into an organic EL layer which is formed between a hole injection electrode and an electron injection electrode, thus there is an advantage in that it can be driven at a lower voltage than the inorganic EL display device. Further, the organic EL display device can drive at a low voltage of not greater than 10V in comparison with the PDP or the inorganic ELD as well as forming the device on a flexible transparent substrate like plastics, and its power consumption is relative low and its color impression is excellent.

[0005] FIG. 1 is a perspective view representing a related art organic EL display device, and FIG. 2 is a sectional diagram representing the organic EL display device shown in FIG. 1, taken along the line "I-I" .

[0006] The organic EL display device shown in FIGs. 1 and 2 has an anode electrode 4 and a cathode electrode formed in a direction of crossing each other on a substrate 2.

[0007] A plurality of anode electrodes 4 is formed to

be separate from one another with a designated distance therebetween. An insulating film 6 having a hollow part for each EL cell (p) area is formed on the substrate 2 where the anode electrode 4 is formed. A barrier rib 8 is located on the insulating film 6, wherein the barrier rib separates an organic light emitting layer 10 and the cathode electrode 12 which are to be formed on the insulating film 6. The barrier rib 8 is formed in a direction of traversing the anode electrode 4 and has a reverse taper structure that an upper part has a wider width than a lower part. The organic light emitting layer 10 and the cathode electrode 12 composed of an organic compound are sequentially deposited on the whole surface of the insulating film where the barrier rib 8 is formed. The organic light emitting layer 10 is formed by depositing a hole related layer 10A inclusive of a hole injection layer and a hole transport layer; a light emitting layer 10C to realize color; and an electron related layer 10E inclusive of an electron transport layer and an electron injection layer.

[0008] In the organic EL display device, if a voltage is applied to the anode electrode 4 and the cathode electrode 12, the electron generated at the cathode electrode 12 moves to the light emitting layer 10C through the electron related layer 10E. Further, the holes generated at the anode electrode 4 moves to the light emitting layer 10C through the hole related layer 10A. Accordingly, in the light emitting layer 10C, the electron and the hole supplied from the electron related layer 10E and the hole related layer 10A are recombined to form an exciton, and the exciton is excited again to a ground state, thus a light of a fixed energy is emitted to the outside through the anode electrode 4.

[0009] The organic EL display device with such a configuration has the incident light from the outside almost completely transmitted through the anode electrode 4 and the organic light emitting layer 10. As a result, when the light is not emitted from the organic light emitting layer 10, an external light 40 which is incident from the surface of the substrate 2 is transmitted through the organic light emitting layer 10 and the anode electrode 4 of a transparent conductive material, and it is reflected by the cathode electrode 12 of a metal electrode, as shown in FIG. 3A. Accordingly, there is a problem in that the contrast ratio is deteriorated. In order to solve the problem, as shown in FIG. 3B, a reflection protective film 30 is used. The reflection protective film 30 is stuck to the substrate 2 of the organic EL display device to intercept the external light 40 from being emitted out of the organic EL display device by being reflected after the external light 40 is irradiated from the outside. Herein, the reflection protective film 30 includes a polarizer 30A which transmits a specific linear polarized light out of the external light 40 and intercepts the other polarization component, and a $\lambda/4$ phase difference plate 30B for converting the linear polarized light into a circular polarized light.

[0010] However, the contrast ratio can be improved if

such a polarizer 30A is used, but the transmittance cannot be over 50% due to the optical characteristics of the polarizer 30A in case that a polarization ratio is not less than 99%, thus a brightness loss of not less than 50% is generated in the organic EL display panel. Accordingly, there arises a problem that the power consumption should be increased to get a desired brightness in the organic EL display device.

SUMMARY OF THE INVENTION

[0011] Accordingly, it is an object of the present invention to an organic electro luminescence display device that is adaptive for improving luminous brightness and reducing power consumption, and a fabricating method thereof.

[0012] In order to achieve these and other objects of the invention, an organic electro luminescence display device according to an aspect of the present invention includes a plurality of anode electrodes; and a conductive light shielding film which has conductivity and is formed on the anode electrode in a separate pattern so that the anode electrodes are insulated from one another.

[0013] The conductive light shielding film partially exposes the anode electrode to define a light emitting area.

[0014] The organic electro luminescence display device further includes an organic light emitting layer formed on the anode electrode; a barrier rib formed to cross the anode electrode; and a cathode electrode formed to cross the anode electrode with the organic light emitting layer therebetween.

[0015] The conductive light shielding film includes an opaque material.

[0016] The resistivity of the conductive light shielding film is about 20~200 [$\mu\Omega\cdot\text{cm}$].

[0017] A fabricating method of an organic electro luminescence display device according to another aspect of the present invention includes the steps of forming a plurality of anode electrodes on a substrate; and forming a conductive light shielding film on the anode electrodes in a separate pattern, wherein the conductive light shielding film has conductivity and makes the anode electrodes insulated from one another.

[0018] The conductive light shielding film partially exposes the anode electrode to define a light emitting area.

[0019] The fabricating method further includes the steps of forming an organic light emitting layer on the anode electrode; forming a barrier rib to cross the anode electrode; and forming a cathode electrode to cross the anode electrode with the organic light emitting layer therebetween.

[0020] The conductive light shielding film includes an opaque material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] These and other objects of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

[0022] FIG. 1 is a diagram briefly representing a related art organic EL display device;

[0023] FIG. 2 illustrates a sectional diagram taken along the line "I-I'" of FIG. 1;

[0024] FIG. 3A is a diagram for explaining a reflection by an external light of the organic EL display device;

[0025] FIG. 3B is a diagram for explaining a reflection protective film which is to prevent the reflection by the external light;

[0026] FIG. 4 is a diagram briefly representing an organic EL display device according to the present invention;

[0027] FIG. 5 is a diagram specifically representing a conductive light shielding film shown in FIG. 4; and

[0028] FIGs. 6A to 6D are diagrams representing a fabricating method of the organic EL display device shown in FIG. 4, step by step.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0029] There will be described in detail an organic electro luminescence display device according to the present invention in reference to the accompanying drawings.

[0030] Hereinafter, the preferred embodiments of the present invention will be described in detail with reference to FIGs. 4 to 6D.

[0031] FIG. 4 is a sectional diagram representing an organic EL display device according to the present invention.

[0032] The organic EL display device shown in FIG. 4 includes an anode electrode 104 and a cathode electrode 112 which are formed on a substrate 102 to cross each other with an organic light emitting layer 110; a barrier rib (not shown) formed to cross the anode electrode and to be in parallel to the cathode electrode 112; a conductive light shielding film 106 which defines a light emitting area on the anode electrode 104 and intercepts an external light; and an insulating film 107 formed to cover the conductive light shielding film 106 and defining the light emitting area.

[0033] A plurality of anode electrodes 104 are formed on the substrate 102 in a stripe shape, and each of them is separated from one another with a designated distance therebetween. The barrier rib (not shown) is formed in a direction of traversing the anode electrode 4, and has a reverse taper structure that an upper part has a wider width than a lower part. The organic light emitting layer 110 is formed by depositing a hole related layer 110A inclusive of a hole injection layer and a hole transport layer; a light emitting layer 110C to realize

color; and an electron related layer 110E inclusive of an electron transport layer and an electron injection layer.

[0034] The conductive light shielding film 106 partially exposes the anode electrode 104 to define a light emitting area, and intercepts and absorbs the external light, thereby acting to improve the contrast ratio of the device.

[0035] Further, the light shielding film 106 is formed of a conductive material, thereby improving the conductivity of the anode electrode 104.

[0036] To describe this more particularly, it is as follows.

[0037] The conductive light shielding film 106, as shown in FIG. 5, is formed with a wider width than the anode electrode to cover the anode electrode and has a hollow part 106A which exposes the anode electrode 104 partially. Further, the conductive light shielding film 106 is electrically separated from each other so that no conduction is made between the anode electrodes 104.

[0038] The conductive light shielding film 106 is formed of an opaque conductive material, thereby acting to intercept or absorb the external light which is incident by passing through the transparent substrate 102 and the anode electrode 104. Accordingly, the polarizer is not required in comparison with the related art, thus the transmittance increases when the device emits light, thereby increasing the brightness and enabling to reduce the power consumption.

[0039] Further, the conductive light shielding film 106 is formed of a conductive material and of a material which has a resistivity of about $20[\mu\Omega\cdot\text{cm}] \sim 200[\mu\Omega\cdot\text{cm}]$, thus the conductive light shielding film 106 acts to improve the conductivity of the anode electrode 104 which is formed of a transparent electrode material. Accordingly, the voltage required in the anode electrode 104 is lowered to reduce the power consumption. Herein, the material of the conductive shielding film 106 is metal such as chrome Cr, molybdenum Mo, aluminum Al, nickel Ni, copper Cu, silver Ag, gold Au, indium In, tin Sn, zinc Zn and so on, or their compound.

[0040] In the organic EL display device, if a voltage is applied to the anode electrode 104 and the cathode electrode 112, the electrons generated at the cathode electrode 112 moves to the light emitting layer 10C through the electron related layer 110E. Further, the holes generated at the anode electrode 104 moves to the light emitting layer 110C through the hole related layer 110A. Accordingly, in the light emitting layer 110C, an exciton is formed by recombination of the electron and the hole which are supplied from the electron related layer 110E and the hole related layer 110A, and the exciton is excited again to a ground state to emit the light of a fixed energy to the outside through the anode electrode 104.

[0041] Hereinafter, in reference to FIGs. 6A to 6D, the fabricating method of the organic EL display device according to the present invention will be explained as follows.

[0042] Firstly, after a transparent conductive metal material is deposited on the substrate 102 which is formed by use of a sodalime or a tempered glass, the transparent conductive metal material is patterned by a photolithography process and an etching process, thereby forming the anode electrode 104, as shown in FIG. 6A. Herein, the metal material is of indium tin oxide ITO or SnO_2 .

[0043] An opaque conductive metal material is deposited on the substrate where the anode electrode 104 is formed, the opaque conductive metal material is patterned by the photolithography process and the etching process, thus the conductive light shielding film 106, as shown in FIG. 6G, is formed with a wider width than the anode electrode 104 to cover the anode electrode 104 and has the hollow part 106A which partially exposes the anode electrode 104. Herein, the opaque conductive metal material is metal such as chrome Cr, molybdenum Mo, aluminum Al, nickel Ni, copper Cu, silver Ag, gold Au, indium In, tin Sn, zinc Zn and so on, or their compound. And, the conductive light shielding film formed to cover each of the anode electrodes 104 is electrically separated.

[0044] After a photosensitive organic material is deposited on the substrate 104 where the conductive light shielding film 106, the photosensitive organic material is patterned by the photolithography process and so on, thereby forming an insulating film 107. And then, after a photosensitive organic material is deposited, the photosensitive organic material is patterned by the photolithography process, thereby forming a barrier rib (not shown).

[0045] An organic light emitting layer 110, as shown in FIG. 6C, is formed on the substrate 102 where the barrier rib is formed, by a deposition method such as thermal deposition, vacuum deposition and so on using a common mask and a metal (or shadow) mask.

[0046] A metal material is deposited on the substrate 102 where the organic light emitting layer 110 is formed, thereby forming the cathode electrode 112, as shown in FIG. 6D.

[0047] In this way, the organic EL display device and the fabricating method thereof according to the present invention has the related art reflection protective film removed and the conductive light shielding film 106 formed. Accordingly, the light transmittance is improved when the device emits light, thereby increasing the brightness.

[0048] Further, the conductive light shielding film 106 is formed of a material with conductivity to improve the conductivity of the anode electrode 104. Accordingly, the voltage applied to the anode electrode 104 is lowered, thereby enabling to reduce the power consumption.

[0049] As described above, the organic EL display device and the fabricating method thereof according to the present invention has the related art reflection protective film removed and forms the conductive light shielding

film, thereby improving the brightness and reducing the power consumption.

[0050] Although the present invention has been explained by the embodiments shown in the drawings described above, it should be understood to the ordinary skilled person in the art that the invention is not limited to the embodiments, but rather that various changes or modifications thereof are possible without departing from the spirit of the invention. Accordingly, the scope of the invention shall be determined only by the appended claims and their equivalents.

Claims

1. An organic electro luminescence display device, comprising:

a plurality of anode electrodes; and
a conductive light shielding film which has conductivity and is formed on the anode electrode in a separate pattern so that the anode electrodes are insulated from one another.

2. The organic electro luminescence display device according to claim 1, wherein the conductive light shielding film partially exposes the anode electrode to define a light emitting area.

3. The organic electro luminescence display device according to claim 1, further comprising:

an organic light emitting layer formed on the anode electrode;
a barrier rib formed to cross the anode electrode; and
a cathode electrode formed to cross the anode electrode with the organic light emitting layer therebetween.

4. The organic electro luminescence display device according to claim 1, wherein the conductive light shielding film includes an opaque material.

5. The organic electro luminescence display device according to claim 1, wherein the resistivity of the conductive light shielding film is about 20~200[$\mu\Omega$.cm].

6. A fabricating method of an organic electro luminescence display device, comprising the steps of:

forming a plurality of anode electrodes on a substrate; and
forming a conductive light shielding film on the anode electrodes in a separate pattern, wherein the conductive light shielding film has conductivity and makes the anode electrodes insulated from one another.

lated from one another.

7. The fabricating method according to claim 6, wherein the conductive light shielding film partially exposes the anode electrode to define a light emitting area.

8. The fabricating method according to claim 6, further comprising the steps of:

forming an organic light emitting layer on the anode electrode;
forming a barrier rib to cross the anode electrode; and
forming a cathode electrode to cross the anode electrode with the organic light emitting layer therebetween.

9. The fabricating method according to claim 6, wherein the conductive light shielding film includes an opaque material.

FIG. 1
RELATED ART

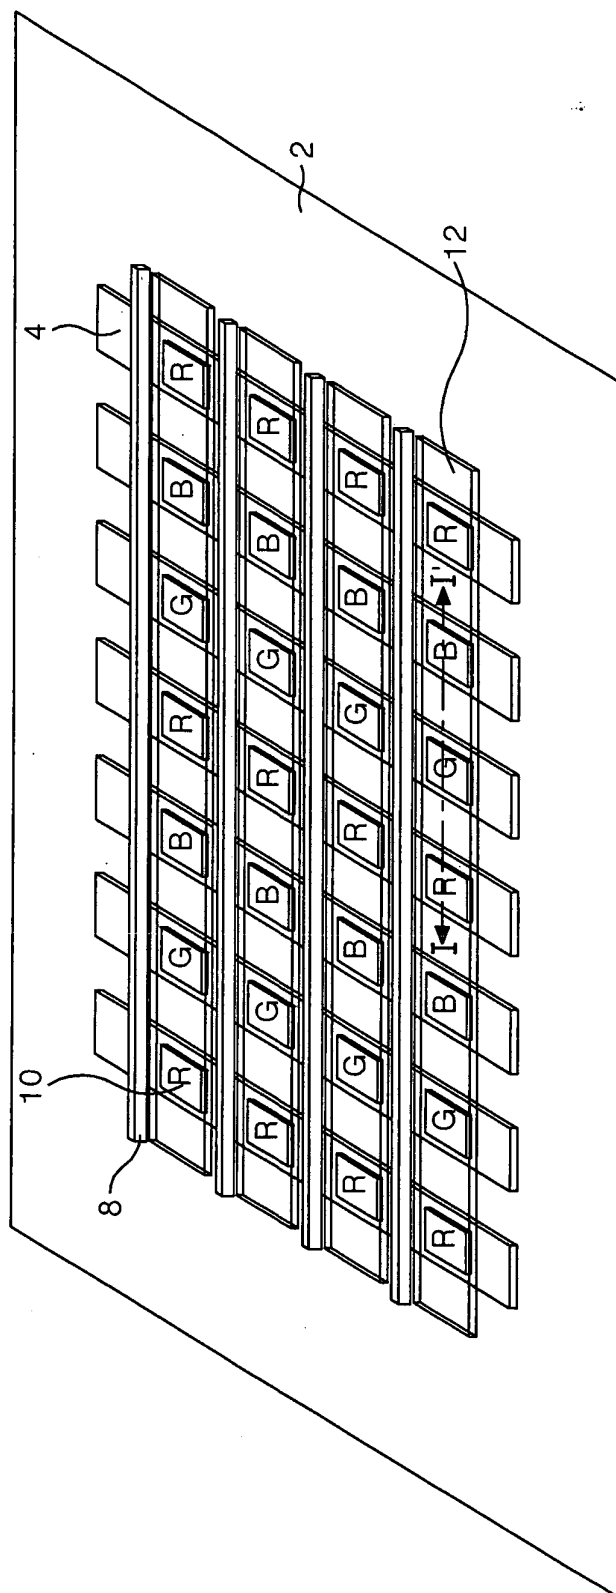


FIG. 2
RELATED ART

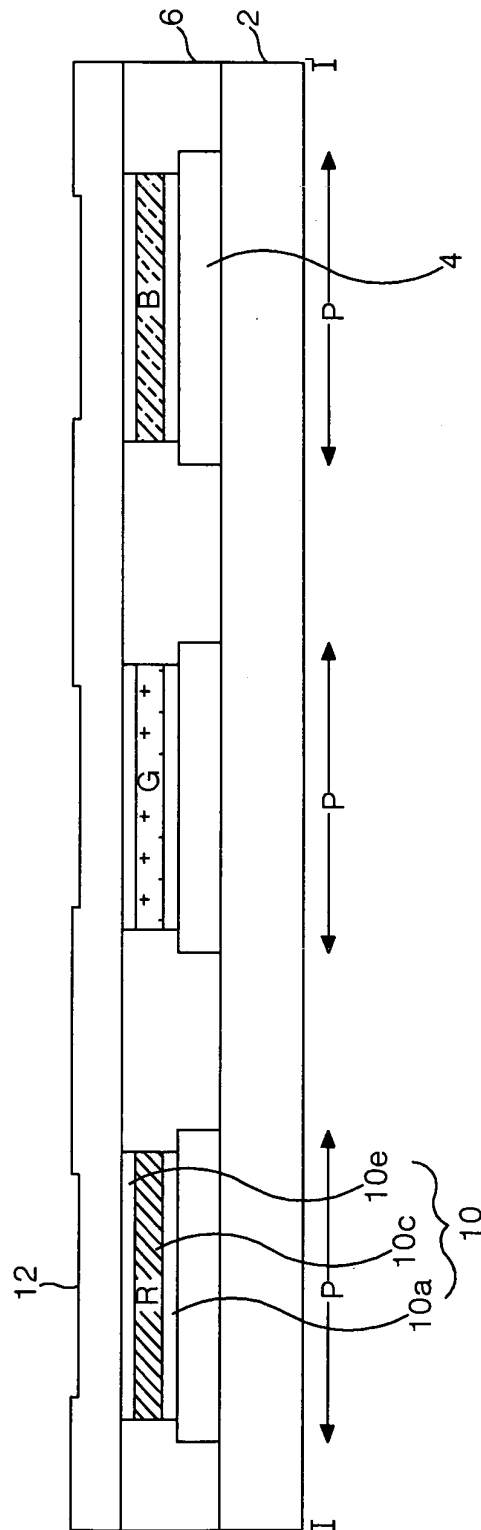


FIG. 3A
RELATED ART

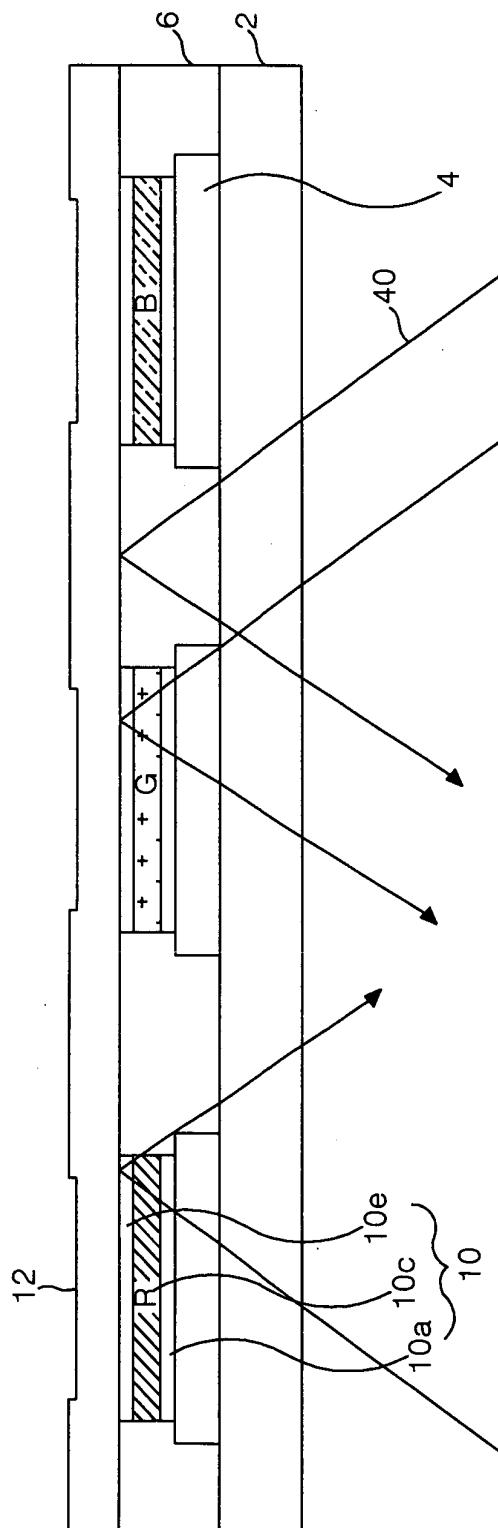


FIG. 3B
RELATED ART

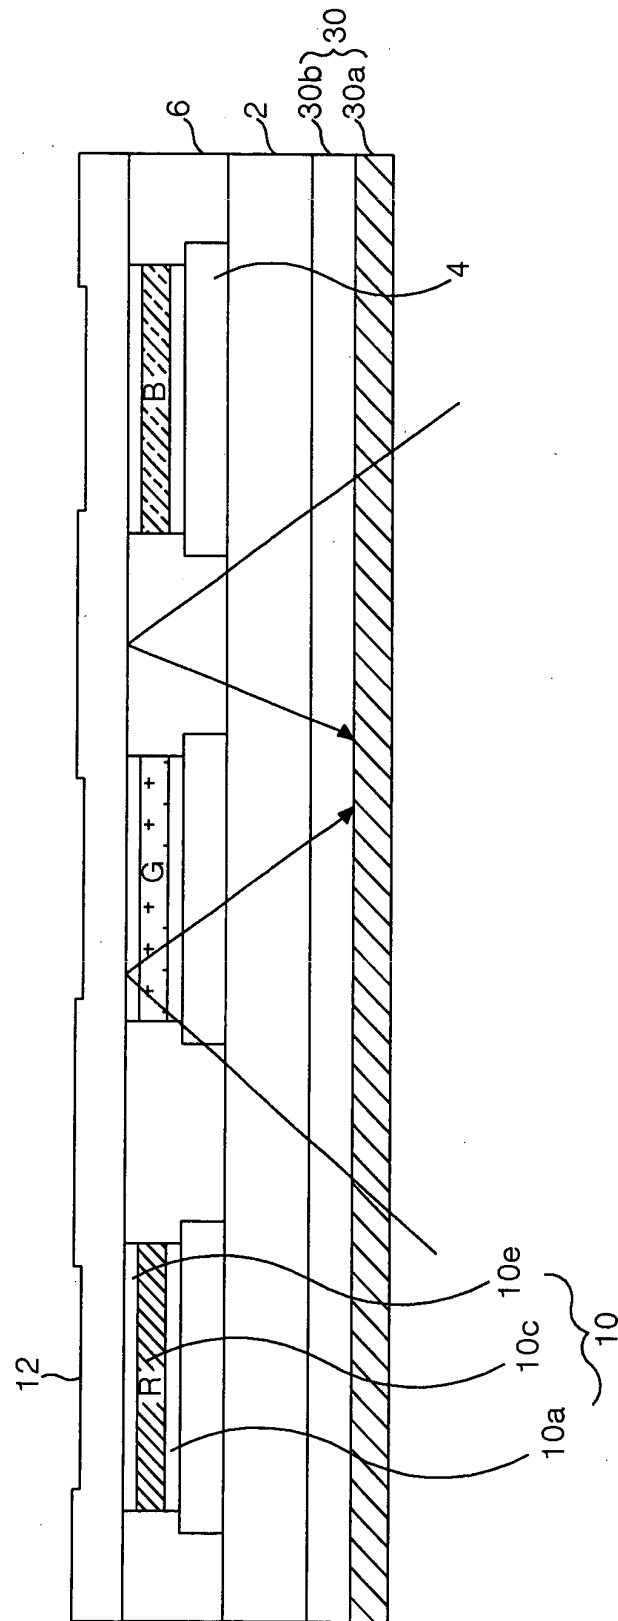


FIG. 4

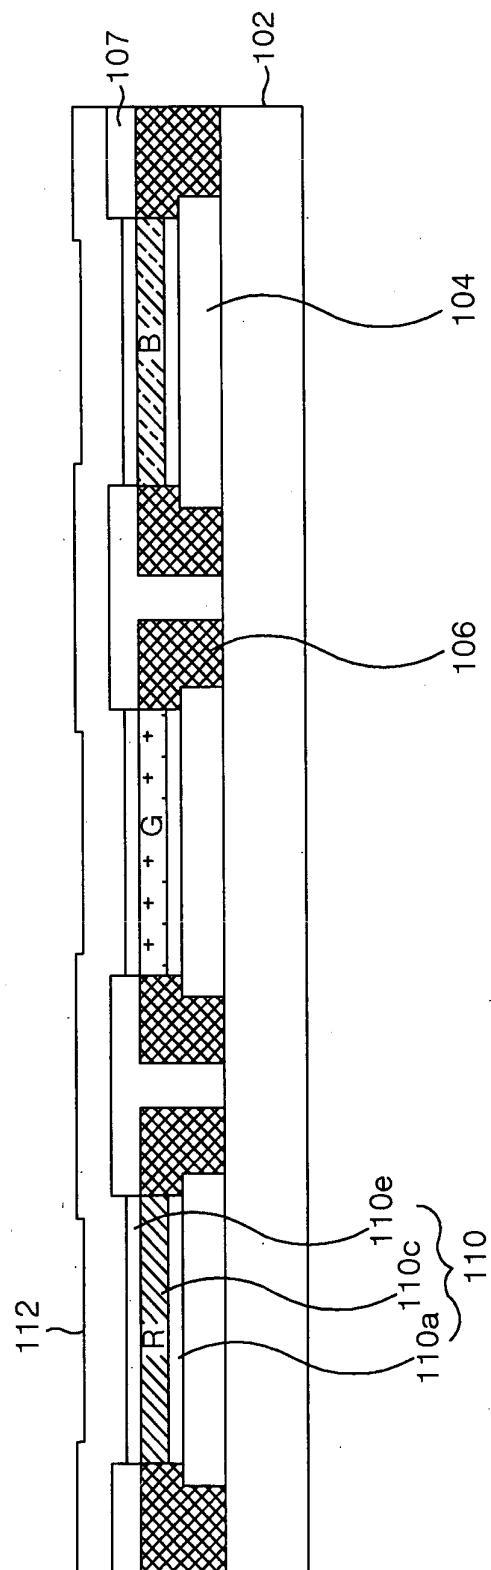


FIG. 5

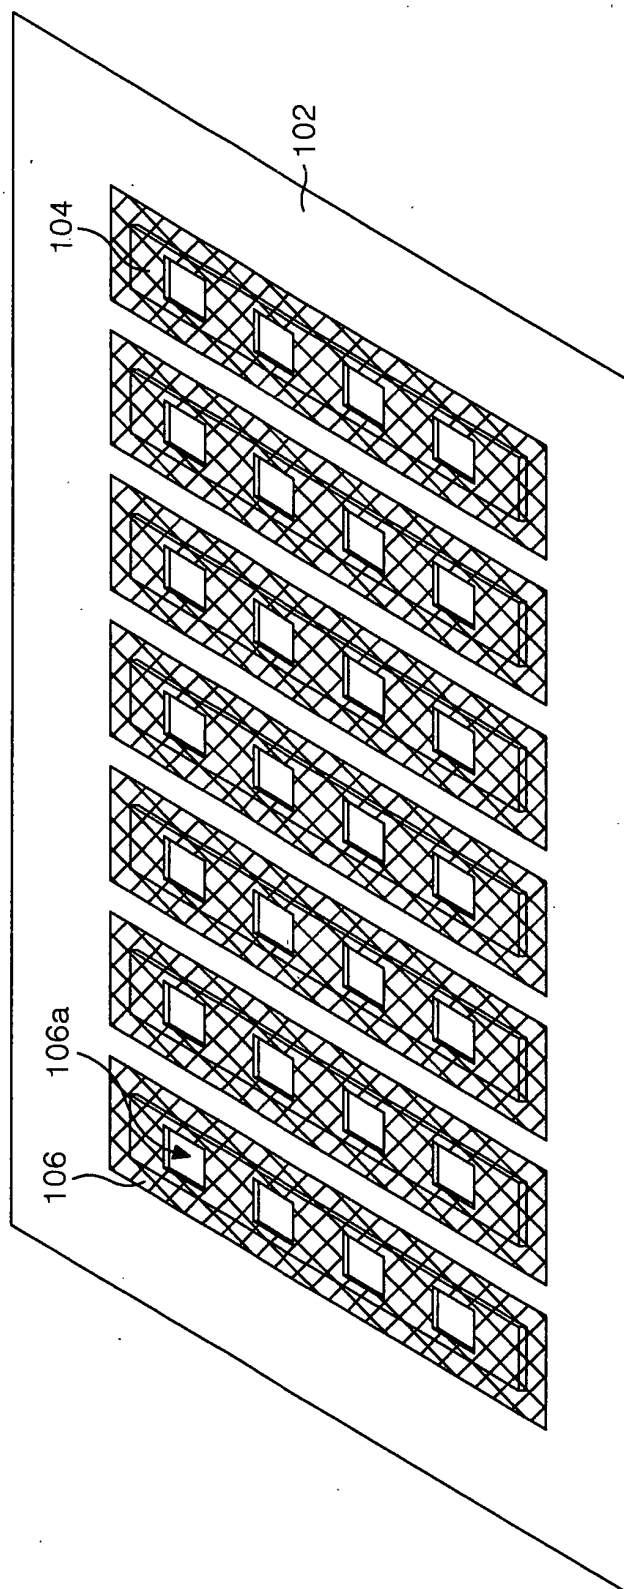


FIG. 6A

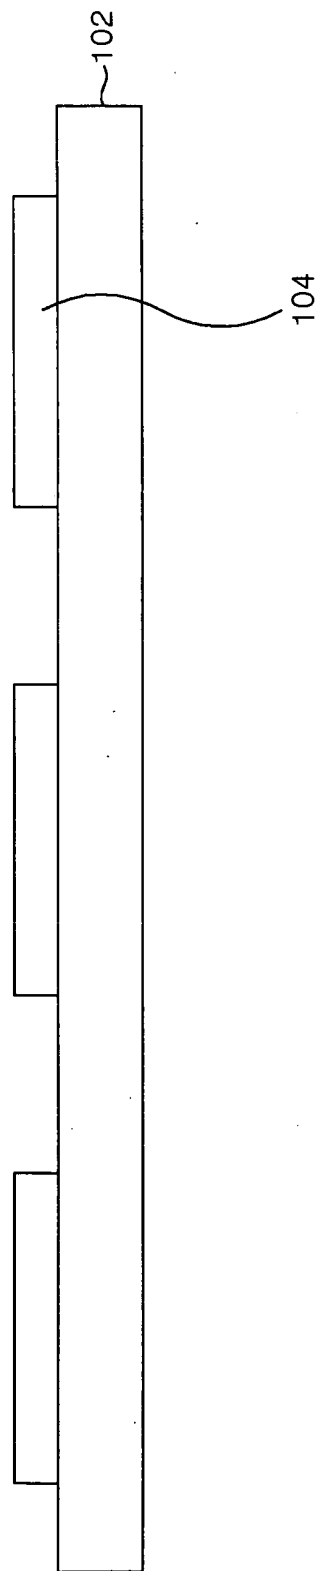


FIG. 6B

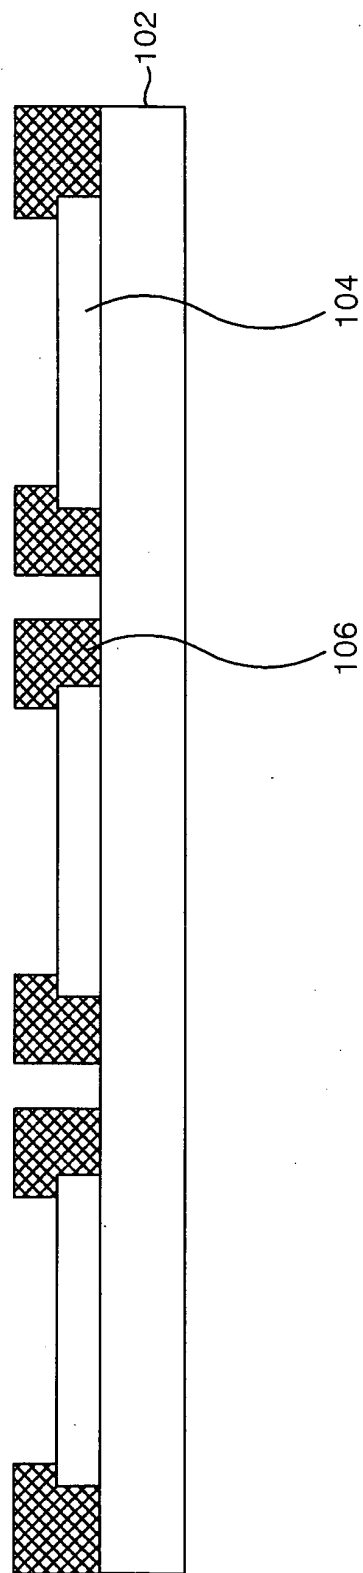


FIG. 6C


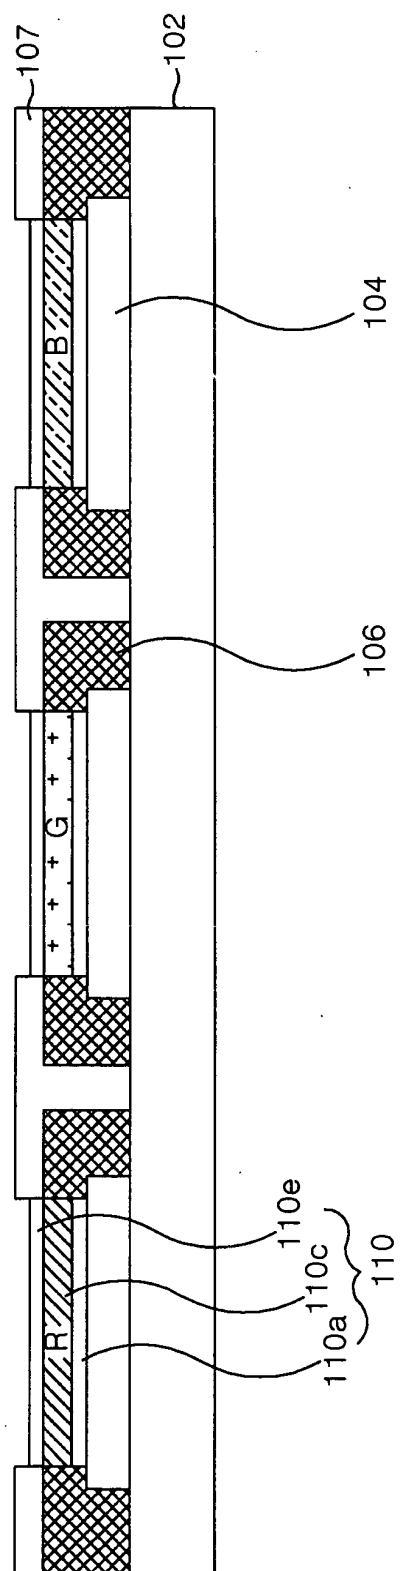


FIG. 6D

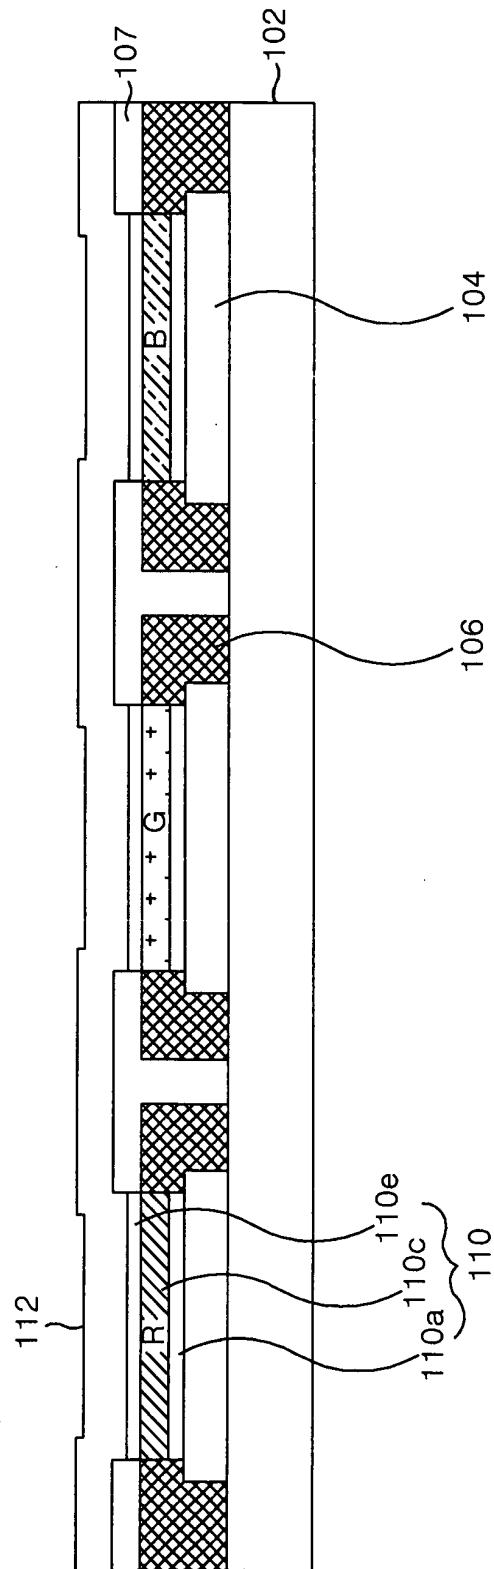

专利名称(译)	有机电致发光显示装置及其制造方法		
公开(公告)号	EP1608017A2	公开(公告)日	2005-12-21
申请号	EP2005012737	申请日	2005-06-14
申请(专利权)人(译)	LG电子株式会社.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM KWANG YOUNG KIM HAK SU BAIK KWANG HEUM		
发明人	KIM, KWANG YOUNG KIM, HAK SU BAIK, KWANG HEUM		
IPC分类号	H01L51/52 H05B33/26 H01L27/00 H01L27/32 H05B33/00		
CPC分类号	H01L51/5284 H01L27/3281 H01L51/5212		
优先权	1020040043716 2004-06-14 KR		
其他公开文献	EP1608017A3 EP1608017B1		
外部链接	Espacenet		

摘要(译)

公开了一种适用于改善发光亮度和降低功耗的有机EL显示装置及其制造方法。根据本发明的有机EL显示装置包括多个阳极;导电遮光膜具有导电性,并且以单独的图案形成在阳极上,使得阳极彼此绝缘。

FIG.4

