



(11) **EP 2 865 241 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
09.08.2017 Bulletin 2017/32

(51) Int Cl.:
H05B 33/10 ^(2006.01) **H05B 33/12** ^(2006.01)
H05B 33/08 ^(2006.01)

(21) Application number: **13816770.5**

(86) International application number:
PCT/FI2013/050681

(22) Date of filing: **20.06.2013**

(87) International publication number:
WO 2014/009601 (16.01.2014 Gazette 2014/03)

(54) **TRANSPARENT INORGANIC THIN-FILM ELECTROLUMINESCENT DISPLAY ELEMENT AND METHOD FOR MANUFACTURING IT**

ELEKTROLUMINESZENTES ANZEIGEELEMENT MIT EINEM TRANSPARENTEN
ANORGANISCHEN DÜNNFILM SOWIE VERFAHREN ZU SEINER HERSTELLUNG

ÉLÉMENT D’AFFICHAGE ÉLECTROLUMINESCENT À COUCHE MINCE TRANSPARENT
INORGANIQUE ET SON PROCÉDÉ DE FABRICATION

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **21.06.2012 FI 20125695**

(43) Date of publication of application:
29.04.2015 Bulletin 2015/18

(73) Proprietor: **Beneq OY**
01510 Vantaa (FI)

(72) Inventor: **HÄRKÖNEN, Kari**
FI-00150 Vantaa (FI)

(74) Representative: **Papula Oy**
P.O. Box 981
00101 Helsinki (FI)

(56) References cited:
US-A- 4 602 192 US-A- 6 036 823
US-A1- 2003 152 804 US-A1- 2005 012 455
US-A1- 2009 236 971 US-B1- 6 414 439

EP 2 865 241 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] This disclosure relates to the field of transparent displays and, more particularly, to the field of emissive transparent displays. Especially this disclosure relates to the field of AC-driven transparent inorganic thin film electroluminescent (TFEL) displays which are emissive transparent displays. More specifically this disclosure relates to improvement of the transparency and inconspicuousness of transparent inorganic thin film electroluminescent (TFEL) displays.

BACKGROUND

[0002] Transparent displays find use in applications where space is constrained and there is a need to provide the users with a dual set of information. For example, a first item of information may be provided by the display and a second item of information may be viewable through the display. In addition, transparent displays enable exciting designs for both professional and consumer use e.g. in applications where the product needs to be differentiated from conventional ones. Transparent displays may offer unique benefits enabling the viewer to localize objects behind the screen, or add superimposed warnings or messages on top of other information displays. Some future applications may use transparent head mounted displays (HMD's) in front of a user's eye, allowing addition of superimposed digital information on the normal field of vision.

[0003] In this context, a TFEL display element is a layered structure including the necessary components for light emission when connected to proper electronics. In this context, the display area is considered the transparent area of a TFEL display element which is visible to the observer of the display, and through which he/she can observe objects behind the display. In this context, the emissive area is considered the area which by design is capable to generate and emit light. In this context, the non-emissive area is considered the display area which is not part of the emissive area. Thus the display area comprises both emissive and non-emissive areas; this highlights the significance of optical properties over the whole display area and their impact on how an observer experiences the display.

[0004] In the operation of an emissive, transparent display, the ON and OFF states can be discerned. In the ON state, light is generated and emitted in the display element. In the OFF state, no light emission occurs in the display element, or it is insignificant. In general, a basic requirement for displaying the required information is to bring along sufficient contrast in brightness between adjacent ON and OFF elements. In transparent displays, a further requirement is that the observer gets a sufficiently clear and unobstructed view of the objects behind the display.

[0005] At its best, a transparent display is almost imperceptible by being first of all as transparent as possible. At the same time it is well known that the human eye is very sensible to differences in light intensity and color when adjacent areas of a display surface can be compared. From an imperceptibility point of view, it is particularly critical how consistently ambient light penetrates the various areas of the display visible to the observer and how it is reflected from these areas. Deviations in consistency can be observed as transmission differences (intensity or color of transmitted light) or reflection differences (intensity or color of reflected light). If there are differences in reflective and transmissive properties between different parts of the display structure, the viewer may observe e.g. conductor structures or shapes, which is not acceptable.

[0006] The transparency of a display can be defined by means of the concept photopic transmission in the visible light range. This can be measured using a double beam spectrometer, which produces a transmission spectrum with the transmission percentage as a function of the light wavelength. To provide a realistic view of transmission, this data can be scaled with the spectrum of a standard D65 light source. The light output over the wavelength range 420 nm-650 nm of the resulting spectra is divided by the corresponding light from the D65 source. Photopic transmission values and reflectivity values presented here or in attached figures and examples are defined to be perpendicular to the display surface plane. Other values may be preferred if an angle of incidence other than a perpendicular angle of incidence is used.

[0007] The photopic transmission of a single uncoated soda lime glass sheet is in the order of 85-92 % due to the two glass-air interfaces and the reflections occurring there. The exact value is dependent on the glass material used, on nominal thickness of glass sheet and on its refractive index and optical absorption. Correspondingly, the transmission of two consecutive soda lime glass sheets is in the order of 78-84%. Materials having such photopic transmission values >78% are perceived as transparent, in particular when the transmission is sufficiently neutral with respect to the wavelength. In practice such designs are successfully used in protective structures for sensible instruments as well as in shop windows and dwellings.

[0008] AC-driven inorganic thin film electroluminescent (TFEL) technology is well known, and many important aspects of inorganic TFEL technology like basic physics, typical materials and properties of displays, driving methods and manufacturing technology are common and general knowledge. TFEL technology is especially well suitable for transparent display applications as it provides a light emitting display with potentially high transparency with photopic transmission values >50%. The main difference between transparent and conventional inorganic TFEL displays is that opaque

metal electrode material (typically aluminum) is replaced by transparent electrode material, generally denoted transparent conductive oxide or TCO (typically indium tin oxide, ITO). Inorganic TFEL displays are known for excellent picture quality, rugged design and long-term reliability.

[0009] The thin film structure of a TFEL display includes a luminescent material layer (=phosphor) between two insulator layers. In a transparent TFEL display, transparent electrodes are provided on both sides of insulators. The two electrodes may be patterned to form rows and columns, respectively, whereby pixels are formed at the sites where a row and a column intersect. As a voltage is applied across an intersecting row and column, electroluminescence appears in the phosphor layer.

[0010] Apart from the matrix type display described above, other display types can be designed using TFEL technology, e.g. 7-segment number displays or designs displaying discrete icons or symbols at defined locations. In such displays, there are typically significant areas which are non-emissive, i.e. one or more of the layers necessary for generating light emission are not present in such areas.

[0011] Desirable properties of a transparent display are transparency and inconspicuousness or imperceptibility. The transmission of many present, emissive display designs is unsatisfactory. In designs based on OLED, LCD or powder EL, it is challenging to obtain a photopic transmission of even 60 %. In state-of-the art transparent TFEL displays, transmission values above 60% can be achieved, but due to variation in the thin film structure the appearance of such displays has not been satisfactory.

[0012] It would be desirable to obtain a transmission level above 78%. No satisfactory designs for emissive displays have been suggested to achieve such properties, also not for transparent TFEL displays. To express transmission consistency over an area as a number value is not straightforward, but it should be as consistent as possible to maintain a neutral color impression.

[0013] From an imperceptibility point of view, it is particularly critical how consistently ambient light penetrates the various areas of the display visible to the observer and how it is reflected from these areas. Deviations in consistency can be observed as transmission differences (intensity or color of transmitted light) or reflection differences (intensity or color of reflected light). No workable solutions to this problem have been suggested for emissive, transparent displays, including transparent TFEL displays.

SUMMARY OF THE INVENTION

[0014] An inorganic, transparent thin film electroluminescent display element with a display area having at least one emissive area and at least one non-emissive area has now been invented, which offers several advantages over prior art structures.

[0015] In accordance with the present invention, a display element improved in terms of transparency and inconspicuousness is provided. The relevant properties are improved as follows: Emissive and non-emissive areas of the display are rendered optically similar by providing passive film elements, hereinafter abbreviated PFE, at the non-emissive areas. This is achieved by providing conductor material also at the non-emissive areas when the conductive electrodes connected to a power source for generating the required voltage, hereinafter conductor elements, are deposited at the emissive areas.

[0016] The structure according to the invention comprises a substrate, a first conducting layer comprising TCO material having a thickness in the range 30-250 nm; a first insulating layer; a luminescent layer comprising zinc sulfide, having a thickness in the range 30-250 nm; a second insulating layer; a second conductive layer comprising TCO material having a thickness in the range 30-250 nm; and a third insulating layer comprising insulating, inorganic material having a lower refractive index than that of the second conductive layer. According to the invention, each of said first and second conducting layers comprises at least one conductor element at the at least one emissive area and at least one passive film element at the at least one non-emissive area.

[0017] Thus, according to the present invention, there is conductor material present in the conductive layers both in the emissive areas and in the non-emissive areas, the conductor material in the latter areas being the passive film elements.

[0018] Preferably, the first conducting layer is optically matched to the substrate to reduce reflection by coating the substrate with at least one layer of isolating, inorganic material, the refractive index of which is lower than that of the conductive material.

[0019] Preferably, the second conducting layer is optically matched to the environment to reduce reflection by coating it with at least one layer of isolating, inorganic material, the refractive index of which is lower than that of the conductive material.

[0020] The passive film elements are formed at the same time as the first and second layers of conductive material are patterned, respectively. Consequently, both layers of conductive material comprise at least one area which is not electrically connected to a source providing the required voltage to the electrodes in the emissive areas. Preferably, at least at one location within the patterned layer of conductive material, the distance between the PFE and the electrode

in the plane of the layer is 1-30 μm . Preferably, the total area of the emissive areas covered by electrodes and the PFE:s is > 80 % of the display area as defined above; preferably it is > 90 % and most preferably > 95 %.

[0021] To minimize losses, the material layers in which optical losses (scattering or absorption) occur are made thinner than conventionally in the prior art. The thickness of the luminescent layer is in the range 30 to 250 nm, preferably in the range 50 to 200 nm and most preferably in the range 100 to 180 nm. The thickness of the conducting layers is in the range 30 to 250 nm, preferably in the range 50 to 200 nm and most preferably in the range 100 to 200 nm. Preferably, the thicknesses of the insulating layers are in the range 30 to 500 nm, more preferably in the range 50 to 200 nm.

[0022] A display element according to the invention can be joined by adhesive to a transparent protective panel, like glass. On both sides of a thus protected display element, a transparent panel can be added for additional protection, like a shockproof protective glass or a scratch-resistant protective panel.

[0023] Such a glass-protected display element can be joined in either position to an object which is to be observed through the display. To render the total structure thinner, it is sometimes advantageous to join a display element according to the invention directly to the object to be observed through the display. The relevant object need not be transparent.

[0024] According to a further aspect of the present invention, a method is provided for manufacturing a transparent thin film electroluminescent display element with a display area having at least one emissive area and at least one non-emissive area.

BRIEF DESCRIPTION OF THE FIGURES

[0025]

Figures 1A - 1C illustrate various aspects of the use of a transparent display;

Figure 2 shows the schematic thin film structure of a TFEL display;

Figures 3A-3B are side and plane views of a prior art, optically improved TFEL display element;

Figure 4 shows the structure of a detail of a transparent TFEL display according to the prior art;

Figure 5 shows the structure of a detail of a transparent TFEL display according to the present invention;

Figure 6 shows a TFEL structure having a protective glass panel;

Figure 7 shows a TFEL structure having additional components for improving its optical properties;

Figures 8A to E illustrate several examples of optical bonding in a display element having low off-state perceptibility.

Figure 9A to C illustrate examples of structural variations in a display element according to the invention.

Figure 10 illustrates the use of a display element according to the invention in a HMD device.

DETAILED DESCRIPTION

[0026] The present invention relates in particular to the AC-driven thin film structure of a transparent TFEL display, deposited on a substrate. A TFEL element according to the invention is connected via transparent leads to electronic components for supplying the required voltages and current to the TFEL element for generating light emission and thus information. The voltage difference in the conductors surrounding the luminescent layer generates an electrical field, causing light emission in the luminescent layer. The number and shape of the conductors are determined by the information and symbols to be displayed. The electronics and drive routines controlling the operation of the display element are part of the prior art. Drive routines known to the skilled person are e.g. segmented drive routines and multiplexed routines used in matrix structures.

[0027] In the operation of an emissive, transparent TFEL display, the ON and OFF states can be discerned. In the ON state, the display element emits light generated in the electroluminescent layer. The intensity of the light emission is sufficient to become visible in the light conditions of the relevant surroundings, being of sufficient contrast and enabling a viewer to observe the displayed information. In the OFF state, no light emission occurs in the TFEL element, or it is insignificant so the viewer does not observe it in the relevant lighting conditions.

[0028] In general, a sufficient requirement for the difference between ON and OFF states in emissive displays is the difference in brightness between adjacent ON and OFF elements to bring along sufficient contrast for displaying the required information. In transparent displays, a further requirement for the OFF state is that the observer gets a sufficiently clear and unobstructed view of the objects behind the display. At its best, a transparent display is almost imperceptible in its OFF state and has no impact on the observation of objects behind it. Although the display does not emit light in its OFF state, light is reflected from its surface and light passes through it towards the observer. If there are differences in reflective and transmissive properties between different parts of the display structure, the viewer may observe e.g. conductor structures or shapes, which is not acceptable.

[0029] A substrate in the context of this disclosure is the material providing the main, rigid structure of the display. Substrate materials may include soda lime, borosilicate, or any other glass material with sufficient transparency. In some embodiments, substrates other than glass materials may be suitable, such as polymer substrates which may provide

greater mechanical durability or flexibility than glass. The photopic transmission of suitable substrates is preferably greater than 80%. In some embodiments, the transmission may be greater than 90% or even greater than 95% if one side of substrate includes anti-reflection coatings. Substrate thickness may be in the range of 0.05 mm - 5 mm or more. In some embodiments, the thickness of the substrate may be in the range of 0.3 mm - 3 mm or 0.5 mm - 1.1 mm, and a suitable thickness is about 1.1 mm. In some embodiments, either or both sides of the substrate may be coated with a film in order to improve its suitability for transparent TFEL displays.

[0030] A variety of many different thin film materials may be used for TFEL display structures. In the present invention materials that are generally suitable for transparent TFEL display manufacturing are preferred.

[0031] Transparent electrode materials for the TFEL display may include indium tin oxide (ITO), ZnO:Al, SnO₂ or any other conductive material with sufficient transparency. The sheet resistance (Rs) of a suitable transparent electrode is preferably less than 500 Ohm/sq. In some embodiments, the Rs may be less than 100 Ohm/sq. In other embodiments, the Rs may be less than 20 Ohm/sq.

[0032] Manganese-doped zinc sulfide ZnS:Mn as the luminescent material is preferred for yellow emitting TFEL displays, and terbium-doped zinc sulfide ZnS:Tb as the luminescent material is preferred for green emitting TFEL displays. However, the selection of materials is not limited to these luminescent materials. Other luminescent material can be used and are preferred especially if other emission colors are needed.

[0033] At least part of the conducting layers may form a matrix of intersecting electrodes, whereby emissive pixels are formed at the sites of the intersections of the electrodes. At least part of the conducting layers may also be formed so as to provide emissive segments, icons, or symbols at predetermined locations of the display area. Such emissive areas can be used to provide, for example, 7-segment number displays or designs displaying discrete icons or symbols at desired locations.

[0034] Insulator, barrier, passivation and index matching materials for the TFEL display are preferably dielectric and may include aluminium oxide, titanium oxide, SiO₂, HfO₂, ZrO₂, and combinations and mixtures of these materials, or other suitable materials.

[0035] Many different manufacturing methods may be used for the TFEL display structure and for integrating or combining the TFEL display structure to other surfaces or components. Methods that are generally accepted as suitable for transparent TFEL display manufacturing are preferred and suitable also for the present invention.

[0036] A preferred manufacturing method for the TCO layers in a display element according to the invention is sputtering.

[0037] A preferred manufacturing method for luminescent and insulator layers of TFEL display, and for thin films of barrier and passivation layers is Atomic Layer Deposition (ALD). Other methods may be used to manufacture one or more of thin films layers, such as evaporation or various sputtering techniques. Preferred manufacturing method for patterning of thin films and particularly for patterning transparent electrode layers are commonly known, including lithography and printing methods.

[0038] According to an embodiment of the present invention, a preferred method of integrating or combining the thin film structure of the TFEL and a safety glass is optical bonding using a suitable adhesive, such as heat curable epoxy or light curable acrylic adhesive. In embodiments within the scope of the present invention, the adhesive used has a refractive index value in the range 1.35-1.70. Preferably, the refractive index may be in a range of about 1.40 to 1.60 or more preferably in a range of about 1.46 to 1.53. The thickness of the adhesive layer may be in the range 5 - 100 µm, preferably 10 - 50 µm. Preferably, no air gap exists between the thin film structure of the TFEL and the safety glass. An air gap could decrease the picture quality or the transmission of the display.

[0039] According to an embodiment of the present invention, at least one light emitting zone is provided in the display area for illuminating the area behind the display. Such a zone does not necessarily provide any information, but may be adapted for illumination purposes only.

[0040] The invention is discussed in further detail in the following with reference to the attached drawings.

[0041] **Fig. 1** is a symbolic representation of a viewer 10 observing an object 12 through a transparent display 11. In **Fig. 1A**, the transparent TFEL display is in the OFF state and no light emission takes place. The display area of transparent TFEL display 11 comprises emissive area 13 and non-emissive area 14. In **Fig. 1B**, information is shown on the display 11 which thus is at least partially in an ON state, emitting light. It should be observed that light is emitted in both directions, both towards the observer and away from him/her. The emitted light forms the desired information 15 on the display, e.g. text or a graphic symbol.

[0042] In **Fig. 1C**, the viewer is at the left, observing an object at the right through a transparent display. Part of the ambient light 17 is reflected from the display. Part 18 of the ambient light is reflected at a non-emissive area and part 19 of the ambient light at an emissive area. Transmitted ambient light 16 provides an image of what is behind the display relative to the observer. For the display to be as inconspicuous as possible in the OFF state, it is crucial that reflection and transmission properties are consistent over the display area.

[0043] In **Fig. 2**, the components of a transparent TFEL structure are schematically represented as follows: 20 is a transparent substrate; 21 is a first conductor layer made of TCO material; 22 is a first insulator layer; 23 is the luminescent

(= phosphor) layer; 24 is a second insulator layer; 25 is a second conductor layer made of TCO material, and 26 represents an electrical arrangement for supplying a voltage difference between conductor layers 21 and 25.

[0044] Fig. 3A shows a side view of an optically improved transparent TFEL structure according to the prior art, on the transparent substrate 20. In addition to thin films shown in Fig. 2 there are index matching layers 30 and 31 next to conductor layers 21 and 25 made of TCO material, in order to decrease reflections. Refractive index of index matching layers 30 and 31 is lower than refractive index of conductor layers 21 and 25.

[0045] In Fig. 3B, the improved prior art arrangement of transparent TFEL structure in Fig. 3A is shown from above. Four areas having a different stack of thin films are identified as T21, T22, T23 and T24. Using optical film design software (Film Wizard) and a set of optical parameters for relevant examples of materials (listed in Tables 1, 2, 3, 4 and 5) in each layer, transmission and reflection properties were calculated. The results are presented in Table 6.

[0046] From the calculated values we notice that there are differences in photopic transmission values starting from 66.8% up to 77.0% for different display areas. These transmission variations are visible to the viewer. On the other hand, the results do indicate differences in reflectivity starting from 7.2% up to 11.7% for the different display areas. In addition to the average reflection variation there are differences relative to the light wavelength, showing a strong greenish reflection peak for areas T22 and T23 in which a second conductor layer made of TCO material 25 is present. These reflection variations become visible in ambient light and are visible to the viewer. It is clear that further improvement is needed but the prior art does not provide any suggestions on how to make different areas of a display more consistent. It is the purpose of the present invention to provide a technically feasible solution to this problem.

Table 1.	Glass substrate 20	
Wavelength (nm)	n	k
400	1.512	6.872E-07
450	1.493	6.402E-07
500	1.485	5.685E-07
550	1.485	5.820E-07
600	1.490	6.471E-07
650	1.499	7.471E-07
700	1.511	7.107E-07

Table 2.	TCO layers 21 and 25	
Wavelength (nm)	n	k
400	1.960	5.000E-03
450	1.905	4.000E-03
500	1.855	4.400E-03
550	1.810	5.000E-03
600	1.775	7.000E-03
650	1.745	1.000E-02
700	1.715	1.300E-02

Table 3.	Insulator layer 22 and 24	
Wavelength(nm)	n	k
400	2.032	0
450	1.971	0
500	1.936	0

EP 2 865 241 B1

(continued)

Table 3.	Insulator layer 22 and 24	
550	1.915	0
600	1.901	0
650	1.893	0
700	1.887	0

Table 4.	Luminescent layer 23	
Wavelength(nm)	n	k
400	2.321	1.373E-02
450	2.264	1.039E-02
500	2.223	8.480E-03
550	2.193	7.320E-03
600	2.170	6.580E-03
650	2.152	6.100E-03
700	2.138	5.770E-03

Table 5.	Index matching layers 30 and 31	
Wavelength(nm)	n	k
400	1.673	0
450	1.667	0
500	1.662	0
550	1.657	0
600	1.654	0
650	1.652	0
700	1.650	0

Table 6.				
Layer	T21	T22	T23	T24
20 Substrate	1.1mm	1.1mm	1.1mm	1.1mm
30 IM	270nm	270nm	270nm	270nm
21 First Conductor	-	350nm	-	350nm
22 First Insulator	270nm	270nm	270nm	270nm
23 Luminescent layer	750nm	750nm	750nm	750nm
24 Second Insulator	270nm	270nm	270nm	270nm
25 Second Conductor	-	350nm	350nm	-
31 IM	75nm	75nm	75nm	75nm
Photopic T%	77.0	66.8	69.8	73.8

(continued)

Table 6.				
Layer	T21	T22	T23	T24
Average T%	77.2	67.1	70.2	74.0
Average R%	7.5	11.6	11.7	7.2
Total Opt. loss %	15.2	21.4	18.1	18.9

[0047] Fig. 4 shows a prior art arrangement of a transparent TFEL display element having several emissive areas on a substrate 40. In the display area 41 are provided row-forming TCO electrodes 42 and column-forming TCO electrodes 43 intersecting to form areas capable of emitting light in the phosphor layer. Electrodes 42 and 43 are connected to voltage sources (not shown).

[0048] Section A-A along row electrode 42 shows, from the bottom up, substrate 40; row electrode 42; a insulator-phosphor-insulator (IPI) stack consisting of first insulator layer 45, phosphor (luminescent) layer 46 and second insulator layer 47; column electrodes 43; and a third insulator layer 44.

[0049] Section B-B is outside row electrode 42 and shows the corresponding layers with the exception of row electrode 42.

[0050] Display area 41 comprises four types of areas which differ from an optical point of view. The paths of light transmission through these are shown as T1, T2, T3 and T4, respectively:

- T1 represents transmission through areas comprising row electrode and IPI stack
- T2 represents transmission through areas comprising both row electrode, column electrode and the IPI stack in between
- T3 represents transmission through areas comprising IPI stack only, and
- T4 represents transmission through areas comprising column electrode and IPI stack.

[0051] The photopic transmission and reflection data at the various areas of Fig. 4 are the same as previously shown for respective thin film structures T21, T22, T23 and T24 in Table 6 for Fig. 3B.

[0052] Fig. 5 shows an arrangement of a transparent TFEL display element in accordance with the invention. The structure includes the corresponding row electrodes 42, column electrodes 43 and IPI stack elements 45, 46 and 47, equally designated in Fig. 4.

[0053] In addition, the structure in Fig. 5 comprises passive film elements 50 and 51, which consist of electrode material but are not electrically connected. However, they act to provide the same optical structure across essentially the whole display area. Preferably, more than 80 % of the area in the layers incorporating TCO material is covered by TCO material of uniform thickness. Refractive index of insulator layer 44 is lower than refractive index of conductor layer 43 and passive film element 50.

[0054] Section C-C is taken through a row electrode and section D-D outside a row electrode. Four paths of light transmission, T5, T6, T7 and T8 are shown in Fig. 5.

[0055] The photopic transmission and reflection data at the various areas of Fig. 5 are identical to the data shown in Table 6 for area T22 in Fig.3B. Photopic T% is 66.8% and average R% 11.6% for all areas T5, T6, T7 and T8. This means the viewer cannot see variations between different areas of the display.

[0056] Fig. 6 shows a TFEL display element design having the same basic structure as the TFEL display element in Fig. 5, i.e. the optical stack 69 comprises substrate 60; conducting layer 42; insulating layer 45; phosphor layer 46; insulating layer 47; conducting layer 43 and index matching layer 44, whereby conducting layers 42 and 43, according to the invention, comprise passive film elements 50 and 51. Additionally, stack 69 comprises index matching layer 61. On stack 69, a protective glass panel 68 can be attached using transparent adhesive 67 for optical bonding.

[0057] Using the TFEL display element structure shown in figure 6, the photopic transmission was calculated for various TCO layer 42, 43 and luminescent layer 46 thicknesses. The refractive index for adhesive layer 67 was 1.406. The layer thicknesses and corresponding photopic transmission values are shown in table 7. The table contains also one measured photopic transmission value from a sample according to the present invention. The reduced thickness of layers 42, 43, 46 which give rise to optical losses results in significantly improved photopic transmission. In order to achieve the targeted >78 % photopic transmission, the thickness of each of layers 42, 43 and 46 shall be less than or equal to 250 nm.

Table 7.	Sample			
Layer	Prior art	Calculated 1	Measured	Calculated 2
60	1.1 mm	1.1 mm	1.1 mm	1.1 mm
61	270 nm	270 nm	270 nm	270 nm
42	350 nm	170 nm	170 nm	100 nm
45	270 nm	270 nm	270 nm	270 nm
46	750 nm	200 nm	144 nm	100 nm
47	270 nm	270 nm	270 nm	270 nm
43	350 nm	170 nm	170 nm	100 nm
44	75 nm	75 nm	75 nm	75 nm
67	30 μ m	30 μ m	30 μ m	30 μ m
68	1.1 mm	1.1 mm	1.1 mm	1.1 mm
Photopic T%	69.0%	80.6%	82.3%	83.9%

[0058] Fig. 7 shows a TFEL display element design in which thin film structures 70, 71, 72 and 73 have been provided on both sides of substrate 40 and protective panel 68 for reducing reflection and enhancing transmission. The task of these structures is to match the glass material to the adjacent environments, minimizing reflection at the interface. Such "index matching" structures improve transparency and inconspicuousness, and may consist of single materials or comprise several different material layers.

[0059] Figure 8 A shows a TFEL display element 69 according to the invention, having substrate antireflection coating 70 and a 1.1 mm thick protective glass sheet 80 optically bonded to the element by layer 67 and having an antireflection coating 73.

[0060] Figure 8 B shows a TFEL display element 69 according to the invention, optically bonded on its thin film side (as opposed to the substrate side) by means of layer 67 to a 5.0 mm thick, chemically strengthened safety glass panel 81.

[0061] Figure 8 C shows a TFEL display element 69 according to the invention, optically bonded on its thin film side to a 0.3 mm thick protective glass sheet 82 and on the substrate side to a 1.0 mm thick sapphire sheet 83, both by means of layers 67.

[0062] Figure 8 D shows a TFEL display element 69 according to the invention, optically bonded by means of layer 67 on its thin film side to a 3.0 mm thick, chemically strengthened safety glass panel 84 and on the substrate side to non-transparent material 85, the surface of which is to remain visible to an observer. The non-transparent material may be e.g. metal, wood or a coated material.

[0063] Figure 8 E shows TFEL display element 69 according to the invention, optically bonded on its thin film side to a 3.0 mm thick protective glass panel 86, which is larger than the substrate of TFEL element 69. Electrical contacts to the TFEL display element are located either between the glass panels (substrate and protective sheet) as shown at 87 in section A-A, or at 88 in section B-B, outside the area of the protective glass sheet.

[0064] Fig. 9 A shows various shapes in which a TFEL display element according to the invention may be prepared e.g. from a larger substrate sheet: rectangular 90, rectangular with rounded corners 91, circular 92 or parallelogram 93.

[0065] Fig. 9 B shows TFEL display elements according to the invention, having round or rectangular apertures 95, 97, cut by drilling or laser cutting in rounded-corner rectangular element 94 and circular element 96.

[0066] Fig. 9 C shows a TFEL display element 98 according to the invention optically bonded to a convex surface 99 by means of layer 67.

[0067] Fig. 10 shows a TFEL display element 101 according to the invention as a HMD device in front of a viewer's eye 100, allowing unobstructed observation of the environment and object 102 due to its high transparency and inconspicuousness.

Claims

1. An inorganic, transparent thin film electroluminescent display element with a display area having at least one emissive area and at least one non-emissive area, the display element comprising a layer structure on a substrate, said layer

structure comprising

- a first conducting layer comprising transparent conductive material, having a thickness in the range 30-250 nm,
- a first insulating layer comprising insulating, inorganic material,
- a luminescent layer comprising zinc sulfide, having a thickness in the range 30-250 nm,
- a second insulating layer comprising insulating, inorganic material,
- a second conducting layer comprising transparent conductive material, having a thickness in the range 30-250 nm,
- a third insulating layer comprising insulating, inorganic material having a lower refractive index than that of the second conducting layer,

characterized in that each of said first and second conducting layers comprises at least one conductor element at the at least one emissive area and at least one passive film element at the at least one non-emissive area, whereby there is conductor material present in the conductive layers both in the at least one emissive area and in the at least one non-emissive area, the conductor material in the latter area being the passive film element.

2. A display element according to claim 1, wherein the sum of the emissive areas covered by the conductor elements and the non-emissive areas covered by the passive film elements is > 80 % of the display area.

3. A display element according to claim 1 or 2, whose photopic transmission is > 78 %.

4. A display element according to any of claims 1 to 3, wherein the transparent conductive material comprises indium tin oxide.

5. A display element according to any of claims 1 to 4, wherein the first and second insulating layers comprise at least one of aluminium oxide, titanium oxide, and combinations and mixtures of these.

6. A display element according to any of claims 1 to 5, wherein the third insulating layer comprises aluminium oxide.

7. A display element according to any of claims 1 to 6, wherein the luminescent layer comprises manganese-doped zinc sulfide ZnS:Mn.

8. A display element according to any of claims 1 to 7, wherein the luminescent layer comprises terbium-doped zinc sulfide ZnS:Tb.

9. A display element according to any of claims 1 to 8, comprising a glass panel optically bonded to the third insulating layer.

10. A display element according to any of claims 1 to 9, wherein at least part of the conducting layers form a matrix of intersecting electrodes.

11. A display element according to any of claims 1 to 10, wherein at least part of the conducting layers are formed so as to provide emissive segments, icons, or symbols at predetermined locations of the display area.

12. A display element according to any of claims 1 to 11, wherein at least one light emitting zone is provided in the display area for illuminating the area behind the display.

13. A method of manufacturing an inorganic, transparent thin film electroluminescent display element with a display area having at least one emissive area and at least one non-emissive area, the method comprising the steps of

- providing a substrate,
- preparing a first conducting layer comprising transparent conductive material, having a thickness in the range 30-250 nm,
- depositing by atomic layer deposition a first insulating layer comprising insulating, inorganic material,
- depositing by atomic layer deposition a luminescent layer comprising zinc sulfide, having a thickness in the range 30-250 nm,
- depositing by atomic layer deposition a second insulating layer comprising insulating, inorganic material,
- preparing a second conducting layer comprising transparent conductive material, having a thickness in the

range 30-250 nm, and

- preparing a third insulating layer comprising insulating, inorganic material having a lower refractive index than that of the second conducting layer,

characterized in that each of said first and second conducting layers is prepared so as to comprise at least one conductor element at the at least one emissive area and at least one passive film element at the at least one non-emissive area, whereby there is conductor material present in the conductive layers both in the at least one emissive area and in the at least one non-emissive area, the conductor material in the latter area being the passive film element.

Patentansprüche

1. Anorganisches, transparentes Dünnschicht-Elektrolumineszenz-Anzeigeelement mit einem Anzeigebereich, der mindestens einen emittierenden Bereich und mindestens einen nicht-emittierenden Bereich aufweist, wobei das Anzeigeelement eine Schichtstruktur auf einem Substrat umfasst, wobei die Schichtstruktur umfasst:

- eine erste leitende Schicht, die transparentes leitendes Material umfasst, mit einer Dicke im Bereich von 30 - 250 nm,
- eine erste isolierende Schicht, die isolierendes, anorganisches Material umfasst,
- eine Lumineszenzschicht, die Zinksulfid umfasst, mit einer Dicke im Bereich von 30 - 250 nm,
- eine zweite isolierende Schicht, die isolierendes, anorganisches Material umfasst,
- eine zweite leitende Schicht, die transparentes leitendes Material umfasst, mit einer Dicke im Bereich von 30 - 250 nm,
- eine dritte isolierende Schicht, die isolierendes, anorganisches Material mit einem niedrigeren Brechungsindex als demjenigen der zweiten leitenden Schicht umfasst,

dadurch gekennzeichnet, dass jede der ersten und zweiten leitenden Schichten mindestens ein Leiterelement an dem mindestens einen emittierenden Bereich und mindestens ein Passivschichtelement an dem mindestens einen nicht-emittierenden Bereich umfasst, wodurch Leitermaterial in den leitenden Schichten sowohl in dem mindestens einen emittierenden Bereich als auch in dem mindestens einen nicht-emittierenden Bereich vorhanden ist, wobei das Leitermaterial in letzterem Bereich das Passivschichtelement ist.

2. Anzeigeelement gemäß Anspruch 1, bei dem die Summe der emittierenden Bereiche, die von den Leiterelementen bedeckt sind, und der nicht-emittierenden Bereiche, die von den Passivschichtelementen bedeckt sind, > 80 % des Anzeigebereiches ist.

3. Anzeigeelement gemäß Anspruch 1 oder 2, dessen photopische Transmission > 78 % ist.

4. Anzeigeelement gemäß einem der Ansprüche 1 bis 3, bei dem das transparente leitende Material Indiumzinnoxid umfasst.

5. Anzeigeelement gemäß einem der Ansprüche 1 bis 4, bei dem die ersten und zweiten isolierenden Schichten mindestens eines von Aluminiumoxid, Titanoxid und Kombinationen und Mischungen derselben umfassen.

6. Anzeigeelement gemäß einem der Ansprüche 1 bis 5, bei dem die dritte isolierende Schicht Aluminiumoxid umfasst.

7. Anzeigeelement gemäß einem der Ansprüche 1 bis 6, bei dem die Lumineszenzschicht Mangan-dotiertes Zinksulfid ZnS:Mn umfasst.

8. Anzeigeelement gemäß einem der Ansprüche 1 bis 7, bei dem die Lumineszenzschicht Terbium-dotiertes Zinksulfid ZnS:Tb umfasst.

9. Anzeigeelement gemäß einem der Ansprüche 1 bis 8, das eine optisch an die dritte isolierende Schicht gebundene Glasplatte umfasst.

10. Anzeigeelement gemäß einem der Ansprüche 1 bis 9, bei dem mindestens ein Teil der leitenden Schichten eine Matrix aus einander überschneidenden Elektroden bildet.

11. Anzeigeelement gemäß einem der Ansprüche 1 bis 10, bei dem mindestens ein Teil der leitenden Schichten dazu gebildet ist, emittierende Segmente, Zeichen oder Symbole an vorbestimmten Stellen des Anzeigebereiches bereitzustellen.

12. Anzeigeelement gemäß einem der Ansprüche 1 bis 11, bei dem mindestens eine Licht emittierende Zone in dem Anzeigebereich zum Beleuchten des Bereiches hinter der Anzeige vorgesehen ist.

13. Verfahren zur Herstellung eines anorganischen, transparenten Dünnschicht-Elektrolumineszenz-Anzeigeelements mit einem Anzeigebereich, der mindestens einen emittierenden Bereich und mindestens einen nicht-emittierenden Bereich aufweist, wobei das Verfahren die Schritte umfasst:

- Bereitstellen eines Substrats,
- Präparieren einer ersten leitenden Schicht, die transparentes leitendes Material umfasst, mit einer Dicke im Bereich von 30 - 250 nm,
- Ablagern einer ersten isolierenden Schicht, die isolierendes, anorganisches Material umfasst, durch Atomlagenabscheidung,
- Ablagern einer Lumineszenzschicht, die Zinksulfid umfasst, mit einer Dicke im Bereich von 30 - 250 nm, durch Atomlagenabscheidung,
- Ablagern einer zweiten isolierenden Schicht, die isolierendes, anorganisches Material umfasst, durch Atomlagenabscheidung,
- Präparieren einer zweiten leitenden Schicht, die transparentes leitendes Material umfasst, mit einer Dicke im Bereich von 30 - 250 nm und
- Präparieren einer dritten isolierenden Schicht, die isolierendes, anorganisches Material mit einem niedrigeren Brechungsindex als demjenigen der zweiten leitenden Schicht umfasst,

dadurch gekennzeichnet, dass jede der ersten und zweiten leitenden Schichten so präpariert ist, dass dieselbe mindestens ein Leiterelement an dem mindestens einen emittierenden Bereich und mindestens ein Passivschichtenelement an dem mindestens einen nicht-emittierenden Bereich umfasst, wodurch Leitermaterial in den leitenden Schichten sowohl in dem mindestens einen emittierenden Bereich als auch in dem mindestens einen nicht-emittierenden Bereich vorhanden ist, wobei das Leitermaterial in letzterem Bereich das Passivschichtenelement ist.

Revendications

1. Élément d'affichage électroluminescent en couches minces transparentes inorganiques doté d'une zone d'affichage ayant au moins une zone émissive et au moins une zone non émissive, l'élément d'affichage comprenant une structure en couches sur un substrat, ladite structure en couches comprenant :

- une première couche conductrice comprenant un matériau conducteur transparent, ayant une épaisseur dans la plage de 30 à 250 nm,
- une première couche isolante comprenant un matériau isolant inorganique,
- une couche luminescente comprenant du sulfure de zinc, ayant une épaisseur dans la plage de 30 à 250 nm,
- une deuxième couche isolante comprenant un matériau isolant inorganique,
- une deuxième couche conductrice comprenant un matériau conducteur transparent, ayant une épaisseur dans la plage de 30 à 250 nm,
- une troisième couche isolante comprenant un matériau isolant inorganique, ayant un indice de réfraction plus faible que celui de la deuxième couche conductrice,

caractérisé en ce que chacune desdites première et deuxième couches conductrices comprend au moins un élément conducteur au niveau d'au moins une zone émissive et au moins un élément de couche passive au niveau d'au moins une zone non émissive, moyennant quoi il y a un matériau conducteur présent dans les couches conductrices à la fois dans au moins une zone émissive et dans au moins une zone non émissive, le matériau conducteur dans la dernière zone étant l'élément de couche passive.

2. Élément d'affichage selon la revendication 1, dans lequel la somme des zones émissives couvertes par les éléments conducteurs et des zones non émissives couvertes par les éléments de couche passive est > 80 % de la zone d'affichage.

3. Élément d'affichage selon la revendication 1 ou 2, dont la transmission photopique est > 78 %.
 4. Élément d'affichage selon l'une quelconque des revendications 1 à 3, dans lequel le matériau conducteur transparent comprend de l'oxyde d'étain-indium.
 5. Élément d'affichage selon l'une quelconque des revendications 1 à 4, dans lequel les première et deuxième couches isolantes comprennent au moins un élément parmi l'oxyde d'aluminium, l'oxyde de titane, et des combinaisons et des mélanges de ceux-ci.
 6. Élément d'affichage selon l'une quelconque des revendications 1 à 5, dans lequel la troisième couche isolante comprend de l'oxyde d'aluminium.
 7. Élément d'affichage selon l'une quelconque des revendications 1 à 6, dans lequel la couche luminescente comprend du sulfure de zinc dopé au manganèse ZnS:Mn.
 8. Élément d'affichage selon l'une quelconque des revendications 1 à 7, dans lequel la couche luminescente comprend du sulfure de zinc dopé au terbium ZnS:Tb.
 9. Élément d'affichage selon l'une quelconque des revendications 1 à 8, comprenant un panneau en verre optiquement lié à la troisième couche isolante.
 10. Élément d'affichage selon l'une quelconque des revendications 1 à 9, dans lequel au moins une partie des couches conductrices forme une matrice d'électrodes se croisant.
 11. Élément d'affichage selon l'une quelconque des revendications 1 à 10, dans lequel au moins une partie des couches conductrices est formée de manière à fournir des segments, des icônes ou des symboles émissifs à des endroits prédéterminés de la zone d'affichage.
 12. Élément d'affichage selon l'une quelconque des revendications 1 à 11, dans lequel au moins une zone luminescente est disposée dans la zone d'affichage pour l'éclairage de la zone située derrière l'affichage.
 13. Procédé de fabrication d'un élément d'affichage électroluminescent en couches minces transparentes inorganiques doté d'une zone d'affichage ayant au moins une zone émissive et au moins une zone non émissive, ledit procédé comprenant les étapes consistant à :
 - fournir un substrat,
 - préparer une première couche conductrice comprenant un matériau conducteur transparent, ayant une épaisseur dans la plage de 30 à 250 nm,
 - déposer par dépôt de couches atomiques une première couche isolante comprenant un matériau isolant inorganique,
 - déposer par dépôt de couches atomiques une couche luminescente comprenant du sulfure de zinc, ayant une épaisseur dans la plage de 30 à 250 nm,
 - déposer par dépôt de couches atomiques une deuxième couche isolante comprenant un matériau isolant inorganique,
 - préparer une deuxième couche conductrice comprenant un matériau conducteur transparent, ayant une épaisseur dans la plage de 30 à 250 nm, et
 - préparer une troisième couche isolante comprenant un matériau isolant inorganique, ayant un indice de réfraction plus faible que celui de la deuxième couche conductrice,
- caractérisé en ce que** chacune desdites première et deuxième couches conductrices est préparée de manière à comprendre au moins un élément conducteur au niveau d'au moins une zone émissive et au moins un élément de couche passive au niveau d'au moins une zone non émissive, moyennant quoi il y a un matériau conducteur présent dans les couches conductrices à la fois dans au moins une zone émissive et dans au moins une zone non émissive, le matériau conducteur dans la dernière zone étant l'élément de couche passive.

Fig. 1 A

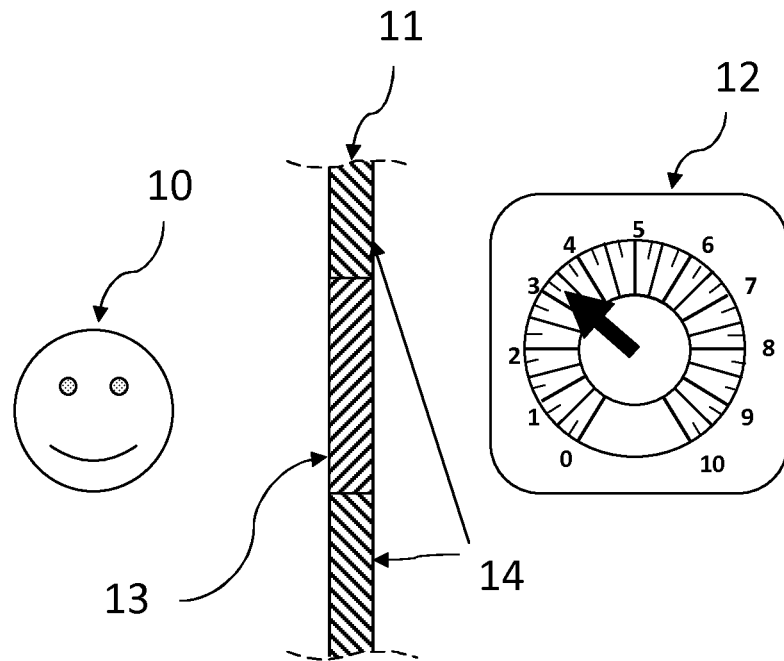


Fig. 1 B

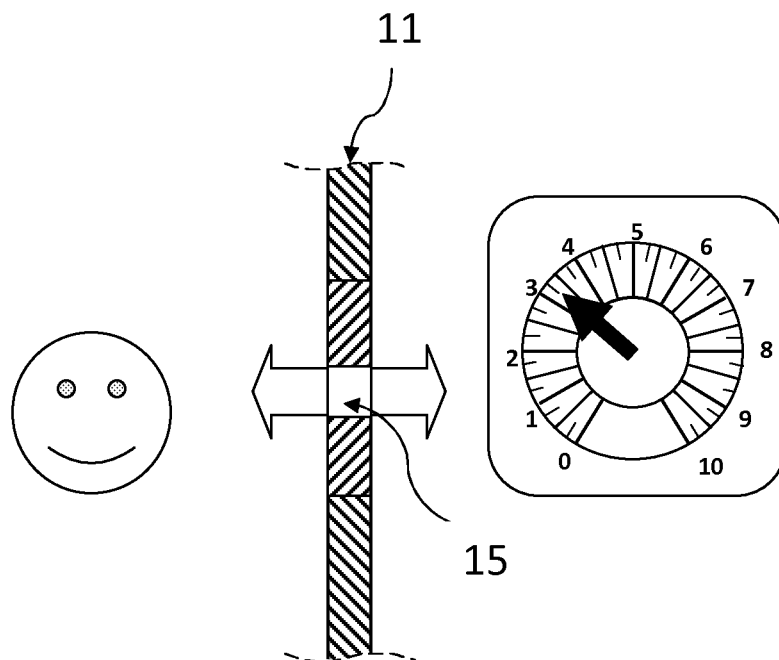


Fig. 1 C

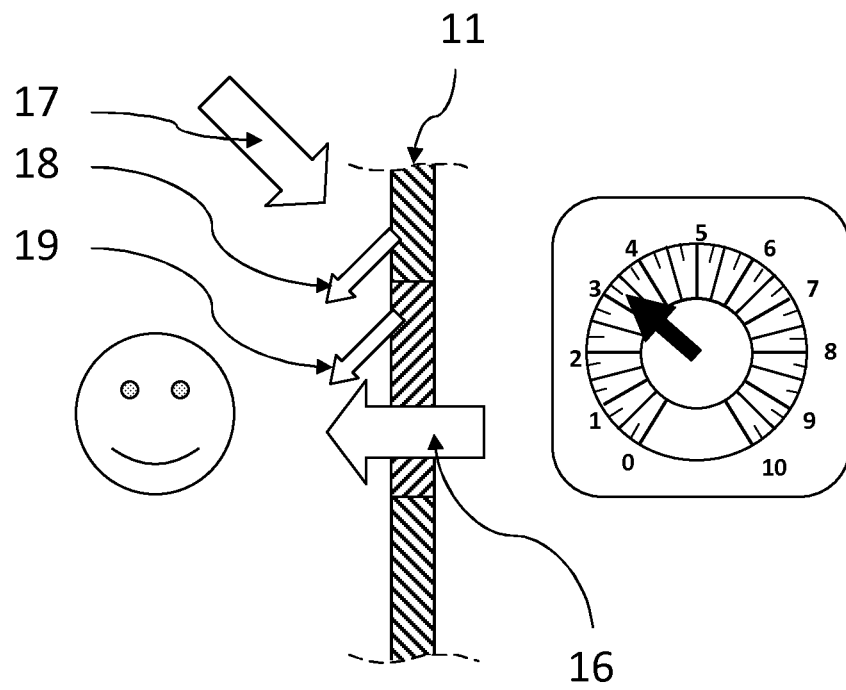


Fig. 2

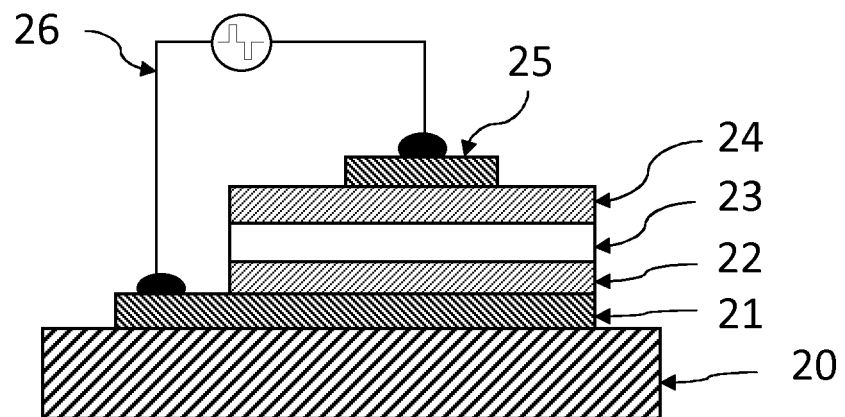


Fig. 3 A

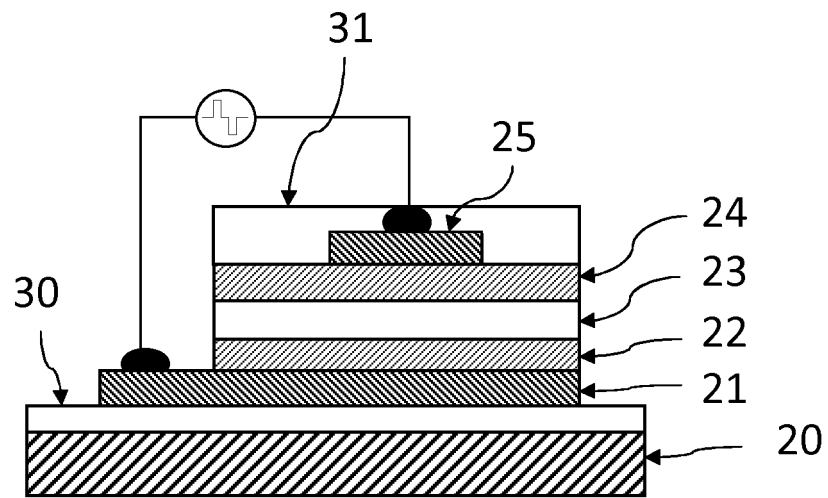


Fig. 3 B

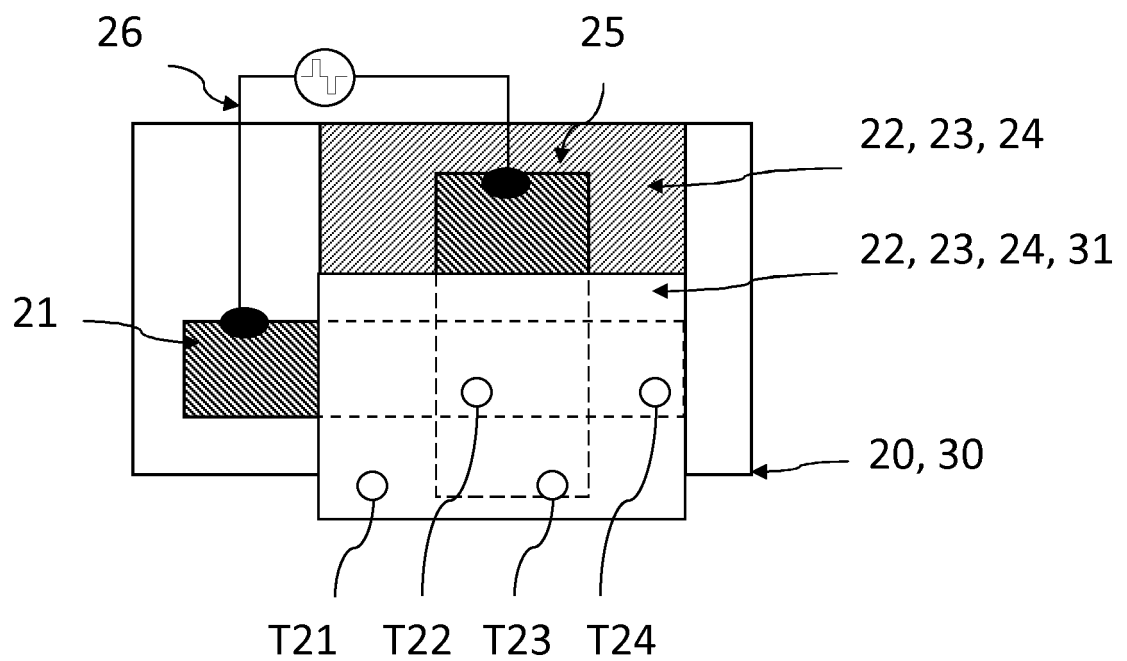


Fig. 4

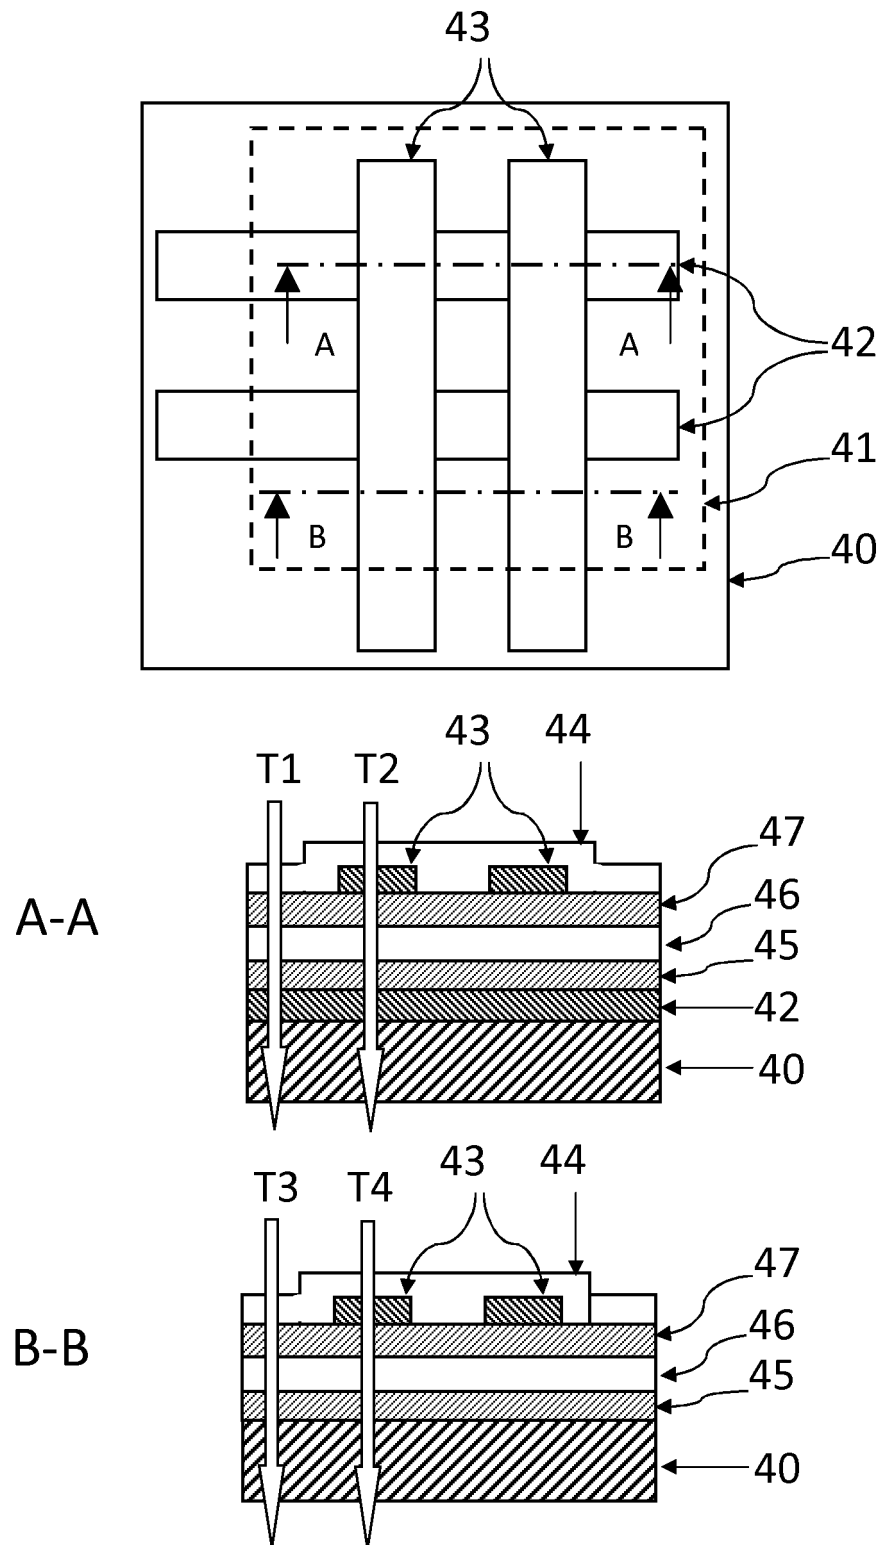


Fig. 5

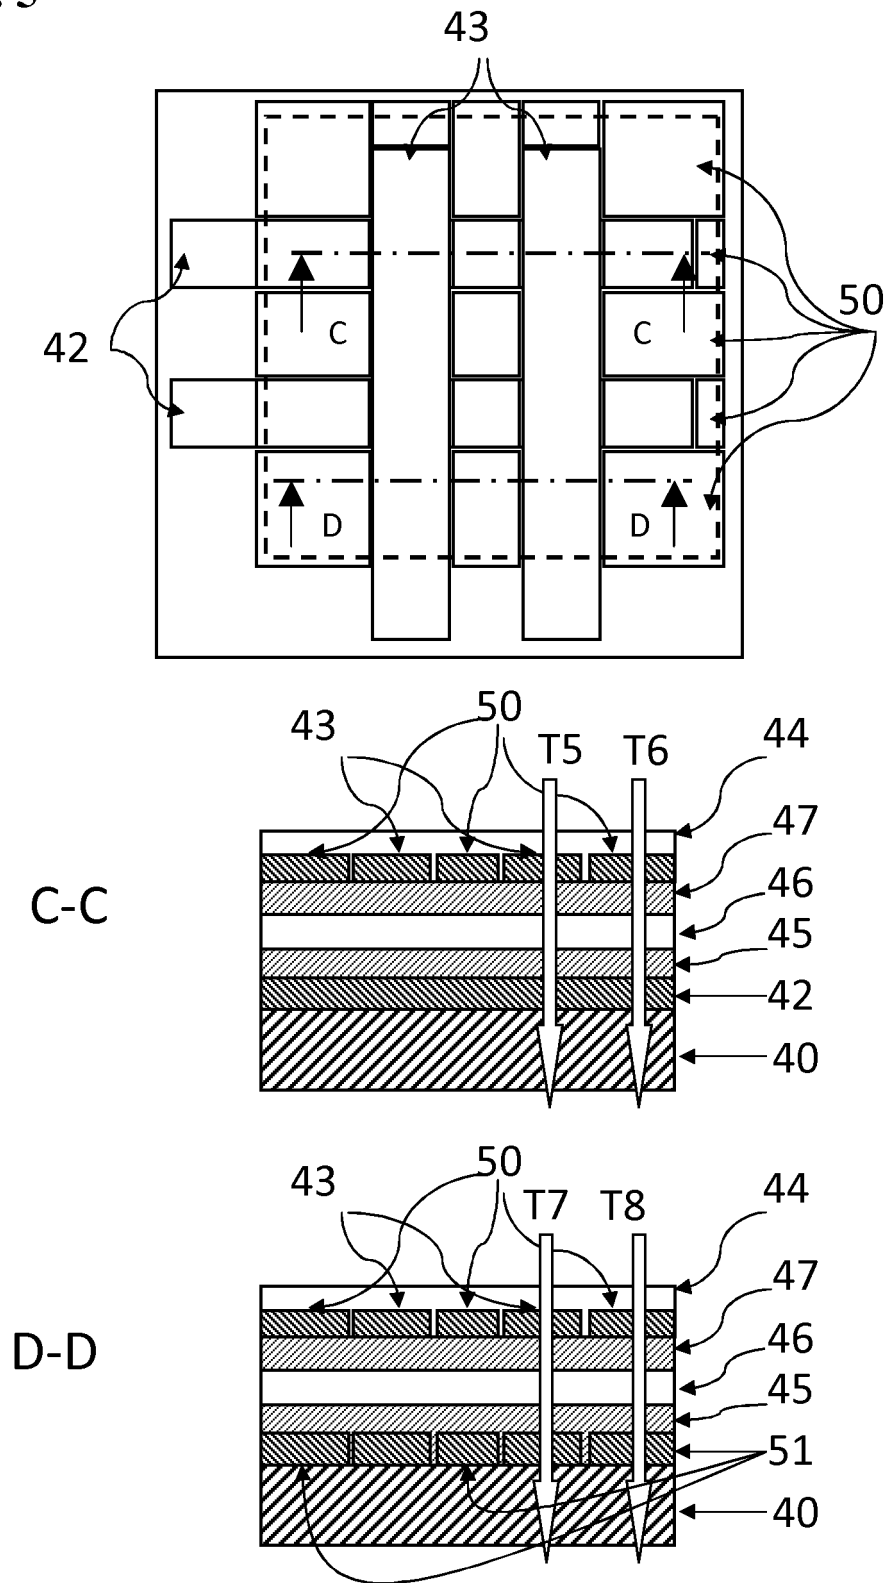


Fig. 6

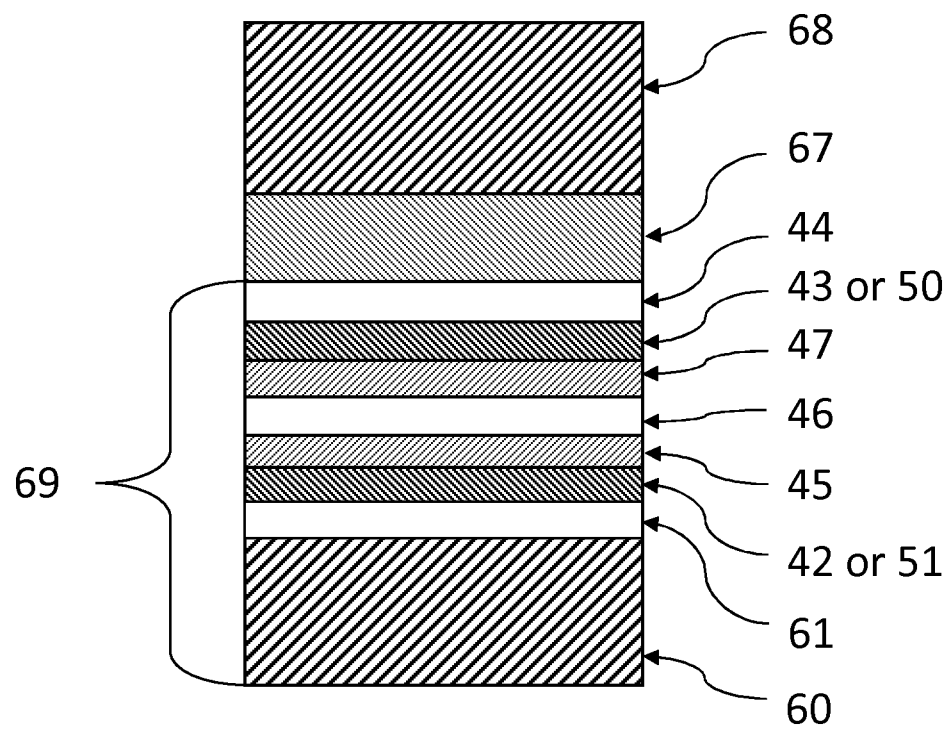


Fig. 7

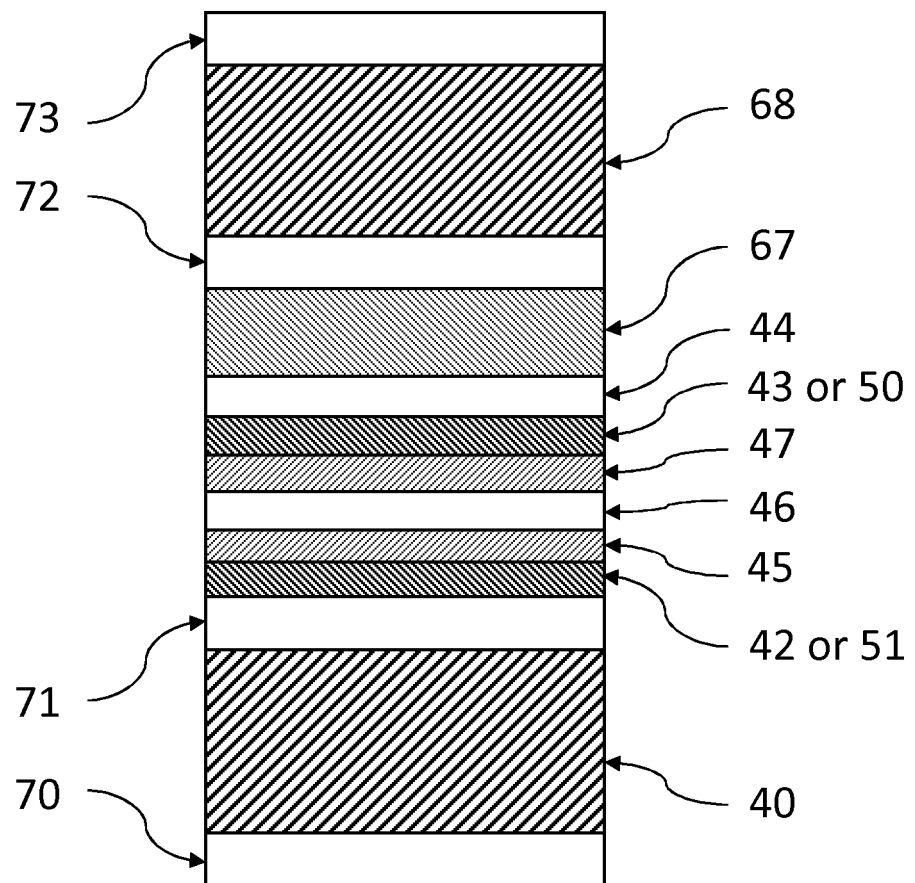


Fig. 8A

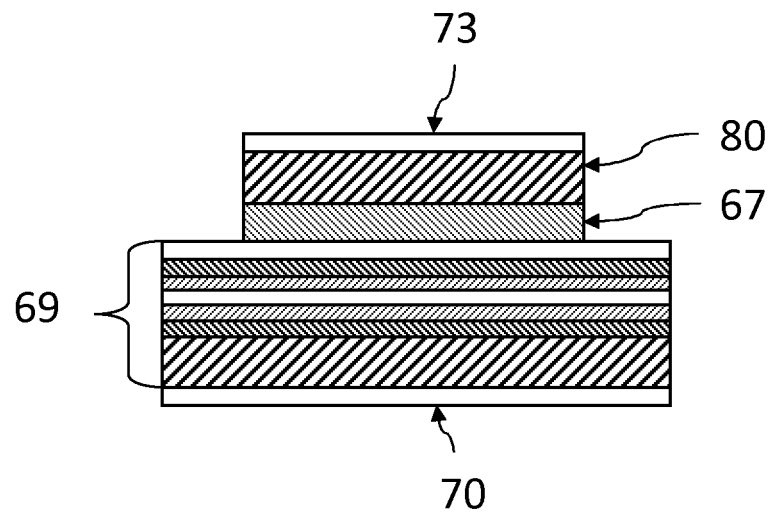


Fig. 8B

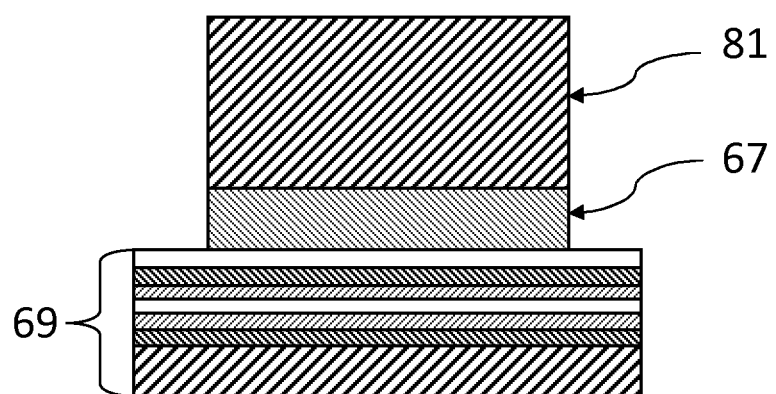


Fig. 8C

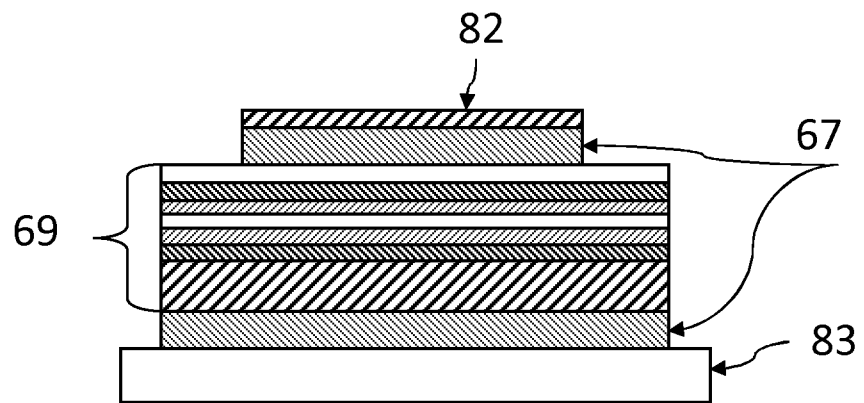


Fig. 8D

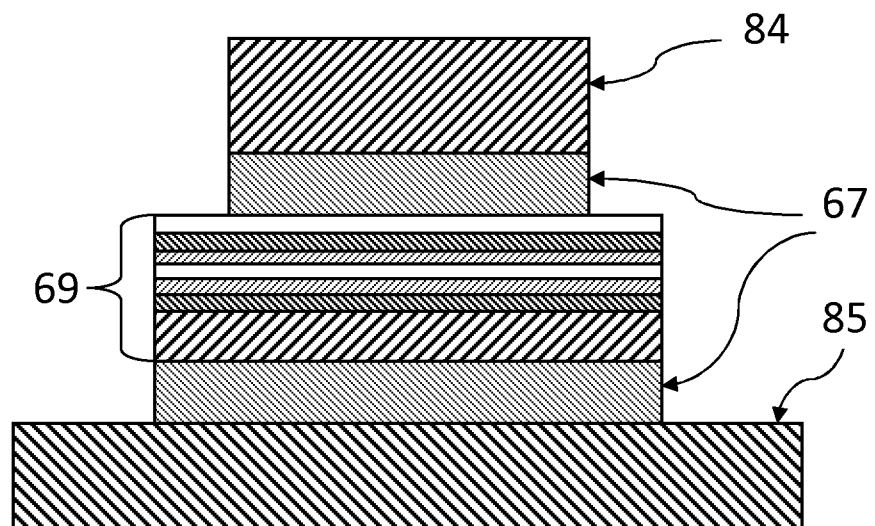


Fig. 8E

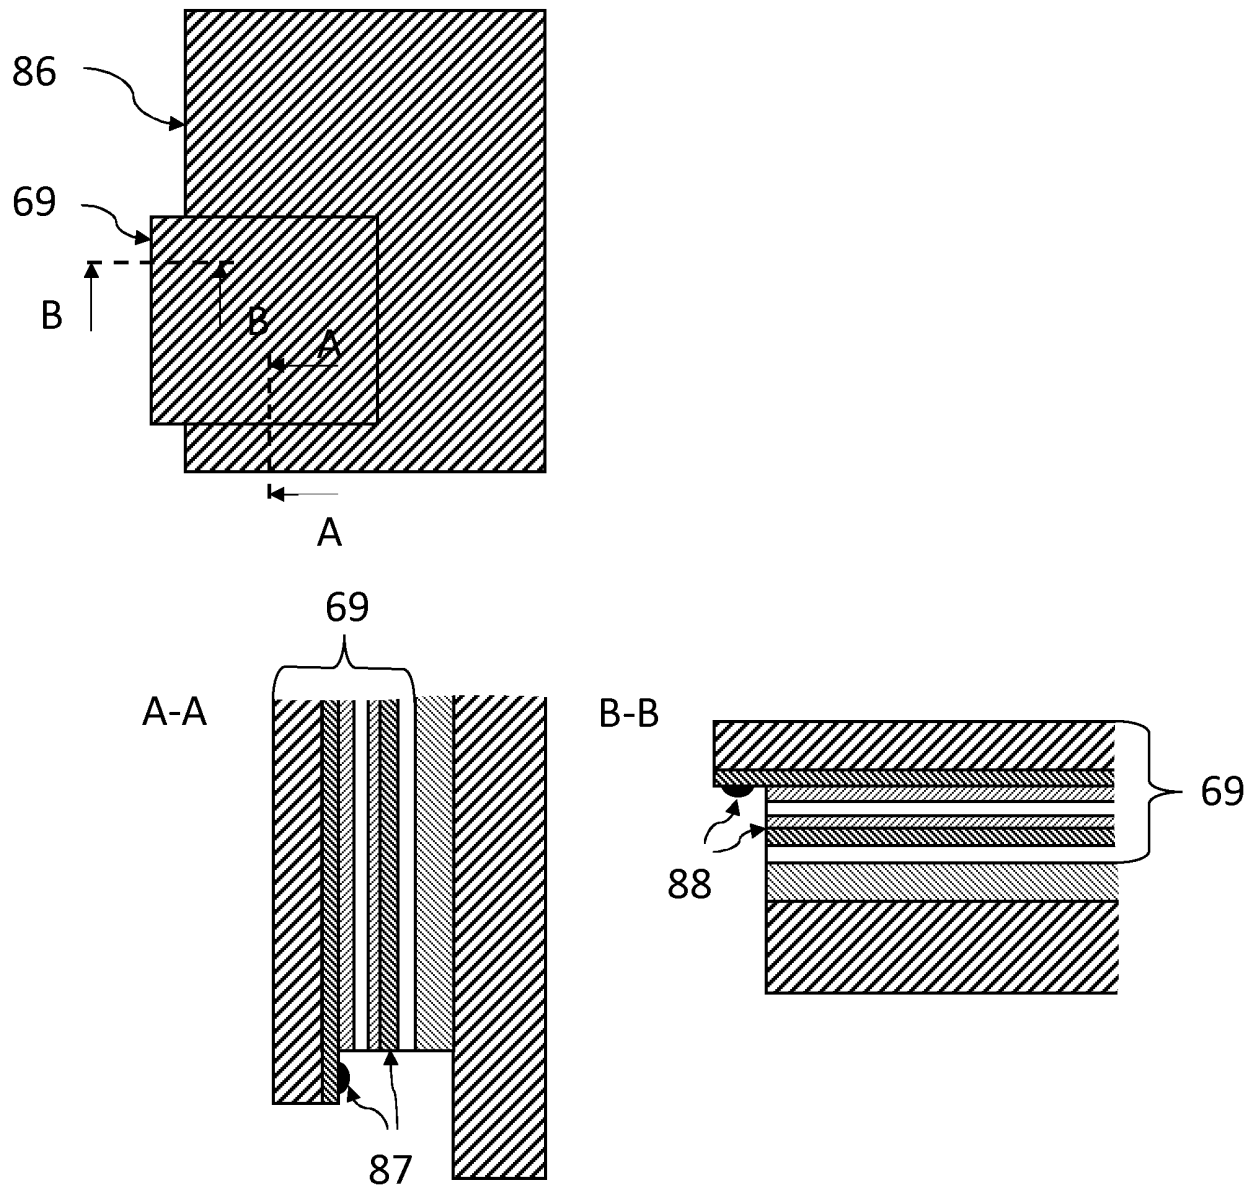


Fig. 9A

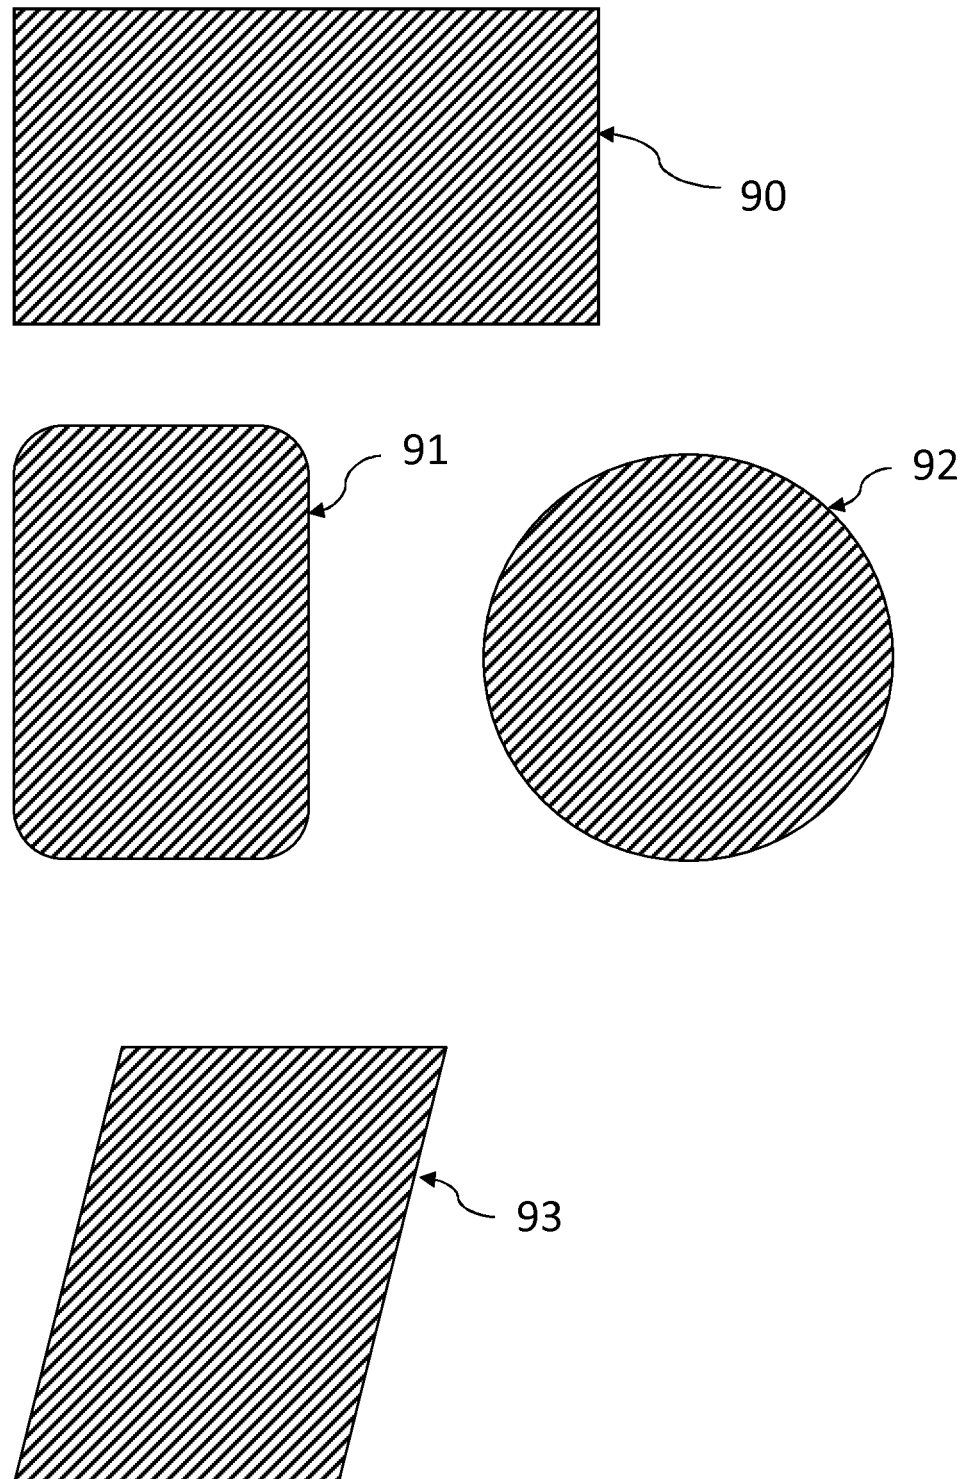


Fig. 9B

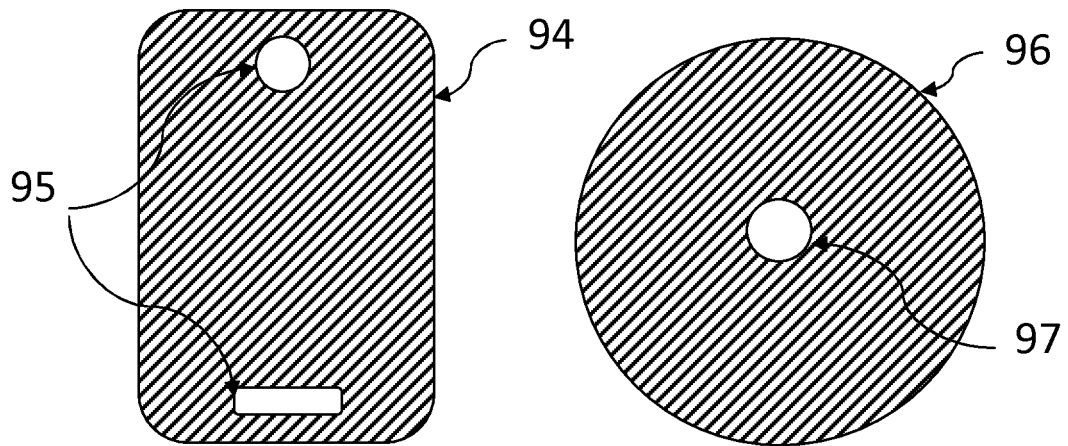


Fig. 9C


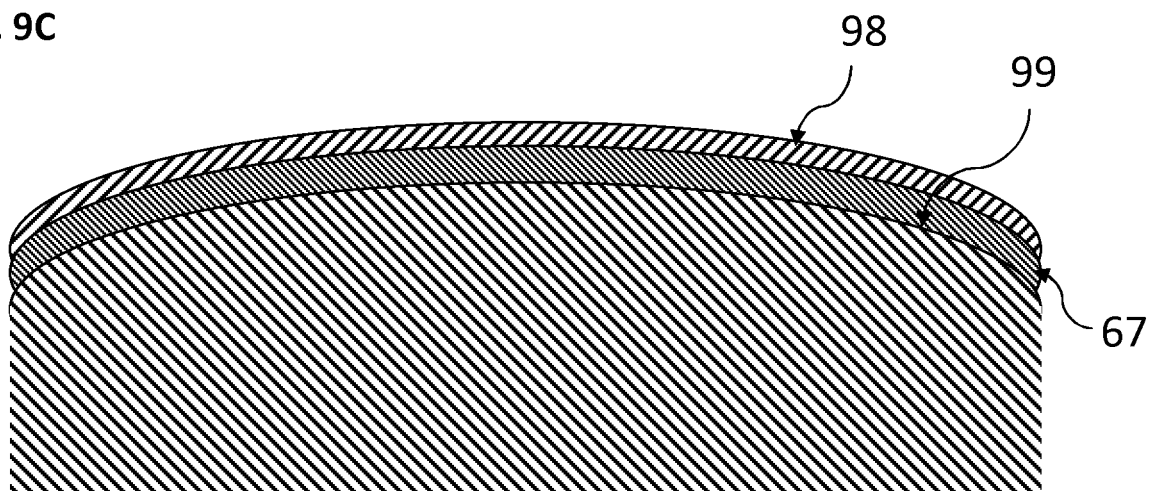


Fig. 10

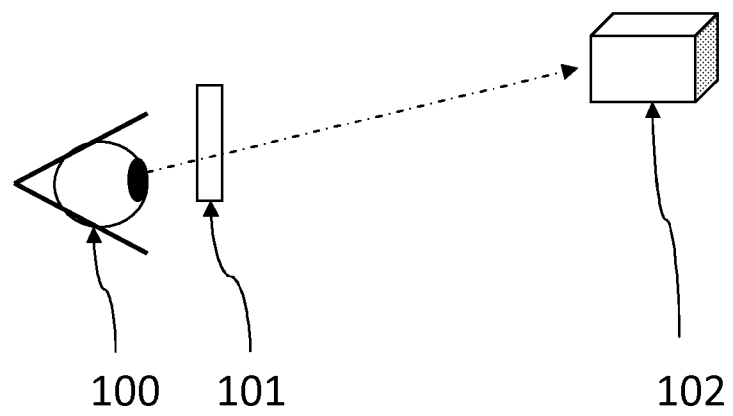

专利名称(译)	透明无机薄膜电致发光显示元件及其制造方法		
公开(公告)号	EP2865241B1	公开(公告)日	2017-08-09
申请号	EP2013816770	申请日	2013-06-20
[标]申请(专利权)人(译)	本尼克公司		
申请(专利权)人(译)	倍耐克公司OY		
当前申请(专利权)人(译)	倍耐克公司OY		
[标]发明人	HARKONEN KARI		
发明人	HÄRKÖNEN, KARI		
IPC分类号	H05B33/10 H05B33/12 H05B33/08		
CPC分类号	H05B33/10 H05B33/12 H05B45/60 H05B33/14 H05B33/145 H05B33/28		
优先权	2012005695 2012-06-21 FI		
其他公开文献	EP2865241A4 EP2865241A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种无机透明薄膜电致发光显示元件及其制备方法，所述显示区域具有至少一个发光区域和至少一个非发光区域，在透明度和不显眼性方面得到改善。根据本发明的结构包括基板（40），第一导电层（42），第一绝缘层（45），发光层（46），第二绝缘层（47），第二导电层（43）和包括绝缘无机材料的第三绝缘层（44）。通过在非发光区域处提供无源膜元件（50），即当导电电极连接到电源以产生所需的导电电极时，也通过这些区域提供导体材料，使显示器的发光和非发光区域在光学上相似。电压沉积在发光区域。

Fig. 1 A

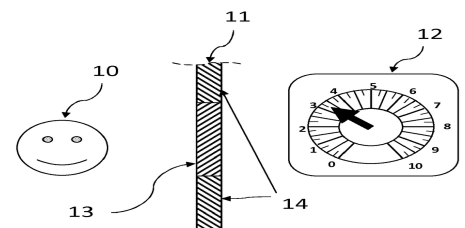


Fig. 1 B

