



- (51) International Patent Classification:
G09G 3/32 (2006.01)
- (21) International Application Number:
PCT/US2014/053097
- (22) International Filing Date:
28 August 2014 (28.08.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/872,016 30 August 2013 (30.08.2013) US
14/469,273 26 August 2014 (26.08.2014) US
- (71) Applicant: L-3 COMMUNICATIONS CORPORATION [US/US]; 600 Third Avenue, New York, NY 10016 (US).
- (72) Inventor: TRIPATHI, Sanjay; 16202 Dapple Gray Place, San Diego, CA 92127 (US).
- (74) Agents: CHRISTENSON, Christopher R. et al.; Kelly, Holt & Christenson PLLC, 113 West Main Street, Waconia, MN 55387 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: NIGHT VISION COMPATIBLE DISPLAY

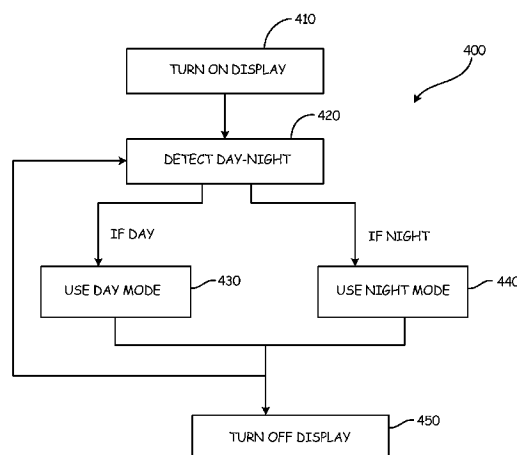


Fig. 4

(57) Abstract: An aspect of the disclosure relates to an OLED display (30) compatible for operation in both a day mode and a night mode and methods of operating such a display (30). In one embodiment, a display 30 comprises a screen (120), a plurality of sub-pixels including red (122), green (124), blue (126) and night-vision (128) pixels. The display (30) also comprises an arrangement scheme for the sub-pixels.

NIGHT VISION COMPATIBLE DISPLAY

BACKGROUND

[0001] OLEDs are light-emitting diodes (LED) that emit with an emissive electro-luminescent layer composed of a film comprising an organic compound. The organic compound emits light in response to an electro-current stimuli running across the film. OLEDs can be made from small molecules or polymer sources. One of the advantages of an OLED display over other display formats is that OLED displays produce a lighted display without the need for a backlight. This allows for the production of deeper black levels of luminance on a thinner and lighter display screen than a corresponding liquid crystal display (LCD) screen. These deeper black levels allow for a higher contrast ratio on an OLED screen than a corresponding LCD screen in low ambient light conditions.

[0002] An OLED display 30 is shown in FIG. 1. An exemplary OLED display 30 consists of several parts including, a substrate 10, an anode 12, a plurality of organic layers 14, at least one conducting layer 16, at least one emissive layer 18, and a cathode 20. The substrate 10 may be plastic or glass that supports the other layers. The anode 12 removes electrons when a current is run through the device, whereas the cathode 20 injects electrons into the OLED display 30 when a current flows through the device. The organic layers 14 may be made of organic molecules or polymers depending on the type of OLED and are frequently deposited by vacuum deposition or vacuum thermalization or organic vapor phase deposition. However, inkjet printing can be used for depositing OLEDs onto the substrate 10. In a typical OLED, such as OLED display 30 the cathode 20 is stacked on top of the emissive layer 18 which is stacked on top of the conductive layer 16 which is stacked on top of the anode 12 which is stacked on top of the substrate 10.

[0003] The benefits of OLED displays over LCD displays are known. OLED displays are lighter weight than their LCD counterparts, can provide greater flexibility in the display, can have a wider viewing angle and a faster response time than corresponding LCD displays. Additionally, as described above, OLED displays are preferred in low-light conditions as OLED displays have a higher contrast ratio than their corresponding LCD displays. Additionally, OLEDs do not require a backlight which provides the thinner and lighter display than a corresponding LCD. At its most basic, an OLED display comprises a single organic layer between the anode and cathode. However, an OLED display having multiple layers of organic material is another possibility.

Further, one of the most common OLED display configurations is a bilayer OLED comprising a conductive and emissive layer as described above.

[0004] OLED displays can be created using small molecules or polymers. Additionally, they can be created using a passive matrix (PMOLED) or an active matrix (AMOLED) addressing scheme. Small molecule based OLEDs are frequently created using vacuum deposition whereas polymer LEDs are frequently created using spin coating or ink jet printing. Additionally, while OLEDs have been described with the cathode on top of the stacking structure, inverted OLEDs, which provide the anode on the top of the stacking structure, are also known.

[0005] Transparent OLEDs are also known. Transparent OLEDs comprise transparent or semi-transparent contacts on both sides of an OLED device. These transparent or semi-transparent contacts allow displays to be made to be either top or bottom emitting. Top emitting OLEDs can have greatly improved contrast making it easier to view displays in direct sunlight.

SUMMARY

[0006] An aspect of the disclosure relates to an OLED display compatible for operation in both a day mode and a night mode and methods of operating such a display. In one embodiment, a display comprises a screen, a plurality of sub-pixels including red, green, blue and night-vision pixels. In one example, the night vision pixel is red-orange. The display also comprises an arrangement scheme for the sub-pixels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is an exploded view of an OLED with which embodiments of the present invention are useful.

[0008] FIG. 2 is a diagrammatic view of a computing device with a display with which embodiments of the present invention are useful.

[0009] FIGS. 3A and 3B illustrate an exemplary daylight operating mode of an OLED display in accordance with one embodiment.

[0010] FIGS. 3C and 3D illustrate an exemplary night operating mode of an OLED display in accordance with one embodiment.

[0011] FIG. 4 illustrates an exemplary method of a day to night transition in accordance with one embodiment.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0012] While embodiments of the present invention will be described using a pixel architecture that places sub-pixels next to each other, it is also known that similar architectures can be created using stacked OLEDs wherein the sub-pixels are stacked on top of each other leading to increases in gamut and color depth and reducing pixel gap.

[0013] LCD displays are known in night vision technology as a possible technology choice for a night vision display. In an LCD display, in order to meet night vision requirements, the backlight of the LCD is filtered before it allows light to be transmitted to the screen of the display. In order to preserve a color gamut under daylight conditions, the LCD can also use two different backlights, one for daylight conditions and one for night conditions. Thus, the transition of an LCD display between a day mode and a night mode is dependent on alterations to the backlight, either through a filter or substituting the backlight altogether. This conventional approach with LCDs is not compatible with OLEDs because OLEDs produce the color viewed on an OLED display without a backlight, therefore neither the filtering approach nor the substitution approach will work on an OLED display.

[0014] One way to achieve night vision compatibility with an OLED display would be to cover the entire display with Night Vision (NVIS) filter glass. However, this is not desirable as NVIS filter glass has a low transmission, poor color gamut in daylight mode and is expensive. An alternative solution would be to create new pixel arrangement for an OLED display to make the OLED display compatible with night vision devices without sacrificing colors when the night vision functionality of the device is not necessary.

[0015] While the pixel arrangement solution presented below is presented in the context of OLED displays, it is to be understood that this pixel arrangement could also be implemented on an LCD display or any other appropriate display that relies on the arrangement of subpixels. For example, while embodiments of the present invention are described with respect to an OLED display, these embodiments could also be implemented on electroluminescent mode quantum dots or micro-LEDs (micro light emitting diodes) or any other emissive display technology where individual subpixel can be tuned to a particular color or wavelength. Additionally, while the subpixel arrangement is described in the context of day and night modes of an night-vision

compatible display, the subpixel arrangement could also be implemented in displays for other purposes as well.

[0016] FIG. 2 is a diagrammatic view of a computing device with a display with which embodiments of the present invention are useful. FIG. 2 shows a schematic of an exemplary computing device with an OLED display that may be configured to be compatible with night vision requirements. In one example, the computing device 100 includes a processor 102, a memory 104, an output component 108, a power source 112, and a display 110.

[0017] The power source 112, in one embodiment, powers both the processor 102 and the display 110. However, in another embodiment, the display 110 could also have an independent power source from the computing device 100. In one embodiment, both the computing device 100 and the display 110 rely on a contained power source 112, such that the computing device 100 does not need to be connected to an external power supply, allowing for ease of movement and installation of the computing device 100 with display 110.

[0018] The display 110 comprises an OLED screen 120 in one embodiment. The display 110 may also comprise a filter 114, and may comprise a screen cover 116. In one embodiment, the screen cover 116 is a glass cover, however, in another embodiment, the screen cover 116 could also be composed of a transparent or semi-transparent plastic. The OLED screen 120 is comprised of a plurality of pixels wherein those pixels include subpixels of the following four colors: red 122, green 124, blue 126, and night-vision 128. Depending on the selection of a daylight mode or a night mode, not all of these sub-pixels will be used to generate a color of the display 110. In one embodiment, only three of the four sub-pixels are used in any given mode. In one embodiment, the subpixels are arranged in a regular, repeating configuration across the OLED screen.

[0019] As shown in FIGS. 3A-3D, a quad-pixel arrangement of the red 122, green 124, blue 126, and night-vision 128 sub-pixels are used in an exemplary OLED screen 120. However, in another embodiment, the quad-pixel arrangement could be implemented on an LCD screen or LED screen. Further, the pixels could be implemented as micro-LEDs in an additional embodiment. In a further embodiment, the quad-pixel arrangement could be composed of sub-pixels comprising quantum dots in an electroluminescent mode. In a further embodiment, the quad-pixel arrangement could be composed of sub-pixels comprising screen with tunable subpixels in an electroluminescent mode. This quad-pixel arrangement implemented on an exemplary OLED screen allows for a distinction between daylight and night time mode without the need for an

additional night vision filter. Several different arrangements of the four pixels are possible, but two possibilities are shown in FIGS. 3A-3D. A 1x4 structure is shown, where the four subpixels are arranged and repeated linearly. A 2x2 structure is also shown, where the four subpixels are arranged in a 2x2 square that repeats linearly. While the subpixels red 122, green 124, blue 126 and night-vision 128 are shown in a particular order and arrangement in FIGS. 3A-3D, it is to be understood that the order of the four colors within either the 1x4 or the 2x2 arrangement could be different, with any permutation of the ordering as a possibility.

[0020] Organic material appropriate for the creation of the red 122, green 124 and blue 126 subpixels are known as these three colors are often used in tri-color and quad-color subpixel arrangements in LCD and OLED screens. The organic material comprising the night-vision pixel should be selected such that there are no significant emissions in the infrared (IR) range that can be detected by a night vision device. One example of an appropriate night-vision pixel selection would be a red-orange subpixel. The two exemplary quad-pixel arrangements are shown in FIGS. 3A and 3B as well as FIGS. 3C and 3D exemplifying the day and night modes with either the 1x4 or the 2x2 arrangements.

[0021] As shown in FIGS. 3A and 3B, in the daylight mode, pixels comprising the colors of red 122, green 124 and blue 126 are used to provide color to the OLED display. In the daylight mode, the night-vision 128 sub-pixel is not necessary and thus may not be used to produce color on the display in one embodiment. In contrast, in a night time mode, the green 124, blue 126 and night-vision 128 sub-pixels are used to produce light and the red sub-pixels 122 are not used. FIGS. 3A-3D only show illustratively either two lines or two squares of pixels. However, it is envisioned that these patterns would repeat vertically and horizontally across the entirety of an OLED screen 120, in one embodiment.

[0022] FIG. 4 illustrates a method 400 wherein a single display can be used for both day mode and night mode, as exemplified in FIGS. 2A-2D, with either the red 122 activated for day mode or the night-vision 128 activated for night mode. At block 410, the display is turned on wherein power from the power supply 112 is provided to display 110. At block 420, in one embodiment, the display automatically detects a need for day or night mode, for example by measuring ambient light delivered to the display. However, in another embodiment, block 420 may comprise a user indicating to the display a selection of day or night mode.

[0023] Upon detecting that daylight mode is required, the device, as noted in block 430, will use the day mode, for example using the configuration of pixels shown in FIG. 3A or 3B wherein sub-pixels of colors red 122, green 124 and blue 126 are used to provide color to the display. Alternatively, if night mode is detected, as shown in block 440, the display will use the night mode configuration either shown in FIG. 3C or 3D to provide color to the display using green 124, blue 126 and night-vision 128 sub-pixels. Once the requisite mode has been either detected or selected by a user, the display may continue to use that mode until the display either detects by itself or a user initiates a need to detect a switch between a day or a night mode as indicated in FIG. 4 by the arrow that returns the method back to block 420. At the end of a particular use session of the display, the display may be turned off as indicated in block 450. In one embodiment, the display will periodically run a check for a day or night mode. For example, the display may be calibrated with an internal clock and check every minute for a need to switch. Alternatively, the display may contain a detector that detects ambient light conditions continuously and initiates a switch between day and night mode based on a minimum threshold for ambient light been met. However, in another embodiment, the display does not comprise a detector and relies on a user input to switch between day and night modes.

WHAT IS CLAIMED IS:

1. A display, comprising:
a screen including a matrix of pixels, each pixel being comprised of a plurality of sub-pixels;
wherein the plurality of sub-pixels, include at least a red sub-pixel, a green sub-pixel, a blue sub-pixel, and a night vision sub-pixel; and
wherein the night-vision sub-pixel is configured to have no significant emission in the infrared range.
2. The display of claim 1, wherein the night-vision sub-pixel has a red-orange color
3. The display of claim 1, wherein the plurality of sub-pixels are arranged linearly in a 1 x 4 row, and wherein the arrangement scheme comprises the 1 x 4 row repeating vertically and horizontally across the screen.
4. The display of claim 1, wherein the plurality of sub-pixels are arranged in a 2 x 2 block, and wherein the arrangement scheme comprises the 2 x 2 block repeating vertically and horizontally across the screen.
5. The display of claim 1, wherein the display is an Organic Light Emitting Diode (OLED) display.
6. The display of claim 1, wherein at least one of the four sub-pixels is inactive at any given time.
7. The display of claim 6, wherein the red sub-pixel is inactive in a night mode.
8. The display of claim 6, wherein the night vision sub-pixel is inactive in a day mode.
9. The display of claim 1, wherein the display is a quantum dot display.

10. The display of claim 1, wherein the display is a micro Light Emitting Diode display.
11. The display of claim 1, wherein the display is comprised of tunable subpixels.
12. A method for converting an OLED display between modes, the method comprising:
detecting a first ambient light level;
entering a first mode, based at least in part on the detected first ambient light level;
detecting a second ambient light level; and
transitioning from the first mode to a second mode based on the detected second ambient light level.
13. The method of claim 12, wherein the display further comprises a sensor and wherein detecting comprises detecting with the sensor.
14. The method of claim 13, wherein detecting comprises receiving a user input instructing the display to detect an ambient light level.
15. The method of claim 12, wherein detecting comprises receiving a user input indicating an ambient light level as either the first ambient light level or the second ambient light level.
16. The method of claim 12, wherein transitioning comprises turning off at least a first sub-pixel color and turning on at least a second sub-pixel color.
17. The method of claim 16, wherein the first sub-pixel color and the second sub-pixel color are red and red-orange respectively.
18. The method of claim 12, wherein the first mode and the second mode are a day mode and a night mode.

19. The method of claim 18, wherein, during the day mode, a red sub-pixel is active and a night-vision sub-pixel is inactive.
20. The method of claim 18, wherein, during the night mode, a night vision sub-pixel is active and a red sub-pixel is inactive.
21. An OLED display, the display comprising:
a substrate;
an anode;
a cathode;
at least one organic layer;
at least one conducting layer;
at least one emissive layer; and
four sub-pixel colors, consisting of red, green, blue and red-orange, wherein the green and blue pixels are active in both a day mode and a night mode, and wherein the red pixels are active only in a day mode, and wherein the red-orange pixels are only active in a night mode.
22. The method of claim 21, wherein the organic layer comprises small molecules.
23. The method of claim 21, wherein the organic layer comprises a polymer.

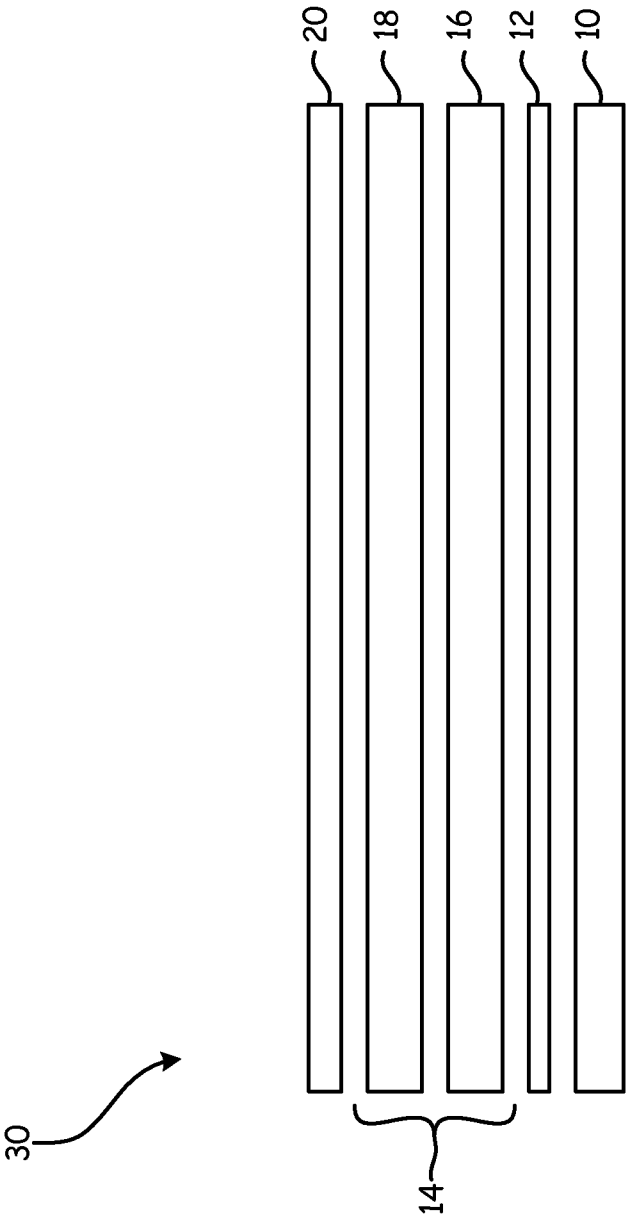


Fig. 1

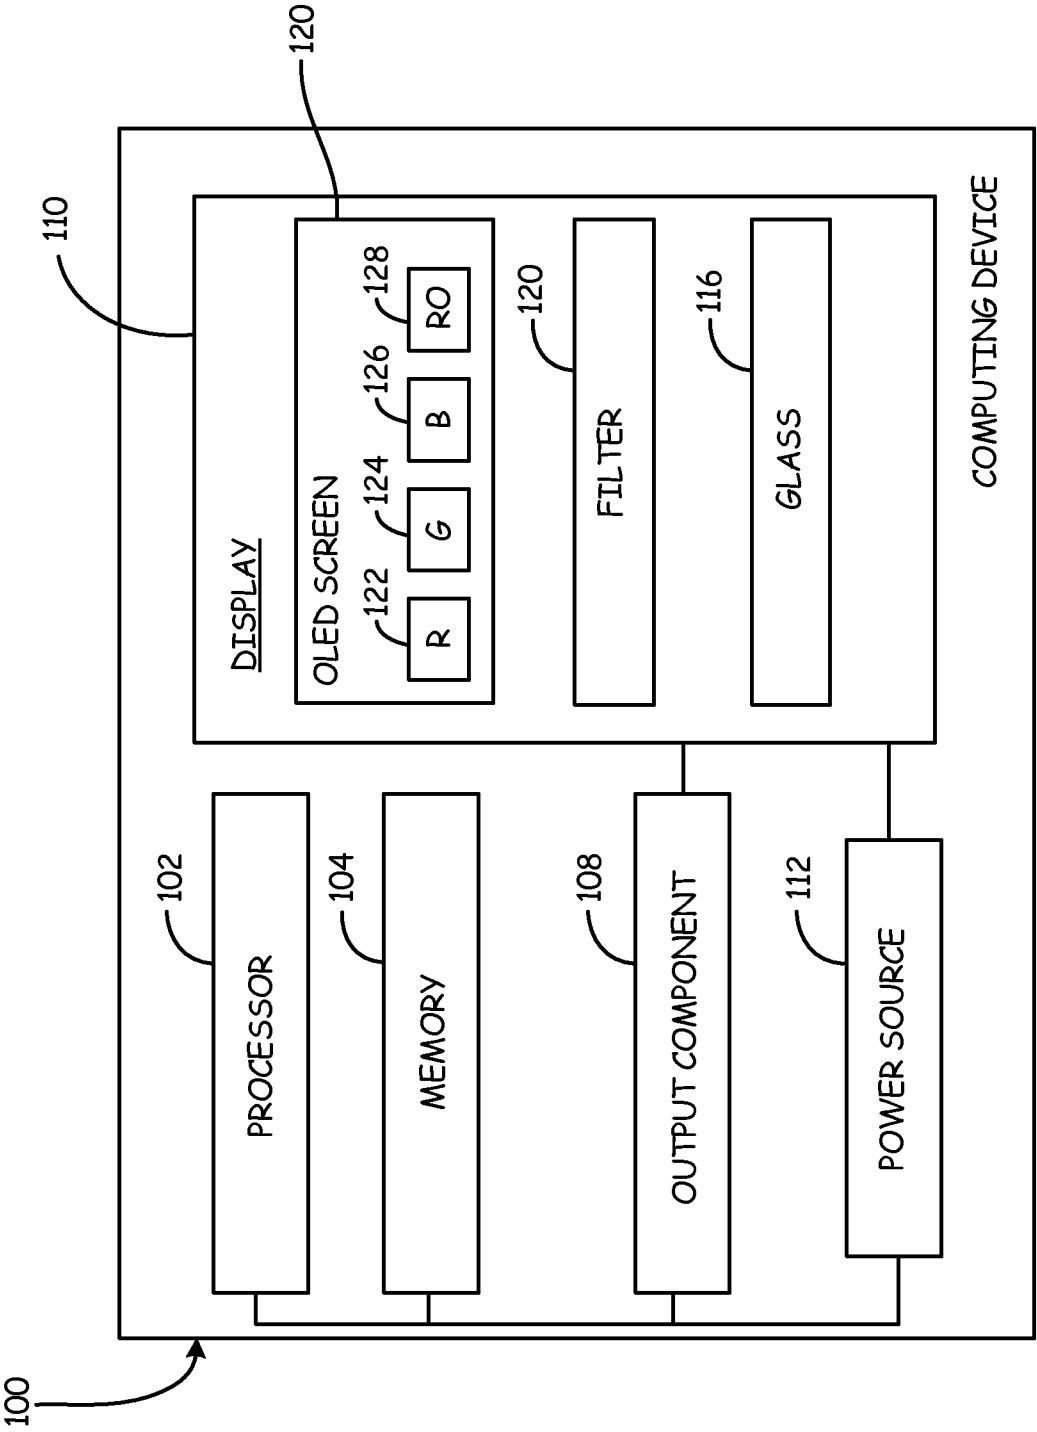


Fig. 2

DAYLIGHT 1

310

R	G	B	RO
R	G	B	RO

Fig. 3A

NIGHT

330

R	G	B	RO
R	G	B	RO

Fig. 3B

320

R	G	R	G
B	RO	B	RO

Fig. 3C

340

R	G	R	G
B	RO	B	RO

Fig. 3D

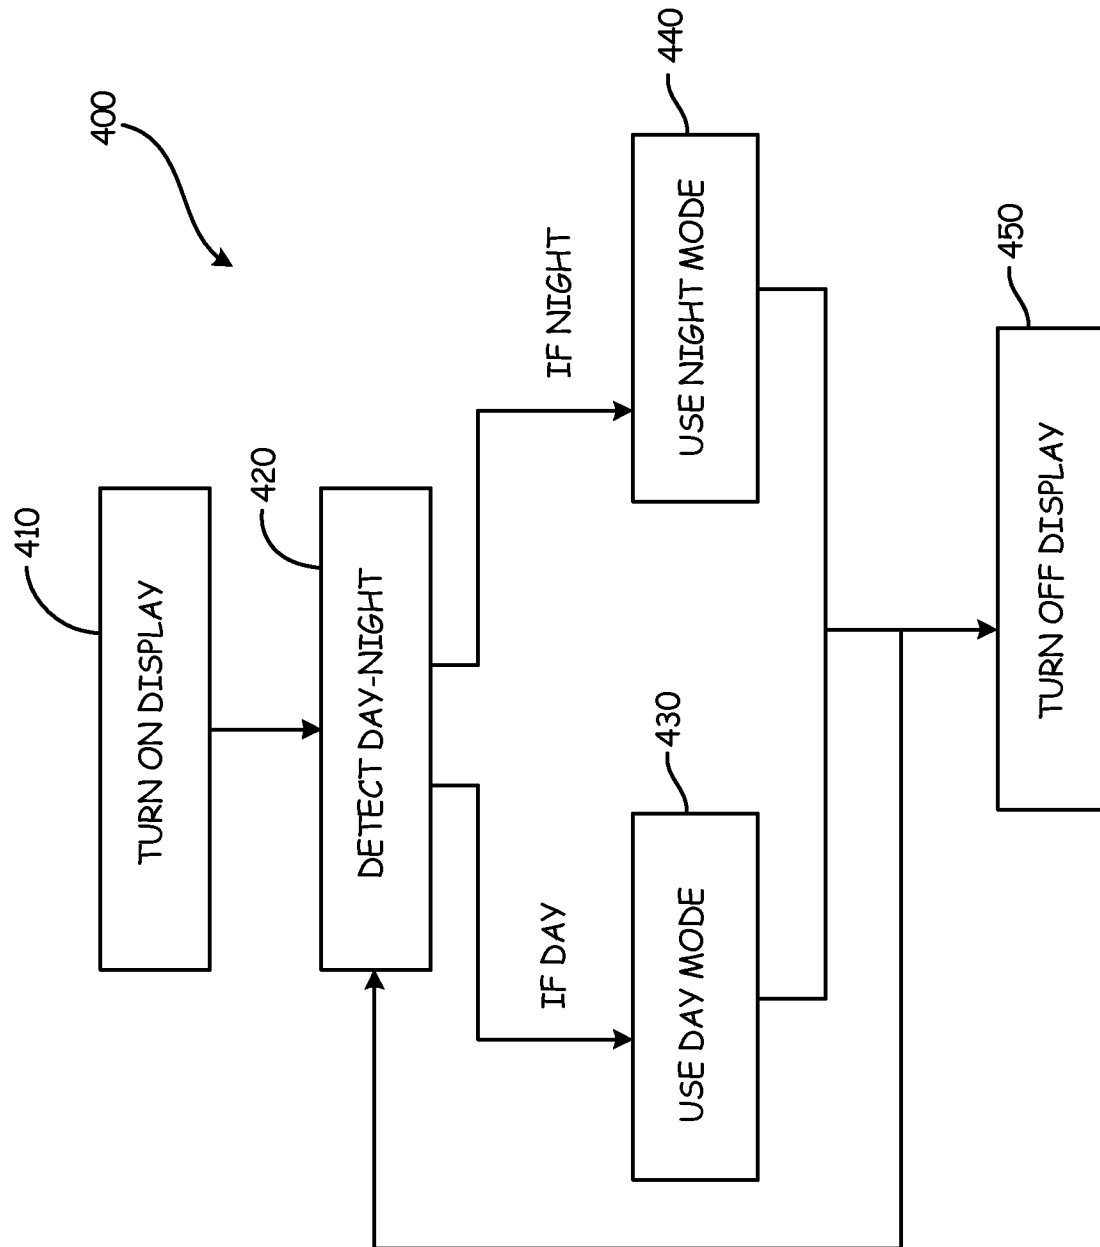


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/053097**A. CLASSIFICATION OF SUBJECT MATTER****G09G 3/32(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G09G 3/32; G02B 13/14; G09G 5/02; H05B 37/02; H05B 41/38; G09G 3/30; G09G 5/10; H01J 9/20

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: OLED, night, change, mode, red-orange sub-pixel, ambient light

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007-0018915 A1 (CHING W. TANG et al.) 25 January 2007 See paragraphs [0021]-[0028]; claim 1; and figure 5.	1-5, 9-11
Y		12-15, 18
A		6-8, 16-17, 19-23
Y	US 2011-0084990 A1 (CHEUNG-HWAN AN et al.) 14 April 2011 See paragraphs [0029]-[0031]; claims 1, 6, 11; and figure 1.	12-15, 18
A	US 2008-0316568 A1 (JONATHAN CHARLES GRIFFITHS et al.) 25 December 2008 See paragraphs [0073]-[0080]; claim 1; and figures 1-2, 11.	1-23
A	US 6570584 B1 (RONALD S. COK et al.) 27 May 2003 See column 3, lines 30-43; and figure 1.	1-23
A	US 2012-0319593 A1 (JWO-HUEI JOU) 20 December 2012 See paragraphs [0063]-[0064]; and claim 1.	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 November 2014 (26.11.2014)

Date of mailing of the international search report

02 December 2014 (02.12.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

AHN, Jeong Hwan

Telephone No. +82-42-481-8440



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/053097

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0018915 A1	25/01/2007	US 7532181 B2	12/05/2009
US 2011-0084990 A1	14/04/2011	CN 102034446 A	27/04/2011
		DE 102010036507 A1	14/04/2011
		DE 102010036507 B4	10/07/2014
		KR 10-1399304 B1	28/05/2014
		KR 10-2011-0038321 A	14/04/2011
US 2008-0316568 A1	25/12/2008	CN 101688973 A	31/03/2010
		EP 2006714 A1	24/12/2008
		JP 2010-533304 A	21/10/2010
		KR 10-2010-0049027 A	11/05/2010
		TW 200912501 A	16/03/2009
		US 7782517 B2	24/08/2010
		WO 2008-157558 A1	24/12/2008
US 6570584 B1	27/05/2003	None	
US 2012-0319593 A1	20/12/2012	TW 201251509 A	16/12/2012
		US 8643287 B2	04/02/2014

专利名称(译)	夜视兼容显示屏		
公开(公告)号	EP3039667A4	公开(公告)日	2017-02-22
申请号	EP2014841030	申请日	2014-08-28
申请(专利权)人(译)	L-3通信股份有限公司		
当前申请(专利权)人(译)	L-3通信股份有限公司		
[标]发明人	TRIPATHI SANJAY		
发明人	TRIPATHI, SANJAY		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3208 G09G2300/0452 G09G2320/0626 G09G2320/0666 G09G2360/144 G09G2380/12		
代理机构(译)	PARKER , 安杰		
优先权	14/469273 2014-08-26 US 61/872016 2013-08-30 US		
其他公开文献	EP3039667A1		
外部链接	Espacenet		

摘要(译)

本公开的一方面涉及兼容于在白天模式和夜间模式下操作的OLED显示器以及操作这种显示器的方法。 在一个实施例中，显示器包括屏幕，包括红色，绿色，蓝色和橘红色像素的多个子像素。 该显示器还包括用于子像素的布置方案。