



(11) **EP 1 469 535 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**06.06.2012 Bulletin 2012/23**

(51) Int Cl.:  
**H01L 51/50<sup>(2006.01)</sup>**

(21) Application number: **04090008.6**

(22) Date of filing: **13.01.2004**

(54) **Organic electroluminescent display device**

Organische elektrolumineszente Anzeigevorrichtung

Dispositif d'affichage électroluminescent organique

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **17.04.2003 KR 2003024424**

(43) Date of publication of application:  
**20.10.2004 Bulletin 2004/43**

(73) Proprietor: **Samsung Mobile Display Co., Ltd.**  
**Suwon-si**  
**Gyeonggi-do (KR)**

(72) Inventors:

- **Lee, Jun-Yeob,**  
**307-802 Cheongsol maeul Hanra Apt.,**  
**Seongnam-city, Gyeonggi-do (KR)**
- **Kwon, Jang-Hyuk,**  
**c/o Samsung SDI Co., Ltd.**  
**Yongin-si, Gyeonggi-do (KR)**
- **Choi, Yong-Joong,**  
**116-703, Monsok maeul Ssangyong**  
**Yongin-city, Gyeonggi-do (KR)**

(74) Representative: **Hengelhaupt, Jürgen et al**  
**Gulde Hengelhaupt Ziebig & Schneider**  
**Patentanwälte - Rechtsanwälte**  
**Wallstrasse 58/59**  
**10179 Berlin (DE)**

(56) References cited:  
**EP-A- 1 011 155 EP-A- 1 220 339**  
**EP-A- 1 285 957 EP-A- 1 469 534**

- **SCHMITZ CV ET AL: "Lithium-Quinolate Complexes as Emitter and Interface Materials in Organic Light-Emitting Diodes" CHEMISTRY OF MATERIALS, AMERICAN CHEMICAL SOCIETY, WASHINGTON, US, vol. 12, no. 10, 10 October 2000 (2000-10-10), pages 3012-3019, XP002466152 ISSN: 0897-4756**
- **KWONG RAYMOND C ET AL: "High operational stability of electrophosphorescent devices" APPLIED PHYSICS LETTERS, AIP, AMERICAN INSTITUTE OF PHYSICS, MELVILLE, NY, US, vol. 81, no. 1, 1 July 2002 (2002-07-01), pages 162-164, XP012031767 ISSN: 0003-6951**

**EP 1 469 535 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

CROSS-REFERENCE TO RELATED APPLICATION

5 **[0001]** This application claims the benefit of Korean Application No. 2003-24424, filed April 17, 2003, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 Field of the invention

**[0002]** The present invention relates to an organic electroluminescent display device, and, more particularly, to a display device that has a low driving voltage, superior life span characteristics, and is stabilized to the external environment due to an improved electron transport layer and electron injection layer.

15

Description of Related Art

**[0003]** Recently, the organic electroluminescent display device is being noticed as a next generation display device owing to various qualities such as its narrow thickness, wide viewing angle, light weight, small size, fast response time, and low power consumption compared with a cathode-ray tube (CRT) or liquid crystal device (LCD).

20

**[0004]** Particularly, an organic electroluminescent display device has a quality of being easily fabricated through a simple fabrication process, due to its simple structure of an anode, organic film layer, and a cathode. The organic film layer consists of various layers according to functions, and may generally comprise a hole injection layer, a hole transport layer, a luminescent layer, an electron transport layer, and an electron injection layer.

25

**[0005]** In FIG. 1, holes are injected from the anode 7, which is a transparent electrode, so that the injected holes are transferred to an emitting layer 4 through a hole injection layer 6 and a hole transport layer 5, and electrons are injected from a cathode 1 so that the injected electrons are transferred to the emitting layer 4 through an electron injection layer 2 and an electron transport layer 3. The transferred electrons and holes are bonded in the emitting layer to emit light.

30

**[0006]** There are methods for improving an electron transport layer and an electron injection layer in order to improve the driving voltage and life span of an organic electroluminescent display device. According to U.S. Patent No. 5,776,622, characteristics of a device were improved by depositing a dielectric material such as LiF, BaF<sub>2</sub> and CsF to a thickness of about 1 nm between an electron transport layer and a metallic electrode to improve driving voltage.

35

**[0007]** Kido, et al., of Japan announced results in which a driving voltage was reduced by using a layer in which a material in the alkaline metal series, such as Li, is doped on an organic electron transport layer adjacent to the cathode as an electron injection layer (SID 97, Digest, page 775).

40

**[0008]** The reduction of the driving voltage by the doping of an alkaline metal results from the fact that electrons are more smoothly injected by removing an electron injection barrier from the cathode. However, the material in the Li series has a problem in that it is sensitive to oxidization, and is diffused to a large extent. Furthermore, a finely controlled doping concentration is required, since the concentration of a doping metal has an influence on the characteristics of a device in the case of metal doping.

45

**[0009]** Disclosed in U.S. Patent No. 6,396,209 is a structure in which a mixed layer of an electron transporting organic compound and an organic metal complex compound is used as an electron injection layer, and a metal is deposited on the mixed layer to improve the characteristics of an organic electroluminescent display device. Using this electron transporting organic compound and the organic metal complex compound could reduce the driving voltage.

**[0010]** However, a structure of a new device for obtaining more stable device characteristics is required, since the methods discussed above have a high degree of difficulty in the depositing process, and also have a low device stability.

SUMMARY OF THE INVENTION

50 **[0011]** It is an aspect of the present invention to develop a structure of a device having a lower driving voltage by improving an electron transport layer and an electron injection layer when forming an organic electroluminescent display device.

**[0012]** It is another aspect of the present invention to improve a life span of the organic electroluminescent display device by improving an electron transport layer and an electron injection layer, thereby improving the stability of an organic electroluminescent display device.

55

**[0013]** It is another aspect of the present invention to improve the life span of the device by fabricating an organic electroluminescent display device that is stable to the external environment.

**[0014]** In order to achieve the foregoing and/or other aspects, the present invention provides an organic electrolumi-

nescent display device as described in claim 1 and subsequent dependent claims 2-12.

**[0015]** Additional aspects and advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

**[0016]** These and/or other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of the preferred embodiments, taken in conjunction with the accompanying drawings of which:

10 **[0017]** FIG. 1 is a drawing schematically illustrating the structure of an ordinary organic electroluminescent display device; and

**[0018]** FIG. 2 is a drawing schematically illustrating the structure of an organic electroluminescent display device according to an embodiment of the present invention.

## 15 DETAILED DESCRIPTION OF THE INVENTION

**[0019]** Reference will now be made in detail to the present preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

20 **[0020]** FIG. 1 is a drawing schematically illustrating the structure of an ordinary organic electroluminescent display device, and FIG. 2 is a drawing schematically illustrating the structure of an organic electroluminescent display device fabricated according to an embodiment of the present invention. The same marks are used for the same constituent elements hereinafter.

25 **[0021]** Referring to FIG. 2, an embodiment of the present invention comprises a first electrode 7 and a second electrode 1 formed on a substrate, and one or more organic film layers 10 positioned between the first electrode 7 and the second electrode 1. One or more emitting layers 4 are provided in the organic film layers 10, and a first organic film layer 8 is provided between the emitting layers 4 and the second electrode 1.

**[0022]** That is, the first organic film layer 8 is used in the present invention to improve the electron injection layer 2 found in the ordinary organic electroluminescent display device illustrated in FIG. 1.

30 **[0023]** Furthermore, an embodiment of the present invention further comprises a second organic film layer 9, between the emitting layers 4 and the first organic film layer 8, to further improve the transmission property of the electric charges.

**[0024]** The first organic film layer 8 of the present invention is formed using an organic metal complex compound. The organic metal complex compound includes 8-quinolinolato lithium, comprising one or more 8-quinolinolatos as a ligand, and derivatives thereof.

35 **[0025]** The first organic film layer is preferably formed to a thickness of 0.5 to 10 nm. That is, it is not desirable to form the first organic film layer to a thickness of more than 10 nm, because the driving voltage of the device increases. And it is not desirable to form the first organic film layer to a thickness of less than 0.5 nm, because electron injection from the electrode is limited.

40 **[0026]** The organic metal complex compound comprises one or more alkali metal ions, alkali earth metal ions, and rare earth metal ions.

**[0027]** Furthermore, an embodiment of the present invention further comprises a second organic film layer 9, which is a thin film formed through a solution process by mixing a material used as an existing electron transport layer 3 with an organic metal complex compound, or may be formed by co-depositing the electron transport layer material and the organic metal complex compound under a vacuum, so that the two materials are mixed. The organic metal complex compound comprises 8-quinolinolato lithium, comprising one or more 8-quinolinolatos as a ligand, and derivatives thereof, and comprises one or more alkali metal ions, alkali earth metal ions, and rare earth metal ions. The organic metal complex compound, having a concentration of 75 % or less of the existing electron transport layer, is contained in the second organic film layer 9.

45 **[0028]** The existing electron transport layer material is not limited to a particular material, and typical electron transport layer materials are selected from the group consisting of polycyclic hydrocarbon series derivatives, heterocyclic compounds, and derivatives thereof.

**[0029]** The first organic film layer 8 comprises an organic metal complex compound that is a thin film positioned adjacently to the second electrode 1.

50 **[0030]** A metallic electrode is used as the second electrode 1 when the second electrode 1 is the cathode. Although the metallic electrode may comprise Al, Ag, Yt, metal halide, etc., the metallic electrode is not limited to those materials. ITO, or IZO, is used as the first electrode 7 when the first electrode 7 is the anode.

**[0031]** Another embodiment (not forming part of the invention) comprises a metal halide as a first layer, instead of the first organic film layer 8 of the above cited embodiment, and a second layer of this embodiment of the present invention

is the same as the second organic layer of the above cited embodiment.

**[0032]** The metal halide comprises one or more metals selected from the group consisting of an alkali metal, an alkali earth metal, and a rare earth metal.

**[0033]** The thickness of the first layer is preferably 0.5 to 10 nm.

**[0034]** Furthermore, an organic electroluminescent display device according to this embodiment further comprises an electron transport layer 3, or a hole retardation layer, to improve electrical characteristics. The electron transport layer 3, or the hole retardation layer, is formed between the emitting layer 4 and the second organic film layer 9. Materials used as ordinary electron transport layers or hole retardation layers are used to form the electron transport layer 3 or the hole retardation layer.

**[0035]** The luminescent principle of an organic electroluminescent display device according to an embodiment of the present invention is examined as follows. In FIG. 2, electrons are injected from the second electrode 1, and the first organic film layer 8, comprising an organic metal complex compound, removes an energy barrier to the second organic film layer 9, which is a mixed material of the electron transport layer material and the organic metal complex compound, so that the electrons generated from the second electrode 1 are easily injected into the second organic film layer 9.

**[0036]** That is, the first organic film layer 8 and the second organic film layer 9 perform the same function as an existing electron injection layer 2.

**[0037]** The second organic film layer 9, which is a mixed layer of the electron transport layer material and the organic metal complex compound, assists with the easy injection and transport of electrons, while an electron transport layer 3, or a hole retardation layer, assists with the transferring of electrons and the blocking of the movement of holes.

**[0038]** Holes passing through a hole injection layer 6 from the first electrode 7 are transferred through a hole transport layer 5 to an emitting layer 4 and are bonded with electrons from the second electrode 1 so as to emit light. The first electrode 7 is an ordinary anode electrode, and a transparent electrode such as ITO or IZO can be used as the first electrode 7.

**[0039]** In general, the performances of electroluminescent devices show maximum values at a thickness range between 1 nm and 4 nm. However, this thin an electron injection layer is too thin to form a continuous film. Instead, the electron injection layer in that thickness range forms an island structure.

**[0040]** To overcome this lack of uniformity, and to improve the electron injection from the second electrode 1 to the electron transport layer 3, a supplementary layer (the second organic film layer 9) comprising a mixture of organic metal complex compound and an electron transport layer material was introduced as a second layer of a bi-layer electron injection structure. The bi-layer electron injection structure enhances the electron injection, which results in the improvement of the efficiency and lifetime of the device. A mixture of organic metal complex compound and electron transport layer material can also be used as an electron transport layer 3, as well as an electron injection layer 2.

**[0041]** A display device in an embodiment of the present invention lowers the driving voltage of the device, and increases the efficiency and luminance of the device, by using a thin film organic metal complex compound layer (the first organic film layer 8), thereby removing an electron injection barrier.

**[0042]** Furthermore, the display device in an embodiment of the present invention additionally lowers the driving voltage of the device, and increases the efficiency and luminance of the device, by introducing an electron injection layer 2, which in an embodiment of the present invention is a mixed layer of the existing electron transport layer 3 and an organic metal complex compound layer, allowing electrons to be transported more smoothly. The display device in an embodiment of the present invention also has an increased life span due to the improved stability of the device.

**[0043]** The same organic metal complex compounds, or different organic metal complex compounds, can be used in the first organic film layer 8 and the second organic film layer 9.

**[0044]** A few embodiments of the present invention are as follows. The following embodiments are only for helping to understand the present invention, but the present invention is not limited to the following embodiments.

#### EXAMPLE 1

**[0045]** After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of  $10^{-6}$  torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of  $10^{-6}$  torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) ( $\text{Irppy}_3$ ) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. Biphenoxy-bi(8-quinolinolato) aluminum (BAIq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. Tris(8-quinolinolato)aluminum (Alq) was deposited at a thickness of 20 nm as an electron transport layer. A mixture in which tris(8-quinolinolato)aluminum (Alq) is mixed with 8-quinolinolato lithium (Liq), in a mixing ratio of 3:1, was deposited to a thickness of 1 nm on the electron transport layer under a vacuum of  $10^{-6}$  torr, to serve as an electron transport layer. A pure Liq layer was deposited at a thickness of 1

nm on top of the mixed layer. After depositing Al as a metallic electrode, to a thickness of 300 nm, on the Liq electron injection layer, the resulting material was finally encapsulated using a metallic can and barium oxide.

[0046] An organic electroluminescent display device fabricated using the process shown above had a luminance of 1000 cd/m<sup>2</sup>, an efficiency of 25 cd/A at 6 V, and a life span of 1000 hours at 400 cd/m<sup>2</sup>.

5

#### EXAMPLE 2 (not forming part of the invention)

[0047] After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of 10<sup>-6</sup> torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of 10<sup>-6</sup> torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) (Irppy<sub>3</sub>) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. BiPhenoxy-bi(8-quinolinolato) aluminum (BALq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. Tris(8-quinolinolato)aluminum (Alq) was deposited at a thickness of 20 nm as an electron transport layer. A mixture in which tris(8-quinolinolato)aluminum (Alq) is mixed with 8-quinolinolato lithium (Liq), in a mixing ratio of 3:1, was deposited to a thickness of 1 nm on the electron transport layer under a vacuum of 10<sup>-6</sup> torr, to serve as an electron transport layer. A pure lithium fluoride (LiF) layer was deposited at a thickness of 1 nm on top of the mixed layer. After depositing Al as a metallic electrode, to a thickness of 300 nm, on the LiF electron injection layer, the resulting material was finally encapsulated using a metallic can and barium oxide.

10

15

20

[0048] An organic electroluminescent display device fabricated using the process shown above had a luminance of 900 cd/m<sup>2</sup>, an efficiency of 24 cd/A at 6 V, and a life span of 900 hours at 400 cd/m<sup>2</sup>.

#### EXAMPLE 3

25

[0049] After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of 10<sup>-6</sup> torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of 10<sup>-6</sup> torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) (Irppy<sub>3</sub>) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. Biphenoxy-bi(8-quinolinolato) aluminum (BALq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. A mixture in which tris(8-quinolinolato)aluminum (Alq) is mixed with 8-quinolinolato lithium (Liq), in a mixing ratio of 3:1, was deposited to a thickness of 20 nm on the hole retardation layer under a vacuum of 10<sup>-6</sup> torr, to serve as an electron transport layer, as well as an electron injection layer. A pure Liq layer was deposited at a thickness of 1 nm on top of the mixed layer. After depositing Al as a metallic electrode, to a thickness of 300 nm, on the Liq electron injection layer, the resulting material was finally encapsulated using a metallic can and barium oxide.

30

35

[0050] An organic electroluminescent display device fabricated using the process shown above had a luminance of 1200 cd/m<sup>2</sup>, an efficiency of 27 cd/A at 6 V, and a life span of 1200 hours at 400 cd/m<sup>2</sup>.

40

#### EXAMPLE 4 (not forming part of the invention)

[0051] After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of 10<sup>-6</sup> torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of 10<sup>-6</sup> torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) (Irppy<sub>3</sub>) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. Biphenoxy-bi(8-quinolinolato) aluminum (BALq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. A mixture in which tris(8-quinolinolato)aluminum (Alq) is mixed with 8-quinolinolato lithium (Liq), in a mixing ratio of 3:1, was deposited to a thickness of 20 nm on the hole retardation layer under a vacuum of 10<sup>-6</sup> torr, to serve as an electron transport layer, as well as an electron injection layer. A pure LiF layer was deposited at a thickness of 1 nm on top of the mixed layer. After depositing Al as a metallic electrode, to a thickness of 300 nm, on the LiF electron injection layer, the resulting material was finally encapsulated using a metallic can and barium oxide.

45

50

55

[0052] An organic electroluminescent display device fabricated using the process shown above had a luminance of 1100 cd/m<sup>2</sup>, an efficiency of 26 cd/A at 6 V, and a life span of 1100 hours at 400 cd/m<sup>2</sup>.

## COMPARATIVE EXAMPLE 1

**[0053]** After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of  $10^{-6}$  torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of  $10^{-6}$  torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) (Irppy<sub>3</sub>) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. Biphenoxy-bi(8-quinolinolato) aluminum (BALq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. A mixture in which tris(8-quinolinolato) aluminum (Alq) is mixed with 8-quinolinolato lithium (Liq), in a mixing ratio of 1:1, was deposited to a thickness of 20 nm on the hole retardation layer under a vacuum of  $10^{-6}$  torr, to serve as an electron transport layer. After depositing Al as a metallic electrode, to a thickness of 300 nm, on a mixed layer of Liq and Alq, the resulting material was finally encapsulated using a metallic can and barium oxide.

**[0054]** An organic electroluminescent display device fabricated using the process shown above had a luminance of 800 cd/m<sup>2</sup>, an efficiency of 25 cd/A at 6 V, and a life span of 550 hours at 400 cd/m<sup>2</sup>.

## COMPARATIVE EXAMPLE 2

**[0055]** After depositing copper phthalocyanine (CuPc) to a thickness of 10 nm on an ITO transparent electrode under a vacuum of  $10^{-6}$  torr, to serve as a hole injection layer of an organic electroluminescent display device, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was deposited to a thickness of 50 nm on the hole injection layer under a vacuum of  $10^{-6}$  torr, to serve as a hole transport layer. After depositing the N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), a luminescent layer, in which iridium tris(phenylpyridine) (Irppy<sub>3</sub>) was doped on carbazole biphenyl (CBP) to a concentration of 5 %, was formed on the hole transport layer to a thickness of 30 nm. Biphenoxy-bi(8-quinolinolato) aluminum (BALq) was deposited on the luminescent layer to a thickness of 5 nm, after depositing the luminescent layer on the hole transport layer, to serve as a hole retardation layer. Tris(8-quinolinolato)aluminum (Alq) was deposited to a thickness of 20 nm on the hole retardation layer, under a vacuum of  $10^{-6}$  torr, to serve as an electron transport layer. 8-quinolinolato lithium (Liq) was deposited to a thickness of 3 nm on the electron transport layer, after depositing tris(8-quinolinolato)aluminum (Alq) as the electron transport layer, to serve as an electron injection layer.. After depositing Al as a metallic electrode, to a thickness of 300 nm, on the Liq electron injection layer, the resulting material was finally encapsulated using a metallic can and barium oxide.

**[0056]** An organic electroluminescent display device fabricated using the process shown above had a luminance of 1000 cd/m<sup>2</sup>, an efficiency of 21 cd/A at 6 V, and a life span of 500 hours at 400 cd/m<sup>2</sup>.

Device structure	Luminance @6v(nit)	Efficiency (cd/A)	Lifetime(h)
Al/Liq/Alq3:Liq/Alq3/EML(EXAMPLE1)	1000	25	1000
Al/LiF/Alq3:Liq/Alq3/EML(EXAMPLE2)	900	24	900
Al/Liq/Alq3:Liq/EML(EXAMPLE3)	1200	27	1200
Al/LiF/Alq3:Liq/EML(EXAMPLE4)	1100	26	1100
Al/Alq3:Liq/Alq3/EML (COMPARATIVE EXAMPLE 1)	800	25	550
Al/Liq/Alq3/EML (COMPARATIVE EXAMPLE 2)	1000	21	500

**[0057]** An organic electroluminescent display device, according to an embodiment of the present invention, improved efficiency and luminance by 20% or more, and improved the life span 80% or more, compared with an organic electroluminescent display device having the conventional structure, by using a bi-layer electron injection layer comprised of an organic metal complex compound layer and a mixture layer of electron transport layer material and an organic metal complex compound.

## Claims

1. An organic electroluminescent display device comprising;
  - a substrate;

a first electrode and a second electrode formed on the substrate; and  
a plurality of organic film layers between the first and second electrodes, comprising:

an emitting layer,

a first organic film layer provided between the emitting layer and the second electrode, and  
a second organic film layer provided between the emitting layer and the first organic film layer,  
wherein the first organic film layer comprises a first organic metal complex compound, and the second organic  
film layer comprises a mixture of a charge carrier transport material and a second organic metal complex  
compound, **characterized in that**

the first and second organic metal complex compounds each comprise at least one metal selected from the  
group consisting of an alkali metal, an alkali earth metal, and a rare earth metal.

2. The organic electroluminescent display device according to claim 1, wherein a charge carrier of the charge carrier  
transport material is an electron.

3. The organic electroluminescent display device according to claim 1, wherein the charge carrier transport material  
comprises at least one material selected from the group consisting of a polycyclic hydrocarbon series derivative, a  
heterocyclic compound, and derivatives thereof.

4. The organic electroluminescent display device according to claim 1, wherein the first and second organic metal  
complex compounds comprise the same metal.

5. The organic electroluminescent display device according to claim 1, wherein the thickness of the first organic film  
layer is 10 nm or less.

6. The organic electroluminescent display device according to claim 1, wherein the thickness of the first organic film  
layer is 0.5 to 10 nm.

7. The organic electroluminescent display device according to claim 1, wherein the thickness of the second organic  
film layer is 10 nm or less.

8. The organic electroluminescent display device according to claim 1, wherein the second organic film layer comprises  
75 % or less of the charge carrier transport material.

9. The organic electroluminescent display device according to claim 1, wherein the first and second organic metal  
complex compounds each comprise 8-quinolinolato lithium, comprising one or more 8-quinolinolatos as a ligand,  
and derivatives thereof.

10. The organic electroluminescent display device according to claim 1, further comprising a hole retardation layer.

11. The organic electroluminescent display device according to claim 1, wherein the first electrode is an anode, and the  
second electrode is a cathode comprised of at least one metal selected from the group of Al, Ag, Yt, and metal halide.

12. The organic electroluminescent display device according to claim 1, wherein the first organic film layer is positioned  
adjacent to the second electrode.

## Patentansprüche

1. Organische elektrolumineszente Anzeigevorrichtung, aufweisend:

ein Substrat;

eine erste Elektrode und eine zweite Elektrode, die auf dem Substrat ausgebildet sind; und

eine Vielzahl organischer Filmschichten zwischen der ersten und zweiten Elektrode, aufweisend:

eine Emissionsschicht,

eine erste organische Filmschicht, die zwischen der Emissionsschicht und der zweiten Elektrode bereitge-  
stellt wird, und

eine zweite organische Filmschicht, die zwischen der Emissionsschicht und der ersten organischen Filmschicht bereitgestellt wird,

wobei die erste organische Filmschicht eine erste organische Metallkomplexverbindung aufweist und die zweite organische Filmschicht eine Mischung aus einem Ladungsträger-Transportmaterial und einer zweiten organischen Metallkomplexverbindung aufweist, **dadurch gekennzeichnet, dass**

die erste und zweite organische Metallkomplexverbindung jeweils zumindest ein Metall aufweisen, das aus der Gruppe bestehend aus einem Alkalimetall, einem Erdalkalimetall und einem Seltenerdmetall ausgewählt ist.

2. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei ein Ladungsträger des Ladungsträger-Transportmaterials ein Elektron ist.

3. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei das Ladungsträger-Transportmaterial zumindest ein Material aufweist, das aus der Gruppe bestehend aus einem Derivat der polycyclischen Kohlenwasserstoffreihe, einer heterocyclischen Verbindung und deren Derivaten ausgewählt ist.

4. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die erste und zweite organische Metallkomplexverbindung das gleiche Metall aufweisen.

5. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die Dicke der ersten organischen Filmschicht 10 nm oder weniger beträgt.

6. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die Dicke der ersten organischen Filmschicht 0,5 bis 10 nm beträgt.

7. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die Dicke der zweiten organischen Filmschicht 10 nm oder weniger beträgt.

8. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die zweite organische Filmschicht 75 % oder weniger des Ladungsträger-Transportmaterials aufweist.

9. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die erste und die zweite organische Metallkomplexverbindung jeweils 8-Quinolinolat-Lithium aufweisen, das ein oder mehrere 8-Quinolinolate als einen Liganden aufweist, und deren Derivate.

10. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, weiterhin aufweisend eine Lochverzögerungsschicht.

11. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die erste Elektrode eine Anode ist und die zweite Elektrode eine Kathode ist, die zumindest ein Metall enthält, das aus der Gruppe von Al, Ag, Yt und Metallhalogenid ausgewählt ist.

12. Organische elektrolumineszente Anzeigevorrichtung nach Anspruch 1, wobei die erste organische Filmschicht benachbart zur zweiten Elektrode positioniert ist.

## Revendications

1. Dispositif d'affichage électroluminescent organique comprenant :

un substrat ;

une première électrode et une seconde électrode formées sur le substrat ; et

une pluralité de couches de film organique entre les première et seconde électrodes, comprenant :

une couche émettrice ;

une première couche de film organique disposée entre la couche émettrice et la seconde électrode ; et

une seconde couche de film organique disposée entre la couche émettrice et la première couche de film organique,

## EP 1 469 535 B1

la première couche de film organique comprenant un premier composé complexe organométallique, et la seconde couche de film organique comprenant un mélange d'une matière de transport de porteurs de charge et d'un second composé complexe organométallique, **caractérisées en ce que** les premier et second composés complexes organométalliques comprennent chacun au moins un métal choisi à partir du groupe constitué d'un métal alcalin, d'un métal alcalino-terreux et d'une terre rare.

- 5
2. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel un porteur de charge de la matière de transport de porteurs de charge est un électron.
- 10
3. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la matière de transport de porteurs de charge comprend au moins une matière choisie à partir du groupe constitué d'un dérivé sériel d'hydrocarbures polycycliques, d'un composé hétérocyclique et de leurs dérivés.
- 15
4. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel les premier et second composés complexes organométalliques comprennent le même métal.
5. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel l'épaisseur de la première couche de film organique est égale ou inférieure à 10 nm.
- 20
6. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel l'épaisseur de la première couche de film organique est comprise entre 0,5 et 10 nm.
7. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel l'épaisseur de la seconde
- 25
8. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la seconde couche de film organique comprend 75 % ou moins de la matière de transport de porteurs de charge.
9. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel les premier et second
- 30
- composés complexes organométalliques comprennent chacun du 8-quinolinoléate de lithium, comprenant un ou plusieurs 8-quinolinoléates comme ligand, et leurs dérivés.
10. Dispositif d'affichage électroluminescent organique selon la revendication 1, comprenant en outre une couche de retardement des trous.
- 35
11. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la première électrode est une anode, et la seconde électrode est une cathode constituée d'au moins un métal choisi à partir du groupe constitué de l'Al, de l'Ag, de l'Yt et des halogénures métalliques.
- 40
12. Dispositif d'affichage électroluminescent organique selon la revendication 1, dans lequel la première couche de film organique est placée adjacente à la seconde électrode.
- 45
- 50
- 55

FIG. 1


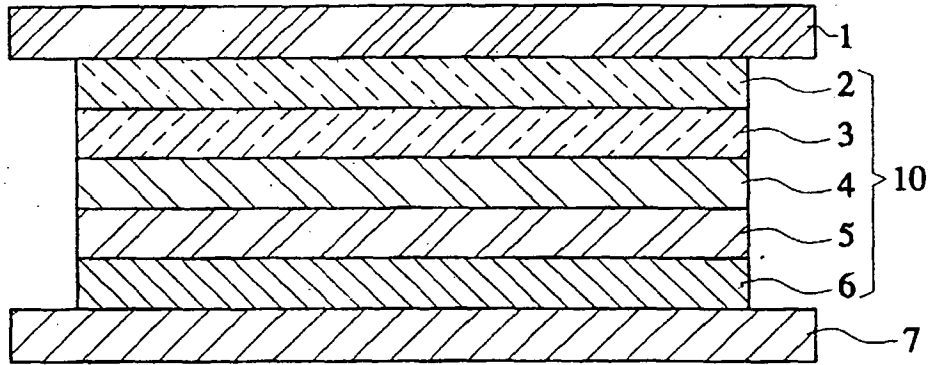


FIG. 2

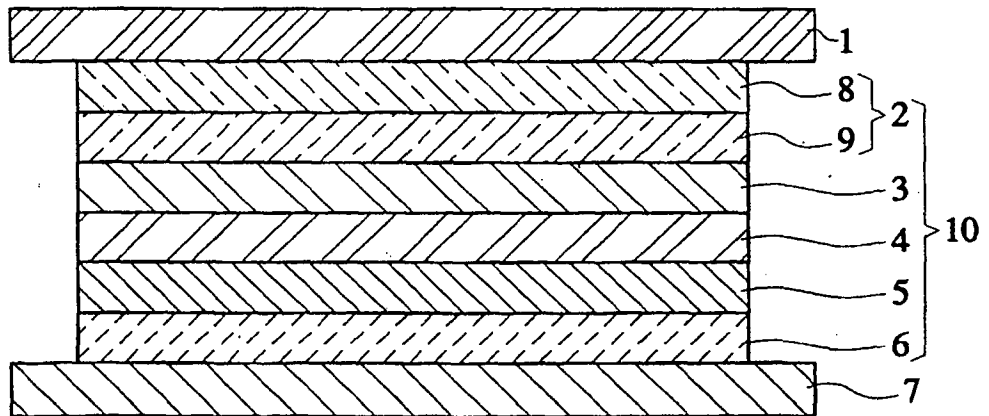

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- KR 200324424 [0001]
- US 5776622 A [0006]
- US 6396209 B [0009]

专利名称(译)	有机电致发光显示装置		
公开(公告)号	<a href="#">EP1469535B1</a>	公开(公告)日	2012-06-06
申请号	EP2004090008	申请日	2004-01-13
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
发明人	LEE, JUN-YEOB, 307-802 CHEONGSOL MAEUL HANRA APT., KWON, JANG-HYUK, C/O SAMSUNG SDI CO., LTD. CHOI, YONG-JOONG, 116-703, MONSOK MAEUL SSANGYONG		
IPC分类号	H01L51/50 H05B33/26 H01L51/00		
CPC分类号	H01L51/5048 H01L51/0081 H01L51/5092 H01L51/5096		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020030024424 2003-04-17 KR		
其他公开文献	EP1469535A2 EP1469535A3		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

一种有机电致发光显示装置，包括形成在基板上的第一电极和第二电极，以及位于第一和第二电极之间的多个有机薄膜层，包括设置在发光层和第二电极之间的第一有机薄膜层，以及在发光层和第一有机薄膜层之间提供的第二有机薄膜，其中第一有机薄膜层包括第一有机金属配位化合物，第二有机薄膜层包括电荷载流子传输材料和第二有机金属配位化合物的混合物复合。

FIG. 1




FIG. 2

