

(19)



(11)

EP 1 486 550 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.05.2014 Bulletin 2014/21

(21) Application number: **03708594.1**

(22) Date of filing: **13.03.2003**

(51) Int Cl.:

C09K 11/06 <small>(2006.01)</small>	H05B 33/14 <small>(2006.01)</small>
H05B 33/22 <small>(2006.01)</small>	C07D 401/04 <small>(2006.01)</small>
C07D 403/04 <small>(2006.01)</small>	C07D 471/04 <small>(2006.01)</small>
C07D 401/14 <small>(2006.01)</small>	C07F 15/00 <small>(2006.01)</small>
H01L 51/00 <small>(2006.01)</small>	H01L 51/50 <small>(2006.01)</small>
C07D 403/14 <small>(2006.01)</small>	

(86) International application number:

PCT/JP2003/002995

(87) International publication number:

WO 2003/078541 (25.09.2003 Gazette 2003/39)

(54) **MATERIAL FOR ORGANIC ELECTROLUMINESCENT DEVICES AND ORGANIC ELECTROLUMINESCENT DEVICES MADE BY USING THE SAME**

MATERIAL FÜR ORGANISCH ELEKTROLUMINESZIERENDE BAUTEILE SOWIE DAMIT HERGESTELLTE ORGANISCH ELEKTROLUMINESZIERENDE BAUTEILE

MATERIAU DESTINE A DES DISPOSITIFS ELECTROLUMINESCENTS ET DISPOSITIFS ELECTROLUMINESCENTS ORGANIQUES REALISES A L'AIDE DE CE MATERIAU

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **15.03.2002 JP 2002071398**

(43) Date of publication of application:

15.12.2004 Bulletin 2004/51

(73) Proprietor: **IDEMITSU KOSAN CO., LTD.**

Tokyo 100-8321 (JP)

(72) Inventors:

- **IWAKUMA, Toshihiro**
Sodegaura-shi, Chiba 299-0205 (JP)
- **HOSOKAWA, Chishio**
Sodegaura-shi, Chiba 299-0205 (JP)
- **IKEDA, Hidetsugu**
Sodegaura-shi, Chiba 299-0205 (JP)
- **TOMITA, Seiji**
Sodegaura-shi, Chiba 299-0205 (JP)
- **ARAKANE, Takashi**
Sodegaura-shi, Chiba 299-0205 (JP)

(74) Representative: **Gille Hrabal**

**Brucknerstrasse 20
40593 Düsseldorf (DE)**

(56) References cited:

WO-A1-01/19939	WO-A1-01/72927
JP-A- 11 144 876	JP-A- 2000 260 565
JP-A- 2000 264 880	JP-A- 2000 268 961
JP-A- 2000 290 644	JP-A- 2001 247 858
US-A- 2 944 058	US-A- 3 518 250
US-A1- 2001 015 614	

- **G. BOYER ET AL.:** "synthesis a. structure of new hosts related to 9,9'-bianthryl" JOURNAL OF THE CHEMICAL SOCIETY, PERKIN TRANSACTIONS 2., vol. 4, 1993, pages 757-766, XP002358146 GB CHEMICAL SOCIETY. LETCHWORTH.
- **C. AVENDANO ET AL.:** "the problem of the existence of c(ar)-H..N intramolecular h-bond in a family of 9-azaphenyl-9h-carbazoles." JOURNAL OF THE CHEMICAL SOCIETY, PERKIN TRANSACTIONS 2., 1993, pages 1547-1555, XP002358147 GB CHEMICAL SOCIETY. LETCHWORTH.
- **J. CATALAN:** "on the tict mechanism of 9,9'-biaryl compounds." EUR. J. ORG. CHEM., 1998, pages 1697-1704, XP002358148 weinheim
- **YIMING MO:** "photophysical processes of some carbazole derivatives." J. OF PHOTOCHEMISTRY A. PHOTOBIOLOGY A: CHEMISTRY, vol. 92, 1995, pages 25-27, XP002358149 engl.

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 486 550 B1

- | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none">• R. PIETERS ET AL.: "passive template effects a. active acid-base involment in catalysis of organic reactions." CHEMISTRY - A EUROPEAN JOURNAL., vol. 1, no. 3, 1995, pages 183-192, XP002358150 USVCH PUBLISHERS.• S. GRIGALEVICIUS ET AL.: "hole-transporting molecular glasses based on carbazole a. diphenylamine moieties." MATERIALS CHEMISTRY A. PHYSICS, vol. 72, no. 3, 2001, pages 395-400, XP002980841 lausanne | <ul style="list-style-type: none">• JAPAN SOCIETY OF APPLIED PHYSICS, vol. 10, 15 March 2002 (2002-03-15), pages 6-8, |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|

DescriptionTECHNICAL FIELD

[0001] The present invention relates to a material for organic electroluminescent devices (organic EL devices) and organic EL devices made by using the material and, more particularly, to organic EL devices emitting bluish light with a high purity of color.

BACKGROUND ART

[0002] Organic EL devices which utilize organic substances are expected to be useful for application as an inexpensive full color display device of the solid light emission type having a great size, and various developments on the organic EL devices are being conducted. In general, an organic EL device has a construction comprising a pair of facing electrodes and a light emitting layer sandwiched between the electrodes.

[0003] The light emission of the organic EL device is a phenomenon in which, when an electric field is applied across the two electrodes, electrons are injected from the cathode side and holes are injected from the anode side, the electrons recombine with the holes in the light emitting layer to induce an excited state, and then, when the excited state returns to the original state, it emits energy as light.

[0004] As the light emitting material, chelate complexes such as tris(8-quinolinolato)aluminum, coumarine derivatives, tetraphenylbutadiene derivatives, bisstyrylarylene derivatives and oxadiazole derivatives are known. It has been reported that these light emitting materials emit light in the visible region of blue to red, and it is expected that color display elements can be obtained by using these light emitting materials (for example, Japanese Patent Application Laid-Open Nos. Heisei 8(1996)-239655, Heisei 7(1995)-138561 and Heisei 3(1991)-200289, etc.).

[0005] Although the practical use of displays using organic EL devices recently started, the full color display device is still under development. In particular, an organic EL device which emits bluish light with excellent purity of color and great efficiency of light emission has been desired.

[0006] To overcome the above problems, for example, a device in which a phenylanthracene derivative is used as the material emitting blue light is disclosed in Japanese Patent Application Laid-Open No. Heisei 8(1996)-12600. The phenylanthracene derivative is used as the material emitting blue light and, in general, used as a laminate of a layer of the material emitting blue light with a layer of a complex of tris(8-quinolinolato)aluminum (Alq). However, the efficiency of light emission, the life and the purity of blue light are insufficient for the practical application. Japanese Patent Application Laid-Open No. 2001-160489 discloses a device in which an azafluoranthene compound is added to the light emitting layer. However, this device emits yellow to green light and cannot emit blue light having a sufficiently high purity of color.

[0007] Indolizine compounds for use in organic light emitting devices are described in US 2001 /0015614 A1. One of the specific indolizine compounds which are described in the document contains a carbazole group.

SUMMARY OF THE INVENTION

[0008] The present invention has been made to overcome the above problems and has an object of providing a material for organic EL devices which emits bluish light with a high purity of light and an organic EL device utilizing the material.

[0009] As the result of intensive studies by the present inventors to achieve the above object, it was found that an organic EL device emitting bluish light with a high purity of light could be obtained by using a compound in which a heterocyclic group having nitrogen was bonded to carbazolyl group as the host material. The present invention has been completed based on this knowledge.

[0010] The present invention provides a material for organic EL devices which comprises a compound represented by following general formula (1):



as defined in claim 1.









[0011] The present invention also provides an organic EL device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode, wherein at least one layer in the organic thin film layer contains a material for organic EL devices described above. In the organic thin film layer, a light emitting layer, an electron transporting layer or a hole transporting layer may contain the above material for organic EL devices.

THE MOST PREFERRED EMBODIMENT TO CARRY OUT THE INVENTION

[0012] The material for organic EL devices of the present invention comprises a compound represented by following general formula (1):



wherein the compound represented by general formula (1) is a compound represented by any one of following general formulae (4) to (10):



wherein Cz represents a carbazolyl group which is unsubstituted or substituted with a substituent selected from the group consisting of a chlorine atom, a bromine atom, a fluorine atom, a carbazole group, hydroxyl group, amino group, nitro group, cyano group, silyl group, trifluoromethyl group, carbonyl group, carboxyl group, alkyl groups, alkenyl groups, arylalkyl groups, aromatic groups, heteroaromatic heterocyclic groups, aralkyl groups, aryloxy groups and alkyloxy groups; and


M represents a heteroaromatic cyclic group selected from the group consisting of pyridine, pyrimidine, pyrazine, triazine, aziridine, azaindolide, imidazole, indole, isoindole, indazole, purine, pteridine, β -carboline, naphthylidine, quinoxaline,


quinazoline, acridine, phenanthroline and phenazine which is unsubstituted or substituted with a substituent selected from the group consisting of halogen, carbazole group, hydroxyl group, amino group, nitro group, cyano group, silyl group, trifluoromethyl group, carbonyl group, carboxyl group, alkyl groups, alkenyl groups, arylalkyl groups, aromatic groups, heteroaromatic heterocyclic groups, aralkyl groups, aryloxy groups and alkyloxy groups.


[0013] Among these groups, fluorine atom, phenyl group, naphthyl group, pyridyl group, pyrazyl group, pyrimidyl group, cyano group, alkyl groups and aralkyl groups are preferable.

[0014] A plurality of Cz may represent different groups when n represents 2 or 3; a plurality of M may represent different groups when m represents 2 or 3; M does not represent triazine group when n represents 3 and m is 1.

[0015] Specific examples of the compound represented by general formula (1) used in the present invention are shown in the following. However, the compound is not limited to the compounds shown in the following.

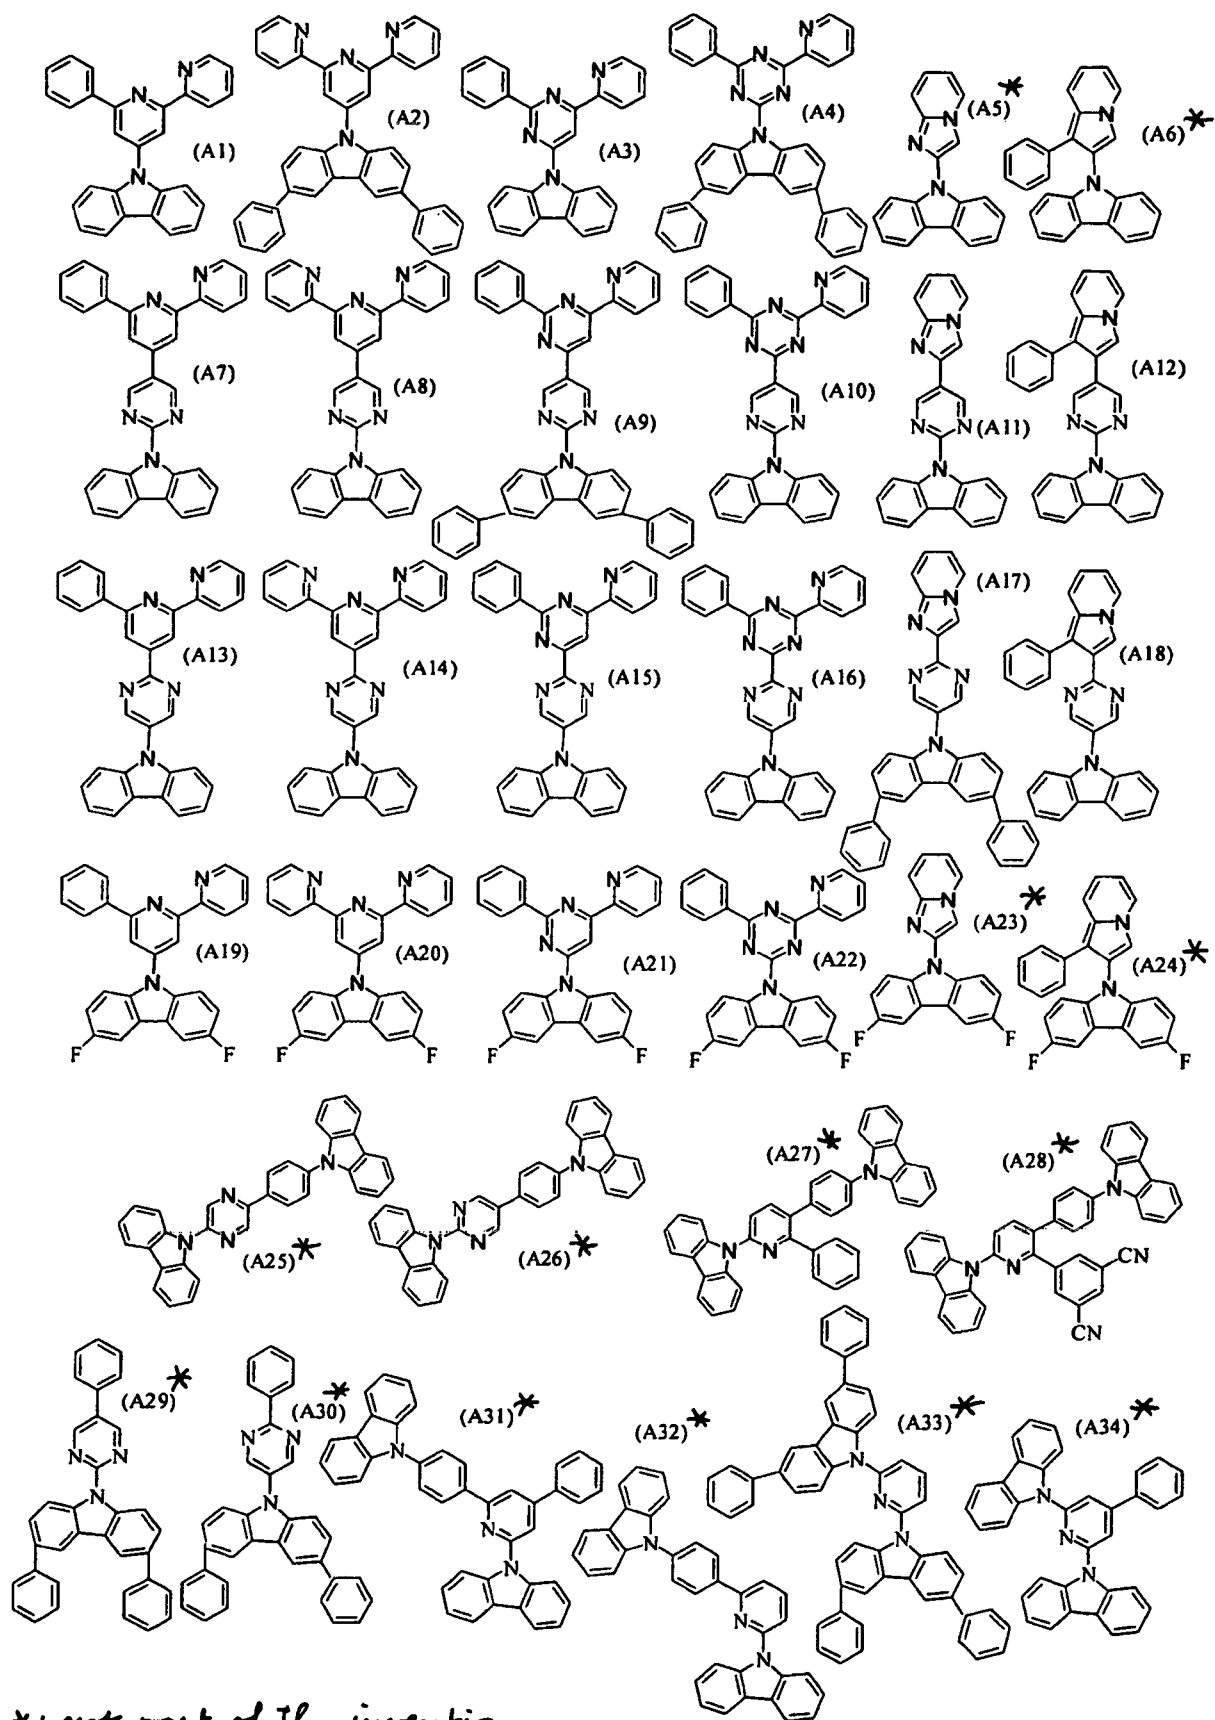

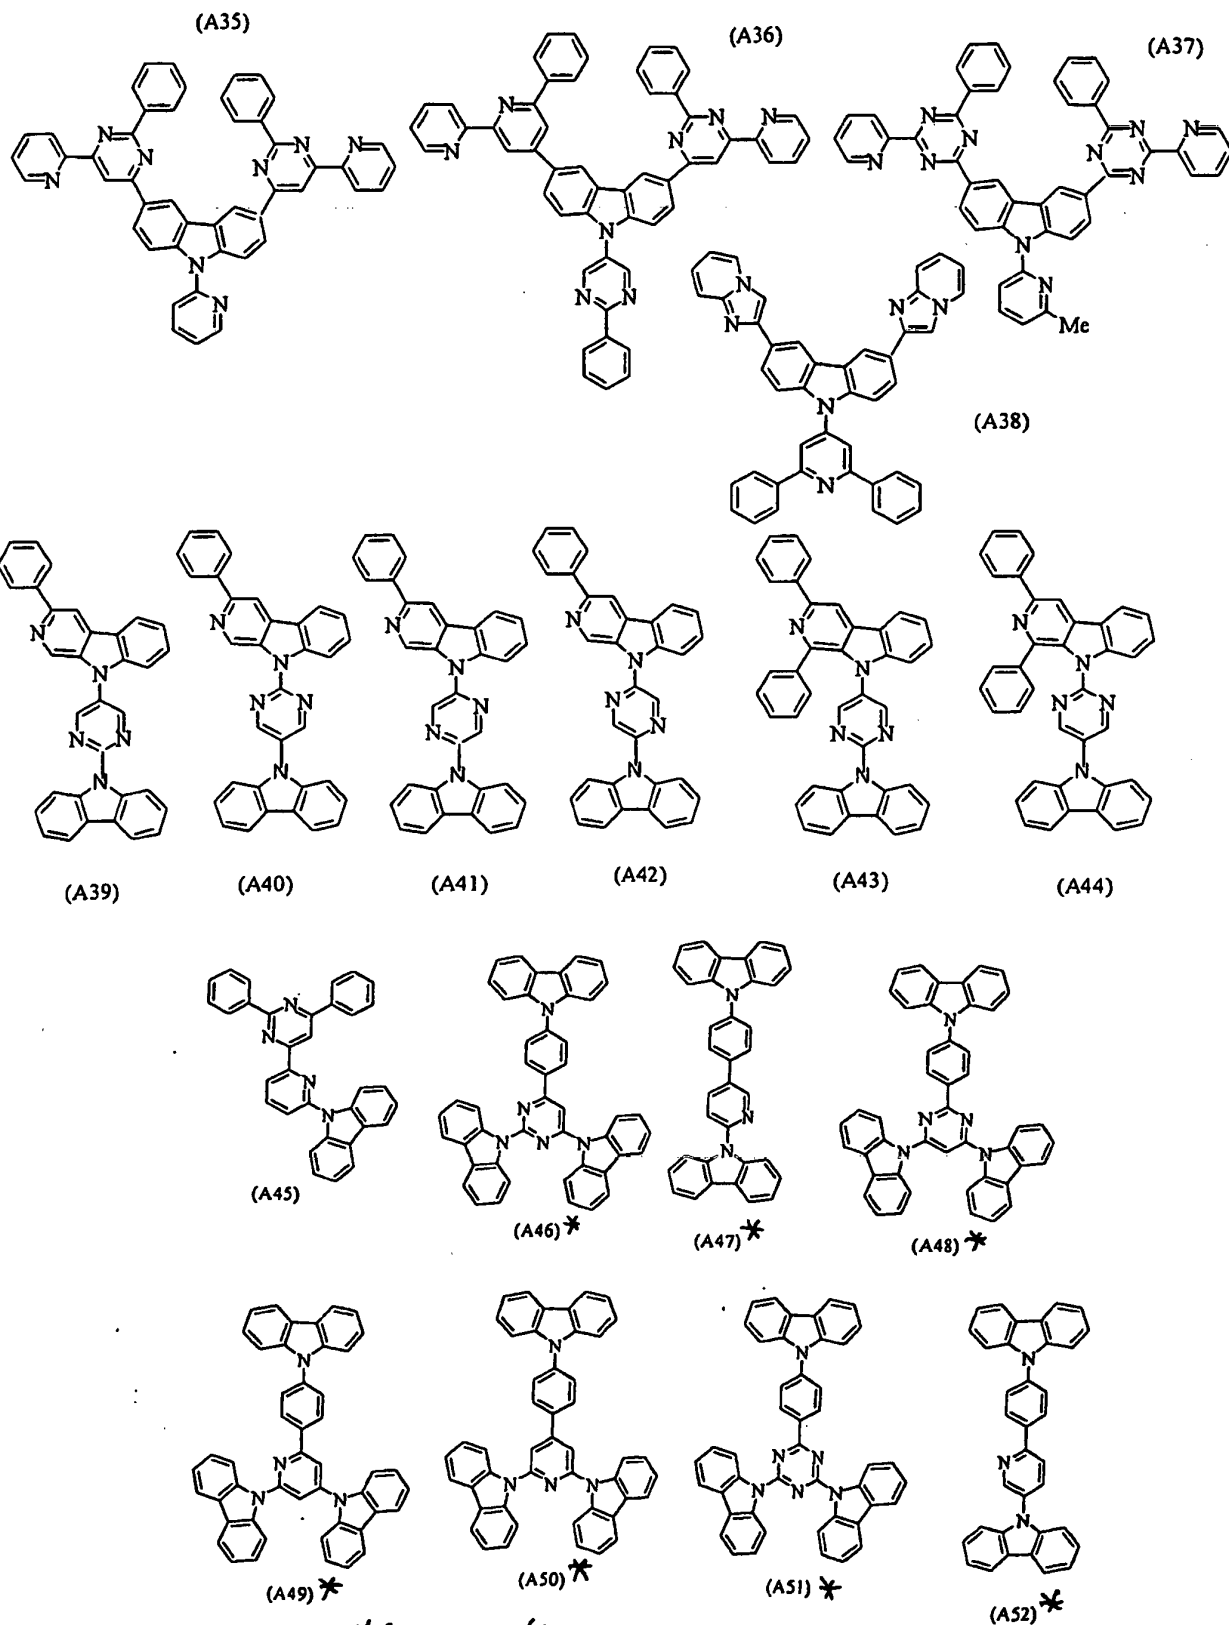

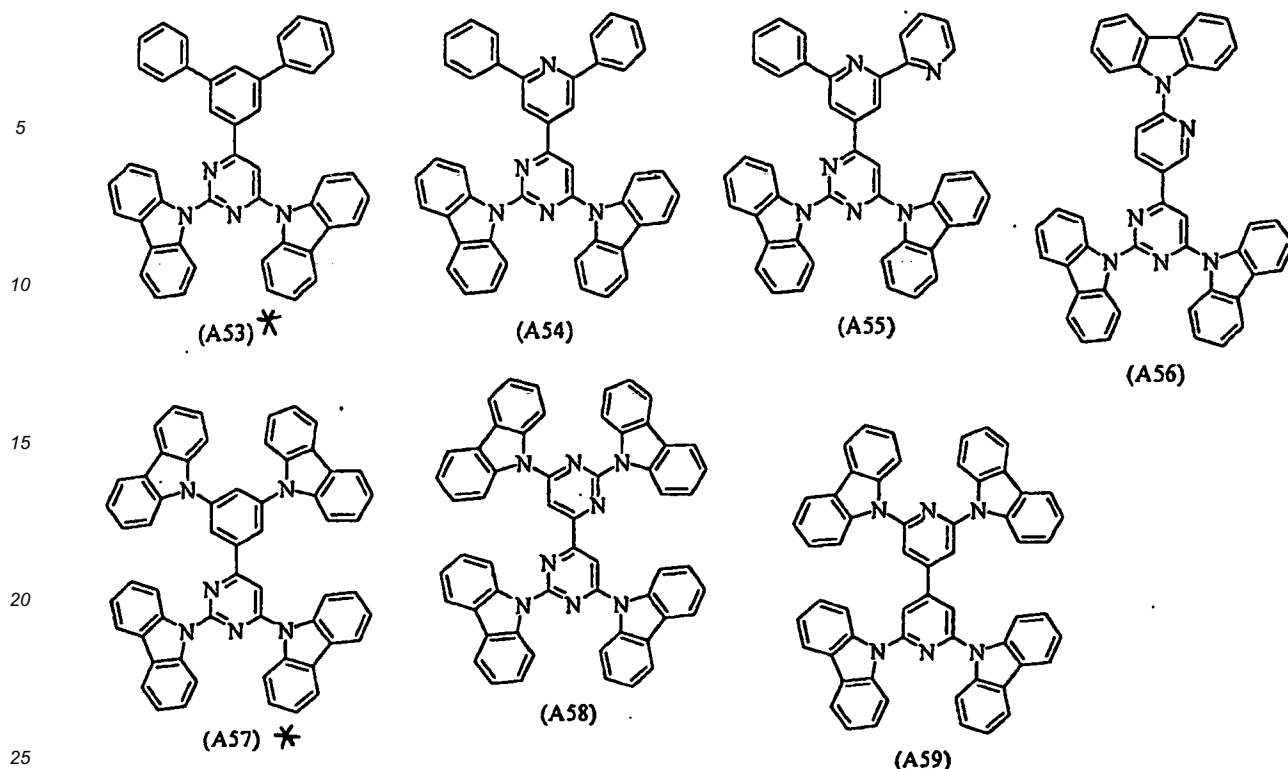

*: not part of the invention

[0016] The singlet energy gap of the compound represented by general formula (1) of the present invention is 2.8 to 3.8 eV and preferably 2.9 to 3.6 eV.

[0017] The organic EL device of the present invention comprises an anode, a cathode and an organic thin film layer comprising at least one layer sandwiched between the anode and the cathode, wherein at least one layer in the organic thin film layer contains the material for organic EL devices comprising the compound represented by the above general formula (1). It is preferable that the light emitting layer in the organic EL device of the present invention contains the material for organic EL devices comprising the compound represented by the above general formula (1).

[0018] The organic EL device of the present invention emits bluish light, and the purity of color of the emitted light is as excellent as (0.12, 0.11) to (0.16, 0.19). This property is exhibited since the material for organic EL devices comprising the compound represented by general formula (1) of the present invention has a great energy gap.

[0019] It is preferable that the organic EL device of the present invention emits light by a multiplet excitation which is the excitation to the triplet state or higher.

[0020] It is preferable that the material for organic EL devices is a host material of the organic EL device. The host material is a material into which holes and electrons can be injected and which has the function of transporting holes and electrons and emitting fluorescent light by recombination of holes and electrons.

[0021] The compound represented by general formula (1) in the present invention is useful also as the organic host material for phosphorescence devices since the singlet energy gap is as high as 2.8 to 3.8 eV and the triplet energy gap is as high as 2.5 to 3.3 eV.

[0022] The phosphorescence device is an organic device which comprises a substance emitting light based on the transition from the energy level in the triplet state to the energy level in the ground singlet state with a stronger intensity than those emitted from other substances, examples of which include phosphorescent substances such as organometallic complexes containing at least one metal selected from Groups 7 to 11 of the Periodic Table, and emits light under an electric field utilizing the so-called phosphorescence.

[0023] In the light emitting layer of the organic EL device, in general, the singlet exciton and the triplet exciton are contained in the formed excited molecules as a mixture, and it is reported that the triplet exciton is formed in a greater amount such that the ratio of the amount of the singlet exciton to the amount of the triplet exciton is 1:3. In conventional organic EL devices using the phosphorescence, the exciton contributing to the light emission is the singlet exciton, and the triplet exciton does not emit light. Therefore, the triplet exciton is ultimately consumed as heat, and the light is emitted by the singlet exciton which is formed in a smaller amount. Therefore, in these organic EL devices, the energy transferred

to the triplet exciton causes a great loss in the energy generated by the recombination of holes and electrons.

[0024] In contrast, it is considered that, by using the material of the present invention for the phosphorescence device, the efficiency of light emission three times as great as that of a device using fluorescence can be obtained since the triplet exciton can be used for the emission of light. It is also considered that, when the compound of the present invention is used for the light emitting layer of the phosphorescence device, an excited triplet level in an energy state higher than the excited triplet level of a phosphorescent organometallic complex comprising a metal selected from the Group 7 to 11 of the Periodic Table contained in the layer, is achieved; the film having a more stable form is provided; the glass transition temperature is higher (T_g: 80 to 160°C); holes and/or electrons are efficiently transported; the compound is electrochemically and chemically stable; and the formation of impurities which may work as a trap or cause loss in the light emission is suppressed during the preparation and the use.

[0025] The hole transporting layer, the electron injecting layer or the hole barrier layer may contain the material of the present invention. A phosphorescent light emitting compound and the material of the present invention may be mixed and used in combination.

[0026] The organic EL device of the present invention comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode. When the organic thin film layer comprises a single layer, a light emitting layer is formed between the anode and the cathode. The light emitting layer contains a light emitting material and may further contain a hole injecting material for transporting holes injected from the anode to the light emitting material or an electron injecting material for transporting electrons injected from the cathode to the light emitting material. It is preferable that the light emitting material exhibits a very excellent quantum efficiency of fluorescence, has a great ability of transporting both holes and electrons and forms a uniform thin layer. Examples of the organic EL device of the multi-layer type include organic EL devices comprising a laminate having a multi-layer construction such as (the anode / the hole injecting layer / the light emitting layer / the cathode), (the anode / the light emitting layer / the electron injecting layer / the cathode) and (the anode / the hole injecting layer / the light emitting layer / the electron injecting layer / the cathode).

[0027] For the light emitting layer, in addition to the material of the present invention comprising the compound represented by general formula (1) of the present invention, conventional host materials, light emitting materials, doping materials, hole injecting materials and electron injecting materials and combinations of these materials may be used in combination, where necessary. By using a multi-layer structure for the organic EL device, decreases in the luminance and the life due to quenching can be prevented, and the luminance of emitted light and the efficiency of light emission can be improved with other doping materials. By using other doping materials contributing to the light emission of the phosphorescence in combination, the luminance of emitted light and the efficiency of light emission can be improved in comparison with those of conventional devices.


[0028] In the organic EL device of the present invention, the hole injecting layer, the light emitting layer and the electron injecting layer may each have a multi-layer structure. When the hole injecting layer has a multi-layer structure, the layer into which holes are injected from the electrode is called as a hole injecting layer, and the layer which receives holes from the hole injecting layer and transports holes to the light emitting layer is called as a hole transporting layer. Similarly, when the electron injecting layer has a multi-layer structure, the layer into which electron are injected from the electrode is called as an electron injecting layer, and the layer which receives electrons from the electron injecting layer and transports electrons to the light emitting layer is called as an electron transporting layer. The layers are selected in accordance with the energy levels of the material, heat resistance and adhesion with the organic thin film layers or the metal electrodes.

[0029] In the organic EL device of the present invention, the electron transporting layer and the hole transporting layer may contain the material for organic EL devices of the present invention which comprises the compound represented by general formula (1).

[0030] Examples of the light emitting material and the host material which can be used for the organic thin film layer in combination with the compound represented by general formula (1) include anthracene, naphthalene, phenanthrene, pyrene, tetracene, coronene, chrysene, fluoresceine, perylene, phthaloperylene, naphthaloperylene, perynone, phthaloperynone, naphthaloperynone, diphenylbutadiene, tetraphenylbutadiene, coumarine, oxadiazole, aldazine, bisbenzoxazoline, bisstyryl, pyrazine, cyclopentadiene, metal complexes of quinoline, metal complexes of aminoquinoline, metal complexes of benzoquinoline, imines, diphenylethylene, vinylanthracene, diaminoanthracene, diaminocarbazole, pyrane, thiopyrane, polymethine, melocyanine, oxinoid compounds chelated with imidazole, quinacridone, rubrene, stilbene-based derivatives and fluorescent pigments. However, the light emitting material and the host material are not limited to the compounds described above.

[0031] As the light emitting material, phosphorescent organometallic complexes are preferable since the external quantum efficiency of the device can be improved. Examples of the metal in the phosphorescent organometallic complex include ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum and gold. It is preferable that the organometallic complex is an organometallic compound represented by the following general formula (A):

【化 1 5】

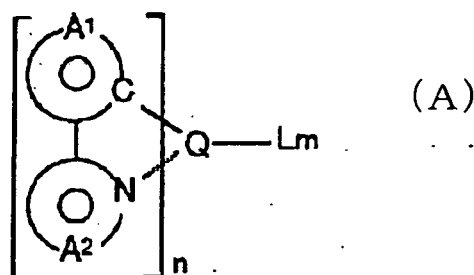

[0032] In the above general formula, A¹ represents a substituted or unsubstituted aromatic hydrocarbon cyclic group or aromatic heterocyclic group, which is preferably phenyl group, biphenyl group, naphthyl group, anthryl group, thienyl group, pyridyl group, quinolyl group or isoquinolyl group. Examples of the substituent include halogen atoms such as fluorine atom; alkyl groups having 1 to 30 carbon atoms such as methyl group and ethyl group; alkenyl groups such as vinyl group; alkoxycarbonyl groups having 1 to 30 carbon atoms such as methoxycarbonyl group and ethoxycarbonyl group; alkoxy groups having 1 to 30 carbon atoms such as methoxy group and ethoxy group; aryloxy groups such as phenoxy group and benzyloxy group; dialkylamino groups such as dimethylamino group and diethylamino group; acyl groups such as acetyl group; haloalkyl groups such as trifluoromethyl group; and cyano group.

[0033] A² represents a substituted or unsubstituted aromatic heterocyclic group having nitrogen atom as the atom forming the heterocyclic ring, which is preferably pyridyl group, pyrimidyl group, pyrazine group, triazine group, benzothiazole group, benzoxazole group, benzimidazole group, quinolyl group, isoquinolyl group, quinoxaline group or phenanthridine group. Examples of the substituent include the substituents described as the examples of the substituent for the group represented by A¹.

[0034] The ring having the group represented by A¹ and the ring having the group represented by A² may form one condensed ring. Examples of the condensed ring include 7,8-benzoquinoline group.


[0035] Q represents a metal selected from metals of Groups 7 to 11 of the Periodic Table, which is preferably ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum or gold.

[0036] L represents a bidentate ligand, which is preferably selected from ligands of the β-diketone type such as acetylacetonates and pyromellitic acid.


[0037] m and n each represent an integer. When Q represents a divalent metal, n=2 and m=0. When Q represents a trivalent metal, n=3 and m=0 or n=2 and m=1.

[0038] Specific examples of the organometallic complex represented by the above general formula (A) are shown in the following. However, the organometallic complex is not limited to these compounds.


(K-1)




(K-2)

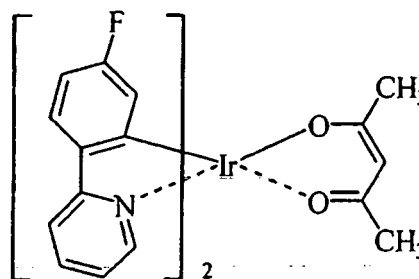


(K-3)




(K-4)




(K-5)

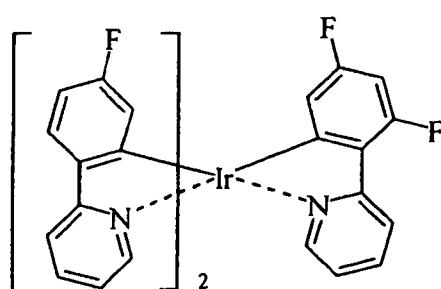


(K-6)




(K-7)

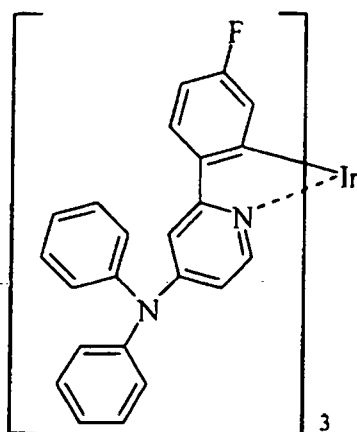


(K-8)

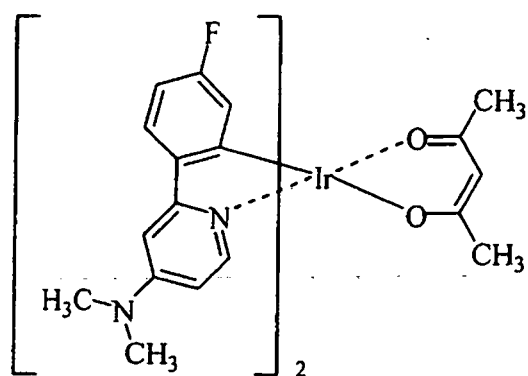


(K-9)




(K-10)




(K-11)




(K-12)




(K-13)

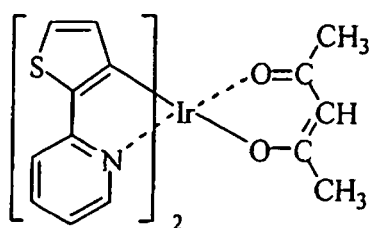


(K-14)

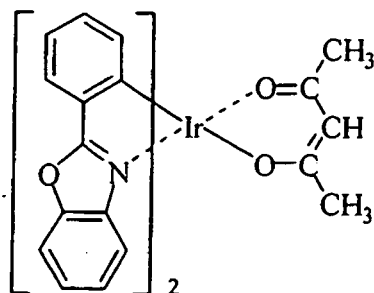


(K-15)

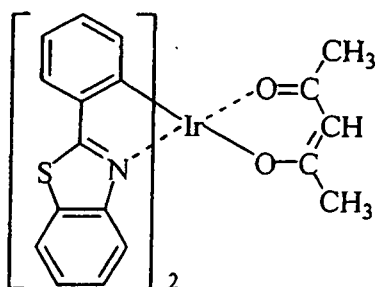


(K-16)

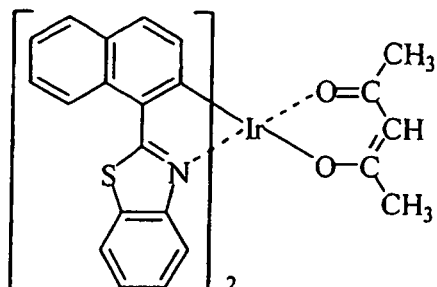


(K-17)

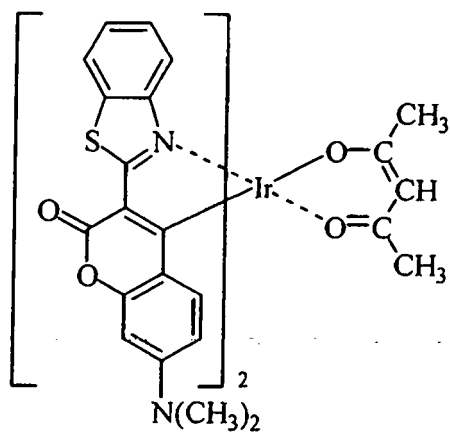


(K-18)

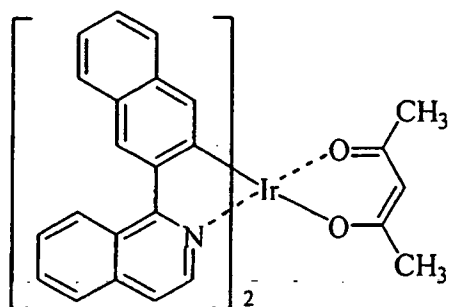


(K-19)

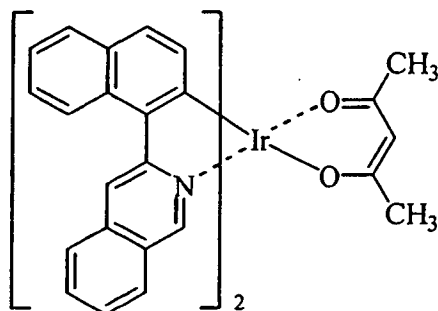


(K-20)

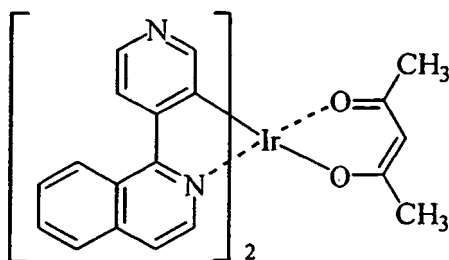

(K-21)



(K-22)



[0039] As the hole injecting material, compounds which have the ability to transport holes, exhibit the excellent effect of receiving holes injected from the anode and the excellent effect of injecting holes to the light emitting layer or the light emitting material, prevent transfer of excitons formed in the light emitting layer to the electron injecting layer or the electron injecting material and have the excellent ability of forming a thin film, are preferable. Examples of the hole injecting compound include phthalocyanine derivatives, naphthalocyanine derivatives, porphyrin derivatives, oxazoles, oxadiazoles, triazoles, imidazoles, imidazolones, imidazolethiones, pyrazolines, pyrazolones, tetrahydroimidazoles, oxazoles, oxadiazoles, hydrazones, acylhydrazones, polyaryllalkanes, stilbene, butadiene, triphenylamine of the benzidine type, triphenylamine of the styrylamine type, triphenylamine of the diamine type, derivatives of the above compounds

and macromolecular materials such as polyvinylcarbazoles, polysilanes and electrically conductive macromolecules. However, the hole injecting material is not limited to these materials.

[0040] Among these hole injecting materials, the more effective hole injecting materials are aromatic tertiary amine derivatives and phthalocyanine derivatives. Examples of the aromatic tertiary amine derivative include triphenylamine, tritolylamine, tolyldiphenylamine, N,N'-diphenyl-N,N'-(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N',N'-(4-methylphenyl)-1,1'-phenyl-4,4'-diamine, N,N,N',N'-(4-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N'-diphenyl-N,N'-dinaphthyl-1,1'-biphenyl-4,4'-diamine, N,N'-(methylphenyl)-N,N'-(4-n-butylphenyl)-phenanthrene-9,10-diamine, N,N-bis(4-di-4-tolylaminophenyl)-4-phenyl-cyclohexane and oligomers and polymers having the skeleton structure of these aromatic tertiary amines. However, the aromatic tertiary amine is not limited to these compounds. Examples of the phthalocyanine (Pc) derivative include phthalocyanine derivatives and naphthalocyanine derivatives such as H₂Pc, CuPc, CoPc, NiPc, ZnPc, PdPc, FePc, MnPc, ClAlPc, ClGaPc, ClInPc, ClSnPc, Cl₂SiPc, (HO)AlPc, (HO)GaPc, VOPc, TiOPc, MoOPc and GaPc-O-GaPc. However the phthalocyanine derivative is not limited to these compounds.

[0041] As the electron injecting material, compounds which have the ability to transport electrons, exhibit the excellent effect of receiving electrons injected from the anode and the excellent effect of injecting electrons to the light emitting layer or the light emitting material, prevent transfer of excitons formed in the light emitting layer to the hole injecting layer and have the excellent ability of forming a thin film, are preferable. Examples of the electron injecting compound include fluorenone, anthraquinodimethane, diphenylquinone, thiopyrane dioxide, oxazoles, oxadiazoles, triazoles, imidazoles, perylenetetracarboxylic acid, quinoxaline, fluorenylidene methane, anthraquinodimethane, anthrone and derivatives of these compounds. However, the electron injecting material is not limited to these compounds.

[0042] Among these electron injecting materials, the more effective electron injecting materials are metal complex compounds and five-membered derivatives having nitrogen. Examples of the metal complex compound include 8-hydroxyquinolinatolithium, bis(8-hydroxy-quinolinato)zinc, bis(8-hydroxyquinolinato)copper, bis(8-hydroxy-quinolinato)manganese, tris(8-hydroxyquinolinato)aluminum, tris(2-methyl-8-hydroxyquinolinato)aluminum, tris(8-hydroxyquinolinato)-gallium, bis(10-hydroxybenzo[h]quinolinato)beryllium, bis(10-hydroxy-benzo[h]quinolinato)zinc, bis(2-methyl-8-quinolinato)chlorogallium, bis(2-methyl-8-quinolinato)(o-cresolato)gallium, bis(2-methyl-8-quinolinato)-(1-naphtholato)aluminum and bis(2-methyl-8-quinolinato)(2-naphtholato)-gallium. However the electron injecting material is not limited to these compounds.

[0043] Oxazoles, thiazoles, oxadiazoles, thiadiazoles, triazoles and derivatives of these compounds are preferable as the five-membered derivative having nitrogen. Specific examples of the five-membered derivative having nitrogen include 2,5-bis(1-phenyl)-1,3,4-oxazole, dimethylPOPOP, 2,5-bis(1-phenyl)-1,3,4-thiazole, 2,5-bis(1-phenyl)-1,3,4-oxadiazole, 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,5-oxadiazole, 2,5-bis(1-naphthyl)-1,3,4-oxadiazole, 1,4-bis[2-(5-phenyloxadiazolyl)]benzene, 1,4-bis[2-(5-phenyloxadiazolyl)-4-tert-butylbenzene], 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,4-thiadiazole, 2,5-bis(1-naphthyl)-1,3,4-thiadiazole, 1,4-bis[2-(5-phenylthiadiazolyl)]benzene, 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,4-triazole, 2,5-bis(1-naphthyl)-1,3,4-triazole and 1,4-bis[2-(5-phenyltriazolyl)]benzene. However, the five-membered derivative having nitrogen is not limited to these compounds.

[0044] The property of charge injection can be improved by adding an electron-accepting compound to the hole injecting material and by adding an electron-donating compound to the electron injecting material.

[0045] As the electrically conductive material used for the anode of the organic EL device of the present invention, a material having a work function greater than 4 eV is suitable, and carbon, aluminum, vanadium, iron, cobalt, nickel, tungsten, silver, gold, platinum, palladium, alloys of these metals, metal oxides such as tin oxides and indium oxide used for ITO substrates and NESA substrates and organic electrically conductive resins such as polythiophene and polypyrrol are used. As the electrically conductive material used for the cathode, a material having a work function smaller than 4 eV is suitable, and magnesium, calcium, tin, lead, titanium, yttrium, lithium, ruthenium, manganese, aluminum and alloys of these metals are used. However, the electrically conductive material used for the cathode is not limited to these materials. Typical examples of the alloy include magnesium/silver, magnesium/indium and lithium/aluminum. However, the alloy is not limited to these alloys. The composition of the alloy is controlled by the temperature of the source of vaporization, the atmosphere and the degree of vacuum and a suitable composition is selected. The anode and the cathode may be formed with a structure having two or more layers, where necessary.

[0046] The organic EL device of the present invention may comprise an inorganic compound layer between at least one of the electrodes and the above organic thin film layer. Examples of the inorganic compound used for the inorganic compound layer include various types of oxides, nitrides and oxide nitrides such as alkali metal oxides, alkaline earth metal oxides, rare earth oxides, alkali metal halides, alkaline earth metal halides, rare earth halides, SiO_x, AlO_x, SiN_x, SiON, AlON, GeO_x, LiO_x, LiON, TiO_x, TiON, TaO_x, TaON, TaN_x and C. In particular, as the component contacting the anode, SiO_x, AlO_x, SiN_x, SiON, AlON, GeO_x and C are preferable since a stable interface layer of injection is formed. As the component contacting the cathode, LiF, MgF₂, CaF₂, MgF₂ and NaF are preferable.

[0047] In the organic EL device of the present invention, it is preferable that at least one surface is sufficiently transparent in the region of the wavelength of the light emitted by the device so that the light emission is achieved efficiently. It is preferable that the substrate is also transparent.

[0048] For the transparent electrode, the conditions in the vapor deposition or the sputtering are set so that the prescribed transparency is surely obtained using the above electrically conductive material. It is preferable that the electrode of the light emitting surface has a transmittance of light of 10% or greater. The substrate is not particularly limited as long as the substrate has the mechanical and thermal strength and is transparent. Examples of the substrate include glass substrates and transparent films of resins. Examples of the transparent film of a resin include films of polyethylene, ethylene-vinyl acetate copolymers, ethylene-vinyl alcohol copolymers, polypropylene, polystyrene, polymethyl methacrylate, polyvinyl chloride, polyvinyl alcohol, polyvinyl butyral, nylon, polyether ether ketones, polysulfones, polyether sulfones, tetrafluoroethylene-perfluoroalkyl vinyl ether copolymers, polyvinyl fluoride, tetrafluoroethylene-ethylene copolymers, tetrafluoroethylene-hexafluoropropylene copolymers, polychlorotrifluoroethylene, polyvinylidene fluoride, polyesters, polycarbonates, polyurethanes, polyimides, polyether imides, polyimides and polypropylene.

[0049] In the organic EL device of the present invention, it is possible that a protective layer is formed on the surface of the device or the entire device is covered with a silicone oil or a resin so that stability to the temperature, the humidity and the atmosphere is improved.

[0050] For the formation of each layer of the organic EL device of the present invention, any of the dry processes of film formation such as the vacuum vapor deposition, the sputtering, the plasma plating and the ion plating and the wet processes of film formation such as the spin coating, the dipping and the flow coating, can be applied. Although the thickness of each film is not particularly limited, it is necessary that the thickness of the film be set at a suitable value. When the thickness is excessively great, application of a greater voltage is necessary to obtain the same output of the light, and the efficiency of light emission decreases. When the thickness is excessively small, pin holes are formed, and sufficient light emission cannot be obtained even when an electric field is applied. In general, a thickness in the range of 5 nm to 10 μm is suitable and a thickness in the range of 10 nm to 0.2 μm is preferable.

[0051] When the wet process of film formation is used, the material forming each layer is dissolved or suspended in a suitable solvent such as ethanol, chloroform, tetrahydrofuran and dioxane, and a thin film is formed from the obtained solution or suspension. Any of the above solvents can be used. For any of the layers, suitable resins and additives may be used to improve the property for film formation and to prevent formation of pin holes in the film. Examples of the resin which can be used include insulating resins such as polystyrene, polycarbonates, polyarylates, polyesters, polyamides, polyurethanes, polysulfones, polymethyl methacrylate, polymethyl acrylate, cellulose and copolymer resins derived from these resins; photoconductive resins such as poly-N-vinylcarbazole and polysilanes; and electrically conductive resins such as polythiophene and polypyrrol. Examples of the additive include antioxidants, ultraviolet light absorbers and plasticizers.

[0052] As described above, by using the compound represented by general formula (1) for the organic thin film layer of the organic EL device of the present invention, the organic EL device emitting blue light with a high purity of color can be obtained. This organic EL device can be advantageously used for a photosensitive member for electronic photograph, a planar light emitting member such as a flat panel display of wall televisions, a back light of copiers, printers and liquid crystal displays, a light source for instruments, a display panel, a marker lamp and an accessory.

[0053] The present invention will be described more specifically with reference to examples in the following. However, the present invention is not limited to the examples.

[0054] The triplet energy gap and the singlet energy gap of a compound were measured in accordance with the following methods.

(1) Measurement of the triplet energy gap


[0055] The lowest excited triplet energy level T1 was measured. The phosphorescence spectrum of a sample was measured (a 10 $\mu\text{moles/liter}$ EPA (diethyl ether : isopentane : ethanol=5:5:2 by volume) solution; 77K; a quartz cell; FLUOROLOG 11 manufactured by SPEX Company). A tangent line was drawn to the increasing line at the short wavelength side of the phosphorescence spectrum, and the wavelength (the end of light emission) at the intersection of the tangent line and the abscissa was obtained. The obtained wavelength was converted into the energy.

(2) Measurement of the singlet energy gap

[0056] The excited singlet energy gap was measured. Using a toluene solution (10^{-5} moles/liter) of a sample, the absorption spectrum was obtained by a spectrometer for absorption of ultraviolet and visible light manufactured by HITACHI Co. Ltd. A tangent line was drawn to the increasing line at the long wavelength side of the spectrum, and the wavelength (the end of absorption) at the intersection of the tangent line and the abscissa was obtained. The obtained wavelength was converted into the energy.

Synthesis Example 1 (Synthesis of Compound (A2): 9-(2,6-dipyridyl-pyridin-4-yl)carbazole)

[0057] The route of synthesis of Compound (A2) is shown in the following.

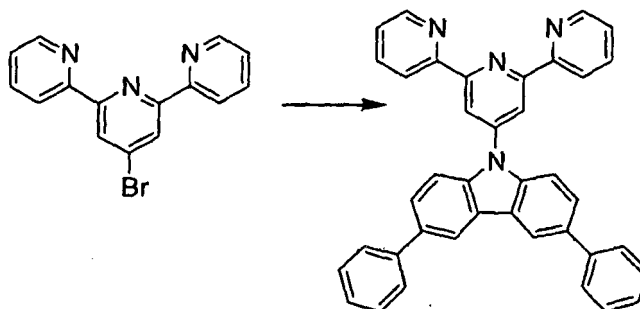


[0058] Under the atmosphere of argon, 2,6-dipyridyl-4-bromopyridine (9.4 g, 30 mmole), 3,6-diphenylcarbazole (9.6 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (13.2 g, the yield: 80%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS (the field desorption mass analysis) that the product was Compound (A2) of the object compound. The result of the measurement by FD-MS is shown in the following.

FD-MS calcd. for $\text{C}_{39}\text{H}_{26}\text{N}_4$ = 550; found: m/z = 550 (M^+ , 100)

[0059] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 2 (Synthesis of Compound (A14): 2-(2,6-dipyridyl-pyridin-4-yl)-5-(9-carbazolyl)pyrimidine)

[0060] The route of synthesis of Compound (A14) is shown in the following.

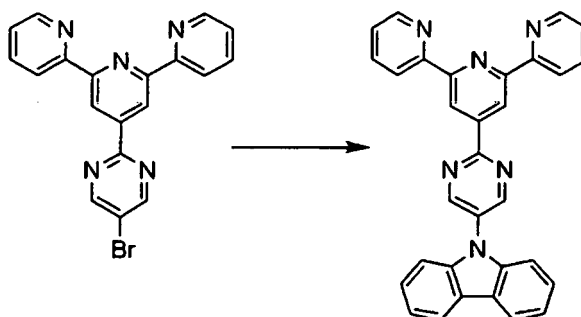


[0061] Under the atmosphere of argon, 2-(2,6-dipyridylpyridin-4-yl)-5-bromopyrimidine (12 g, 30 mmole), carbazole (5 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (10.9 g, the yield: 76%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS that the product was Compound (A14) of the object compound. The result of the measurement by FD-MS is shown in the following.

FD-MS calcd. for $\text{C}_{31}\text{H}_{20}\text{N}_6$ = 476; found: m/z = 476 (M^+ , 100)

[0062] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 3 (Synthesis of Compound (A33): 2,6-di(9-carbazolyl)-pyridine) (not part of the invention)

[0063] The route of synthesis of Compound (A33) is shown in the following.

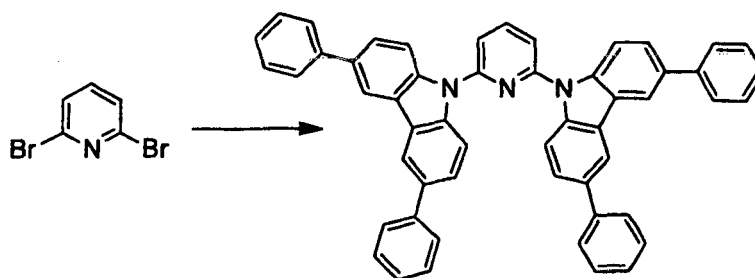


[0064] Under the atmosphere of argon, 2,6-dibromopyridine (2.4 g, 10 mmole), 3,6-diphenylcarbazole (9.6 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (4.8 g, the yield: 67%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS that the product was Compound (A33) of the object compound. The result of the measurement by FD-MS is shown in the following. FD-MS calcd. for $\text{C}_{53}\text{H}_{35}\text{N}_3=713$; found: $m/z=713$ (M^+ , 100)

[0065] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 4 (Synthesis of Compound (A45))

[0066] The route of synthesis of Compound (A45) is shown in the following.

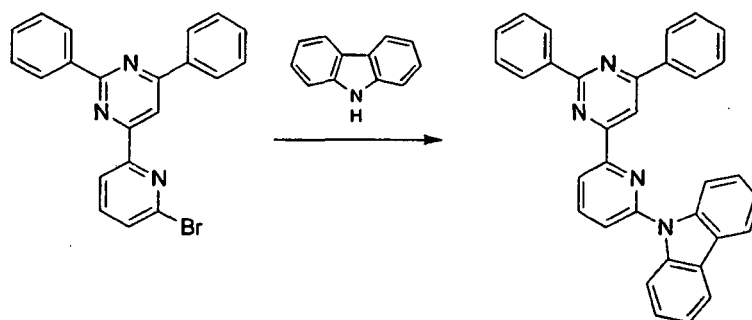


2-(2,4-Diphenylpyrimidin-6-yl)-6-bromopyridine (3.2 g, 8 mmole), carbazole (1.4 g, 9 mmole), copper iodide (0.08 g, 0.4 mmole) and potassium phosphate (3.7 g, 17 mmole) were suspended in 1,4-dioxane (16 ml), and trans-1,2-cyclohexanediamine (0.5 ml, 4 mmole) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 15 hours under the atmosphere of argon. The reaction solution was cooled to the room temperature, and water was added. After extraction with methylene chloride, the obtained organic layer was washed with water and dried with anhydrous sodium sulfate. After the organic solvent was removed by distillation under a reduced pressure, 25 ml of ethyl acetate was added. The formed crystals were separated by filtration and washed with ethyl acetate, and crystals (2.3 g, the yield: 59%) were obtained. It was confirmed in accordance with 90 MHz $^1\text{H-NMR}$ and FD-MS that the obtained crystals were Compound (A45) of the object compound. The result of the measurement by FD-MS is shown in the following.

FD-MS calcd. for $\text{C}_{33}\text{H}_{22}\text{N}_4=474$; found: $m/z=474$ (M^+ , 100)

[0067] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 5 (Synthesis of Compound (A46)) (not part of the invention)

[0068] The route of synthesis of Compound (A46) is shown in the following.

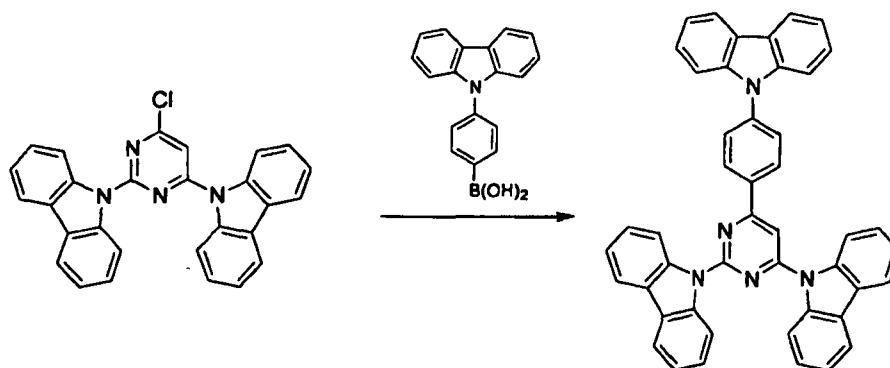


[0069] 2,4-Dicarbazolyl-6-chloropyrimidine (2.5 g, 6 mmole), 4-carbazolyl-phenylboric acid (1.6 g, 6 mmole), copper iodide (0.08 g, 0.4 mmole) and tetrakis(triphenylphosphine)palladium (0.13 g, 0.1 mmole) were suspended in 1,2-dimethoxyethane (25 ml), and a solution prepared by dissolving sodium carbonate (1.8 ml, 17 mmole) in water (8 ml) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 9 hours and 20 minutes. After the reaction solution was cooled to the room temperature, formed crystals were separated by filtration and washed with water, methanol and ethyl acetate, successively, and crude crystals (3.7 g) were obtained. The obtained crude crystals were purified by sublimation under a reduced pressure, and purified crystals (3.1 g, the yield: 85%) were obtained. It was confirmed in accordance with 90 MHz ¹H-NMR and FD-MS that the obtained crystals were Compound (A46) of the object compound. The result of the measurement by FD-MS is shown in the following.

FD-MS calcd. for C₄₆H₂₉N₅=651; found: m/z=651 (M⁺, 100)

[0070] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 6 (Synthesis of Compound (A47)) (not part of the invention)

[0071] The route of synthesis of Compound (A47) is shown in the following.

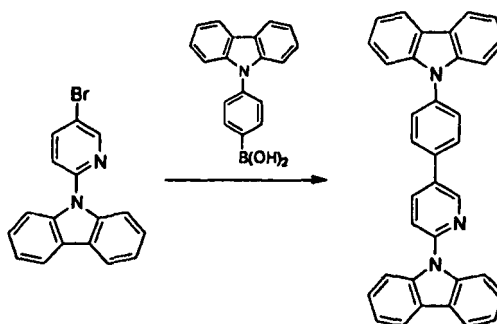

[0072] 2-Carbazolyl-5-bromopyridine (1.9 g, 6 mmole), 4-carbazolylphenyl-boric acid (1.7 g, 6 mmole) and tetrakis(triphenylphosphine)palladium (0.14 g, 0.1 mmole) were suspended in 1,2-dimethoxyethane (18 ml), and a solution prepared by dissolving sodium carbonate (1.9 ml, 18 mmole) in water (9 ml) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 9 hours and 15 minutes. After the reaction solution was cooled to the room temperature, formed crystals were separated by filtration and washed with water, methanol and ethyl acetate, successively, and crude crystals (2.9 g) were obtained. The formed crystals were purified by sublimation under a reduced pressure, and purified crystals (2.4 g, the yield: 84%) were obtained. It was confirmed in accordance with 90 MHz ¹H-NMR and FD-MS that the obtained crystals were Compound (A47) of the object compound. The result of the measurement by FD-MS is shown in the following.

FD-MS calcd. for C₃₅H₂₃N₃=485; found: m/z=485 (M⁺, 100)

[0073] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Table 1

	Compound	Singlet energy gap (eV)	Triplet energy gap (eV)
Synthesis Example 1	A2	3.2	2.7
Synthesis Example 2	A14	3.2	2.8

(continued)


	Compound	Singlet energy gap (eV)	Triplet energy gap (eV)
Synthesis Example 3	A33*	3.3	2.7
Synthesis Example 4	A45	3.2	2.8
Synthesis Example 5	A46*	3.3	2.8
Synthesis Example 6	A47*	3.4	2.8

*: not part of the invention

Example 1

[0074] A glass substrate (manufactured by GEOMATEC Company) of 25 mm×75 mm×1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of N,N'-bis-(N,N'-diphenyl-4-aminophenyl)-N,N'-diphenyl-4,4'-diamino-1,1'-biphenyl (TPD232) having a thickness of 60 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of TPD232 worked as the hole injecting layer. On the formed film of TPD232, a film of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPD) having a thickness of 20 nm was formed. The formed film of NPD worked as the hole transporting layer. On the formed film of NPD, a film of the above Compound (A2) having a thickness of 40 nm was formed by vapor deposition. At the same time, Compound (D1) shown in the following was vapor deposited in an amount such that the ratio of the amounts by weight of Compound (A2) to Compound (D1) was 40:3. Compound (D1) is a light emitting compound having a singlet energy as low as 2.79 eV so that blue light is emitted. The formed mixed film of Compound (A5) and Compound (D1) worked as the light emitting layer. On the film formed above, a film of BALq shown in the following (Me means methyl group) having a thickness of 20 nm was formed. The film of BALq worked as the electron injecting layer. Thereafter, Li (the source of lithium: manufactured by SAES GETTERS Company) as the reducing dopant and Alq were binary vapor deposited, and an Alq/Li film having a thickness of 10 nm was formed as the second electron injecting layer (the cathode). On the formed Alq/Li film, metallic aluminum was vapor deposited to form a metal cathode, and an organic EL device was prepared.

[0075] When a direct current voltage of 5.0 V was applied to the organic EL device prepared above, blue light was efficiently emitted at a luminance of 150 cd/m² and an efficiency of the light emission of 6.7 cd/A. The chromaticity coordinates were (0.15, 0.16), and the purity of color was excellent.

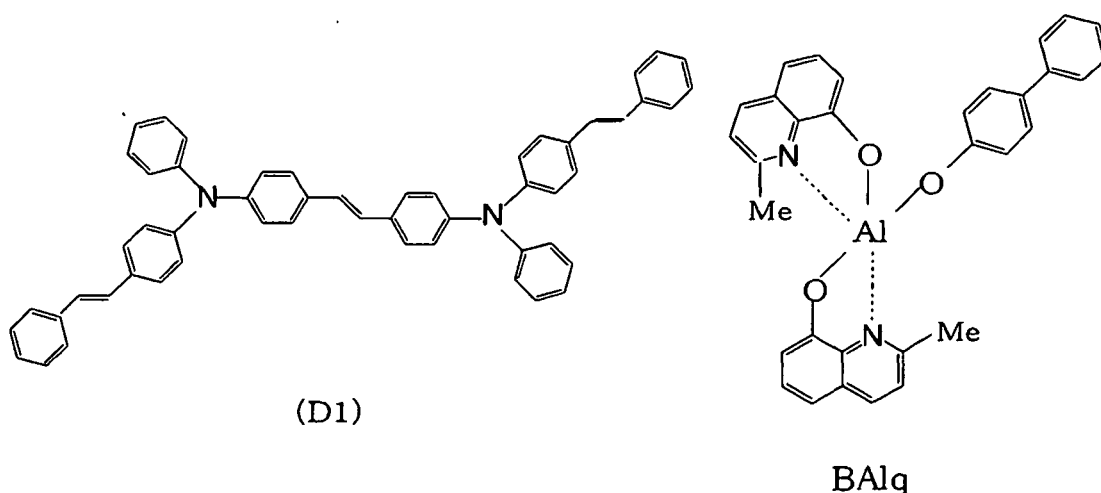


Examples 2 to 3

[0076] In accordance with the same procedures as those conducted in Example 1 except that compounds shown in Table 2 were used in place of Compound (A2), organic EL devices were prepared, and the voltage of the direct current, the luminance of the emitted light, the efficiency of the light emission, the color of the emitted light and the purity of color were measured. The results are shown in Table 2.

Comparative Example 1

[0077] In accordance with the same procedures as those conducted in Example 1 except that a conventional compound BCz shown in the following was used in place of Compound (A2), an organic EL device was prepared, and the voltage of the direct current, the luminance of the emitted light, the efficiency of the light emission, the color of the emitted light and the purity of color were measured. The results are shown in Table 2.

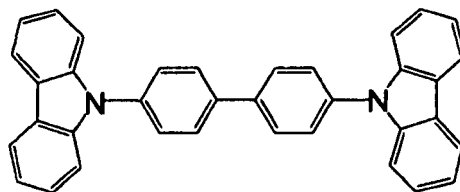

BCz

Table 2

	Organic host material of light emitting layer	Voltage (V)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Color of emitted light	Chromaticity coordinates
Example 1	A2	5.0	150	6.7	blue	(0.15, 0.16)
Example 2	A14	6.0	130	5.5	blue	(0.14, 0.16)
Example 3*	A33	7.0	161	6.9	blue	(0.15, 0.16)
Comparative Example 1	BCz	8.5	120	3.4	blue	(0.14, 0.16)

*: not part of the invention


[0078] As shown in Table 2, in comparison with the organic EL device of Comparative Example 1 using the conventional compound BCz, the organic EL devices using the compounds of the present invention could be driven at lower voltages and emitted blue light in greater efficiencies. Since the energy gap of the compounds of the present invention is great, the light emitting molecule having a great energy gap could be mixed into the light emitting layer and used for the light emission.

Example 4 (not part of the invention)




[0079] A glass substrate of 25 mm × 75 mm × 1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of copper phthalocyanine (CuPc shown in the following) having a thickness of 10 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of CuPc worked as the hole injecting layer. On the formed film of CuPc, a film of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (α -NPD shown in the following) having a thickness of 30 nm was formed. The formed film of α -NPD worked as the hole transporting layer. On the formed film of α -NPD, a film of the above Compound (A46) as the host material having a thickness of 30 nm was formed by vapor deposition, and the light emitting layer was formed. At the same time, tris(2-phenylpyridine)iridium (Ir(ppy)₃ shown in the following) as the phosphorescent Ir metal complex dopant was added. The concentration of Ir(ppy)₃ in the light emitting layer was set at 5% by weight. This layer worked as the light emitting layer. On the film formed above, a film of (1,1'-bis(phenyl)-4-olato)bis-(2-methyl-8-quinolinolato)aluminum (BALq) having a thickness of 10 nm was formed. The BALq film worked as the hole barrier layer. On the film formed above, a film of an aluminum complex of 8-hydroxyquinoline (Alq shown in the following) having a thickness of 40 nm was formed. The Alq film worked as the electron injecting layer. Thereafter, LiF as the alkali metal halide was vapor deposited in an amount such that the formed film had a thickness of 0.2 nm, and then aluminum was vapor deposited in an amount such that the formed film had a

thickness of 150 nm. The formed Alq/Li film worked as the cathode. Thus, an organic EL device was prepared.

[0080] When the obtained device was tested by passing an electric current, green light having a luminance of 100 cd/m² was emitted with the efficiency of the light emission of 44.5 cd/A at a voltage of 5.5 V and a current density of 0.22 mA/cm². The chromaticity coordinates were (0.32, 0.61).



CuPc

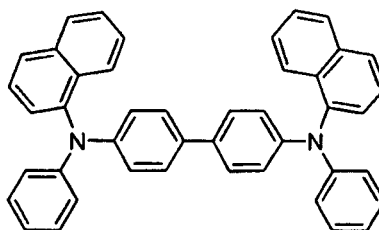 α -NPDIr(ppy)₃

Alq

Example 5


[0081] In accordance with the same procedures as those conducted in Example 4 except that Compound (A45) was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device were prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.

Comparative Example 2

[0082] In accordance with the same procedures as those conducted in Example 4 except that a conventional compound BCz shown above was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.

Comparative Example 3

[0083] In accordance with the same procedures as those conducted in Example 4 except that Compound (A-10) shown in the following which is described in United States Patent Application Laid-Open No. 2002-0028329A1 was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device was prepared and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.



A-10

Table 3 - 1

	Organic host material in light emitting layer	Triplet energy gap (eV)	Singlet energy gap (eV)
Example 4*	A46	2.8	3.3
Example 5	A45	2.8	3.2
Comparative Example 2	BCz	2.8	3.6
Comparative Example 3	A-10	3.1	3.7

*: not part of the invention

Table 3 - 2

	Voltage (V)	Current density (mA/cm ²)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Chromaticity coordinates (x, y)
Example 4	5.5	0.22	100	44.5	(0.32, 0.61)
Example 5	5.7	0.23	97	41.8	(0.32, 0.61)
Comparative Example 2	5.4	0.31	101	32.6	(0.32, 0.61)
Comparative Example 3	5.9	0.32	100	31.8	(0.32, 0.61)


[0084] As shown in Table 3, in comparison with the organic EL devices of Comparative Examples 2 and 3 using conventional compounds (BCz and A-10), the organic EL devices using the compounds of the present invention emitted green light in greater efficiencies. Since the energy gap of the compounds of the present invention was great, the light emitting molecules having great energy gaps could be mixed into the light emitting layer and used for the light emission.

Example 6 (not part of the invention)

[0085] A glass substrate of 25 mm×75 mm×1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of phthalocyanine copper (CuPc) having a thickness of 10 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of CuPc worked as the hole injecting layer. On the formed film of CuPc, a film of 1,1'-bis[4-N,N-di(para-tolyl)amino-phenyl]cyclohexane (TPAC shown in the following) having a thickness of 30 nm was formed. The formed film of TPAC worked as the hole transporting layer. On the formed film of TPAC, a film of the above Compound (A46) having a thickness of 30 nm was formed by vapor deposition, and the light emitting layer was formed. At the same time, Ir bis[(4,6-difluorophenyl)pyridinato-N,C^{2'}]picolinate (FIrpic shown in the following) as the phosphorescent Ir metal complex was added. The concentration of FIrpic in the light emitting layer was set at 7% by weight. The formed film worked as the light emitting layer. On the film formed above, a film of

the aluminum complex of 8-hydroxyquinoline (Alq) having a thickness of 30 nm was formed. The film of Alq worked as the electron injecting layer. Thereafter, Li as the alkali metal halide was vapor deposited, and a film having a thickness of 0.2 nm was formed. Then, aluminum was vapor deposited, and a film having a thickness of 150 nm was formed. The formed Alq/Li film worked as the cathode. An organic EL device was prepared as described above.

[0086] When the obtained device was tested by passing an electric current, blue light having a luminance of 99 cd/m² was emitted with the efficiency of the light emission of 22.4 cd/A at a voltage of 6.4 V and a current density of 0.44 mA/cm². The chromaticity coordinates were (0.17, 0.39).

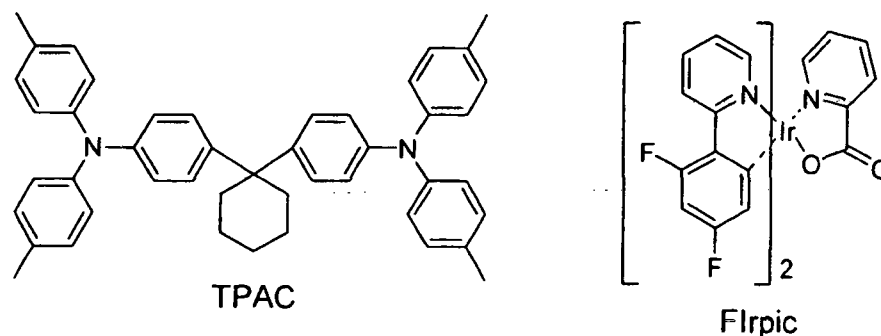

Example 7

[0087] In accordance with the same procedures as those conducted in Example 6 except that Compound (A45) was used as the host material in the light emitting layer in place of Compound (A46), an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Comparative Example 4

[0088] In accordance with the same procedures as those conducted in Example 6 except that the above conventional compound BCz was used as the host material in the light emitting layer in place of Compound (A46), an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Comparative Example 5

[0089] In accordance with the same procedures as those conducted in Comparative Example 4 except that α -NPD was used for the hole transporting layer in place of the compound (TPAC) and BAQ was used for the electron injecting layer in place of the compound Alq, an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Table 4 - 1

	Organic host material in light emitting layer	Triplet energy gap (eV)	Singlet energy gap (eV)
Example 6*	A46	2.8	3.3
Example 7	A45	2.8	3.2
Comparative Example 4	BCz	2.8	3.6
Comparative Example 5	BCz	2.8	3.6
*: not part of the invention			

Table 4 - 2

	Voltage (V)	Current density (mA/cm ²)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Chromaticity coordinates (x, y)
Example 6	6.4	0.44	99	22.4	(0.17, 0.39)
Example 7	6.8	0.55	99	18.2	(0.17, 0.39)
Comparative Example 4	7.8	1.70	98	5.80	(0.16, 0.37)
Comparative Example 5	7.6	1.09	99	9.15	(0.17, 0.37)

[0090] As shown in Table 4, in comparison with the organic EL devices of Comparative Examples using the conventional compound BCz, the organic EL devices using the compounds of the present invention could be driven at lower voltages and emitted blue light in greater efficiencies. Since the energy gap of the compound of the present invention was great, the light emitting molecules having great energy gaps could be mixed into the light emitting layer and used for the light emission.

INDUSTRIAL APPLICABILITY





[0091] As described above in detail, by utilizing the material for organic electroluminescence devices comprising the compound of the present invention, the organic electroluminescence device emitting blue light having an excellent purity of color at a high efficiency of light emission can be obtained. Therefore, the organic electroluminescence device of the present invention is very useful as the light source for various electronic instruments.





Claims

1. A material for organic electroluminescent devices which comprises a compound represented by following general formula (1):



wherein the compound represented by general formula (1) is a compound represented by any one of following general formulae (4) to (10):





wherein Cz represents a carbazolyl group which is unsubstituted or substituted with a substituent selected from the group consisting of a chlorine atom, a bromine atom, a fluorine atom, a carbazole group, hydroxyl group, amino group, nitro group, cyano group, silyl group, trifluoromethyl group, carbonyl group, carboxyl group, alkyl groups, alkenyl groups, arylalkyl groups, aromatic groups, heteroaromatic heterocyclic groups, aralkyl groups, aryloxy groups and alkyloxy groups; and

M represents a heteroaromatic cyclic group selected from the group consisting of pyridine, pyrimidine, pyrazine, triazine, aziridine, azaindolizine, imidazole, indole, isoindole, indazole, purine, pteridine, β -carboline, quinoxaline, quinazoline, acridine, phenanthroline and phenazine which is unsubstituted or substituted with a substituent selected from the group consisting of halogen, carbazole group, hydroxyl group, amino group, nitro group, cyano group, silyl group, trifluoromethyl group, carbonyl group, carboxyl group, alkyl groups, alkenyl groups, arylalkyl groups, aromatic groups, heteroaromatic heterocyclic groups, aralkyl groups, aryloxy groups and alkyloxy groups;

a plurality of Cz may represent different groups when n represents 2 or 3; a plurality of M may represent different groups when m represents 2 or 3; M does not represent triazine group when n represents 3 and m is 1; wherein the triplet energy gap of the compound represented by general formula (1) is 2.5 to 3.3 eV; and the singlet energy gap of the compound represented by general formula (1) is 2.8 to 3.8 eV.

2. An organic electroluminescent device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode, wherein at least one layer in the organic thin film layer contains the material for organic electroluminescent devices described in Claim 1.
3. An organic electroluminescent device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode, wherein a light emitting layer contains the material for organic electroluminescent devices described in Claim 1.
4. An organic electroluminescent device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode, wherein an electron transporting layer contains the material for organic electroluminescent devices described in Claim 1.
5. An organic electroluminescent device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer and sandwiched between the cathode and the anode, wherein a hole transporting layer contains

the material for organic electroluminescent devices described in Claim 1.








6. The organic electroluminescent device according to Claim 2, wherein the material for organic electroluminescent devices is an organic host material.
7. The organic electroluminescent device according to Claim 2, which further comprises an inorganic compound layer sandwiched between at least one of the electrodes and the organic thin film layer.
8. The organic electroluminescent device according to Claim 2, which emits light by a multiplet excitation which is excitation to a triplet state or higher.


Patentansprüche

1. Material für organische Elektrolumineszenzvorrichtungen, welches eine Verbindung, welche durch die folgende allgemeine Formel (1) dargestellt wird, umfasst:



worin die Verbindung, welche durch die allgemeine Formel (1) dargestellt wird, eine Verbindung ist, welche durch irgendeine der folgenden allgemeinen Formeln (4) bis (10) dargestellt wird:



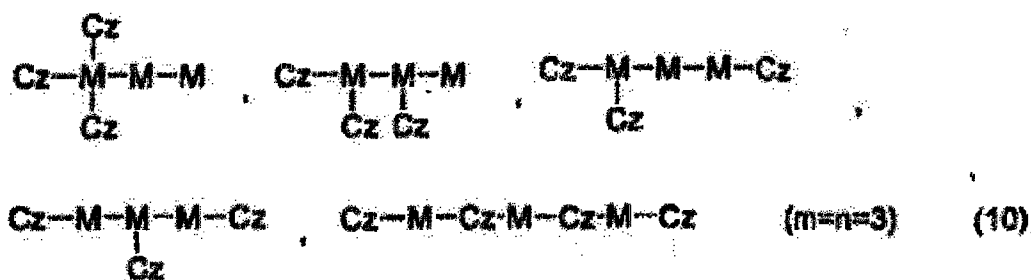

worin Cz für eine Carbazolylgruppe steht, welche unsubstituiert oder mit einem Substituenten substituiert ist, welcher ausgewählt wird aus der Gruppe, bestehend aus einem Chloratom, einem Bromatom, einem Fluoratom, einer Carbazolgruppe, einer Hydroxylgruppe, einer Aminogruppe, einer Nitrogruppe, einer Cyanogruppe, einer Silylgruppe, einer Trifluoromethylgruppe, einer Carbonylgruppe, einer Carboxylgruppe, Alkylgruppen, Alkenylgruppen, Arylalkylgruppen, aromatischen Gruppen, heteroaromatischen heterocyclischen Gruppen, Aralkylgruppen, Aryloxygruppen und Alkyloxygruppen; und

M für eine heteroaromatische cyclische Gruppe steht, welche ausgewählt wird aus der Gruppe, bestehend aus Pyridin, Pyrimidin, Pyrazin, Triazin, Aziridin, Azaindolidin, Imidazol, Indol, Isoindol, Indazol, Purin, Pteridin, β -Carbolin, Quinoxalin, Quinazolin, Acridin, Phenanthrolin und Phenazin, welche unsubstituiert oder mit einem Substituenten substituiert ist, welcher ausgewählt wird aus der Gruppe, bestehend aus einem Halogen, einer Carbazolgruppe, einer Hydroxylgruppe, einer Aminogruppe, einer Nitrogruppe, einer Cyanogruppe, einer Silylgruppe, einer Trifluoromethylgruppe, einer Carbonylgruppe, einer Carboxylgruppe, Alkylgruppen, Alkenylgruppen, Arylalkylgruppen, aromatischen Gruppen, heteroaromatischen heterocyclischen Gruppen, Aralkylgruppen, Aryloxygruppen und Alkyloxygruppen;

eine Vielzahl von Cz kann unterschiedliche Gruppen darstellen, wenn n für 2 oder 3 steht; und eine Vielzahl von M kann unterschiedliche Gruppen darstellen, wenn m für 2 oder 3 steht; M steht nicht für eine Triazingruppe, wenn n für 3 steht und m 1 ist;

worin der Triplett-Bandenabstand der Verbindung, welche durch die allgemeine Formel (1) dargestellt wird, 2,5 bis 3,3 eV beträgt; und der Singulett-Bandenabstand der Verbindung, welche durch die allgemeine Formel (1) dargestellt wird, 2,8 bis 3,8 eV beträgt.

2. Organische Elektrolumineszenzvorrichtung, welche eine Kathode, eine Anode und eine organische Dünnschicht, welche mindestens eine Schicht umfasst und zwischen der Kathode und der Anode eingeklemmt ist, umfasst, worin mindestens eine Schicht in der organischen Dünnschicht das Material für organische Elektrolumineszenzvorrichtungen nach Anspruch 1 enthält.
3. Organische Elektrolumineszenzvorrichtung, welche eine Kathode, eine Anode und eine organische Dünnschicht, welche mindestens eine Schicht umfasst und zwischen der Kathode und der Anode eingeklemmt ist, umfasst, worin eine Licht emittierende Schicht das Material für organische Elektrolumineszenzvorrichtungen nach Anspruch 1 enthält.
4. Organische Elektrolumineszenzvorrichtung, welche eine Kathode, eine Anode und eine organische Dünnschicht, welche mindestens eine Schicht umfasst und zwischen der Kathode und der Anode eingeklemmt ist, umfasst, worin mindestens eine Elektronen transportierende Schicht das Material für organische Elektrolumineszenzvorrichtungen nach Anspruch 1 enthält.
5. Organische Elektrolumineszenzvorrichtung, welche eine Kathode, eine Anode und eine organische Dünnschicht, welche mindestens eine Schicht umfasst und zwischen der Kathode und der Anode eingeklemmt ist, umfasst, worin eine Loch transportierende Schicht das Material für organische Elektrolumineszenzvorrichtungen nach Anspruch 1 enthält.
6. Organische Elektrolumineszenzvorrichtung nach Anspruch 2, worin das Material für organische Elektrolumineszenzvorrichtungen ein organisches Hostmaterial ist.
7. Organische Elektrolumineszenzvorrichtung nach Anspruch 2, welche des Weiteren eine anorganische Verbindungsschicht, welche zwischen mindestens einer der Elektroden und der organischen Dünnschicht eingeklemmt ist, umfasst.





8. Organische Elektrolumineszenzvorrichtung nach Anspruch 2, welche Licht durch eine Multipletanregung emittiert, welche eine Anregung auf einen Triplettzustand oder höher ist.


Revendications

1. Matériau pour des dispositifs électroluminescents organiques, qui comprend un composé représenté par la formule générale (1) suivante :



dans lequel le composé représenté par la formule générale (1) est un composé représenté par l'une des formules générales (4) à (10) suivantes :



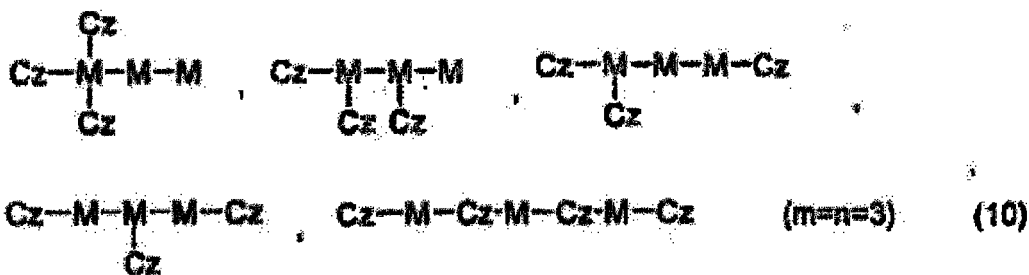

dans lesquelles Cz représente un groupe carbazolyne, qui est non substitué ou substitué par un substituant sélectionné parmi le groupe consistant en un atome de chlore, un atome de brome, un atome de fluor, un groupe carbazole, un groupe hydroxyle, un groupe amino, un groupe nitro, un groupe cyano, un groupe silyle, un groupe trifluorométhyle, un groupe carbonyle, un groupe carboxyle, des groupes alkyle, des groupes alcényle, des groupes arylalkyle, des groupes aromatiques, des groupes hétéroaromatiques hétérocycliques, des groupes aralkyle, des groupes aryloxy et des groupes alkyloxy ; et

M représente un groupe cyclique hétéroaromatique sélectionné parmi le groupe consistant en de la pyridine, de la pyrimidine, de la pyrazine, de la triazine, de l'aziridine, de l'azaindolidine, de l'imidazole, de l'indole, de l'isoindole, de l'indazole, de la purine, de la ptéridine, de la β -carboline, de la quinoxaline, de la quinazoline, de l'acridine, de la phénanthroline et de la phénazine, qui est non substitué ou substitué par un substituant sélectionné parmi le groupe consistant en de l'halogène,

un groupe carbazole, un groupe hydroxyle, un groupe amino, un groupe nitro, un groupe cyano, un groupe silyle, un groupe trifluorométhyle, un groupe carbonyle, un groupe carboxyle, des groupes alkyle, des groupes alcényle, des groupes arylalkyle, des groupes aromatiques, des groupes hétéroaromatiques hétérocycliques, des groupes aralkyle, des groupes aryloxy et des groupes alkyloxy ;

une pluralité de Cz peut représenter des groupes différents lorsque n représente 2 ou 3 ; une pluralité de M peut représenter des groupes différents lorsque m représente 2 ou 3 ; M ne représente pas un groupe triazine lorsque n représente 3 et m est 1 ;

dans lequel la lacune d'énergie de triplet du composé représenté par la formule générale (1) est 2,5 à 3,3 eV ; et la lacune d'énergie de singlet du composé représenté par la formule générale (1) est 2,8 à 3,8 eV.

2. Dispositif électroluminescent organique qui comprend une cathode, une anode et une couche organique de film mince comprenant au moins une couche et coincée entre la cathode et l'anode, dans lequel au moins une couche dans la couche organique de film mince contient le matériau pour des dispositifs électroluminescents organiques selon la revendication 1.
3. Dispositif électroluminescent organique qui comprend une cathode, une anode et une couche organique de film mince comprenant au moins une couche et coincée entre la cathode et l'anode, dans lequel une couche d'émission de la lumière contient le matériau pour des dispositifs électroluminescents organiques selon la revendication 1.
4. Dispositif électroluminescent organique qui comprend une cathode, une anode et une couche organique de film mince comprenant au moins une couche et coincée entre la cathode et l'anode, dans lequel une couche de transport des électrons contient le matériau pour des dispositifs électroluminescents organiques selon la revendication 1.
5. Dispositif électroluminescent organique qui comprend une cathode, une anode et une couche organique de film mince comprenant au moins une couche et coincée entre la cathode et l'anode, dans lequel une couche de transport des trous contient le matériau pour des dispositifs électroluminescents organiques selon la revendication 1.
6. Dispositif électroluminescent organique selon la revendication 2, dans lequel le matériau pour des dispositifs électroluminescents organiques est un matériau hôte organique.
7. Dispositif électroluminescent organique selon la revendication 2, qui comprend en outre une couche d'un composé inorganique coincée entre au moins l'un des électrodes et la couche organique de film mince.
8. Dispositif électroluminescent organique selon la revendication 2, qui émet de la lumière par une excitation de multiplet qui est une excitation à un état triplet ou supérieur.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP HEISEI81996239655 B [0004]
- JP HEISEI71995138561 B [0004]
- JP HEISEI31991200289 B [0004]
- JP 8012600 A [0006]
- JP 2001160489 A [0006]
- US 20010015614 A1 [0007]
- US 20020028329 A1 [0083]

专利名称(译)	用于有机电致发光器件的材料和使用其制造的有机电致发光器件		
公开(公告)号	EP1486550B1	公开(公告)日	2014-05-21
申请号	EP2003708594	申请日	2003-03-13
[标]申请(专利权)人(译)	出光兴产株式会社		
申请(专利权)人(译)	出光兴产股份有限公司.		
当前申请(专利权)人(译)	出光兴产股份有限公司.		
[标]发明人	IWAKUMA TOSHIHIRO HOSOKAWA CHISHIO IKEDA HIDE TSUGU TOMITA SEIJI ARAKANE TAKASHI		
发明人	IWAKUMA, TOSHIHIRO HOSOKAWA, CHISHIO IKEDA, HIDE TSUGU TOMITA, SEIJI ARAKANE, TAKASHI		
IPC分类号	C09K11/06 H05B33/14 H05B33/22 C07D401/04 C07D403/04 C07D471/04 C07D401/14 C07F15/00 H01L51/00 H01L51/50 C07D403/14 H01L51/30		
CPC分类号	C07D401/04 C07D401/14 C07D403/04 C07D403/14 C07D471/04 C07F15/0033 C09K11/06 C09K2211 /1007 C09K2211/1011 C09K2211/1029 C09K2211/1044 C09K2211/1059 H01L51/0059 H01L51/0067 H01L51/0072 H01L51/0081 H01L51/0085 H01L51/5012 H01L51/5016 H01L51/5048 H01L2251/308 Y10S428/917		
优先权	2002071398 2002-03-15 JP		
其他公开文献	EP1486550A1 EP1486550A4		
外部链接	Espacenet		

摘要(译)

一种电致发光器件材料，包括其中具有氮的杂环基团与卟啉基键合的化合物和具有至少一个夹在阴极和阳极之间的有机薄膜层的有机电致发光器件，并含有上述材料。提供至少一层。该材料可以提供发出具有高纯度颜色的蓝色光的有机电致发光器件。有机电致发光器件使用该材料。

