



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.06.2010 Bulletin 2010/24

(51) Int Cl.:
H05B 33/26 (2006.01) H05B 33/14 (2006.01)

(21) Application number: **10151944.5**

(22) Date of filing: **22.04.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **24.04.2003 JP 2003119305**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
04728924.4 / 1 633 169

(71) Applicant: **IDEMITSU KOSAN CO., LTD.**
Tokyo 100-8321 (JP)

(72) Inventor: **Kuma, Hitoshi**
Sodegaura-shi, Chiba 2990293 (JP)

(74) Representative: **Gille Hrabal Struck Neidlein Prop Roos**
Patentanwälte
Brucknerstrasse 20
40593 Düsseldorf (DE)

Remarks:


This application was filed on 28-01-2010 as a divisional application to the application mentioned under INID code 62.

(54) **Organic electroluminescent device and display**

(57) An organic EL device and a display with excellent viewing-angle properties and high efficiency are provided. An organic electroluminescent device (1) comprising: a transparent electrode (12), a counter electrode (14) arranged opposite to the transparent electrode (12), one or more intermediate conductive layers

(30, 32 and 34) and one or more organic emitting layers (20, 22, 24 and 26) arranged between the transparent electrode (12) and the counter electrode (14), wherein the difference between n_a and n_n is 0.2 or less when n_a is the refractive index of the intermediate conductive layer (30) and n_b is the refractive index of the organic emitting layer (20).

Fig.1

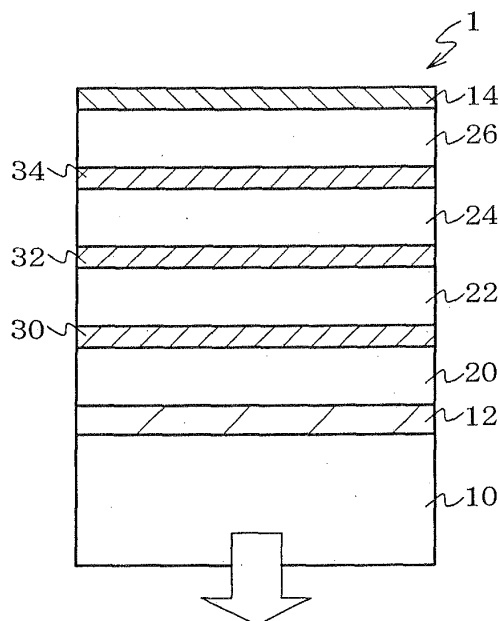

Description

Technical Field

5 **[0001]** The invention relates to an organic electroluminescent device and display.

Background Art

10 **[0002]** In order to make an organic electroluminescence (EL) device have a longer durability and higher efficiency, there is a technique of stacking a plurality of units, a unit being cathode/organic EL device/anode (for example, JP-A-H6-176870, JP-A-H11-312584 and JP-A-H11-312585).

[0003] Such a device requires a lower current density than a device having one unit to obtain the same luminance. The device with plural units thus has a longer durability.

15 However the technique has the following problem. An electrode must be extracted from an injection electrode arranged between adjacent organic emitting layers, resulting in complicated wiring and substantial loss in electric power due to the wiring resistance.

[0004] As a technique for avoiding the problem, there is used an intermediate electrode with a hole-injection surface and the electron-injection surface opposed thereto, thereby eliminating the need of an intermediate extraction electrode (for example, JP-A-H11-329748 and JP-A-2003-45676).

20 **[0005]** However the technique has a problem that the color of emitted light observed from the front of a device is different from that observed obliquely, i.e., a high dependency on viewing angle. It also has a problem of an insufficient luminous efficiency.

[0006] In view of the above problems, an object of the invention is to provide an organic EL device and a display with good viewing-angle properties and high efficiency.

25

Disclosure of the Invention

30 **[0007]** For the structure of an intermediate conductive layer, JP-A-H11-329748 discloses laminates of a metal thin film and transparent electrode, and JP-A-2003-45676 discloses laminates of metal, and conductive inorganic compound and/or dielectric material. The inventors have studied these structures in detail and found the following. For example, when using a conductive inorganic compound, the refractive index thereof is larger than that of an organic emitting layer, thereby degrading the viewing-angle properties. When laminating a metal film, the luminous efficiency is reduced due to the large absorption coefficient thereof.

35 **[0008]** Further in order to solve the subject of enhancing the viewing-angle properties and luminous efficiency, the inventors have found the following. A difference in refractive index between intermediate conductive layer and an organic emitting layer as small as 0.2 or less can suppress a change in chromaticity to a degree that a user cannot feel the change even when observing the emission device obliquely.

40 **[0009]** According to a first embodiment of the invention, there is provided an organic EL device comprising: a transparent electrode, a counter electrode arranged opposite to the transparent electrode, one or more intermediate conductive layers and one or more organic emitting layers arranged between the transparent electrode and the counter electrode, wherein the difference between n_a and n_b is 0.2 or less when n_a is the refractive index of an intermediate conductive layer and n_b is the refractive index of an organic emitting layer.

45 **[0010]** According to a second embodiment of the invention, there is provided an organic EL device comprising: a transparent electrode, a counter electrode arranged opposite to the transparent electrode, one or more intermediate conductive layers and a plurality of organic emitting layers sandwiching an intermediate conductive layer therebetween, the intermediate conductive layers and the organic emitting layers arranged between the transparent electrode and the counter electrode, wherein the difference between n_a , and n_b and/or n_c is 0.2 or less when n_a is the refractive index of an intermediate conductive layer, n_b is the refractive index of a first organic emitting layer and n_c is the refractive index of a second organic emitting layer, the intermediate conductive layer sandwiched between the first and second organic emitting layers.

50 **[0011]** In these organic EL devices, the difference between n_a , and n_b and/or n_c is preferably 0.15 or less. n_b and n_c may be the same as each other.

55 **[0012]** The intermediate conductive layer can be a laminate of a layer which has a refractive index larger than n_b and/or n_c , and a layer which has a refractive index smaller than n_b and/or n_c . The laminate may be made of 2 or 3 or more layers.

[0013] Alternatively, the intermediate conductive layer can be a layer comprising a mixture of a material which has a refractive index larger than n_b and/or n_c , and a material which has a refractive index smaller than n_b and/or n_c .

[0014] According to a third embodiment of the invention, there is provided a display comprising the above mentioned

organic EL device of the first or second embodiments.

Brief Description of the Drawings

[0015]

Fig. 1 is a view showing an embodiment of the organic EL device according to the invention;

Fig. 2 is a partially enlarged view of Fig. 1;

Fig. 3 is a view showing another embodiment of the organic EL device according to the invention.

Best Mode for Carrying out the Invention

[0016] The invention will be described below.

[0017] Fig. 1 is a view showing an embodiment of the organic EL device according to the invention. The organic EL device is an example of stacking four organic emitting layers.

[0018] In this organic EL device 1, a transparent anode (transparent electrode) 12 is provided on a supporting substrate 10 and a cathode (counter electrode) 14 is arranged opposite to the transparent electrode 12. The organic emitting layers 20, 22, 24 and 26 and intermediate conductive layers 30, 32 and 34 are provided between the transparent anode 12 and the cathode 14 such that one intermediate conductive layer is interposed between two organic emitting layers. The light emitted from the organic emitting layers 20, 22, 24 and 26 is taken out from the supporting substrate 10 through the transparent anode 12.

[0019] Fig. 2 is a partially enlarged view of the organic emitting layers 22 and 24 and the intermediate conductive layer 32 therebetween as shown in Fig. 1.

[0020] The organic emitting layers 22 and 24 each are made of a hole injection layer 200, an emitting layer 202 and an electron injection layer 204. Holes supplied from the hole injection layer 200 and electrons supplied from the electron injection layer 204 are recombined with each other in the emitting layer 202 to emit light. The intermediate conductive layer 32 has the hole-injecting surface facing the organic emitting layer 24 and the electron-injecting surface facing the organic emitting layer 22.

[0021] Referring again to Fig. 1, the refractive index of any one of the intermediate conductive layers, for example, the refractive index of the intermediate conductive layer 32 is represented by n_a , and the organic emitting layers (first and second organic emitting layer) 22 and 24 sandwiching the intermediate conductive layer 32 are represented by n_b and n_c , respectively. These refractive indices satisfy at least one of the following relations.

$$(i) |n_a - n_b| < 0.2$$

$$(ii) |n_a - n_c| < 0.2$$

$$(iii) |n_a - n_b| < 0.2 \text{ and } |n_a - n_c| < 0.2$$

[0022] They preferably satisfy the relation (iii).

[0023] All combinations of two organic emitting layers sandwiching an intermediate conductive layer and the intermediate conductive layer preferably satisfy at least one of the above relations.

[0024] In order to efficiently take out light from an organic emitting layer to the outside, the absorption coefficient of the intermediate conductive layer 32 is preferably 2.5 ($1/\mu\text{m}$) or less. The absorption coefficient of all the intermediate conductive layers 30, 32 and 34 is more preferably 2.5 ($1/\mu\text{m}$) or less.

[0025] Four layers of the organic emitting layers 20, 22, 24 and 26 and three layers of the intermediate conductive layers 30, 32 and 34 are the same as or different from each other.

[0026] Although four organic emitting layers are stacked in this embodiment, two, three, or five or more organic emitting layers may be stacked.

[0027] Although a transparent electrode is an anode in this embodiment, the transparent electrode may be a cathode.

[0028] Fig. 3 is a view showing another embodiment of an organic EL device according to the invention.

[0029] The organic EL device 2 is an example where only one organic emitting layer is formed. That is, the invention can be applied to a device with only one organic emitting layer.

[0030] In this organic EL device 2, a transparent anode (transparent electrode) 12 is provided on a supporting substrate 10 and a cathode (counter electrode) 14 is arranged opposite to the transparent electrode 12. One intermediate conductive layer 30 and one organic emitting layer 20 are laminated sequentially on the transparent anode 12 between the anode 12 and the cathode 14. The light emitted from the organic emitting layer 20 is taken out from the supporting substrate 10 through the transparent anode 12.

[0031] The organic emitting layer 20 and intermediate conductive layer 30 may be formed on the transparent anode 12 in this order.

[0032] In the case where an organic emitting layer or an intermediate conductive layer is a laminate, the refractive indices of the organic emitting layer and intermediate conductive layer are defined as an equivalent refractive index.

[0033] For example, in the case where an intermediate conductive layer is a laminate of a film made of a material having a high refractive index and a film made of a material having a low refractive index, the refractive index to light of wavelength λ of intermediate conductive layer is defined as follows. The thickness of the film of high-refractive-index material is represented by d_1 , the refractive index thereof is represented by n_1 , the thickness of the film of low-refractive-index material is represented by d_2 , and the refractive index thereof is represented by n_2 . Further the amounts δ_1 and δ_2 are defined as shown in the equations (1).

$$\delta_1 = 2\pi n_1 d_1 / \lambda \quad (1)$$

$$\delta_2 = 2\pi n_2 d_2 / \lambda$$

[0034] Further the 2x2 matrix M is defined as shown in the equation (2).

$$\begin{aligned} \mathbf{M} &= \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix} \\ &= \begin{pmatrix} \cos \delta_1 & i \cdot \frac{\sin \delta_1}{n_1} \\ i \cdot n_1 \cdot \sin \delta_1 & \cos \delta_1 \end{pmatrix} \begin{pmatrix} \cos \delta_2 & i \cdot \frac{\sin \delta_2}{n_2} \\ i \cdot n_2 \cdot \sin \delta_2 & \cos \delta_2 \end{pmatrix} \begin{pmatrix} \cos \delta_1 & i \cdot \frac{\sin \delta_1}{n_1} \\ i \cdot n_1 \cdot \sin \delta_1 & \cos \delta_1 \end{pmatrix} \quad (2) \end{aligned}$$

[0035] At this time, the equivalent refractive index N of the laminated film is defined as shown in the equation (3).

$$N = \sqrt{\frac{m_{21}}{m_{12}}} \quad (3)$$

[0036] The refractive index of an organic emitting layer can be defined as an equivalent refractive index using the refractive indices of a hole injecting material, an emitting material and an electron injecting material, which constituting the organic emitting layer, in a similar way to the equations (1) to (3). Many of these materials constituting an organic emitting layer have a refractive index of about 1.7 to about 1.8. As a result, the organic emitting layer has a refractive index of about 1.7 to about 1.8.

[0037] Thus an intermediate conductive layer preferably has a refractive index of from 1.5 to 2.0.

[0038] Each member constituting an organic EL device will be described below.

1. Supporting substrate

[0039] The supporting substrate is a member for supporting the organic EL device, TFT and the like. Therefore the substrate is preferably excellent in mechanical strength and dimension stability. Such a substrate include glass plates, metal plates, ceramic plates and plastic plates such as polycarbonate resins, acrylic resins, vinyl chloride resins, polyethylene terephthalate resins, polyimide resins, polyester resins, epoxy resins, phenol resins and silicon resins, fluorine-containing resins.

[0040] In order to avoid the invasion of moisture into the organic EL display, the substrate made of these materials is preferably subjected to a moisture proof treatment or hydrophobic treatment by forming an inorganic film or applying a fluorine-containing resin. In particular, in order to avoid the invasion of moisture into the organic luminescent medium,

the substrate preferably has a small water content and gas permeability coefficient.

[0041] Specifically, preferred water content and gas permeability coefficient are 0.0001% by weight or less and 1×10^{-13} cc·cm/cm²·sec·cmHg or less, respectively. In order to take out light from the side of the supporting substrate, the transmittance of supporting substrate to the visible light is preferably 50% or more in this embodiment. However, when taking out light from the opposite side, that is, the cathode side, the supporting substrate is not necessarily transparent.

2. Transparent anode

[0042] A transparent anode is preferably made of a metal, alloy electroconductive compound or mixture thereof with a large work function (i.e. 4.0 eV or more). Specifically Indium Tin Oxide (ITO), CuIn, Sn, ZnO, Au, Pt and Pd may be used solely, or in combination of two kinds or more.

[0043] Although not specially limited, the thickness of the anode is preferably from 10 nm to 1000 nm, more preferably from 10 to 200 nm. In order to take out light from an organic emitting layer to the outside, the transparent electrode is essentially transparent. More specifically, it preferably has a transmittance of 50% or more.

3. Cathode

[0044] A cathode is preferably made of a metal, alloy electroconductive compound or mixture thereof with a small work function (i.e. less than 4.0 eV). Specifically Mg, Al, In, Li, Na, Cs and Ag may be used solely, or in combination of two kinds or more.

[0045] Although not specially limited, the thickness of the cathode is preferably from 10 nm to 1000 nm, more preferably from 10 to 200 nm.

[0046] When using a cathode as a transparent electrode, transparent materials are selected among the above materials.

4. Organic emitting layer

[0047] The organic emitting layer can be defined as a layer containing an organic luminescent medium wherein electrons and holes are recombined with each other, thereby allowing EL emission. This organic emitting layer can be made, for example, by laminating the following layers (a) to (g) on an anode:

- (a) Organic luminescent medium
- (b) Hole injection layer/organic luminescent medium
- (c) Organic luminescent medium/electron injection layer
- (d) Hole injection layer/organic luminescent medium/electron injection layer
- (e) Organic semiconductor layer/organic luminescent medium
- (f) Organic semiconductor layer/electron barrier layer/organic luminescent medium
- (g) Hole injection layer/organic luminescent medium/adhesion improving layer

[0048] Among these (a) to (g), the structure (d) is usually preferably used since it can give a higher luminescent brightness and is also superior in durability.

[0049] Examples of luminous materials of the organic luminescent medium include only one or combinations of two or more selected from p-quaterphenyl derivatives, p-quinquephenyl derivatives, benzotiazole compounds, benzoimidazole compounds, benzoxazole compounds, metal-chelated oxynoid compounds, oxadiazole compounds, styrylbenzene compounds, distyrylpyrazine derivatives, butadiene compounds, naphthalimide compounds, perylene derivatives, al-dazine derivatives, pyraziline derivatives, cyclopentadiene derivatives, pyrrolopyrrole derivatives, styrylamine derivatives, coumarin compounds, aromatic dimethyldiyne-based compounds, metal complexes having an 8-quinolinol derivative as a ligand, and polyphenyl compounds.

[0050] Among these organic luminous materials, 4,4'-bis(2,2-di-t-butylphenylvinyl)biphenyl, 4,4'-bis(2,2-diphenylvinyl)biphenyl, and derivatives thereof, as aromatic dimethyldiyne compounds, are more preferable.

[0051] Furthermore, it is preferred to use together a material where an organic luminous material having a distyrylarylene skeleton or the like, as a host material, is doped with a fluorescent dye giving intense from blue to red fluorescence, for example, a coumarin material, or a fluorescent dye similar to that used as a host, as a dopant. More specifically, it is preferred to use 4, 4' -bis (2, 2-diphenylvinyl) biphenyl or the like as a host and N,N-diphenylaminobenzene as a dopant.

[0052] Suitable known materials described in JP-A-2002-097812 and the like can also be selected for use as a luminous material.

[0053] Compounds having a hole mobility of 1×10^{-6} cm²/v·s or more measured at an applied voltage of 1×10^4 to 1×10^6 V/cm and an ionization energy of 5.5 eV or less are preferably used in a hole injection layer. Such a hole injection

layer enables good hole injection into an organic emitting layer, thereby enhancing a high luminescent brightness or allowing low voltage drive.

[0054] Examples of a constituent material for the hole injection layer include porphyrin compounds, aromatic tertiary amine compounds, styrylamine compounds, aromatic dimethyldine compounds, condensed aromatic ring compounds and organic compounds such as 4,4-bis[N-(1-naphthyl)-N-phenylamino]biphenyl and 4,4',4"-tris[N-(3-methylphenyl)-N-phenylamino]triphenylamine.

[0055] Inorganic compounds such as p-type Si and P-type SiC are preferably used as a constituent material for the hole injection layer. It is also preferred that an organic semiconductive layer having an electrical conductivity of 1×10^{-10} S/cm or more is formed between the above hole injection layer and an anode, or between the above hole injection layer and an organic emitting layer. Such an organic semiconductive layer enables better hole injection into an organic emitting layer.

[0056] Compounds having an electron mobility of 1×10^{-6} cm²/V·s or more measured at an applied voltage of 1×10^4 to 1×10^6 V/cm and an ionization energy more than 5.5 eV are preferably used in an electron injection layer.

[0057] Such an electron injection layer enables good electron injection into an organic luminescent medium, thereby enhancing a luminescent brightness or allowing low voltage drive. Examples of a constituent material for the electron injection layer include 8-hydroxyxinoine metal complexes such as Al chelate: Alq, derivatives thereof or oxadiazole derivatives.

[0058] An adhesion improving layer is a form of the electron injection layer. That is, it is a special layer comprising a material with good adhesion properties to a cathode among electron injection layers. The adhesion improving layer is preferably made of a material such as 8-hydroxyxinoine metal complexes or derivatives thereof. It is also preferred that an organic semiconductor layer with an electric conductivity of 1×10^{-10} S/cm or more is formed in contact with the above electron injection layer. Such an organic semiconductor layer enables good electron injecting into an organic emitting layer.

[0059] For the thickness of the organic emitting layer, it may be preferably in the range of 5 nm to 5 μm. If the thickness is below 5 nm, the luminescent brightness and durability thereof may deteriorate, while if it is over 5 μm, the value of the voltage to be applied may become high. Therefore, the thickness of the organic luminescent medium is more preferably 10 nm to 3 μm, and still more preferably 20 nm to 1 μm.

5. Intermediate conductive layer

[0060] An intermediate conductive layer may be interposed between adjacent organic emitting layers as shown in Fig. 2 or may be adjacent to an organic emitting layer as shown in Fig. 3. Various layers can be used as an intermediate conductive layer that have opposing surfaces, and holes can be injected from a surface and electrons can be injected from the other surface.

[0061] Materials constituting an intermediate conductive layer include oxides, nitrides, iodides and borides of metals such as In, Sn, Zn, Ti, Zr, Hf, V, Mo, Cu, Ga, Sr, La and Ru. In addition multi-metallic compounds made of a plurality of these metals. Specifically there can be used transparent conductive materials such as ITO, IZO, SnO_x, ZnO_x, TiN, ZrN, HfN, TiO_x, VO_x, MoO_x, CuI, InN, GaN, CuAlO₂, CuGaO₂, SrCu₂O₂, LaB₆ and RuO_x. Of these, transparent conductive metal oxides such as ITO, IZO, SnO_x, ZnO_x, TiO_x, VO_x, MoO_x and RuO_x are preferably used.

[0062] In the invention, the difference in refractive index between an intermediate conductive layer and an organic emitting layer is 0.2 or less to improve the viewing-angle properties of a luminescence device. Thus a film containing a material having a low refractive index and the transparent conductive material stated above can be used so far as it does not impair the electron injecting property of an intermediate conductive layer.

[0063] As the material having a low refractive index, inorganic compounds such as metal oxides and metal halides, and organic compounds such as fluoride resins can be used. The metal oxides include SiO_x. The metal halides include metal fluorides such as NaF, LiF, CaF₂, Na₃AlF₆, AlF₃, MgF₂, ThF₄, LaF₄ and NdF₃.

[0064] In order to prepare an intermediate conductive layer as a film containing a material having a low refractive index and a transparent conductive material, it is preferred that these materials are mixed to form a film or otherwise a film made of a material having a low refractive index and a film made of a transparent conductive material are laminated.

[0065] For example a film can be used which is made of a mixture of a material having a low refractive index such as metal halides, e.g., metal fluorides represented by LiF and a transparent conductive material. A multi-layer laminate can also be used in which a metal fluoride and a transparent conductive material are laminated.

[0066] An intermediate conductive layer where a material having a low refractive index such as metal halides and a transparent conductive material are mixed can be produced as follows. For example two deposition sources are prepared. Materials are each mounted in the sources and co-deposited, thereby forming the film. The refractive index can be adjusted by each deposition rate of the materials. In the case where a material having a low refractive index is a metal halide such as LiF, an increased ratio is not preferred since the conductivity of an intermediate conductive layer may be degraded and the mixture may be inhomogeneous. Specifically the ratio of a metal halide in a film is preferably less than

0.6.

[0067] In the case of laminating a film of a transparent conductive material and a film of a material having a low refractive index, any laminate structure can be used that maintains the function of injecting charges, electrons and holes, required for an intermediate conductive layer. Preferred is the three-layer structure of transparent conductive material/low refractive index material/transparent conductive material. The thickness ratio of the low refractive index material film to the entire intermediate conductive layer is preferably less than 0.6.

[0068] In order to efficiently take light from an organic emitting layer to the outside, the absorption coefficient of an intermediate conductive layer relative to visible light is preferably 2.5 ($1/\mu\text{m}$) or less, more preferably 2.2 ($1/\mu\text{m}$) or less. In the case where the absorption coefficient is 2.5 ($1/\mu\text{m}$) or less, the transmittance of an intermediate conductive layer (one layer) with a film thickness of 30 nm is 92%. The transmittance is attenuated with increases in the number of layers, e.g., 86% for two layers and 80% for three layers. However some degree of high transmittance can be maintained. Generally many of transparent conductive materials have an extinction coefficient more than 0.1, while the materials represented by LiF have an extinction coefficient of almost zero. Thus the mixture or lamination of transparent conductive material and low refractive index material reduces the absorption coefficient and enhances the luminous efficiency of the device. When an intermediate conductive layer has an absorption coefficient of 2.5 ($1/\mu\text{m}$) or less, the intermediate conductive layer preferably has an extinction coefficient of 0.1 or less.

[Examples]

[0069] Examples of the invention will be described below. The invention is not limited thereto.

(1) Preparation of glass substrate with ITO

[0070] The supporting substrate of 25mm by 75mm (OA2 glass, Nippon Electric glass Co., Ltd.) was subjected to ultrasonic cleaning with purified water and isopropyl alcohol, dried with air blow and thereafter cleaned with ultraviolet rays. Next this substrate was moved in a sputtering apparatus. An ITO film with a film thickness of 150 nm was formed on the substrate.

(2) Formation of organic emitting layer

[0071] This substrate was moved into an organic deposition device and fixed in a substrate holder. After the pressure in a vacuum vessel was reduced to 5×10^{-7} torr, a hole injection layer, an organic luminescent medium and an electron injection layer were sequentially deposited in this order.

[0072] Firstly 4,4',4"-tris(N-(3-methylphenyl)-N-phenylamino)triphenylamine (MTDATA) was deposited in a thickness of 55 nm as a hole injection layer.

[0073] Next 4,4'-bis(2,2-diphenylvinyl)biphenyl (DPVBi) of a host and 1,4-bis[4-(N,N-diphenylaminostyryl)benzene] (DPAVB) of a dopant were co-deposited in a thickness of 40 nm at a deposition speed of 0.1 to 0.3 nm/second and 0.003 to 0.008 nm/second, respectively as an organic luminescent medium.

[0074] Next tris(8-quinolinol)aluminum (Alq) was deposited in a thickness of 20 nm as an electron injection layer.

(3) Formation of intermediate conductive layer

[0075] Vanadium oxide (V_2O_5) and lithium fluoride (LiF) were prepared as a deposition source separately. V_2O_5 , LiF and V_2O_5 were sequentially deposited in a thickness of 10 nm each.

(4) Formation of organic emitting layer, intermediate conductive layer, organic emitting layer and cathode

[0076] Next, an organic emitting layer, an intermediate conductive layer and an organic emitting layer were sequentially deposited in a similar way to the above organic emitting layer and intermediate conductive layer of (1) and (2).

[0077] Next an Al film with a thickness of 150 nm was formed as a cathode to obtain an organic EL device.

(5) Measurement of refractive index of organic emitting layer and intermediate conductive layer

[0078] A hole injection layer, an organic luminescent medium and an electron injection layer were deposited on a glass substrate (OA2 glass, Nippon Electric glass Co., Ltd.) in a thickness of 0.2 micron each by the above-mentioned method of (2). Their refractive index to light with a wavelength of 500 nm was measured with an ellipsometer.

[0079] The equivalent refractive index of the organic emitting layer was determined using the film thicknesses of layers mentioned in (2) to be 1.79.

[0080] Vanadium oxide and lithium fluoride were separately formed on the glass substrate by the above-mentioned method of (3). Their refractive indices to light with a wavelength of 500 nm were measured with an ellipsometer. The equivalent refractive index of the intermediate conductive layer was determined using the film thicknesses of mentioned in (3) to be 1.95. The absorption coefficient was measured with an absorption spectrophotometer to be 2.01.

(6) Measurement of luminescent properties of organic EL device

[0081] Current was applied across the ITO and aluminum cathode at a current density of 1.4 mA/cm² to obtain blue emission. The luminance and chromaticity were measured in the front of the device with a spectral radiant luminance meter available from MINOLTA Co. Ltd. under the trademark of CS1000. The luminance was 387 nit and the chromaticity was (0.157, 0.339).

[0082] Next, the device was inclined 50° and the chromaticity was measured in the same way. The difference in chromaticity between the front direction and the viewing angle of 50° was calculated by using the equation (4) to obtain a good value of 0.025.

$$\Delta CIE = \sqrt{(CIEx_0 - CIEx_{50})^2 + (CIEy_0 - CIEy_{50})^2} \quad (4)$$

[0083] Table 1 shows the structure and evaluation results of organic EL devices prepared in Examples 1, and 2 to 5 and Comparative Examples 1 and 2 described below.

Table 1

	Organic emitting layer			Intermediate conductive layer			Measured value			
	Type (Film thickness)	Refractive Index	Number of layers	Structure, Film thickness	Refractive Index	Absorption coefficient [1/ μm]	Luminance [nit]	Front chromaticity x	Front chromaticity y	50° ΔCIE
Ex. 1	Blue emission (115nm)	1.79	3	V_2O_5 (10nm)/LiF(10nm)/ V_2O_5 (10nm)	1.95	2.01	387	0.157	0.339	0.025
Ex. 2	Blue emission (115nm)	1.79	3	V_2O_5 :LiF codposition (30nm) LiF/(V_2O_5 +LiF) deposition ratio 0.46	1.76	2.22	392	0.167	0.366	0.021
Ex. 3	Blue emission (115nm)	1.79	3	MoO_3 30nm	1.85	2.48	342	0.150	0.299	0.007
Com. Ex. 1	Blue emission (115nm)	1.79	3	V_2O_5 30nm	2.20	3.02	320	0.154	0.351	0.042
Ex. 4	White emission (115nm)	1.79	3	MoO_3 30nm	1.85	2.48	396	0.228	0.285	0.014
Ex. 5	White emission (115nm)	1.79	1	MoO_3 30nm	1.85	2.48	161	0.273	0.352	0.018
Com.Ex. 2	White emission (115nm)	1.79	1	V_2O_5 30nm	2.20	3.02	153	0.246	0.33	0.031

Example 2

[0084] An organic EL device was prepared in the same way as Example 1 except that an intermediate conductive layer was formed by co-deposition of V_2O_5 and LiF in a thickness of 30 nm. The deposition ratio of LiF to the entire intermediate conductive layer was 0.46. The intermediate conductive layer had a refractive index of 1.76 and absorption coefficient of 2.22. The luminance in the front direction of the organic EL device was 392 nit and the chromaticity thereof was (0.167, 0.366). The difference in chromaticity between the front direction and the viewing angle of 50° was a good value of 0.021.

Example 3

[0085] An organic EL device was prepared in the same way as Example 1 except that an intermediate conductive layer was a monolayer of MoO_3 film in a thickness of 30 nm. The intermediate conductive layer had a refractive index of 1.85 and absorption coefficient of 2.48. The luminance in the front direction of the organic EL device was 342 nit and the chromaticity thereof was (0.150, 0.299). The difference in chromaticity between the front direction and the viewing angle of 50° was a good value of 0.007.


Comparative Example 1


[0086] An organic EL device was prepared in the same way as Example 1 except that an intermediate conductive layer was a monolayer of V_2O_5 film in a thickness of 30 nm. The intermediate conductive layer had a refractive index of 2.20 and absorption coefficient of 3.02. The luminance in the front direction of the organic EL device was 320 nit and the chromaticity thereof was (0.154, 0.351). The difference in chromaticity between the front direction and the viewing angle of 50° was 0.042. The difference of chromaticity could be recognized by visual observation.

Example 4

[0087] An organic EL device was prepared in the same way as Example 3 except that an organic luminescent medium was a laminate of the following orange luminescent medium and blue luminescent medium. The orange luminescent medium layer was formed on the hole injection layer at the first, and the blue luminescent medium layer was then formed.


[0088] For the orange luminescent medium film, the materials represented by the following formulas (1) and (2) were deposited at a ratio of (1) to (2) of 5 to 0.01 in a thickness of 5 nm.

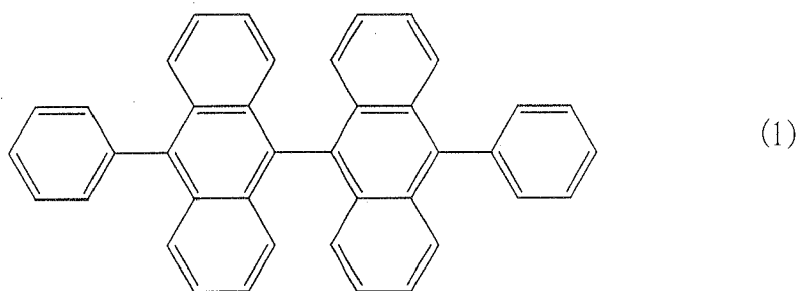

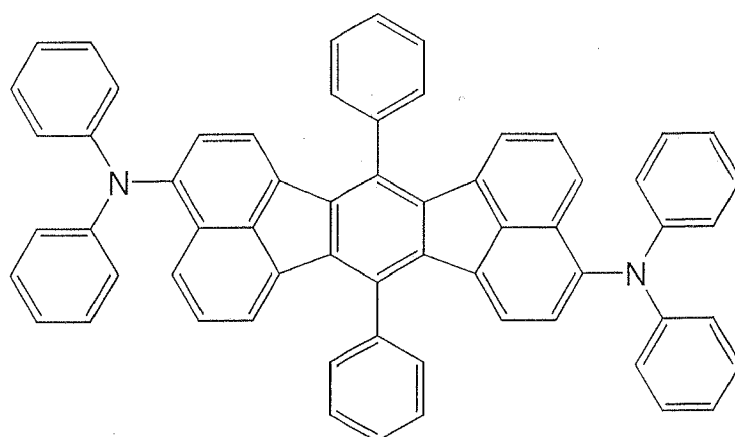

(2)

[0089] For the blue luminescent medium film, the materials represented by the above-mentioned formula (1) and the following formula (3) were deposited at a ratio of (1) to (3) of 35 to 0.8 in a thickness of 35 nm.

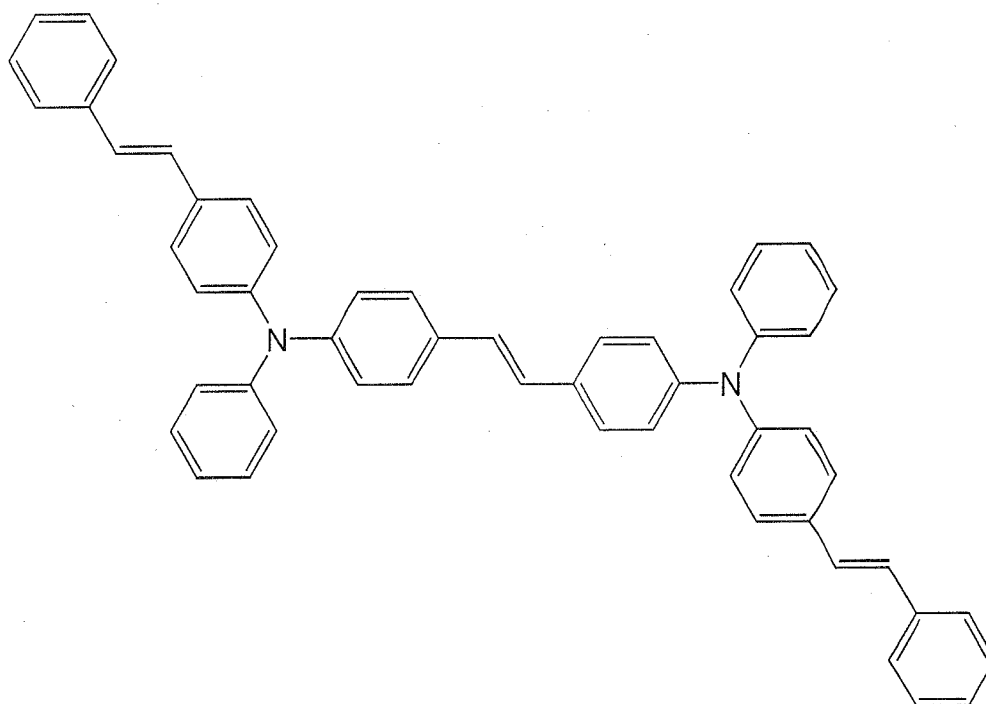

(3)

[0090] The organic emitting layer had the same refractive index of 1.79 as the other Examples. The intermediate conductive layer had a refractive index of 1.85 and absorption coefficient of 2.48. The luminance in the front direction of the organic EL device was 392 nit and the chromaticity thereof was (0.228, 0.285). The difference in chromaticity between the front direction and the viewing angle of 50° was a good value of 0.014.

Example 5

[0091] A glass substrate with a 150 nm thick ITO film prepared by the same way as Example 1 was moved into an organic deposition device. After the pressure in a vacuum vessel was reduced to 5×10^{-7} torr, an intermediate conductive layer, an organic emitting layer and a cathode were sequentially deposited.

[0092] An intermediate conductive layer was a monolayer of MoO_3 film in a thickness of 30 nm.

[0093] For an organic emitting layer, MTDATA was deposited in a thickness of 55 nm as a hole injection layer, the materials represented by the above-mentioned formulas (1) and (3) were deposited at a ratio of (1) to (3) of 10 to 0.25 in a thickness of 10 nm as a blue light emitting layer, the materials represented by the above-mentioned formulas (1)

and (2) were deposited at a ratio of (1) to (2) of 30 to 0.8 in a thickness of 30 nm as an orange light emitting layer, Alq was deposited in a thickness of 20 nm as an electron injection layer and Al was deposited in a thickness of 150 nm as a cathode in this order.

[0094] The organic emitting layer had a refractive index of 1.79. The intermediate conductive layer had a refractive index of 1.85 and absorption coefficient of 2.48. The luminance in the front direction of the organic EL device was 161 nit and the chromaticity thereof was (0.273, 0.352). The difference in chromaticity between the front direction and the viewing angle of 50° was a good value of 0.018.

Comparative Example 2

[0095] An organic EL device was prepared in the same way as Example 5 except that an intermediate conductive layer was a monolayer of V₂O₅ film in a thickness of 30 nm. The intermediate conductive layer had a refractive index of 2.20 and absorption coefficient of 3.02. The luminance in the front direction of the organic EL device was 153 nit and the chromaticity thereof was (0.246, 0.330). The difference in chromaticity between the front direction and the viewing angle of 50° was 0.031. The difference of chromaticity could be recognized by visual observation.

Industrial Utility

[0096] The invention can provide an organic EL device and a display with good viewing-angle properties and high efficiency.

[0097] The organic EL device of the invention in combination with known structure can be used in a personal TV, a large-sized display, a display of cell-phone, and various displays.

Claims

1. An organic electroluminescent device comprising:

a transparent electrode,
a counter electrode arranged opposite to the transparent electrode,
one or more intermediate conductive layers and one or more organic emitting layers arranged between the transparent electrode and the counter electrode,

wherein the difference between n_a and n_b is 0.2 or less when n_a is the refractive index to light with a wavelength of 500 nm of one of the intermediate conductive layers and n_b is the refractive index to light with a wavelength of 500 nm of an organic emitting layer adjacent the intermediate conductive layer having the refractive index n_a , the intermediate conductive layer being a stack of a film made of a material having a refractive index lower than n_b and a film made of a transparent conductive material selected from SnO_x, ZnO_x, TiN, ZrN, HfN, TiO_x, VO_x, MoO_x, CuI, InN, GaN, CuAlO₂, CuGaO₂, SrCu₂O₂, LaB₆ and RuO_x.

2. The organic electroluminescent device according to claim 1, wherein the intermediate conductive layer having the refractive index n_a is sandwiched between first and second organic layers, and the difference between n_a , and n_b and/or n_c is 0.2 or less when n_b is the refractive index to light with a wavelength of 500 nm of the first organic emitting layer and n_c is the refractive index to light with a wavelength of 500 nm of the second organic emitting layer.

3. The organic electroluminescent device according to claim 1 or 2, wherein the material having a low refractive index is a metal halide, and the transparent conductive material is a conductive metal oxide.

4. The organic electroluminescent device according to any one of claims 1 to 3, wherein the absorption coefficient (unit: 1/μm) to light with a wavelength of 500 nm of the intermediate conductive layer, the refractive index of which is n_a , is 2.5 or less.

5. A display comprising the organic electroluminescent device of any one of claims 1 to 4.

Fig.1

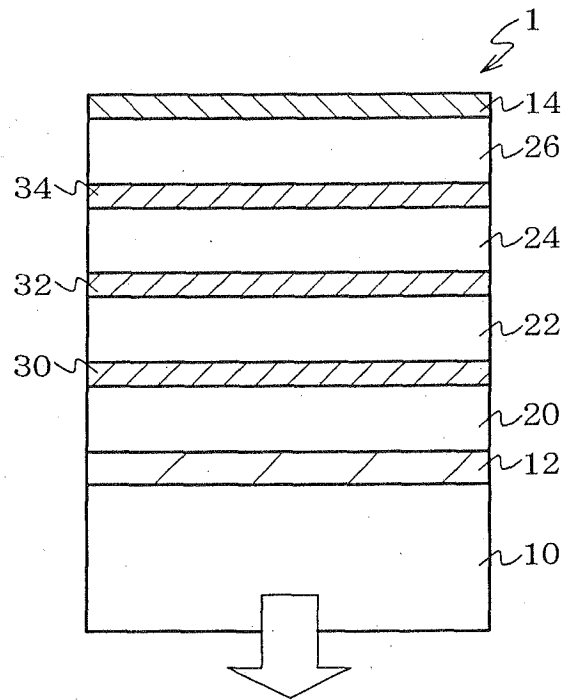


Fig.2


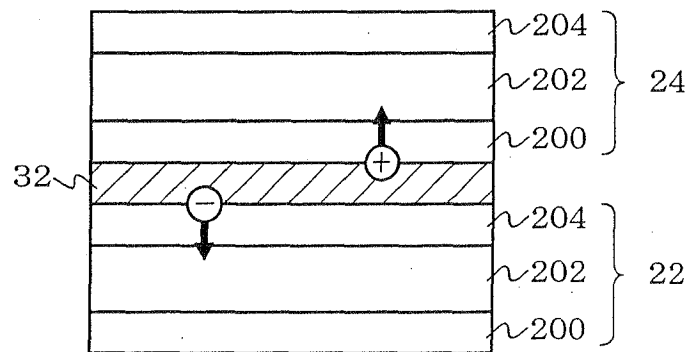


Fig.3



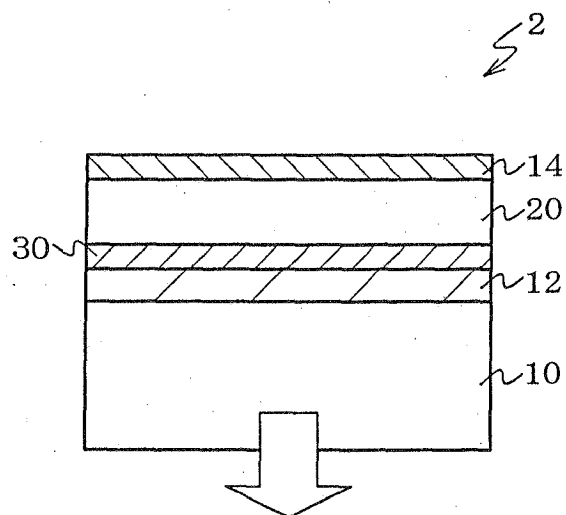

EUROPEAN SEARCH REPORT

Application Number
EP 10 15 1944

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,D	US 6 107 734 A (TANAKA SHOSAKU [JP] ET AL) 22 August 2000 (2000-08-22) * column 2, line 51 - column 3, line 3; example 4 * * column 8, line 19 - line 23 *	1-5	INV. H05B33/26 H05B33/14
A	US 2003/020399 A1 (MOLLER SVEN [US] ET AL MOELLER SVEN [US] ET AL) 30 January 2003 (2003-01-30) * paragraph [0004] *	1-5	
A	M.A. BADER, G. MAROWSKY, A. BAHTIAR, K. KOYNOV, C. BUBECK, H. TILLMANN, H.H. HÖRHOLD, S. PEREIRA: "Poly(p-phenylenevinylene) derivatives: new promising materials for nonlinear all-optical waveguide switching" JOURNAL OF THE OPTICAL SOCIETY OF AMERICA B, vol. 19, no. 9, September 2002 (2002-09), pages 2250-2262, XP002459092 * figure 3b *	1-5	
A	US 5 959 738 A (HAFEMAN DEAN G [US] ET AL) 28 September 1999 (1999-09-28) * column 3, line 32 - line 38 *	1-5	
A	Y. WANG, H. GONG: "High-conductivity p-type transparent copper aluminium oxide film prepared by plasma-enhanced MOCVD" CHEM. VAP. DEPOS., vol. 6, 15 June 2000 (2000-06-15), pages 285-288, XP002573419 * the whole document *	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 March 2010	Examiner Redecker, Michael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 10 15 1944

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	T. MINAMI ET AL: "Highly conductive and transparent zinc oxide films prepared by rf magnetron sputtering under an applied external magnetic field" APPL. PHYS. LETT., vol. 41, 8 September 1982 (1982-09-08), pages 958-960, XP002573420 * the whole document * -----	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 16 March 2010	Examiner Redecker, Michael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 15 1944

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-03-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6107734 A	22-08-2000	JP 3884564 B2 JP 11329748 A	21-02-2007 30-11-1999
US 2003020399 A1	30-01-2003	NONE	
US 5959738 A	28-09-1999	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H6176870 A [0002]
- JP H11312584 A [0002]
- JP H11312585 A [0002]
- JP H11329748 A [0004] [0007]
- JP 2003045676 A [0004] [0007]
- JP 2002097812 A [0052]

专利名称(译)	有机电致发光器件和显示器		
公开(公告)号	EP2197247A1	公开(公告)日	2010-06-16
申请号	EP2010151944	申请日	2004-04-22
[标]申请(专利权)人(译)	出光兴产株式会社		
申请(专利权)人(译)	出光兴产股份有限公司.		
当前申请(专利权)人(译)	出光兴产股份有限公司.		
[标]发明人	KUMA HITOSHI		
发明人	KUMA, HITOSHI		
IPC分类号	H05B33/26 H05B33/14 H01L51/52		
CPC分类号	H01L51/5265 H01L51/5278		
代理机构(译)	GILLE HRABAL STRUCK NEIDLEIN PROP ROOS		
优先权	2003119305 2003-04-24 JP		
其他公开文献	EP2197247B1		
外部链接	Espacenet		

摘要(译)

提供一种有机EL器件和具有优异视角特性和高效率的显示器。一种有机电致发光器件 (1) , 包括 : 透明电极 (12) , 与透明电极 (12) 相对设置的对电极 (14) , 一个或多个中间导电层 (30,32和34) 以及一个或多个有机发光层 (20,22,24和26) 设置在透明电极 (12) 和对电极 (14) 之间, 其中当 n_a 是中间导电层的折射率时, n_a 和 n_n 之间的差值为0.2或更小 (30) 和 n_b 是有机发光层 (20) 的折射率。

Fig.1

