



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.12.2010 Bulletin 2010/50

(51) Int Cl.:
H01L 27/00 (2006.01)

(21) Application number: **10183220.2**

(22) Date of filing: **05.07.2002**

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **12.07.2001 KR 20010041891**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
02014907.6 / 1 276 154

(71) Applicant: **LG Electronics, Inc.**
Seoul (KR)

(72) Inventor: **Kim, Chang Nam**
Seoul (KR)

(74) Representative: **Trinks, Ole**
Meissner, Bolte & Partner GbR
Depotstrasse 5 1/2
86199 Augsburg (DE)

Remarks:


This application was filed on 30-09-2010 as a divisional application to the application mentioned under INID code 62.

(54) **Organic EL display device**

(57) An organic EL display device is disclosed, which is fabricated in a tape automated bonding (TAB) method. The organic EL display device includes a driving part; a display panel including a substrate, a plurality of first and second electrodes formed on the substrate in a matrix

type; and first and second lines having different lengths for being alternately arranged, and respectively applying signals from the driving part to the first and second electrodes; and a connecting part including a third line for electrically connecting the first and second lines to the driving part.

FIG. 2

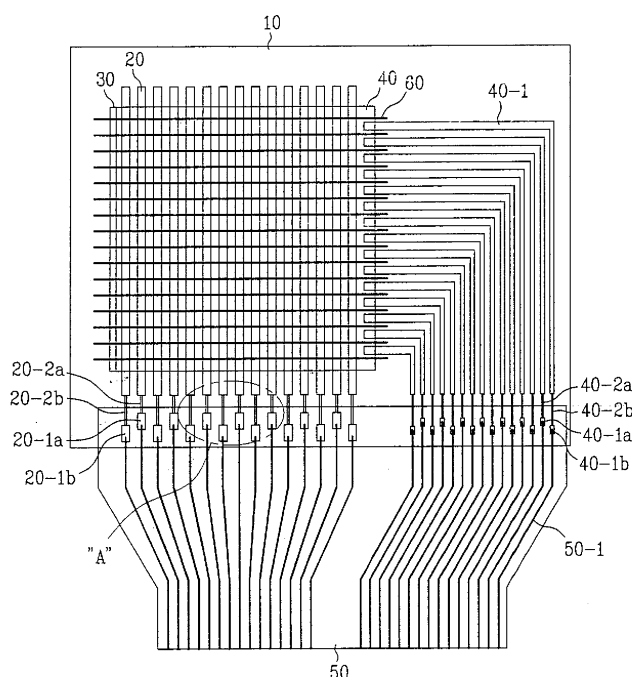

Description

[0001] This application claims the benefit of the Korean Application No. 2001-0041891 filed on July 12, 2001, which is hereby incorporated by reference.

BACKGROUND OF THE INTENTION

Field of the Invention

[0002] The present invention relates to a display device, and more particularly, to an organic EL display device by a tape automated bonding (TAB) method.

Discussion of the Related Art

[0003] FIG. 1 is a plan view showing an organic EL display panel to which a related art film type device is attached.

[0004] As shown in FIG. 1, the organic EEL display panel includes a first electrode 2, a second electrode 4, a connecting part 4-1 of the second electrode, a barrier 6 and an organic EL layer 3.

[0005] The strip type electrode is formed by chemically etching on a transparent substrate 1, and the second electrode 4 is formed in perpendicular to the first electrode 2. At this time, the connecting part 4-1 of the second electrode is used to easily form second electrode patterns, and the barrier is formed to electrically disconnect the second electrode patterns with one another. After that, the organic EL layer 3 is deposited on the barrier 6 by a vacuum deposition method.

[0006] Referring to FIG. 1, the first electrode 2 is formed in perpendicular to the second electrode 4. In this respect, the related art organic EL display panel includes a film type device 5 (COF, FPC, TCP, etc.) having a line 5-1 for connecting the display panel to a driving chip (not shown), and two TAB regions for connecting the display panel to the first and second electrodes.

[0007] That is, the two film type devices 5 such as FPC, TCP and COF are required to mount the line on the PCB, and the TAB process steps are performed two times.

[0008] Accordingly, manufacturing cost is increased in that the two FPCs (or TCPs) are used and the TAB process steps are performed two times, so that competitive power of the organic EL display panel is weakened due to high manufacturing cost.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to an organic EL display panel that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0010] An object of the present invention is to provide an organic EL display panel, in which a TAB region of a film type device is formed at a minimum size to decrease manufacturing cost of the module, and electrode lines

having different lengths are alternately formed in the TAB region to increase a contact region of the electrode lines to connectors in a case of that the pitch of the electrode lines become narrow with high resolution of the organic EL display device, so that it is possible to stably connect the electrode lines to the film type device through the connectors even though an error range for aligning is wide.

[0011] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0012] To achieve these objects and other advantages, and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic EL display panel according to the present invention includes a driving part; a display panel including a substrate, a plurality of first and second electrodes formed on the substrate in a matrix type, and first and second lines having different lengths for being alternately arranged, and respectively applying signals from the driving part to the first and second electrodes; and a connecting part including a third line for electrically connecting the first and second lines to the driving part.

[0013] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0015] FIG. 1 is a plan view showing an organic EL display panel to which a related art film type device is attached;

[0016] FIG. 2 is a plan view showing an organic EL display panel to which a film type device according to the present invention is attached; and

[0017] FIG. 3 is a detailed view showing "A" portion of FIG. 2.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be

used throughout the drawings to refer to the same or like parts.

[0019] An organic EL display panel according to the present invention will be explained with reference to the accompanying drawings.

[0020] FIG. 2 is a plan view showing an organic EL display panel to which a film type device according to the present invention is attached.

[0021] As shown in FIG. 2, the organic EL display panel includes a transparent substrate 10, an organic EL layer 30, a connecting part 40-1 of a second electrode, a barrier 60, first electrode lines 20-2a, 20-2b and second electrode lines 40-2a, 40-2b.

[0022] At this time, the organic EL layer 30 is formed in a plurality of pixels defined by crossing a plurality of first and second electrodes 20, 40 to one another. Then, the connecting part 40-1 of the second electrode is used for easily forming second electrode patterns, and the barrier 60 is formed to electrically disconnect the second electrodes patterns 40 with one another. Also, the first electrode lines 20-2a, 20-2b having different lengths from each other are alternately formed on the transparent substrate 10 for being connected with a first electrode 20. The second electrode lines 40-2a, 40-2b having different lengths from each other are alternately formed on the transparent substrate 10 for being connected with the second electrode 40 through the connecting part 40-1 of the second electrode.

[0023] The organic EL display panel further includes first connectors 20-1a, 20-1b connected with the first electrode lines 20-2a, 20-2b, and second connectors 40-1a, 40-1b connected with the second electrode lines 40-2a, 40-2b.

[0024] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b may be formed with transparent electrodes, and supplementary electrodes of metal material for improving conductivity. In another way, the first and second electrode lines may be formed only with the supplementary electrodes.

[0025] The first and second connectors 20-1a, 20-1b and 40-2a, 40-2b are formed with transparent electrodes, and supplementary electrode of metal material for improving conductivity. In another way, the first and second connectors may be formed only with the transparent electrodes.

[0026] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b are arranged in one direction. Then, a film type device 50 (COF, FPC, TCP, etc.) having a line 50-1 of the same pitch with the first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b is attached to the display panel by a first TAB method.

[0027] The pitch and shape of the line 50-1 of the device 50 (FPC, TCP, COF, etc.) is same with that of the first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b.

[0028] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b are contacted to the line 50-1 of the device 50 by the first TAB method, and the line 50-1

is connected to a driving part (not shown) for driving the organic EL display panel.

[0029] FIG. 3 is a detailed view showing "A" portion of FIG. 2.

[0030] Referring to FIG. 3, long electrode lines 20-2b, 40-2b and short electrode lines 20-2a, 40-2a are alternately formed in a TAB region B of the organic EL display panel. At this time, the long electrode lines 20-2b, 40-2b formed between the short electrode lines are positioned at a lower part than the short electrode lines.

[0031] In this structure, the pitch Wp2 between the long electrode lines 20-2b, 40-2b and between the short electrode lines 20-2a, 40-2a is twice as high as the pitch "Wp1" between the electrodes of the display panel.

[0032] In the TAB region B, wide connectors 20-1a, 20-1b are formed at ends of the electrode lines 20-2a, 20-2b and 40-2a, 40-2b for easily connecting the line of the device to the electrode lines through the connectors.

[0033] Referring to FIG. 3, there is limitation in forming the pitch between the electrodes 20, 40 below the minimum pitch range.

[0034] Accordingly, the first and second electrodes 20, 40 are directly connected with the line 50-1 of the film type device 50 for driving the display panel by connecting the scan line (first electrode line) to the data line (second electrode line). At this time, an error range for aligning is narrow, so that the first and second electrode lines could be misaligned with the line 50-1 of the device 50.

[0035] However, if the electrode lines 20-2a, 20-2b and 40-2a, 40-2b having different lengths are alternately arranged, it is possible to increase the width of the connectors 20-1a, 20-1b and 40-1a, 40-1b connected to the electrode lines at a predetermined range, so that the line of the device can be contacted to the connectors within a narrow error range.

[0036] For example, if the line 50-1 of the related art device 50 is not within the range of "a" at both sides of the center in the connectors of the first electrode lines 20-2a, 20-2b, the line 50-1 of the device is not contacted to the first electrode 20.

[0037] However, in the present invention, the error range of the line 50-1 of the device 50 is varied according to the width of the connector 20-1a, 20-1b. That is, if the line 50-1 of the device 50 is within the range of "b" at both sides of the center in the connectors of the first electrode lines 20-2a, 20-2b, the line 50-1 of the device 50 is contacted to the first electrode 20.

[0038] The first electrode lines 20-2a, 20-2b having long and short lengths are alternately formed in the TAB region B of the display panel according to the present invention. In this respect, "2b" which is the width of the first connector 20-1a, 20-1b is wider than "2a" at a range of "x", which is the width between the first electrodes, to electrically connect the line 50-1 to the first electrode lines 20-2a, 20-2b.

[0039] If the width is increased at the range of "x", it is possible to stably perform the TAB process step even though the error range for aligning is wide.

[0040] Also, an insulating layer 70 is formed on the long first electrode line 20-2b between the short first electrode lines 20-2a, so that the long first electrode line 20-2b is insulated from the first connector 20-1a during the TAB process step of the device 50.

[0041] Even though the width of the first connector 20-1a connected to the first electrode line 20-2a is enlarged, the first electrode line 20-2b is insulated from the connector 20-1a in that the insulating layer 70 is formed on the first electrode line 20-2b.

[0042] At this time, the insulating layer 70 is formed of inorganic material such as oxide SiO₂ and nitride SiN_x, or organic material such as polyimide (especially, polyacryl, novolac, polyphenyl and polystyrene). Also, the insulating layer 70 is formed at a thickness of 0.01 μm to 10 μm.

[0043] The structure of the second electrode lines 40-2a, 40-2b and the second connectors 40-1a, 40-1b is same with that of FIG. 3, so that the explanation for the structure will be omitted.

[0044] The organic EL display panel is used for a display device having a film type device such as COF, TCP and FPC. At this time, the film type device has a driving chip connected to scan and data lines for driving the display panel.

[0045] The display device having the film type device such as COF, TCP and FPC includes the display panel, COF, a plurality of data and scan lines, and a plurality of connecting lines.

[0046] In the display panel, two first electrode lines having different lengths are alternately formed on the transparent substrate, and are connected to the first electrode. Also, two second electrode lines having different lengths are alternately formed in the display panel for being connected with the second electrode. Then, the COF includes a chip part at which the chip is positioned, and a connecting part at which the display panel is positioned. The plurality of data and scan lines are connected to the COF from the first and second electrode lines of the display panel. Subsequently, the plurality of connecting lines are formed in the connecting part to electrically connect the scan and data lines to the COF, respectively.

[0047] As explained above, the organic EL display panel according to the present invention has the following advantages.

[0048] With high resolution of the organic EL display panel, the pitch of the electrode line has been decreased. At this time, if the electrode lines having different lengths are alternately formed, it is possible to increase the width of the connector for connecting the electrode line to the line of the device such as COF, FPC and TCP by the TAB method. That is, even though the error range for aligning is wide, the electrode line is stably connected to the line of the device through the connector, so that the reliability of the display panel is obtained, and the yield is improved.

[0049] Also, it is possible to form the TAB regions at a minimum, so that the cost of the module is decreased in

the manufacturing process steps.

[0050] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

10 Claims

1. An organic EL display device comprising:

a plurality of first electrodes (20) parallel to each other, extending along a first direction;
a plurality of second electrodes (40) parallel to each other, extending along a second direction, which is perpendicular to the first direction;
a matrix of organic EL pixels formed by the crossing of the plurality of first electrodes (20) and second electrodes (40) having an organic EL layer (30) therebetween;
a connecting part (40-1) connected with the second electrodes (40) so as to extend from the second direction to the first direction;
a first electrode lines (20-2a, 20-2b) connected with the first electrodes (20) in the first direction;
a second electrode lines (40-2a, 40-2b) connected with the connecting part (40-1) in the first direction;
a first connectors (20-1a, 20-1b) being wider than the first electrode lines and formed at ends of the first electrode lines for connecting with the first electrode lines; and
a second connectors (40-1a, 40-1b) being wider than the second electrode lines and formed at ends of the second electrode lines for connecting with the second electrode lines.

2. The organic EL display device as claimed in claim 1, wherein the first and second electrode lines connect the first and second electrodes with a driving unit through the first and second connectors.

3. The organic EL display device as claimed in claim 1, wherein the first and second electrode lines have different lengths and are alternately arranged.

4. The organic EL display device as claimed in claim 1, wherein a length of the first electrode line is different from that of adjacent first electrode line, and a length of the second electrode line is different from that of adjacent second electrode line.

5. The organic EL display device as claimed in claim 1, wherein the first and second connectors have a pitch.

6. The organic EL display device as claimed in claim 5, wherein the pitch between the first connectors is wider than the pitch between the first electrodes, and the pitch between the second connectors is wider than the pitch between the second electrodes. 5
7. The organic EL display device as claimed in claim 5, wherein the pitch between the first connectors is twice as high as the pitch between the first electrodes, and the pitch between the second connectors is twice as high as the pitch between the second electrodes. 10
8. The organic EL display device as claimed in claim 1, wherein the first connectors is wider than the first electrodes, and the second connectors is wider than the second electrodes. 15
9. The organic EL display device as claimed in claim 1, further comprising an insulating layer (70) formed on the first and second electrode lines, wherein the first and second electrode lines are insulated from the first and second connectors by the insulating layer. 20
10. The organic EL display device as claimed in claim 1, further comprising a film type device (50) having a line (50-1), which are connected to the first and second connectors. 25
11. The organic EL display device as claimed in claim 10, wherein the pitch of the line (50-1) are same with that of the first and second electrode lines. 30

35

40

45

50

55

FIG. 1
Prior Art

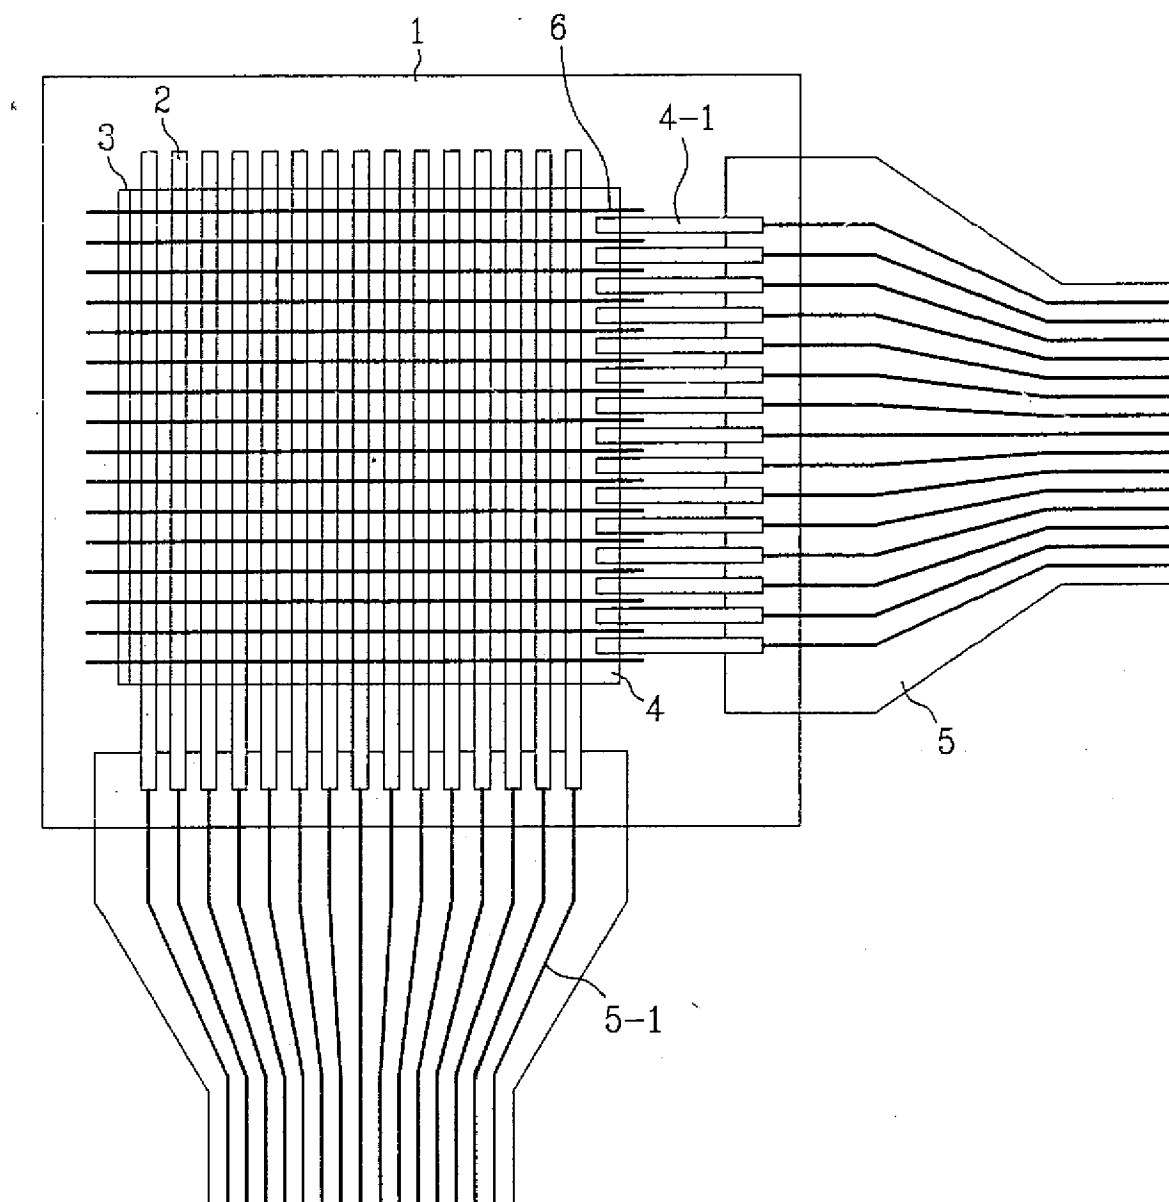


FIG. 2


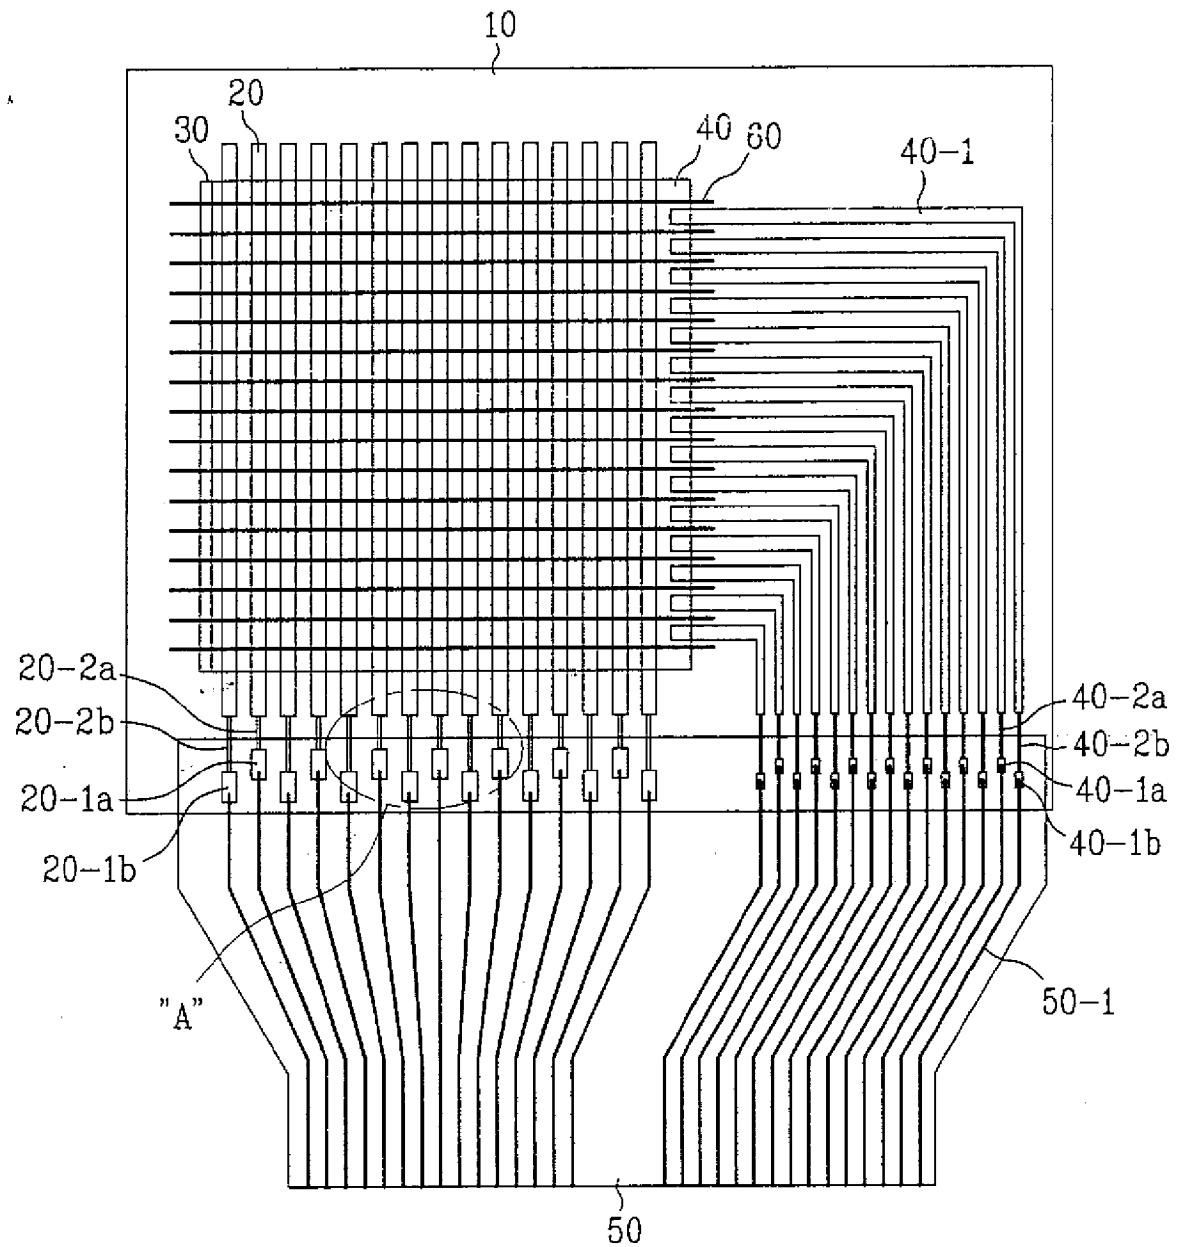


FIG. 3



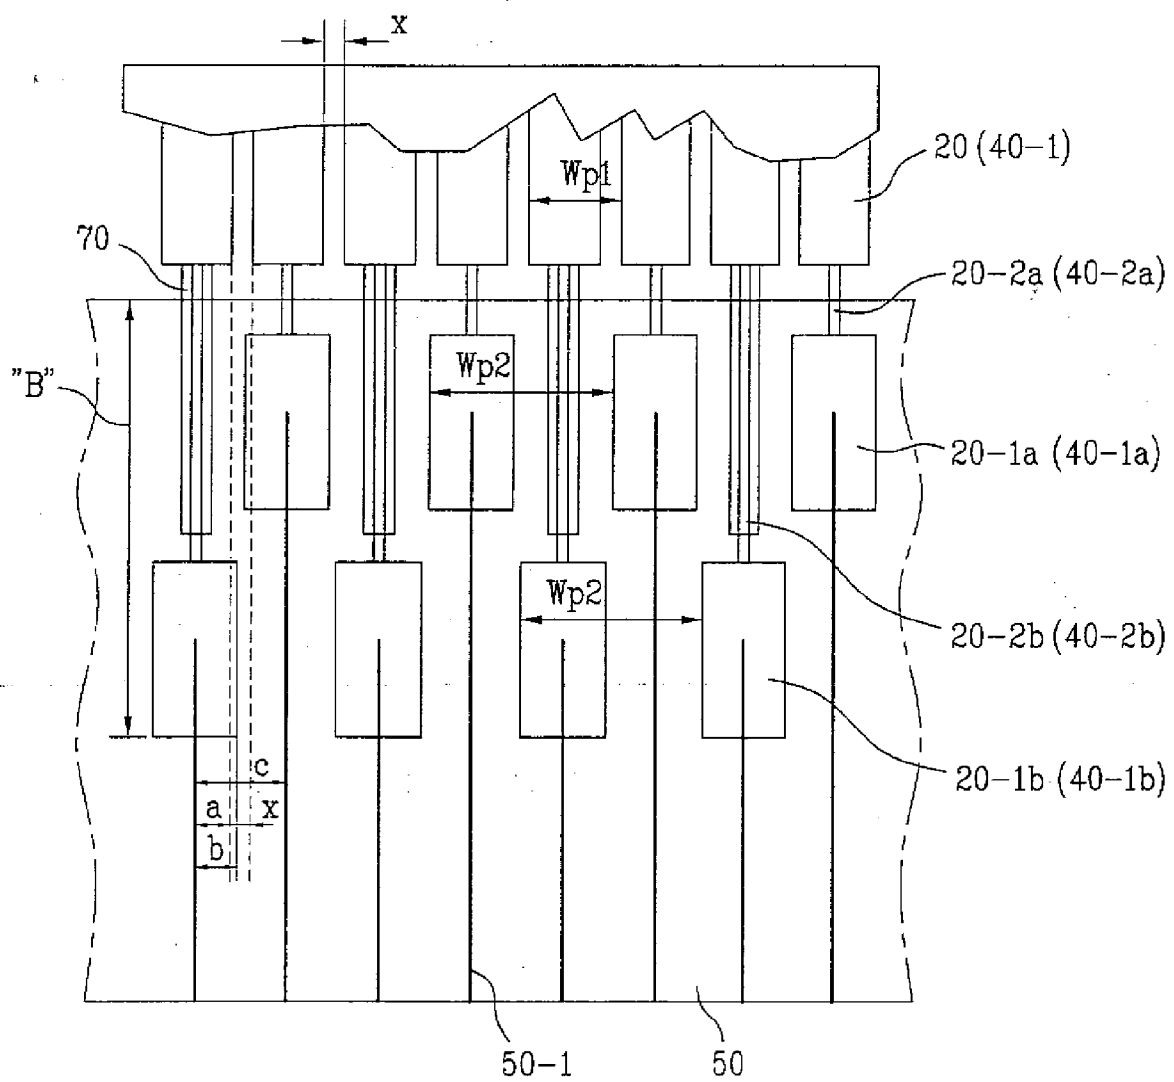

EUROPEAN SEARCH REPORT

Application Number
EP 10 18 3220

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	JP 2001 166329 A (SEIKO EPSON CORP) 22 June 2001 (2001-06-22) * abstract * * paragraph [0024] - paragraph [0047] * * figures 1,2,5,6 *	1-11	INV. H01L27/00
A	WO 00/28373 A1 (SEIKO EPSON CORP [JP]; NAKAHARA HIROKI [JP]; ITO MASARU [JP]; NAKAMURA) 18 May 2000 (2000-05-18) * figures 7-14 *	1-11	
Y	JP 7 030149 A (NISSHIN STEEL CO LTD) 31 January 1995 (1995-01-31) * abstract * * figure 1 *	1-11	
A	EP 0 717 446 A2 (EASTMAN KODAK CO [US]) 19 June 1996 (1996-06-19) * page 2, line 59 - page 3, line 12 *	1-11	
A	JP 2000 259091 A (CASIO COMPUTER CO LTD) 22 September 2000 (2000-09-22) * abstract; figures 1-2 *	1-11	TECHNICAL FIELDS SEARCHED (IPC)
A	JP 50 107890 A (---) 25 August 1975 (1975-08-25) * abstract; figure 3 *	1-11	H01L G09G H05B G02F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 November 2010	Examiner Bernabé Prieto, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 18 3220

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-11-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2001166329 A	22-06-2001	NONE	
WO 0028373 A1	18-05-2000	CN 1288527 A JP 3508723 B2	21-03-2001 22-03-2004
JP 7030149 A	31-01-1995	NONE	
EP 0717446 A2	19-06-1996	JP 3694078 B2 JP 8234683 A US 5684365 A	14-09-2005 13-09-1996 04-11-1997
JP 2000259091 A	22-09-2000	CN 1266200 A TW 223120 B US 6300997 B1	13-09-2000 01-11-2004 09-10-2001
JP 50107890 A	25-08-1975	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 20010041891 [0001]

专利名称(译)	有机EL显示装置		
公开(公告)号	EP2261975A1	公开(公告)日	2010-12-15
申请号	EP2010183220	申请日	2002-07-05
申请(专利权)人(译)	LG电子公司.		
当前申请(专利权)人(译)	LG电子公司.		
[标]发明人	KIM CHANG NAM		
发明人	KIM, CHANG NAM		
IPC分类号	H01L27/00 H05B33/06 H01L27/32 H01L51/50		
CPC分类号	H01L27/3288		
代理机构(译)	TRINKS , OLE		
优先权	1020010041891 2001-07-12 KR		
外部链接	Espacenet		

摘要(译)

公开了一种有机EL显示装置，其以带式自动接合（TAB）方法制造。有机EL显示装置包括驱动部分；显示面板，包括基板，以矩阵形式形成在基板上的多个第一和第二电极；第一和第二线具有不同的长度，用于交替排列，并分别将信号从驱动部分施加到第一和第二电极；连接部分包括第三线，用于将第一和第二线电连接到驱动部分。

FIG. 2

