



(11) **EP 2 770 036 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
20.12.2017 Bulletin 2017/51

(21) Application number: **14165928.4**

(22) Date of filing: **13.03.2003**

(51) Int Cl.:
C09K 11/06 (2006.01) **H05B 33/14** (2006.01)
H05B 33/22 (2006.01) **C07D 401/04** (2006.01)
C07D 401/14 (2006.01) **C07D 403/04** (2006.01)
C07D 403/14 (2006.01) **C07F 15/00** (2006.01)
C07D 471/04 (2006.01) **H01L 51/00** (2006.01)
H01L 51/50 (2006.01)

(54) **Material for organic electroluminescent devices and organic electroluminescent devices made by using the same**

Material für organische Elektrolumineszenzvorrichtungen und daraus hergestellte organische Elektrolumineszenzvorrichtungen

Matériau pour dispositifs électroluminescents organiques et dispositifs électroluminescents organiques l'utilisant

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **15.03.2002 JP 2002071398**

(43) Date of publication of application:
27.08.2014 Bulletin 2014/35

(60) Divisional application:
17196770.6

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
03708594.1 / 1 486 550

(73) Proprietor: **Idemitsu Kosan Co., Ltd**
Tokyo 100-8321 (JP)

(72) Inventors:
• **Iwakuma, Toshihiro**
Sodegaura-shi, Chiba 299-0205 (JP)
• **Hosokawa, Chishio**
Sodegaura-shi, Chiba 299-0205 (JP)
• **Ikeda, Hidetsugu**
Sodegaura-shi, Chiba 299-0205 (JP)
• **Tomita, Seiji**
Sodegaura-shi, Chiba 299-0205 (JP)

• **Arakane, Takashi**
Sodegaura-shi, Chiba 299-0205 (JP)

(74) Representative: **Gille Hrabal**
Brucknerstrasse 20
40593 Düsseldorf (DE)

(56) References cited:
EP-A1- 0 517 542 EP-A2- 1 175 128
JP-A- 2000 053 956

- **J. CATALAN: "on the tict mechanism of 9,9'-biaryl compounds.", EUR. J. ORG. CHEM., 1998, pages 1697-1704, XP002358148, weinheim**
- **YIMING MO: "photophysical processes of some carbazole derivatives.", J. OF PHOTOCHEMISTRY A. PHOTOBIOLOGY A: CHEMISTRY, vol. 92, 1995, pages 25-27, XP002358149, engl.**
- **J. Falbe, M. Regitz: "Römpp Lexikon Chemie 10 Auflage", 1999, Georg Thieme Verlag**

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

EP 2 770 036 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionTECHNICAL FIELD

5 **[0001]** The present invention relates to organic EL devices comprising a specific material and, more particularly, to organic EL devices emitting bluish light with a high purity of color.

BACKGROUND ART

10 **[0002]** Organic EL devices which utilize organic substances are expected to be useful for application as an inexpensive full color display device of the solid light emission type having a great size, and various developments on the organic EL devices are being conducted. In general, an organic EL device has a construction comprising a pair of facing electrodes and a light emitting layer sandwiched between the electrodes.

15 **[0003]** The light emission of the organic EL device is a phenomenon in which, when an electric field is applied across the two electrodes, electrons are injected from the cathode side and holes are injected from the anode side, the electrons recombine with the holes in the light emitting layer to induce an excited state, and then, when the excited state returns to the original state, it emits energy as light.

20 **[0004]** As the light emitting material, chelate complexes such as tris(8-quinolinolato)aluminum, coumarine derivatives, tetraphenylbutadiene derivatives, bisstyrylarylene derivatives and oxadiazole derivatives are known. It has been reported that these light emitting materials emit light in the visible region of blue to red, and it is expected that color display elements can be obtained by using these light emitting materials (for example, Japanese Patent Application Laid-Open Nos. Heisei 8(1996)-239655, Heisei 7(1995)-138561 and Heisei 3(1991)-200289, etc.).

25 **[0005]** Although the practical use of displays using organic EL devices recently started, the full color display device is still under development. In particular, an organic EL device which emits bluish light with excellent purity of color and great efficiency of light emission has been desired.

30 **[0006]** To overcome the above problems, for example, a device in which a phenylanthracene derivative is used as the material emitting blue light is disclosed in Japanese Patent Application Laid-Open No. Heisei 8(1996)-12600. The phenylanthracene derivative is used as the material emitting blue light and, in general, used as a laminate of a layer of the material emitting blue light with a layer of a complex of tris(8-quinolinolato)aluminum (Alq). However, the efficiency of light emission, the life and the purity of blue light are insufficient for the practical application. Japanese Patent Application Laid-Open No. 2001-160489 discloses a device in which an azafluoranthene compound is added to the light emitting layer. However, this device emits yellow to green light and cannot emit blue light having a sufficiently high purity of color.

35 **[0007]** JP 2000-053956 discloses a new compound useful as a luminescent material for an organic electroluminescence element having high luminescent luminance and excellent stability in repeating use, including an aryl group-containing substituting group.

[0008] EP 0517542 A1 discloses an organic electroluminescence device comprising: a luminous layer containing a luminous material and a hole transport material, or a luminous layer containing a luminous material and a hole transport layer containing a hole transport material, between a pair of electrodes at least one of which is transparent or translucent, characterized in that the hole transport material contains an aromatic amine.

40 **[0009]** EP 1175128 A2 discloses a light emitting element comprising at least a light emitting layer containing a light emitting material and a host material and having a light emission maximum wavelength of 500 nm or less wherein the minimum excitation triplet energy level of the host material is higher than the minimum excitation triplet energy level of the light emitting material.

SUMMARY OF THE INVENTION

[0010] The present invention has been made to overcome the above problems and has an object of providing an organic EL device utilizing a material for organic EL devices which emits bluish light with a high purity of light.

50 **[0011]** As the result of intensive studies by the present inventors to achieve the above object, it was found that an organic EL device emitting bluish light with a high purity of light could be obtained by using a compound in which a specific heterocyclic group having nitrogen was bonded to carbazolyl group as the host material. The present invention has been completed based on this knowledge.

[0012] The present invention provides an organic EL device as defined in claim 1.

55 **[0013]** The organic EL device comprises a cathode, an anode and an organic thin film layer comprising at least one layer sandwiched between the cathode and the anode, wherein the organic thin film layer is defined as in claim 1. In the organic thin film layer, a light emitting layer contains the specific material for organic EL devices.

THE MOST PREFERRED EMBODIMENT TO CARRY OUT THE INVENTION

[0014] The material for organic EL devices contained in the device is an organic host material and is represented by the following general formula (1):





[0015] Cz represents a substituted or unsubstituted carbazolyl group, M represents a substituted or unsubstituted heteroaromatic cyclic group selected from the group consisting of pyridine, pyrimidine and quinazoline, **n** represents 1 or 2, and **m** represents 1, a plurality of Cz may represent different groups when **n** represents 2, and the optional substituents of Cz and M are as defined in claim 1.

[0016] M is selected from pyridine, pyrimidine, and quinazoline.


[0017] The substituents to the groups represented by Cz or M in general formula (1) are selected from the group consisting of halogen atoms such as chlorine atom, bromine atom and fluorine atom; carbazole group, hydroxyl group, substituted or unsubstituted amine groups, nitro group, cyano group, silyl group, trifluoromethyl group, carbonyl group, carboxyl group, substituted or unsubstituted alkyl groups, substituted or unsubstituted alkenyl groups, substituted or unsubstituted arylalkyl groups, substituted or unsubstituted aromatic groups, substituted or unsubstituted heteroaromatic heterocyclic groups, substituted or unsubstituted aralkyl groups, substituted or unsubstituted aryloxy groups and substituted or unsubstituted alkyloxy groups. Among these groups, fluorine atom, phenyl group, naphthyl group, pyridyl group, pyrazyl group, pyrimidyl group, cyano group, substituted or unsubstituted alkyl groups and substituted or unsubstituted aralkyl groups are preferable.

[0018] It is preferable that the compound represented by general formula (1) used in the present invention is a compound represented by any one of the following general formulae (2) and (3).




[0019] Specific examples of the compound represented by general formula (1) used in the present invention are shown in the following. However, the compound is not limited to the compounds shown in the following.


5
10
15
20
25
30
35
40
45
50
55

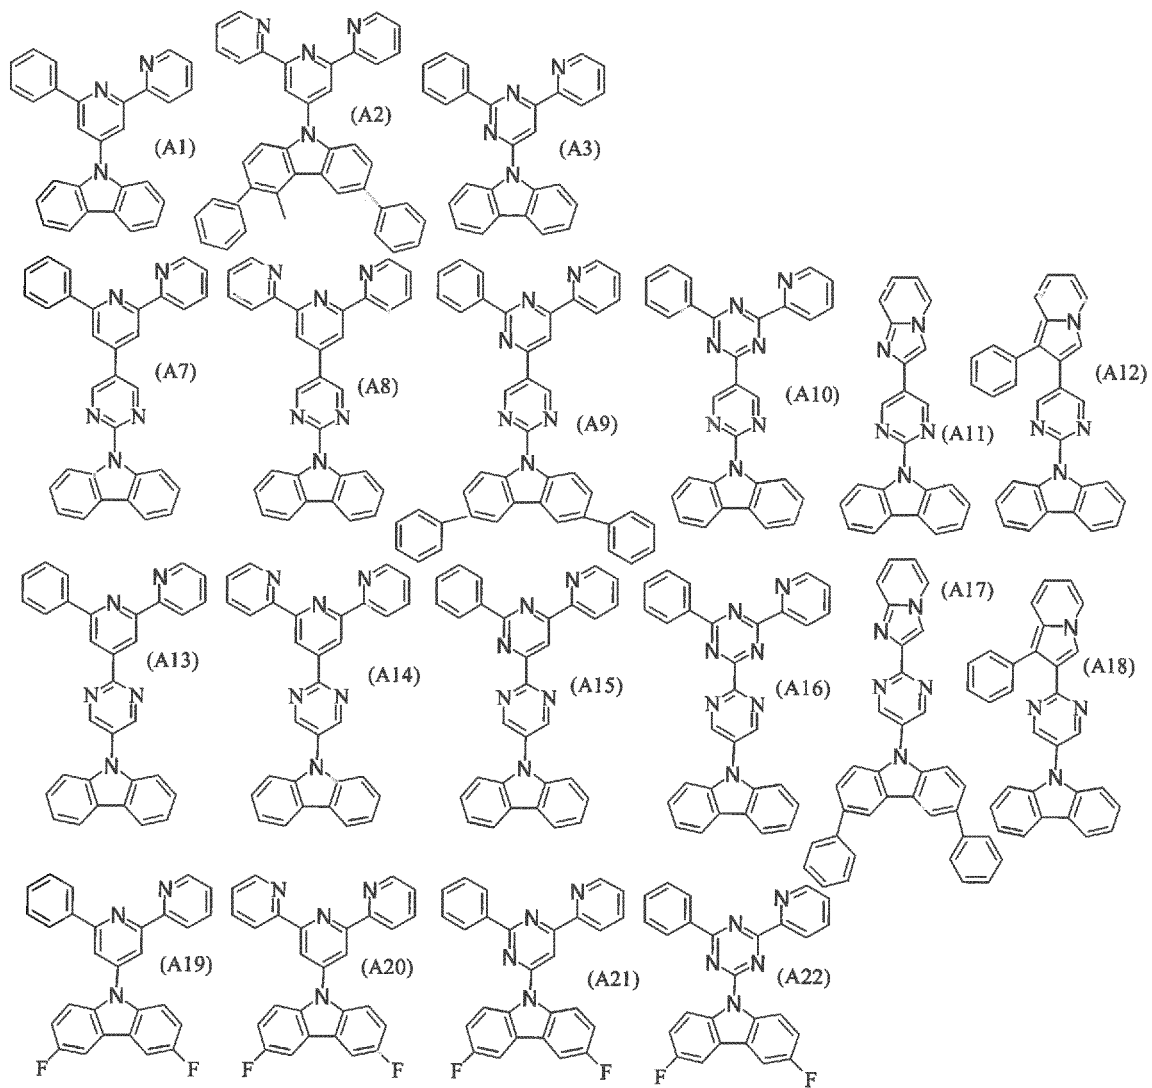

5

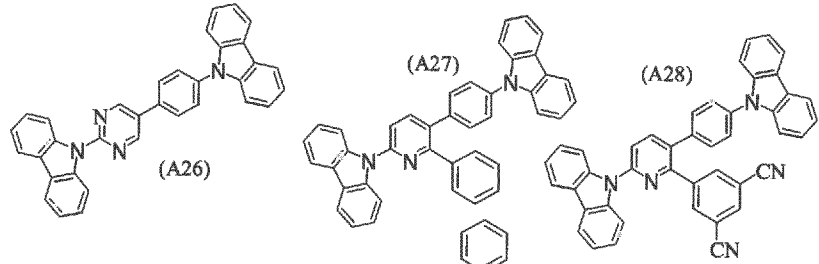


10

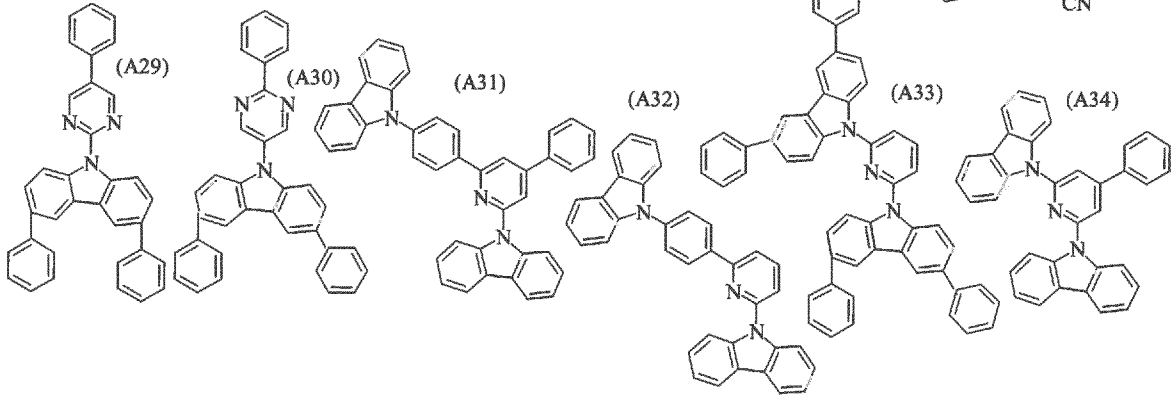

15

20


25

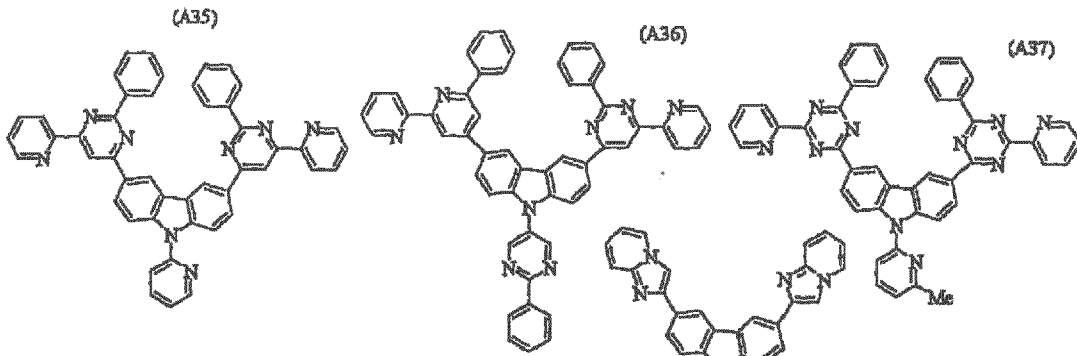

30

35

40




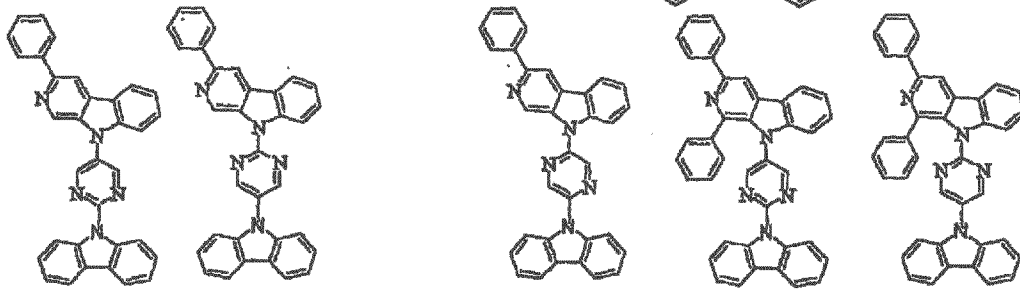


45

50



55

5




10

15







20

25






30



35

40



45

50

[0020] It is preferable that the singlet energy gap of the compound represented by general formula (1) is 2.8 to 3.8 eV and more preferably 2.9 to 3.6 eV.

55

[0021] The organic EL device of the present invention comprises an anode, a cathode and an organic thin film layer comprising at least one layer sandwiched between the anode and the cathode, wherein the organic thin film layer comprises a thin film layer comprising the material for organic EL devices comprising the compound represented by the above general formula (1). The light emitting layer in the organic EL device of the present invention contains the material for organic EL devices comprising the compound represented by the above general formula (1).

[0022] The organic EL device of the present invention emits bluish light, and the purity of color of the emitted light is as excellent as (0.12, 0.11) to (0.16, 0.19). This property is exhibited since the material for organic EL devices comprising the compound represented by general formula (1) has a great energy gap.

[0023] The organic EL device of the present invention emits light by a multiplet excitation which is the excitation to the triplet state or higher.

[0024] It is preferable that the material for organic EL devices is an organic host material of the organic EL device. The host material is a material into which holes and electrons can be injected and which has the function of transporting holes and electrons and emitting fluorescent light by recombination of holes and electrons.

[0025] The compound represented by general formula (1) is useful also as the organic host material for phosphorescence devices since the singlet energy gap is as high as 2.8 to 3.8 eV and the triplet energy gap is as high as 2.5 to 3.3 eV.

[0026] The phosphorescence device is an organic device which comprises a substance emitting light based on the transition from the energy level in the triplet state to the energy level in the ground singlet state with a stronger intensity than those emitted from other substances, examples of which include phosphorescent substances such as organometallic complexes containing at least one metal selected from Groups 7 to 11 of the Periodic Table, and emits light under an electric field utilizing the so-called phosphorescence.

[0027] In the light emitting layer of the organic EL device, in general, the singlet exciton and the triplet exciton are contained in the formed excited molecules as a mixture, and it is reported that the triplet exciton is formed in a greater amount such that the ratio of the amount of the singlet exciton to the amount of the triplet exciton is 1:3. In conventional organic EL devices using the phosphorescence, the exciton contributing to the light emission is the singlet exciton, and the triplet exciton does not emit light. Therefore, the triplet exciton is ultimately consumed as heat, and the light is emitted by the singlet exciton which is formed in a smaller amount. Therefore, in these organic EL devices, the energy transferred to the triplet exciton causes a great loss in the energy generated by the recombination of holes and electrons.

[0028] In contrast, it is considered that, by using the material of formula (1) for the phosphorescence device, the efficiency of light emission three times as great as that of a device using fluorescence can be obtained since the triplet exciton can be used for the emission of light. It is also considered that, when the compound of formula (1) is used for the light emitting layer of the phosphorescence device, an excited triplet level in an energy state higher than the excited triplet level of a phosphorescent organometallic complex comprising a metal selected from the Group 7 to 11 of the Periodic Table contained in the layer, is achieved; the film having a more stable form is provided; the glass transition temperature is higher (T_g : 80 to 160°C); holes and/or electrons are efficiently transported; the compound is electrochemically and chemically stable; and the formation of impurities which may work as a trap or cause loss in the light emission is suppressed during the preparation and the use.

[0029] The hole transporting layer, the electron injecting layer or the hole barrier layer may contain the material of formula (1). A phosphorescent light emitting compound and the material of the present invention may be mixed and used in combination.

[0030] The organic EL device of the present invention comprises a cathode, an anode and an organic thin film layer comprising at least one layer sandwiched between the cathode and the anode. When the organic thin film layer comprises a single layer, a light emitting layer is formed between the anode and the cathode. The light emitting layer contains a light emitting material and may further contain a hole injecting material for transporting holes injected from the anode to the light emitting material or an electron injecting material for transporting electrons injected from the cathode to the light emitting material. It is preferable that the light emitting material exhibits a very excellent quantum efficiency of fluorescence, has a great ability of transporting both holes and electrons and forms a uniform thin layer. Examples of the organic EL device of the multi-layer type include organic EL devices comprising a laminate having a multi-layer construction such as (the anode / the hole injecting layer / the light emitting layer / the cathode), (the anode / the light emitting layer / the electron injecting layer / the cathode) and (the anode / the hole injecting layer / the light emitting layer / the electron injecting layer / the cathode).

[0031] For the light emitting layer, in addition to the material of the present invention comprising the compound represented by general formula (1), conventional host materials, light emitting materials, doping materials, hole injecting materials and electron injecting materials and combinations of these materials may be used in combination, where necessary. By using a multi-layer structure for the organic EL device, decreases in the luminance and the life due to quenching can be prevented, and the luminance of emitted light and the efficiency of light emission can be improved with other doping materials. By using other doping materials contributing to the light emission of the phosphorescence in combination, the luminance of emitted light and the efficiency of light emission can be improved in comparison with those of conventional devices.


[0032] In the organic EL device of the present invention, the hole injecting layer, the light emitting layer and the electron injecting layer may each have a multi-layer structure. When the hole injecting layer has a multi-layer structure, the layer into which holes are injected from the electrode is called as a hole injecting layer, and the layer which receives holes from the hole injecting layer and transports holes to the light emitting layer is called as a hole transporting layer. Similarly, when the electron injecting layer has a multi-layer structure, the layer into which electron are injected from the electrode

is called as an electron injecting layer, and the layer which receives electrons from the electron injecting layer and transports electrons to the light emitting layer is called as an electron transporting layer. The layers are selected in accordance with the energy levels of the material, heat resistance and adhesion with the organic thin film layers or the metal electrodes.

[0033] Examples of the light emitting material and the host material which can be used for the organic thin film layer in combination with the compound represented by general formula (1) include anthracene, naphthalene, phenanthrene, pyrene, tetracene, coronene, chrysene, fluoresceine, perylene, phthaloperylene, naphthaloperylene, perynone, phthaloperynone, naphthaloperynone, diphenylbutadiene, tetraphenylbutadiene, coumarine, oxadiazole, aldazine, bisbenzoxazoline, bisstyryl, pyrazine, cyclopentadiene, metal complexes of quinoline, metal complexes of aminoquinoline, metal complexes of benzoquinoline, imines, diphenylethylene, vinylanthracene, diaminoanthracene, diaminocarbazole, pyrane, thiopyrane, polymethine, melocyanine, oxinoid compounds chelated with imidazole, quinacridone, rubrene, stilbene-based derivatives and fluorescent pigments. However, the light emitting material and the host material are not limited to the compounds described above.

[0034] As the light emitting material, phosphorescent organometallic complexes are used since the external quantum efficiency of the device can be improved. The metal in the phosphorescent organometallic complex is ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum or gold. It is preferable that the organometallic complex is an organometallic compound represented by the following general formula (A):

【化 1 5】

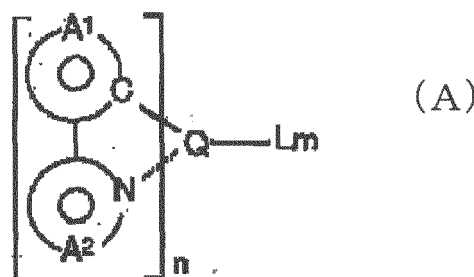

[0035] In the above general formula, A¹ represents a substituted or unsubstituted aromatic hydrocarbon cyclic group or aromatic heterocyclic group, which is preferably phenyl group, biphenyl group, naphthyl group, anthryl group, thienyl group, pyridyl group, quinolyl group or isoquinolyl group. Examples of the substituent include halogen atoms such as fluorine atom; alkyl groups having 1 to 30 carbon atoms such as methyl group and ethyl group; alkenyl groups such as vinyl group; alkoxy carbonyl groups having 1 to 30 carbon atoms such as methoxy carbonyl group and ethoxy carbonyl group; alkoxy groups having 1 to 30 carbon atoms such as methoxy group and ethoxy group; aryloxy groups such as phenoxy group and benzyloxy group; dialkylamino groups such as dimethylamino group and diethylamino group; acyl groups such as acetyl group; haloalkyl groups such as trifluoromethyl group; and cyano group.

[0036] A² represents a substituted or unsubstituted aromatic heterocyclic group having nitrogen atom as the atom forming the heterocyclic ring, which is preferably pyridyl group, pyrimidyl group, pyrazine group, triazine group, benzothiazole group, benzoxazole group, benzimidazole group, quinolyl group, isoquinolyl group, quinoxaline group or phenanthridine group. Examples of the substituent include the substituents described as the examples of the substituent for the group represented by A¹.

[0037] The ring having the group represented by A¹ and the ring having the group represented by A² may form one condensed ring. Examples of the condensed ring include 7,8-benzoquinoline group.

[0038] Q represents a metal selected from ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum and gold.

[0039] L represents a bidentate ligand, which is preferably selected from ligands of the β-diketone type such as acetylacetonates and pyromellitic acid.


[0040] m and n each represent an integer. When Q represents a divalent metal, n=2 and m=0. When Q represents a trivalent metal, n=3 and m=0 or n=2 and m=1.

[0041] Specific examples of the organometallic complex represented by the above general formula (A) are shown in the following. However, the organometallic complex is not limited to these compounds.


(K-1)

5

10



(K-2)

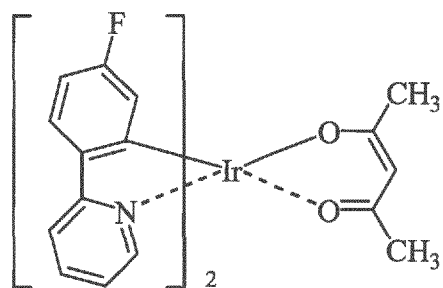


(K-3)


15

20

25



(K-4)




(K-5)


30

35

40

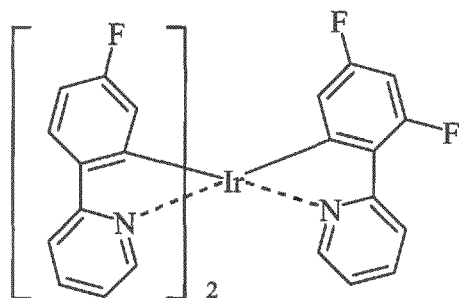

(K-6)




(K-7)


45

50


55

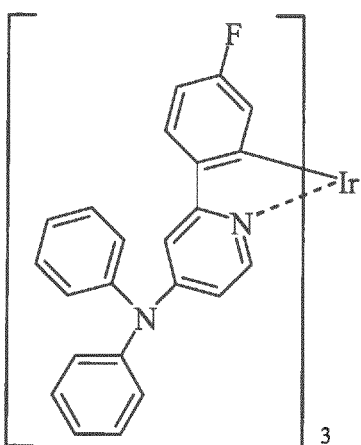


(K-8)

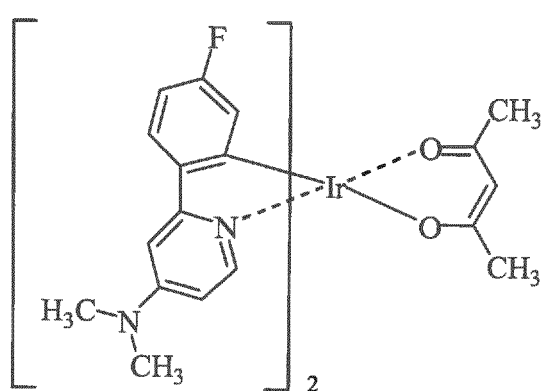


(K-9)




(K-10)




(K-11)




(K-12)




(K-13)

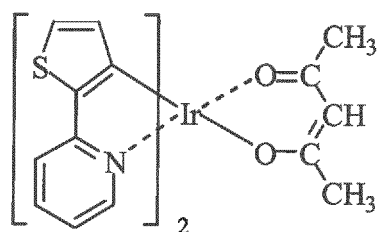


(K-14)

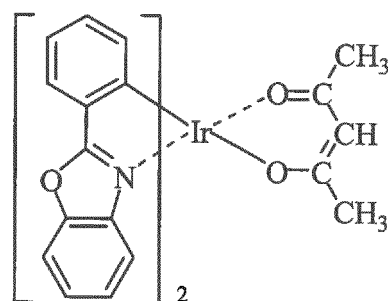

(K-15)

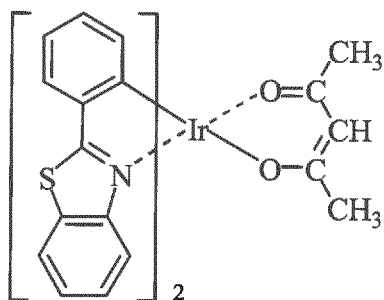

(K-16)

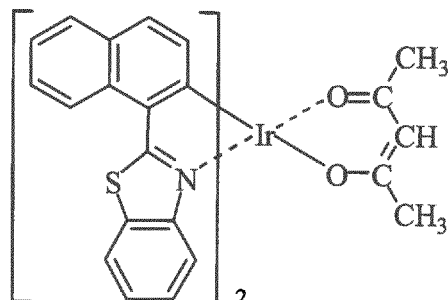


(K-17)

5

10

15

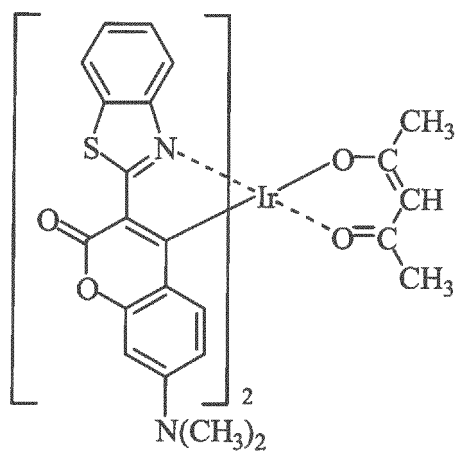


20

(K-18)

25

30

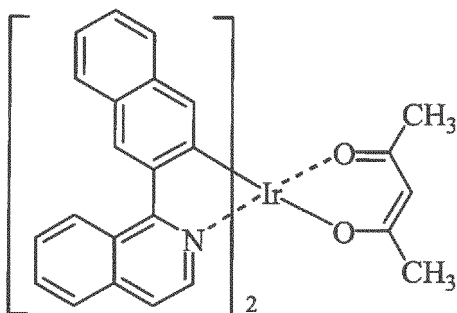


35

(K-19)

40


45

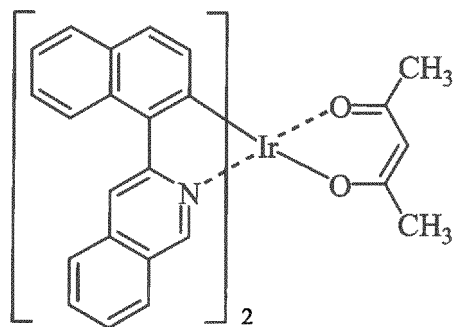


50

(K-20)

55

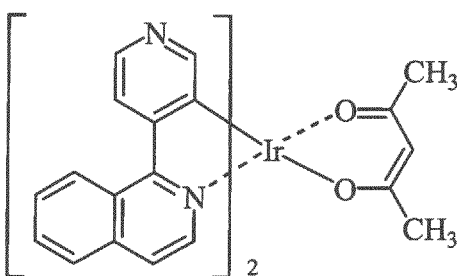

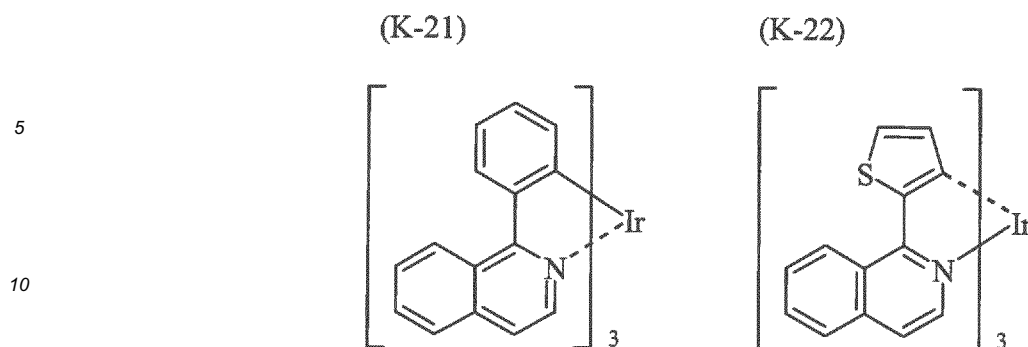

[0042] As the hole injecting material, compounds which have the ability to transport holes, exhibit the excellent effect of receiving holes injected from the anode and the excellent effect of injecting holes to the light emitting layer or the light emitting material, prevent transfer of excitons formed in the light emitting layer to the electron injecting layer or the electron injecting material and have the excellent ability of forming a thin film, are preferable. Examples of the hole injecting compound include phthalocyanine derivatives, naphthalocyanine derivatives, porphyrin derivatives, oxazoles, oxadiazoles, triazoles, imidazoles, imidazolones, imidazolethiones, pyrazolines, pyrazolones, tetrahydroimidazoles, oxazoles, oxadiazoles, hydrazones, acylhydrazones, polyaryalkanes, stilbene, butadiene, triphenylamine of the benzidine type, triphenylamine of the styrylamine type, triphenylamine of the diamine type, derivatives of the above compounds and macromolecular materials such as polyvinylcarbazoles, polysilanes and electrically conductive macromolecules. However, the hole injecting material is not limited to these materials.

[0043] Among these hole injecting materials, the more effective hole injecting materials are aromatic tertiary amine derivatives and phthalocyanine derivatives. Examples of the aromatic tertiary amine derivative include triphenylamine, tritolylamine, tolyldiphenylamine, N,N'-diphenyl-N,N'-(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N,N',N'-(4-methylphenyl)-1,1'-phenyl-4,4'-diamine, N,N,N',N'-(4-methylphenyl)-1,1'-biphenyl-4,4'-diamine, N,N'-diphenyl-N,N'-dinaphthyl-1,1'-biphenyl-4,4'-diamine, N,N'-(methylphenyl)-N,N'-(4-n-butylphenyl)-phenanthrene-9,10-diamine, N,N-bis(4-di-4-tolylaminophenyl)-4-phenylcyclohexane and oligomers and polymers having the skeleton structure of these aromatic tertiary amines. However, the aromatic tertiary amine is not limited to these compounds. Examples of the phthalocyanine (Pc) derivative include phthalocyanine derivatives and naphthalocyanine derivatives such as H₂Pc, CuPc, CoPc, NiPc, ZnPc, PdPc, FePc, MnPc, ClAlPc, ClGaPc, ClInPc, ClSnPc, Cl₂SiPc, (HO)AlPc, (HO)GaPc, VOPc, TiOPc, MoOPc and GaPc-O-GaPc. However the phthalocyanine derivative is not limited to these compounds.

[0044] As the electron injecting material, compounds which have the ability to transport electrons, exhibit the excellent effect of receiving electrons injected from the anode and the excellent effect of injecting electrons to the light emitting layer or the light emitting material, prevent transfer of excitons formed in the light emitting layer to the hole injecting layer and have the excellent ability of forming a thin film, are preferable. Examples of the electron injecting compound include fluorenone, anthraquinodimethane, diphenoquinone, thiopyrane dioxide, oxazoles, oxadiazoles, triazoles, imidazoles, perylenetetracarboxylic acid, quinoxaline, fluorenylidene methane, anthraquinodimethane, anthrone and derivatives of these compounds. However, the electron injecting material is not limited to these compounds.

[0045] Among these electron injecting materials, the more effective electron injecting materials are metal complex compounds and five-membered derivatives having nitrogen. Examples of the metal complex compound include 8-hydroxyquinolinatolithium, bis(8-hydroxy-quinolinato)zinc, bis(8-hydroxyquinolinato)copper, bis(8-hydroxy-quinolinato)manganese, tris(8-hydroxyquinolinato)aluminum, tris(2-methyl-8-hydroxyquinolinato)aluminum, tris(8-hydroxyquinolinato)-gallium, bis(10-hydroxybenzo[h]quinolinato)beryllium, bis(10-hydroxy-benzo[h]quinolinato)zinc, bis(2-methyl-8-quinolinato)chlorogallium, bis(2-methyl-8-quinolinato)(o-cresolato)gallium, bis(2-methyl-8-quinolinato)-(1-naphtholato)aluminum and bis(2-methyl-8-quinolinato)(2-naphtholato)-gallium. However the electron injecting material is not limited to these compounds.

[0046] Oxazoles, thiazoles, oxadiazoles, thiadiazoles, triazoles and derivatives of these compounds are preferable as the five-membered derivative having nitrogen. Specific examples of the five-membered derivative having nitrogen include 2,5-bis(1-phenyl)-1,3,4-oxazole, dimethylPOPOP, 2,5-bis(1-phenyl)-1,3,4-thiazole, 2,5-bis(1-phenyl)-1,3,4-oxadiazole, 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,5-oxadiazole, 2,5-bis(1-naphthyl)-1,3,4-oxadiazole, 1,4-bis[2-(5-phenyloxadiazolyl)]benzene, 1,4-bis[2-(5-phenyloxadiazolyl)-4-tert-butylbenzene], 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,4-thiadiazole, 2,5-bis(1-naphthyl)-1,3,4-thiadiazole, 1,4-bis[2-(5-phenylthiadiazolyl)]benzene, 2-(4'-tert-butylphenyl)-5-(4"-biphenyl)-1,3,4-triazole, 2,5-bis(1-naphthyl)-1,3,4-triazole and 1,4-bis[2-(5-phenyltriazolyl)]benzene. However, the five-membered derivative having nitrogen is not limited to these compounds.

[0047] The property of charge injection can be improved by adding an electron-accepting compound to the hole injecting material and by adding an electron-donating compound to the electron injecting material.

[0048] As the electrically conductive material used for the anode of the organic EL device of the present invention, a material having a work function greater than 4 eV is suitable, and carbon, aluminum, vanadium, iron, cobalt, nickel, tungsten, silver, gold, platinum, palladium, alloys of these metals, metal oxides such as tin oxides and indium oxide used for ITO substrates and NESA substrates and organic electrically conductive resins such as polythiophene and polypyrrol are used. As the electrically conductive material used for the cathode, a material having a work function smaller than 4 eV is suitable, and magnesium, calcium, tin, lead, titanium, yttrium, lithium, ruthenium, manganese, aluminum and alloys of these metals are used. However, the electrically conductive material used for the cathode is not limited to these materials. Typical examples of the alloy include magnesium/silver, magnesium/indium and lithium/aluminum. However, the alloy is not limited to these alloys. The composition of the alloy is controlled by the temperature of the source of vaporization, the atmosphere and the degree of vacuum and a suitable composition is selected. The anode and the cathode may be formed with a structure having two or more layers, where necessary.

[0049] The organic EL device of the present invention may comprise an inorganic compound layer between at least one of the electrodes and the above organic thin film layer. Examples of the inorganic compound used for the inorganic compound layer include various types of oxides, nitrides and oxide nitrides such as alkali metal oxides, alkaline earth metal oxides, rare earth oxides, alkali metal halides, alkaline earth metal halides, rare earth halides, SiO_x , AlO_x , SiN_x , SiON , AlON , GeO_x , LiO_x , LiON , TiO_x , TiON , TaO_x , TaON , TaN_x and C. In particular, as the component contacting the anode, SiO_x , AlO_x , SiN_x , SiON , AlON , GeO_x and C are preferable since a stable interface layer of injection is formed. As the component contacting the cathode, LiF , MgF_2 , CaF_2 , MgF_2 and NaF are preferable.

[0050] In the organic EL device of the present invention, it is preferable that at least one surface is sufficiently transparent in the region of the wavelength of the light emitted by the device so that the light emission is achieved efficiently. It is preferable that the substrate is also transparent.

[0051] For the transparent electrode, the conditions in the vapor deposition or the sputtering are set so that the prescribed transparency is surely obtained using the above electrically conductive material. It is preferable that the electrode of the light emitting surface has a transmittance of light of 10% or greater. The substrate is not particularly limited as long as the substrate has the mechanical and thermal strength and is transparent. Examples of the substrate include glass substrates and transparent films of resins. Examples of the transparent film of a resin include films of polyethylene, ethylene-vinyl acetate copolymers, ethylene-vinyl alcohol copolymers, polypropylene, polystyrene, polymethyl methacrylate, polyvinyl chloride, polyvinyl alcohol, polyvinyl butyral, nylon, polyether ether ketones, polysulfones, polyether sulfones, tetrafluoroethylene-perfluoroalkyl vinyl ether copolymers, polyvinyl fluoride, tetrafluoroethylene-ethylene copolymers, tetrafluoroethylene-hexafluoropropylene copolymers, polychlorotrifluoroethylene, polyvinylidene fluoride, polyesters, polycarbonates, polyurethanes, polyimides, polyether imides, polyimides and polypropylene.

[0052] In the organic EL device of the present invention, it is possible that a protective layer is formed on the surface of the device or the entire device is covered with a silicone oil or a resin so that stability to the temperature, the humidity and the atmosphere is improved.

[0053] For the formation of each layer of the organic EL device of the present invention, any of the dry processes of film formation such as the vacuum vapor deposition, the sputtering, the plasma plating and the ion plating and the wet processes of film formation such as the spin coating, the dipping and the flow coating, can be applied. Although the thickness of each film is not particularly limited, it is necessary that the thickness of the film be set at a suitable value. When the thickness is excessively great, application of a greater voltage is necessary to obtain the same output of the light, and the efficiency of light emission decreases. When the thickness is excessively small, pin holes are formed, and sufficient light emission cannot be obtained even when an electric field is applied. In general, a thickness in the range of 5 nm to 10 μm is suitable and a thickness in the range of 10 nm to 0.2 μm is preferable.

[0054] When the wet process of film formation is used, the material forming each layer is dissolved or suspended in a suitable solvent such as ethanol, chloroform, tetrahydrofuran and dioxane, and a thin film is formed from the obtained solution or suspension. Any of the above solvents can be used. For any of the layers, suitable resins and additives may be used to improve the property for film formation and to prevent formation of pin holes in the film. Examples of the resin which can be used include insulating resins such as polystyrene, polycarbonates, polyarylates, polyesters, polyamides, polyurethanes, polysulfones, polymethyl methacrylate, polymethyl acrylate, cellulose and copolymer resins derived from these resins; photoconductive resins such as poly-N-vinylcarbazole and polysilanes; and electrically conductive resins such as polythiophene and polypyrrol. Examples of the additive include antioxidants, ultraviolet light absorbents and plasticizers.

[0055] As described above, by using the compound represented by general formula (1) for the organic thin film layer of the organic EL device of the present invention, the organic EL device emitting blue light with a high purity of color can be obtained. This organic EL device can be advantageously used for a photosensitive member for electronic photograph, a planar light emitting member such as a flat panel display of wall televisions, a back light of copiers, printers and liquid crystal displays, a light source for instruments, a display panel, a marker lamp and an accessory.

[0056] The present invention will be described more specifically with reference to examples in the following. However, the present invention is not limited to the examples.

[0057] The triplet energy gap and the singlet energy gap of a compound were measured in accordance with the following methods.

(1) Measurement of the triplet energy gap


[0058] The lowest excited triplet energy level T1 was measured. The phosphorescence spectrum of a sample was measured (a 10 μ moles/liter EPA (diethyl ether : isopentane : ethanol=5:5:2 by volume) solution; 77K; a quartz cell; FLUOROLOG 11 manufactured by SPEX Company). A tangent line was drawn to the increasing line at the short wavelength side of the phosphorescence spectrum, and the wavelength (the end of light emission) at the intersection of the tangent line and the abscissa was obtained. The obtained wavelength was converted into the energy.

(2) Measurement of the singlet energy gap

[0059] The excited singlet energy gap was measured. Using a toluene solution (10^{-5} moles/liter) of a sample, the absorption spectrum was obtained by a spectrometer for absorption of ultraviolet and visible light manufactured by HITACHI Co. Ltd. A tangent line was drawn to the increasing line at the long wavelength side of the spectrum, and the wavelength (the end of absorption) at the intersection of the tangent line and the abscissa was obtained. The obtained wavelength was converted into the energy.

Synthesis Example 1 (Synthesis of Compound (A2): 9-(2,6-dipyridyl-pyridin-4-yl)carbazole)

[0060] The route of synthesis of Compound (A2) is shown in the following.

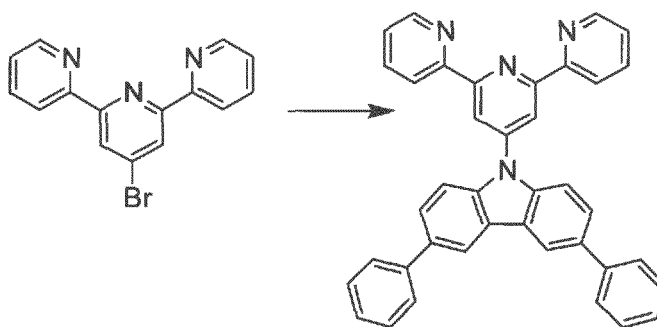


[0061] Under the atmosphere of argon, 2,6-dipyridyl-4-bromopyridine (9.4 g, 30 mmole), 3,6-diphenylcarbazole (9.6 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (13.2 g, the yield: 80%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS (the field desorption mass analysis) that the product was Compound (A2) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0062] FD-MS calcd. for $\text{C}_{39}\text{H}_{26}\text{N}_4$ = 550; found: $m/z=550$ (M^+ , 100)

[0063] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 2 (Synthesis of Compound (A14): 2-(2,6-dipyridyl-pyridin-4-yl)-5-(9-carbazolyl)pyrimidine)

[0064] The route of synthesis of Compound (A14) is shown in the following.

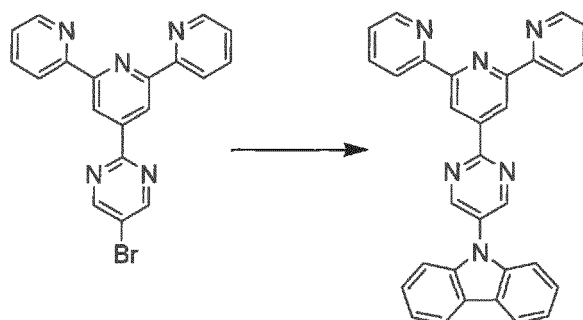


[0065] Under the atmosphere of argon, 2-(2,6-dipyridylpyridin-4-yl)-5-bromopyrimidine (12 g, 30 mmole), carbazole (5 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (10.9 g, the yield: 76%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS that the product was Compound (A14) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0066] FD-MS calcd. for $\text{C}_{31}\text{H}_{20}\text{N}_6=476$; found: $m/z=476$ (M^+ , 100)

[0067] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 3 (Synthesis of Compound (A33): 2,6-di(9-carbazolyl)-pyridine)

[0068] The route of synthesis of Compound (A33) is shown in the following.

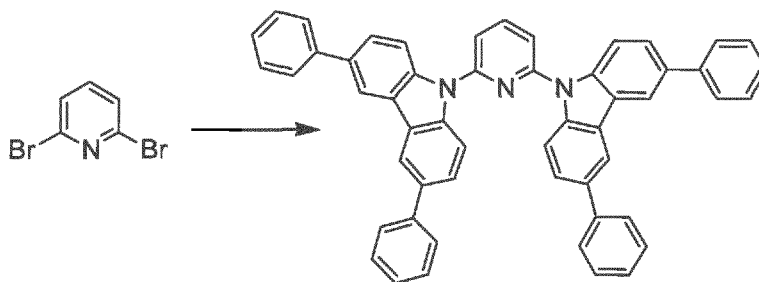


[0069] Under the atmosphere of argon, 2,6-dibromopyridine (2.4 g, 10 mmole), 3,6-diphenylcarbazole (9.6 g, 30 mmole), copper iodide (0.06 g, 0.32 mmole, 1% Cu), trans-1,2-cyclohexanediamine (0.4 ml, 3.3 mmole, 10 eq to Cu) and potassium phosphate (14 g, 66 mmole, 2.2 eq) were suspended in anhydrous dioxane (30 ml), and the resultant suspension was heated under the refluxing condition for 10 hours. The reaction mixture was filtered and washed with toluene. The filtrate was concentrated and, after purification in accordance with the column chromatography, a white solid substance (4.8 g, the yield: 67%) was obtained. It was confirmed in accordance with $^1\text{H-NMR}$ and FD-MS that the product was Compound (A33) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0070] FD-MS calcd. for $\text{C}_{53}\text{H}_{35}\text{N}_3=713$; found: $m/z=713$ (M^+ , 100)

[0071] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 4 (Synthesis of Compound (A45))

[0072] The route of synthesis of Compound (A45) is shown in the following.

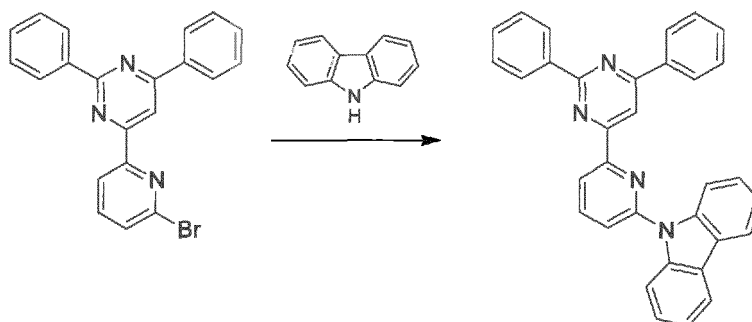


[0073] 2-(2,4-Diphenylpyrimidin-6-yl)-6-bromopyridine (3.2 g, 8 mmole), carbazole (1.4 g, 9 mmole), copper iodide (0.08 g, 0.4 mmole) and potassium phosphate (3.7 g, 17 mmole) were suspended in 1,4-dioxane (16 ml), and trans-1,2-cyclohexanediamine (0.5 ml, 4 mmole) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 15 hours under the atmosphere of argon. The reaction solution was cooled to the room temperature, and water was added. After extraction with methylene chloride, the obtained organic layer was washed with water and dried with anhydrous sodium sulfate. After the organic solvent was removed by distillation under a reduced pressure, 25 ml of ethyl acetate was added. The formed crystals were separated by filtration and washed with ethyl acetate, and crystals (2.3 g, the yield: 59%) were obtained. It was confirmed in accordance with 90 MHz ¹H-NMR and FD-MS that the obtained crystals were Compound (A45) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0074] FD-MS calcd. for C₃₃H₂₂N₄=474; found: m/z=474 (M⁺, 100)

[0075] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 5 (Synthesis of Compound (A46))

[0076] The route of synthesis of Compound (A46) is shown in the following.

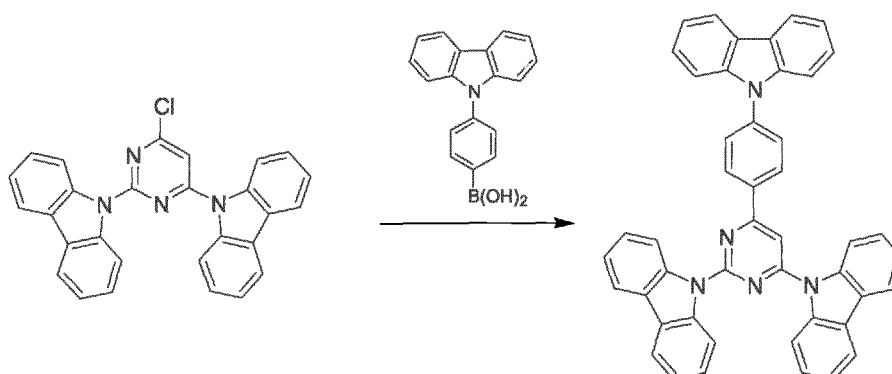


[0077] 2,4-Dicarbazolyl-6-chloropyrimidine (2.5 g, 6 mmole), 4-carbazolyl-phenylboronic acid (1.6 g, 6 mmole), copper iodide (0.08 g, 0.4 mmole) and tetrakis(triphenylphosphine)palladium (0.13 g, 0.1 mmole) were suspended in 1,2-dimethoxyethane (25 ml), and a solution prepared by dissolving sodium carbonate (1.8 ml, 17 mmole) in water (8 ml) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 9 hours and 20 minutes. After the reaction solution was cooled to the room temperature, formed crystals were separated by filtration and washed with water, methanol and ethyl acetate, successively, and crude crystals (3.7 g) were obtained. The obtained crude crystals were purified by sublimation under a reduced pressure, and purified crystals (3.1 g, the yield: 85%) were obtained. It was confirmed in accordance with 90 MHz ¹H-NMR and FD-MS that the obtained crystals were Compound (A46) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0078] FD-MS calcd. for C₄₆H₂₉N₅=651; found: m/z=651 (M⁺, 100)

[0079] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

Synthesis Example 6 (Synthesis of Compound (A47))

[0080] The route of synthesis of Compound (A47) is shown in the following.

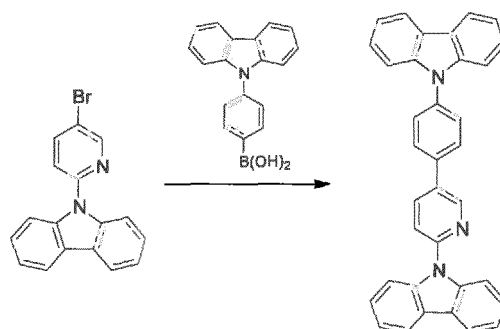5
10

[0081] 2-Carbazolyl-5-bromopyridine (1.9 g, 6 mmole), 4-carbazolylphenyl-boric acid (1.7 g, 6 mmole) and tetrakis(triphenylphosphine)palladium (0.14 g, 0.1 mmole) were suspended in 1,2-dimethoxyethane (18 ml), and a solution prepared by dissolving sodium carbonate (1.9 ml, 18 mmole) in water (9 ml) was added to the resultant suspension. The obtained suspension was heated under the refluxing condition for 9 hours and 15 minutes. After the reaction solution was cooled to the room temperature, formed crystals were separated by filtration and washed with water, methanol and ethyl acetate, successively, and crude crystals (2.9 g) were obtained. The formed crystals were purified by sublimation under a reduced pressure, and purified crystals (2.4 g, the yield: 84%) were obtained. It was confirmed in accordance with 90 MHz ¹H-NMR and FD-MS that the obtained crystals were Compound (A47) of the object compound. The result of the measurement by FD-MS is shown in the following.

[0082] FD-MS calcd. for C₃₅H₂₃N₃=485; found: m/z=485 (M⁺, 100)

[0083] The singlet energy gap and the triplet energy gap of the obtained compound are shown in Table 1.

25

Table 1


	Compound	Singlet energy gap (eV)	Triplet energy gap (eV)
Synthesis Example 1	A2	3.2	2.7
Synthesis Example 2	A14	3.2	2.8
Synthesis Example 3	A33	3.3	2.7
Synthesis Example 4	A45	3.2	2.8
Synthesis Example 5	A46	3.3	2.8
Synthesis Example 6	A47	3.4	2.8

35


Example 1 (not according to the invention)

[0084] A glass substrate (manufactured by GEOMATEC Company) of 25 mm×75 mm×1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of N,N'-bis-(N,N'-diphenyl-4-aminophenyl)-N,N'-diphenyl-4,4'-diamino-1,1'-biphenyl (TPD232) having a thickness of 60 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of TPD232 worked as the hole injecting layer. On the formed film of TPD232, a film of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPD) having a thickness of 20 nm was formed. The formed film of NPD worked as the hole transporting layer. On the formed film of NPD, a film of the above Compound (A2) having a thickness of 40 nm was formed by vapor deposition. At the same time, Compound (D1) shown in the following was vapor deposited in an amount such that the ratio of the amounts by weight of Compound (A2) to Compound (D1) was 40:3. Compound (D1) is a light emitting compound having a singlet energy as low as 2.79 eV so that blue light is emitted. The formed mixed film of Compound (A5) and Compound (D1) worked as the light emitting layer. On the film formed above, a film of BAQ shown in the following (Me means methyl group) having a thickness of 20 nm was formed. The film of BAQ worked as the electron injecting layer. Thereafter, Li (the source of lithium: manufactured by SAES GETTERS Company) as the reducing dopant and Alq were binary vapor deposited, and an Alq/Li film having a thickness of 10 nm was formed as the second electron injecting layer (the cathode). On the formed Alq/Li film, metallic aluminum was vapor deposited to form a metal cathode, and an organic EL device was prepared.

[0085] When a direct current voltage of 5.0 V was applied to the organic EL device prepared above, blue light was efficiently emitted at a luminance of 150 cd/m² and an efficiency of the light emission of 6.7 cd/A. The chromaticity coordinates were (0.15, 0.16), and the purity of color was excellent.

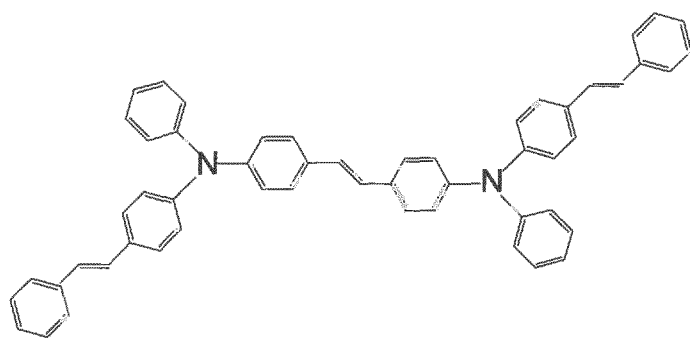5
10
15

(D1)

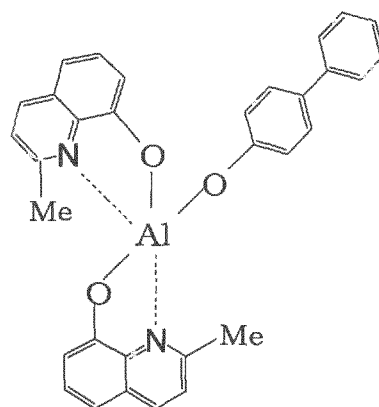

BA1q

Examples 2 to 3 (not according to the invention)

20


[0086] In accordance with the same procedures as those conducted in Example 1 except that compounds shown in Table 2 were used in place of Compound (A2), organic EL devices were prepared, and the voltage of the direct current, the luminance of the emitted light, the efficiency of the light emission, the color of the emitted light and the purity of color were measured. The results are shown in Table 2.

25

Comparative Example 1

[0087] In accordance with the same procedures as those conducted in Example 1 except that a conventional compound BCz shown in the following was used in place of Compound (A2), an organic EL device was prepared, and the voltage of the direct current, the luminance of the emitted light, the efficiency of the light emission, the color of the emitted light and the purity of color were measured. The results are shown in Table 2.

30

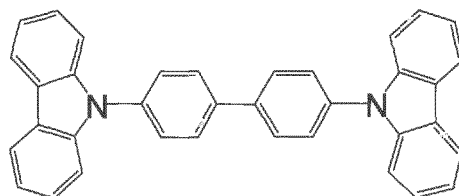

BCz

35
40

Table 2

45

	Organic host material of light emitting layer	Voltage (V)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Color of emitted light	Chromaticity coordinates
Example 1	A2	5.0	150	6.7	blue	(0.15, 0.16)
Example 2	A14	6.0	130	5.5	blue	(0.14, 0.16)
Example 3	A33	7.0	161	6.9	blue	(0.15, 0.16)
Comparative Example 1	BCz	8.5	120	3.4	blue	(0.14, 0.16)

55


[0088] As shown in Table 2, in comparison with the organic EL device of Comparative Example 1 using the conventional compound BCz, the organic EL devices using the compounds of the present invention could be driven at lower voltages

and emitted blue light in greater efficiencies. Since the energy gap of the compounds of the present invention is great, the light emitting molecule having a great energy gap could be mixed into the light emitting layer and used for the light emission.




5 Example 4

[0089] A glass substrate of 25 mm×75 mm×1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of copper phthalocyanine (CuPc shown in the following) having a thickness of 10 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of CuPc worked as the hole injecting layer. On the formed film of CuPc, a film of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl (α -NPD shown in the following) having a thickness of 30 nm was formed. The formed film of α -NPD worked as the hole transporting layer. On the formed film of α -NPD, a film of the above Compound (A46) as the host material having a thickness of 30 nm was formed by vapor deposition, and the light emitting layer was formed. At the same time, tris(2-phenylpyridine)iridium (Ir(ppy)₃ shown in the following) as the phosphorescent Ir metal complex dopant was added. The concentration of Ir(ppy)₃ in the light emitting layer was set at 5% by weight. This layer worked as the light emitting layer. On the film formed above, a film of (1,1'-bis(phenyl)-4-olato)bis-(2-methyl-8-quinolinolato)aluminum (BALq) having a thickness of 10 nm was formed. The BALq film worked as the hole barrier layer. On the film formed above, a film of an aluminum complex of 8-hydroxyquinoline (Alq shown in the following) having a thickness of 40 nm was formed. The Alq film worked as the electron injecting layer. Thereafter, LiF as the alkali metal halide was vapor deposited in an amount such that the formed film had a thickness of 0.2 nm, and then aluminum was vapor deposited in an amount such that the formed film had a thickness of 150 nm. The formed Alq/Li film worked as the cathode. Thus, an organic EL device was prepared.

[0090] When the obtained device was tested by passing an electric current, green light having a luminance of 100 cd/m² was emitted with the efficiency of the light emission of 44.5 cd/A at a voltage of 5.5 V and a current density of 0.22 mA/cm². The chromaticity coordinates were (0.32, 0.61).



CuPc

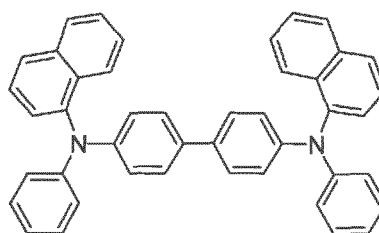 α -NPDIr(ppy)₃

Alq

Example 5


[0091] In accordance with the same procedures as those conducted in Example 4 except that Compound (A45) was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device were prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.

Comparative Example 2

[0092] In accordance with the same procedures as those conducted in Example 4 except that a conventional compound BCz shown above was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.

Comparative Example 3

[0093] In accordance with the same procedures as those conducted in Example 4 except that Compound (A-10) shown in the following which is described in United States Patent Application Laid-Open No. 2002-0028329A1 was used as the host material in the light emitting layer in place of Compound (A46), an organic EL device was prepared and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission and the chromaticity were measured. The results are shown in Table 3.



A-10

Table 3 - 1

	Organic host material in light emitting layer	Triplet energy gap (eV)	Singlet energy gap (eV)
Example 4	A46	2.8	3.3
Example 5	A45	2.8	3.2
Comparative Example 2	BCz	2.8	3.6
Comparative Example 3	A-10	3.1	3.7

Table 3 - 2


	Voltage (V)	Current density (mA/cm ²)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Chromaticity coordinates (x, y)
Example 4	5.5	0.22	100	44.5	(0.32, 0.61)
Example 5	5.7	0.23	97	41.8	(0.32, 0.61)
Comparative Example 2	5.4	0.31	101	32.6	(0.32, 0.61)
Comparative Example 3	5.9	0.32	100	31.8	(0.32, 0.61)

[0094] As shown in Table 3, in comparison with the organic EL devices of Comparative Examples 2 and 3 using conventional compounds (BCz and A-10), the organic EL devices using the compounds of the present invention emitted green light in greater efficiencies. Since the energy gap of the compounds of the present invention was great, the light emitting molecules having great energy gaps could be mixed into the light emitting layer and used for the light emission.

Example 6

[0095] A glass substrate of 25 mm×75 mm×1.1 mm (thickness) having an ITO transparent electrode was ultrasonically cleaned in isopropyl alcohol for 5 minutes and then further cleaned by exposure to ozone generated by ultraviolet light for 30 minutes. The glass substrate having the transparent electrode lines which had been cleaned was attached to a substrate holder of a vacuum vapor deposition apparatus. On the surface of the cleaned substrate at the side having the transparent electrode, a film of phthalocyanine copper (CuPc) having a thickness of 10 nm was formed in a manner such that the formed film covered the transparent electrode. The formed film of CuPc worked as the hole injecting layer. On the formed film of CuPc, a film of 1,1'-bis[4-N,N-di(para-tolyl)aminophenyl]cyclohexane (TPAC shown in the following) having a thickness of 30 nm was formed. The formed film of TPAC worked as the hole transporting layer. On the formed film of TPAC, a film of the above Compound (A46) having a thickness of 30 nm was formed by vapor deposition, and the light emitting layer was formed. At the same time, Ir bis[(4,6-difluorophenyl)pyridinato-N,C²]picolinate (Flrpic shown in the following) as the phosphorescent Ir metal complex was added. The concentration of Flrpic in the light emitting layer was set at 7% by weight. The formed film worked as the light emitting layer. On the film formed above, a film of the aluminum complex of 8-hydroxyquinoline (Alq) having a thickness of 30 nm was formed. The film of Alq worked as the electron injecting layer. Thereafter, Li as the alkali metal halide was vapor deposited, and a film having a thickness of 0.2 nm was formed. Then, aluminum was vapor deposited, and a film having a thickness of 150 nm was formed. The formed Alq/Li film worked as the cathode. An organic EL device was prepared as described above.

[0096] When the obtained device was tested by passing an electric current, blue light having a luminance of 99 cd/m² was emitted with the efficiency of the light emission of 22.4 cd/A at a voltage of 6.4 V and a current density of 0.44 mA/cm². The chromaticity coordinates were (0.17, 0.39).

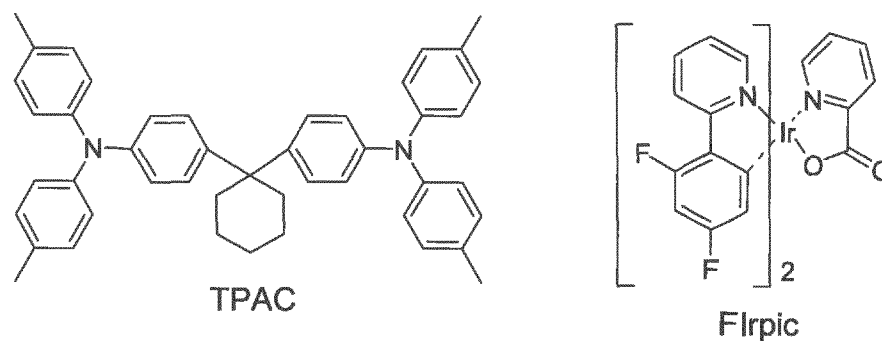

Example 7

[0097] In accordance with the same procedures as those conducted in Example 6 except that Compound (A45) was used as the host material in the light emitting layer in place of Compound (A46), an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Comparative Example 4

[0098] In accordance with the same procedures as those conducted in Example 6 except that the above conventional compound BCz was used as the host material in the light emitting layer in place of Compound (A46), an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Comparative Example 5

[0099] In accordance with the same procedures as those conducted in Comparative Example 4 except that α -NPD was used for the hole transporting layer in place of the compound (TPAC) and BAlq was used for the electron injecting layer in place of the compound Alq, an organic EL devices was prepared, and the voltage, the current density, the luminance of the emitted light, the efficiency of the light emission, the chromaticity were measured. The results are shown in Table 4.

Table 4 - 1

	Organic host material in light emitting layer	Triplet energy gap (eV)	Singlet energy gap (eV)
5	Example 6	A46	2.8
	Example 7	A45	2.8
	Comparative Example 4	BCz	2.8
	Comparative Example 5	BCz	2.8

Table 4 - 2

	Voltage (V)	Current density (mA/cm ²)	Luminance of emitted light (cd/m ²)	Efficiency of light emission (cd/A)	Chromaticity coordinates (x, y)	
15	Example 6	6.4	0.44	99	22.4	(0.17, 0.39)
	Example 7	6.8	0.55	99	18.2	(0.17, 0.39)
	Comparative Example 4	7.8	1.70	98	5.80	(0.16, 0.37)
20	Comparative Example 5	7.6	1.09	99	9.15	(0.17, 0.37)

25 **[0100]** As shown in Table 4, in comparison with the organic EL devices of Comparative Examples using the conventional compound BCz, the organic EL devices using the compounds of the present invention could be driven at lower voltages and emitted blue light in greater efficiencies. Since the energy gap of the compound of the present invention was great, the light emitting molecules having great energy gaps could be mixed into the light emitting layer and used for the light emission.

30 INDUSTRIAL APPLICABILITY

35 **[0101]** As described above in detail, by utilizing the material for organic electroluminescence devices comprising the compound represented by general formula (1), the organic electroluminescence device of the invention emitting blue light having an excellent purity of color at a high efficiency of light emission can be obtained. Therefore, the organic electroluminescence device of the present invention is very useful as the light source for various electronic instruments.

40 **Claims**

- 40 **1.** An organic electroluminescent device which comprises a cathode, an anode and an organic thin film layer comprising at least one layer sandwiched between the cathode and the anode, wherein the organic thin film layer comprises a light emitting layer; the light emitting layer comprises a phosphorescent organometallic complex and a material for organic electrolumi-
45 nescent devices; the metal in the phosphorescent organometallic complex is ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum or gold; the material for organic electroluminescent devices is an organic host material, and is represented by the following general formula (1):





wherein Cz represents a substituted or unsubstituted carbazolyl group, M represents a substituted or unsubstituted heteroaromatic cyclic group selected from the group consisting of pyridine, pyrimidine, and quinazoline, n represents 1 or 2, and m represents 1;


55 a plurality of Cz may represent different groups when n represents 2, and the substituent to the groups represented by Cz and M is selected from the group consisting of halogen atoms, carbazole group, hydroxyl group, substituted or unsubstituted amine groups, nitro group, cyano group, silyl group,

trifluoromethyl group, carbonyl group, carboxyl group, substituted or unsubstituted alkyl groups, substituted or unsubstituted alkenyl groups, substituted or unsubstituted arylalkyl groups, substituted or unsubstituted aromatic groups, substituted or unsubstituted heteroaromatic heterocyclic groups, substituted or unsubstituted aralkyl groups, substituted or unsubstituted aryloxy groups, and substituted or unsubstituted alkyloxy groups.

2. The organic electroluminescent device according to Claim 1, wherein the compound represented by general formula (1) is a compound represented by following general formula (2) or (3):



3. The organic electroluminescent device according to Claim 1 or 2 wherein the phosphorescent organometallic complex is represented by the following general formula (A):

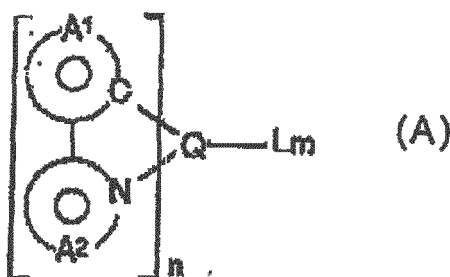

wherein A^1 represents a substituted or unsubstituted aromatic hydrocarbon cyclic group or aromatic heterocyclic group, A^2 represents a substituted or unsubstituted aromatic heterocyclic group having nitrogen atom as the atom forming the heterocyclic ring, Q represents a metal selected from ruthenium, rhodium, palladium, silver, rhenium, osmium, iridium, platinum and gold, L represents a bidentate ligand, m and n each represent an integer; and when Q represents a trivalent metal, $n = 3$ and $m = 0$, or $n = 2$ and $m = 1$.

4. The organic electroluminescent device according to any one of Claims 1 to 3, wherein the triplet energy gap of the material for organic electroluminescent devices represented by general formula (1) is 2.5 to 3.3 eV.
5. The organic electroluminescent device according to any one of Claims 1 to 4, wherein the singlet energy gap of the material for organic electroluminescent devices represented by general formula (1) is 2.8 to 3.8 eV.

Patentansprüche

1. Organische Elektrolumineszenzvorrichtung, die eine Kathode, eine Anode und eine organische Dünnschicht umfasst, die zumindest eine Schicht umfasst, die zwischen der Kathode und der Anode sandwichartig angeordnet ist, wobei
- die organische Dünnschicht eine Licht emittierende Schicht umfasst;
- die Licht emittierende Schicht einen phosphoreszierenden organometallischen Komplex und ein Material für organische Elektrolumineszenzvorrichtungen umfasst;
- das Metall in dem phosphoreszierenden organometallischen Komplex Ruthenium, Rhodium, Palladium, Silber, Rhenium, Osmium, Iridium, Platin oder Gold ist;
- das Material für organische Elektrolumineszenzvorrichtungen ein organisches Wirtsmaterial ist und durch die folgende allgemeine Formel (1) dargestellt wird:





wobei Cz eine substituierte oder unsubstituierte Carbazolyl-Gruppe darstellt, M eine substituierte oder unsubstituierte heteroaromatische cyclische Gruppe darstellt, die aus der Gruppe ausgewählt ist, die aus Pyridin, Pyrimidin und Chinazolin besteht, n 1 oder 2 darstellt, und m 1 darstellt;

eine Mehrzahl von Cz verschiedene Gruppen darstellen kann, wenn n 2 darstellt, und


der Substituent für die Gruppen, die durch Cz und M dargestellt werden, aus der Gruppe ausgewählt wird, die aus

Halogenatomen, Carbazolgruppe, Hydroxylgruppe, substituierten oder unsubstituierten Amingruppen, Nitrogruppe, Cyanogruppe, Silylgruppe, Trifluormethylgruppe, Carbonylgruppe, Carboxylgruppe, substituierten oder unsubstituierten Alkylgruppen, substituierten oder unsubstituierten Alkenylgruppen, substituierten oder unsubstituierten Arylalkylgruppen, substituierten oder unsubstituierten aromatischen Gruppen, substituierten oder unsubstituierten heteroaromatischen heterocyclischen Gruppen, substituierten oder unsubstituierten Aryloxygruppen und substituierten oder unsubstituierten Alkyloxygruppen besteht.

2. Organische Elektrolumineszenzvorrichtung nach Anspruch 1, wobei die durch die allgemeine Formel (1) dargestellte Verbindung eine durch die folgende allgemeine Formel (2) oder (3) dargestellte Verbindung ist:



3. Organische Elektrolumineszenzvorrichtung nach Anspruch 1 oder 2, wobei der phosphoreszierende organometallische Komplex durch die folgende allgemeine Formel (A) dargestellt wird:



wobei A¹ eine substituierte oder unsubstituierte aromatische cyclische Kohlenwasserstoffgruppe oder aromatische heterocyclische Gruppe darstellt, A² eine substituierte oder unsubstituierte aromatische heterocyclische Gruppe darstellt, die ein Stickstoffatom als das den heterocyclischen Ring bildende Atom aufweist, Q ein Metall darstellt, das aus Ruthenium, Rhodium, Palladium, Silber, Rhenium, Osmium, Iridium, Platin und Gold ausgewählt wird, L einen zweizähligen Liganden darstellt, m und n jeweils eine ganze Zahl darstellen; und wenn Q ein dreiwertiges Metall darstellt, n = 3 und m = 0, oder n = 2 und m = 1 sind.

4. Organische Elektrolumineszenzvorrichtung nach einem der Ansprüche 1 bis 3, wobei die Triplett-Energielücke des Materials für organische Elektrolumineszenzvorrichtungen, das durch die allgemeine Formel (1) dargestellt wird, 2,5 bis 3,3 eV beträgt.
5. Organische Elektrolumineszenzvorrichtung nach einem der Ansprüche 1 bis 4, wobei die Singulett-Energielücke des Materials für organische Elektrolumineszenzvorrichtungen, das durch die allgemeine Formel (1) dargestellt wird, 2,8 bis 3,8 eV beträgt.

Revendications



1. Dispositif électroluminescent organique qui comprend une cathode, une anode et une couche de film mince organique comprenant au moins une couche prise en sandwich entre la cathode et l'anode, dans lequel la couche de film mince organique comprend une couche électroluminescente ; la couche électroluminescente comprend un complexe organométallique phosphorescent et un matériau pour dispositifs électroluminescents organiques ; le métal dans le complexe organométallique phosphorescent est le ruthénium, le rhodium, le palladium, l'argent, le rhénium, l'osmium, l'iridium, le platine ou l'or ; le matériau pour dispositifs électroluminescents organiques est un matériau hôte organique, et est représenté par la formule générale (1) suivante :




où Cz représente un groupe carbazolyle substitué ou non substitué, M représente un groupe cyclique hétéroaromatique substitué ou non substitué choisi dans le groupe constitué de pyridine, de pyrimidine et de quinazoline, n représente 1 ou 2, et m représente 1 ;

une pluralité de Cz peut représenter des groupes différents lorsque n représente 2, et le substituant pour les groupes représentés par Cz et M est choisi dans le groupe constitué d'atomes d'halogène, de groupe carbazole, de groupe hydroxyle, de groupes amine substitués ou non substitués, de groupe nitro, de groupe cyano, de groupe silyle, de groupe trifluorométhyle, de groupe carbonyle, de groupe carboxyle, de groupes alkyle substitués ou non substitués, de groupes alcényle substitués ou non substitués, de groupes arylalkyle substitués ou non substitués, de groupes aromatiques substitués ou non substitués, de groupes hétérocycliques hétéroaromatiques substitués ou non substitués, de groupes aralkyle substitués ou non substitués, de groupes aryloxy substitués ou non substitués, et de groupes alkyloxy substitués ou non substitués.

2. Dispositif électroluminescent organique selon la revendication 1, dans lequel le composé représenté par la formule générale (1) est un composé représenté par la formule générale (2) ou (3) suivante :



3. Dispositif électroluminescent organique selon la revendication 1 ou 2, dans lequel le complexe organométallique phosphorescent est représenté par la formule générale (A) suivante :

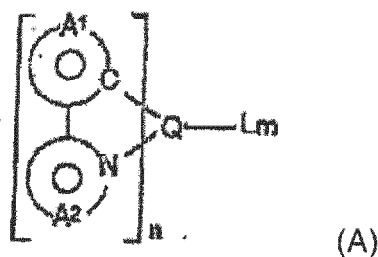

où A¹ représente un groupe cyclique hydrocarboné aromatique substitué ou non substitué ou un groupe hétérocyclique aromatique, A² représente un groupe hétérocyclique aromatique substitué ou non substitué ayant un atome d'azote comme étant l'atome formant le noyau hétérocyclique, Q représente un métal choisi parmi le ruthénium, le rhodium, le palladium, l'argent, le rhénium, l'osmium, l'iridium, le platine et l'or, L représente un ligand bidenté, m et n représentent chacun un nombre entier ; et lorsque Q représente un métal trivalent, n = 3 et m = 0, ou n = 2 et m = 1.

4. Dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 3, dans lequel l'écart d'énergie triplet du matériau pour dispositifs électroluminescents organiques représenté par la formule générale (1) est de 2,5 à 3,3 eV.
5. Dispositif électroluminescent organique selon l'une quelconque des revendications 1 à 4, dans lequel l'écart d'énergie singulet du matériau pour dispositifs électroluminescents organiques représenté par la formule générale (1) est de 2,8 à 3,8 eV.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP HEISEI81996239655 B **[0004]**
- JP HEISEI71995138561 B **[0004]**
- JP HEISEI31991200289 B **[0004]**
- JP HEISEI8199612600 B **[0006]**
- JP 2001160489 A **[0006]**
- JP 2000053956 A **[0007]**
- EP 0517542 A1 **[0008]**
- EP 1175128 A2 **[0009]**
- US 20020028329A1 A **[0093]**

专利名称(译)	用于有机电致发光器件的材料和使用其制造的有机电致发光器件		
公开(公告)号	EP2770036B1	公开(公告)日	2017-12-20
申请号	EP2014165928	申请日	2003-03-13
[标]申请(专利权)人(译)	出光兴产株式会社		
申请(专利权)人(译)	出光兴产股份有限公司		
当前申请(专利权)人(译)	出光兴产股份有限公司		
[标]发明人	IWAKUMA TOSHIHIRO HOSOKAWA CHISHIO IKEDA HIDETSUGU TOMITA SEIJI ARAKANE TAKASHI		
发明人	IWAKUMA, TOSHIHIRO HOSOKAWA, CHISHIO IKEDA, HIDETSUGU TOMITA, SEIJI ARAKANE, TAKASHI		
IPC分类号	C09K11/06 H05B33/14 H05B33/22 C07D401/04 C07D401/14 C07D403/04 C07D403/14 C07F15/00 C07D471/04 H01L51/00 H01L51/50 H01L51/30		
CPC分类号	C07D401/04 C07D401/14 C07D403/04 C07D403/14 C07D471/04 C07F15/0033 C09K11/06 C09K2211 /1007 C09K2211/1011 C09K2211/1029 C09K2211/1044 C09K2211/1059 H01L51/0059 H01L51/0067 H01L51/0072 H01L51/0081 H01L51/0085 H01L51/5012 H01L51/5016 H01L51/5048 H01L2251/308 Y10S428/917		
优先权	2002071398 2002-03-15 JP		
其他公开文献	EP2770036A1		
外部链接	Espacenet		

摘要(译)

一种电致发光器件材料，包括其中具有氮的杂环基团与咪唑基键合的化合物和具有至少一个夹在阴极和阳极之间的有机薄膜层的有机电致发光器件，并含有上述材料。提供至少一层。该材料可以提供发出具有高纯度颜色的蓝色光的有机电致发光器件。有机电致发光器件使用该材料。

