



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
08.03.2017 Bulletin 2017/10

(51) Int Cl.:
H01L 51/54 ^(2006.01) **C07D 219/02** ^(2006.01)
C07D 401/04 ^(2006.01) **C07D 401/10** ^(2006.01)
C09K 11/06 ^(2006.01) **H01L 51/50** ^(2006.01)

(21) Application number: **16001939.4**

(22) Date of filing: **04.04.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **10.04.2012 JP 2012088912**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
13775172.3 / 2 837 622

(71) Applicant: **Hodogaya Chemical Co., Ltd.**
Tokyo 104-0028 (JP)

(72) Inventors:
• **Yokoyama, Norimasa**
Chuo-ku, Tokyo 104-0028 (JP)

- **Nagaoka, Makoto**
Tsukuba-shi, Ibaraki 305-0841 (JP)
- **Kanda, Daizou**
Chuo-ku, Tokyo 104-0028 (JP)
- **Kabasawa, Naoaki**
Chuo-ku, Tokyo 104-0028 (JP)
- **Hayashi, Shuichi**
Chuo-ku, Tokyo 104-0028 (JP)

(74) Representative: **Müller-Boré & Partner**
Patentanwälte PartG mbB
Friedenheimer Brücke 21
80639 München (DE)

Remarks:

This application was filed on 02-09-2016 as a divisional application to the application mentioned under INID code 62.


(54) **COMPOUND HAVING ACRIDAN RING STRUCTURE, AND ORGANIC ELECTROLUMINESCENT DEVICE**

(57) An organic compound with characteristics excelling in hole-injecting/transporting performance and having an electron blocking ability, a highly stable thin-film state, and excellent heat resistance is provided as material for an organic electroluminescent device of high efficiency and high durability, and the organic electroluminescent device of high efficiency and high durability is provided using this compound.

The compound of a general formula (Chemical Formula 1) has an acridan ring structure, wherein Ar₁ is substituted or unsubstituted 9,9'-dimethylfluorenyl and Ar₂ is a substituted or unsubstituted condensed polycyclic aromatic group, and is used as a constituent material of at least one organic Layer in the organic electroluminescent device that includes a pair of electrodes and one or more organic layers sandwiched between the pair of

electrodes.

[Chemical Formula 1]



Description

Technical Field

[0001] The present invention relates to compounds suited for an organic electroluminescent device, a preferred self light-emitting device for various display devices, and to the device. Specifically, the invention relates to compounds having an acridan ring structure, and to organic electroluminescent devices that use the compounds.

Background Art

[0002] The organic electroluminescent device is a self-emitting device, and has been actively studied for their brighter, superior viewability and ability to display clearer images compared with the liquid crystal device.

[0003] In 1987, C. W. Tang et al. at Eastman Kodak developed a laminated structure device using materials assigned with different roles, realizing practical applications of an organic electroluminescent device with organic materials. These researchers laminated an electron-transporting phosphor which is tris(8-hydroxyquinoline)aluminum (hereinafter referred to as Alq₃) and a hole-transporting aromatic amine compound, and injected the both charges into the phosphor layer to cause emission in order to obtain a high luminance of 1,000 cd/m² or more at a voltage of 10 V or less (refer to Patent Documents 1 and 2, for example).

[0004] To date, various improvements have been made for practical applications of the organic electroluminescent device. In order to realize high efficiency and durability, various roles are further subdivided to provide an electroluminescence device that includes an anode, a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer, an electron injection layer, and a cathode successively formed on a substrate (refer to Non-Patent Document 1, for example).

[0005] Further, there have been attempts to use triplet excitons for further improvements of luminous efficiency, and use of phosphorescent materials has been investigated (refer to Non-Patent Document 2, for example).

[0006] The light emitting layer can be also fabricated by doping a charge-transporting compound, generally called a host material, with a phosphor or a phosphorescent material. As described in the foregoing Lecture Preprints, selection of organic materials in an organic electroluminescent device greatly influences various device characteristics, including efficiency and durability.


[0007] In an organic electroluminescent device, the charges injected from the both electrodes recombine at the light emitting layer to cause emission. What is important here is how efficiently the hole and electron charges are transferred to the light emitting layer. The probability of hole-electron recombination can be improved by improving hole injectability and electron blocking performance of blocking injected electrons from the cathode, and high luminous efficiency can be obtained by confining excitons generated in the light emitting layer. The role of a hole transport material is therefore important, and there is a need for a hole transport material that has high hole injectability, high hole mobility, high electron blocking performance, and high durability to electrons.

[0008] Heat resistance and the amorphousness of the materials are also important with respect to a lifetime of the device. The materials with low heat resistance cause thermal decomposition even at a low temperature by heat generated during the drive of the device, which leads to the deterioration of the materials. The materials with low amorphousness cause crystallization of a thin film even in a short time and lead to the deterioration of the device. The materials in use are therefore required to have characteristics of high heat resistance and satisfactory amorphousness.

[0009] N,N'-diphenyl-N,N'-di(α -naphthyl)benzidine (hereinafter referred to as NPD) and various aromatic amine derivatives are known as the hole transport materials used for the organic electroluminescent device (refer to Patent Documents 1 and 2, for example). Although NPD has desirable hole transportability, it has a low glass transition point (T_g) of 96°C which is an index of heat resistance and therefore causes the degradation of device characteristics by crystallization under a high-temperature condition (refer to Non-Patent Document 3, for example). The aromatic amine derivatives described in the Patent Documents 1 and 2 include a compound known to have an excellent hole mobility of 10⁻³ cm²/Vs or higher. However, since the compound is insufficient in terms of electron blocking performance, some of the electrons pass through the light emitting layer, and improvements in luminous efficiency cannot be expected. For such a reason, a material with higher electron blocking performance, a more stable thin-film state and higher heat resistance is needed for higher efficiency.


[0010] Arylamine compounds of the following formulae having a substituted acridan structure (for example, Compounds A and B) are proposed as compounds improved in the characteristics such as heat resistance, hole injectability and electron blocking performance (refer to Patent Documents 3 and 4, for example).

[Chemical Formula 1]

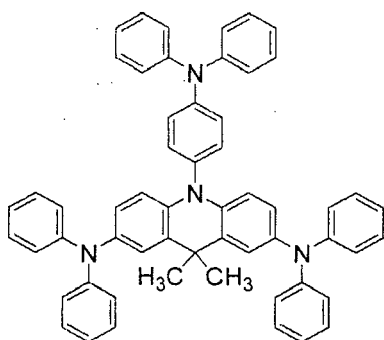

(Compound A)

[Chemical Formula 2]

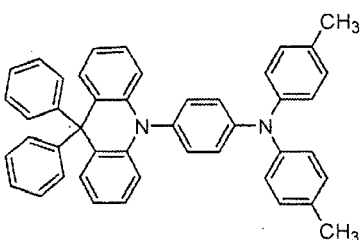

(Compound B)

[0011] However, while the devices using these compounds for the hole injection layer or the hole transport layer have been improved in heat resistance, luminous efficiency and the like, the improvements are still insufficient. Further, it cannot be said to have a sufficiently low driving voltage and sufficient current efficiency, and there is a problem also in amorphousness. Further improvements of a low driving voltage and luminous efficiency while increasing amorphousness are therefore needed.

Citation List

Patent Documents

[0012]

Patent Document 1: JP-A-8-48656

Patent Document 2: Japanese Patent No. 3194657

Patent Document 3: WO2006/033563

Patent Document 4: WO2007/110228

Non Patent Documents

[0013]

Non-Patent Document 1: The Japan Society of Applied Physics, 9th Lecture Preprints, pp. 55 to 61 (2001)

Non-Patent Document 2: The Japan Society of Applied Physics, 9th Lecture Preprints, pp. 23 to 31 (2001)

Non-Patent Document 3: Organic EL Symposium, the 3rd Regular presentation Preprints, pp. 13 to 14 (2006)

Non-Patent Document 4: J. Org. Chem., 60, 7508 (1995)

Non-Patent Document 5: Chem. Rev., 95, 2457 (1995)

Summary of the Invention

Problems that the Invention is to Solve


[0014] An object of the present invention is to provide an organic compound with characteristics excelling in hole-injecting/transporting performance and having electron blocking ability, high stability in a thin-film state and excellent heat resistance, the organic compound being provided as material for an organic electroluminescent device having high efficiency and high durability. This invention also provides the organic electroluminescent device of high efficiency and high durability using this compound.

[0015] Physical properties of the organic compound to be provided by the present invention include (1) good hole injection characteristics, (2) large hole mobility, (3) excellent electron blocking ability, (4) stability in the thin-film state, and (5) excellent heat resistance. Physical properties of the organic electroluminescent device to be provided by the present invention include (1) high luminous efficiency and high power efficiency, (2) low turn on voltage, and (3) low actual driving voltage.

[0016] In order to achieve the above objects, the present inventors designed compounds having an acridan ring structure in anticipation of the high hole-injecting/transporting ability of an aromatic tertiary amine structure, the electron blocking performance of the acridan ring structure, and the effect of heat resistance and thin-film stability of these partial structures. The present inventors produced various test organic electroluminescent devices using the compounds chemically synthesized to have the acridan ring structure, and the present invention was completed after thorough evaluations of the device characteristics.

1) Specifically, the present invention is a compound of the following general formula (1) having an acridan ring structure.

[Chemical Formula 3]




(1)

In the formula, Ar₁ and Ar₂ may be the same or different, and represent a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group. R₁ to R₄ may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring. R₅ to R₇ may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, a substituted or unsubstituted condensed polycyclic aromatic group, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring. R₈ and R₉ may be the same or different, and represent trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted

or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

2) The present invention is a compound of the following general formula (2) having an acridan ring structure.

[Chemical Formula 4]



(2)

In the formula, Ar₁ and Ar₂ may be the same or different, and represent a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group. R₁ to R₄ may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkoxy of 1 to 6 carbon atoms that may have a substituent, cycloalkoxy of 5 to 10 carbon atoms that may have a substituent, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring. R₅ to R₇ may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkoxy of 1 to 6 carbon atoms that may have a substituent, cycloalkoxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, a substituted or unsubstituted condensed polycyclic aromatic group, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring. R₈ and R₉ may be the same or different, and represent a trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkoxy of 1 to 6 carbon atoms that may have a substituent, cycloalkoxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

3) The present invention is a compound of the general formula (1) having an acridan ring structure in which R₈ and R₉ are methyl.

4) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₁ is substituted or unsubstituted biphenyl.

5) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₁ is substituted or unsubstituted 9,9'-dimethylfluorenyl.

6) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₁ is substituted or unsubstituted phenyl.

7) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₂ is substituted or unsubstituted condensed polycyclic aromatic group.

8) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₂ is carbazolyl having a substituent selected from aromatic hydrocarbon groups, aromatic heterocyclic groups, or condensed polycyclic aromatic groups at the ninth position.

9) The present invention is a compound of the general formula (1) having an acridan ring structure in which Ar₂ is phenyl having a substituent selected from aromatic hydrocarbon groups, aromatic heterocyclic groups, or condensed polycyclic aromatic groups.

10) The present invention is an organic electroluminescent device that includes a pair of electrodes, and one or

more organic layers sandwiched between the pair of electrodes, wherein the compound of the general formula (1) or (2) having an acridan ring structure is used as a constituent material of at least one of the organic layers.

11) The present invention is an organic electroluminescent device, wherein the organic layer is a hole transport layer.

12) The present invention is an organic electroluminescent device, wherein the organic layer is a electron blocking layer.

13) The present invention is an organic electroluminescent device, wherein the organic layer is a hole injection layer.

14) The present invention is an organic electroluminescent device, wherein the organic layer is a light emitting layer.

[0017] Specific examples of the "linear or branched alkyl of 1 to 6 carbon atoms", "cycloalkyl of 5 to 10 carbon atoms", or "linear or branched alkenyl of 2 to 6 carbon atoms" in the "linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent", "cycloalkyl of 5 to 10 carbon atoms that may have a substituent", or "linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent" represented by R_1 to R_9 in general formulae (1) and (2) include methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, neopentyl, n-hexyl, cyclopentyl, cyclohexyl, 1-adamantyl, 2-adamantyl, vinyl, allyl, isopropenyl, and 2-butenyl. These groups may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0018] Specific examples of the "substituent" in the "substituted linear or branched alkyl of 1 to 6 carbon atoms", "substituted cycloalkyl of 5 to 10 carbon atoms", or "substituted linear or branched alkenyl of 2 to 6 carbon atoms" represented by R_1 to R_9 in general formulae (1) and (2) include a deuterium atom, trifluoromethyl, cyano, nitro; halogen atoms such as a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom; linear or branched alkoxy of 1 to 6 carbon atoms such as methoxy, ethoxy, and propyloxy; alkenyl such as allyl; aryloxy such as phenoxy and tolyloxy; arylalkoxy such as benzyloxy and phenethyloxy; aromatic hydrocarbon groups or condensed polycyclic aromatic groups such as phenyl, biphenyl, terphenyl, naphthyl, anthracenyl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl; and aromatic heterocyclic groups such as pyridyl, pyran, thienyl, furyl, pyrrolyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl. These substituents may be further substituted with other substituents. Further, these substituents may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0019] Specific examples of the "linear or branched alkyloxy of 1 to 6 carbon atoms" or "cycloalkyloxy of 5 to 10 carbon atoms" in the "linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent" or "cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent" represented by R_1 to R_9 in general formulae (1) and (2) include methyloxy, ethyloxy, n-propyloxy, isopropyloxy, n-butyloxy, tert-butyloxy, n-pentyloxy, n-hexyloxy, cyclopentyloxy, cyclohexyloxy, cycloheptyloxy, cyclooctyloxy, 1-adamantyloxy, and 2-adamantyloxy. These groups may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0020] Specific examples of the "substituent" in the "substituted linear or branched alkyloxy of 1 to 6 carbon atoms" or "substituted cycloalkyloxy of 5 to 10 carbon atoms" represented by R_1 to R_9 in general formulae (1) and (2) include a deuterium atom, trifluoromethyl, cyano, nitro; halogen atoms such as a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom; linear or branched alkoxy of 1 to 6 carbon atoms such as methoxy, ethoxy, and propyloxy; alkenyl such as allyl; aryloxy such as phenoxy and tolyloxy; arylalkoxy such as benzyloxy and phenethyloxy; aromatic hydrocarbon groups or condensed polycyclic aromatic groups such as phenyl, biphenyl, terphenyl, naphthyl, anthracenyl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl; and aromatic heterocyclic groups such as pyridyl, pyran, thienyl, furyl, pyrrolyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl. These substituents may be further substituted with other substituents. Further, these substituents may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0021] Specific examples of the "aromatic hydrocarbon group", "aromatic heterocyclic group", or "condensed polycyclic aromatic group" in the "substituted or unsubstituted aromatic hydrocarbon group", "substituted or unsubstituted aromatic heterocyclic group", or "substituted or unsubstituted condensed polycyclic aromatic group" represented by R_5 to R_9 in general formula (1) and (2) include phenyl, biphenyl, terphenyl, naphthyl, anthryl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, triphenylenyl, pyridyl, furyl, pyran, thienyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl. These groups may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0022] It is preferable that the "aromatic heterocyclic group" in the "substituted or unsubstituted aromatic heterocyclic group" represented by R_5 to R_7 in general formulae (1) and (2) is a sulfur-containing aromatic heterocyclic group such as thienyl, benzothienyl, benzothiazolyl, and dibenzothienyl.

[0023] Specific examples of the "substituent" in the "substituted aromatic hydrocarbon group", "substituted aromatic heterocyclic group", or "substituted condensed polycyclic aromatic group" represented by R_5 to R_9 in general formulae (1) and (2) include a deuterium atom, trifluoromethyl, cyano, nitro; halogen atoms such as a fluorine atom, a chlorine

atom, a bromine atom, and an iodine atom; linear or branched alkyl of 1 to 6 carbon atoms such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, neopentyl, and n-hexyl; linear or branched alkoxy of 1 to 6 carbon atoms such as methoxy, ethoxy, and propyloxy; alkenyl such as allyl; aralkyl such as benzyl, naphthylmethyl, and phenethyl; aryloxy such as phenoxy and tolyloxy; arylalkoxy such as benzyloxy and phenethyloxy; aromatic hydrocarbon groups or condensed polycyclic aromatic groups such as phenyl, biphenyl, terphenyl, naphthyl, anthracenyl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl; aromatic heterocyclic groups such as pyridyl, pyranyl, thienyl, furyl, pyrrolyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl; arylvinyl such as styryl and naphthylvinyl; and acyl such as acetyl and benzoyl. These substituents may be further substituted. Further, these substituents may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0024] Specific examples of the "aryloxy" in the "substituted or unsubstituted aryloxy" represented by R_1 to R_7 in general formulae (1) and (2) include phenoxy, tolyloxy, biphenyloxy, terphenyloxy, naphthyloxy, anthryloxy, phenanthryloxy, fluorenyloxy, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl. These groups may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0025] Specific examples of the "substituent" in the "substituted aryloxy" represented by R_1 to R_7 in general formulae (1) and (2) include a deuterium atom, trifluoromethyl, cyano, nitro; halogen atoms such as a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom; linear or branched alkyl of 1 to 6 carbon atoms such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, neopentyl, and n-hexyl; linear or branched alkoxy of 1 to 6 carbon atoms such as methoxy, ethoxy, and propyloxy; alkenyl such as allyl; aralkyl such as benzyl, naphthylmethyl, and phenethyl; aryloxy such as phenoxy and tolyloxy; arylalkoxy such as benzyloxy and phenethyloxy; aromatic hydrocarbon groups or condensed polycyclic aromatic groups such as phenyl, biphenyl, terphenyl, naphthyl, anthracenyl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl; aromatic heterocyclic groups such as pyridyl, pyranyl, thienyl, furyl, pyrrolyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl; arylvinyl such as styryl and naphthylvinyl; and acyl such as acetyl and benzoyl. These substituents may be further substituted. Further, these substituents may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0026] Specific examples of the "aromatic hydrocarbon group", "aromatic heterocyclic group", or "condensed polycyclic aromatic group" in the "substituted or unsubstituted aromatic hydrocarbon group", "substituted or unsubstituted aromatic heterocyclic group", or "substituted or unsubstituted condensed polycyclic aromatic group" represented by Ar_1 and Ar_2 in general formulae (1) and (2) include phenyl, biphenyl, terphenyl, naphthyl, anthryl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, triphenylenyl, pyridyl, furyl, pyranyl, thienyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, thienoindolyl, benzothienindolyl, and carbolinyl.

[0027] It is preferable that the "aromatic heterocyclic group" in the "substituted or unsubstituted aromatic heterocyclic group" represented by Ar_1 and Ar_2 in general formulae (1) and (2) is a sulfur and nitrogen-containing aromatic heterocyclic group such as thienyl, benzothienyl, benzothiazolyl, and dibenzothienyl, and sulfur-nitrogen-containing aromatic heterocyclic group.

[0028] Specific examples of the "substituent" in the "substituted aromatic hydrocarbon group", "substituted aromatic heterocyclic group", or "substituted condensed polycyclic aromatic group" represented by Ar_1 and Ar_2 in general formulae (1) and (2) include a deuterium atom, trifluoromethyl, cyano, nitro; halogen atoms such as a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom; linear or branched alkyl of 1 to 6 carbon atoms such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, neopentyl, and n-hexyl; linear or branched alkoxy of 1 to 6 carbon atoms such as methoxy, ethoxy, and propyloxy; alkenyl such as allyl; aralkyl such as benzyl, naphthylmethyl, and phenethyl; aryloxy such as phenoxy and tolyloxy; arylalkoxy such as benzyloxy and phenethyloxy; aromatic hydrocarbon groups or condensed polycyclic aromatic groups such as phenyl, biphenyl, terphenyl, naphthyl, anthracenyl, phenanthryl, fluorenyl, indenyl, pyrenyl, perylenyl, fluoranthenyl, and triphenylenyl; aromatic heterocyclic groups such as pyridyl, pyranyl, thienyl, furyl, pyrrolyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzoxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuranyl, dibenzothienyl, and carbolinyl; arylvinyl such as styryl and naphthylvinyl; and acyl such as acetyl and benzoyl. These substituents may be further substituted. Further, these substituents may bind to each other, or to the "substituted aromatic hydrocarbon group", "substituted aromatic heterocyclic group", or "substituted condensed polycyclic aromatic group" represented by Ar_1 and Ar_2 via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

[0029] It is preferable that R_8 and R_9 in general formulae (1) and (2) are "linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent", particularly preferably methyl, ethyl, and propyl.

[0030] It is preferable that Ar_1 and Ar_2 in general formulae (1) and (2) are "substituted or unsubstituted aromatic hydrocarbon groups", "substituted or unsubstituted condensed polycyclic aromatic groups", or "carbazolyl groups having

a substituent selected from an aromatic hydrocarbon groups, an aromatic heterocyclic groups, or a condensed polycyclic aromatic groups at the ninth position", or "sulfur-containing aromatic heterocyclic groups", or "sulfur and nitrogen-containing aromatic heterocyclic groups", particularly preferably substituted or unsubstituted phenyl, substituted or unsubstituted biphenyl, substituted or unsubstituted terphenyl, substituted or unsubstituted naphthyl, substituted or unsubstituted phenanthryl, 9,9'-dimethylfluorenyl, 9-phenyl-9H-carbazolyl, and substituted or unsubstituted triphenylene-

[0031] The compounds of general formulae (1) and (2) having an acridan ring structure of the present invention are novel compounds and have superior electron blocking ability, superior amorphousness and a more stable thin-film state compared to conventional hole transport materials.

[0032] The compounds of general formulae (1) and (2) having an acridan ring structure of the present invention can be used as a constituent material of the hole injection layer and/or hole transport layer of an organic electroluminescent device (hereinafter referred to as an organic EL device). With the use of material having higher hole injectability, higher mobility, higher electron blocking performance and higher stability to electrons than conventional materials, excitons generated in a light emitting layer can be confined, and the probability of hole-electron recombination can be improved. This improves luminous efficiency, lowers driving voltage and thus improves the durability of the organic EL device.

[0033] The compounds of general formulae (1) and (2) having an acridan ring structure of the present invention can also be used as a constituent material of the electron blocking layer of an organic EL device. With the use of material having an excellent electron blocking ability and having superior hole transportability and higher stability in a thin-film state than conventional materials, driving voltage is lowered and current resistance is improved while maintaining high luminous efficiency. As a result, the maximum emission luminance of the organic EL device is improved.

[0034] The compounds of general formulae (1) and (2) having an acridan ring structure of the present invention can also be used as a constituent material of the light emitting layer of the organic EL device. The material of the present invention having superior hole transportability and a wider band gap than conventional materials is used as the host material of the light emitting layer in order to form the light emitting layer by carrying a fluorescent material or phosphorescent material called a dopant. In this way, the organic EL device with a low driving voltage and improved luminous efficiency can be achieved.

[0035] The high efficiency and high durability of the organic EL device in the present invention can be achieved because of the use of the compound having an acridan ring structure, which has greater hole mobility, superior electron blocking ability and superior amorphousness than conventional hole transport materials as well as a stable thin-film state.

Effects of the Invention

[0036] The compound having an acridan ring structure of the present invention is useful as the constituent material of the hole injection layer, hole transport layer, electron blocking layer, or light emitting layer of the organic EL device. The compound has an excellent electron blocking ability and satisfactory amorphousness, and excels in heat resistance as well as a stable thin-film state. The organic EL device of the present invention has high luminous efficiency and high power efficiency, and the actual driving voltage of the device can thereby be lowered.

Brief Description of the Drawings

[0037]

FIG. 1 is a ¹H-NMR chart of the compound of Example 1 of the present invention (Compound 69).

FIG. 2 is a ¹H-NMR chart of the compound of Example 2 of the present invention (Compound 71).

FIG. 3 is a ¹H-NMR chart of the compound of Example 3 of the present invention (Compound 80).

FIG. 4 is a diagram illustrating the configuration of the EL devices of Examples 6 and 7 and Comparative Example 1.

Made for Carrying Out the Invention


[0038] The compounds having an acridan ring structure of the present invention are novel compounds, and may be synthesized by using, for example, the following method. First, an acridan substituted with an aryl group at the corresponding 10 position is brominated with bromine or N-bromosuccinimide to synthesize a bromo compound substituted at the 2 position (refer to Patent Document 3, for example). This bromo compound can then be used to synthesize the compound having an acridan ring structure in a cross-coupling reaction such as Suzuki coupling (refer to Non-Patent Document 5, for example) with boronic acid or boronate synthesized by reaction with pinacolborane or bis(pinacolato)diboron (refer to Non-Patent Document 4, for example).

[0039] Further, the compound having an acridan ring structure may be synthesized to include substituents at different positions by the cross-coupling reaction of an acridan substituted with an aryl group at the 10 position after obtaining a

bromo compound having substituents at different positions by changing reagents and conditions of bromination.


[0040] The following presents specific examples of preferred compounds among the compounds of general formula (1) having an acridan ring structure. The present invention, however, is not restricted to these compounds.

[Chemical Formula 5]

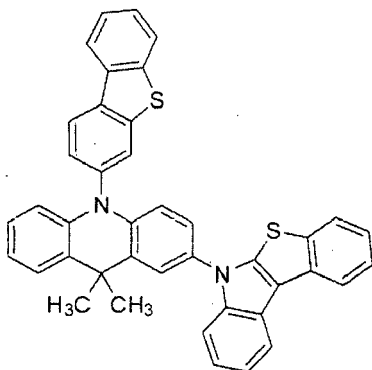


(Compound 3)

[Chemical Formula 6]

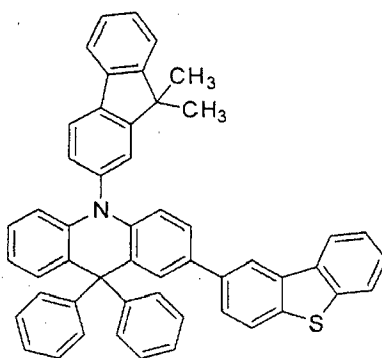


(Compound 4)

[Chemical Formula 7]

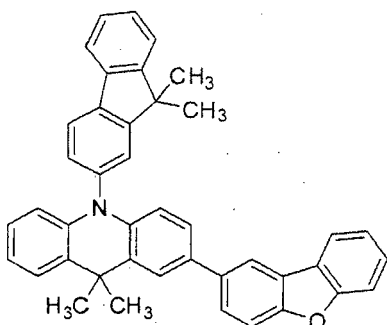


(Compound 5)

[Chemical Formula 8]

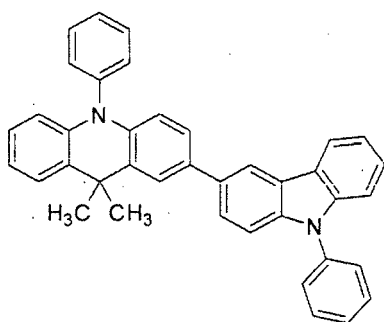


(Compound 6)

[Chemical Formula 9]

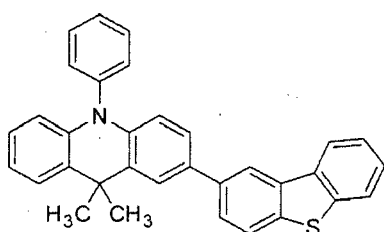


(Compound 7)

[Chemical Formula 10]

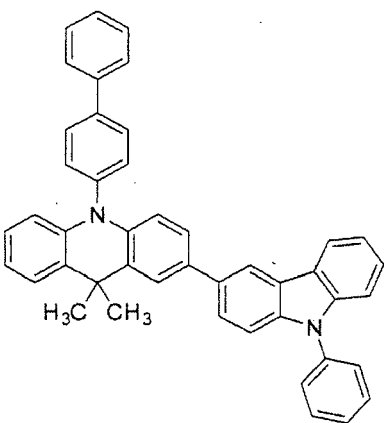


(Compound 8)

[Chemical Formula 11]

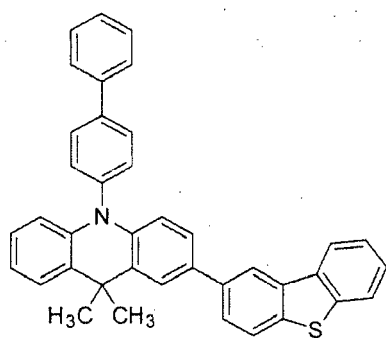


(Compound 9)

[Chemical Formula 12]

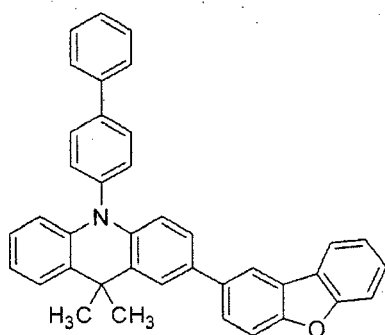


(Compound 10)

[Chemical Formula 13]

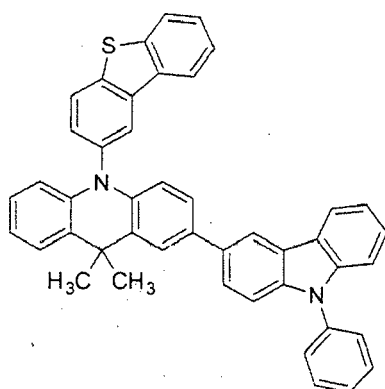


(Compound 11)

[Chemical Formula 14]

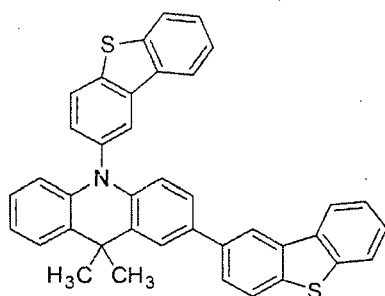


(Compound 12)

[Chemical Formula 15]

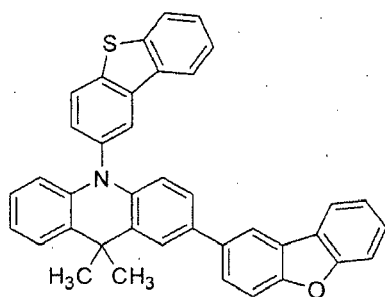


(Compound 13)

[Chemical Formula 16]

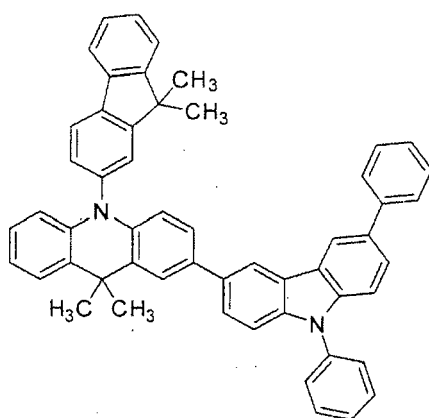


(Compound 14)

[Chemical Formula 17]

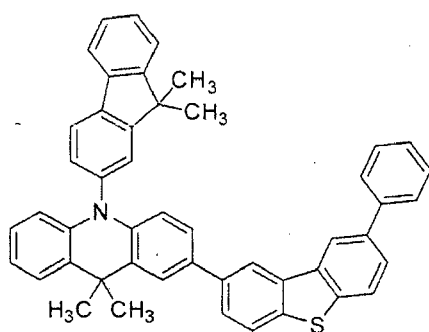


(Compound 15)

[Chemical Formula 18]

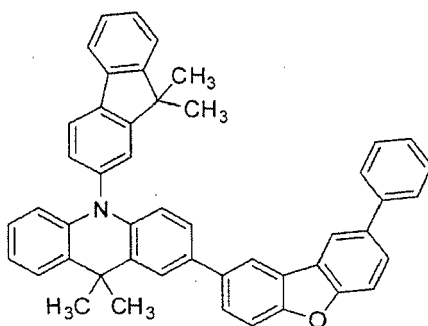


(Compound 16)

[Chemical Formula 19]

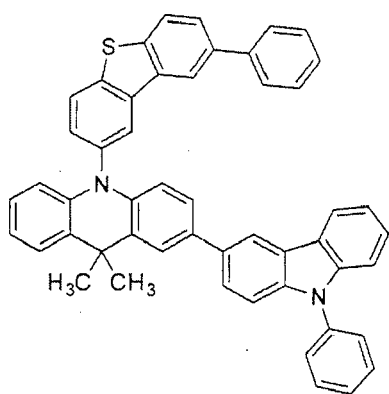


(Compound 17)

[Chemical Formula 20]

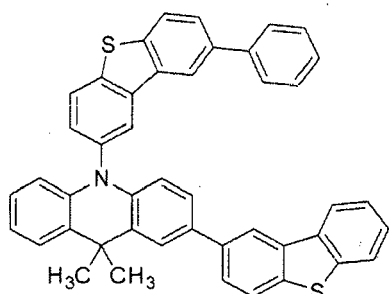


(Compound 18)

[Chemical Formula 21]

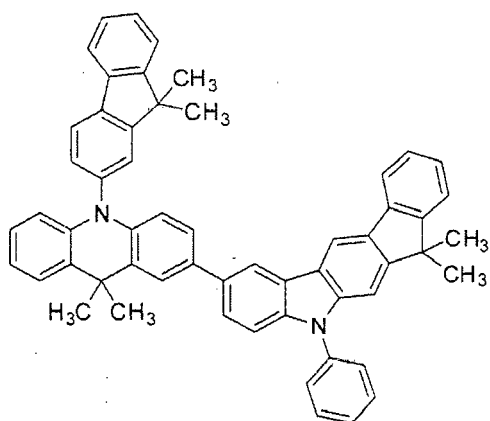


(Compound 19)

[Chemical Formula 22]

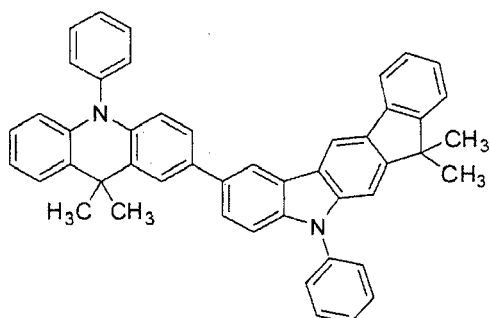


(Compound 20)

[Chemical Formula 23]

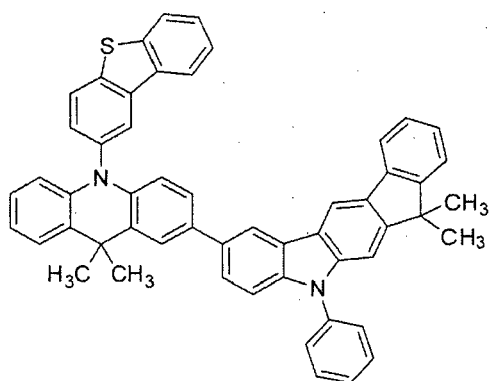


(Compound 21)

[Chemical Formula 24]

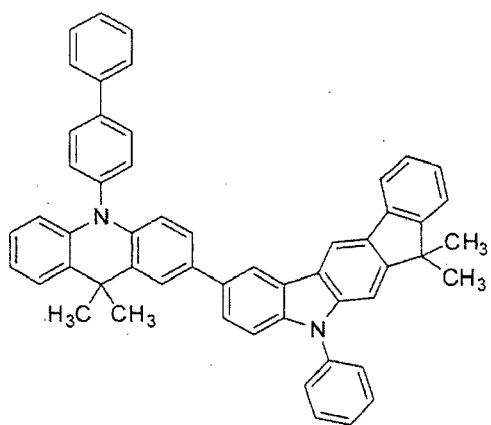


(Compound 22)

[Chemical Formula 25]

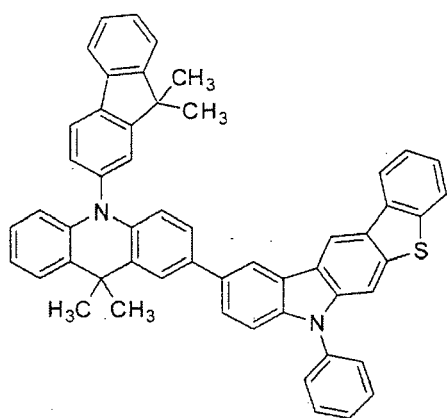


(Compound 23)

[Chemical Formula 26]

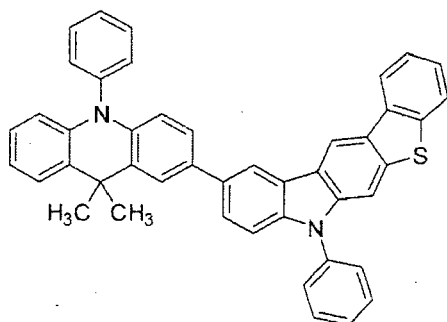


(Compound 24)

[Chemical Formula 27]

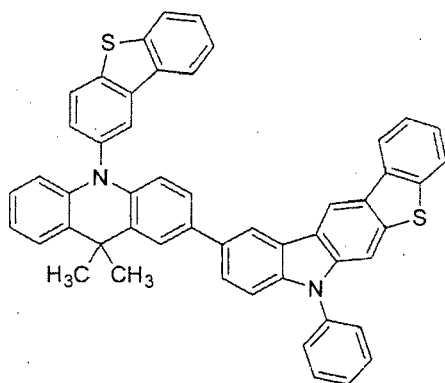


(Compound 25)

[Chemical Formula 28]

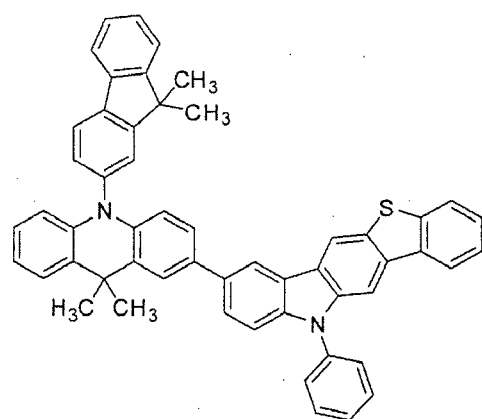


(Compound 26)

[Chemical Formula 29]

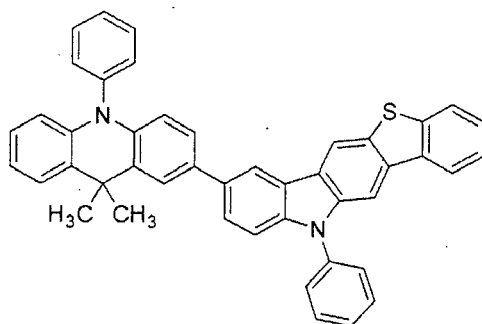


(Compound 27)

[Chemical Formula 30]




(Compound 28)

[Chemical Formula 31]

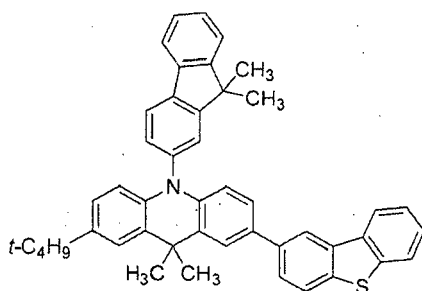


(Compound 29)

[Chemical Formula 32]

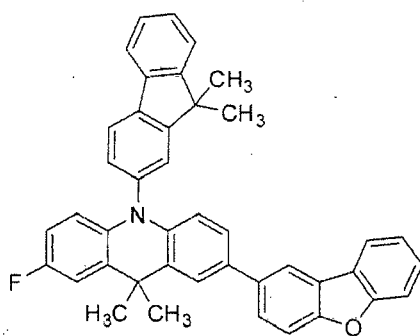


(Compound 30)

[Chemical Formula 33]

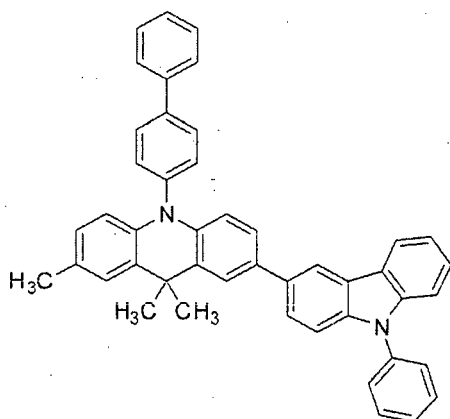


(Compound 31)


[Chemical Formula 34]

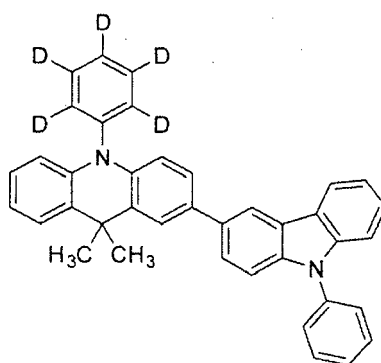


(Compound 32)




[Chemical Formula 36]



[Chemical Formula 37]




[Chemical Formula 38]

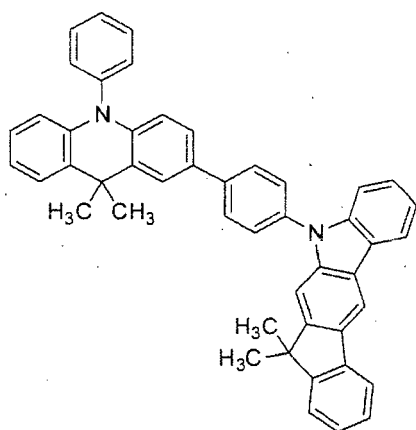


(Compound 36)

[Chemical Formula 39]

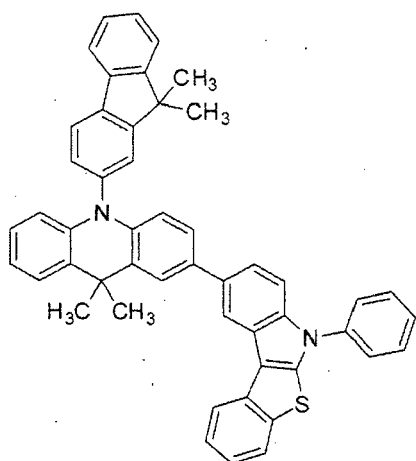


(Compound 37)

[Chemical Formula 40]

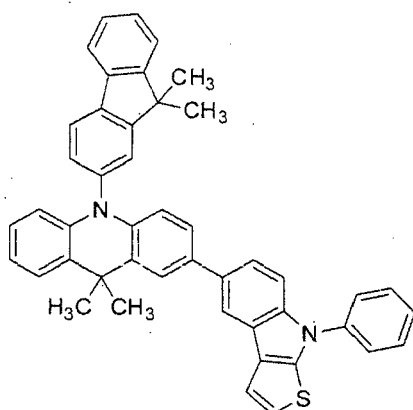


(Compound 38)

[Chemical Formula 41]

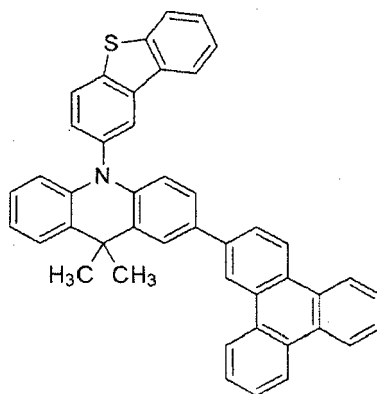


(Compound 39)

[Chemical Formula 42]

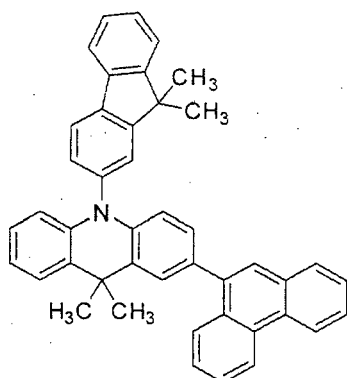


(Compound 40)

[Chemical Formula 43]




(Compound 41)

[Chemical Formula 44]

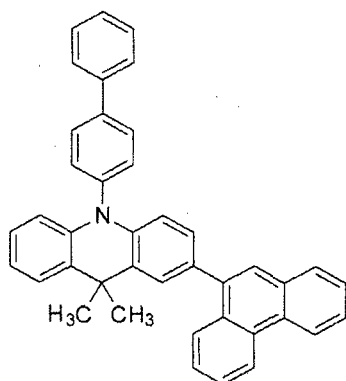


(Compound 42)

[Chemical Formula 45]

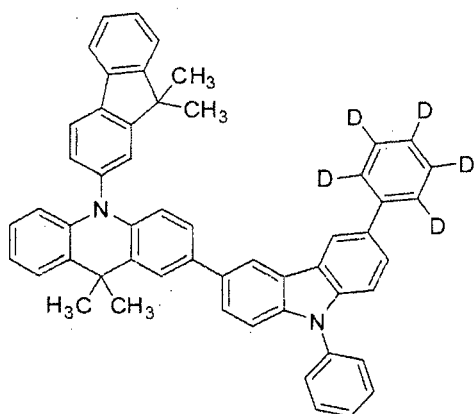


(Compound 43)

[Chemical Formula 46]

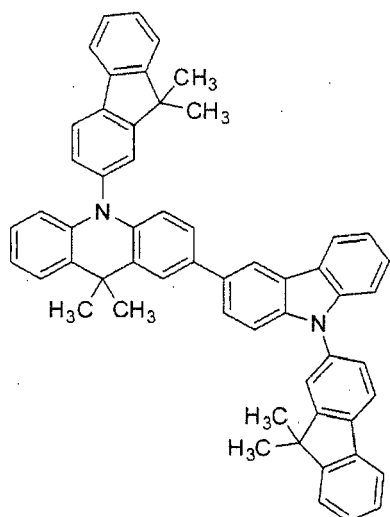


(Compound 44)

[Chemical Formula 47]

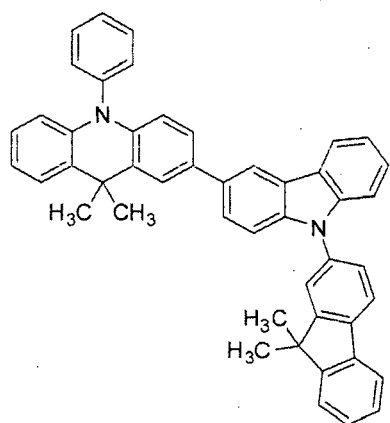


(Compound 45)

[Chemical Formula 48]

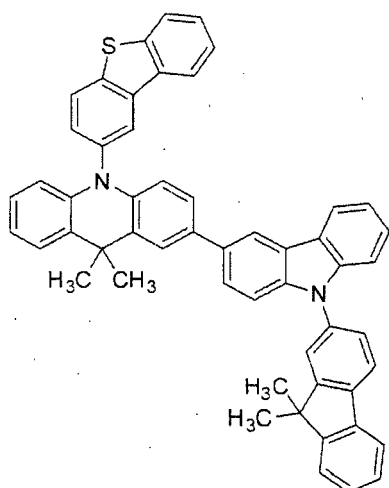


(Compound 46)

[Chemical Formula 49]

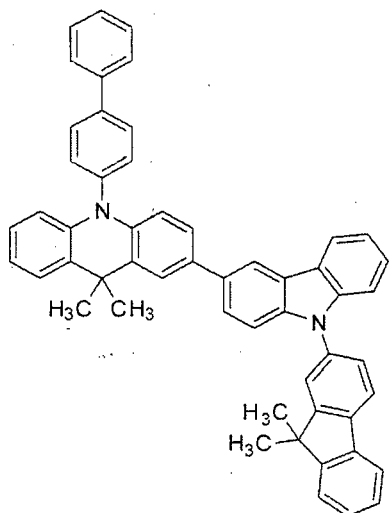


(Compound 47)

[Chemical Formula 50]

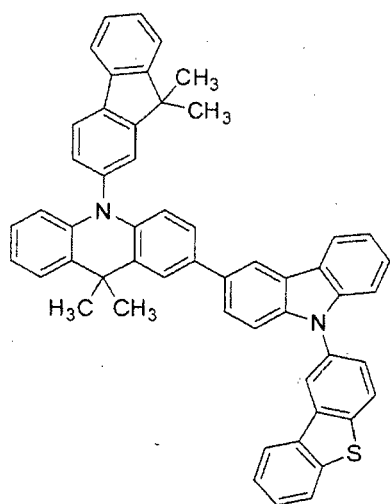


(Compound 48)

[Chemical Formula 51]

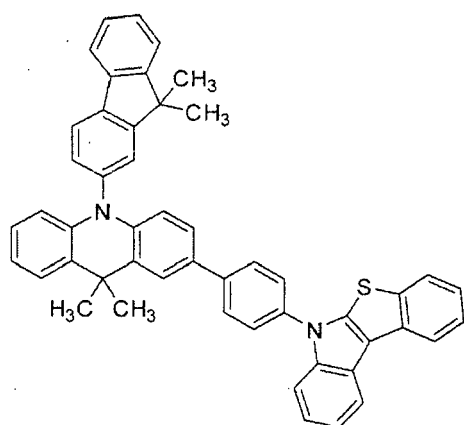


(Compound 49)

[Chemical Formula 52]

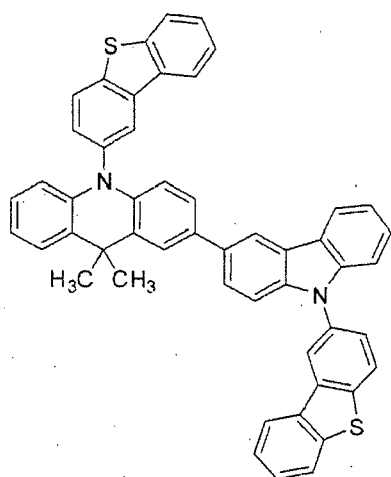


(Compound 50)

[Chemical Formula 53]

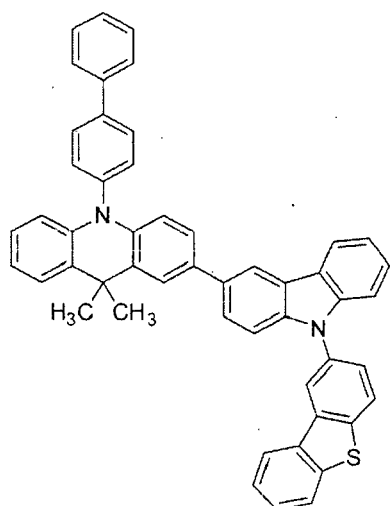


(Compound 51)

[Chemical Formula 54]

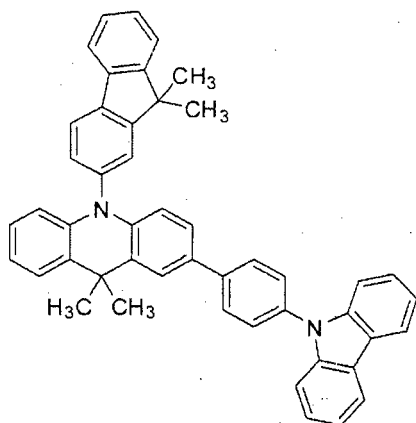


(Compound 52)

[Chemical Formula 55]

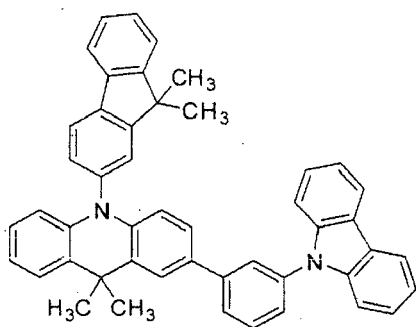


(Compound 53)

[Chemical Formula 56]

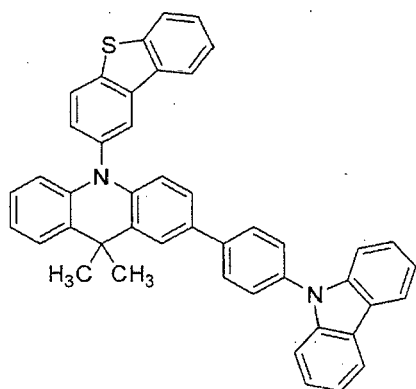


(Compound 54)

[Chemical Formula 57]

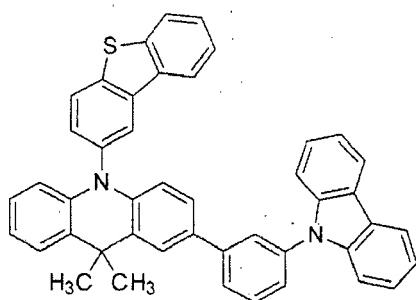


(Compound 55)

[Chemical Formula 58]

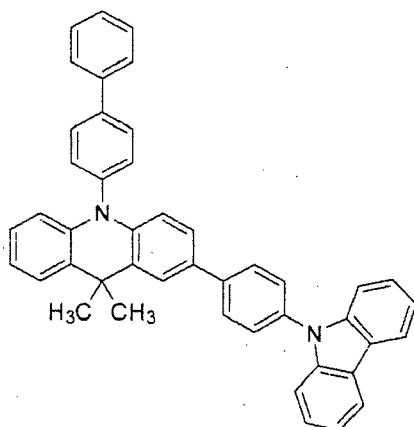


(Compound 56)

[Chemical Formula 59]

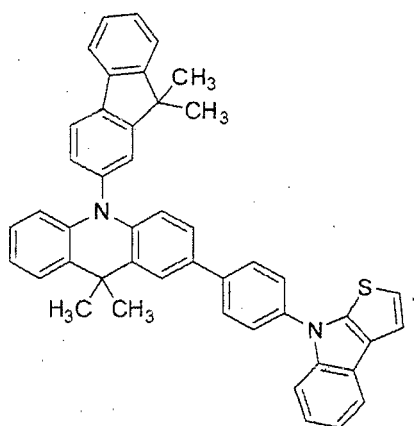


(Compound 57)

[Chemical Formula 60]

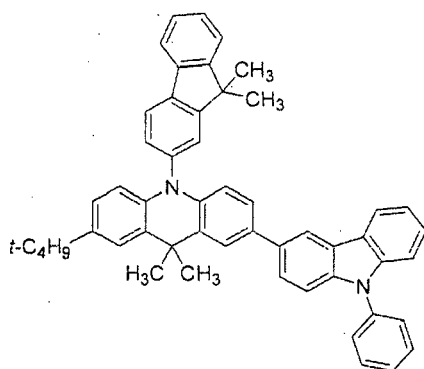


(Compound 58)

[Chemical Formula 61]

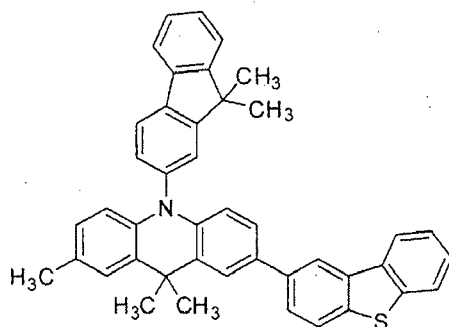


(Compound 59)

[Chemical Formula 62]

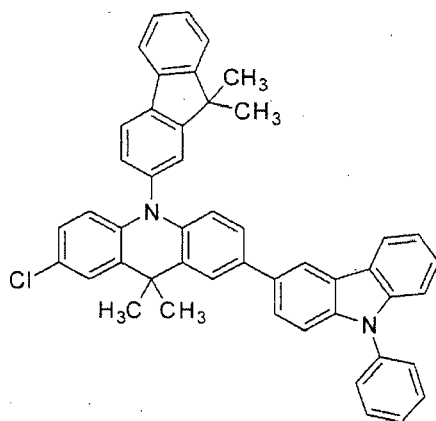


(Compound 60)

[Chemical Formula 63]

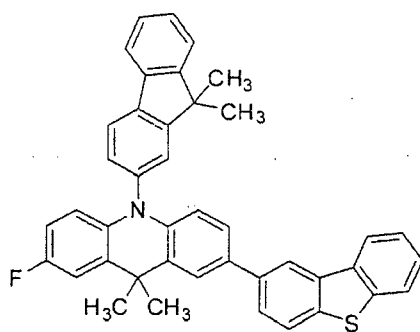


(Compound 61)

[Chemical Formula 64]

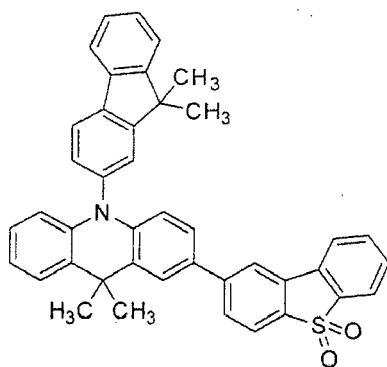


(Compound 62)

[Chemical Formula 65]

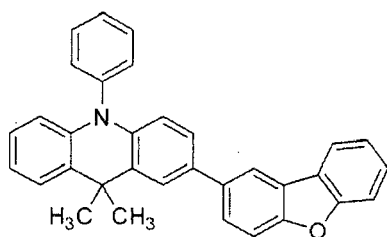


(Compound 63)

[Chemical Formula 66]

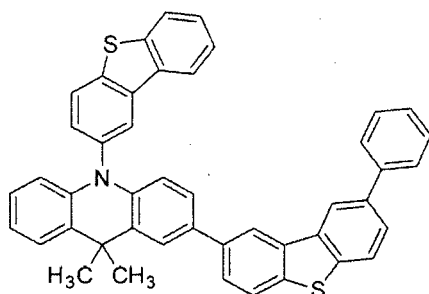


(Compound 64)

[Chemical Formula 67]

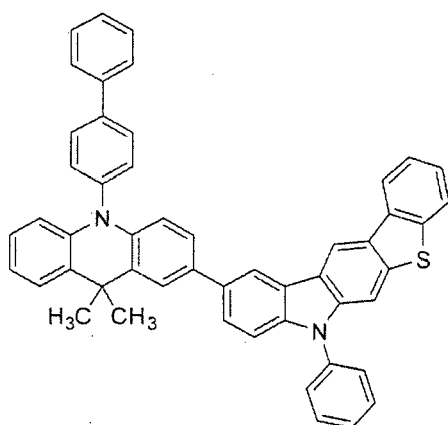


(Compound 65)

[Chemical Formula 68]

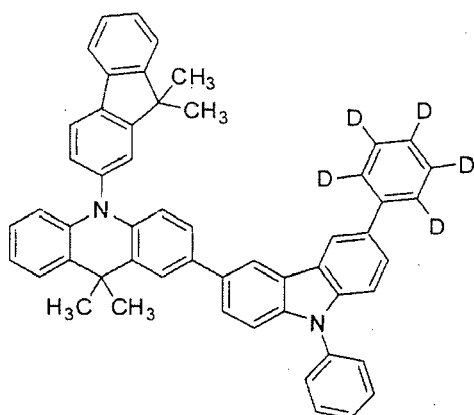


(Compound 66)

[Chemical Formula 69]

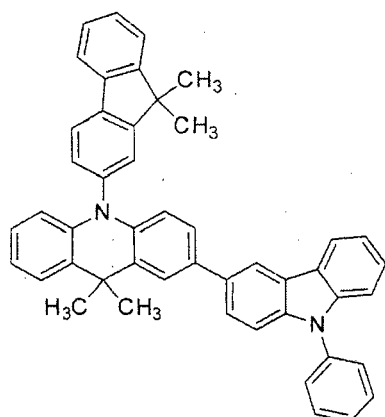


(Compound 67)

[Chemical Formula 70]

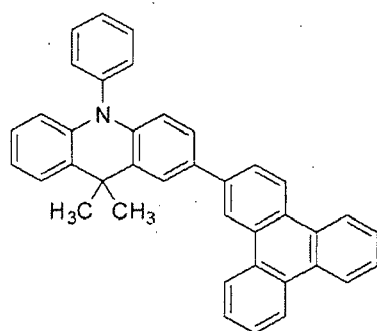


(Compound 68)

[Chemical Formula 71]

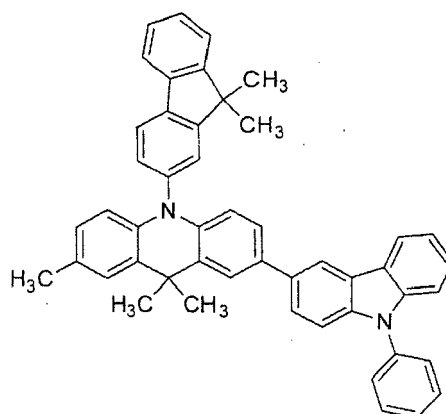


(Compound 69)

[Chemical Formula 72]




(Compound 70)

[Chemical Formula 73]

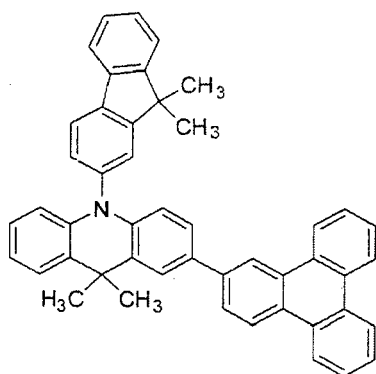


(Compound 71)

[Chemical Formula 74]

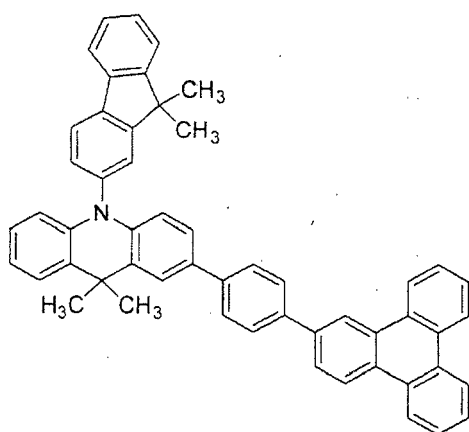


(Compound 72)

[Chemical Formula 75]

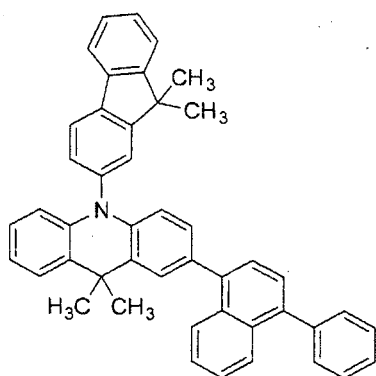


(Compound 73)

[Chemical Formula 76]

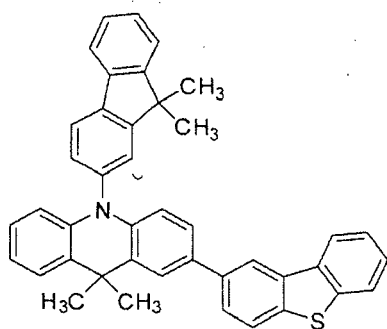


(Compound 74)

[Chemical Formula 77]

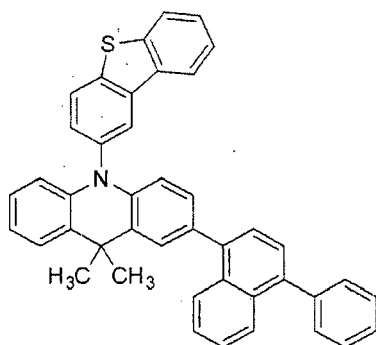


(Compound 75)

[Chemical Formula 78]

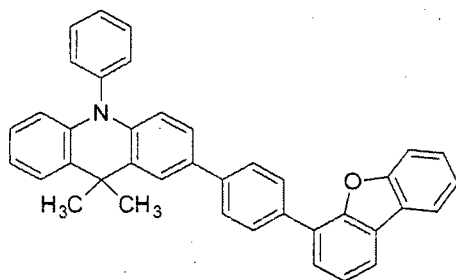


(Compound 76)

[Chemical Formula 79]

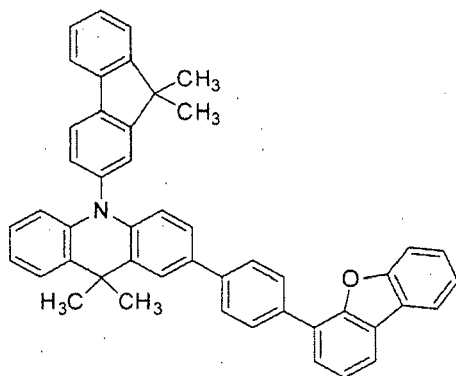


(Compound 77)

[Chemical Formula 80]

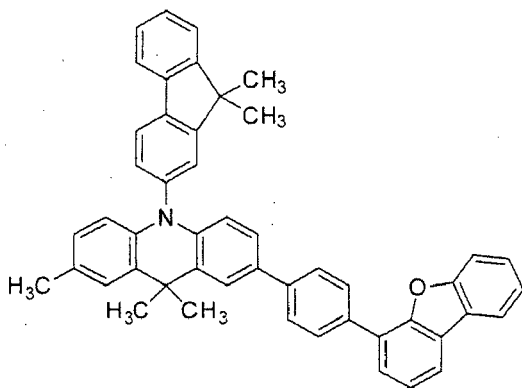


(Compound 78)

[Chemical Formula 81]

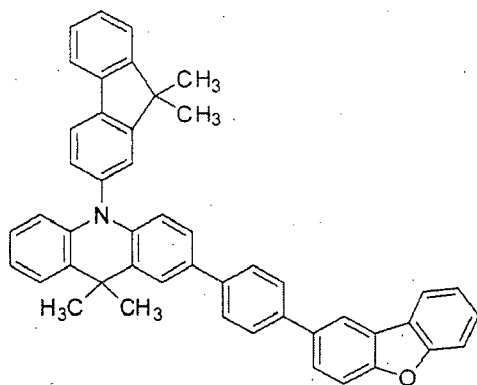


(Compound 79)

[Chemical Formula 82]

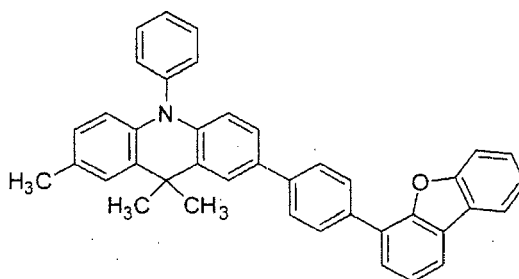


(Compound 80)

[Chemical Formula 83]

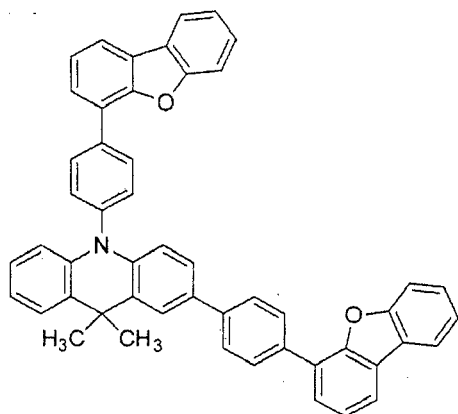


(Compound 81)

[Chemical Formula 84]

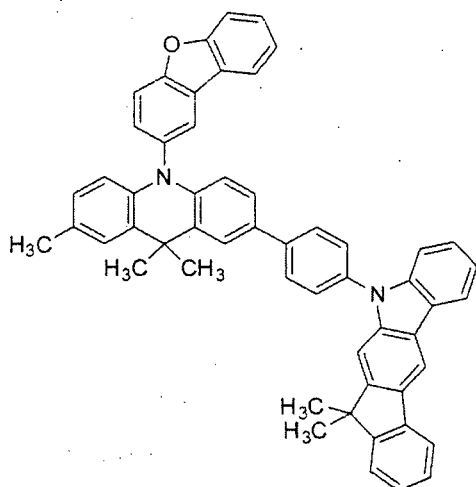

(Compound 82)

[Chemical Formula 85]

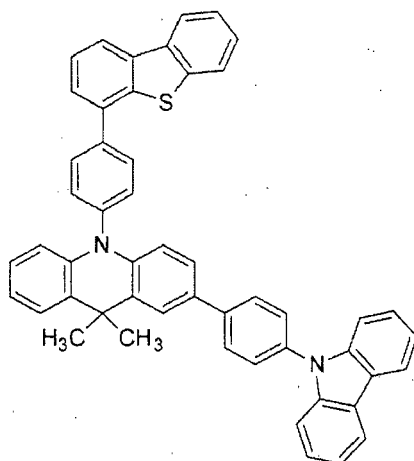

(Compound 83)

[0041] These compounds were purified by methods such as column chromatography, adsorption using, for example, silica gel, activated carbon, or activated clay, and recrystallization or crystallization using a solvent. The compounds were identified by an NMR analysis. A glass transition point (T_g), a melting point, and a work function were measured as material property values. The glass transition point (T_g) can be used as an index of stability in the thin-film state, the melting point as an index of vapor deposition, and the work function as an index of hole transportability.

[0042] The glass transition point (T_g) and the melting point were measured by a high-sensitive differential scanning calorimeter (DSC3100S produced by Bruker AXS) using powder.

[0043] For the measurement of the work function, a 100 nm-thick thin film was fabricated on an ITO substrate, and an atmosphere photoelectron spectrometer (AC-3 produced by Riken Keiki Co., Ltd.) was used.

[0044] The organic EL device of the present invention may have a structure including an anode, a hole transport layer, an electron blocking layer, a light emitting layer, an electron transport layer, and a cathode successively formed on a substrate, optionally with a hole injection layer between the anode and the hole transport layer, or with an electron injection layer between the electron transport layer and the cathode. In such multilayer structures, some of the organic layers may be omitted. For example, the device may be configured to include an anode, a hole transport layer, a light

emitting layer, an electron transport layer, and a cathode successively formed on a substrate.

[0045] Electrode materials with high work functions such as ITO and gold are used as the anode of the organic EL device of the present invention. The hole injection layer of the organic EL device of the present invention may be made of material such as porphyrin compounds as represented by copper phthalocyanine, starburst-type triphenylamine derivatives, various triphenylamine tetramers, accepting heterocyclic compounds such as hexacyano azatriphenylene, and coating-type polymer materials, in addition to the compounds of general formula (1) having an acridan ring structure of the present invention. These materials may be formed into a thin film by a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0046] Examples of material used for the hole transport layer of the organic EL device of the present invention can be benzidine derivatives such as N,N'-diphenyl-N,N'-di(m-tolyl)benzidine (hereinafter referred to as TPD), N,N'-diphenyl-N,N'-di(α -naphthyl)benzidine (hereinafter referred to as NPD), and N,N,N',N'-tetrabiphenylbenzidine; 1,1-bis[4-(di-4-tolylamino)phenyl]cyclohexane (hereinafter referred to as TAPC); and various triphenylamine trimers and tetramers, in addition to the compounds of general formula (1) having an acridan ring structure of the present invention. These may be individually deposited for film forming, may be used as a single layer deposited mixed with other materials, or may be formed as a laminate of individually deposited layers, a laminate of mixedly deposited layers, or a laminate of the individually deposited layer and the mixedly deposited layer. Examples of material used for the hole injection/transport layer can be coating-type polymer materials such as poly(3,4-ethylenedioxythiophene) (hereinafter referred to as PEDOT)/poly(styrene sulfonate) (hereinafter referred to as PSS). These materials may be formed into a thin-film by a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0047] Further, material used for the hole injection layer or the hole transport layer may be obtained by p-doping trisbromophenylamine hexachloroantimony or the like into the material commonly used for these layers, or may be, for example, polymer compounds each having a TPD structure as a part of the compound structure.

[0048] Examples of material used for the electron blocking layer of the organic EL device of the present invention can be compounds having an electron blocking effect, including, for example, carbazole derivatives such as 4,4',4"-tri(N-carbazolyl)triphenylamine (hereinafter referred to as TCTA), 9,9-bis[4-(carbazol-9-yl)phenyl]fluorene, 1,3-bis(carbazol-9-yl)benzene (hereinafter referred to as mCP), and 2,2-bis(4-carbazol-9-ylphenyl)adamantane (hereinafter referred to as Ad-Cz); and compounds having a triphenylsilyl group and a triarylamine structure, as represented by 9-[4-(carbazol-9-yl)phenyl]-9-[4-(triphenylsilyl)phenyl]-9H-fluorene, in addition to the compounds of general formula (1) having an acridan ring structure of the present invention. These may be individually deposited for film forming, may be used as a single layer deposited mixed with other materials, or may be formed as a laminate of individually deposited layers, a laminate of mixedly deposited layers, or a laminate of the individually deposited layer and the mixedly deposited layer. These materials may be formed into a thin-film by using a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0049] Examples of material used for the light emitting layer of the organic EL device of the present invention can be various metal complexes, anthracene derivatives, bis(styryl)benzene derivatives, pyrene derivatives, oxazole derivatives, and polyparaphenylene vinylene derivatives, in addition to quinolinol derivative metal complexes such as Alq₃. Further, the light emitting layer may comprise a host material and a dopant material. Examples of the host material can be thiazole derivatives, benzimidazole derivatives, and polydialkyl fluorene derivatives, in addition to the above light-emitting materials and the compounds of general formula (1) having an acridan ring structure of the present invention. Examples of the dopant material can be quinacridone, coumarin, rubrene, perylene, derivatives thereof, benzopyran derivatives, rhodamine derivatives, and aminostyryl derivatives. These may be individually deposited for film forming, may be used as a single layer deposited mixed with other materials, or may be formed as a laminate of individually deposited layers, a laminate of mixedly deposited layers, or a laminate of the individually deposited layer and the mixedly deposited layer.

[0050] Further, the light-emitting material may be a phosphorescent light-emitting material. Phosphorescent materials as metal complexes of metals such as iridium and platinum may be used as the phosphorescent light-emitting material. Examples of the phosphorescent materials can be green phosphorescent materials such as Ir(ppy)₃, blue phosphorescent materials such as FIrpic and FIr₆, and red phosphorescent materials such as Btp₂Ir(acac). As the hole injecting and transporting host material, the compounds of general formula (1) having an acridan ring structure of the present invention may be used in addition to carbazole derivatives such as 4,4'-di (N-carbazolyl)biphenyl (hereinafter referred to as CBP), TCTA, and mCP. Compounds such as p-bis(triphenylsilyl)benzene (hereinafter referred to as UGH2) and 2,2',2'-(1,3,5-phenylene)-tris(1-phenyl-1H-benzimidazole) (hereinafter referred to as TPBI) may be used as the electron transporting host material to produce a high-performance organic EL device.

[0051] In order to avoid concentration quenching, it is preferable to dope the host material with the phosphorescent light-emitting material by co-evaporation in a range of 1 to 30 weight percent to the whole light emitting layer.

[0052] These materials may be formed into a thin-film by using a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0053] The hole blocking layer of the organic EL device of the present invention may be formed by using hole blocking compounds such as various rare earth complexes, triazole derivatives, triazine derivatives, and oxadiazole derivatives,

in addition to the metal complexes of phenanthroline derivatives such as bathocuproin (hereinafter referred to as BCP), and the metal complexes of quinolinol derivatives such as aluminum(III) bis(2-methyl-8-quinolate)-4-phenylphenolate (hereinafter referred to as BAQ). These materials may also serve as the material of the electron transport layer. These may be individually deposited for film forming, may be used as a single layer deposited mixed with other materials, or may be formed as a laminate of individually deposited layers, a laminate of mixedly deposited layers, or a laminate of the individually deposited layer and the mixedly deposited layer. These materials may be formed into a thin-film by using a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0054] Examples of material used for the electron transport layer of the organic EL device of the present invention can be various metal complexes, triazole derivatives, triazine derivatives, oxadiazole derivatives, thiadiazole derivatives, carbodiimide derivatives, quinoxaline derivatives, phenanthroline derivatives, and silole derivatives, in addition to the metal complexes of quinolinol derivatives such as Alq₃ and BAQ. These may be individually deposited for film forming, may be used as a single layer deposited mixed with other materials, or may be formed as a laminate of individually deposited layers, a laminate of mixedly deposited layers, or a laminate of the individually deposited layer and the mixedly deposited layer. These materials may be formed into a thin-film by using a vapor deposition method or other known methods such as a spin coating method and an inkjet method.

[0055] Examples of material used for the electron injection layer of the organic EL device of the present invention can be alkali metal salts such as lithium fluoride and cesium fluoride; alkaline earth metal salts such as magnesium fluoride; and metal oxides such as aluminum oxide. However, the electron injection layer may be omitted in the preferred selection of the electron transport layer and the cathode.

[0056] The cathode of the organic EL device of the present invention may be made of an electrode material with a low work function such as aluminum, or an alloy of an electrode material with an even lower work function such as a magnesium-silver alloy, a magnesium-indium alloy, or an aluminum-magnesium alloy.

[0057] The following describes an embodiment of the present invention in more detail based on Examples. The present invention, however, is not restricted to the following Examples.

Example 1

<Synthesis of 10-(9,9-dimethyl-9H-fluoren-2-yl)-2,9,9-trimethyl-7-(9-phenyl-9H-carbazol-3-yl)acridan (Compound 69) >

[0058] 7-bromo-10-(9,9-dimethyl-9H-fluoren-2-yl)-2,9,9-trimethylacridan (5.27 g), 9-phenyl-3-(4,4,5,5-tetramethyl-1,3,2-dioxaborolane-2-yl)-9H-carbazol (4.70 g), toluene (79 ml), ethanol (20 ml), and a 2 M potassium carbonate aqueous solution (8 ml) were added to a reaction vessel in a nitrogen atmosphere, and aerated with nitrogen gas for 30 minutes under ultrasonic irradiation. The mixture was heated after adding tetrakis(triphenylphosphine)palladium (0.24 g), and stirred at 67°C for 5 hours. After the mixture was allowed to cool to room temperature, toluene (50 ml) was added to perform liquid separation in order to collect an organic layer. The organic layer was washed with water (50 ml), dried over anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (support: silica gel, eluent: hexane/toluene). The crystallization with a toluene/diisopropyl ether mixed solvent and the crystallization with a toluene/hexane mixed solvent were repeated, and the product was washed under reflux with methanol to obtain a white powder of 10-(9,9-dimethyl-9H-fluoren-2-yl)-2,9,9-trimethyl-7-(9-phenyl-9H-carbazol-3-yl)acridan (Compound 69; 2.87 g; yield 41%).

[0059] The structure of the product white powder was identified by NMR. The ¹H-NMR measurement result is shown in FIG. 1.

[0060] ¹H-NMR (THF-d₈) detected 40 hydrogen signals, as follows. δ (ppm) = 8.36 (1H), 8.20 (1H), 8.05 (1H), 7.85 (2H), 7.64-7.21 (17H), 6.74 (1H), 6.41 (1H), 6.24 (1H), 2.27 (3H), 1.77 (6H), 1.54 (6H).

Example 2

<Synthesis of 10-(9,9-dimethyl-9H-fluoren-2-yl)-9,9-dimethyl-2-(triphenylene-2-yl)acridan (Compound 71) >

[0061] 2-bromo-10-(9,9-dimethyl-9H-fluoren-2-yl)-9,9-dimethylacridan (7.00 g), 4,4,5,5-tetramethyl-2-(triphenylene-2-yl)-[1,3,2]dioxaborolane (5.16 g), tetrakis(triphenylphosphine)palladium (0.34 g), potassium carbonate (4.03 g), toluene (40 ml), ethanol (10 ml), and water (15 ml) were added to a reaction vessel in a nitrogen atmosphere, heated, and stirred for 3 hours under reflux. After the mixture was allowed to cool to room temperature, water and toluene were added to perform liquid separation in order to collect an organic layer. The organic layer was dried over anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (support: silica gel, eluent: toluene/hexane=1/1) to obtain a white powder of 10-(9,9-dimethyl-9H-fluoren-2-yl)-9,9-dimethyl-2-(triphenylene-2-yl)acridan (Compound 71; 5.40 g; yield 59%).

[0062] The structure of the product white powder was identified by NMR. The ¹H-NMR measurement result is shown

in FIG. 2.

[0063] $^1\text{H-NMR}$ (THF-d_8) detected 37 hydrogen signals, as follows. δ (ppm) = 8.93 (1H), 8.85 (1H), 8.80-8.71 (4H), 8.09 (1H), 8.01 (1H), 7.95 (1H), 7.87 (1H), 7.69-7.61 (4H), 7.59-7.46 (4H), 7.42-7.34 (3H), 6.98-6.87 (2H), 6.51 (1H), 6.39 (1H), 1.85 (6H), 1.57(6H).

Example 3

<Synthesis of 2-[(dibenzofuran-2-yl)benzene-4-yl]-7,9,9-trimethyl-10-phenylacridan (Compound 80)>

[0064] 1-bromo-4-(dibenzofuran-2-yl)benzene (11.0 g), 4,4,5,5-tetramethyl-2-(10-phenyl-2,9,9-trimethylacridan-7-yl)-[1,3,2]dioxaborolane (17.3 g), tetrakis(triphenylphosphine)palladium (0.78 g), potassium carbonate (7.05 g), toluene (110 ml), ethanol (18 ml), and water (25 ml) were added to a reaction vessel in a nitrogen atmosphere, heated, and stirred for 6.5 hours under reflux. After the mixture was allowed to cool to room temperature, water and toluene were added to perform liquid separation in order to collect an organic layer. The organic layer was dried over anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (support: silica gel, eluent: toluene/heptane=1/4) to obtain a white powder of 2-[(dibenzofuran-2-yl)benzene-4-yl]-7,9,9-trimethyl-10-phenylacridan (Compound 80; 13.2 g; yield 71%).

[0065] The structure of the product white powder was identified by NMR. The $^1\text{H-NMR}$ measurement result is shown in FIG. 3.

[0066] $^1\text{H-NMR}$ (THF-d_8) detected 31 hydrogen signals, as follows. δ (ppm) = 8.18 (1H), 8.02-7.94 (3H), 7.84 (1H), 7.75-7.72 (2H), 7.71-7.62 (4H), 7.54 (1H), 7.49-7.29 (7H), 6.74 (1H), 6.32 (1H), 6.15 (1H), 2.27 (3H), 1.78 (6H).

Example 4

[0067] The melting points and the glass transition points of the compounds of the present invention were determined using a high-sensitive differential scanning calorimeter (DSC3100S produced by Bruker AXS).

	Melting point	Glass transition point
Compound of Example 1 of the present invention	253°C	134°C
Compound of Example 2 of the present invention	262°C	139°C

[0068] The compounds of the present invention had glass transition points of 100°C or more. This indicates that the compounds of the present invention have a stable thin-film state.

Example 5

[0069] A 100 nm-thick vapor-deposited film was fabricated on an ITO substrate using the compounds of the present invention. The work function was measured using an atmosphere photoelectron spectrometer (AC-3 produced by Riken Keiki Co., Ltd.).

	Work function
Compound of Example 1 of the present invention	5.48 eV
Compound of Example 2 of the present invention	5.48 eV

[0070] As shown above, the compounds of the present invention have more desirable energy levels and more desirable hole transportability than common hole transport materials such as NPD and TPD having work functions of 5.4 eV.

Example 6


[0071] The organic EL device, as illustrated in FIG. 4, was fabricated from a hole injection layer 3, a hole transport layer 4, a light emitting layer 5, an electron transport layer 6, an electron injection layer 7, and a cathode (aluminum electrode) 8 successively formed by vapor deposition on a glass substrate 1 that had been provided beforehand with an ITO electrode as a transparent anode 2.

[0072] Specifically, the glass substrate 1 having ITO (thickness 150 nm) formed thereon was washed with an organic solvent, and subjected to an oxygen plasma treatment to wash the surface. The glass substrate with the ITO electrode

was then installed in a vacuum vapor deposition apparatus, and the pressure was reduced to 0.001 Pa or less. This was followed by formation of the hole injection layer 3 by forming Compound 84 of the structural formula below over the transparent anode 2 in a thickness of 20 nm. The hole transport layer 4 was then formed on the hole injection layer 3 by forming the compound of Example 1 of the present invention (Compound 69) in a thickness of 40 nm. Then, the light emitting layer 5 was formed on the hole transport layer 4 in a thickness of 30 nm by the dual vapor deposition of Compound 85 of the structural formula below and Compound 86 of the structural formula below at a deposition rate ratio of Compound 85: Compound 86 = 5:95. The electron transport layer 6 was then formed on the light emitting layer 5 by forming Alq_3 in a thickness of 30 nm. Then, the electron injection layer 7 was formed on the electron transport layer 6 by forming lithium fluoride in a thickness of 0.5 nm. Finally, the cathode 8 was formed by vapor depositing aluminum in a thickness of 150 nm. The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature.


[0073] Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device fabricated with the compound of Example 1 of the present invention (Compound 69).

[Chemical Formula 86]

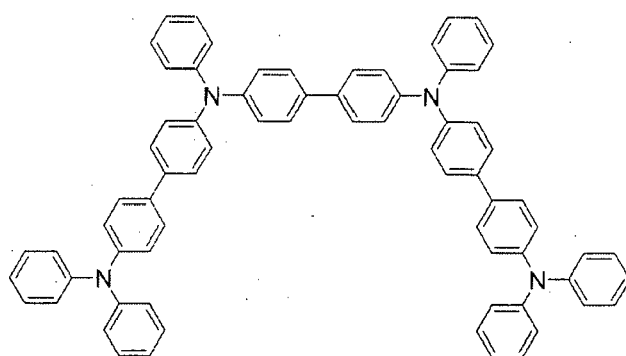

(Compound 84)


[Chemical Formula 87]

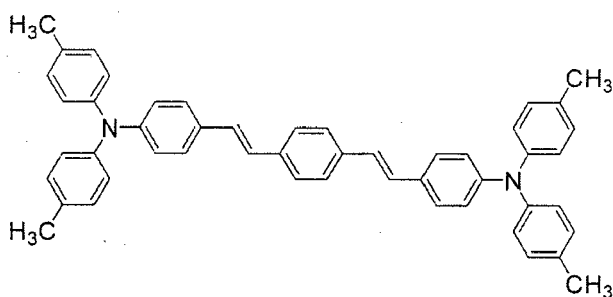

(Compound 85)

[Chemical Formula 88]

[0074]



(Compound 86)


Example 7

[0075] An organic EL device was fabricated under the same conditions used in Example 6, except that the hole transport layer 4 was formed by forming the compound of Example 2 of the present invention (Compound 71) in a thickness of 40 nm, instead of using the compound of Example 1 of the present invention (Compound 69). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the fabricated organic EL device.

Comparative Example 1

[0076] For comparison, an organic EL device was fabricated under the same conditions used in Example 6, except that the hole transport layer 4 was formed by forming Compound 87 of the structural formula below in a thickness of 40 nm, instead of using the compound of Example 1 of the present invention (Compound 69). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the fabricated organic EL device.

[Chemical Formula 89]

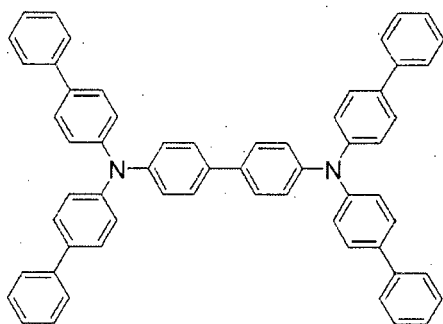

(Compound 87)

[Table 1]

	Compound	Voltage [V] (@10mA/cm ²)	Luminance [cd/m ²] (@10mA/cm ²)	Current efficiency [cd/A] (@10mA/cm ²)	Power efficiency [1m/W] (@10mA/cm ²)
Ex. 6	Compound 69	5.30	937	9.37	5.56
Ex. 7	Compound 71	5.09	1051	10.51	6.49
Com. Ex. 1	Compound 87	5.17	903	9.03	5.49

[0077] As can be seen in Table 1, the driving voltage upon passing a current with a current density of 10 mA/cm² was 5.30 V for the organic EL device that uses the compound of Example 1 of the present invention (Compound 69), and 5.09 V for the organic EL device that uses the compound of Example 2 of the present invention (Compound 71), comparable to, or even lower than 5.17 V for the organic EL device that uses Compound 87. When compared to the power efficiency 5.49 lm/W of the organic EL device that uses Compound 87, there was improvement in the organic EL device that uses the compound of Example 1 (Compounds 69) as shown in its power efficiency 5.56 lm/W, and there was a great improvement particularly in the organic EL device that uses the compound of Example 2 (Compounds 71) as shown in its power efficiency 6.49 lm/W. Further, the luminance and the current efficiency both greatly improved as compared with Compound 87.

[0078] As is clear from these results, the organic EL devices using the compounds having an acridan ring structure of the present invention can greatly improve luminous efficiency and power efficiency, and can achieve a lower actual driving voltage compared to the organic EL device that uses Compound 87.

Industrial Applicability

[0079] The compounds having an acridan ring structure of the present invention have high hole transportability, an excellent amorphousness, and a stable thin-film state, and are desirable for organic EL devices. The organic EL device produced by using the compounds can have high luminous efficiency and high power efficiency, and a low actual driving voltage, and can thus have improved durability. There are potential applications for, for example, home electronic appliances and illuminations.

Description of Reference Numeral


[0080]

- 1 Glass substrate
- 2 Transparent anode
- 3 Hole injection layer
- 4 Hole transport layer
- 5 Light emitting layer
- 6 Electron transport layer
- 7 Electron injection layer
- 8 Cathode

Claims

1. A compound of the following general formula (1) having an acridan ring structure,

[Chemical Formula 1]

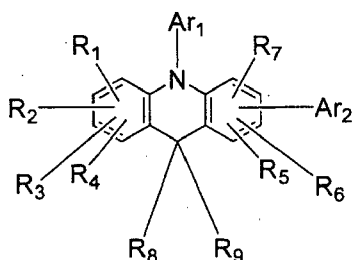


(1)

wherein Ar₁ is substituted or unsubstituted 9,9'-dimethylfluorenyl; Ar₂ is a substituted or unsubstituted condensed polycyclic aromatic group; R₁ to R₄ may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkoxy of 1 to 6 carbon atoms that

may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring; R_5 to R_7 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, a substituted or unsubstituted condensed polycyclic aromatic group, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring; and R_8 and R_9 may be the same or different, and represent trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, or cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

2. The compound having an acridan ring structure according to claim 1, wherein the compound is represented by the following general formula (2),

[Chemical Formula 2]



(2)

wherein Ar_1 is substituted or unsubstituted 9,9'-dimethylfluorenyl; Ar_2 is a substituted or unsubstituted condensed polycyclic aromatic group; R_1 to R_4 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring; R_5 to R_7 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, trifluoromethyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, a substituted or unsubstituted condensed polycyclic aromatic group, or substituted or unsubstituted aryloxy, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring; and R_8 and R_9 may be the same or different, and represent a trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, cycloalkyl of 5 to 10 carbon atoms that may have a substituent, linear or branched alkenyl of 2 to 6 carbon atoms that may have a substituent, linear or branched alkyloxy of 1 to 6 carbon atoms that may have a substituent, cycloalkyloxy of 5 to 10 carbon atoms that may have a substituent, a substituted or unsubstituted aromatic hydrocarbon group, a substituted or unsubstituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group, and may bind to each other via a single bond, substituted or unsubstituted methylene, an oxygen atom, or a sulfur atom to form a ring.

3. The compound having an acridan ring structure according to claim 1, wherein R_8 and R_9 in the general formula (1) are methyl.
- 5 4. An organic electroluminescent device comprising a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, wherein the compound having an acridan ring structure of claim 1 or 2 is used as a constituent material of at least one of the organic layers.
5. The organic electroluminescent device according to claim 4, wherein the organic layer is a hole transport layer.
- 10 6. The organic electroluminescent device according to claim 4, wherein the organic layer is an electron blocking layer.
7. The organic electroluminescent device according to claim 4, wherein the organic layer is a hole injection layer.
- 15 8. The organic electroluminescent device according to claim 4, wherein the organic layer is a light emitting layer.

20

25

30

35

40

45

50

55

Fig. 1

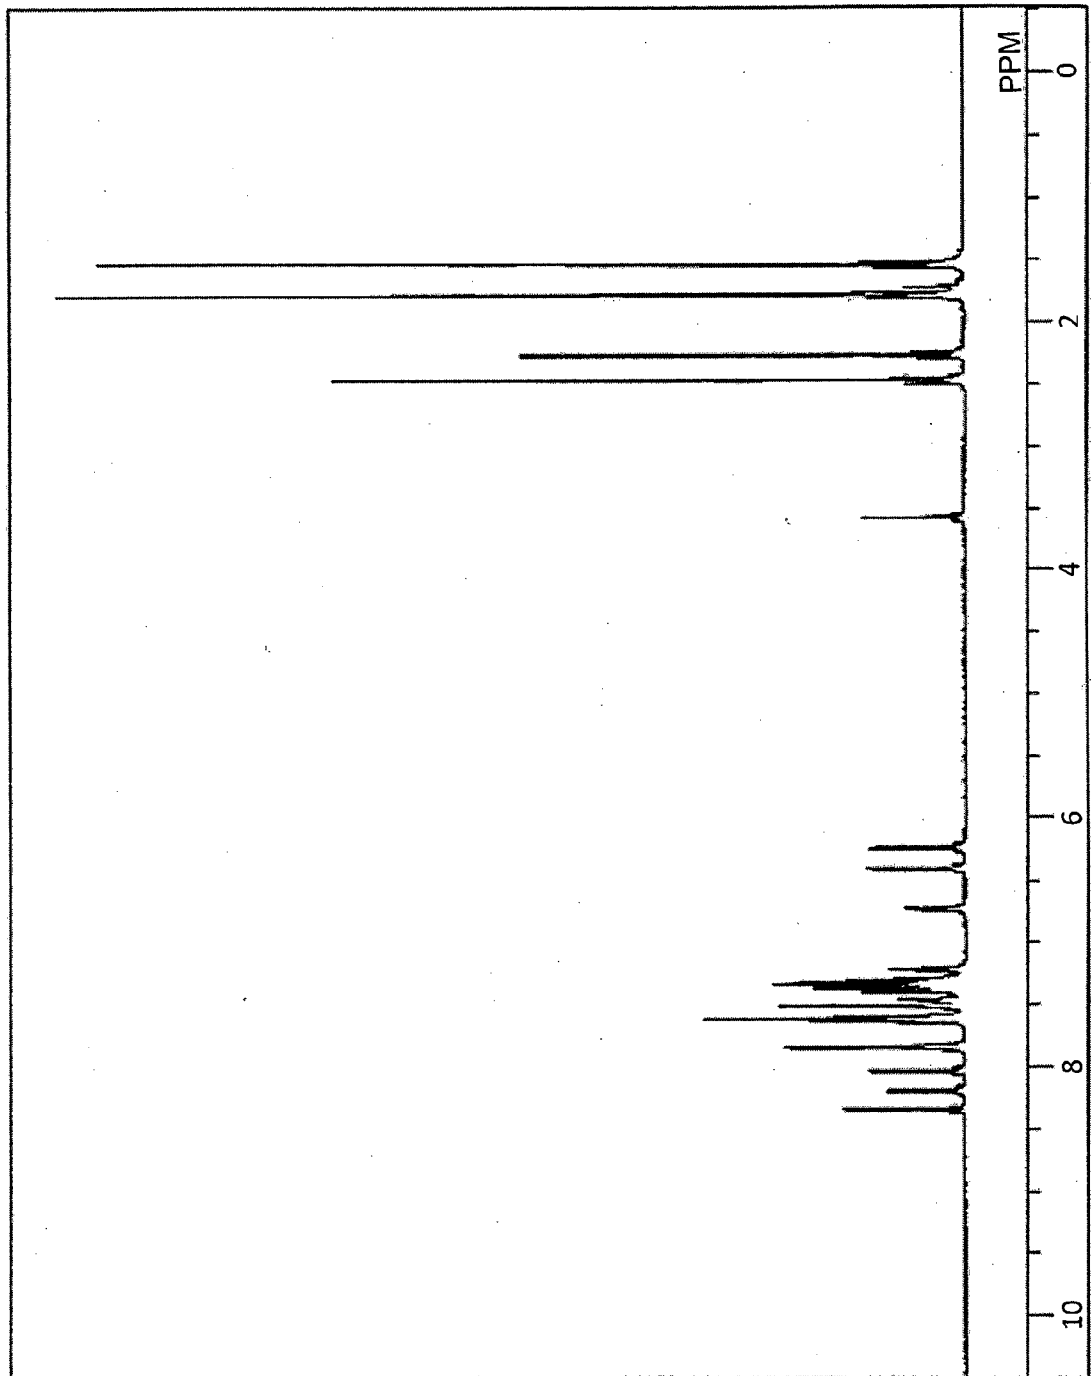


Fig. 2

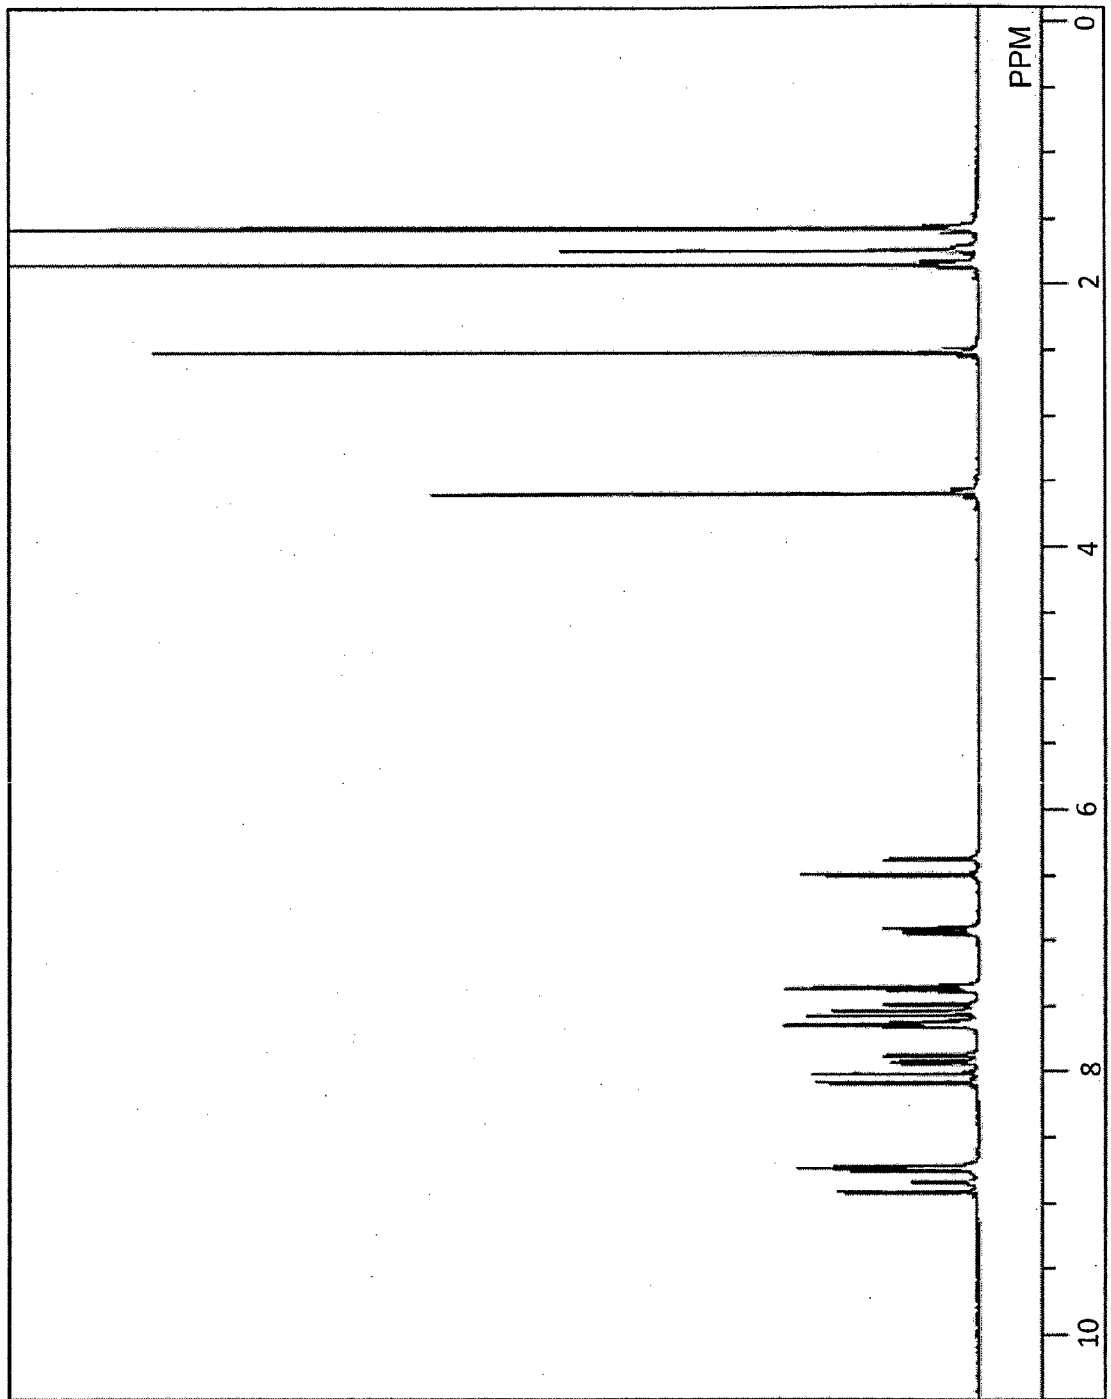


Fig. 3


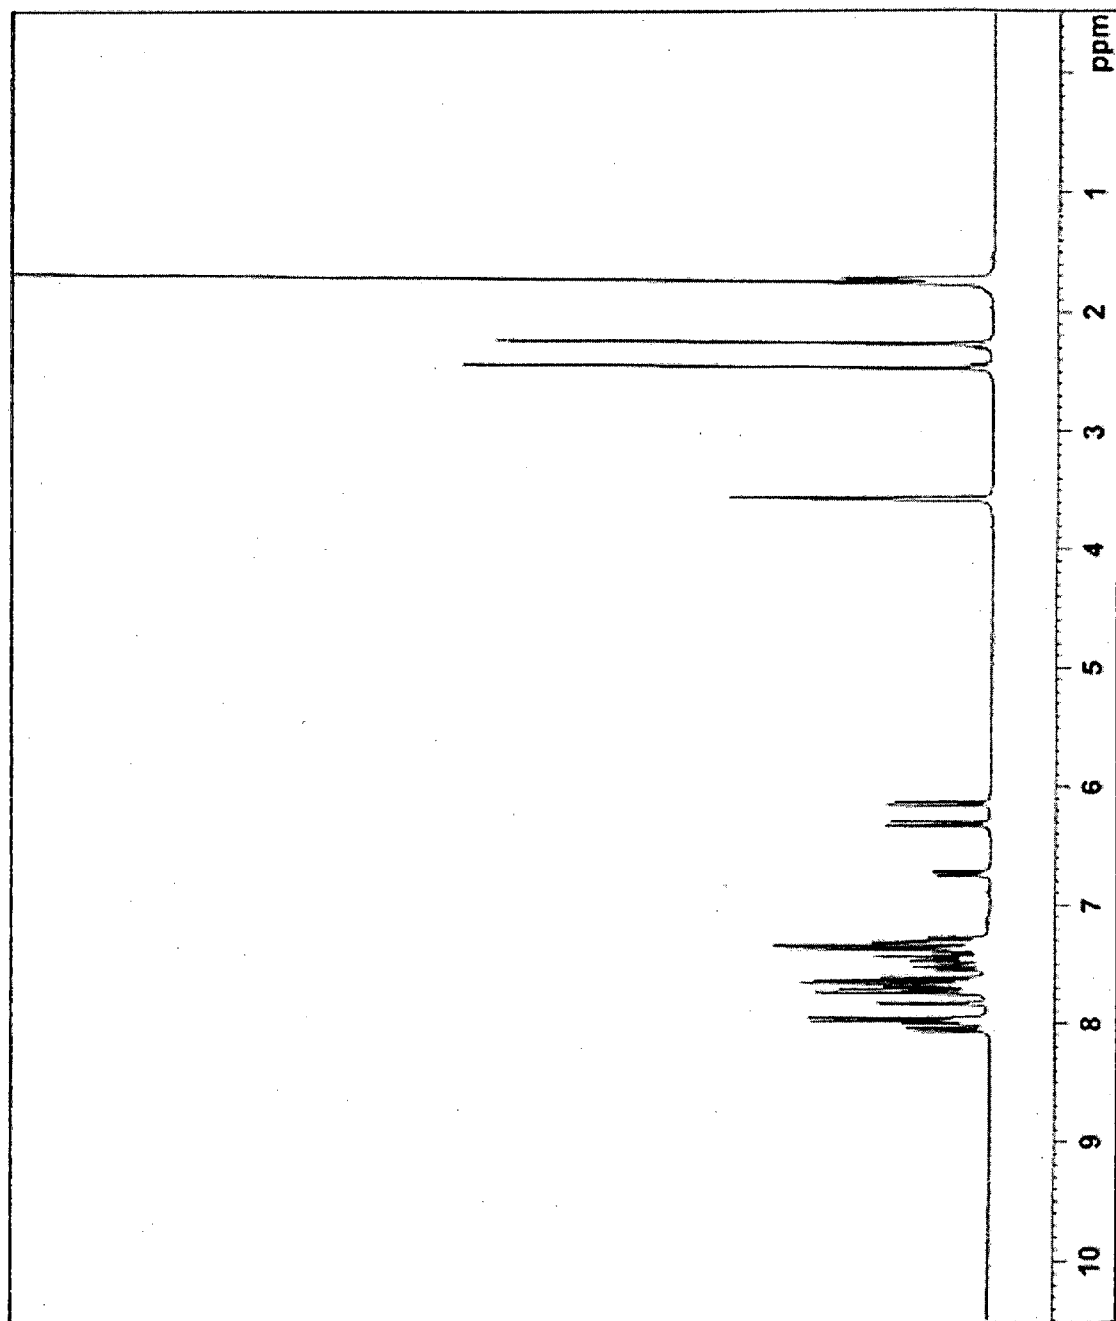


Fig. 4



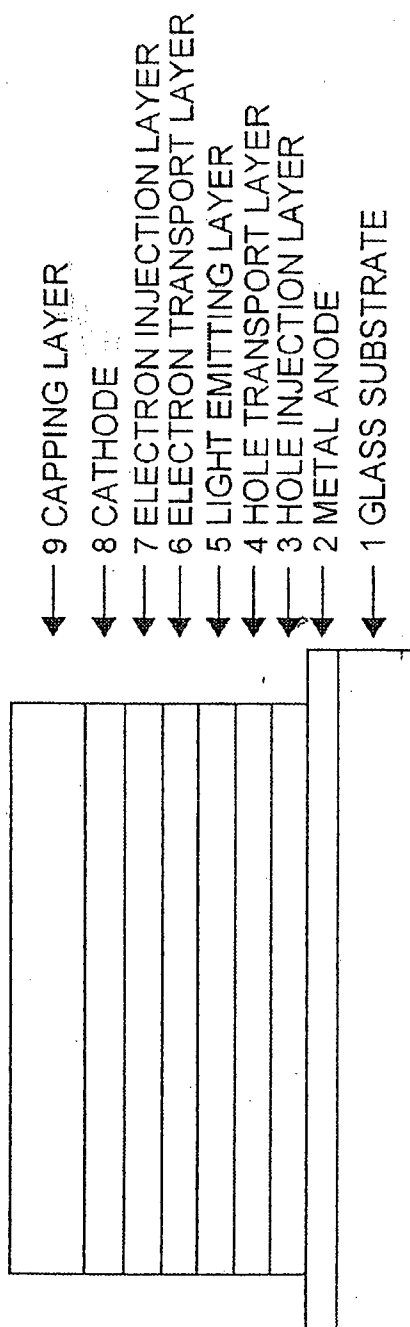

EUROPEAN SEARCH REPORT

 Application Number
 EP 16 00 1939

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2011/107186 A2 (MERCK PATENT GMBH [DE]; BROCKE CONSTANZE [DE]; PFLUMM CHRISTOF [DE]; P) 9 September 2011 (2011-09-09) * compound 3 *	1-8	INV. H01L51/54 C07D219/02 C07D401/04 C07D401/10 C09K11/06 H01L51/50
X	WO 2011/155169 A1 (HODOGAYA CHEMICAL CO LTD [JP]; YOKOYAMA NORIMASA [JP]; NAGAOKA MAKOTO) 15 December 2011 (2011-12-15) * compounds 19,22,25,28 * -& US 2015/048351 A1 (YOKOYAMA NORIMASA [JP] ET AL) 19 February 2015 (2015-02-19)	1-8	
X,P	KR 2012 0083242 A (LG CHEMICAL LTD [KR]) 25 July 2012 (2012-07-25) * compound 3 *	1-8	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01L
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 January 2017	Examiner Wolfbauer, Georg
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 00 1939

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-01-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011107186 A2	09-09-2011	CN 102782894 A	14-11-2012
		DE 102010009903 A1	08-09-2011
		DE 112011100731 A5	03-01-2013
		JP 5937018 B2	22-06-2016
		JP 2013521238 A	10-06-2013
		KR 20110099643 A	08-09-2011
		TW 201141847 A	01-12-2011
		US 2012319052 A1	20-12-2012
		WO 2011107186 A2	09-09-2011
WO 2011155169 A1	15-12-2011	CN 102933552 A	13-02-2013
		EP 2578572 A1	10-04-2013
		JP 5850835 B2	03-02-2016
		KR 20130112850 A	14-10-2013
		TW 201211202 A	16-03-2012
		US 2013075715 A1	28-03-2013
		US 2015048351 A1	19-02-2015
		WO 2011155169 A1	15-12-2011
US 2015048351 A1	19-02-2015	CN 102933552 A	13-02-2013
		EP 2578572 A1	10-04-2013
		JP 5850835 B2	03-02-2016
		KR 20130112850 A	14-10-2013
		TW 201211202 A	16-03-2012
		US 2013075715 A1	28-03-2013
		US 2015048351 A1	19-02-2015
		WO 2011155169 A1	15-12-2011
KR 20120083242 A	25-07-2012	KR 20120083242 A	25-07-2012
		KR 20150082156 A	15-07-2015

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 8048656 A [0012]
- JP 3194657 B [0012]
- WO 2006033563 A [0012]
- WO 2007110228 A [0012]

Non-patent literature cited in the description

- *The Japan Society of Applied Physics, 9th Lecture Preprints*, 2001, 55-61 [0013]
- *The Japan Society of Applied Physics, 9th Lecture Preprints*, 2001, 23-31 [0013]
- *Organic EL Symposium, the 3rd Regular presentation Preprints*, 2006, 13-14 [0013]
- *J. Org. Chem.*, 1995, vol. 60, 7508 [0013]
- *Chem. Rev.*, 1995, vol. 95, 2457 [0013]

专利名称(译)	具有吡啶环结构的化合物和有机电致发光器件		
公开(公告)号	EP3139423A1	公开(公告)日	2017-03-08
申请号	EP2016001939	申请日	2013-04-04
[标]申请(专利权)人(译)	保土谷化学工业株式会社		
申请(专利权)人(译)	HODOGAYA化学有限公司.		
当前申请(专利权)人(译)	HODOGAYA化学有限公司.		
[标]发明人	YOKOYAMA NORIMASA NAGAOKA MAKOTO KANDA DAIZOU KABASAWA NAOAKI HAYASHI SHUICHI		
发明人	YOKOYAMA, NORIMASA NAGAOKA, MAKOTO KANDA, DAIZOU KABASAWA, NAOAKI HAYASHI, SHUICHI		
IPC分类号	H01L51/54 C07D219/02 C07D401/04 C07D401/10 C09K11/06 H01L51/50		
CPC分类号	C07D219/02 C07D401/04 C07D401/10 C07D405/04 C07D405/10 C07D405/14 C07D409/04 C07D409/14 C07D495/04 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1088 C09K2211/1092 H01L51/0052 H01L51/0054 H01L51/0058 H01L51/0071 H01L51/0072 H01L51/0073 H01L51/0074 C09K11/06 H01L51/0061 H01L51/50 H01L51/5012 H01L51/5056 H01L51/5088 H01L51/5096		
优先权	2012088912 2012-04-10 JP		
外部链接	Espacenet		

摘要(译)

本发明提供一种具有空穴注入/传输性能优异且具有电子阻挡能力，高度稳定的薄膜状态和优异的耐热性的有机化合物作为高效率和高耐久性的有机电致发光器件的材料，并且使用该化合物提供高效率和高耐久性的有机电致发光器件。通式（化学式1）的化合物具有吡啶环结构，其中Ar 1是取代或未取代的9,9-二甲基芴基，Ar 2是取代或未取代的稠合多环芳族基团，并且用作α的构成材料。有机电致发光器件中的至少一个有机层包括一对电极和夹在该对电极之间的一个或多个有机层。

[Chemical Formula 1]

