

(11) EP 3 235 892 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

25.10.2017 Bulletin 2017/43

(51) Int Cl.:

C09K 11/06 (2006.01)

H01L 51/50 (2006.01)

(21) Application number: 17170335.8

(22) Date of filing: 21.01.2013

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **14.02.2012 EP 12000929 22.10.2012 US 201261716810 P**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:

16001513.7 / 3 101 088 13701209.2 / 2 814 906

(71) Applicant: Merck Patent GmbH 64293 Darmstadt (DE)

(72) Inventors:

 Montenegro, Elvira 69469 WEINHEIM (DE)

- Parham, Amir 60486 FRANKFURT AM MAIN (DE)
- Stoessel, Philipp 60389 FRANKFURT AM MAIN (DE)
- Mujica-Fernaud, Teresa 64283 DARMSTADT (DE)
- Voges, Frank
 67098 BAD DUERKHEIM (DE)
- Buesing, Arne
 65929 Frankfurt am Main (DE)

Remarks:

This application was filed on 10-05-2017 as a divisional application to the application mentioned under INID code 62.

(54) MATERIALS FOR ORGANIC ELECTROLUMINESCENT DEVICES

(57) The present invention relates to compounds of the formula (1) which are suitable for use in electronic devices, in particular organic electroluminescent devices, and to electronic devices which comprise these compounds.

EP 3 235 892 A1

Description

5

10

15

20

25

30

[0001] The present invention relates to materials for use in electronic devices, in particular in organic electroluminescent devices, and to electronic devices comprising these materials.

[0002] The structure of organic electroluminescent devices (OLEDs) in which organic semiconductors are employed as functional materials is described, for example, in US 4,539,507, US 5,151,629, EP 0676461 and WO 98/27136. The emitting materials employed here are increasingly organometallic complexes which exhibit phosphorescence instead of fluorescence (M. A. Baldo et al., Appl. Phys. Lett. 1999, 75, 4-6).

[0003] In accordance with the prior art, the hole-transport materials used in the hole-transport layer or in the hole-injection layer are, in particular, triarylamine derivatives which frequently contain at least two triarylamino groups or at least one triarylamino group and at least one carbazole group. These compounds are frequently derived from diarylamino-substituted triphenyl-amines (TPA type), from diarylamino-substituted biphenyl derivatives (TAD type) or combinations of these base compounds. Furthermore, for example, use is made of spirobifluorene derivatives which are substituted in the 2,7- or 2,2',7,7'-position by two or four diarylamino groups (for example in accordance with EP 676461 or US 7,714,145). Furthermore known are spirobifluorene derivatives which are substituted in the 4,4'-position in each case by diphenylamino groups. In the case of these compounds, there is furthermore a need for improvement both in the case of fluorescent and in the case of phosphorescent OLEDs, in particular with respect to efficiency, lifetime and operating voltage on use in an organic electroluminescent device.

[0004] The object of the present invention is to provide compounds which are suitable for use in a fluorescent or phosphorescent OLED, in particular a phosphorescent OLED, for example as hole-transport material in a hole-transport or exciton-blocking layer or as matrix material in an emitting layer.

[0005] Surprisingly, it has been found that certain compounds described below in greater detail achieve this object and result in significant improvements in the organic electroluminescent device, in particular with respect to the lifetime, the efficiency and the operating voltage. This applies to phosphorescent and fluorescent electroluminescent devices, especially on use of the compounds according to the invention as hole-transport material or as matrix material. The materials generally have high thermal stability and can therefore be sublimed without decomposition and without a residue. The present invention therefore relates to these materials and to electronic devices which comprise compounds of this type.

[0006] In particular, it is a surprising result that very good results are also obtained, in particular, with aromatic monoamines, since hole-transport materials containing at least two nitrogen atoms are generally employed in organic electroluminescent devices.

[0007] The present invention therefore relates to a compound of the following formula (1):

$$\begin{array}{c}
Ar^{1} \\
Ar^{2} \\
Ar^{1}
\end{array}$$

$$\begin{array}{c}
Ar^{3} \\
R^{3} \\
\end{array}$$
formula (1)

where the following applies to the symbols and indices used:

is on each occurrence, identically or differently, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, selected from the group consisting of fluorene, spirobifluorene, biphenyl, terphenyl, quaterphenyl, carbazole, dibenzofuran and dibenzothiophene, each of which may also be substituted by one or more radicals R⁵; Ar¹ and Ar² here may also be connected to one another by a group E;

	Ar ²	is on each occurrence, identically or differently, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case also be substituted by one or more radicals R^5 ; Ar^1 and Ar^2 here may also be connected to one another by a group E;
5	Ar ^s	is on each occurrence, identically or differently, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case also be substituted by one or more radicals R ⁵ ;
	E	is on each occurrence, identically or differently, a single bond, $C(R^5)_2$, NR^5 , O or S;
10	R ¹ , R ² , R ³ , R ⁴	are selected on each occurrence, identically or differently, from the group consisting of H, D, F, Cl, Br, I, CN, $Si(R^6)_3$, a straight-chain alkyl, alkoxy or thioalkyl group having 1 to 40 C atoms or a branched or cyclic alkyl, alkoxy or thioalkyl group having 3 to 40 C atoms, each of which may be substituted by one or more radicals R^6 , where in each case one or more non-adjacent CH_2 groups may be replaced by $Si(R^6)_2$, $C=NR^6$, $P(=O)(R^6)$, SO , SO_2 , NR^6 , $P(=O)(R^6)$, SO , SO_2 , SO , SO_3 , SO
15 20		be replaced by D, F, Cl, Br or I, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case be substituted by one or more radicals R ⁶ , an aryloxy or heteroaryloxy group having 5 to 60 aromatic ring atoms, which may be substituted by one or more radicals R ⁶ , or an aralkyl or heteroaralkyl group having 5 to 60 aromatic ring atoms, which may in each case be substituted by one or more radicals R ⁶ , where two or more adjacent substituents R ¹ or R ² or R ³ or R ⁴ may optionally form a mono- or polycyclic, aliphatic ring system, which may be substituted by one or more radicals R ⁶ ;
	R ⁵	is selected on each occurrence, identically or differently, from the group consisting of H, D, F, Cl, Br, I, CN, Si(R ⁶) ₃ , a straight-chain alkyl, alkoxy or thioalkyl group having 1 to 40 C atoms or a branched or cyclic alkyl, alkoxy or thioalkyl group having 3 to 40 C atoms, each of which may be substituted by
25		one or more radicals R^6 , where in each case one or more non-adjacent CH_2 groups may be replaced by $Si(R^6)_2$, $C=NR^6$, $P(=O)(R^6)$, SO , SO_2 , NR^6 , O , S or $CONR^6$ and where one or more H atoms may be replaced by D, F, Cl, Br or I, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case be substituted by one or more radicals R^6 , an aryloxy or heteroaryloxy group having 5 to 60 aromatic ring atoms, which may be substituted by one or more radicals R^6 , or an aralkyl
30		or heteroaralkyl group having 5 to 60 aromatic ring atoms, which may in each case be substituted by one or more radicals R ⁶ , where two or more adjacent substituents R ⁵ may optionally form a mono- or polycyclic, aliphatic ring system, which may be substituted by one or more radicals R ⁶ ;
35	R ⁶	is selected from the group consisting of H, D, F, an aliphatic hydrocarbon radical having 1 to 20 C atoms or an aromatic or heteroaromatic ring system having 5 to 30 C atoms, in which one or more H atoms may be replaced by D or F, where two or more adjacent substituents R^6 may form a mono- or polycyclic, aliphatic ring system with one another;
40	i	is on each occurrence, identically or differently, 0 or 1;
40	m	is 0, 1 or 2;
	n	is on each occurrence, identically or differently, 0, 1, 2, 3 or 4;
45	p, q	are on each occurrence, identically or differently, 0 or 1;
	r, s	are on each occurrence, identically or differently, 0, 1, 2, 3 or 4, where p + r \leq 4 and q + s \leq 4.
50	definitions apply via a group E, a groups Ar ¹ and	tion, the present invention relates to a compound of a formula (1), with the proviso that the following to groups Ar ¹ and Ar ² instead of the definitions above: groups Ar ¹ and Ar ² are connected to each other s defined above, and Ar ² are, identically or differently on each occurrence, an aromatic or heteroaromatic ring system having which may in each case also be substituted by one or more radicals R ⁵ .

6 to 60 C atoms, which may in each case also be substituted by one or more radicals R5.

[0009] An aryl group in the sense of this invention is taken to mean either a simple aromatic ring, i.e. benzene, or a condensed (anellated) aryl group, for example naphthalene or phenanthrene. By contrast, aromatic groups linked to one another by a single bond, such as, for example, biphenyl or fluorene, are not referred to as an aryl group, but instead as an aromatic ring system.

[0010] A heteroaryl group in the sense of the present invention comprises at least one heteroatom in the aromatic

ring, preferably a heteroatom selected from N, O and S. A heteroaryl group may comprise only a simple heteroaromatic ring, such as e. g. pyridine, triazine, or thiophene, or it may be a condensed (annelated) heteroaryl group, such as quinoline or carbazole.

[0011] An aromatic ring system in the sense of this invention contains 6 to 60 C atoms in the ring system, where the aromatic ring system may be built up e.g. from benzene, naphthalene, phenanthrene, fluorene and spirobifluorene or combinations of these groups. An aromatic ring system in the sense of this invention is, in particular, also intended to be taken to mean a system in which, in addition, a plurality of aryl groups is linked to one another directly or via a carbon atom. Thus, for example, systems such as biphenyl, terphenyl, quaterphenyl, fluorene, 9,9'-spirobifluorene, 9,9-diarylfluorene, etc., in particular, are also intended to be taken to be aromatic ring systems in the sense of this invention. The aromatic ring system here by definition contains no amino groups. Triarylamino groups are thus not covered by the definition of an aromatic ring system.

[0012] An analogous definition applies to the term heteroaromatic ring system, which is to be understood to be a combination of two or more interconnected aryl or heteroaryl groups, at least one of them being a heteroaryl group.

[0013] An aralkyl group is to be understood to be an alkyl group which is substituted by an aryl group, where the aryl group is defined as above, and the alkyl group may have 1 to 20 C atoms, and may be substituted as defined above for alkyl groups, and may have one or more CH₂ groups replaced as defined above for alkyl groups. In the aralkyl group, the alkyl group is the group which bonds to the rest of the compound. An analogous definition applies to the term heteroaralkyl group, only that a heteroaryl group is present instead of an aryl group.

[0014] An aryloxy group is to be understood to be an aryl group bonded via a divalent (ether) oxygen atom. An analogous definition applies to the term heteroaryloxy group, only that a heteroaryl group is present instead of an aryl group.

[0015] For the purposes of the present invention, an aliphatic hydrocarbon radical or an alkyl group or an alkenyl or alkynyl group, which may typically contain 1 to 40 or also 1 to 20 C atoms and in which, in addition, individual H atoms or CH₂ groups may be substituted by the above-mentioned groups, is preferably taken to mean the radicals methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, s-butyl, t-butyl, 2-methylbutyl, n-pentyl, s-pentyl, neopentyl, cyclopentyl, n-hexyl, neohexyl, cyclohexyl, n-heptyl, cycloheptyl, n-octyl, cyclooctyl, 2-ethylhexyl, trifluoromethyl, pentafluoroethyl, 2,2,2-trifluoroethyl, ethenyl, propenyl, butenyl, pentenyl, cyclopentenyl, hexenyl, cyclohexenyl, heptenyl, cycloheptenyl, octenyl, cyclooctenyl, ethynyl, propynyl, butynyl, pentynyl, hexynyl, heptynyl or octynyl.

[0016] An alkoxy group having 1 to 40 C atoms is preferably taken to mean methoxy, trifluoromethoxy, ethoxy, n-propoxy, i-propoxy, i-propoxy, i-butoxy, s-butoxy, t-butoxy, n-pentoxy, s-pentoxy, 2-methylbutoxy, n-hexoxy, cyclohexyloxy, n-heptoxy, cycloheptyloxy, n-octyloxy, cyclooctyloxy, 2-ethylhexyloxy, pentafluoroethoxy or 2,2,2-trifluoroethoxy. [0017] A thioalkyl group having 1 to 40 C atoms is taken to mean, in particular, methylthio, ethylthio, n-propylthio, i-propylthio, n-butylthio, i-butylthio, t-butylthio, n-pentylthio, s-pentylthio, n-hexylthio, cyclohexylthio, n-heptylthio, cycloheptylthio, cyclooctylthio, 2-ethylhexylthio, trifluoromethylthio, pentafluoroethylthio, 2,2,2-trifluoroethylthio, ethenylthio, propenylthio, butenylthio, pentenylthio, cyclohexenylthio, hexenylthio, hexenylthio, hexpylthio, hexpylthio,

[0018] In general, alkyl, alkoxy or thioalkyl groups in accordance with the present invention can be straight-chain, branched or cyclic, where one or more non-adjacent CH_2 groups may be replaced by the above-mentioned groups; furthermore, one or more H atoms may also be replaced by D, F, Cl, Br, I, CN or NO_2 , preferably F, Cl or CN, further preferably F or CN, particularly preferably CN.

[0019] In a preferred embodiment of the invention, p + q = 0 or 1. The compound according to the invention thus preferably contains one or two diarylamino groups.

[0020] In a preferred embodiment, m, s, r, and n are identically or differently on each occurrence 0 or 1, more preferably 0. [0021] According to a further preferred embodiment of the invention, not more than one index i in the formula (1) is 1. More preferably, the index i is generally equal to 0. For the case that the index i is 0, it is to be understood that the spirobifluorene and the nitrogen atom are directly connected.

[0022] In a preferred embodiment of the invention, the compound of the formula (1) is selected from the compounds of the following formulae (2) to (10),

55

50

20

30

35

40

5 Ar
$$Ar^2$$
 Ar Ar^2 Ar Ar^3 Ar Ar^4 Ar

$$\begin{bmatrix} R^2 \end{bmatrix}_s$$

$$H$$

$$(Ar^S)_i \qquad N-Ar^1$$

$$R^4 \end{bmatrix}_n$$

$$Ar^2$$

$$\begin{bmatrix} R^2 \end{bmatrix}_s$$

$$Ar^3 \qquad (Ar^S)_i \qquad N-Ar^1$$

$$\begin{bmatrix} R^3 \end{bmatrix}_r$$

formula (8) formula (9)

where the symbols and indices used have the meanings given above.

[0023] For the compounds according to formulae (2) to (10) above, it is preferred that i = 0.

[0024] In a particularly preferred embodiment of the invention, the compounds of the formulae (2) to (10) are selected from the compounds of the following formulae (2a) to (10a),

35
$$Ar^{1} N^{Ar^{2}} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{1} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{A} Ar^{1} N^{1} Ar^{1} N^{A} Ar^{$$

50

5

10

25

30

where the symbols and indices used have the meanings given above.

formula (8a)

[0025] For the compounds according to formulae (2a) to (10a) above, it is preferred that i = 0.

[0026] Very particular preference is given to the compounds of the following formulae (2b) to (10b),

formula (9a)

formula (10a)

55

where the symbols used have the meanings given above.

[0027] In a particularly preferred embodiment of the invention, the compound according to the invention contains only one diarylamino group -NAr¹Ar². This thus preferably relates to compounds of the formulae (2), (5) and (8) or (2a), (5a) and (8a) or (2b), (5b) and (8b).

[0028] In a further preferred embodiment of the invention, the diarylamino groups -NAr¹Ar² are bonded in the 4-position or in the 4- and 4'-position of the spirobifluorene. This thus preferably relates to the compounds of the formulae (2) and (3) or (2a) and (3a) or (2b) and (3b).


[0029] Very particular preference is given to the compounds of the formula (2) or (2a) or (2b).


[0030] In a further preferred embodiment of the invention, Ar^2 is selected, identically or differently, from the group consisting of fluorene, spirobifluorene, biphenyl, terphenyl, quaterphenyl, carbazole, dibenzofuran and dibenzothi-ophene, each of which may be substituted by one or more radicals R^5 .

[0031] The groups Ar^1 and Ar^2 here are preferably selected, identically or differently on each occurrence, from the groups of the following formulae (11) to (66),

55

30

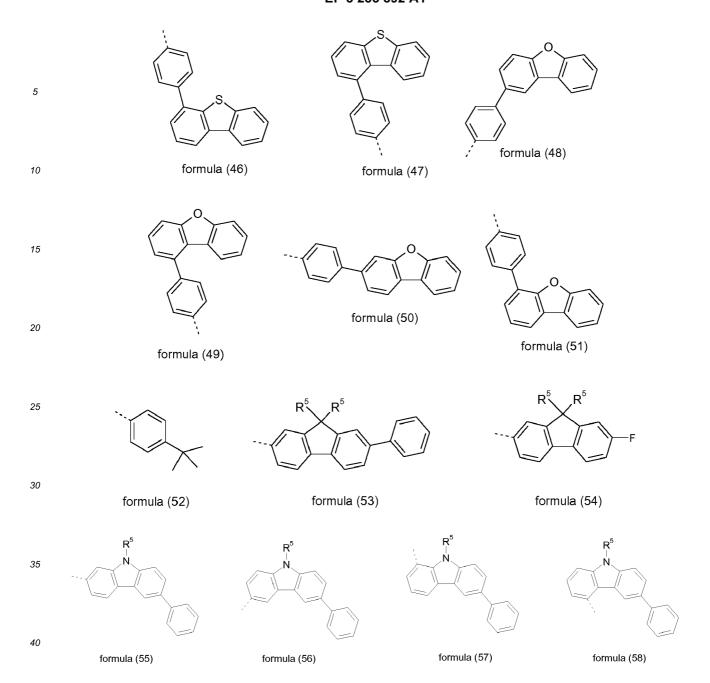

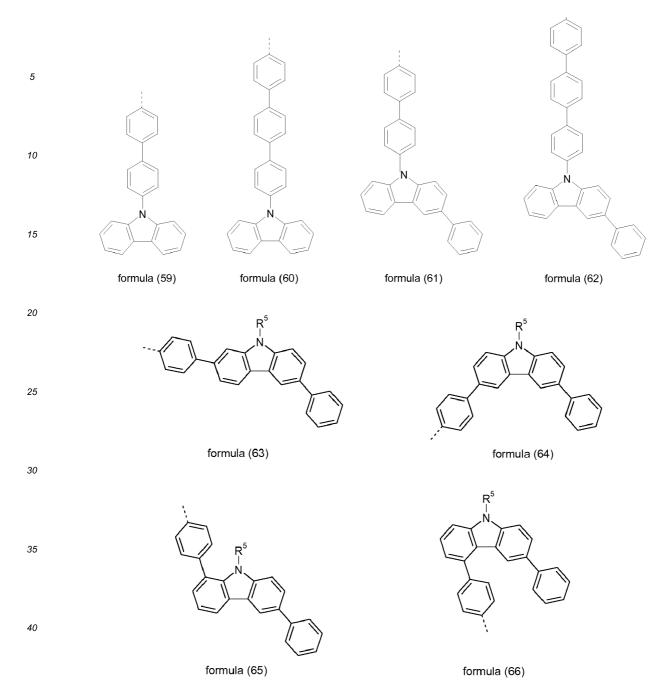

where the dashed bond indicates the bond to the nitrogen, and the groups may be substituted by one or more radicals R⁵, but are preferably unsubstituted.

[0032] R⁵ in the groups of the formulae (20) to (23), (53) and (54) preferably stands, identically or differently, for an alkyl group having 1 to 10 C atoms, in particular for methyl, or a phenyl group, which may be substituted by one or more radicals R⁶.

[0033] Preferred groups Ar¹ and Ar² are selected, identically or differently on each occurrence, from the group consisting of the above-mentioned formulae (11), (13), (16), (20), (28), (29), (33), (34), (35), (37), (38), (39), (40), (44), (48), (49), (51) and (59). All possible combinations of these groups are equally possible here.

[0034] Particularly preferred is that Ar¹ and Ar² are selected, identically or differently on each occurrence, from the group consisting of the above-mentioned formulae (11), (13), (20), (29), (35), (38), (39), (49), (51) and (59).

[0035] Furthermore, R^5 in the groups of the formulae (28) to (31) and (40) to (43) and (55) to (58) and (63) to (66) preferably stands for a phenyl group, an ortho-biphenyl group, a meta-biphenyl group, a para-biphenyl group, a terphenyl group, a 1-naphthyl group, or a 2-naphthyl group which may be substituted by one or more radicals R^6 .

[0036] Preferably, Ar1 and Ar2 are selected, identically or differently on each occurrence, from the groups of the

formulae (11), (20) and (24), which may be substituted by one or more radicals R⁵.

5

10

50

55

[0037] At least one of the groups Ar^1 and Ar^2 is particularly preferably a group of the formula (11) or (20). Very particularly preferably, Ar^1 stands for a group of the formula (11) and Ar^2 stands for a group of the formula (20).

[0038] The two groups Ar¹ and Ar² of the above-mentioned formulae (11) to (66) which are bonded to the nitrogen may be combined with one another as desired.


[0039] In a preferred embodiment of the invention, the groups Ar^1 and Ar^2 are selected differently from one another. [0040] If the groups Ar^1 and Ar^2 in the compounds of the formula (1) and (2) to (10) or the preferred embodiments are linked to one another by a group E, the group -NAr¹Ar² preferably has the structure of one of the following formulae (67) to (74),


where the symbols used have the meanings given above, and the dashed bond indicates the bond to the spirobifluorene. These groups may also be substituted by one or more radicals R⁵, but are preferably unsubstituted.

[0041] R^5 in the group of the formula (68) and (72) preferably stands, identically or differently, for an alkyl group having 1 to 10 C atoms, in particular for methyl, or a phenyl group, which may be substituted by one or more radicals R^6 .

[0042] Furthermore, R^5 in the group of the formula (71) and (73) preferably stands for a phenyl group, which may be substituted by one or more radicals R^6 .

[0043] Preferred substituted embodiments of the formula (13) are the following formulae (13a) to (13f), a preferred embodiment of the formula (16) are the formulae (16a) and (16b), preferred embodiments of the formulae (20) are the following formulae (20a) to (20l), preferred embodiments of the formula (21) are the following formulae (21 a) to (21 g), preferred embodiments of the formula (22) are the following formulae (22a), (22b), (22c) and (22d), and preferred embodiments of the formula (23) are the following formulae (23a), (23b), (23c) and (23d),

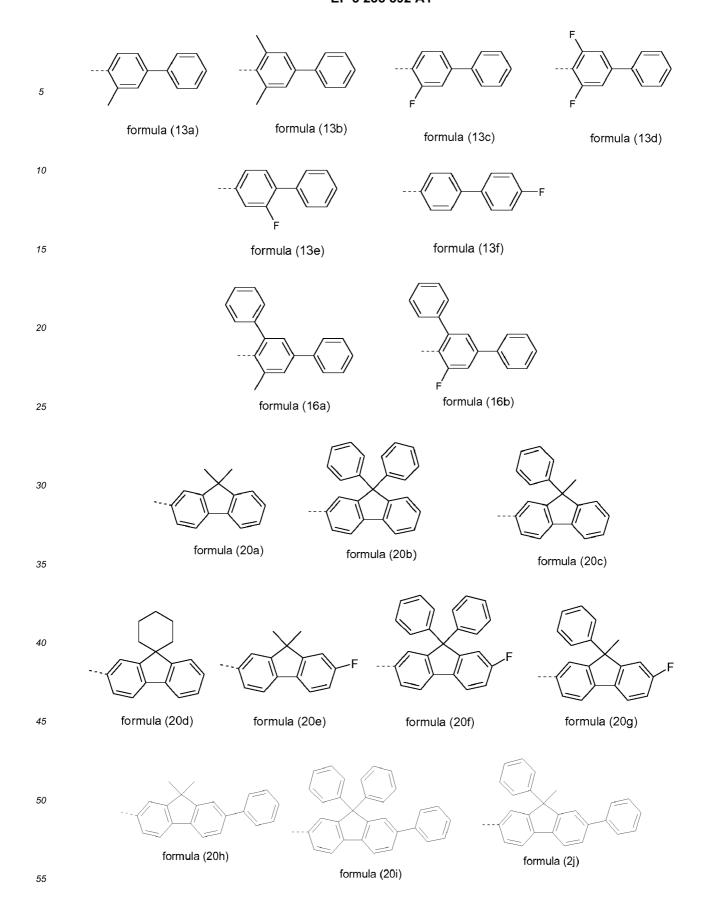

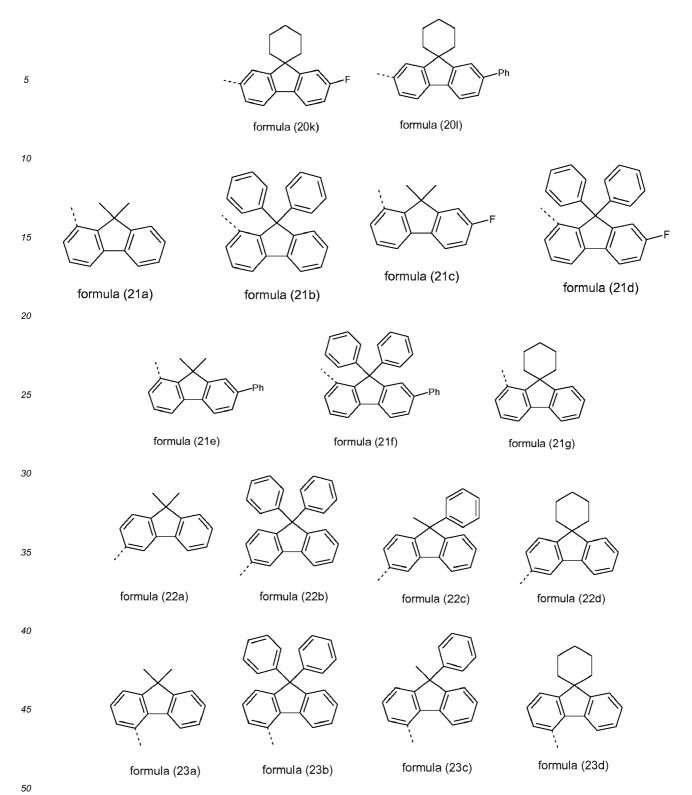

where the dashed bond indicates the bond to the nitrogen.

55

[0044] Group Ar^S is preferably, identically or differently on each occurrence, selected from aromatic or heteroaromatic ring systems having 6 to 18 aromatic ring atoms, which may in each case also be substituted by one or more radicals R⁵.

[0045] Particularly preferable groups Ar^S are selected from the groups of formulae (Ar^S-1) to (Ar^S-15) below:

5

$$R^{S}$$
 Ar^{S-1}
 Ar^{S-2}
 Ar^{S-3}

10

 Ar^{S-4}
 Ar^{S-5}
 Ar^{S-6}
 Ar^{S-6}
 Ar^{S-10}
 Ar^{S-11}
 Ar^{S-12}
 Ar^{S-13}

35

 Ar^{S-14}
 Ar^{S-15}

where the dashed bonds indicates the bonds to the spirobifluorene and to the amine, and where the groups may be substituted at each free position by a group R⁵ but are preferably unsubstituted.

[0046] In a preferred embodiment of the invention, R^1 to R^4 are selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl or alkoxy group having 1 to 10 C atoms or a branched or cyclic alkyl or alkoxy group having 3 to 10 C atoms, each of which may be substituted by one or more radicals R^6 , where one or more non-adjacent CH_2 groups may be replaced by O and where one or more H atoms may be replaced by F, an aromatic or heteroaromatic ring system having 6 to 24 aromatic ring atoms, which may in each case be substituted by one or more radicals R^6 .

50

[0047] In a particularly preferred embodiment of the invention, R¹ to R⁴ are selected on each occurrence, identically or differently, from the group consisting of H, F, a straight-chain alkyl group having 1 to 5 C atoms or a branched or cyclic alkyl group having 3 to 6 C atoms, an aromatic or heteroaromatic ring system having 5 to 18 aromatic ring atoms, which may in each case be substituted by one or more radicals R⁶.

[0048] Most preferably, R¹ to R⁴ are selected, identically or differently, from H, F, phenyl, methyl and tert-butyl.

[0049] R¹ to R⁴ in the compounds of the formulae (1) and (2) to (10) and (2a) to (10a) are very particularly preferably selected, identically or differently on each occurrence, from the group consisting of H, F, methyl, tert-butyl, and phenyl. [0050] In a further preferred embodiment of the invention, the radical R⁵ which is bonded to Ar¹ or Ar² or Ar⁵ is selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl group having 1 to 10 C atoms, a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic or heteroaromatic ring system having 5 to 24 aromatic ring atoms, each of which may be substituted by one or more radicals R⁶.

[0051] In a particularly preferred embodiment of the invention, the radical R^5 which is bonded to Ar^1 or Ar^2 or Ar^S is selected, identically or differently on each occurrence, from the group consisting of H, a straight-chain alkyl group having 1 to 5 C atoms, a branched or cyclic alkyl group having 3 to 6 C atoms or an aromatic or heteroaromatic ring system having 5 to 24 aromatic ring atoms, each of which may be substituted by one or more radicals R^6 .

[0052] The radicals R^1 to R^6 here preferably contain no condensed aryl or heteroaryl groups in which more than two aromatic or heteroaromatic six-membered rings are condensed directly onto one another, i.e., for example, no anthracene or pyrene groups. The radicals R^1 to R^6 particularly preferably contain absolutely no condensed aryl or heteroaryl groups in which aromatic or heteroaromatic six-membered rings are condensed directly onto one another, i.e. also, for example, no naphthalene groups.

[0053] It may furthermore be preferred for the two substituents R⁵ in the 9-position of a fluorene together to form a cycloalkyl ring, preferably having 3 to 8 C atoms, particularly preferably having 5 or 6 C atoms.

[0054] Likewise, the two substituents R⁵ in formula (68) and (72) may form a ring system with one another and thus form a spiro system, for example a cycloalkyl ring, preferably having 3 to 8 C atoms, particularly preferably having 5 or 6 C atoms.

[0055] For compounds which are processed by vacuum evaporation, the alkyl groups preferably have not more than four C atoms, particularly preferably not more than 1 C atom. For compounds which are processed from solution, suitable compounds are also those which are substituted by linear, branched or cyclic alkyl groups having up to 10 C atoms or which are substituted by oligoarylene groups, for example ortho-, meta-, para- or branched terphenyl or quaterphenyl groups.

[0056] In a preferred embodiment of the invention, R⁶ is selected, identically or differently on each occurrence, from the group consisting of H, a straight-chain alkyl group having 1 to 10 C atoms or a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic ring system having 6 to 24 C atoms. R⁶ is particularly preferably, identically or differently on each occurrence, H or a methyl group, very particularly preferably H.

[0057] Particular preference is given to compounds of the formulae (1) and (2) to (10) and (2a) to (10a) and (2b) to (10b), in which the preferred embodiments mentioned above occur simultaneously. Particular preference is therefore given to compounds for which:

Ar¹, Ar² are, identically or differently, a group of one of the formulae (11) to (66); or -NAr¹Ar² stands for a group of one of the formulae (67) to (74);

10

15

20

30

 R^5

 R^6

50

55

E is on each occurrence, identically or differently, a single bond or C(R¹)₂, N(R¹), O or S;

40 R¹ to R⁴ are selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl or alkoxy group having 1 to 10 C atoms or a branched or cyclic alkyl or alkoxy group having 3 to 10 C atoms, each of which may be substituted by one or more radicals R⁶, where one or more non-adjacent CH₂ groups may be replaced by O and where one or more H atoms may be replaced by F, an aromatic or heteroaromatic ring system having 6 to 24 aromatic ring atoms, which may in each case be substituted by one or more radicals R⁶;

is, if the radical R^5 is bonded to Ar^1 or Ar^2 or Ar^S , selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl group having 1 to 10 C atoms, a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic or heteroaromatic ring system having 5 to 24 aromatic ring atoms, each of which may be substituted by one or more radicals R^6 ; or R^5 which is bonded to the carbon bridge in the formulae (20) to (23), (53), (54), (68) and (72) is, identically or differently, an alkyl group having 1 to 10 C atoms, in particular methyl, or a phenyl group, which may be substituted by one or more radicals R^6 ; or R^5 which is bonded to the nitrogen bridge in the formulae (28) to (31), (40) to (43) or (55) to (58), (63) to (66), (71) and (73) is a phenyl group, which may be substituted by one or more radicals R^6 ;

is selected on each occurrence, identically or differently, from the group consisting of H, a straight-chain alkyl group having 1 to 10 C atoms or a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic

ring system having 6 to 24 C atoms;

i is 0;

5 m is 0 or 1, preferably 0;

n is 0 or 1;

p + q is 0 or 1;

r is 0 or 1;

s is 0 or 1.

[0058] Examples for preferred structures for compounds according to formula (1) are listed in the following. The compounds are based on the basic structures of formulae (2a), (5a) and (8a).

20

10

25

30

35

40

45

50

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(2a-1-1)	(2a)	0	(11)	(11)
(2a-1-2)	(2a)	0	(11)	(13)
(2a-1-3)	(2a)	0	(11)	(20)
(2a-1-4)	(2a)	0	(11)	(29)
(2a-1-5)	(2a)	0	(11)	(35)
(2a-1-6)	(2a)	0	(11)	(38)
(2a-1-7)	(2a)	0	(11)	(39)
(2a-1-8)	(2a)	0	(11)	(49)
(2a-1-9)	(2a)	0	(11)	(51)
(2a-1-10)	(2a)	0	(11)	(59)
(2a-1-11)	(2a)	0	(13)	(13)
(2a-1-12)	(2a)	0	(13)	(20)
(2a-1-13)	(2a)	0	(13)	(29)
(2a-1-14)	(2a)	0	(13)	(35)
(2a-1-15)	(2a)	0	(13)	(38)
(2a-1-16)	(2a)	0	(13)	(39)
(2a-1-17)	(2a)	0	(13)	(49)
(2a-1-18)	(2a)	0	(13)	(51)
(2a-1-19)	(2a)	0	(13)	(59)
(2a-1-20)	(2a)	0	(20)	(20)
(2a-1-21)	(2a)	0	(20)	(29)
(2a-1-22)	(2a)	0	(20)	(35)
(2a-1-23)	(2a)	0	(20)	(38)
(2a-1-24)	(2a)	0	(20)	(39)
(2a-1-25)	(2a)	0	(20)	(49)
(2a-1-26)	(2a)	0	(20)	(51)
(2a-1-27)	(2a)	0	(20)	(59)

(continued)

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(2a-1-28)	(2a)	0	(29)	(29)
(2a-1-29)	(2a)	0	(29)	(35)
(2a-1-30)	(2a)	0	(29)	(38)
(2a-1-31)	(2a)	0	(29)	(39)
(2a-1-32)	(2a)	0	(29)	(49)
(2a-1-33)	(2a)	0	(29)	(51)
(2a-1-34)	(2a)	0	(29)	(59)
(2a-1-35)	(2a)	0	(35)	(35)
(2a-1-36)	(2a)	0	(35)	(38)
(2a-1-37)	(2a)	0	(35)	(39)
(2a-1-38)	(2a)	0	(35)	(49)
(2a-1-39)	(2a)	0	(35)	(51)
(2a-1-40)	(2a)	0	(35)	(59)
(2a-1-41)	(2a)	0	(38)	(38)
(2a-1-42)	(2a)	0	(38)	(39)
(2a-1-43)	(2a)	0	(38)	(49)
(2a-1-44)	(2a)	0	(38)	(51)
(2a-1-45)	(2a)	0	(38)	(59)
(2a-1-46)	(2a)	0	(39)	(39)
(2a-1-47)	(2a)	0	(39)	(49)
(2a-1-48)	(2a)	0	(39)	(51)
(2a-1-49)	(2a)	0	(39)	(59)
(2a-1-50)	(2a)	0	(49)	(49)
(2a-1-51)	(2a)	0	(49)	(51)
(2a-1-52)	(2a)	0	(49)	(59)
(2a-1-53)	(2a)	0	(51)	(51)
(2a-1-54)	(2a)	0	(51)	(59)
(2a-1-55)	(2a)	0	(59)	(59)
(2a-2-1)	(2a)	1	(11)	(11)
(2a-2-2)	(2a)	1	(11)	(13)
(2a-2-3)	(2a)	1	(11)	(20)
(2a-2-4)	(2a)	1	(11)	(29)
(2a-2-5)	(2a)	1	(11)	(35)
(2a-2-6)	(2a)	1	(11)	(38)
(2a-2-7)	(2a)	1	(11)	(39)
(2a-2-8)	(2a)	1	(11)	(49)
(2a-2-9)	(2a)	1	(11)	(51)
(2a-2-10)	(2a)	1	(11)	(59)

(continued)

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(2a-2-11)	(2a)	1	(13)	(13)
(2a-2-12)	(2a)	1	(13)	(20)
(2a-2-13)	(2a)	1	(13)	(29)
(2a-2-14)	(2a)	1	(13)	(35)
(2a-2-15)	(2a)	1	(13)	(38)
(2a-2-16)	(2a)	1	(13)	(39)
(2a-2-17)	(2a)	1	(13)	(49)
(2a-2-18)	(2a)	1	(13)	(51)
(2a-2-19)	(2a)	1	(13)	(59)
(2a-2-20)	(2a)	1	(20)	(20)
(2a-2-21)	(2a)	1	(20)	(29)
(2a-2-22)	(2a)	1	(20)	(35)
(2a-2-23)	(2a)	1	(20)	(38)
(2a-2-24)	(2a)	1	(20)	(39)
(2a-2-25)	(2a)	1	(20)	(49)
(2a-2-26)	(2a)	1	(20)	(51)
(2a-2-27)	(2a)	1	(20)	(59)
(2a-2-28)	(2a)	1	(29)	(29)
(2a-2-29)	(2a)	1	(29)	(35)
(2a-2-30)	(2a)	1	(29)	(38)
(2a-2-31)	(2a)	1	(29)	(39)
(2a-2-32)	(2a)	1	(29)	(49)
(2a-2-33)	(2a)	1	(29)	(51)
(2a-2-34)	(2a)	1	(29)	(59)
(2a-2-35)	(2a)	1	(35)	(35)
(2a-2-36)	(2a)	1	(35)	(38)
(2a-2-37)	(2a)	1	(35)	(39)
(2a-2-38)	(2a)	1	(35)	(49)
(2a-2-39)	(2a)	1	(35)	(51)
(2a-2-40)	(2a)	1	(35)	(59)
(2a-2-41)	(2a)	1	(38)	(38)
(2a-2-42)	(2a)	1	(38)	(39)
(2a-2-43)	(2a)	1	(38)	(49)
(2a-2-44)	(2a)	1	(38)	(51)
(2a-2-45)	(2a)	1	(38)	(59)
(2a-2-46)	(2a)	1	(39)	(39)
(2a-2-47)	(2a)	1	(39)	(49)
(2a-2-48)	(2a)	1	(39)	(51)

(continued)

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(2a-2-49)	(2a)	1	(39)	(59)
(2a-2-50)	(2a)	1	(49)	(49)
(2a-2-51)	(2a)	1	(49)	(51)
(2a-2-52)	(2a)	1	(49)	(59)
(2a-2-53)	(2a)	1	(51)	(51)
(2a-2-54)	(2a)	1	(51)	(59)
(2a-2-55)	(2a)	1	(59)	(59)
(5a-1-1)	(5a)	0	(11)	(11)
(5a-1-2)	(5a)	0	(11)	(13)
(5a-1-3)	(5a)	0	(11)	(20)
(5a-1-4)	(5a)	0	(11)	(29)
(5a-1-5)	(5a)	0	(11)	(35)
(5a-1-6)	(5a)	0	(11)	(38)
(5a-1-7)	(5a)	0	(11)	(39)
(5a-1-8)	(5a)	0	(11)	(49)
(5a-1-9)	(5a)	0	(11)	(51)
(5a-1-10)	(5a)	0	(11)	(59)
(5a-1-11)	(5a)	0	(13)	(13)
(5a-1-12)	(5a)	0	(13)	(20)
(5a-1-13)	(5a)	0	(13)	(29)
(5a-1-14)	(5a)	0	(13)	(35)
(5a-1-15)	(5a)	0	(13)	(38)
(5a-1-16)	(5a)	0	(13)	(39)
(5a-1-17)	(5a)	0	(13)	(49)
(5a-1-18)	(5a)	0	(13)	(51)
(5a-1-19)	(5a)	0	(13)	(59)
(5a-1-20)	(5a)	0	(20)	(20)
(5a-1-21)	(5a)	0	(20)	(29)
(5a-1-22)	(5a)	0	(20)	(35)
(5a-1-23)	(5a)	0	(20)	(38)
(5a-1-24)	(5a)	0	(20)	(39)
(5a-1-25)	(5a)	0	(20)	(49)
(5a-1-26)	(5a)	0	(20)	(51)
(5a-1-27)	(5a)	0	(20)	(59)
(5a-1-28)	(5a)	0	(29)	(29)
(5a-1-29)	(5a)	0	(29)	(35)
(5a-1-30)	(5a)	0	(29)	(38)
(5a-1-31)	(5a)	0	(29)	(39)

(continued)

Formula	basic structure of formula	j =	Ar ¹ of formula	Ar ² of formula
(5a-1-32)	(5a)	0	(29)	(49)
(5a-1-33)	(5a)	0	(29)	(51)
(5a-1-34)	(5a)	0	(29)	(59)
(5a-1-35)	(5a)	0	(35)	(35)
(5a-1-36)	(5a)	0	(35)	(38)
(5a-1-37)	(5a)	0	(35)	(39)
(5a-1-38)	(5a)	0	(35)	(49)
(5a-1-39)	(5a)	0	(35)	(51)
(5a-1-40)	(5a)	0	(35)	(59)
(5a-1-41)	(5a)	0	(38)	(38)
(5a-1-42)	(5a)	0	(38)	(39)
(5a-1-43)	(5a)	0	(38)	(49)
(5a-1-44)	(5a)	0	(38)	(51)
(5a-1-45)	(5a)	0	(38)	(59)
(5a-1-46)	(5a)	0	(39)	(39)
(5a-1-47)	(5a)	0	(39)	(49)
(5a-1-48)	(5a)	0	(39)	(51)
(5a-1-49)	(5a)	0	(39)	(59)
(5a-1-50)	(5a)	0	(49)	(49)
(5a-1-51)	(5a)	0	(49)	(51)
(5a-1-52)	(5a)	0	(49)	(59)
(5a-1-53)	(5a)	0	(51)	(51)
(5a-1-54)	(5a)	0	(51)	(59)
(5a-1-55)	(5a)	0	(59)	(59)
(5a-2-1)	(5a)	1	(11)	(11)
(5a-2-2)	(5a)	1	(11)	(13)
(5a-2-3)	(5a)	1	(11)	(20)
(5a-2-4)	(5a)	1	(11)	(29)
(5a-2-5)	(5a)	1	(11)	(35)
(5a-2-6)	(5a)	1	(11)	(38)
(5a-2-7)	(5a)	1	(11)	(39)
(5a-2-8)	(5a)	1	(11)	(49)
(5a-2-9)	(5a)	1	(11)	(51)
(5a-2-10)	(5a)	1	(11)	(59)
(5a-2-11)	(5a)	1	(13)	(13)
(5a-2-12)	(5a)	1	(13)	(20)
(5a-2-13)	(5a)	1	(13)	(29)
(5a-2-14)	(5a)	1	(13)	(35)

(continued)

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(5a-2-15)	(5a)	1	(13)	(38)
(5a-2-16)	(5a)	1	(13)	(39)
(5a-2-17)	(5a)	1	(13)	(49)
(5a-2-18)	(5a)	1	(13)	(51)
(5a-2-19)	(5a)	1	(13)	(59)
(5a-2-20)	(5a)	1	(20)	(20)
(5a-2-21)	(5a)	1	(20)	(29)
(5a-2-22)	(5a)	1	(20)	(35)
(5a-2-23)	(5a)	1	(20)	(38)
(5a-2-24)	(5a)	1	(20)	(39)
(5a-2-25)	(5a)	1	(20)	(49)
(5a-2-26)	(5a)	1	(20)	(51)
(5a-2-27)	(5a)	1	(20)	(59)
(5a-2-28)	(5a)	1	(29)	(29)
(5a-2-29)	(5a)	1	(29)	(35)
(5a-2-30)	(5a)	1	(29)	(38)
(5a-2-31)	(5a)	1	(29)	(39)
(5a-2-32)	(5a)	1	(29)	(49)
(5a-2-33)	(5a)	1	(29)	(51)
(5a-2-34)	(5a)	1	(29)	(59)
(5a-2-35)	(5a)	1	(35)	(35)
(5a-2-36)	(5a)	1	(35)	(38)
(5a-2-37)	(5a)	1	(35)	(39)
(5a-2-38)	(5a)	1	(35)	(49)
(5a-2-39)	(5a)	1	(35)	(51)
(5a-2-40)	(5a)	1	(35)	(59)
(5a-2-41)	(5a)	1	(38)	(38)
(5a-2-42)	(5a)	1	(38)	(39)
(5a-2-43)	(5a)	1	(38)	(49)
(5a-2-44)	(5a)	1	(38)	(51)
(5a-2-45)	(5a)	1	(38)	(59)
(5a-2-46)	(5a)	1	(39)	(39)
(5a-2-47)	(5a)	1	(39)	(49)
(5a-2-48)	(5a)	1	(39)	(51)
(5a-2-49)	(5a)	1	(39)	(59)
(5a-2-50)	(5a)	1	(49)	(49)
(5a-2-51)	(5a)	1	(49)	(51)
(5a-2-52)	(5a)	1	(49)	(59)

(continued)

Fo	ormula	basic structure of formula	j =	Ar ¹ of formula	Ar ² of formula
(5a	a-2-53)	(5a)	1	(51)	(51)
(5a	a-2-54)	(5a)	1	(51)	(59)
(5a	a-2-55)	(5a)	1	(59)	(59)
(8a	a-1-1)	(8a)	0	(11)	(11)
(8a	a-1-2)	(8a)	0	(11)	(13)
(8a	a-1-3)	(8a)	0	(11)	(20)
(8a	a-1-4)	(8a)	0	(11)	(29)
(8a	a-1-5)	(8a)	0	(11)	(35)
(8a	a-1-6)	(8a)	0	(11)	(38)
(8:	a-1-7)	(8a)	0	(11)	(39)
(8a	a-1-8)	(8a)	0	(11)	(49)
(8a	a-1-9)	(8a)	0	(11)	(51)
(8a	a-1-10)	(8a)	0	(11)	(59)
(8a	a-1-11)	(8a)	0	(13)	(13)
(8a	a-1-12)	(8a)	0	(13)	(20)
(8a	a-1-13)	(8a)	0	(13)	(29)
(8a	a-1-14)	(8a)	0	(13)	(35)
(8a	a-1-15)	(8a)	0	(13)	(38)
(8a	a-1-16)	(8a)	0	(13)	(39)
(8a	a-1-17)	(8a)	0	(13)	(49)
(8a	a-1-18)	(8a)	0	(13)	(51)
(8a	a-1-19)	(8a)	0	(13)	(59)
(8:	a-1-20)	(8a)	0	(20)	(20)
(8a	a-1-21)	(8a)	0	(20)	(29)
(8a	a-1-22)	(8a)	0	(20)	(35)
(8a	a-1-23)	(8a)	0	(20)	(38)
(8a	a-1-24)	(8a)	0	(20)	(39)
(8a	a-1-25)	(8a)	0	(20)	(49)
(8:	a-1-26)	(8a)	0	(20)	(51)
(8:	a-1-27)	(8a)	0	(20)	(59)
(8:	a-1-28)	(8a)	0	(29)	(29)
(8a	a-1-29)	(8a)	0	(29)	(35)
(8a	a-1-30)	(8a)	0	(29)	(38)
(8:	a-1-31)	(8a)	0	(29)	(39)
(8:	a-1-32)	(8a)	0	(29)	(49)
(8:	a-1-33)	(8a)	0	(29)	(51)
(8:	a-1-34)	(8a)	0	(29)	(59)
(8a	a-1-35)	(8a)	0	(35)	(35)

(continued)

Formula	basic structure of formula	i =	Ar ¹ of formula	Ar ² of formula
(8a-1-36)	(8a)	0	(35)	(38)
(8a-1-37)	(8a)	0	(35)	(39)
(8a-1-38)	(8a)	0	(35)	(49)
(8a-1-39)	(8a)	0	(35)	(51)
(8a-1-40)	(8a)	0	(35)	(59)
(8a-1-41)	(8a)	0	(38)	(38)
(8a-1-42)	(8a)	0	(38)	(39)
(8a-1-43)	(8a)	0	(38)	(49)
(8a-1-44)	(8a)	0	(38)	(51)
(8a-1-45)	(8a)	0	(38)	(59)
(8a-1-46)	(8a)	0	(39)	(39)
(8a-1-47)	(8a)	0	(39)	(49)
(8a-1-48)	(8a)	0	(39)	(51)
(8a-1-49)	(8a)	0	(39)	(59)
(8a-1-50)	(8a)	0	(49)	(49)
(8a-1-51)	(8a)	0	(49)	(51)
(8a-1-52)	(8a)	0	(49)	(59)
(8a-1-53)	(8a)	0	(51)	(51)
(8a-1-54)	(8a)	0	(51)	(59)
(8a-1-55)	(8a)	0	(59)	(59)
(8a-2-1)	(8a)	1	(11)	(11)
(8a-2-2)	(8a)	1	(11)	(13)
(8a-2-3)	(8a)	1	(11)	(20)
(8a-2-4)	(8a)	1	(11)	(29)
(8a-2-5)	(8a)	1	(11)	(35)
(8a-2-6)	(8a)	1	(11)	(38)
(8a-2-7)	(8a)	1	(11)	(39)
(8a-2-8)	(8a)	1	(11)	(49)
(8a-2-9)	(8a)	1	(11)	(51)
(8a-2-10)	(8a)	1	(11)	(59)
(8a-2-11)	(8a)	1	(13)	(13)
(8a-2-12)	(8a)	1	(13)	(20)
(8a-2-13)	(8a)	1	(13)	(29)
(8a-2-14)	(8a)	1	(13)	(35)
(8a-2-15)	(8a)	1	(13)	(38)
(8a-2-16)	(8a)	1	(13)	(39)
(8a-2-17)	(8a)	1	(13)	(49)
(8a-2-18)	(8a)	1	(13)	(51)

(continued)

	Formula	basic structure of formula	j =	Ar ¹ of formula	Ar ² of formula
5	(8a-2-19)	(8a)	1	(13)	(59)
	(8a-2-20)	(8a)	1	(20)	(20)
	(8a-2-21)	(8a)	1	(20)	(29)
	(8a-2-22)	(8a)	1	(20)	(35)
10	(8a-2-23)	(8a)	1	(20)	(38)
	(8a-2-24)	(8a)	1	(20)	(39)
	(8a-2-25)	(8a)	1	(20)	(49)
15	(8a-2-26)	(8a)	1	(20)	(51)
	(8a-2-27)	(8a)	1	(20)	(59)
	(8a-2-28)	(8a)	1	(29)	(29)
	(8a-2-29)	(8a)	1	(29)	(35)
20	(8a-2-30)	(8a)	1	(29)	(38)
	(8a-2-31)	(8a)	1	(29)	(39)
	(8a-2-32)	(8a)	1	(29)	(49)
25	(8a-2-33)	(8a)	1	(29)	(51)
	(8a-2-34)	(8a)	1	(29)	(59)
	(8a-2-35)	(8a)	1	(35)	(35)
	(8a-2-36)	(8a)	1	(35)	(38)
30	(8a-2-37)	(8a)	1	(35)	(39)
	(8a-2-38)	(8a)	1	(35)	(49)
	(8a-2-39)	(8a)	1	(35)	(51)
35	(8a-2-40)	(8a)	1	(35)	(59)
	(8a-2-41)	(8a)	1	(38)	(38)
	(8a-2-42)	(8a)	1	(38)	(39)
	(8a-2-43)	(8a)	1	(38)	(49)
40	(8a-2-44)	(8a)	1	(38)	(51)
	(8a-2-45)	(8a)	1	(38)	(59)
	(8a-2-46)	(8a)	1	(39)	(39)
45	(8a-2-47)	(8a)	1	(39)	(49)
	(8a-2-48)	(8a)	1	(39)	(51)
	(8a-2-49)	(8a)	1	(39)	(59)
	(8a-2-50)	(8a)	1	(49)	(49)
50	(8a-2-51)	(8a)	1	(49)	(51)
	(8a-2-52)	(8a)	1	(49)	(59)
	(8a-2-53)	(8a)	1	(51)	(51)
55	(8a-2-54)	(8a)	1	(51)	(59)
	(8a-2-55)	(8a)	1	(59)	(59)

[0059] The compounds of the list above have preferably as Ar^s and R^1 to R^4 the preferred embodiments of these groups which have been described above. More preferably, in the compounds listed above, Ar^s is selected from groups Ar^s -1 to Ar^s -15, as defined above. More preferably, in the compounds listed above, R^1 to R^4 is selected, identically or differently, from H, F, phenyl, methyl and tert-butyl.

[0060] Examples of suitable compounds according to the invention are the compounds shown in the following table:

10		**************************************	
20	N N		
30			


5		
10		
20		
25		N N
30 35		
40		
45		
50		

5	N N N N N N N N N N N N N N N N N N N		
15	N N N N N N N N N N N N N N N N N N N		
20			
25			
30			
35			N-C
40			
45	0		
50	Z	N N N N N N N N N N N N N N N N N N N	N N N N N N N N N N N N N N N N N N N
55		~	

5		s N	s
10			
15	Z		
20		N Ph Ph	N N N N N N N N N N N N N N N N N N N
25	s		N N
30	N		N N N N N N N N N N N N N N N N N N N
35			
40		N Ph Ph	
45			

			N N
5 10			N Ph Ph
15	N N		
20			
25			
35	S N	S N	S N
40 45			N

	S S	S S S S S S S S S S S S S S S S S S S
N Ph Ph	s N	s N
		N N
Ph	Ph /	Ph.
Ph N	Ph N	Ph
	Ph Ph	Ph P

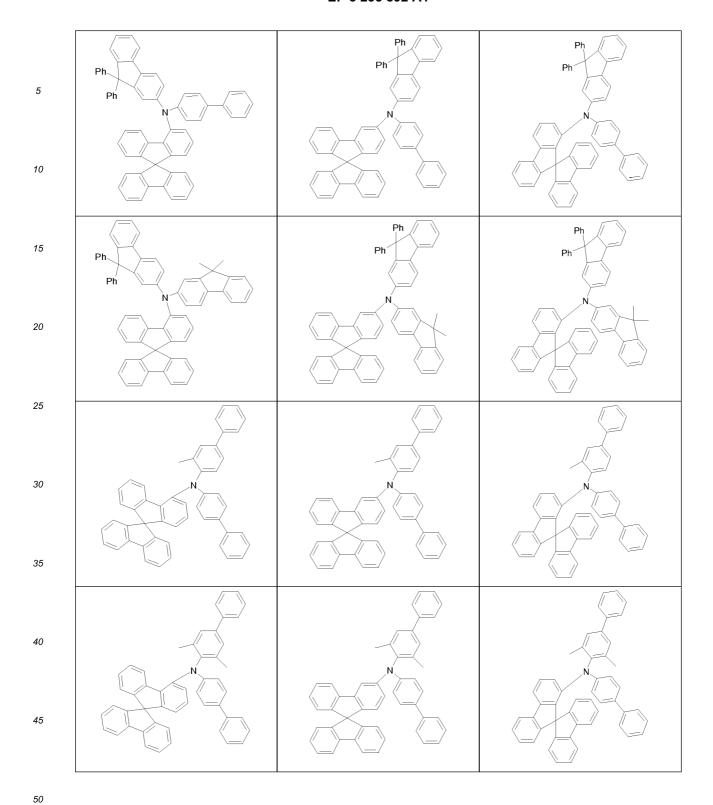

5		
10		N N N N N N N N N N N N N N N N N N N
15		
20	N N	N N
25		
<i>30</i>		N N
40 45		N N
40		
50	N N N N N N N N N N N N N N N N N N N	
55		

5			
15			
20	N N N N N N N N N N N N N N N N N N N	N N N N N N N N N N N N N N N N N N N	N
25			
30	N		
35			
40			S N
45			

5			
10		N. N	
15			
20			
25	O N		
30		N N N N N N N N N N N N N N N N N N N	
35			
40			
45			

5	S	s N	
10			
15	S	S	s
20			
25	N N N N N N N N N N N N N N N N N N N		
30			
35			
40		N T T T T T T T T T T T T T T T T T T T	
45			
50 55			

5		
15		
25		
35	N	No.
45		N N N N N N N N N N N N N N N N N N N

5			N N
15			
20	N N	N N N N N N N N N N N N N N N N N N N	N N
25			
30	N O O		N O N
35			
40	N S		s N

5		2	N N N N N N N N N N N N N N N N N N N
15			
20			
25			
30	N.		
35	N N N N N N N N N N N N N N N N N N N	NOO	
40			
45	N-		
50	N-O-O		
55			

5	A A A A A A A A A A A A A A A A A A A		
10			N
20		Z C	
25 30		Ph Ph N	
35		N F	N F
40	F	F	F
45 50	CH ₃	CH ₃	F F

5	Ph Ph	Ph	H ₃ C CH ₃
15	N N t-Bu	N t-Bu	H ₃ C CH ₃
25 30	But-N Ph	Ph	t-Bu
35 40	N t-Bu		

[0061] The compounds according to the invention can be prepared by synthetic steps known to the person skilled in the art, such as, for example, bromination, Ullmann arylation, Hartwig-Buchwald coupling, etc.

[0062] The syntheses generally start from the 1-, 3- or 4-halogenated, in particular brominated, spirobifluorene derivatives, followed by a C-N coupling reaction, for example a Hartwig-Buchwald coupling or an Ullmann coupling, for introduction of the diarylamino group. Analogously, another suitable leaving group, for example tosylate or triflate, can be used instead of the halogen. The synthesis of 1-diarylaminospirobifluorene is shown in Scheme 1, where two different access routes to the brominated starting compound are shown.

55

45

Scheme 1:

5

10

15

40

50

55

a) Classical spiro synthesis:

b) Directional lithiation of fluorenol:

[0063] Analogously to the classical spiro synthesis shown above, the corresponding spirobifluorene derivatives which are halogenated in the 3- or 4-position can be synthesised by employing the corresponding 3- or 4-halogen-substituted fluorenone as starting material. Likewise, corresponding substituted structures can also be synthesised entirely analogously.

[0064] In a modification of the process shown in Scheme 1a, it is likewise possible to perform the Buchwald coupling in a first step on the fluorenone, and then perform the addition of the metalated biphenyl and the ring closure to the spirobifluorene afterwards. For further details, such synthesis process is shown in the working examples.

[0065] Spirobifluorene-carbazole compounds can be synthesized by Buchwald coupling of a carbazole with a halogen-substituted spirobifluorene, as shown in the working examples.

[0066] The present invention therefore furthermore relates to a process for the preparation of a compound of the formula (1), characterised in that the diarylamino group is introduced by a C-N coupling reaction between a 1- or 3- or 4-halogenated spirobifluorene and a diarylamine.

[0067] The compounds according to the invention described above, in particular compounds which are substituted by reactive leaving groups, such as bromine, iodine, boronic acid or boronic acid ester, can be used as monomers for the preparation of corresponding oligomers, dendrimers or polymers. The oligomerisation or polymerisation here is preferably carried out via the halogen functionality or the boronic acid functionality.

[0068] The invention therefore furthermore relates to oligomers, polymers or dendrimers comprising one or more compounds of the formula (1), where the bond(s) to the polymer, oligomer or dendrimer may be localised at any desired positions in formula (1) substituted by R¹ to R⁵. Depending on the linking of the compound of the formula (1), the compound is part of a side chain of the oligomer or polymer or part of the main chain. An oligomer in the sense of this invention is taken to mean a compound which is built up from at least three monomer units. A polymer in the sense of the invention is taken to mean a compound which is built up from at least ten monomer units. The polymers, oligomers or dendrimers according to the invention may be conjugated, partially conjugated or non-conjugated. The oligomers or polymers according to the invention may be linear, branched or dendritic. In the structures linked in a linear manner, the

units of the formula (1) may be linked directly to one another or linked to one another via a divalent group, for example via a substituted or unsubstituted alkylene group, via a heteroatom or via a divalent aromatic or heteroaromatic group. In branched and dendritic structures, three or more units of the formula (1) may, for example, be linked via a trivalent or polyvalent group, for example via a trivalent or polyvalent aromatic or heteroaromatic group, to give a branched or dendritic oligomer or polymer. The same preferences as described above for compounds of the formula (1) apply to the recurring units of the formula (1) in oligomers, dendrimers and polymers.

[0069] For the preparation of the oligomers or polymers, the monomers according to the invention are homopolymerised or copolymerised with further monomers. Suitable and preferred comonomers are selected from fluorenes (for example in accordance with EP 842208 or WO 00/22026), spirobifluorenes (for example in accordance with EP 707020, EP 894107 or WO 06/061181), para-phenylenes (for example in accordance with WO 92/18552), carbazoles (for example in accordance with WO 04/070772 or WO 04/113468), thiophenes (for example in accordance with EP 1028136), dihydrophenanthrenes (for example in accordance with WO 05/014689 or WO 07/006383), cis- and trans-indenofluorenes (for example in accordance with WO 04/041901 or WO 04/113412), ketones (for example in accordance with WO 05/040302), phenanthrenes (for example in accordance with WO 05/104264 or WO 07/017066) or also a plurality of these units. The polymers, oligomers and dendrimers usually also contain further units, for example emitting (fluorescent or phosphorescent) units, such as, for example, vinyltriarylamines (for example in accordance with WO 07/068325) or phosphorescent metal complexes (for example in accordance with WO 06/003000), and/or charge-transport units, in particular those based on triarylamines.

[0070] The polymers, oligomers and dendrimers according to the invention have advantageous properties, in particular long lifetimes, high efficiencies and good colour coordinates.

[0071] The polymers and oligomers according to the invention are generally prepared by polymerisation of one or more types of monomer, at least one monomer of which results in recurring units of the formula (1) in the polymer. Suitable polymerisation reactions are known to the person skilled in the art and are described in the literature. Particularly suitable and preferred polymerisation reactions which result in C-C or C-N links are the following:

(A) SUZUKI polymerisation;

- (B) YAMAMOTO polymerisation;
- (C) STILLE polymerisation; and
- (D) HARTWIG-BUCHWALD polymerisation.

[0072] The way in which the polymerisation can be carried out by these methods and the way in which the polymers can then be separated off from the reaction medium and purified is known to the person skilled in the art and is described in detail in the literature, for example in WO 2003/048225, WO 2004/037887 and WO 2004/037887.

[0073] The present invention thus also relates to a process for the preparation of the polymers, oligomers and dendrimers according to the invention, which is characterised in that they are prepared by SUZUKI polymerisation, YAMAMO-TO polymerisation, STILLE polymerisation or HARTWIG-BUCHWALD polymerisation. The dendrimers according to the invention can be prepared by processes known to the person skilled in the art or analogously thereto. Suitable processes are described in the literature, such as, for example, in Frechet, Jean M. J.; Hawker, Craig J., "Hyperbranched polyphenylene and hyperbranched polyesters: new soluble, three-dimensional, reactive polymers", Reactive & Functional Polymers (1995), 26(1-3), 127-36; Janssen, H. M.; Meijer, E. W., "The synthesis and characterization of dendritic molecules", Materials Science and Technology (1999), 20 (Synthesis of Polymers), 403-458; Tomalia, Donald A., "Dendrimer molecules", Scientific American (1995), 272(5), 62-6; WO 02/067343 A1 and WO 2005/026144 A1.

[0074] The compounds according to the invention are suitable for use in an electronic device. An electronic device here is taken to mean a device which comprises at least one layer which comprises at least one organic compound. However, the component here may also comprise inorganic materials or also layers built up entirely from inorganic materials.

[0075] The present invention therefore furthermore relates to the use of the compounds according to the invention in an electronic device, in particular in an organic electroluminescent device.

[0076] The present invention still furthermore relates to an electronic device comprising at least one compound according to the invention. The preferences stated above likewise apply to the electronic devices.

[0077] The electronic device is preferably selected from the group consisting of organic electroluminescent devices (organic light-emitting diodes, OLEDs), organic integrated circuits (O-ICs), organic field-effect transistors (O-FETs), organic thin-film transistors (O-TFTs), organic light-emitting transistors (O-LETs), organic solar cells (O-SCs), organic dye-sensitised solar cells (ODSSCs), organic optical detectors, organic photoreceptors, organic field-quench devices (O-FQDs), light-emitting electrochemical cells (LECs), organic laser diodes (O-lasers) and organic plasmon emitting devices (D. M. Koller et al., Nature Photonics 2008, 1-4), but preferably organic electroluminescent devices (OLEDs), particularly preferably phosphorescent OLEDs.

[0078] The organic electroluminescent devices and the light-emitting electrochemical cells can be employed for various

44

25

20

10

30

35

40

45

50

applications, for example for monochromatic or polychromatic displays, for lighting applications or for medical and/or cosmetic applications, for example in phototherapy.

[0079] The organic electroluminescent device comprises a cathode, an anode and at least one emitting layer. Apart from these layers, it may also comprise further layers, for example in each case one or more hole-injection layers, hole-transport layers, hole-blocking layers, electron-transport layers, electron-injection layers, exciton-blocking layers, electron-blocking layers and/or charge-generation layers. Interlayers, which have, for example, an exciton-blocking function, may likewise be introduced between two emitting layers. However, it should be pointed out that each of these layers does not necessarily have to be present.

[0080] The organic electroluminescent device here may comprise one emitting layer or a plurality of emitting layers. If a plurality of emission layers is present, these preferably have in total a plurality of emission maxima between 380 nm and 750 nm, resulting overall in white emission, i.e. various emitting compounds which are able to fluoresce or phosphoresce are used in the emitting layers. Particular preference is given to systems having three emitting layers, where the three layers exhibit blue, green and orange or red emission (for the basic structure see, for example, WO 2005/011013). It is possible here for all emitting layers to be fluorescent or for all emitting layers to be phosphorescent or for one or more emitting layers to be fluorescent and one or more other layers to be phosphorescent.

10

20

30

35

45

50

55

[0081] The compound according to the invention in accordance with the embodiments indicated above can be employed here in different layers, depending on the precise structure. Preference is given to an organic electroluminescent device comprising a compound of the formula (1) or the preferred embodiments as hole-transport material in a hole-transport or hole-injection or exciton-blocking or electron-blocking layer or as matrix material for fluorescent or phosphorescent emitters in an emitting layer, in particular for phosphorescent emitters. The preferred embodiments indicated above also apply to the use of the materials in organic electronic devices.

[0082] In a preferred embodiment of the invention, the compound of the formula (1) or the preferred embodiments is employed as hole-transport or hole-injection material in a hole-transport or hole-injection layer. The emitting layer here can be fluorescent or phosphorescent. A hole-injection layer in the sense of the present invention is a layer which is directly adjacent to the anode. A hole-transport layer in the sense of the present invention is a layer which is located between a hole-injection layer and an emitting layer.

[0083] In still a further preferred embodiment of the invention, the compound of the formula (1) or the preferred embodiments is employed in an exciton-blocking layer. An exciton-blocking layer is taken to mean a layer which is directly adjacent to an emitting layer on the anode side.

[0084] The compound of the formula (1) or the preferred embodiments is particularly preferably employed in a hole-transport or exciton-blocking layer.

[0085] In an embodiment of the invention, the compound of the formula (1) or the preferred embodiments is used in a hole-transport or -injection layer in combination with a layer which comprises a hexaazatriphenylene derivative, in particular hexacyanohexaazatriphenylene (for example in accordance with EP 1175470). Thus, for example, preference is given to a combination which looks as follows: anode - hexaazatriphenylene derivative - hole-transport layer, where the hole-transport layer comprises one or more compounds of the formula (1) or the preferred embodiments. It is likewise possible in this structure to use a plurality of successive hole-transport layers, where at least one hole-transport layer comprises at least one compound of the formula (1) or the preferred embodiments. A further preferred combination looks as follows: anode - hole-transport layer - hexaazatriphenylene derivative - hole-transport layer, where at least one of the two hole-transport layers comprises one or more compounds of the formula (1) or the preferred embodiments. It is likewise possible in this structure to use a plurality of successive hole-transport layers instead of one hole-transport layer, where at least one hole-transport layer comprises at least one compound of the formula (1) or the preferred embodiments.


[0086] If the compound according to formula (1) is employed as a hole transporting material in a hole transporting layer, a hole injection layer, an exciton blocking layer or an electron blocking layer, the compound may be used as a pure material, i.e. in a proportion of 100 % in the layer, or it may be used in combination with one or more other materials. According to a preferred embodiment, in this case, the one or other compound which is used in combination with the compound according to formula (1) is a p-dopant. Preferred p-dopants to be used are electron acceptor compounds, preferably such electron acceptor compounds which can oxidize one or more of the other compounds of the mixture.

[0087] The p-dopant is preferably present in a concentration of 0.1 to 20 Vol-%, preferably 0.5 to 12 Vol-%, more preferably 1 to 8 Vol-% and most preferably 2 to 6 Vol-% in the layer comprising the compound according to the invention. [0088] Particularly preferred p-dopants to be used in combination with the compounds according to the invention are the compounds disclosed in one or more of the following documents: WO 2011/073149, EP 1968131, EP 2276085, EP 2213662, EP 1722602, EP 2045848, DE 102007031220, US 8044390, US 8057712, WO 2009/003455, WO 2010/094378, WO 2011/120709, US 2010/0096600 and WO 2012/095143.

[0089] Highly preferred p-dopants to be used in the devices according to the invention are quinodimethanes, azain-denofluorendiones, azaphenalenes, azatriphenylenes, I_2 , metal halogenides, preferably transition metal halogenides, metal oxides, preferably transition metal oxides or metal oxides comprising at least one metal of the third main group,

and transition metal complexes, preferably complexes of Cu, Co, Ni, Pd or Pt with ligands having at least one binding oxygen atom. Preferred are furthermore transition metal oxides such as rhenium oxides, molybdenum oxides and tungsten oxides, more preferably Re_2O_7 , MoO_3 , WO_3 and ReO_3

[0090] Preferred p-dopants are furthermore the following compounds:

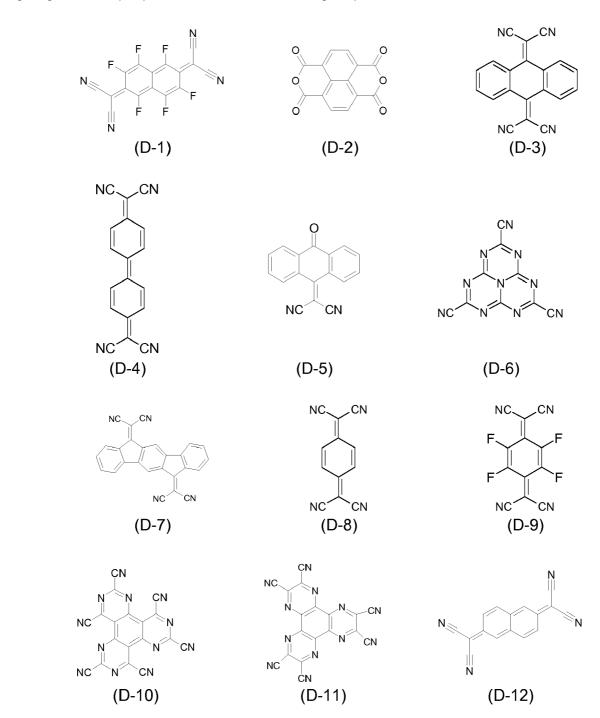

[0091] In a further preferred embodiment of the invention, the compound of the formula (1) or the preferred embodiments is employed as matrix material for a fluorescent or phosphorescent compound, in particular for a phosphorescent compound, in an emitting layer. The organic electroluminescent device here may comprise one emitting layer or a plurality of emitting layers, where at least one emitting layer comprises at least one compound according to the invention as matrix material.

[0092] If the compound of the formula (1) or the preferred embodiments is employed as matrix material for an emitting compound in an emitting layer, it is preferably employed in combination with one or more phosphorescent materials (triplet emitters). Phosphorescence in the sense of this invention is taken to mean the luminescence from an excited

state having a spin multiplicity > 1, in particular from an excited triplet state. For the purposes of this application, all luminescent complexes containing transition metals or lanthanoids, in particular all luminescent iridium, platinum and copper complexes, are to be regarded as phosphorescent compounds.

[0093] The mixture comprising the compound of the formula (1) or the preferred embodiments and the emitting compound comprises between 99.9 and 1% by weight, preferably between 99 and 10% by weight, particularly preferably between 97 and 60% by weight, in particular between 95 and 80% by weight, of the compound of the formula (1) or the preferred embodiments, based on the entire mixture comprising emitter and matrix material. Correspondingly, the mixture comprises between 0.1 and 99% by weight, preferably between 1 and 90% by weight, particularly preferably between 3 and 40% by weight, in particular between 5 and 20% by weight, of the emitter, based on the entire mixture comprising emitter and matrix material. The limits indicated above apply, in particular, if the layer is applied from solution. If the layer is applied by vacuum evaporation, the same numerical values apply, with the percentage in this case being indicated in % by vol. in each case.

10

20

30

35

50

55

[0094] A particularly preferred embodiment of the present invention is the use of the compound of the formula (1) or the preferred embodiments as matrix material for a phosphorescent emitter in combination with a further matrix material. Particularly suitable matrix materials which can be employed in combination with the compounds of the formula (1) or the preferred embodiments are aromatic ketones, aromatic phosphine oxides or aromatic sulfoxides or sulfones, for example in accordance with WO 2004/013080, WO 2004/093207, WO 2006/005627 or WO 2010/006680, triarylamines, carbazole derivatives, for example CBP (N,N-biscarbazolylbiphenyl), m-CBP or the carbazole derivatives disclosed in WO 2005/039246, US 2005/0069729, JP 2004/288381, EP 1205527 or WO 2008/086851, indolocarbazole derivatives, for example in accordance with WO 2007/063754 or WO 2008/056746, indenocarbazole derivatives, for example in accordance with WO 2010/136109 or WO 2011/000455, aza-carbazole derivatives, for example in accordance with EP 1617710, EP 1617711, EP 1731584, JP 2005/347160, bipolar matrix materials, for example in accordance with WO 2007/137725, silanes, for example in accordance with WO 2005/111172, azaboroles or boronic esters, for example in accordance with WO 2006/117052, triazine derivatives, for example in accordance with WO 2010/015306, WO 2007/063754 or WO 08/056746, zinc complexes, for example in accordance with EP 652273 or WO 2009/062578, fluorene derivatives, for example in accordance with WO 2009/124627, diazasilole or tetraazasilole derivatives, for example in accordance with WO 2010/054729, diazaphosphole derivatives, for example in accordance with WO 2010/054730, or bridged carbazole derivatives, for example in accordance with US 2009/0136779, WO 2010/050778, WO 2011/042107 or WO 2011/088877. It is furthermore possible to use an electronically neutral co-host which has neither hole-transporting nor electron-transporting properties, as described, for example, in WO 2010/108579.

[0095] Particularly preferably, the compound according to formula (1) is used as a matrix material for one or more triplet emitters in combination with a second host material selected from lactam compounds. Particularly preferred are the lactam compound disclosed in WO 2011/116865, WO 2011/137951, in unpublished EP 12007040.7 and in unpublished EP 11008708.7. Most preferred are the compounds shown in the working examples of the above applications.

[0096] Examples of preferred lactam compounds to be used in combination with the materials according to formula (1) in the emitting layer are shown in the following table.

5		O	
10			
15			s S
20	N N N N N N N N N N N N N N N N N N N	N N N N N N N N N N N N N N N N N N N	
25		N	
30	O	o N S	
35			
40			
45			

5		O N	
10	N N	N N	s
15	O N N N N N N N N N N N N N N N N N N N		O N N N N N N N N N N N N N N N N N N N
20			
25	O N N N S S S S S S S S S S S S S S S S		
35			
45	N O N	N O	N O N O N O N O N O N O N O N O N O N O

5		N O N N N N N N N N N N N N N N N N N N	
15			o N S
25			
35 40		O Z	
45	O Z Z	O	O

5	N N	N N	
10	O		O
15	N N N N N N N N N N N N N N N N N N N		
20		0,5=0	ON
25			s
30	O N N	o N S	N N N
35		s	
40	s	N O	N N N
45	N		
50			

5	No N	O N N N N N N N N N N N N N N N N N N N
15		
25		
35		
45		

5	O N N N	N O	
15	S N N		O N
20			
25 30			O O
35			N N N N N N N N N N N N N N N N N N N
40			
45			
50			NC CN

5	N N	
10		
15		
20	N N N N N N N N N N N N N N N N N N N	
25		
30	N O N	
35		


[0097] It is likewise possible to use two or more phosphorescent emitters in the mixture. In this case, the emitter which emits at shorter wavelength acts as co-host in the mixture.

[0098] Suitable phosphorescent compounds (= triplet emitters) are, in particular, compounds which emit light, preferably in the visible region, on suitable excitation and in addition contain at least one atom having an atomic number greater than 20, preferably greater than 38 and less than 84, particularly preferably greater than 56 and less than 80, in particular a metal having this atomic number. The phosphorescent emitters used are preferably compounds which contain copper, molybdenum, tungsten, rhenium, ruthenium, osmium, rhodium, iridium, palladium, platinum, silver, gold or europium, in particular compounds which contain iridium, platinum or copper.

[0099] Examples of the emitters described above are revealed by the applications WO 2000/70655, WO 2001/41512, WO 2002/02714, WO 2002/15645, EP 1191613, EP 1191612, EP 1191614, WO 2005/033244, WO 2005/019373, US 2005/0258742, WO 2009/146770, WO 2010/015307, WO 2010/031485, WO 2010/054731, WO 2010/054728, WO 2010/086089, WO 2010/099852, WO 2010/102709, WO 2011/157339 or WO 2012/007086. In general, all phosphorescent complexes as used in accordance with the prior art for phosphorescent OLEDs and as are known to the person skilled in the art in the area of organic electroluminescence are suitable, and the person skilled in the art will be able to use further phosphorescent complexes without inventive step.

[0100] Examples of triplet emitters to be used in the devices according to the present application are shown in the following table.

55

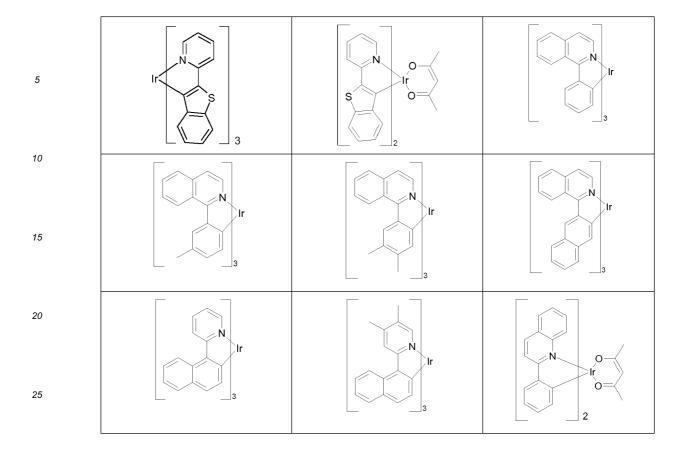

5			
15			N Ir
25	F 3	Ir OMe	OC ₁₀ H ₂₁
30 35	N N N N N N N N N N N N N N N N N N N		N O Ir O O
40	N Ir	N N N	N III O
45		F 2	F F N N F F


5	F N N N N N N N N N N N N N N N N N N N	H 3	
10	N N		N N O
15	N O O		Ir O
20			
25	N N S	N N N N N N N N N N N N N N N N N N N	N N N
35	N N N N N N N N N N N N N N N N N N N	Pt F F F F F F F F F F F F F F F F F F F	F Pt N N N N N N N N N N N N N N N N N N
40		N Pt	Z Z
45	Pt		Pt

5	Pt. N		N N Pt
15	N N Pt	R Pt F	NC F F
20			N Pt
<i>30 35</i>			
40	J J		
45	Pt	Pt N.N	N PT N

Pt		Ir N
Ir N	Ir N	Ir N
Ir N	Ir N	Ir N
Ir 3	N Ir N	N Ir N
	N Ir	N Ir N

5	Ir N	N Ir	
15	Ir N	N N N N N N N N N N N N N N N N N N N	N N N N N N N N N N N N N N N N N N N
25	Ir N	N Ir	N N N N N N N N N N N N N N N N N N N
30 35			
40 45	F3	NC F 3	F NC F 3

5	N Ir	N Ir	
15 20	F N N N N N N N N N N N N N N N N N N N	CN N N N	N N Ir
25 30	N N Ir	N N Ir	N N Ir
35 40	N N Ir		F ₃ C P
45	N N Ir	N N Ir	N N Ir

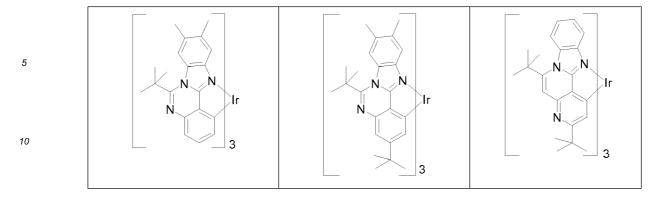

[0101] In a further embodiment of the invention, the organic electroluminescent device according to the invention does not comprise a separate hole-injection layer and/or hole-transport layer and/or hole-blocking layer and/or electron-transport layer, i.e. the emitting layer is directly adjacent to the hole-injection layer or the anode, and/or the emitting layer is directly adjacent to the electron-transport layer or the electron-injection layer or the cathode, as described, for example, in WO 2005/053051. It is furthermore possible to use a metal complex which is identical or similar to the metal complex in the emitting layer as hole-transport or hole-injection material directly adjacent to the emitting layer, as described, for example, in WO 2009/030981.

[0102] It is furthermore possible to use the compound of the formula (1) or the preferred embodiments both in a hole-transport layer or exciton-blocking layer and as matrix in an emitting layer.

[0103] In the further layers of the organic electroluminescent device according to the invention, it is possible to use all materials as usually employed in accordance with the prior art. The person skilled in the art will therefore be able, without inventive step, to employ all materials known for organic electroluminescent devices in combination with the compounds of the formula (1) according to the invention or the preferred embodiments.

[0104] Preferred fluorescent emitter materials are selected from the class of the arylamines. An arylamine or aromatic amine in the sense of this invention is taken to mean a compound which contains three substituted or unsubstituted aromatic or heteroaromatic ring systems bonded directly to the nitrogen. At least one of these aromatic or heteroaromatic ring systems is preferably a condensed ring system, particularly preferably having at least 14 aromatic ring atoms. Preferred examples thereof are aromatic anthracenamines, aromatic anthracenediamines, aromatic pyrenamines, aromatic pyrenediamines, aromatic chrysenamines or aromatic chrysenediamines. An aromatic anthracenamine is taken to mean a compound in which one diarylamino group is bonded directly to an anthracene group, preferably in the 9position. An aromatic anthracene-diamine is taken to mean a compound in which two diarylamino groups are bonded directly to an anthracene group, preferably in the 9,10-position. Aromatic pyrenamines, pyrenediamines, chrysenamines and chrysenediamines are defined analogously thereto, where the diarylamino groups are preferably bonded to the pyrene in the 1-position or in the 1,6-position. Further preferred emitter materials are selected from indenofluorenamines or indenofluorenediamines, for example in accordance with WO 06/122630, benzoindenofluorenamines or benzoindenofluorenediamines, for example in accordance with WO 08/006449, and dibenzoindenofluoren-amines or dibenzoindenofluorenediamines, for example in accordance with WO 07/140847. Examples of emitter materials from the class of the styrylamines are substituted or unsubstituted tristilbenamines or the emitter materials described in WO 06/000388, WO 06/058737, WO 06/000389, WO 07/065549 and WO 07/115610. Preference is furthermore given to the condensed hydrocarbons disclosed in the application WO 10/012328.

[0105] Suitable emitter materials are furthermore the structures depicted in the following table, and the derivatives of these structures disclosed in JP 06/001973, WO 04/047499, WO 06/098080, WO 07/065678, US 2005/0260442 and WO 04/092111.

50

25

30

35

40

5			
152025			
30 35	\$\frac{1}{2}\$\$		
40		CN	
<i>45 50</i>		NC NC	

	N N N N N N N N N N N N N N N N N N N

5			
15			
20			
25	_	Yn nk	
<i>30</i>			N N
40			N- N
45 50			

20

25

30

35

40

45

50

55

[0106] Matrix materials which can be used, preferably for fluorescent dopants, are materials from various classes of substance. Preferred matrix materials are selected from the classes of the oligoarylenes (for example 2,2',7,7'-tetraphenylspirobifluorene in accordance with EP 676461 or dinaphthyl-anthracene), in particular the oligoarylenes containing condensed aromatic groups, the oligoarylenevinylenes (for example DPVBi or spiro-DPVBi in accordance with EP 676461), the polypodal metal complexes (for example in accordance with WO 04/081017), the hole-conducting compounds (for example in accordance with WO 04/058911), the electron-conducting compounds, in particular ketones, phosphine oxides, sulfoxides, etc. (for example in accordance with WO 05/084081 and WO 05/084082), the atropisomers (for example in accordance with WO 06/048268), the boronic acid derivatives (for example in accordance with WO 06/117052) or the benzanthracenes (for example in accordance with WO 08/145239). Suitable matrix materials are furthermore preferably the compounds according to the invention. Apart from the compounds according to the invention, particularly preferred matrix materials are selected from the classes of the oligoarylenes, comprising naphthalene, anthracene, benzanthracene and/or pyrene or atropisomers of these compounds, the oligoarylenevinylenes, the ketones, the phosphine oxides and the sulfoxides. Very particularly preferred matrix materials are selected from the classes of the oligoarylenes, comprising anthracene, benzanthracene, benzophenan-threne and/or pyrene or atropisomers of these compounds. An oligoarylene in the sense of this invention is intended to be taken to mean a compound in which at least three aryl or arylene groups are bonded to one another.

[0107] Suitable matrix materials, preferably for fluorescent dopants, are, for example, the materials depicted in the following table, and derivatives of these materials, as disclosed in WO 04/018587, WO 08/006449, US 5935721, US 2005/0181232, JP 2000/273056, EP 681019, US 2004/0247937 and US 2005/0211958.

5		
10		
15		
20		
25		
30		
35		

5		
10		
15		
25		
30		
35		
40		
45 50		
55		D D D

5		
10		
20		
25		
35		

[0108] Besides the compounds according to the invention, suitable charge-transport materials, as can be used in the hole-injection or hole-transport layer or in the electron-transport layer of the organic electroluminescent device according to the invention, are, for example, the compounds disclosed in Y. Shirota et al., Chem. Rev. 2007, 107(4), 953-1010, or other materials as are employed in these layers in accordance with the prior art.

40

45

50

[0109] Preference is furthermore given to an organic electroluminescent device, characterised in that one or more layers are applied by means of a sublimation process, in which the materials are vapour-deposited in vacuum sublimation units at an initial pressure of usually less than 10^{-5} mbar, preferably less than 10^{-6} mbar. However, it is also possible for the initial pressure to be even lower, for example less than 10^{-7} mbar.

[0110] Preference is likewise given to an organic electroluminescent device, characterised in that one or more layers are applied by means of the OVPD (organic vapour phase deposition) process or with the aid of carrier-gas sublimation, in which the materials are applied at a pressure between 10⁻⁵ mbar and 1 bar. A special case of this process is the OVJP (organic vapour jet printing) process, in which the materials are applied directly through a nozzle and thus structured (for example M. S. Arnold et al., Appl. Phys. Lett. 2008, 92, 053301).

[0111] Preference is furthermore given to an organic electroluminescent device, characterised in that one or more layers are produced from solution, such as, for example, by spin coating, or by means of any desired printing process, such as, for example, LITI (light induced thermal imaging, thermal transfer printing), ink-jet printing, screen printing, flexographic printing, offset printing or nozzle printing. Soluble compounds, which are obtained, for example, by suitable substitution, are necessary for this purpose. These processes are also particularly suitable for the compounds according to the invention, since these generally have very good solubility in organic solvents.

[0112] Also possible are hybrid processes, in which, for example, one or more layers are applied from solution and one or more further layers are applied by vapour deposition. Thus, for example, the emitting layer can be applied from solution and the electron-transport layer by vapour deposition.

[0113] These processes are generally known to the person skilled in the art and can be applied by him without inventive step to organic electroluminescent devices comprising the compounds according to the invention.

[0114] The processing of the compounds according to the invention from the liquid phase, for example by spin coating or by printing processes, requires formulations of the compounds according to the invention. These formulations can be, for example, solutions, dispersions or mini-emulsions. It may be preferred to use mixtures of two or more solvents for this purpose. Suitable and preferred solvents are, for example, toluene, anisole, o-, m- or p-xylene, methyl benzoate, dimethylanisole, mesitylene, tetralin, veratrol, THF, methyl-THF, THP, chlorobenzene, dioxane or mixtures of these solvents. Preferably, the solvents disclosed in WO 2010/093592 are used for the above purpose.

[0115] The present invention therefore furthermore relates to a formulation, in particular a solution, dispersion or miniemulsion, comprising at least one compound of the formula (1) or the preferred embodiments indicated above and at least one solvent, in particular an organic solvent. The way in which solutions of this type can be prepared is known to the person skilled in the art and is described, for example, in WO 2002/072714, WO 2003/019694, WO 2010/093592 and the literature cited therein.

[0116] The present invention furthermore relates to mixtures comprising at least one compound of the formula (1) or the preferred embodiments indicated above and at least one further compound. The further compound can be, for example, a fluorescent or phosphorescent dopant if the compound according to the invention is used as matrix material. The mixture may then also additionally comprise a further material as additional matrix material.

[0117] The compounds according to the invention and the organic electroluminescent devices according to the invention are distinguished by the following surprising advantages over the prior art:

- 1. The compounds according to the invention are very highly suitable for use in a hole-transport or hole-injection layer in an organic electroluminescent device. They are also suitable, in particular, for use in a layer which is directly adjacent to a phosphorescent emitting layer, since the compounds according to the invention do not extinguish the luminescence.
- 2. The compounds according to the invention, employed as matrix material for fluorescent or phosphorescent emitters, result in very high efficiencies and long lifetimes. This applies, in particular, if the compounds are employed as matrix material together with a further matrix material and a phosphorescent emitter.
- 3. The compounds according to the invention, employed in organic electroluminescent devices, result in high efficiencies and in steep current/voltage curves with low use and operating voltages.

[0118] These above-mentioned advantages are not accompanied by an impairment in the other electronic properties. [0119] The invention is explained in greater detail by the following examples, without wishing to restrict it thereby. On the basis of the descriptions, the person skilled in the art will be able to carry out the invention throughout the range disclosed and prepare further compounds according to the invention without inventive step and use them in electronic devices or use the process according to the invention.

Examples

10

15

20

25

30

35

40

45

50

A) Synthesis examples

[0120] The following syntheses are carried out under a protective-gas atmosphere, unless indicated otherwise. The starting materials can be purchased from ALDRICH or ABCR. The numbers in square brackets in the case of the starting materials known from the literature are the corresponding CAS numbers.

Example 1: Synthesis of the brominated spirobifluorene derivatives (starting materials)

1a) Synthesis of 1-bromospiro-9,9'-bifluorene

[0121]

55 + Br 1) Mg 2) HCI / HAc Br

[0122] The corresponding Grignard reagent is prepared from 2.7 g (110 mmol) of iodine-activated magnesium turnings and a mixture of 25.6 g (110 mmol) of 2-bromobiphenyl, 0.8 ml of 1,2-dichloroethane, 50 ml of 1,2-dimethoxyethane, 400 ml of THF and 200 ml of toluene with secondary heating using an oil bath at 70°C. When the magnesium has reacted completely, the mixture is allowed to cool to room temperature, and a solution of 25.9 g (100 mmol) of 1-bromofluorenone [36804-63-4] in 500 ml of THF is then added dropwise, the reaction mixture is warmed at 50°C for 4 h and then stirred at room temperature for a further 12 h. 100 ml of water are added, the mixture is stirred briefly, the organic phase is separated off, and the solvent is removed in vacuo. The residue is suspended in 500 ml of glacial acetic acid at 40°C, 0.5 ml of conc. sulfuric acid is added to the suspension, and the mixture is subsequently stirred at 100°C for a further 2 h. After cooling, the precipitated solid is filtered off with suction, washed once with 100 ml of glacial acetic acid, three times with 100 ml of ethanol each time and finally recrystallised from dioxane. Yield: 26.9 g (68 mmol), 68%; purity about 98% according to ¹H-NMR.

1b) Synthesis of 4-bromospiro-9,9'-bifluorene

[0123]

5

10

15

25

30

[0124] A solution of 2, 2'-dibromo-biphenyl (250 g, 785 mmol) in THF (1900ml) is treated with 318 mL of n-BuLi (2,5 M in hexane, 785 mmol) under argon at -78 °C. The mixture is stirred for 30 minutes. A solution of Fluoren-9-one (144 g, 785 mmol) in 1000 mL THF is added dropwise. The reaction proceeds at -78 °C for 30 minutes and then is stirred at room temperature overnight. The reaction is quenched with water and the solid is filtered. Without further purification, a mixture of the alcohol (299 g, 92%), acetic acid (2200 mL) and concentrated HCI (100 mL) is refluxed for 2 hours. After cooling, the mixture is filtered and washed with water and dried under vacuum. The product is isolated in the form of a white solid (280 g, 98% of theory).

[0125] The synthesis of further brominated spirobifluorene derivatives is carried out analogously:

35	Ex.	Bromo-biphenyl	Bromofluorenone	Product: Bromo-Spirobifluorene	Yield
<i>3</i> 5	1c	Br	o Br		85%
40		[2052-07-5]	[2041-19-2]	Br	
45	1d	Br Br			90%
50		[13029-09-9]	[486-25-9]	Br [1161009-88-6]	
50	1e	Br	Br Br		85%
55		[2052-07-5]	[216312-73-1]	Br Br	

	Ex.	Bromo-biphenyl	Bromofluorenone	Product: Bromo-Spirobifluorene	Yield
5	1f	Br Br	O Br	Br A	90%
		[13029-09-9]	[4269-17-4]	Br [1257321-41-7]	
15	1g	Br Br [70728-93-7]	Br [4269-17-4]	Br Br	85%
25	1h	Br	O Br	Br	90%
		[70728-89-1]	[4269-17-4]		
30 35	1i	Br Br [70728-93-7]	[486-25-9]	Br	87%
40	1j	Br [132462-55-6]	Br [4269-17-4]	Br	85%
45	1k	Br Br [13029-09-9]	O Ph [3096-49-9]	Ph	80%
50 55	11	Br Br	Ph	Ph	80%
		[13029-09-9]	[115033-91-5]	Br	

(continued)

	1m				
		F—————————————————————————————————————		Br	90%
)		[1214351-66-2]	Br [4269-17-4]	FF	
;	1n	F—————————————————————————————————————	O Br [4269-17-4]	Br F F	80%

Example 2: Synthesis of 4-biphenyl-2-(9,9'-dimethylfluorenyl)-1-spiro-9,9'-bifluorenylamine

Synthesis of 1-(1-biphen-4-yl)-(9,9'-dimethylfluoren-2-yl)amine-9H-Fluoren-9-one

[0126]

5

10

15

20

25

40

45

50

55

[0127] Tri-tert-butylphosphine (4.5 ml of a 1.0 M solution in toluene, 1,9 mmol), palladium acetate (217 mg, 0.97 mmol) and sodium tert-butoxide (13.9 g, 145 mmol) are added to a solution of 1-biphenyl-yl-(9,9-dimethyl-9*H*-fluoren-2-yl)amine (40.0 g, 111 mmol), 1-Bromo- Fluoren-9-one, (25 g, 96 mmol) in degassed toluene (200 ml), and the mixture is heated under reflux overnight. The reaction mixture is cooled to room temperature, extended with toluene and filtered through Celite. The filtrate is evaporated in vacuo, and the residue is crystallised from toluene/heptane The product is isolated in the form of a pale-yellow solid (43 g, 82% of theory).

Synthesis of 4-biphenyl-2-(9,9'-dimethylfluorenyl)-1-spiro-9,9'-bifluorenylamine

[0128]

[0129] A solution of 2-Bromo-biphenyl (17 g, 70 mmol) in THF (90ml) is treated with 35 mL of *n*-BuLi (2,1 M in hexane, 70 mmol) under argon at -78 °C.

[0130] The mixture is stirred for 30 minutes. A solution of of 1-(1-biphen-4-yl)-(9,9'-dimethylfluoren-2-yl)amine-9H-Fluoren-9-one (38 g, 70 mmol) in 90 mL THF is added dropwise. The reaction proceeds at -78 °C for 30 minutes and then is stirred at room temperature overnight. The reaction is quenched with water and extracted with ethyl acetate. The intermediate alcohol is obtained after the solvent is removed (31 g, 64%). Without further purification , a mixture of the alcohol , acetic acid (700 mL) and concentrated HCl (62 mL) is refluxed for 2 hours. After cooling, the mixture is filtered and washed with water. The residue is crystallised from toluene. The crude product is extracted in a Soxhlet extractor (toluene) and purified by zone sublimation in vacuo. The product is isolated in the form of a pale-yellow solid (13 g, 43% of theory, purity > 99.99% according to HPLC).

Example 3a: Synthesis of 4-biphenyl-2-(9,9'-dimethylfluorenyl)-1-spiro-9,9'-bifluorenylamine

[0131]

15

20

25

[0132] Tri-*tert*-butylphosphine (4.4 ml of a 1.0 M solution in toluene, 4.4 mmol), palladium acetate (248 mg, 1.1 mmol) and sodium *tert*-butoxide (16.0 g, 166 mmol) are added to a solution of biphenyl-2-yl-(9,9-dimethyl-9*H*-fluoren-2-yl)amine (40.0 g, 111 mmol) and 4-bromo-9,9'-spirobifluorene (56.9 g, 144 mmol) in degassed toluene (500 ml), and the mixture is heated under reflux for 2 h. The reaction mixture is cooled to room temperature, extended with toluene and filtered through Celite. The filtrate is evaporated in vacuo, and the residue is crystallised from ethyl acetate/heptane. The crude product is extracted in a Soxhlet extractor (toluene) and purified by zone sublimation in vacuo twice (p = 3 x 10^{-4} mbar, T = 298°C). The product is isolated in the form of a pale-yellow solid (20.4 g, 27% of theory, purity > 99.99% according to HPLC).

[0133] The following compounds are obtained analogously:

50

40

45

	Ex.	Br-spiro	Amine	Product	Yield
5	3b	Br	H-N [102113-98-4]	N N N N N N N N N N N N N N N N N N N	43%
15 20	3c	Br	H-N [1198395-24-2]	N N	56%
25	3d	Br	H-N [500717-23-7]	N	61%
354045	3e	Br	H-N [1290039-85-8]	N	72%

(continued)

	Ex.	Br-spiro	Amine	Product	Yield
10	3f	Br	H-N [1267248-54-3]	N N N N N N N N N N N N N N N N N N N	65%
20	3g	Br	H-N		75%
25			[1354653-33-0]	N N N N N N N N N N N N N N N N N N N	
30	3h	Br	H-N	N	80%
35			[1160294-96-1]		
40 45	3i	Br	H-N O	N o	85%
50			[955959-89-4]		

(continued)

	Ex.	Br-spiro	Amine	Product	Yield
5	3 <u>j</u>	Br			55%
10			H-N		
15			[1300028-94-7]		
20	3k	Br			64%
25			H-N O [1318338-47-4]	N O	
30	31		[1010000 47 4]		56%
35		Br	H-N	N	
40			[102113-98-4]		
45 50	3m	Br	H-N	N	66%
JU			[1198395-24-2]		

(continued)

	Ex.	Br-spiro	Amine	Product	Yield
5	3n				46%
10		Br	H-N		
15			[500717-23-7]		
20	30	Br	H-N	N N	60%
25			[1267248-54-3]		
30	3р		H-N	N	72%
35 40		`Br	[1354653-33-0]	N N	
40	3q				85%
45 50		Br	H-N [1160294-96-1]	N N N N N N N N N N N N N N N N N N N	

(continued)

3r				50%
		\nearrow		
	Br	H-N O	N	
		[1290039-85-8]		
3s	Br	H-N		70%
		[1300028-94-7]		
3t	Br	H-N O		67%
		~		
3u	Br	H-N O		85%
		Br	Br H-N 0 [1318338-47-4]	Br H-N O H-N O N N N N N N N N N N N N N N N N N N

	Ex.	Br-spiro	Amine	Product	Yield
5	3v				43%
10		Br	H-N		
15			[102113-98-4]		
20	3w	Br	H-N		76%
25			[1198395-24-2]		
30	3x				41%
35		Br	H-N	N	,
40			[500717-23-7]		
45	Зу				50%
50		Br	H-N O		
55			[1290039-85-8]		

(continued)

	Ex.	Br-spiro	Amine	Product	Yield
5	3z				59%
10		Br	H-N o		
15			[1300028-94-7]		
20	3aa				71%
25		Br	H-N 0	N	
30	3ab		[1318338-47-4]		70%
35		Br	H-N	N N N N N N N N N N N N N N N N N N N	
40	3ac		[1267248-54-3]		75%
45	Jac	Br	H-N	N N	13%
50			[1354653-33-0]		

(continued)

	Ex.	Br-spiro	Amine	Product	Yield
5	3ad	Br	H-N N	N N N N N N N N N N N N N N N N N N N	80%
15			[1160294-96-1]		
20	3ae	Br	H-N O	N O O	85%
25			[955959-89-4]		
30	3af	Br Br	H-N		48%
35 40		1257321-41-7	102113-98-4		

	Ex.	Br-spiro	Amine	Product	Yield
101520	3ag	Br Br [1257321-41-7]	H-N [1198395-24-2]		46%
25	3ah	Br Br	H-N	N N	41%
35		[1257321-41-7]	[500717-23-7]	N	
40	3ai	Br	H-N	O N	50%
50 55		Br [1257321-41-7]	[1290039-85-8]	N O O	

	Ex.	Br-spiro	Amine	Product	Yield
5	Зај	Br			43%
10		Br	H-N		
15		[1257321-41-7]	[1300028-94-7]		
20	3ak	Br		N-V	53%
25		Br	H-N O	N-	
30		[1257321-41-7]	[1318338-47-4]		
35	3al				33%
40		Br [°] Br	H-N		
45			[102113-98-4]		
50	3am	Br Br	H-N	N N N N N N N N N N N N N N N N N N N	46%
55			[1198395-24-2]		

	Ex.	Br-spiro	Amine	Product	Yield
5	3an			N N N N N N N N N N N N N N N N N N N	41%
10		Br Br	H-N		
15			[500717-23-7]		
20	3ao	Br Br	H-N		40%
25			[1290039-85-8]		
30	Зар				51%
35		Br ['] Br	H-N	N	
40			[1300028-94-7]	V	
45	3aq	Br Br			47%
50 55			H-N [1318338-47-4]		

Example 4a: Synthesis of biphenyl-2-yl-(9,9-dimethyl-9*H*-fluoren-2-yl)-(9,9'-spirobifluoren-4-yl)amine [0134]

a) Synthesis of biphenyl-2-yl-(9,9-dimethyl-9H-fluoren-2-yl)amine

25

30

35

40

[0135] 1,1'-Bis(diphenylphosphino)ferrocene (1.5 g, 2.7 mmol), palladium acetate (616 mg, 2.7 mmol) and sodium *tert*-butoxide (22.9 g, 238 mmol) are added to a solution of biphenyl-2-ylamine (31.0 g, 183 mmol) and 2-bromo-9,9-dimethyl-9*H*-fluorene (50.0 g, 183 mmol) in degassed toluene (400 ml), and the mixture is heated under reflux for 20 h. The reaction mixture is cooled to room temperature, extended with toluene and filtered through Celite. The filtrate is extended with water, re-extracted with toluene, and the combined organic phases are dried and evaporated in vacuo. The residue is filtered through silica gel (heptane/dichloromethane) and crystallised from isopropanol. Biphenyl-2-yl-(9,9-dimethyl-9*H*-fluoren-2-yl)amine is obtained in the form of a pale-yellow solid (63.0 g, 95% of theory).

b) Synthesis of biphenyl-2-yl-(9,9-dimethyl-9H-fluoren-2-yl)-(9,9'-spiro-bifluoren-4-yl)amine

[0136] Tri-*tert*-butylphosphine (4.4 ml of a 1.0 M solution in toluene, 4.4 mmol), palladium acetate (248 mg, 1.1 mmol) and sodium *tert*-butoxide (16.0 g, 166 mmol) are added to a solution of biphenyl-2-yl-(9,9-dimethyl-9*H*-fluoren-2-yl)amine (40.0 g, 111 mmol) and 4-bromo-9,9'-spirobifluorene (56.9 g, 144 mmol) in degassed toluene (500 ml), and the mixture is heated under reflux for 2 h. The reaction mixture is cooled to room temperature, extended with toluene and filtered through Celite. The filtrate is evaporated in vacuo, and the residue is crystallised from ethyl acetate/heptane. The crude product is extracted in a Soxhlet extractor (toluene) and purified by zone sublimation in vacuo twice (p = 3 x 10^{-4} mbar, T = 298° C). The product is isolated in the form of a pale-yellow solid (20.4 g, 27% of theory, purity > 99.99% according to HPLC).

[0137] The following compounds are obtained analogously:

45	Ex.	Starting material 1	Starting material 2	Starting material 3	Product	Yield
40	4b			Br		78%
50		Br	H ₂ N [90-41-5]	[1161009-88-6]	2	
55						

(continued)

	Ex.	Starting material 1	Starting material 2	Starting material 3	Product	Yield
5	4c	Br	H ₂ N	Br		73%
15	4d	NH ₂	Ph Ph Br	Br	Ph Ph N	75%
20						
25	4e	Br	NH ₂ [63019-98-7]	Br		79%
30						
35	4f	Br	NH ₂	Br		78%
40 45			[54810-82-1]			

Example 5a: Synthesis of Synthesis of Biphenyl-4-yl-(9,9-dimethyl-9H-fluoren-2-yl)-[4-(9,9'-spiro-bifluoren-4-yl)-phenyl]-amine

50 Synthesis of Biphenyl-4-yl-(9,9-dimethyl-9H-fluoren-2-yl (4,4,5,5tetramethyl-[1,3,2]dioxaborolan-2-yl)-phenyl] -amine

[0138]

15

20

40

45

50

55

[0139] 102 g (198 mmol) of Biphenyl-4-yl-(4-bromo-phenyl)-(9,9-dimethyl-9H-fluoren-2-yl)-amine, 4,8 g (5,9 mmol) of Pd(dppf)Cl₂, 61,6 g (238 mmol) of bis(pinacolato)diboron and 58,3 g (594 mmol) of potassium acetate are dissolved in 1300 mL of 1,4-dioxane. The reaction mixture is refluxed and agitated under an argon atmosphere for 12 hours and after cooling to room temperature, the mixture is filtered through Celite. The filtrate is evaporated in vacuo, and the residue is crystallised from heptane. The product is isolated in the form of a pale-yellow solid (87 g, 78% of theory).

Synthesis of Biphenyl-4-yl-(9,9-dimethyl-9H-fluoren-2-yl)-[4-(9,9'-spiro-bifluoren-4-yl)-phenyl]-amine [0140]

[0141] 28 g (49,4 mmol) of Biphenyl-4-yl-(9,9-dimethyl-9H-fluoren-2-yl (4,4,5,5-tetramethyl-[1,3,2]dioxaborolan-2-yl)-phenyl]-amine, 20 g (49,4 mmol) of 4-bromspirobifluorene, 1,8 g (2,5 mmol) of $PdCl_2(Cy)_3$, 15 g (99 mmol) of cesium fluoride are dissolved in 500 mL of toluene. The reaction mixture is refluxed and agitated under an argon atmosphere for 12 hours and after cooling to room temperature, the mixture is filtered through Celite. The filtrate is evaporated in vacuo, and the residue is crystallised from heptane. The crude product is extracted in a Soxhlet extractor (toluene) and purified by zone sublimation in vacuo twice. The product is isolated in the form of a pale-yellow solid (9 g, 24% of theory, purity > 99.99% according to HPLC).


[0142] The following compounds are synthesized analogously:

Ex.	Br-Spiro	Amine	Product	Yield
5b	Br	O B N	N N	43%

(continued)

	Ex.	Br-Spiro	Amine	Product	Yield
5	5c	Br	O B N		55%
15	5d	Br	O.B.		60%
25	5e	Br	O B N	Z +	63%
35	5f	Br	O B N	N N N N N N N N N N N N N N N N N N N	70%
40 45	5g	Br	O B N	N N	75%

(continued)

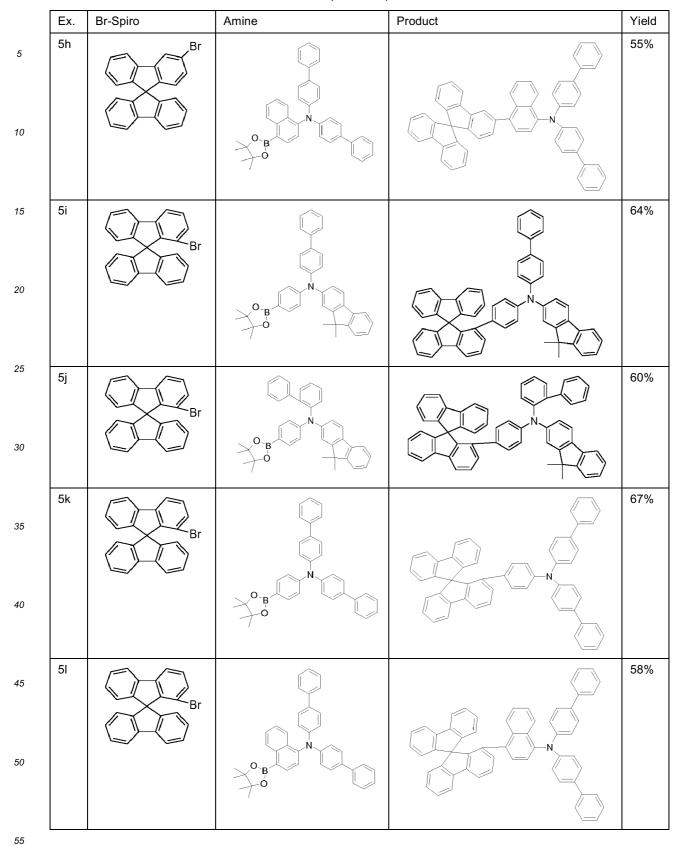

Example 6a: 9-Spiro-4-yl-3,6-diphenyl-9H-carbazol

[0143]

[0144] 19.2 g (47 mmol) 4-Brom-9-spirobifluorene, 15 g (47 mmol) 3,6-Diphenyl-9-H-carbazole and 29.2 g Rb_2CO_3 are suspended in 250 mL p-Xylol. To the suspension are given 0.95 g (4,2 mmol) $Pd(OAc)_2$ and 12.6 ml of a 1 M solution of Tri-tert-butylphosphine. The mixture is stirred 24 h under reflux. After cooling the organic phase is separated, washed three times with 150 mL water and is subsequently concentrated to dryness in vacuo. The residue is hot extracted with toluene, recrystallized three times from toluene and subsequently sublimated at high vacuum. Yield is 19.6 g (30.9 mmol) corresponding to 66 % of theory. Purity is according to HPLC 99.9 %.

[0145] The following compounds are obtained analogously:

20	1 1116	e following compounds at	re obtained analogously:		
		starting material 1	starting material 2	product	yield
25	6b	Br	TZ		76%
30			1257220-47-5		
35	6c				65%
40 45		Br	1257220-47-5	N	
50	6d				77%
55		Br [′]	1060735-14-9		

(continued)

	starting material 1	starting material 2	product	yield
6e	Br	103012-26-6		69%

B) Device Examples

5

10

15

20

25

35

[0146] OLEDs according to the invention and OLEDs in accordance with the prior art are produced by a general process in accordance with WO 2004/058911, which is adapted to the circumstances described here (layer-thickness variation, materials).

[0147] The data for various OLEDs are presented in the following Examples 1 to 5 below (see Tables 1 to 7).

[0148] The substrates used are glass plates coated with structured ITO (indium tin oxide) in a thickness of 50 nm. The OLEDs basically have the following layer structure: substrate / hole-injection layer (IL) / hole-transport layer (HTL) / hole-injection layer (IL) / electron-blocking layer (EBL) / emission layer (EML) / electron-transport layer (ETL) and finally a cathode. In the device structure according to Table 3, the analogous structure is used, only that the first hole injection layer is omitted.

[0149] Other examples are presented with the following general device structure shown in Table 6: substrate / p-doped hole transport layer (HIL1) / hole-transport layer (HTL) / p-doped electron blocking layer (HIL2) / electron-blocking layer (EBL) / emission layer (EML) / electron-transport layer (ETL) / electron-injection layer (EIL) and finally a cathode. The cathode is formed by an aluminium layer with a thickness of 100 nm.

[0150] Other examples are presented with the following general device structure shown in Table 7. This structure differs from the structure of Examples of Table 6 in that the second p-doped electron blocking layer is omitted, and in that a hole blocking layer (HBL) is present between emitting layer and electron transport layer.

[0151] The precise structures of all the OLEDs prepared in the present examples are shown in Tables 1, 3, 6 and 7. The materials required for the production of the OLEDs are shown in Table 5. Data obtained are either in the text and/or shown in Tables 2 and 4.

[0152] All materials are applied by thermal vapour deposition in a vacuum chamber. The emission layer here always consists of at least one matrix material (host material) and an emitting dopant (emitter), which is admixed with the matrix material or matrix materials in a certain proportion by volume by coevaporation. An expression such as H1:SEB1 (95%:5%) here means that material H1 is present in the layer in a proportion by volume of 95% and SEB1 is present in the layer in a proportion of 5%. Analogously, the electron-transport layer may also consist of a mixture of two materials.

[0153] The OLEDs are characterised by standard methods. For this purpose, the electroluminescence spectra, the current efficiency (measured in cd/A), the power efficiency (measured in Im/W) and the external quantum efficiency (EQE, measured in per cent) as a function of the luminous density, calculated from current/voltage/luminous density characteristic lines (IUL characteristic lines) assuming Lambert emission characteristics, and the lifetime are determined. The electroluminescence spectra are determined at a luminous density of 1000 cd/m², and the CIE 1931 x and y colour coordinates are calculated therefrom. The expression EQE @ 1000 cd/m² denotes the external quantum efficiency at an operating luminous density of 1000 cd/m². LT80 @ 6000 cd/m² is the lifetime until the OLED has dropped from a luminance of 6000 cd/m² to 80% of the initial intensity, i.e. to 4800 cd/m². LT80 @ 60 mA/cm² is the lifetime until the OLED has dropped from its initial luminance at a constant current of 60 mA to 80 % of the initial luminance. The data obtained for the various OLEDs are summarised either in the text and/or shown in Tables 2 and 4.

55

Use of compounds according to the invention as hole-transport materials in fluorescent and phosphorescent OLEDs

[0154] In particular, compounds according to the invention are suitable as HIL, HTL or EBL in OLEDs. They are suitable as a single layer, but also as mixed component as HIL, HTL, EBL or within the EML.

Example 1

[0155] Singlet blue devices are shown in Tables 1 and 2, and triplet green devices are shown in Tables 3 and 4. [0156] Compared with devices which comprise NPB as reference (V1, V3), the samples comprising the compounds according to the invention exhibit both higher efficiencies and also significantly improved lifetimes both in singlet blue and also in triplet green devices. Compared with the reference material HTMV1 (V2, V4), the compound according to the invention HTM1 has significantly improved efficiencies and significantly better lifetimes.

	Table 1: Structure of the OLEDs						
Ex.	IL	HTL	IL	EBL	EML	ETL	
	Thickness /nm	Thickness /nm	Thickness /nm	Thickness /nm	Thickness / nm	Thickness / nm	
V1	HIL1 5 nm	HIL2 140 nm	HIL1 5 nm	NPB 20 nm	H1(95%):SEB1(5%) 20 nm	ETM1(50%):LiQ(50%) 30 nm	
V2	HIL1 5 nm	HIL2 140 nm	HIL1 5 nm	HTMV1 20 nm	H1(95%):SEB1(5%) 20 nm	ETM1(50%):LiQ(50%) 30 nm	
E1	HIL1 5 nm	HIL2 140 nm	HIL1 5 nm	HTM1 20 nm	H1(95%):SEB1(5%) 20 nm	ETM1(50%):LiQ(50%) 30 nm	

	Table 2: Data for the OLEDs							
Ex.	EQE @ 1000 cd/m2	LT80 @ 6000 cd/m ²	CIE					
	%	[h]	х	у				
V1	4.8	70	0.14	0.17				
V2	4.3	45	0.13	0.15				
E1	6.8	130	0.13	0.16				

	Table 3: Structure of the OLEDs							
Ex.	HTL	IL	EBL	EML	ETL			
	Thickness / nm	Thickness / nm	Thickness / nm	Thickness / nm	Thickness / nm			
V3	HIL2 70 nm	HIL1 5 nm	NPB 90 nm	H2(88%):TEG(12%) 30 nm	ETM1(50%):LiQ(50%) 40 nm			
V4	HIL2 70 nm	HIL1 5 nm	HTMV1 90 nm	H2(88%):TEG(12%) 30 nm	ETM1(50%):LiQ(50%) 40 nm			
E2	HIL2 70 nm	HIL1 5 nm	HTM1 90 nm	H2(88%):TEG(12%) 30 nm	ETM1(50%):LiQ(50%) 40 nm			

	Table 4: Data for the OLEDs						
Ex.	Efficiency @ 1000 cd/m2	I T80 @ 8000 cdlm2	CIE				
EX.	Emclency @ 1000 cannz	L180 @ 8000 Callinz	X	у			
V3	14.4%	85 h	0.32	0.63			
V4	16.6%	60 h	0.37	0.6			

(continued)

	Table 4: Data for the OLEDs						
Ex.	Efficiency @ 1000 cd/m2	I T80 @ 8000 cdlm2	CIE				
EX.	Efficiency @ 1000 caffinz	L180 @ 8000 Callinz	X	у			
E2	17.3%	195 h	0.37	0.61			

10

5

Table 5: Structures of the materials used

10	T	able 5: Structures of the materials u	sed
15	NC CN NC CN	NC F F CN NC F F	
20	HIL1	F4TCNQ	HIL2
25			N
30	HIL3	H1	SEB1
35			
	H2	H3	H4
45	N Ir		
50	3		
	TEG		

(continued)

5	N N N N N N N N N N N N N N N N N N N				
	ETM1	ETM2	LiQ		
20			Z Z		
25	NPB	HTMV1	HTM1		
30		Z Z	2		
	HTM2	HTM3	HTM4		
40	\rightarrow \frac{1}{2}	N			
45 50	HTM5	НТМ6	НТМ7		
	111100	111110	1111111		

(continued)

5			
10			
15			
	HTM8	HTM9	HTM10
20	HTM8	HTM9	HTM10
20	HTM8	HTM9	HTM10
	HTM8	HTM9	HTM10

Example 2

35

45

50

55

[0157] In a different blue fluorescent device structure (Table 6) the reference devices V5 and V6, using materials according to the state of the art (NPB and HTMV1), have lower efficiencies (EQE @ 10 mA/cm² of 6.2 % for V5 and 5.8% for V6) compared to the devices comprising the compounds according to the invention E3 (8.5 %), E4 (8.3 %), E5 (7.9 %), E6 (7.6 %), E7 (7.8 %), E8 (8.9 %), E9 (8.4%), E10 (8.1 %) and E11(8.2 %).

[0158] The reference samples V5 and V6 have also lower lifetimes (V5 of 120 h (LT80 @ 60 mA) and V6 of 105 h) compared to the samples E3 (305 h), E4 (290 h), E5 (320 h), E6 (390 h), E7 (365 h), E8 (165 h), E9 (280 h), E10(285 h) and E11(340h).

Example 3

[0159] In a different green phosphorescent device structure (Table 6), the reference device V7 has lower efficiency (EQE @ 2 mA/cm²) of 11.7 % compared to the samples comprising the compounds according to the invention E12 (20.0 %), E13 (19.6 %), E14 (18.9 %), E15 (19.2 %) and E16 (20.2 %). The reference sample V6 has also lower lifetime of 80 h (LT80 @ 20 mA) compared to the samples E12 (90 h), E13 (185 h), E14 (105 h), E15 (205 h) and E16 (185 h).

5		EIL	Dicke I nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	LiQ 1 nm	DIT	nu 1	LiQ 1 nm				
10		ETL	Dicke / nm	ETM2(50%):LiQ(50%) 30 nm	ETM2(5091o):LiQ(50%) 30 nm	ETM2(509%):LiQ(50%) 30 nm	ETM2(509%):LiQ(50%) 30 nm	ETM2(50%):LiQ(50%) 30 nm	ETM2(50%):LiQ(50%) 30 nm	ETM2(50%):LiQ(50%) 30 nm	ETM2(50%):LiQ(50%)	40 nm	ETM2(50%):LiQ(50%) 40 nm	ETM2(50%):LiQ(50%) 40 nm	ETM2(50%):LiQ(50%) 40 nm	ETM2(50%):LiQ(50%) 40 nm	ETM2(50%):LiQ(50%) 40 nm				
20	S	EML	Dicke I nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H1:SEB1(5%) 20 nm	H2: TEG(10%)	30 nm	H2:TEG(10%) 30 nm	H2:TEG(10%) 30 nm	H2:TEG(10%) 30 nm	H2:TEG(10%) 30 nm	H2:TEG(10%) 30 nm
25 30	Table 6: Structure of the OLEDs	EBL	Dicke / nm	NPB 20 nm	HTMV1 20 nm	HTM2 20 nm	HTM3 20 nm	HTM4 20 nm	HTM5 20 nm	HTM6 20 nm	HTM7 20 nm	HTM8 20 nm	HTM9 20 nm	HTM10 20 nm	NPB	20 nm	HTM2 20 nm	HTM3 20 nm	HTM4 20 nm	HTM5 20 nm	HTM6 20 nm
35	Table 6: Struct	HIL2	Dicke I nm	NPB:F4TCNQ(3%) 20 nm	HTMV1:F4TCNQ(3%) 20 nm	HTM2:F4TCNQ(3%) 20 nm	HTM3:F4TCNQ(3%) 20 nm	HTM4:F4TCNQ(3%) 20 nm	HTM5:F4TCNQ(3%) 20 nm	HTM6:F4TCNQ(3%) 20 nm	HTM7:F4TCNQ(3%) 20 nm	HTM8:F4TCNQ(3%) 20 nm	HTM9:F4TCNQ(3%) 20 nm	HTM10:F4TCNQ(3%) 20 nm	NPB:F4TCNQ(3%)	20 nm	HTM2:F4TCNQ(3%) 20 nm	HTM3:F4TCNQ(3%) 20 nm	HTM4:F4TCNQ(3%) 20 nm	HTM5:F4TCNQ(3%) 20 nm	HTM6:F4TCNQ(3%) 20 nm
45		НТ	Dicke / nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	HIL3 155 nm	ЕПІН	210 nm	HIL3 210 nm	HIL3 210 nm	HIL3 210 nm	HIL3 210 nm	HIL3 210 nm
50		HIL1	Dicke I nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%)	20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm	HIL3:F4TCNQ(3%) 20 nm
		Bsp.		72	9/	E3	E4	E5	<i>E</i> 6	E7	E8	E9	E10	E11	//		E12	E13	E14	E15	E16

55	50	40 45	35	25 30	20	10	5
			Tab	Table 7: Structure of the OLEDs			
Bsp.	HIL1	нт	EBL	EML	НВГ	E1L	TIE
	Dicke / nm	Dicke / nm	Dicke / nm	Dicke / nm	Dicke / nm	Dicke I nm	Dicke I nm
8/	HIL3:F4TCNQ(3%) 20 nm HIL3 230 nm	HIL3 230 nm		H3:TEG(10%) 40 nm	H2 5 nm	ETM2(50%):LiQ(50%) 25 nm	
E17	HIL3:F4TCNQ(3%) 20 nm HIL3 230 nm	HIL3 230 nm		H3:HTM3(60%):TEG(10%) 40 nm	H2 5 nm	ETM2(50%):LiQ(50%) 25 nm	
6/	HIL3:F4TCNQ(3%) 20 nm HIL3 220 nm	HIL3 220 nm	HTM3 10 nm	H4:TEG(10%) 40 nm		ETM2(50%):LiQ(50%) 30nm	LiQ 1 nm
E18	HIL3:F4TCNQ(3%) 20 nm HIL3 220 nm	HIL3 220 nm	HTM3 10 nm	H4:HTM4(10%):TEG(10%) 40 nm		ETM2(50%):LiQ(50%) 30nm	LiQ 1 nm
E19	HIL3:F4TCNQ(3%) 20 nm HIL3 220 nm	HIL3 220 nm	HTM3 10 nm	HTM3 10 nm H4:HTM11(45%):TEG(10%) 40 nm		ETM2(50%):LiQ(50%) 30nm	LiQ 1 nm

Use of compounds according to the invention as matrix materials in phosphorescent OLEDs

Example 4

5

10

15

20

25

30

35

40

50

55

[0160] In a different green phosphorescent device structure (Table 7), the reference device V8, which does not have the compound according to the invention as a matrix material of the emitting layer, has lower efficiency (EQE @ 2 mA/cm² of 14.4 %) compared to the sample E17 comprising the compound according to the invention HTM3 (EQE @ 2 mA/cm² of 16.1 %), used as a mixed matrix component in the EML. The reference sample V8 has also lower lifetime of 305 h (LT80 @ 20 mA) compared to sample E17 of 330 h.

Example 5

[0161] In a different green phosphorescent device structure (Table 7) it is shown that the compounds according to the invention show favorable effects as a mixed matrix component in the emitting layer, in combination with a lactam compound H4. The reference device V9 has an efficiency (EQE @ 2 mA/cm²) of 17.6 % and a lifetime of 255 h. Lifetime can be improved by adding a compound according to the invention to the emitting layer as a co-matrix material, as shown by examples E18 and E19 compared to V9. Device E18 shows an efficiency of 13.4 % and a lifetime of 400 h, and device E19 shows an efficiency of 17.9 % and a lifetime of 270 h, which are both improvements compared to reference device V9.

Claims


1. Compound of the following formula (1):

$$\begin{bmatrix} Ar^{2} & & & & & & & & \\ & N & & & & & & & \\ & Ar^{1} & & & & & & & \\ & & Ar^{2} & & & & & & \\ & & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & \\ & & & & & \\ & & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & & \\ & & & & \\ & & & & & \\ & & & & \\ & & & & & \\ & & & & \\ & & & & & \\ & & & & \\ & &$$

formula (1)

where the following applies to the symbols and indices used:

Ar¹ and Ar² are, identically or differently on each occurrence, selected from the formulae (11) to (66)

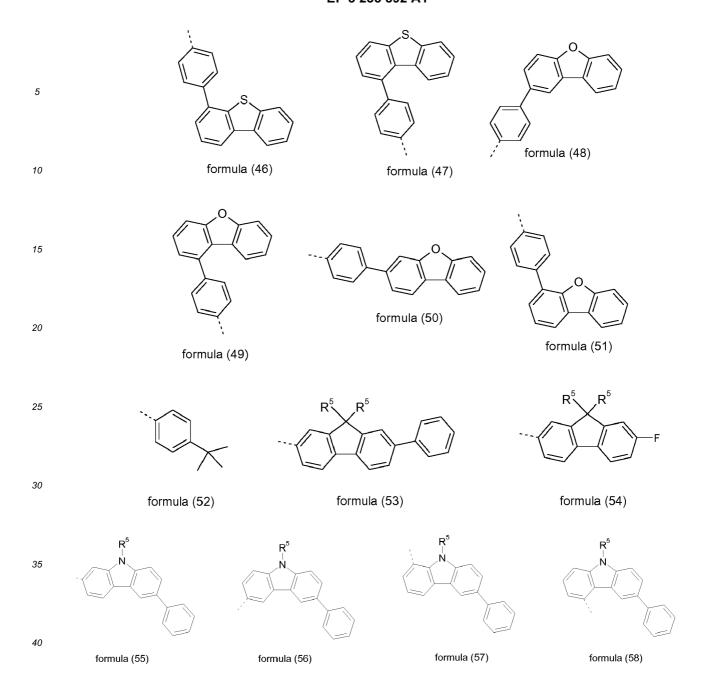

where the dashed bond indicates the bond to the nitrogen, and the groups may be substituted by one or more radicals R⁵;

45

50

55

Ars is on each occurrence, identically or differently, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case also be substituted by one or more radicals R^5 ; R^1 , R^2 , R^3 , R^4 are selected on each occurrence, identically or differently, from the group consisting of H, D, F, Cl, Br, I, CN, $Si(R^6)_3$, a straight-chain alkyl, alkoxy or thioalkyl group having 1 to 40 C atoms or a branched or cyclic alkyl, alkoxy or thioalkyl group having 3 to 40 C atoms, each of which may be substituted by one or more radicals R^6 , where in each case one or more non-adjacent CH_2 groups may be replaced by $Si(R^6)_2$, $C=NR^6$, $P(=O)(R^6)$, SO, SO_2 , NR^6 , O, S or $CONR^6$ and where one or more H atoms may be replaced by D, F, Cl, Br or I, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case be substituted by one or more radicals R^6 , an aryloxy or heteroaryloxy group having 5 to 60 aromatic ring atoms, which may be substituted by one or more radicals R^6 , or an aralkyl or heteroaralkyl group having 5 to 60 aromatic ring atoms, which may in each case be substituted by one or more radicals

 R^6 , where two or more adjacent substituents R^1 or R^2 or R^3 or R^4 may optionally form a mono- or polycyclic, aliphatic ring system, which may be substituted by one or more radicals R^6 ;

 R^5 is selected on each occurrence, identically or differently, from the group consisting of H, D, F, Cl, Br, I, CN, $Si(R^6)_3$, a straight-chain alkyl, alkoxy or thioalkyl group having 1 to 40 C atoms or a branched or cyclic alkyl, alkoxy or thioalkyl group having 3 to 40 C atoms, each of which may be substituted by one or more radicals R^6 , where in each case one or more non-adjacent CH_2 groups may be replaced by $Si(R^6)_2$, $C=NR^6$, $P(=O)(R^6)$, SO, SO_2 , NR^6 , O, S or $CONR^6$ and where one or more H atoms may be replaced by D, F, Cl, Br or I, an aromatic or heteroaromatic ring system having 6 to 60 C atoms, which may in each case be substituted by one or more radicals R^6 , an aryloxy or heteroaryloxy group having 5 to 60 aromatic ring atoms, which may be substituted by one or more radicals R^6 , or an aralkyl or heteroaralkyl group having 5 to 60 aromatic ring atoms, which may in each case be substituted by one or more radicals R^6 , where two or more adjacent substituents R^5 may optionally form a mono- or polycyclic, aliphatic ring system, which may be substituted by one or more radicals R^6 ;

 R^6 is selected from the group consisting of H, D, F, an aliphatic hydrocarbon radical having 1 to 20 C atoms or an aromatic or heteroaromatic ring system having 5 to 30 C atoms, in which one or more H atoms may be replaced by D or F, where two or more adjacent substituents R^6 may form a mono- or polycyclic, aliphatic ring system with one another;

i is on each occurrence, identically or differently, 0 or 1; m is 0, 1 or 2;

5

10

15

20

25

30

35

40

45

50

55

n is on each occurrence, identically or differently, 0, 1, 2, 3 or 4; p, q are on each occurrence, identically or differently, 0 or 1;

r, s are on each occurrence, identically or differently, 0, 1, 2, 3 or 4, where $p + r \le 4$ and $q + s \le 4$.

- 2. Compound according to Claim 1, characterized in that the index i is 0.
- 3. Compound according to Claim 1 or 2, selected from compounds of the following formulae (2) to (10),

$$Ar^{1} N^{Ar^{2}}$$

$$Ar^{1} N^{Ar^{2}}$$

$$Ar^{1} N^{Ar^{2}}$$

$$Ar^{1} N^{Ar^{2}}$$

$$Ar^{1} N^{Ar^{2}}$$

$$Ar^{1} N^{Ar^{2}}$$

$$R^{1} M^{1} M^{1}$$

$$R^{3} M^{1} N^{1}$$

$$R^{4} M^{1} M^{1}$$

$$R^{3} M^{1} N^{1}$$

$$R^{4} M^{1} M^{1}$$
formula (2)

5 Ar
$$Ar^2$$
 Ar Ar^2 Ar Ar^2 Ar Ar^2 Ar Ar^2 Ar Ar^2 Ar Ar^3 Ar Ar^2 Ar Ar^3 Ar Ar^2 Ar Ar^3 Ar

$$Ar^{1} \qquad \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad Ar^{2} \qquad \qquad Ar^{2} \qquad Ar^{2} \qquad \qquad Ar^{2} \qquad$$

where the symbols and indices used are defined as in claim 1 or 2.

4. Compound according to one or more of Claims 1 to 3, selected from compounds of the following formulae (2a) to (10a),

55

$$R^{1}$$

$$R^{2}$$

$$R^{1}$$

$$R^{2}$$

$$R^{1}$$

$$R^{2}$$

$$R^{1}$$

$$R^{2}$$

$$R^{1}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{2}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{2}$$

$$R^{3}$$

$$R^{3}$$

$$R^{3}$$

$$R^{4}$$

$$R^{4}$$

$$R^{4}$$

$$R^{4}$$

$$R^{4}$$

$$R^{4}$$

$$R^{4}$$

$$R^{5}$$

$$R^{4}$$

$$R^{5}$$

$$R^{4}$$

$$R^{5}$$

$$R^{5}$$

$$R^{3}$$

$$R^{4}$$

$$R^{5}$$

$$R^{5}$$

$$R^{4}$$

$$R^{5}$$

$$R^{5}$$

$$R^{5}$$

$$R^{4}$$

$$R^{5}$$

$$R^{5$$

where the symbols and indices used are defined as in claim 1 or 2.

15

5. Compound according to one or more of Claims 1 to 4, selected from compounds of the following formulae (2b) to (10b),

where the symbols used are defined as in claim 1 or 2.

- 6. Compound according to one or more of Claims 1 to 5, **characterized in that** groups Ar¹ and Ar² are, identically or differently on each occurrence, selected from the group consisting of the formulae (11), (13), (16), (20), (28), (29), (33), (34), (35), (37), (38), (39), (40), (44), (48), (49), (51) and (59).
- 7. Compound according to one or more of Claims 1 to 6, **characterized in that** groups Ar¹ and Ar² are, identically or differently on each occurrence, selected from the group consisting of the formulae (11), (13), (20), (29), (35), (38), (39), (49), (51) and (59).
- **8.** Compound according to one or more of Claims 1 to 7, **characterised in that** the groups Ar¹ and Ar² are selected identically.
 - 9. Compound according to one or more of Claims 1 to 8, characterised in that R¹ to R⁴ are selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl or alkoxy group having 1 to 10 C atoms or a branched or cyclic alkyl or alkoxy group having 3 to 10 C atoms, each of which may be substituted by one or more radicals R⁶, where one or more non-adjacent CH₂ groups may be replaced by O and where one or more H atoms may be replaced by F, an aromatic or heteroaromatic ring system having 6 to 24 aromatic ring atoms, which may in each case be substituted by one or more radicals R⁶.
 - **10.** Compound according to one or more of Claims 1 to 9, **characterised in that** the radical R⁵ which is bonded to Ar¹ or Ar² or Ar^s is selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl group having 1 to 10 C atoms, a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic or heteroaromatic ring system having 5 to 24 aromatic ring atoms, each of which may be substituted by one or more radicals R⁶.
- 25 **11.** Compound according to one or more of Claims 1 to 10, **characterised in that**:

R¹ to R⁴ are selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl or alkoxy group having 1 to 10 C atoms or a branched or cyclic alkyl or alkoxy group having 3 to 10 C atoms, each of which may be substituted by one or more radicals R⁶, where one or more non-adjacent CH₂ groups may be replaced by O and where one or more H atoms may be replaced by F, an aromatic or heteroaromatic ring system having 6 to 24 aromatic ring atoms, which may in each case be substituted by one or more radicals R⁶;

 R^5 is, if the radical R^5 is bonded to Ar^1 or Ar^2 or Ar^S , selected, identically or differently on each occurrence, from the group consisting of H, F, CN, a straight-chain alkyl group having 1 to 10 C atoms, a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic or heteroaromatic ring system having 5 to 24 aromatic ring atoms, each of which may be substituted by one or more radicals R^6 ;

or R⁵ which is bonded to the carbon bridge in the formulae (20) to (23), (53), (54), (68) and (72) is, identically or differently, an alkyl group having 1 to 10 C atoms, in particular methyl, or a phenyl group, which may be substituted by one or more radicals R⁶;

or R⁵ which is bonded to the nitrogen bridge in the formulae (28) to (31), (40) to (43) or (55) to (58), (63) to (66), (71) and (73) is a phenyl group, which may be substituted by one or more radicals R⁶;

R⁶ is selected on each occurrence, identically or differently, from the group consisting of H, a straight-chain alkyl group having 1 to 10 C atoms or a branched or cyclic alkyl group having 3 to 10 C atoms or an aromatic ring system having 6 to 24 C atoms;

i is 0; m is 0 or 1; n is 0 or 1; p+q is 0 or 1; r is 0 or 1;

15

20

30

35

40

45

50

55

s is 0 or 1.

- 12. Process for the preparation of a compound according to one or more of Claims 1 to 11, **characterised in that** the diarylamino group is introduced by a C-N coupling reaction between a 1- or 3- or 4-halogenated spirobifluorene and a diarylamine.
- **13.** Use of a compound according to one or more of Claims 1 to 11 in an electronic device.
- 14. Electronic device comprising at least one compound according to one or more of Claims 1 to 11, selected from the

group consisting of organic electroluminescent devices, organic integrated circuits, organic field-effect transistors, organic thin-film transistors, organic light-emitting transistors, organic solar cells, organic dye-sensitised solar cells, organic optical detectors, organic photoreceptors, organic field-quench devices, light-emitting electrochemical cells, organic laser diodes and organic plasmon emitting devices.

15. Electronic device according to Claim 14, selected from organic electroluminescent devices, **characterized in that** the compound according to one or more of Claims 1 to 11 is comprised as hole-transport material in a hole-transport or hole-injection or exciton-blocking or electron-blocking layer, or is comprised as matrix material for fluorescent or phosphorescent emitters in an emitting layer.



Category

EUROPEAN SEARCH REPORT

DOCUMENTS CONSIDERED TO BE RELEVANT

Citation of document with indication, where appropriate,

of relevant passages

Application Number

EP 17 17 0335

CLASSIFICATION OF THE APPLICATION (IPC)

Relevant

to claim

1	r)		

5

15

20

25

30

35

40

45

50

55

Α	JP 2011 173973 A (T	OYO INK SC HOLDINGS CO	1-15	INV.			
	LTD) 8 September 20 * page 14; claims 1	11 (2011-09-08)		C09K11/06 H01L51/50			
A		MERCK PATENT GMBH [DE]; [DE]; HEUN SUSANNE 2011 (2011-01-20) ; claims 1-14 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) C09K H01L			
	The present search report has be Place of search	Date of completion of the search		Examiner			
	The Hague	11 July 2017	Meh	daoui, Imed			
X : parl Y : parl doc A : tecl	ATEGORY OF CITED DOCUMENTS ioularly relevant if taken alone ioularly relevant if combined with another and of the same category innological background in-written disclosure	T : theory or principle E : earlier patent doo after the filing dat D : document cited ir L : document cited fo	T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons				

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 17 17 0335

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-07-2017

)	Patent document cited in search report		Publication date		Patent family member(s)		Publication date
	JP 2011173973	Α	08-09-2011	JP JP	5691192 2011173973	B2 A	01-04-2015 08-09-2011
5	WO 2011006574	A1	20-01-2011	CN DE JP JP KR US WO	102471680 102009032922 5819296 2012532902 20120052316 2012126179 2011006574	A1 B2 A A A1	23-05-2012 20-01-2011 24-11-2015 20-12-2012 23-05-2012 24-05-2012 20-01-2011
,							
)							
i							
)							
i							
)	86						
5	SO STATE OF THE ST						

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4539507 A [0002]
- US 5151629 A [0002]
- EP 0676461 A [0002]
- WO 9827136 A [0002]
- EP 676461 A [0003] [0106]
- US 7714145 B [0003]
- EP 842208 A [0069]
- WO 0022026 A [0069]
- EP 707020 A [0069]
- EP 894107 A [0069]
- WO 06061181 A [0069]
- WO 9218552 A [0069]
- WO 04070772 A [0069]
- WO 04113468 A [0069]
- EP 1028136 A [0069]
- WO 05014689 A [0069]
- WO 07006383 A [0069]
- WO 04041901 A [0069]
- WO 04113412 A [0069]
- WO 05040302 A [0069]
- WO 05040302 A [0003]
 WO 05104264 A [0069]
- WO 07017066 A [0069]
- WO 07017000 / [0000]
- WO 07068325 A [0069]
- WO 06003000 A [0069]WO 2003048225 A [0072]
- WO 2004037887 A [0072]
- WO 02067343 A1 [0073]
- WO 2005026144 A1 [0073]
- WO 2005011013 A [0080]
- EP 1175470 A [0085]
- WO 2011073149 A [0088]
- EP 1968131 A [0088]
- EP 2276085 A [0088]
- EP 2213662 A [0088]
- EP 1722602 A [0088]
- EP 2045848 A **[0088]**
- DE 102007031220 [0088]
- US 8044390 B [0088]
- US 8057712 B [0088]
- WO 2009003455 A **[0088]**
- WO 2010094378 A **[0088]**
- WO 2011120709 A [0088]
- US 20100096600 A [0088]
- WO 2012095143 A **[0088]**
- WO 2004013080 A [0094]
- WO 2004093207 A [0094]
- WO 2006005627 A [0094]
 WO 2010006680 A [0094]
- WO 2005039246 A [0094]

- US 20050069729 A [0094]
- JP 2004288381 A [0094]
- EP 1205527 A [0094]
- WO 2008086851 A [0094]
- WO 2007063754 A [0094]
- WO 2008056746 A [0094]
- WO 2010136109 A [0094]
- WO 2011000455 A [0094]
- EP 1617710 A [0094]
- EP 1617711 A [0094]
- EP 1731584 A [0094]
- JP 2005347160 A [0094]
- WO 2007137725 A [0094]
- WO 2005111172 A [0094]
- WO 2006117052 A [0094]
- WO 2010015306 A [0094]
- WO 08056746 A [0094]
- EP 652273 A [0094]
- WO 2009062578 A [0094]
- WO 2009124627 A [0094]
- WO 2010054729 A [0094]
- WO 2010054730 A [0094]
- US 20090136779 A [0094]
- WO 2010050778 A [0094]
- WO 2011042107 A **[0094]**
- WO 2011088877 A [0094]
- WO 2010108579 A **[0094]**
- WO 2011116865 A **[0095]**
- WO 2011137951 A **[0095]**
- EP 12007040 A [0095]
- EP 11008708 A [0095]
- WO 200070655 A **[0099]**
- WO 200141512 A [0099]
- WO 200202714 A [0099]
- WO 200215645 A [0099]
- EP 1191613 A [0099]
- EP 1191612 A [0099]
- ED 4404044 A 10000
- EP 1191614 A [0099]
- WO 2005 A [0099]
- WO 033244 A [0099]
- WO 2005019373 A **[0099]**
- US 20050258742 A [0099]
- WO 2009146770 A [0099]
- WO 2010015307 A [0099]
- WO 2010031485 A [0099]
- WO 2010054731 A **[0099]**
- WO 2010054728 A [0099]
- WO 2010086089 A [0099]
 WO 2010099852 A [0099]

- WO 2010102709 A [0099]
- WO 2011157339 A [0099]
- WO 2012007086 A [0099]
- WO 2005053051 A [0101]
- WO 2009030981 A [0101]
- WO 06122630 A [0104]
- WO 08006449 A [0104] [0107]
- WO 07140847 A [0104]
- WO 06000388 A [0104]
- WO 06058737 A [0104]
- WO 06000389 A **[0104]**
- WO 07065549 A **[0104]**
- WO 07115610 A **[0104]**
- WO 10012328 A **[0104]**
- JP 6001973 A [0105]
- WO 04047499 A [0105]
- WO 06098080 A [0105]
- WO 07065678 A [0105]
- US 20050260442 A [0105]

- WO 04092111 A [0105]
- WO 04081017 A [0106]
- WO 04058911 A [0106]
- WO 05084081 A [0106]
- WO 05084082 A [0106]
- WO 06048268 A **[0106]**
- WO 06117052 A **[0106]**
- WO 08145239 A [0106]
- WO 04018587 A [0107]
- US 5935721 A [0107]
- US 20050181232 A [0107]
- JP 2000273056 A **[0107]**
- EP 681019 A [0107]
- US 20040247937 A [0107]
- US 20050211958 A **[0107]**
- WO 2010093592 A [0114] [0115]
- WO 2002072714 A [0115]
- WO 2003019694 A [0115]
- WO 2004058911 A [0146]

Non-patent literature cited in the description

- M. A. BALDO et al. Appl. Phys. Lett., 1999, vol. 75, 4-6 [0002]
- FRECHET, JEAN M. J.; HAWKER, CRAIG J. Hyperbranched polyphenylene and hyperbranched polyesters: new soluble, three-dimensional, reactive polymers. Reactive & Functional Polymers, 1995, vol. 26 (1-3), 127-36 [0073]
- JANSSEN, H. M.; MEIJER, E. W. The synthesis and characterization of dendritic molecules. *Materials Science and Technology*, 1999, vol. 20, 403-458 [0073]
- TOMALIA, DONALD A. Dendrimer molecules. Scientific American, 1995, vol. 272, 62-6 [0073]
- D. M. KOLLER et al. Nature Photonics, 2008, 1-4 [0077]
- Y. SHIROTA et al. Chem. Rev., 2007, vol. 107 (4), 953-1010 [0108]
- M. S. ARNOLD et al. Appl. Phys. Lett., 2008, vol. 92, 053301 [0110]



专利名称(译)	用于有机电致发光器件的材料		
公开(公告)号	EP3235892A1	公开(公告)日	2017-10-25
申请号	EP2017170335	申请日	2013-01-21
申请(专利权)人(译)	MERCK PATENT GMBH		
当前申请(专利权)人(译)	MERCK PATENT GMBH		
[标]发明人	MONTENEGRO ELVIRA PARHAM AMIR STOESSEL PHILIPP MUJICA FERNAUD TERESA VOGES FRANK BUESING ARNE		
发明人	MONTENEGRO, ELVIRA PARHAM, AMIR STOESSEL, PHILIPP MUJICA-FERNAUD, TERESA VOGES, FRANK BUESING, ARNE		
IPC分类号	C09K11/06 H01L51/50		
CPC分类号	C07C211/54 C07C211/58 C07C2 /91 C07D333/76 C09K11/06 C09K C09K2211/1088 C09K2211/1092 /5056 Y02E10/549 H01L51/006 He	K2211/1007 C09K2211/1011 C0 H01L51/0058 H01L51/0067 H0	1L51/0072 H01L51/5016 H01L51
优先权	2012000929 2012-02-14 EP 61/716810 2012-10-22 US PCT/EP2013/000177 2013-01-21	WO	
其他公开文献	EP3235892B1		
外部链接	<u>Espacenet</u>		

摘要(译)

本发明涉及式(1)的化合物,其适用于电子器件,特别是有机电致发光 器件,并涉及包含这些化合物的电子器件。

formula (1)