



(11)

EP 3 297 978 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

01.04.2020 Bulletin 2020/14

(51) Int Cl.:

C09K 11/06 ^(2006.01)

C07C 13/567 ^(2006.01)

C07C 13/72 ^(2006.01)

H01L 51/00 ^(2006.01)

H01L 51/50 ^(2006.01)

(21) Application number: **16721637.3**

(86) International application number:

PCT/EP2016/000672

(22) Date of filing: **27.04.2016**

(87) International publication number:

WO 2016/184540 (24.11.2016 Gazette 2016/47)

(54) MATERIALS FOR ORGANIC ELECTROLUMINESCENT DEVICES

MATERIALIEN FÜR ORGANISCHE ELEKTROLUMINESZENZVORRICHTUNGEN

MATÉRIAUX POUR DISPOSITIFS ÉLECTROLUMINESCENTS ORGANIQUES

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **HEIL, Holger**

60389 Frankfurt am Main (DE)

(30) Priority: **18.05.2015 EP 15001477**

(43) Date of publication of application:

28.03.2018 Bulletin 2018/13

(73) Proprietor: **Merck Patent GmbH**

64293 Darmstadt (DE)

(72) Inventors:

- **JOOSTEN, Dominik**
60487 Frankfurt (DE)
- **MAIER-FLAIG, Florian**
69469 Weinheim (DE)
- **HAYER, Anna**
64293 Darmstadt (DE)

(56) References cited:

EP-A1- 1 993 154

WO-A1-2015/046955

WO-A1-2016/013867

WO-A2-2008/147110

CN-A- 104 037 339

CN-B- 103 194 215

DE-A1-102009 053 644

JP-A- 2004 300 314

JP-A- 2011 082 238

KR-A- 20150 106 668

US-A1- 2011 187 266

US-A1- 2011 253 994

US-A1- 2011 303 908

US-A1- 2012 056 171

US-A1- 2012 061 714

US-A1- 2012 080 667

US-A1- 2013 221 335

US-A1- 2015 287 937

- **DATABASE REGISTRY [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; 10 May 2012 (2012-05-10), retrieved from STN Database accession no. 1373355-31-7**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to materials for organic semiconductors and to the use thereof in organic electronic devices.

[0002] Organic semiconductors are being developed for a number of different kinds of electronic application. The structure of organic electroluminescent devices (OLEDs) in which these organic semiconductors are used as functional materials is described, for example, in US 4539507, US 5151629, EP 0676461 and WO 98/27136. However, still further improvements are desirable for the use of these devices for high-quality and long-life displays. For instance, there is currently still a need for improvement especially in the lifetime and efficiency of solution-processed or at least partly solution-processed organic electroluminescent devices. An additional requirement is for the compounds to have sufficiently high solubility in standard organic solvents for processing from solution. More particularly, for use at elevated temperature, a high glass transition temperature is essential for the achievement of long lifetimes. Generally, further improvements in lifetime, efficiency and/or voltage are desirable. There is therefore still a need for improved materials, for example host materials for fluorescent and phosphorescent emitters, but further improvements are also desirable in the case of charge transport materials, i.e. hole and electron transport materials, and charge blocker materials. Specifically the properties of these materials are frequently limiting factors for the lifetime and efficiency of the organic electroluminescent device.


[0003] As closest prior art, WO 2009/124627 and WO 2011/060859 may be cited. WO 2009/124627 discloses 9,9-diphenylfluorene derivatives preferably substituted by two aryl groups on each of the two phenyl groups. The only structures explicitly disclosed are those each substituted in the 3' and 5' positions of the phenyl groups, i.e. in the two meta positions to the bond to the fluorene. There is no disclosure of structures substituted at only one of the meta positions. WO 2011/060859 discloses 9,9-diphenylfluorene derivatives preferably having at least one triazine structure. There is no explicit disclosure of structures substituted only in the 3' position and not comprising any triazine group. No significance is ascribed to substitution only in the 3' position.

[0004] US 2012/0061714 discloses fluorene compounds which are substituted in the 9-position with a dibenzofuran or dibenzothiophene group linked via one or more phenylene groups. JP 2011-082238 discloses dibenzofuran and dibenzothiophene derivatives which are substituted with at least one arylene-9-fluorenyl group. EP 1993154 discloses 9,9-diphenylfluorene derivatives which are substituted on the phenyl groups with phenanthroline groups. US 2013/0221335 discloses 9,9-diphenylfluorene derivatives which are substituted on one phenyl group with a substituted pyridine or pyrimidine group. WO 2008/147110 discloses asymmetric 9-phenylfluorene derivatives which are substituted with heteroaromatic groups or with aromatic amino groups. US 2012/0080667 discloses the compound 128, which is a 9,9-diphenylfluorene derivative which is substituted on one phenyl group with a phenylene-dibenzofuran group. US 2011/0253994 discloses 9,9-diphenylfluorene derivatives, which are substituted on the phenyl group with an arylene-heteroaryl group wherein the heteroaryl group is a five-membered ring, such as oxadiazole. US 2012/0056171 discloses 9,9-diphenylfluorene derivatives, which are substituted on one phenyl group with a six-membered heteroaryl group, such as pyrimidine, and on the other phenyl group with a diarylamino group. WO 2015/046955 discloses 9,9-diphenylfluorene derivatives, which are substituted on one phenyl group with a phenylene-diarylamino group and which contain a benzothiophene group condensed to the fluorene structure. CN 103194215 discloses 9,9-diphenylfluorene derivatives which are substituted on one phenyl group with a tetraphenyl-ethene group. CN 104037339 discloses 9,9-diphenylfluorene derivatives which are substituted on one phenyl group as well as on the fluorene group with diarylamino groups.


[0005] It has been found that, surprisingly, 9,9-diphenylfluorene derivatives each substituted in the 3' position on at least one phenyl group, preferably on both phenyl groups, are of very good suitability for use in organic electroluminescent devices and lead to distinct improvements over the prior art therein. The present invention therefore provides these compounds and for the use thereof in organic electronic devices.

[0006] According to the substitution on the phenyl groups, the compounds of the invention are especially suitable as hole transport materials, electron or exciton blocker materials, matrix materials for fluorescent or phosphorescent compounds, hole blocker materials and electron transport materials. Materials of the invention enable an increase in the efficiency and/or an increase in the lifetime of the organic electronic device compared to materials according to the prior art. Moreover, these compounds have high thermal stability. Generally, these materials are of very good suitability for use in organic electronic devices, since they have a high glass transition temperature. In addition, these compounds have a high solubility in organic solvents and are therefore of good suitability for processing from solution.

[0007] For the sake of clarity, the structure and numbering of 9,9-diphenylfluorene is shown below:



[0008] The invention thus provides compounds comprising at least one structure of the formula (III)

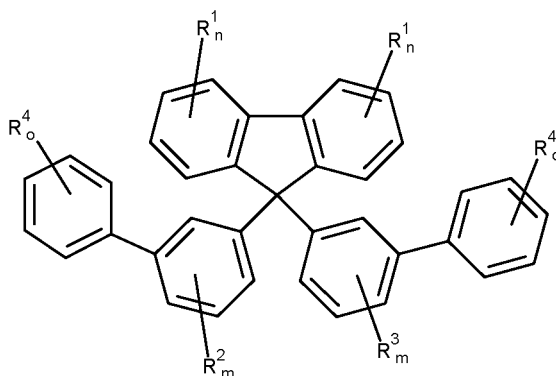

Formula (III)

where the symbols used are as follows:

R^1 , R^2 , R^3 , R^4 is the same or different at each instance and is H, D, F, $\text{Si}(\text{R}^5)_3$, a straight-chain alkyl or alkoxy group having 1 to 40 carbon atoms or a branched or cyclic alkyl or alkoxy group having 3 to 40 carbon atoms, each of which may be substituted by one or more R^5 radicals, where one or more nonadjacent CH_2 groups may be replaced by -O- and where one or more hydrogen atoms may be replaced by D or F, or an aromatic ring system which has 5 to 40 aromatic ring atoms and may be substituted in each case by one or more R^5 radicals, or a combination of these systems; at the same time, it is also possible for two or more adjacent R^1 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system; at the same time, it is also possible for two or more adjacent R^2 substituents together to form a mono- or polycyclic, aliphatic ring system; at the same time, it is also possible for two or more adjacent R^3 substituents together to form a mono- or polycyclic, aliphatic ring system; at the same time, it is also possible for two or more adjacent R^4 substituents together to form a mono- or polycyclic, aliphatic ring system;

R^5 is the same or different at each instance and is H, D, F, $\text{Si}(\text{R}^6)_3$, a straight-chain alkyl or alkoxy group having 1 to 40 carbon atoms or a branched or cyclic alkyl or alkoxy group having 3 to 40 carbon atoms, each of which may be substituted by one or more R^6 radicals, where one or more nonadjacent CH_2 groups may be replaced by -O- and where one or more hydrogen atoms may be replaced by D or F, or an aromatic ring system which has 5 to 40 aromatic ring atoms and may be substituted in each case by one or more R^6 radicals, or a combination of these systems; at the same time, it is also possible for two or more adjacent R^5 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system;

R^6 is the same or different at each instance and is H, D, F or an aliphatic and/or aromatic hydrocarbyl radical having 1 to 20 carbon atoms, in which hydrogen atoms may also be replaced by F; at the same time, it is also possible for two or more adjacent R^6 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system;

m is independently 0 or 1, where the sum total of the indices m is not more than 1;

n is independently 0, 1, 2, 3 or 4;

o is independently 0, 1, 2, 3, 4 or 5;

with the proviso that

the R² radicals and the R⁴ radicals comprise a total of at least 12 aromatic carbon ring atoms.

[0009] An aryl group in the context of this invention contains 6 to 60 carbon atoms; a heteroaryl group in the context of this invention contains 2 to 60 carbon atoms and at least 1 heteroatom, with the proviso that the sum total of carbon atoms and heteroatoms is at least 5. The heteroatoms are preferably selected from N, O and/or S. An aryl group or heteroaryl group is understood here to mean either a simple aromatic cycle, i.e. benzene, or a simple heteroaromatic cycle, for example pyridine, pyrimidine, thiophene, or a fused aryl or heteroaryl group, for example naphthalene, anthracene, pyrene, quinoline, isoquinoline. An aromatic ring system in the context of this invention contains 6 to 60 carbon atoms in the ring system. A heteroaromatic ring system in the context of this invention contains 2 to 60 carbon atoms and at least one heteroatom in the ring system, with the proviso that the sum total of carbon atoms and heteroatoms is at least 5. The heteroatoms are preferably selected from N, O and/or S. An aromatic or heteroaromatic ring system in the context of this invention is understood to mean a system which does not necessarily contain only aryl or heteroaryl groups, but in which it is also possible for two or more aryl or heteroaryl groups to be interrupted by a short nonaromatic unit (preferably less than 10% of the atoms other than H), for example an sp³-hybridized carbon, nitrogen or oxygen atom. For example, systems such as 9,9'-spirobifluorene, 9,9-diarylfuorene, triarylamine, diaryl ether, stilbene, benzophenone, shall also be regarded as aromatic ring systems in the context of this invention. An aromatic or heteroaromatic ring system is likewise understood to mean systems in which two or more aryl or heteroaryl groups are joined to one another by single bonds, for example biphenyl, terphenyl or bipyridine.

[0010] In the context of the present invention, a C₁- to C₄₀-alkyl group in which individual hydrogen atoms or CH₂ groups may also be replaced by the abovementioned groups is more preferably understood to mean methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, s-butyl, t-butyl, 2-methylbutyl, n-pentyl, s-pentyl, cyclopentyl, n-hexyl, cyclohexyl, n-heptyl, cycloheptyl, n-octyl, cyclooctyl, 2-ethylhexyl, trifluoromethyl, pentafluoroethyl and 2,2,2-trifluoroethyl. In the context of this invention, an alkenyl group is especially understood to mean ethenyl, propenyl, butenyl, pentenyl, cyclopentenyl, hexenyl, cyclohexenyl, heptenyl, cycloheptenyl, octenyl and cyclooctenyl. In the context of this invention, an alkynyl group is especially understood to mean ethynyl, propynyl, butynyl, pentynyl, hexynyl, heptynyl or octynyl. A C₁- to C₄₀-alkoxy group is more preferably understood to mean methoxy, trifluoromethoxy, ethoxy, n-propoxy, i-propoxy, n-butoxy, i-butoxy, s-butoxy, t-butoxy or 2-methylbutoxy. An aromatic or heteroaromatic ring system which has 5-60 aromatic ring atoms and may also be substituted in each case by the R radicals as defined above and which may be joined to the aromatic or heteroaromatic system via any desired positions is especially understood to mean groups derived from benzene, naphthalene, anthracene, phenanthrene, benzanthracene, pyrene, chrysene, perylene, fluoranthene, naphthacene, pentacene, benzopyrene, biphenyl, biphenylene, terphenyl, terphenylene, fluorene, spirobifluorene, dihydrophenanthrene, dihydropyrene, tetrahydropyrene, cis- or trans-indenofluorene, truxene, isotruxene, spirotruxene, spiroisotruxene, furan, benzofuran, isobenzofuran, dibenzofuran, thiophene, benzothiophene, isobenzothiophene, dibenzothiophene, pyrrole, indole, isoindole, carbazole, pyridine, quinoline, isoquinoline, acridine, phenanthridine, benzo-5,6-quinoline, benzo-6,7-quinoline, benzo-7,8-quinoline, phenothiazine, phenoxazine, pyrazole, indazole, imidazole, benzimidazole, naphthimidazole, phenanthrimidazole, pyridimidazole, pyrazinimidazole, quinoxalinimidazole, oxazole, benzoxazole, naphthoxazole, anthroxazole, phenanthroxazole, isoxazole, 1,2-thiazole, 1,3-thiazole, benzothiazole, pyridazine, benzopyridazine, pyrimidine, benzopyrimidine, quinoxaline, 1,5-diazaanthracene, 2,7-diazapyrene, 2,3-diazapyrene, 1,6-diazapyrene, 1,8-diazapyrene, 4,5-diazapyrene, 4,5,9,10-tetraazaperylene, pyrazine, phenazine, phenoxazine, phenothiazine, fluorubine, naphthyridine, azacarbazole, benzocarboline, phenanthroline, 1,2,3-triazole, 1,2,4-triazole, benzotriazole, 1,2,3-oxadiazole, 1,2,4-oxadiazole, 1,2,5-oxadiazole, 1,3,4-oxadiazole, 1,2,3-thiadiazole, 1,2,4-thiadiazole, 1,2,5-thiadiazole, 1,3,4-thiadiazole, purine, pteridine, indolizine and benzothiadiazole.

[0011] It may preferably be the case that the compound comprising at least one structure of the formula (III) comprises at least one R² radical which is an aromatic ring system having 5 to 40 aromatic ring atoms.

[0012] The compound of formula (III) comprises a total of not more than two R² and/or R³ groups comprising an aromatic ring system, which includes possible R⁵ or R⁶ substituents, and so a total of not more than two R² and/or R³ radicals including the R⁵ or R⁶ substituents present on these R², R³ radicals comprise an aromatic ring system.

[0013] In a preferred configuration, compounds comprising structures of formula (III) can be represented by structures of the formula (III). Preferably, compounds comprising structures of formula (III) have a molecular weight of not more than 5000 g/mol, preferably not more than 4000 g/mol, particularly preferably not more than 3000 g/mol, especially preferably not more than 2000 g/mol and most preferably not more than 1200 g/mol.

[0014] In addition, it is a feature of preferred compounds of the invention that they are sublimable. These compounds generally have a molar mass of less than about 1200 g/mol.

[0015] In addition, it is a feature of preferred compounds of the invention that they have a high solubility in standard organic solvents, preferably a solubility of ≥ 10 mg/ml in toluene.

[0016] It may further be the case that compounds comprising structures of formula (III) have preferably not more than 5 heteroatoms, preferably not more than 3 heteroatoms, more preferably not more than one heteroatom and especially preferably no heteroatom, apart from fluorine.

[0017] Especially preferably, a compound comprising structures of formula (III), or a compound of formula (III), is a hydrocarbon or a fluorinated hydrocarbon, preferably a hydrocarbon.

[0018] It may further be the case that a compound comprising structures of formula (III), or a compound of formula (III), is symmetric in relation to the mirror plane defined by the fluorene group. The mirror plane defined by the fluorene group encompasses all the carbon atoms of the fluorene group, and so the phenyl groups bonded to the carbon atom in the 9 position of the fluorene group have identical substitution.

[0019] In a further preferred embodiment, a compound comprising structures of formula (III), or a compound of formula (III), is unsymmetric in relation to the mirror plane defined by the fluorene group. Accordingly, the phenyl groups bonded in the 9 position of the fluorene group preferably do not have identical substitution.

[0020] Preferably, the sum total of the indices n in formula (III) may be not more than 2, more preferably not more than 1, this sum total especially preferably being 0. The sum total of the indices m in formula (III) is preferably 0, and so the phenyl radicals bonded to the fluorene group preferably do not comprise any additional substituents.

[0021] It may further be the case that the sum total of the indices o in formula (III) is at least 2, preferably 2, 3 or 4.


[0022] It may further be the case that the R¹ radicals in formula (III) do not form a fused ring system with the ring atoms of the fluorene structure. This also rules out the formation of a fused ring system with possible R⁵, R⁶ substituents which may be bonded to the R¹ radicals.

[0023] Preferably, the R² radicals in formula (III) do not form a fused ring system with the ring atoms of the phenyl group to which the R² radicals are bonded. This also rules out the formation of a fused ring system with possible R⁵, R⁶ substituents which may be bonded to the R² radicals.

[0024] In a further preferred configuration, the R³ radicals in formula (III) do not form a fused ring system with the ring atoms of the phenyl group to which the R³ radicals are bonded. This also rules out the formation of a fused ring system with possible R⁵, R⁶ substituents which may be bonded to the R³ radicals.

[0025] In addition, preference is given to compounds which can be represented by a structure of the formula (III) which are characterized in that the R⁴ radicals in formula (III) do not form a fused ring system with the ring atoms of the phenyl group to which the R⁴ radicals are bonded. This also rules out the formation of a fused ring system with possible R⁵, R⁶ substituents which may be bonded to the R⁴ radicals.

[0026] In addition, particular preference is given to compounds which can be represented by a structure of the formula (IV)

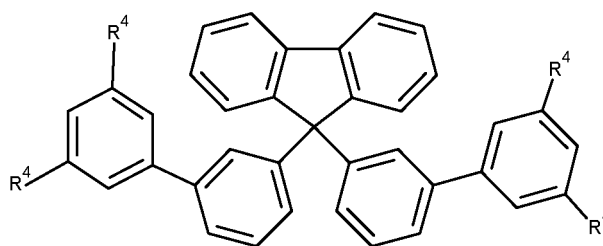


Formula (IV)

where the R⁴ symbol used is as defined above, especially for formula (III). More preferably, the R⁴ radicals do not have any heteroatom. Especially preferably, the R⁴ radical may be an aromatic ring system, especially an aryl radical, or H.


[0027] In addition, preference is given to compounds which can be represented by a structure of the formula (IV) which are characterized in that the R⁴ radicals in formula (IV) do not form a fused ring system with the ring atoms of the phenyl group to which the R⁴ radicals are bonded. This also rules out the formation of a fused ring system with possible R⁵, R⁶ substituents which may be bonded to the R⁴ radicals.

[0028] Preferably, a compound which can be represented by a structure of formula (III) and/or (IV) is a hydrocarbon or a fluorinated hydrocarbon, preferably a hydrocarbon.


[0029] It may especially be the case that, in the structure of formula (III) and/or (IV), at least one R¹, R², R³ and/or R⁴ radical is a group selected from the formulae (R¹-1) to (R¹-37) or (R¹-42) to (R¹-45)




Formula (R¹-1)




Formula (R¹-2)




Formula (R¹-3)




Formula (R¹-4)




Formula (R¹-5)




Formula (R¹-6)




Formula (R¹-7)




Formula (R¹-8)




Formula (R¹-9)



Formula (R¹-10)



Formula (R¹-11)




Formula (R¹-12)


5

10


15

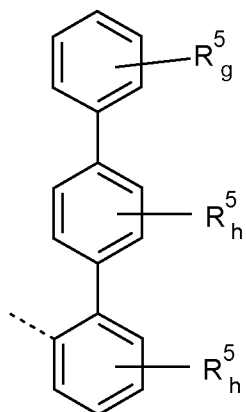

Formula (R¹-13)



Formula (R¹-14)

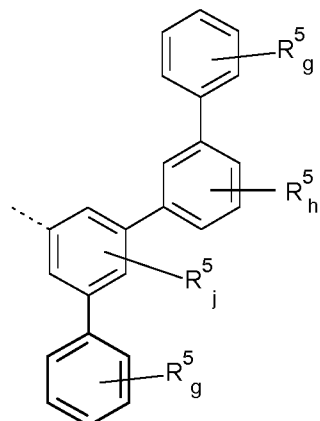


Formula (R¹-15)


20

25


30

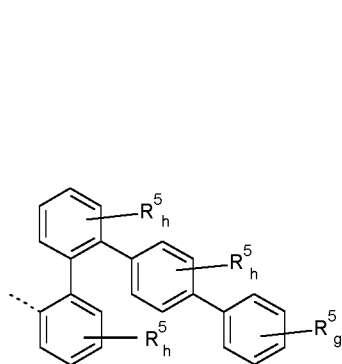

Formula (R¹-16)

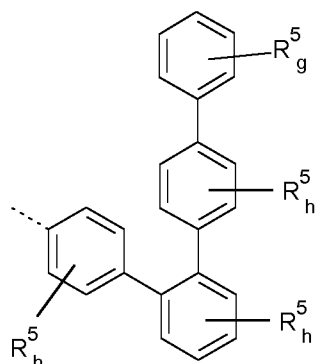

Formula (R¹-17)

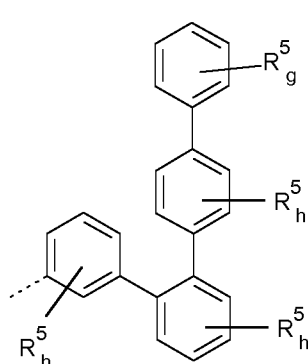


Formula (R¹-18)


35

40


45

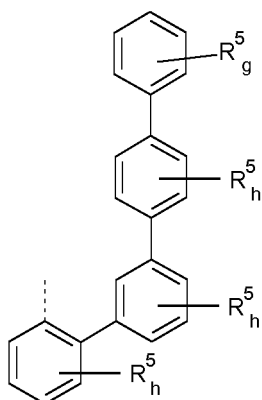

Formula (R¹-19)




Formula (R¹-20)




Formula (R¹-21)

50


55




Formula (R¹-22)




Formula (R¹-23)




Formula (R¹-24)




Formula (R¹-25)




Formula (R¹-26)




Formula (R¹-27)




Formula (R¹-28)




Formula (R¹-29)




Formula (R¹-30)











Formula (R¹-31)



Formula (R¹-32)



Formula (R¹-33)

Formula (R¹-34)Formula (R¹-35)Formula (R¹-36)Formula (R¹-37)Formula (R¹-42)Formula (R¹-43)Formula (R¹-44)Formula (R¹-45)

where the symbols used are as follows:

- j independently at each instance is 0, 1, 2 or 3;
 h independently at each instance is 0, 1, 2, 3 or 4;
 g independently at each instance is 0, 1, 2, 3, 4 or 5;
 the dotted bond marks the attachment position; and
 R⁵ is as defined above, especially for formula (III).

[0030] More preferably, at least two of and especially preferably all of the R¹, R², R³ and/or R⁴ radicals in the structure of formula (III) and/or (IV) are H, D, F, an aliphatic hydrocarbon radical which has 1 to 20 carbon atoms and in which hydrogen atoms may also be replaced by F, or a group selected from the formulae (R¹-1) to (R¹-37) or (R¹-42) to (R¹-45).

[0031] Among the groups of the formulae (R¹-1) to (R¹-37) and (R¹-42) to (R¹-45) mentioned, particular preference

is further given to the groups of the formulae (R¹-1) to (R¹-33) and (R¹-42) to (R¹-45). Very particular preference is given to the groups of the formulae (R¹-1), (R¹-3), (R¹-5), (R¹-6), (R¹-15), (R¹-29), (R¹-31), (R¹-32), (R¹-42), (R¹-43), (R¹-44) and/or (R¹-45).


[0032] It may further be the case that the sum total of the indices g, h and j in the structures of the formula (R¹-1) to (R¹-37) and (R¹-42) to (R¹-45) is not more than 3 in each case, preferably not more than 2 and more preferably not more than 1. Most preferably, the sum total of the indices g, h and j in each of the structures of the formula (R¹-1) to (R¹-37) and (R¹-42) to (R¹-45) is 0.

[0033] It may especially be the case that, in the structure of formula (III) and/or (IV), at least one R⁵ radical is a group selected from aliphatic hydrocarbyl radicals having 1 to 20 carbon atoms and in which hydrogen atoms may also be replaced by F. In this context, the R⁵ radicals preferably do not comprise any R⁶ substituents.


[0034] It may further be the case that, in the structures of the formula (R¹-1) to (R¹-37) and (R¹-42) to (R¹-45), the R⁵ radical is H, F or a group selected from aliphatic hydrocarbyl radicals having 1 to 20 carbon atoms and in which hydrogen atoms may also be replaced by F. In this context, the R⁵ radicals preferably do not comprise any R⁶ substituents.

[0035] In a particular embodiment, a compound which can be represented by structures of formula (III) and/or (IV) has a glass transition temperature of at least 70°C, more preferably of at least 110°C, even more preferably of at least 125°C and especially preferably of at least 150°C, determined in accordance with DIN EN ISO 11357-1 and DIN EN ISO 11357-2.

[0036] Examples of preferred compounds of the formulae (III) to (IV) are the structures (1) to (46) depicted below.

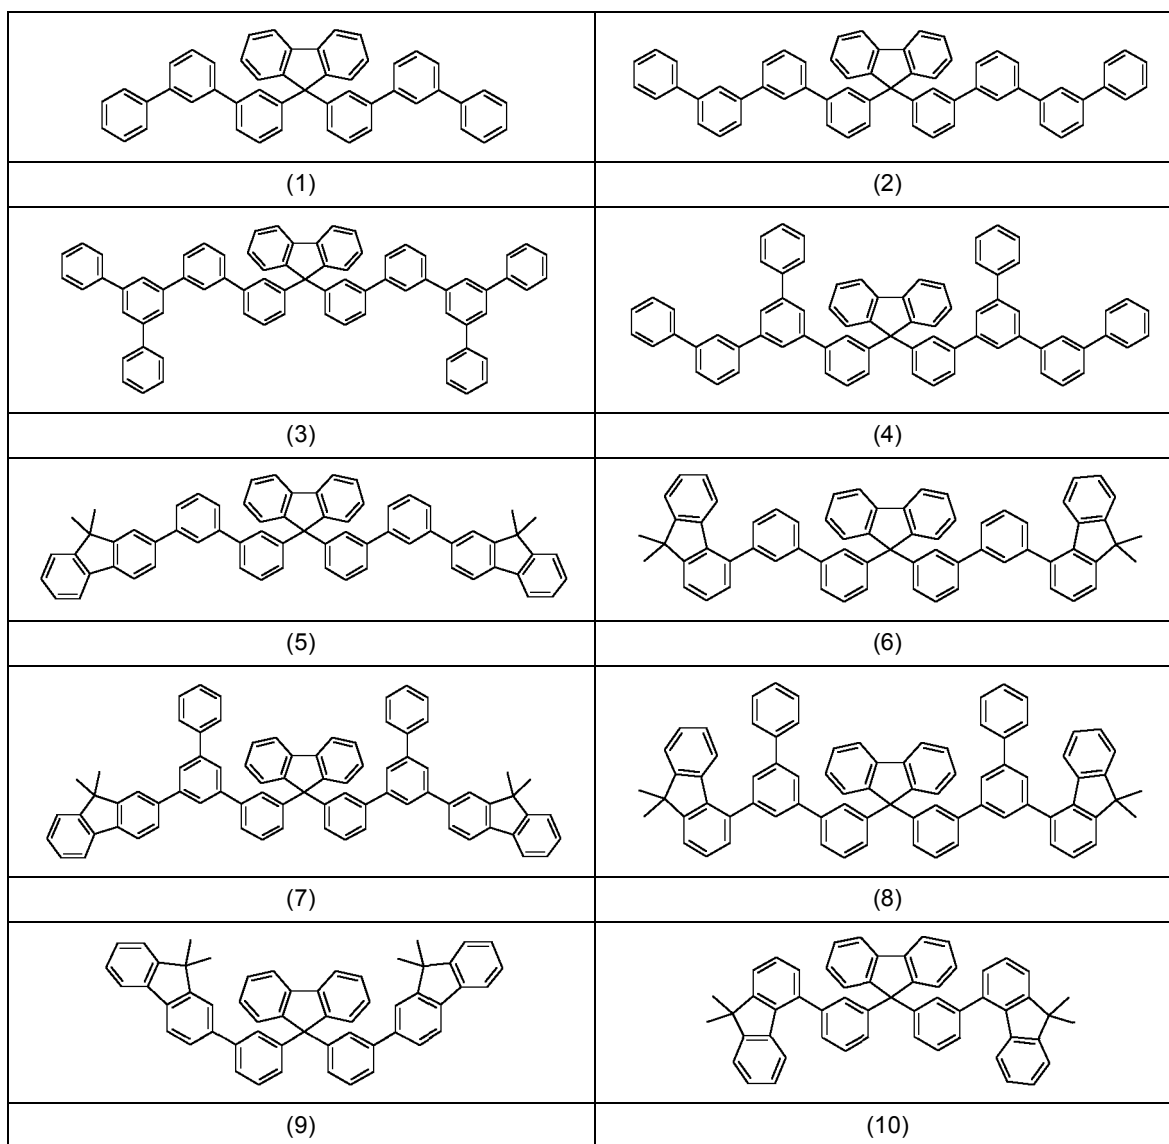

(continued)










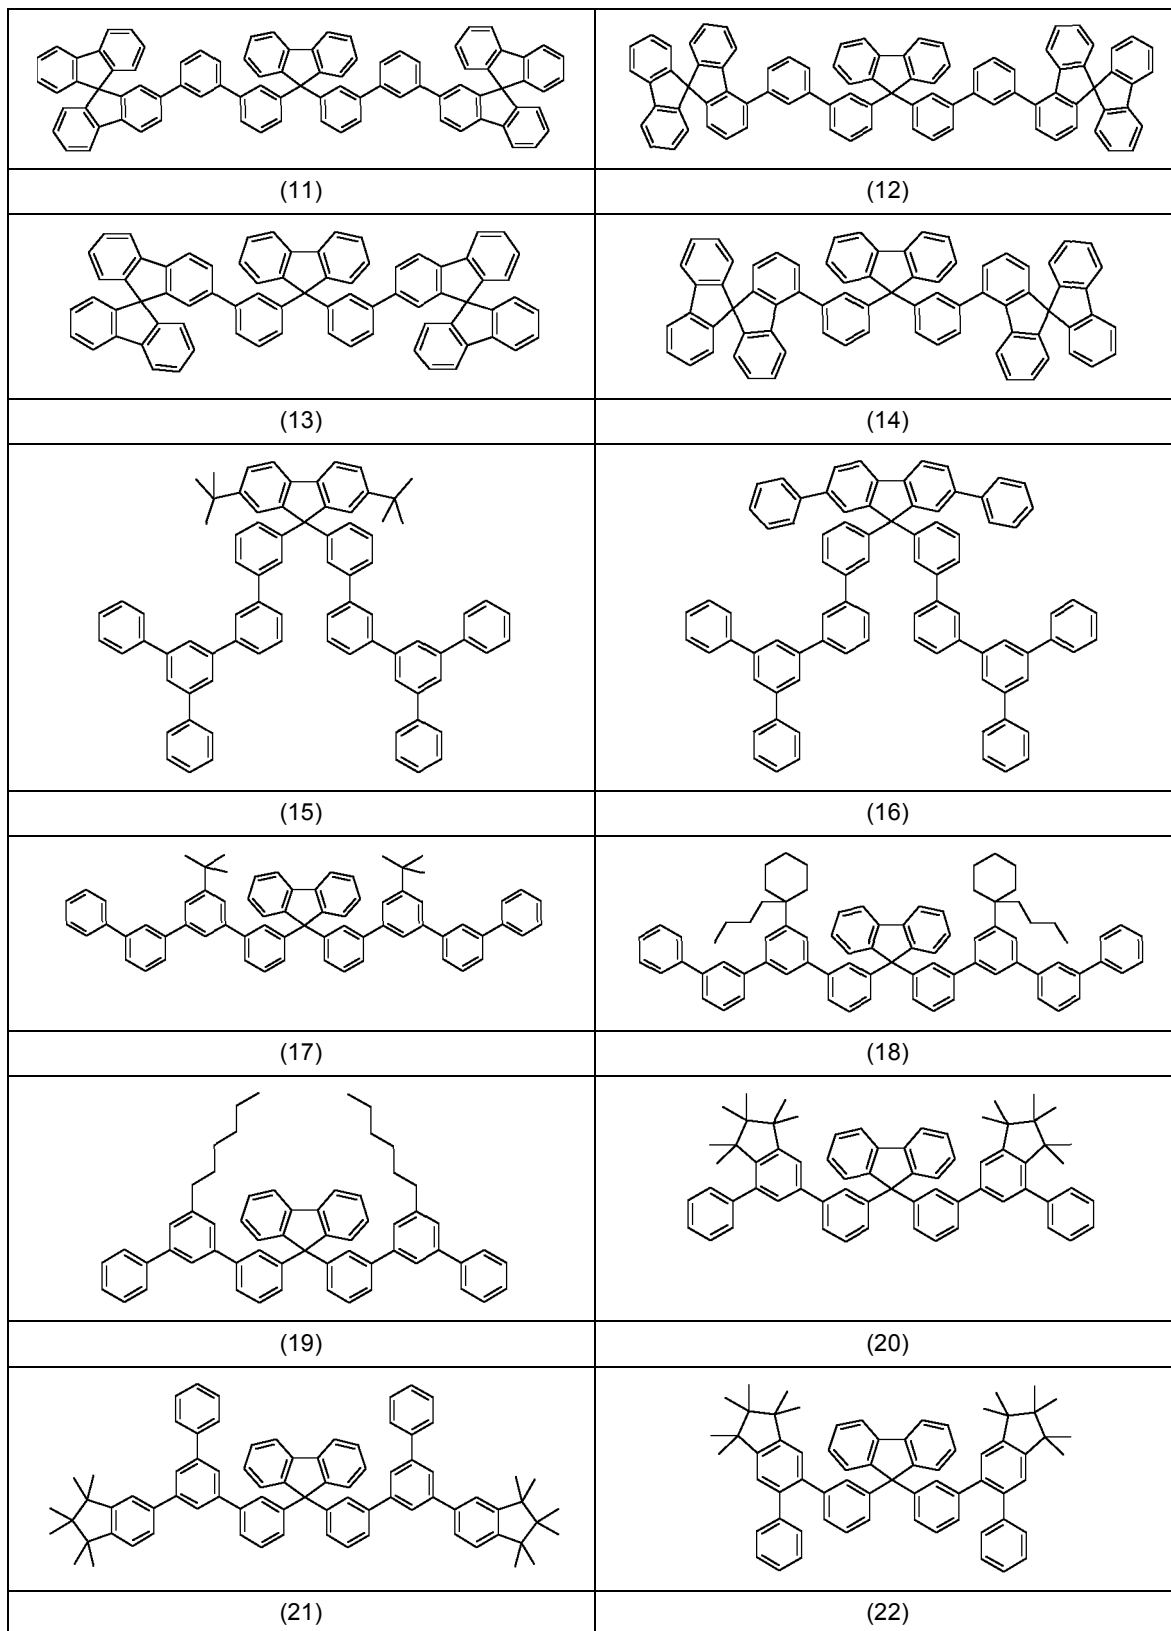


55


(continued)

5		
10	(23)	(24)
15		
20	(25)	(26)
25		
30	(27)	(28)
35		
40	(29)	(30)
45		
50	(31)	(32)
55		
	(33)	(34)

(continued)

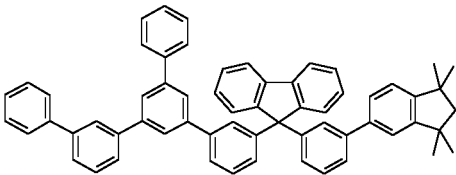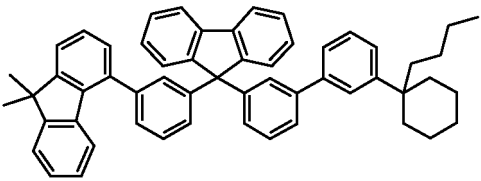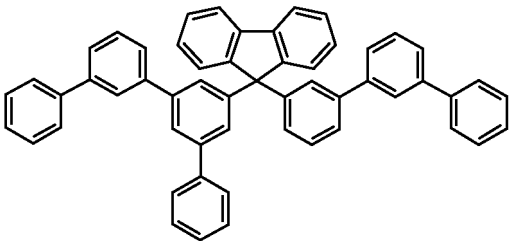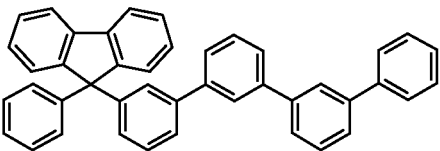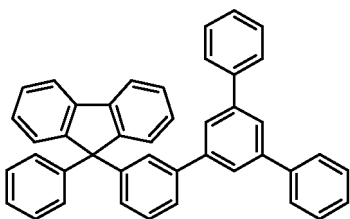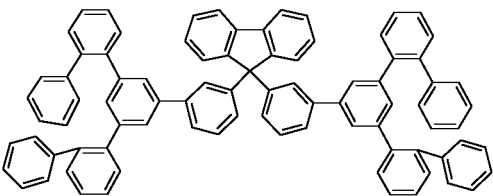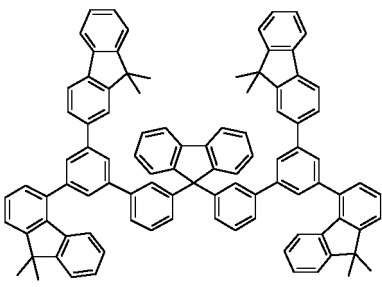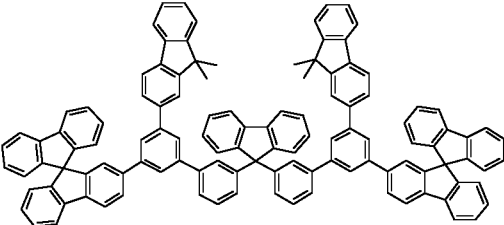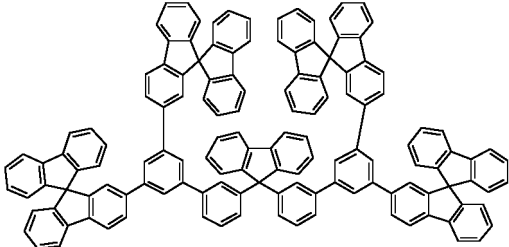5		
10	(35)	(36)
15		
20	(37)	(38)
25		
30	(39)	(40)
35		
40	(41)	(42)
45		
50	(43)	(44)
55		

(continued)

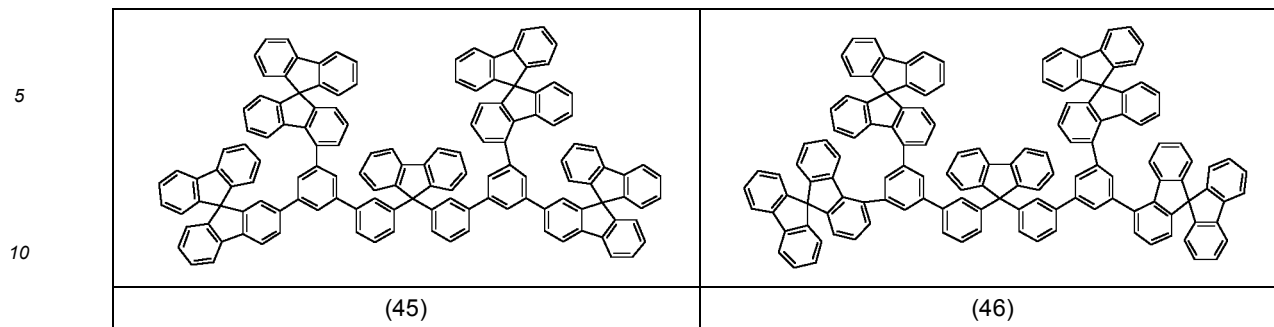

[0037] More preferably, a compound represented by structures of the formula (III) and/or formula (IV) may be a wide band gap material.

[0038] Preferably, a compound represented by structures of the formula (III) and/or formula (IV) may have a band gap of 2.5 eV or more, preferably 3.0 eV or more, very preferably of 3.5 eV or more. A "wide band gap" material in the context of the present invention refers to a material having a band gap of 3.0 eV or more. One way of calculating the band gap is via the energy levels of the highest occupied molecular orbital (HOMO) and the lowest unoccupied molecular orbital (LUMO).

[0039] The HOMO and LUMO energies and the triplet level and the singlet levels of the materials are determined via quantum-chemical calculations. For this purpose, in the present case, the "Gaussian09, Revision D.01" software package (Gaussian Inc.) is used. For calculation of organic substances without metals (referred to as the "org." method), a geometry optimization is first conducted by the semi-empirical method AM1 (Gaussian input line "# AM1 opt") with charge 0 and multiplicity 1. Subsequently, on the basis of the optimized geometry, a single-point energy calculation is effected for the electronic ground state and the triplet level. This is done using the TDDFT (time dependent density functional theory) method B3PW91 with the 6-31G(d) basis set (Gaussian input line "# B3PW91/6-31G(d) td=(50-50,nstates=4)") (charge 0, multiplicity 1). For organometallic compounds (referred to as the "M-org." method), the geometry is optimized by the Hartree-Fock method and the LanL2MB basis set (Gaussian input line "# HF/LanL2MB opt") (charge 0, multiplicity 1). The energy calculation is effected, as described above, analogously to that for the organic substances, except that the "LanL2DZ" basis set is used for the metal atom and the "6-31G(d)" basis set for the ligands (Gaussian input line "#B3PW91/gen pseudo=lanl2 td=(50-50,nstates=4)"). From the energy calculation, the HOMO is obtained as the last orbital occupied by two electrons (alpha occ. eigenvalues) and LUMO as the first unoccupied orbital (alpha virt. eigenvalues) in Hartree units, where HEh and LEh represent the HOMO energy in Hartree units and the LUMO energy in Hartree units respectively. This is used to determine the HOMO and LUMO value in electron volts, calibrated by cyclic voltammetry measurements, as follows:

$$\text{HOMO(eV)} = (\text{HEh} \cdot 27.212) \cdot 0.8308 - 1.118$$

$$\text{LUMO(eV)} = (\text{LEh} \cdot 27.212) \cdot 1.0658 - 0.5049$$

[0040] These values are to be regarded as HOMO and as LUMO of the materials in the context of this application. The magnitude of the difference between the two values is regarded as the band gap in the context of this application.

[0041] The triplet level T1 of a material is defined as the relative excitation energy (in eV) of the triplet state having the lowest energy which is found by the quantum-chemical energy calculation.

[0042] The singlet level S1 of a material is defined as the relative excitation energy (in eV) of the singlet state having the second-lowest energy which is found by the quantum-chemical energy calculation.


[0043] The energetically lowest singlet state is referred to as S0.

[0044] The method described herein is independent of the software package used. Examples of frequently utilized programs for this purpose are "Gaussian09" (Gaussian Inc.) and Q-Chem 4.1 (Q-Chem, Inc.). In the present case, the energies are calculated using the software package "Gaussian09, Revision D.01" with the pre-programmed set of parameters.

[0045] The compounds of the invention, represented by the formulae (III) or (IV), can be prepared by synthesis steps that are common knowledge to those skilled in the art. The starting compound used may, for example, be 3,3'-dibromobenzophenone (J. Mater. Chem. C 2014, 2028-2036). This can, for example, be converted according to Scheme 1 by reaction with a substituted or unsubstituted 2-lithiobiphenyl to give the corresponding triarylmethanols, which are then


cyclized under acidic conditions, for example in the presence of acetic acid and a mineral acid such as hydrogen bromide. The organolithium compounds required for this reaction can be prepared by transmetalation of the corresponding 2-bromobiphenyl compounds with alkyl lithium compounds such as n-butyllithium. In an analogous manner, it is of course possible to use corresponding Grignard compounds.

Scheme 1




[0046] The dibromides thus obtained can be converted further by methods known to those skilled in the art. For example, the palladium-catalysed reaction with boronic acids (Suzuki coupling) or the palladium-catalysed reaction with organotin compounds (Negishi coupling) leads to aromatic compounds of the invention. According to Scheme 2, by reaction of a dibromide with two equivalents, it is possible to prepare symmetrically substituted 9,9-diphenylfluorenes. According to Schemes 3 and 4, it is possible in an analogous manner to obtain mixtures of three products, one of which in each case is asymmetrically substituted with respect to the 9,9-diphenylfluorene. These mixtures can then be separated by chromatography.


Scheme 2

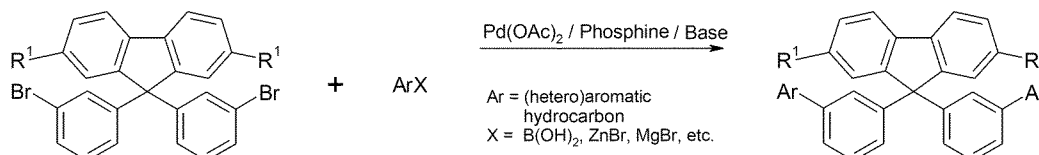


Scheme 3

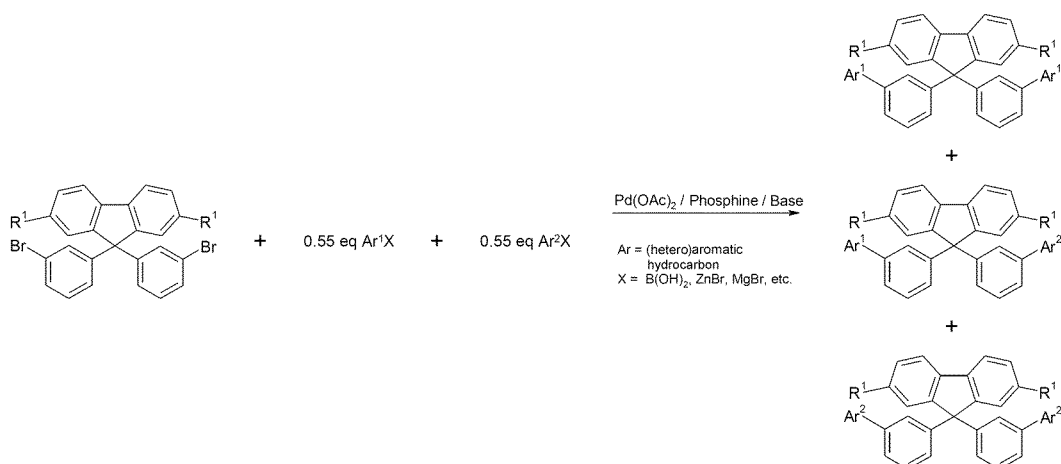

Scheme 4

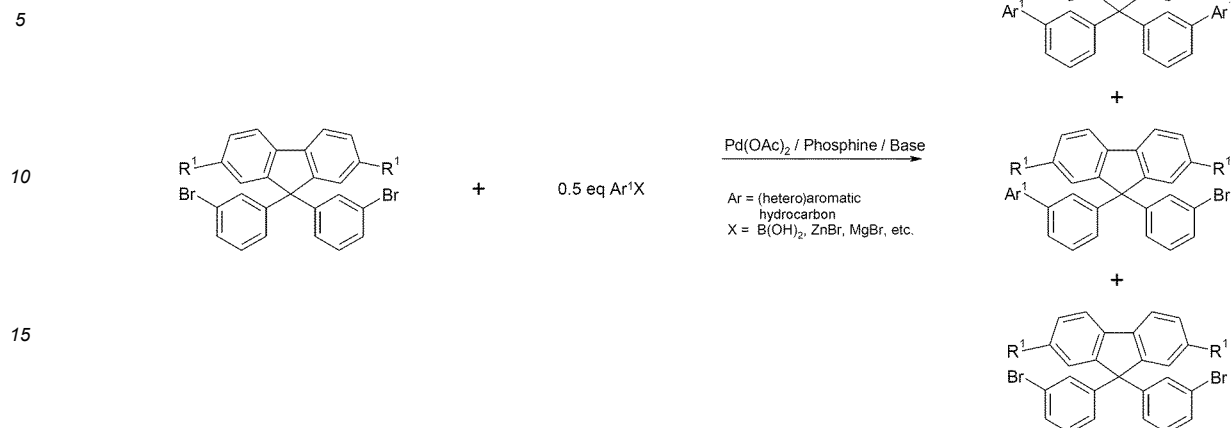

20 **[0047]** The monobromo compound formed according to Scheme 4 can be substituted further, for example, by another coupling reaction. In addition, it is possible to convert a remaining bromine group according to Scheme 5 to a hydrogen radical by transmetalation, for example with an organolithium compound such as *n*-butyllithium, and subsequent reaction with a proton source such as water.

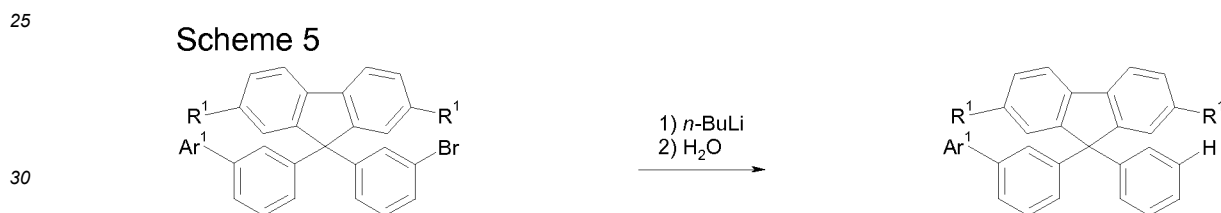

35 **[0048]** The invention further provides a process for preparing the compounds represented by the formulae (III) or (IV), comprising the reaction of 3,3'-dibromobenzophenone with a substituted or unsubstituted 2-lithiobiphenyl or the corresponding Grignard compound to give the triarylmethanols, followed by cyclization under acidic conditions and optionally followed by further conversion of the bromine groups.

40 **[0049]** The present invention still further provides a composition comprising a compound of the invention and at least one further organically functional material. The further organically functional material differs from the compounds of the invention. Functional materials are generally the organic or inorganic materials introduced between the anode and cathode. Preferably, the organically functional material is selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, electron transport materials, electron injection materials, hole conductor materials, hole injection materials, electron blocker materials and hole blocker materials.

45 **[0050]** The present invention further provides a composition comprising at least one compound comprising at least one structure of formula (III) or the preferred embodiments detailed above and hereinafter, and at least one emitter and at least one compound selected from the group consisting of electron transport materials and hole conductor materials. Emitters include fluorescent emitters and phosphorescent emitters, and it is also possible to use mixtures of fluorescent emitters and phosphorescent emitters. Preference is given to phosphorescent emitters.

50 **[0051]** The present invention still further provides solutions comprising at least one compound comprising at least one structure of formula (III) or the preferred embodiments and at least one organic solvent. Solutions of this kind are required for the production of the organic electronic device from solution, for example by spin-coating or by printing methods.

55 **[0052]** For this purpose, it may be preferable to use mixtures of two or more solvents. Suitable and preferred solvents are, for example, toluene, anisole, *o*-, *m*- or *p*-xylene, methyl benzoate, mesitylene, tetralin, veratrole, THF, methyl-THF, THP, chlorobenzene, dioxane, phenoxytoluene, especially 3-phenoxytoluene, (-)-fenchone, 1,2,3,5-tetramethylbenzene, 1,2,4,5-tetramethylbenzene, hexamethylindane, 1-methylnaphthalene, 2-methylbenzothiazole, 2-phenoxyethanol, 2-pyrrolidinone, 3-methylanisole, 4-methylanisole, 3,4-dimethylanisole, 3,5-dimethylanisole, acetophenone, α -terpineol, benzothiazole, butyl benzoate, cumene, cyclohexanol, cyclohexanone, cyclohexylbenzene, decalin, dodecylbenzene, ethyl benzoate, indane, methyl benzoate, NMP, *p*-cymene, phenetole, 1,4-diisopropylbenzene, dibenzyl ether, diethylene glycol butyl methyl ether, triethylene glycol butyl methyl ether, diethylene glycol dibutyl ether, triethylene glycol dimethyl

ether, diethylene glycol monobutyl ether, tripropylene glycol dimethyl ether, tetraethylene glycol dimethyl ether, 2-isopropylnaphthalene, pentybenzene, hexylbenzene, heptylbenzene, octylbenzene, 1,1-bis(3,4-dimethylphenyl)ethane or mixtures of these solvents.

[0053] The present invention therefore further provides a formulation comprising at least one compound comprising at least one structure of formula (III) or as per the preferred embodiments and one or more solvents, especially organic solvents. This formulation preferably comprises solutions, suspensions or miniemulsions, especially solutions. The way in which such solutions can be prepared is known to those skilled in the art and is described, for example, in WO 02/072714, WO 03/019694 and the literature cited therein.

[0054] The compounds of the invention, comprising at least one structure of formula (III) or as per the preferred embodiments, are suitable for use in electronic devices, especially in organic electroluminescent devices (OLEDs, PLEDs). Depending on the substitution, the compounds are used in different functions and layers. In this case, the preferred embodiments correspond to the abovementioned formulae.

[0055] The invention therefore further provides for the use of compounds represented by structures of formula (III) and/or (IV) in electronic devices, especially in organic electroluminescent devices.

[0056] The invention still further provides for the use of compounds represented by structures of formula (III) and/or (IV) in electronic devices, especially in organic electroluminescent devices, especially as a wide band gap material.

[0057] The invention further provides an electronic device comprising at least one compound represented by structures of formula (III) and/or (IV), wherein the electronic device is preferably selected from the group consisting of organic electroluminescent devices (OLEDs, PLEDs), organic field-effect transistors (O-FETs), organic thin-film transistors (O-TFTs), organic light-emitting transistors (O-LETs), organic integrated circuits (O-ICs), organic solar cells (O-SCs), organic field-quench devices (O-FQDs), light-emitting electrochemical cells (LECs), organic laser diodes (O-lasers) or organic photoreceptors.

[0058] The invention still further provides organic electronic devices comprising at least one compound represented by structures of formula (III) and/or (IV), especially organic electroluminescent devices comprising anode, cathode and at least one emitting layer, characterized in that at least one organic layer which may be an emitting layer or another layer comprises at least one compound represented by structures of formula (III) and/or (IV).

[0059] In addition, the invention further provides an organic electroluminescent device comprising an emitting layer comprising at least one compound of the invention represented by formulae (III) and/or (IV), and at least one phosphorescent emitter and at least one matrix material which differs from the compounds of the invention. Preferably, the further matrix material may be a hole- and/or electron-conducting matrix material, it being particularly preferable to use a "bipolar" matrix material having both hole-conducting and electron-conducting properties. More preferably, the compound of the invention has the properties of a wide band gap material and the further matrix material is hole- and/or electron-conducting.

[0060] Apart from the cathode, anode and emitting layer, the organic electroluminescent device may also comprise further layers. These are selected, for example, from in each case one or more hole injection layers, hole transport layers, hole blocker layers, electron transport layers, electron injection layers, electron blocker layers, exciton blocker layers, charge generation layers (IDMC 2003, Taiwan; Session 21 OLED (5), T. Matsumoto, T. Nakada, J. Endo, K. Mori, N. Kawamura, A. Yokoi, J. Kido, Multiphoton Organic EL Device Having Charge Generation Layer) and/or organic or inorganic p/n junctions. In addition, the layers, especially the charge transport layers, may also be doped. The doping of the layers may be advantageous for improved charge transport. However, it should be pointed out that not every one of these layers need necessarily be present and the choice of layers always depends on the compounds used and especially also on whether the device is a fluorescent or phosphorescent electroluminescent device.

[0061] In a further preferred embodiment of the invention, the organic electroluminescent device comprises two or more emitting layers, at least one organic layer comprising at least one compound comprising at least one structure of formula (III) or one of the preferred compounds detailed above. More preferably, these emission layers have several emission maxima between 380 nm and 750 nm overall, such that the overall result is white emission; in other words, various emitting compounds which may fluoresce or phosphoresce and which emit blue and yellow, orange or red light are used in the emitting layers. Especially preferred are three-layer systems, i.e. systems having three emitting layers, where at least one of these layers comprises at least one compound comprising at least one structure of formula (III) and where the three layers show blue, green and orange or red emission (for the basic construction see, for example, WO 05/011013). Emitters likewise suitable for white emission are those which have broad emission bands and as a result exhibit white emission.

[0062] In a preferred embodiment of the invention, the compounds comprising at least one structure of formula (III) or as per the preferred embodiments are used as matrix material for fluorescent or phosphorescent compounds in an emitting layer. In a matrix material for fluorescent compounds, preferably one or more R¹, R², R³ and/or R⁴ groups are an aromatic or heteroaromatic ring system, especially an aromatic ring system containing anthracene. The same preferences apply to the R¹, R², R³ and/or R⁴ groups in structures of the abovementioned formulae.

[0063] A matrix material in a system composed of matrix and dopant is understood to mean that component present in a higher proportion in the system. In a system composed of a matrix and two or more dopants, the matrix is understood


to mean that component having the highest proportion in the mixture.

[0064] In a preferred embodiment of the invention, the matrix used is a mixture, wherein at least one component of this mixture is a compound of the formula (III) or as per the preferred embodiments. Preferably, one component of this mixture is a hole transport compound and the other an electron transport compound. Preferred hole transport compounds

[0065] In one embodiment, the compound comprising at least one structure of formula (III) or as per the preferred embodiments is used as the sole matrix material in the mixture with the emitter. In a further embodiment of the invention, the compound comprising at least one structure of formula (III) or as per the preferred embodiments is used in the form of a mixture together with a further matrix material and an emitter. Preferably, one component of this mixture of matrix materials is a hole transport compound and the other an electron transport compound. Especially preferably, one component of this mixture of matrix materials comprises a wide band gap material comprising at least one structure of formula (III) or as per the preferred embodiments.

[0066] Preferred electron-conducting compounds which can be used together with a compound comprising at least one structure of formula (III) include those described in WO 2014/094964, particularly preferred electron-conducting compounds having a LUMO of ≤ -2.4 eV.

[0067] Examples of suitable electron-conducting compounds having a LUMO ≤ -2.4 eV are the compounds depicted in the following table:

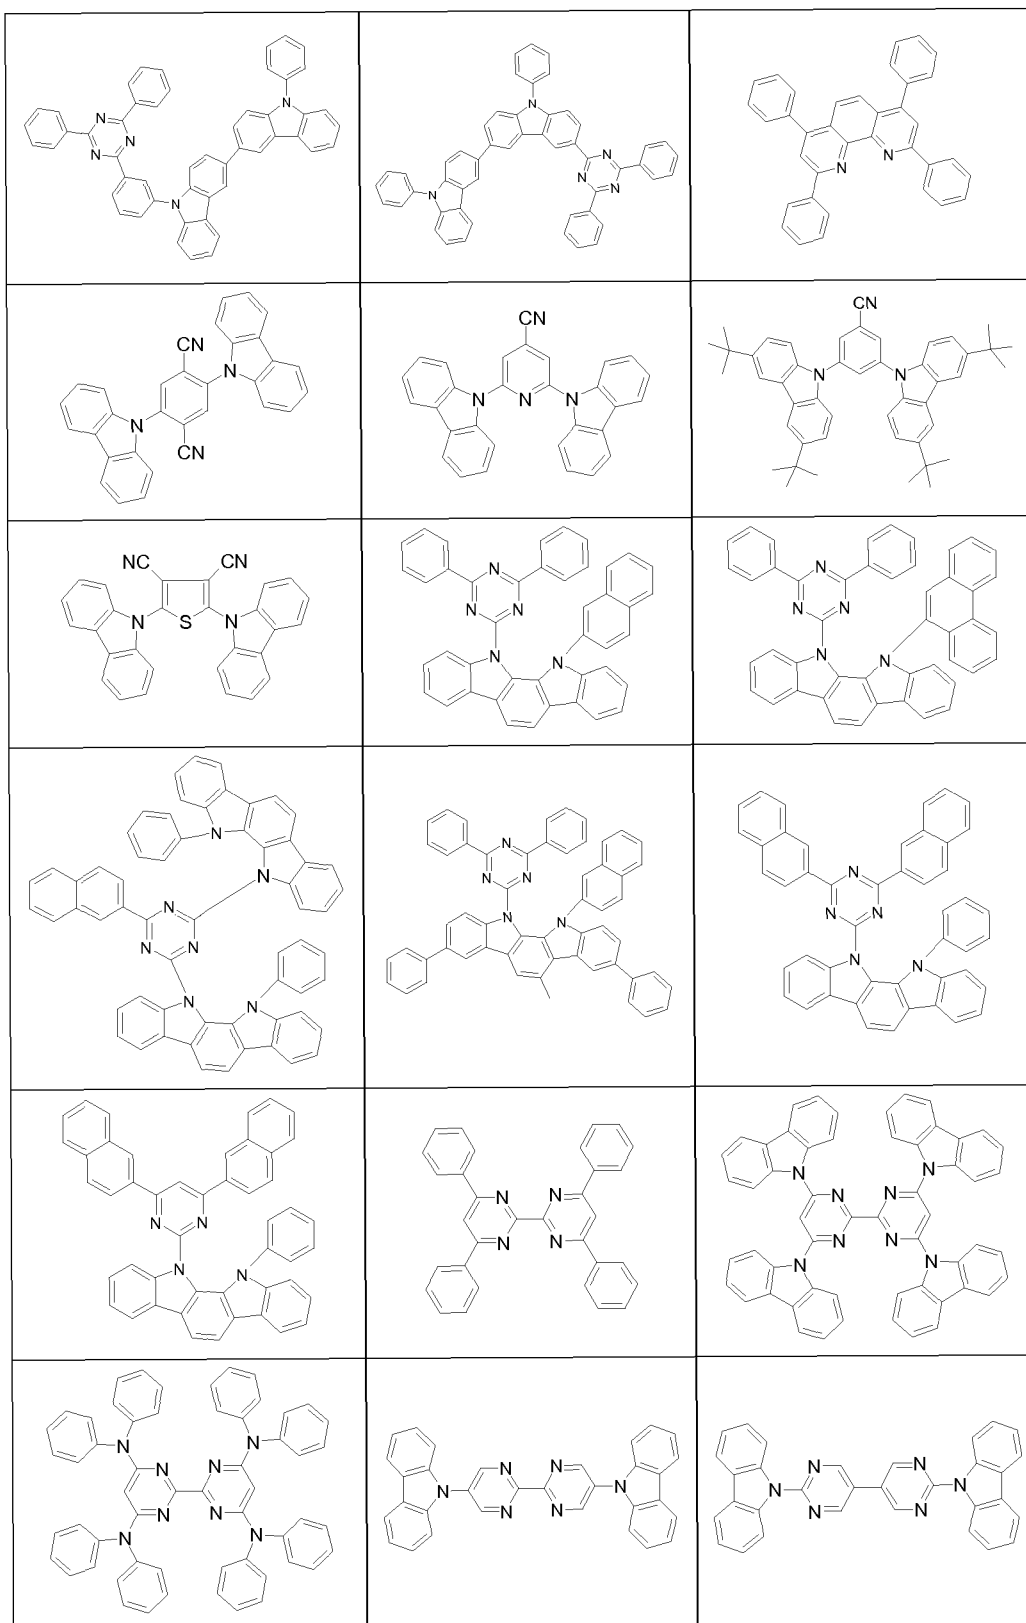

5

10

15

20

25

30


35

40

45

50

55

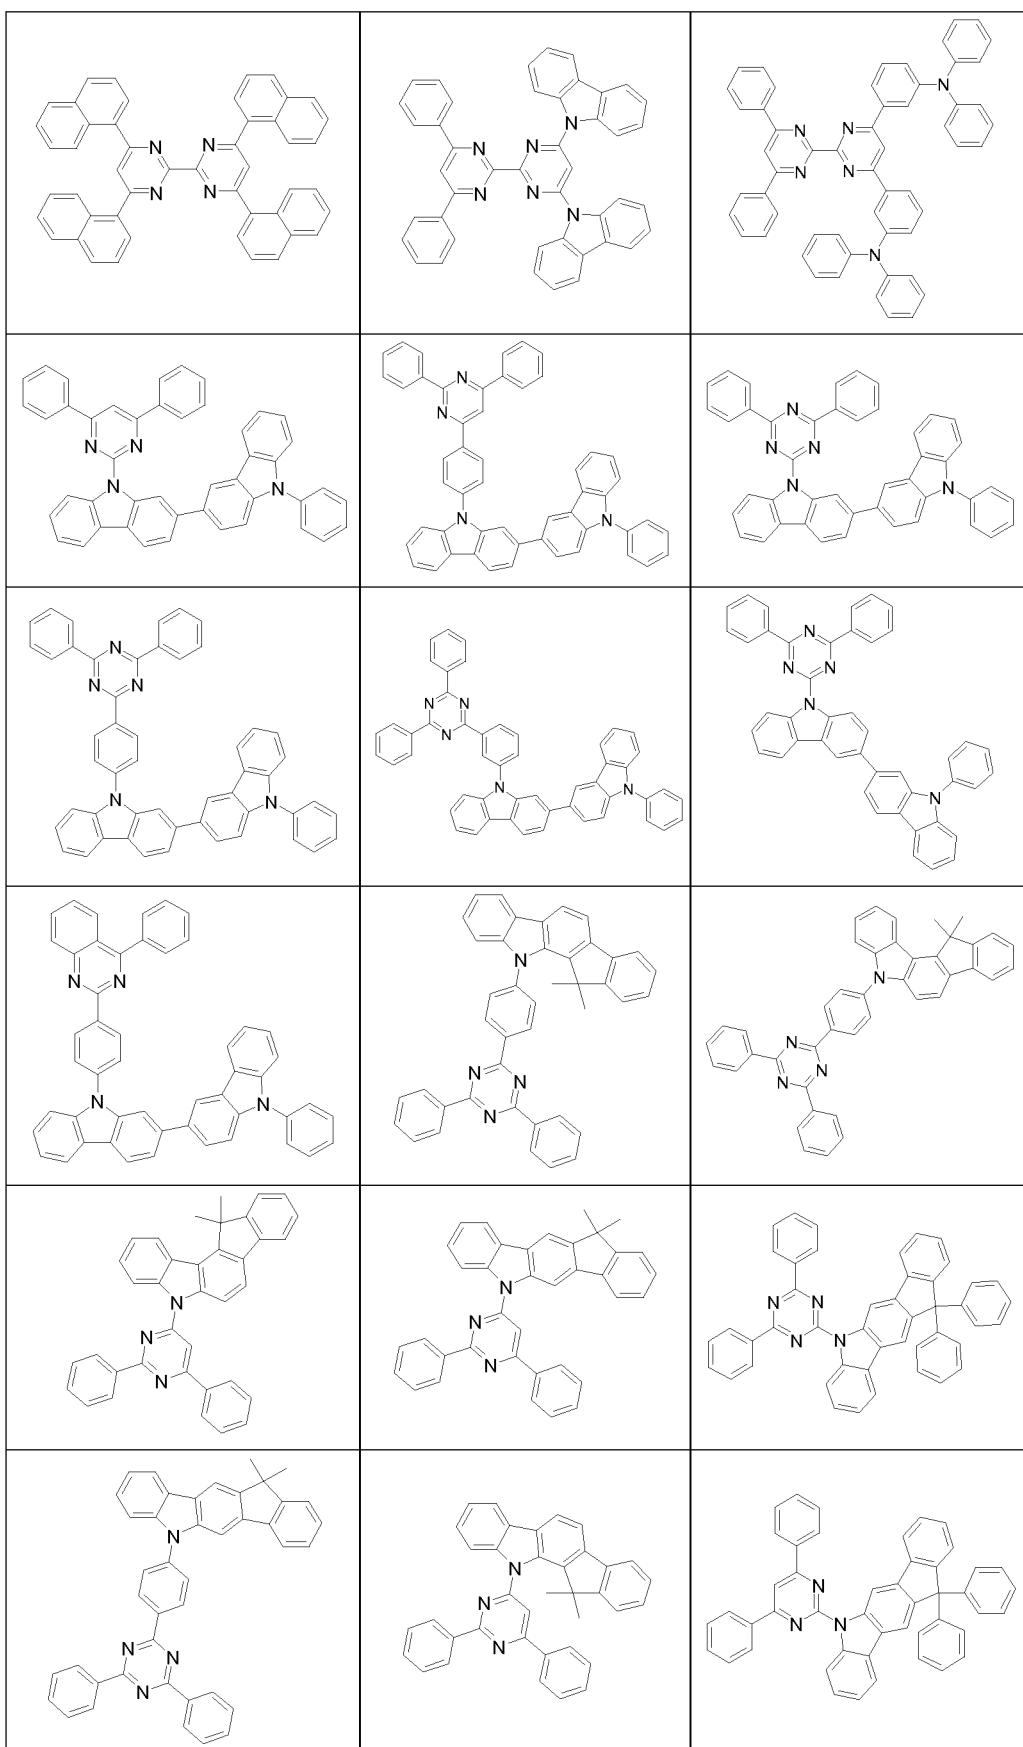

5

10

15

20

25

30


35

40

45

50

55

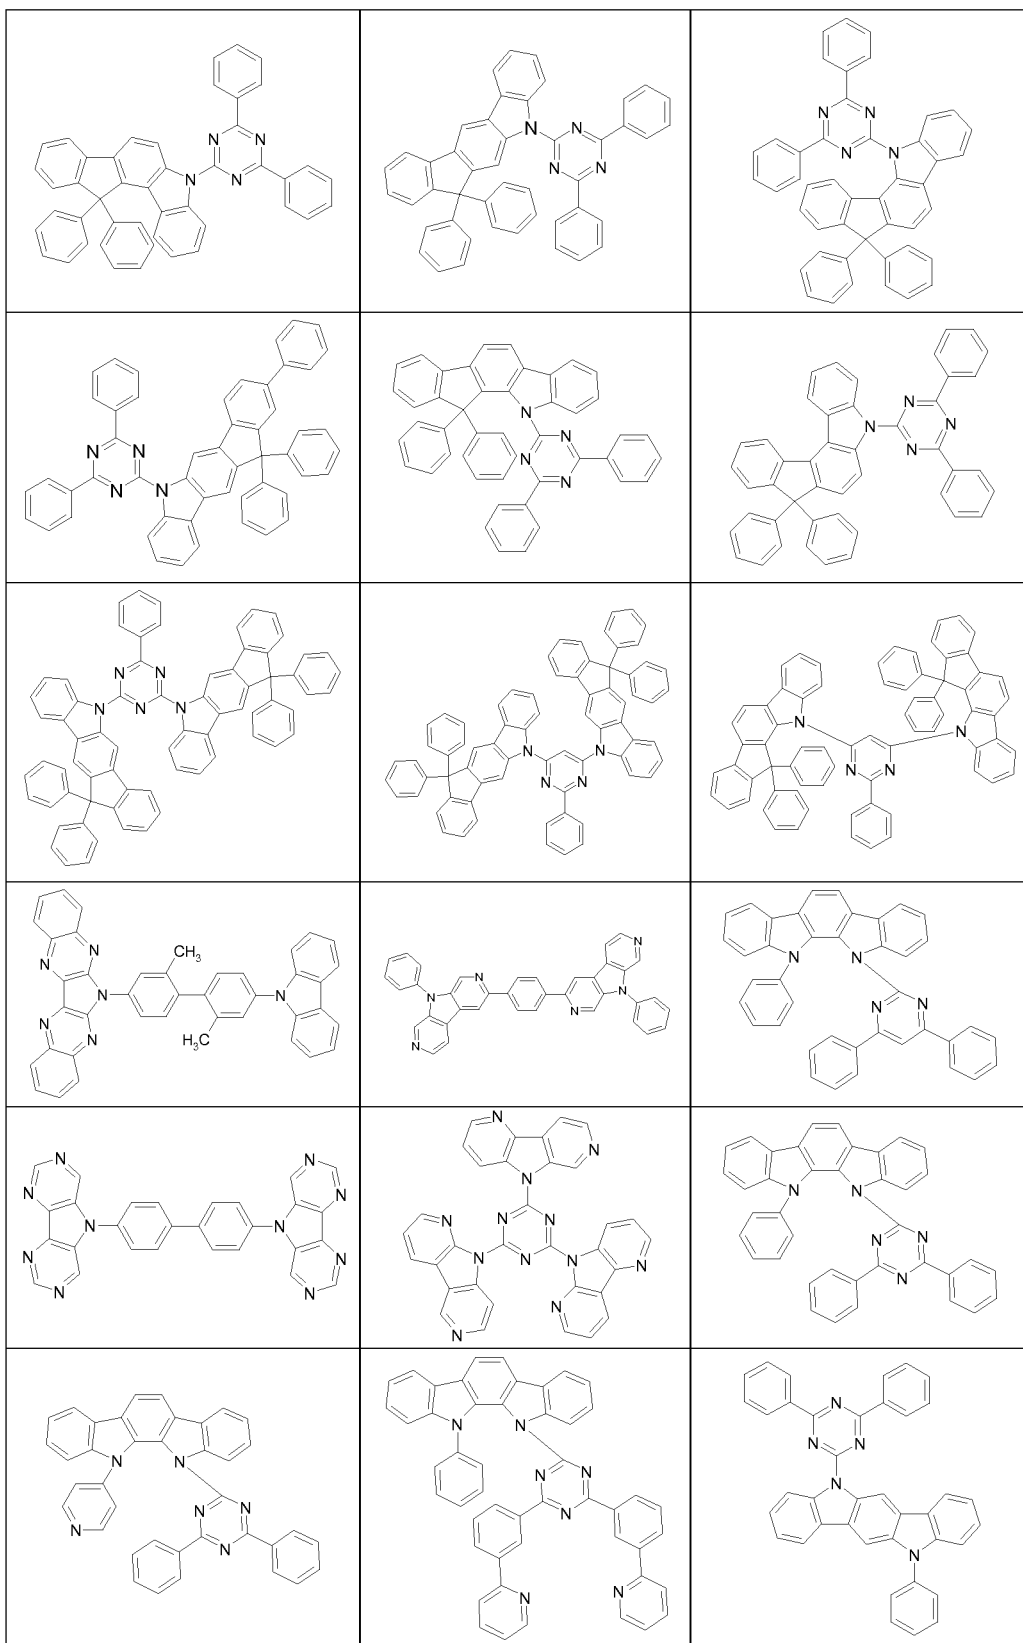

5

10

15

20

25

30


35

40

45

50

55

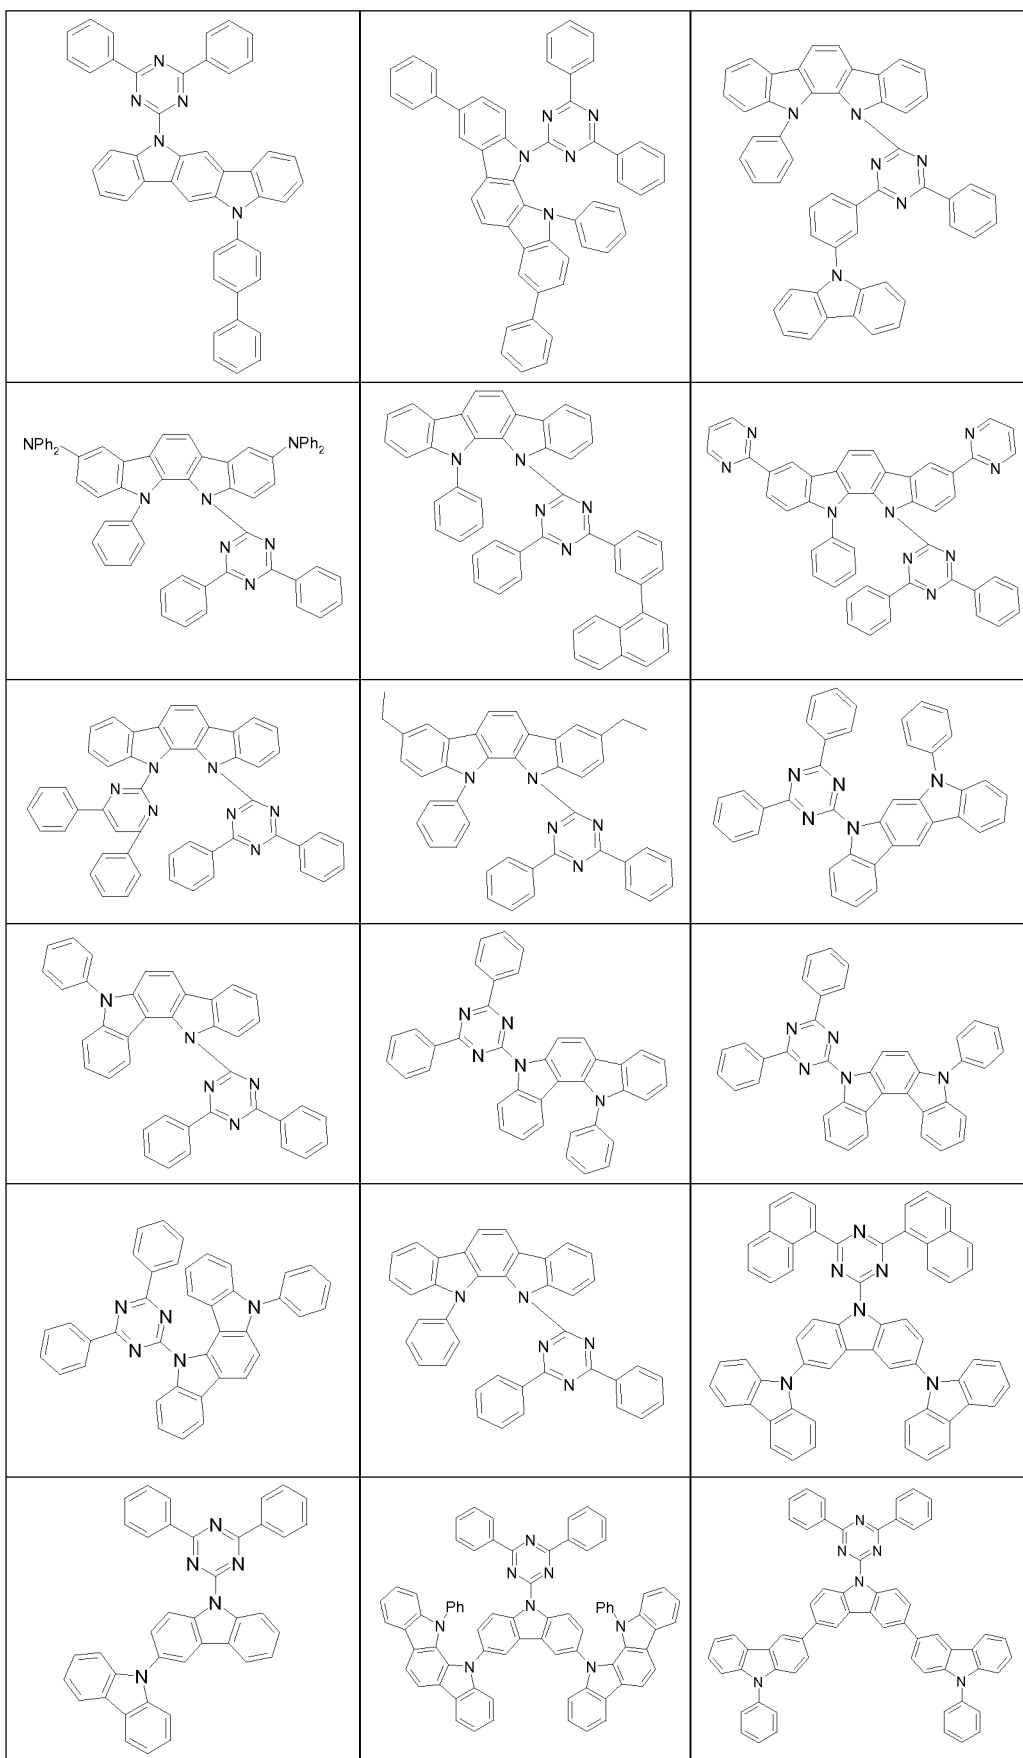

5

10

15

20

25

30


35

40




45

50




55

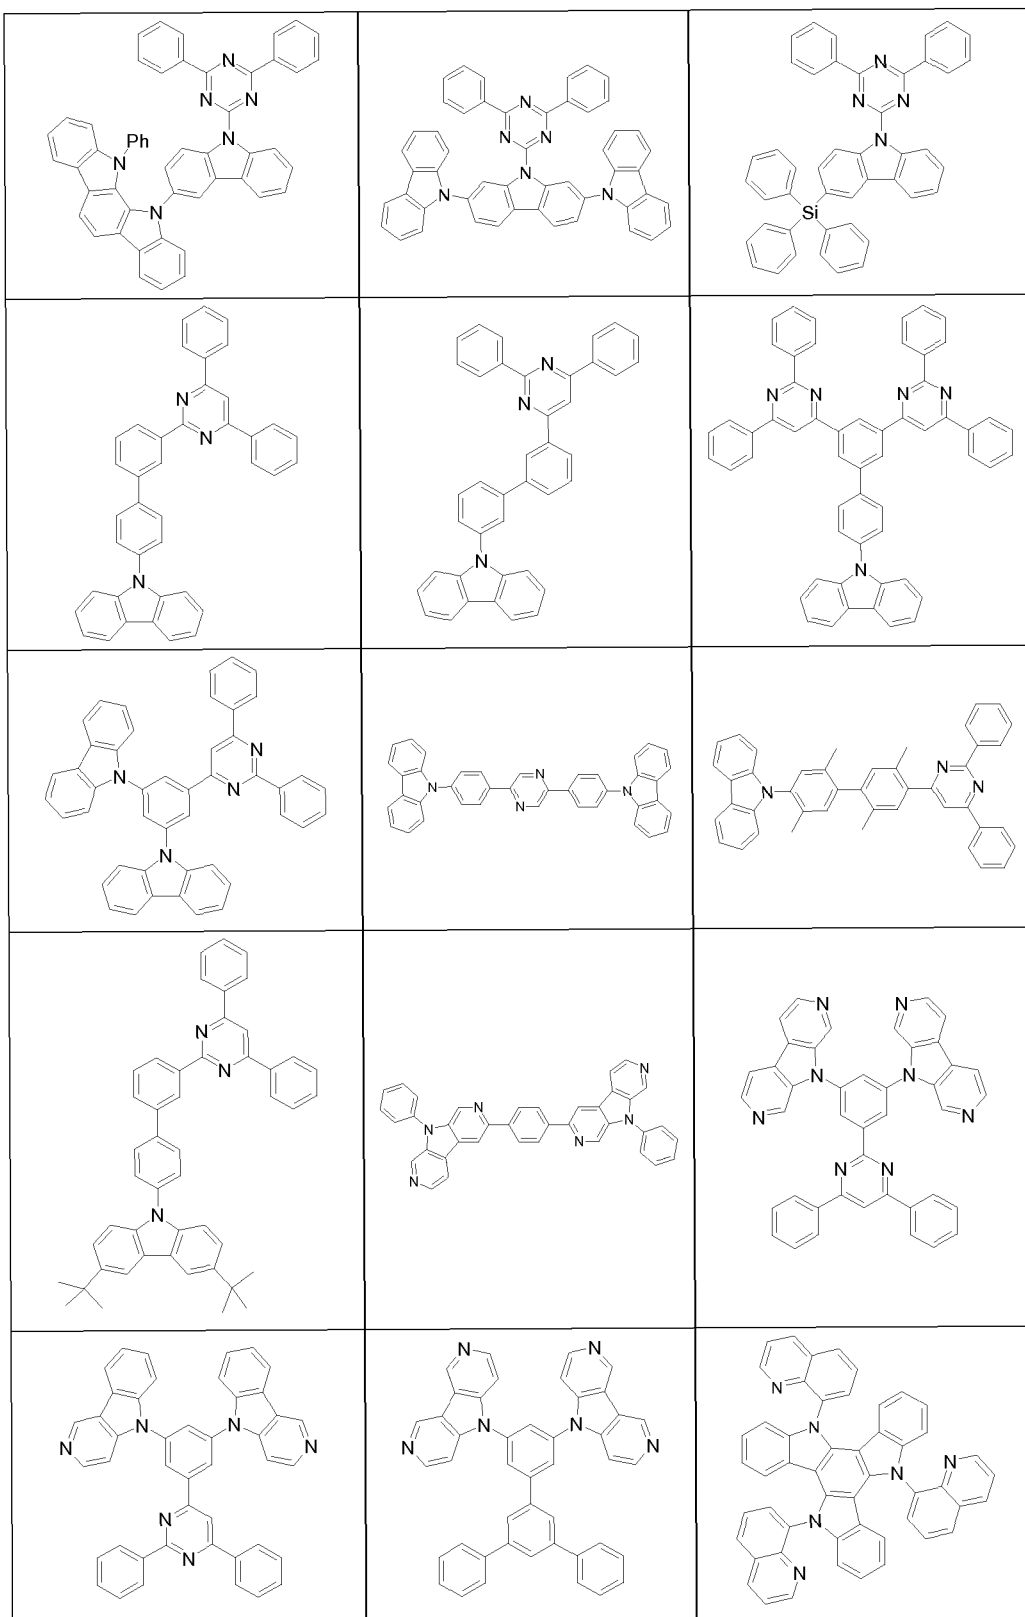

5



10






15

20




25

30






35

40



45

50



55

5

10

15

20

25

30


35

40

45

50

55

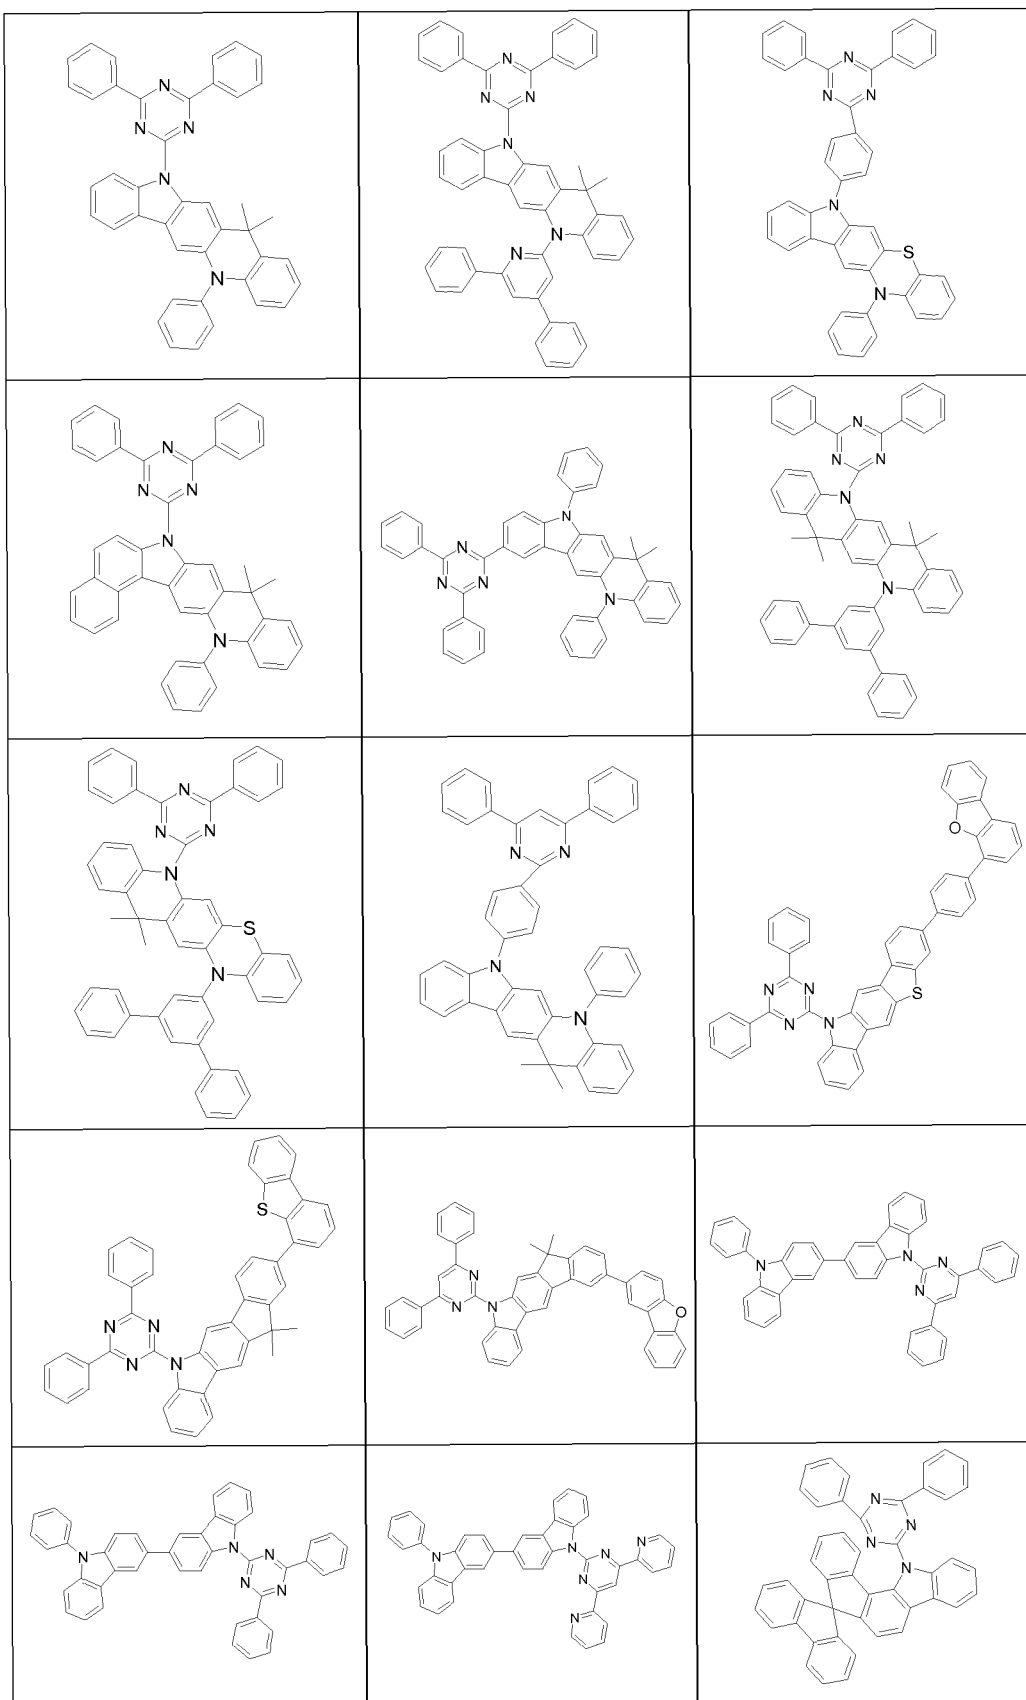

5

10

15

20

25

30


35

40

45

50

55

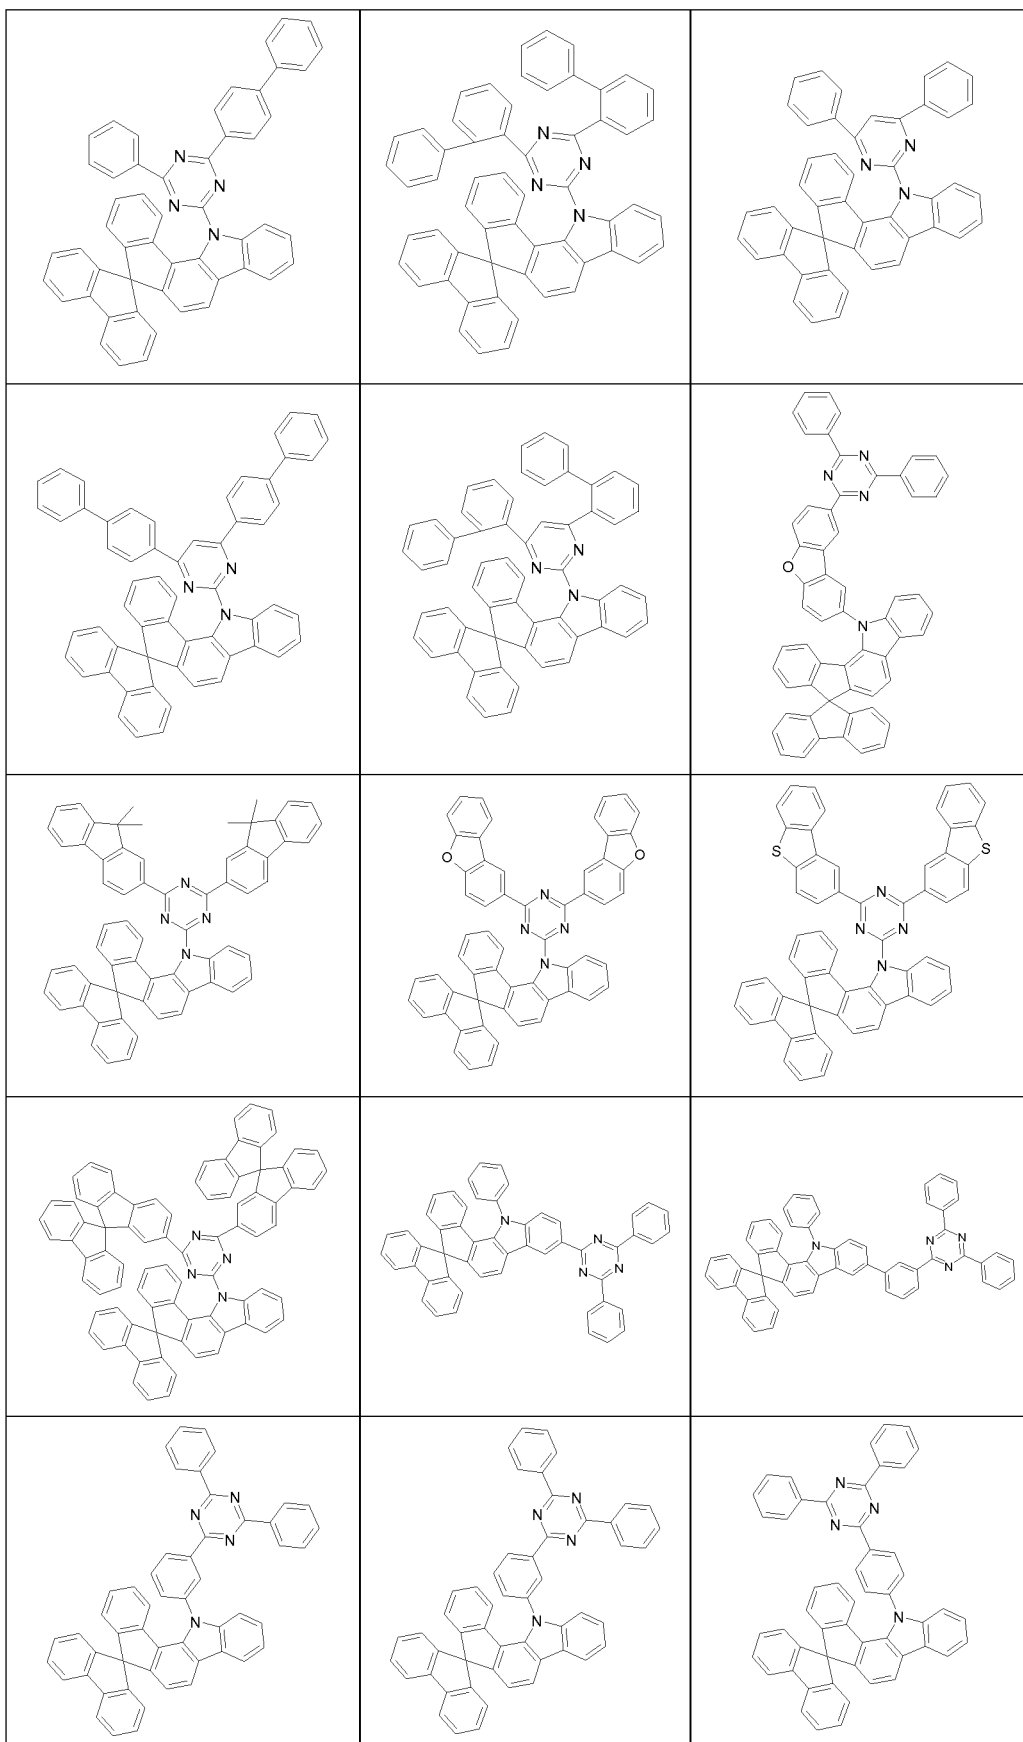

5

10

15

20

25

30


35


40

45

50

55

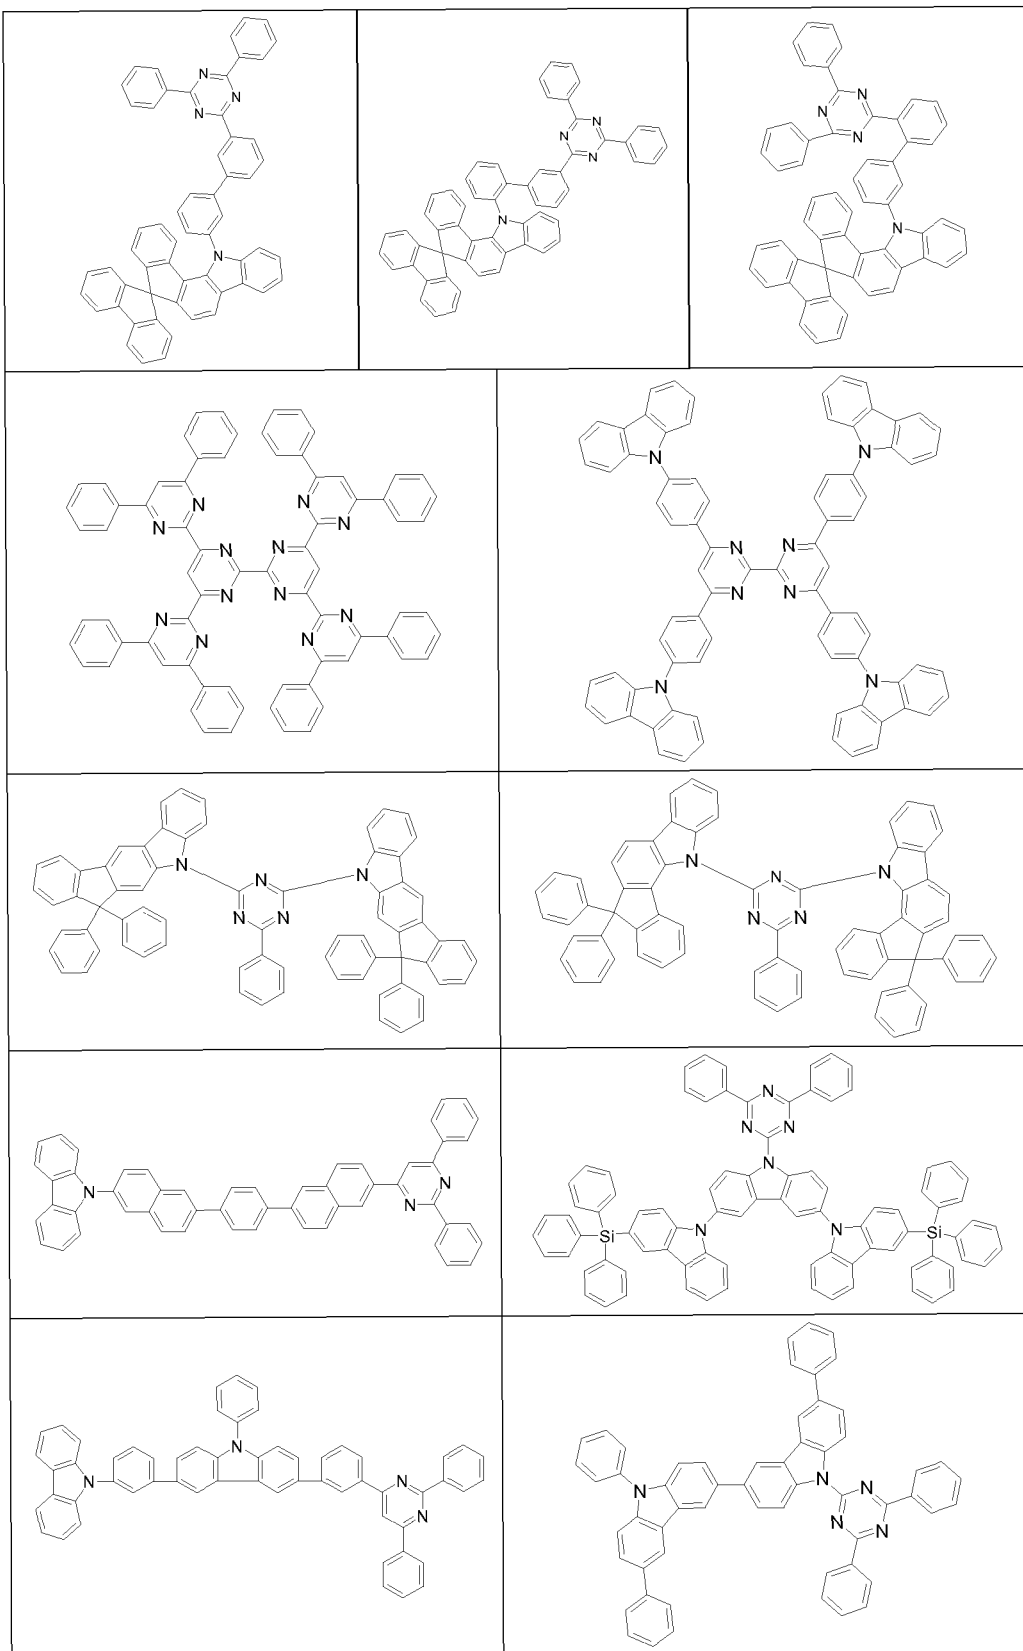


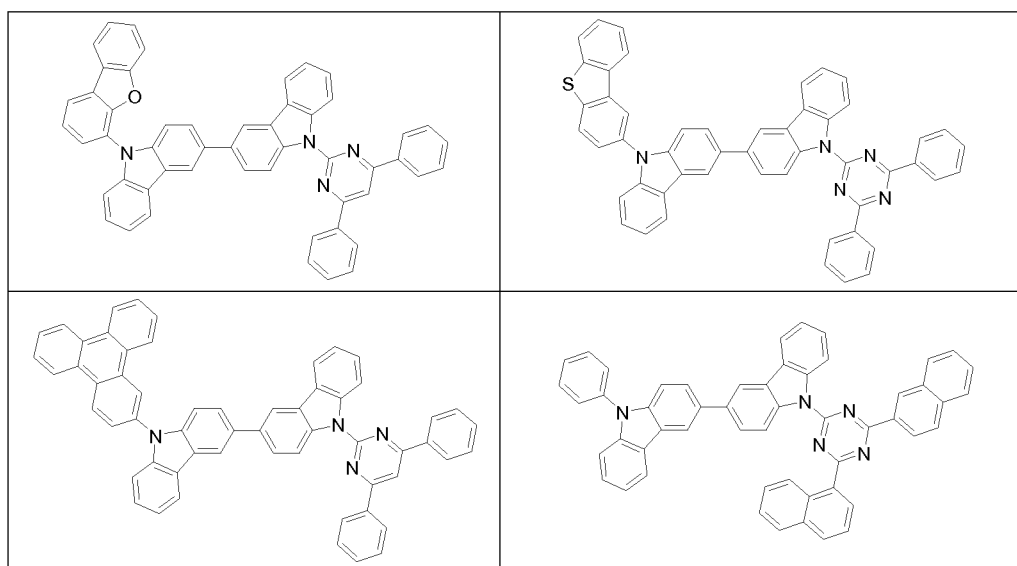



[0068] When the compound comprising at least one structure of formula (III) or as per the preferred embodiments is used as matrix material for an emitting compound in an emitting layer, it can be used in combination with one or more phosphorescent materials (triplet emitters). Phosphorescence in the context of this invention is understood to mean luminescence from an excited state having higher spin multiplicity, i.e. a spin state > 1 , especially from an excited triplet state. In the context of this invention, all iridium, platinum, osmium, gold and copper compounds, especially those that are luminescent, are referred to as phosphorescent materials. In that case, the mixture of the compound comprising at least one structure of formula (III) or as per the preferred embodiments and the emitting compound contains between 99% and 1% by weight, preferably between 98% and 10% by weight, more preferably between 97% and 60% by weight and especially between 95% and 70% by weight of the compound comprising at least one structure of formula (III) or as per the preferred embodiments, based on the overall mixture of emitter and matrix material. Correspondingly, the mixture contains between 1% and 99% by weight, preferably between 2% and 90% by weight, more preferably between 3% and 40% by weight and especially between 5% and 30% by weight of the emitter, based on the overall mixture of emitter and matrix material. In the case of use of a mixture of two or more emitters rather than just one emitter, these preferences apply correspondingly to the total proportion of emitters in the emitting layer. Suitable phosphorescent compounds (= triplet emitters) are especially compounds which, when suitably excited, emit light, preferably in the visible region, and also contain at least one atom of atomic number greater than 20, preferably greater than 38, and less than 84, more preferably greater than 56 and less than 80. Preferred phosphorescence emitters used are compounds containing copper, molybdenum, tungsten, rhenium, ruthenium, osmium, rhodium, iridium, palladium, platinum, silver, gold or europium, especially compounds containing iridium or platinum.


[0069] Examples of the above-described emitters can be found in applications WO 00/70655, WO 01/41512, WO 2002/02714, WO 2002/15645, EP 1191613, EP 1191612, EP 1191614, WO 2005/033244, WO 2014/023377, WO 2015/104045, WO 2015/117718 or the as yet unpublished application EP 15000307.7. In addition, suitable emitters are the compounds of the invention detailed above. In general, all phosphorescent complexes as used for phosphorescent OLEDs according to the prior art and as known to those skilled in the art in the field of organic electroluminescence are suitable, and the person skilled in the art will be able to use further phosphorescent complexes without exercising inventive skill.


[0070] Examples of suitable phosphorescent compounds are depicted in the following table:

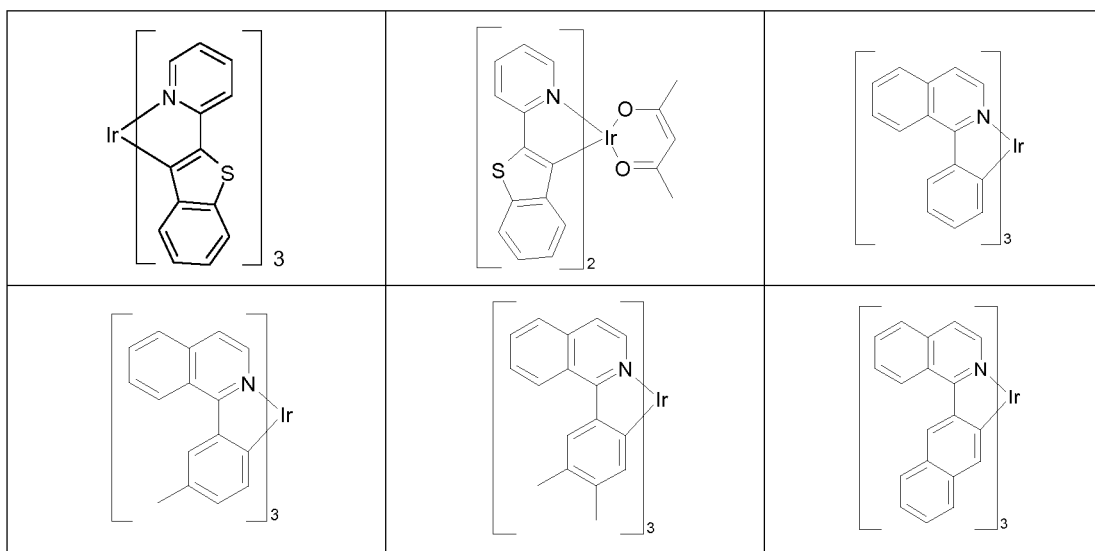


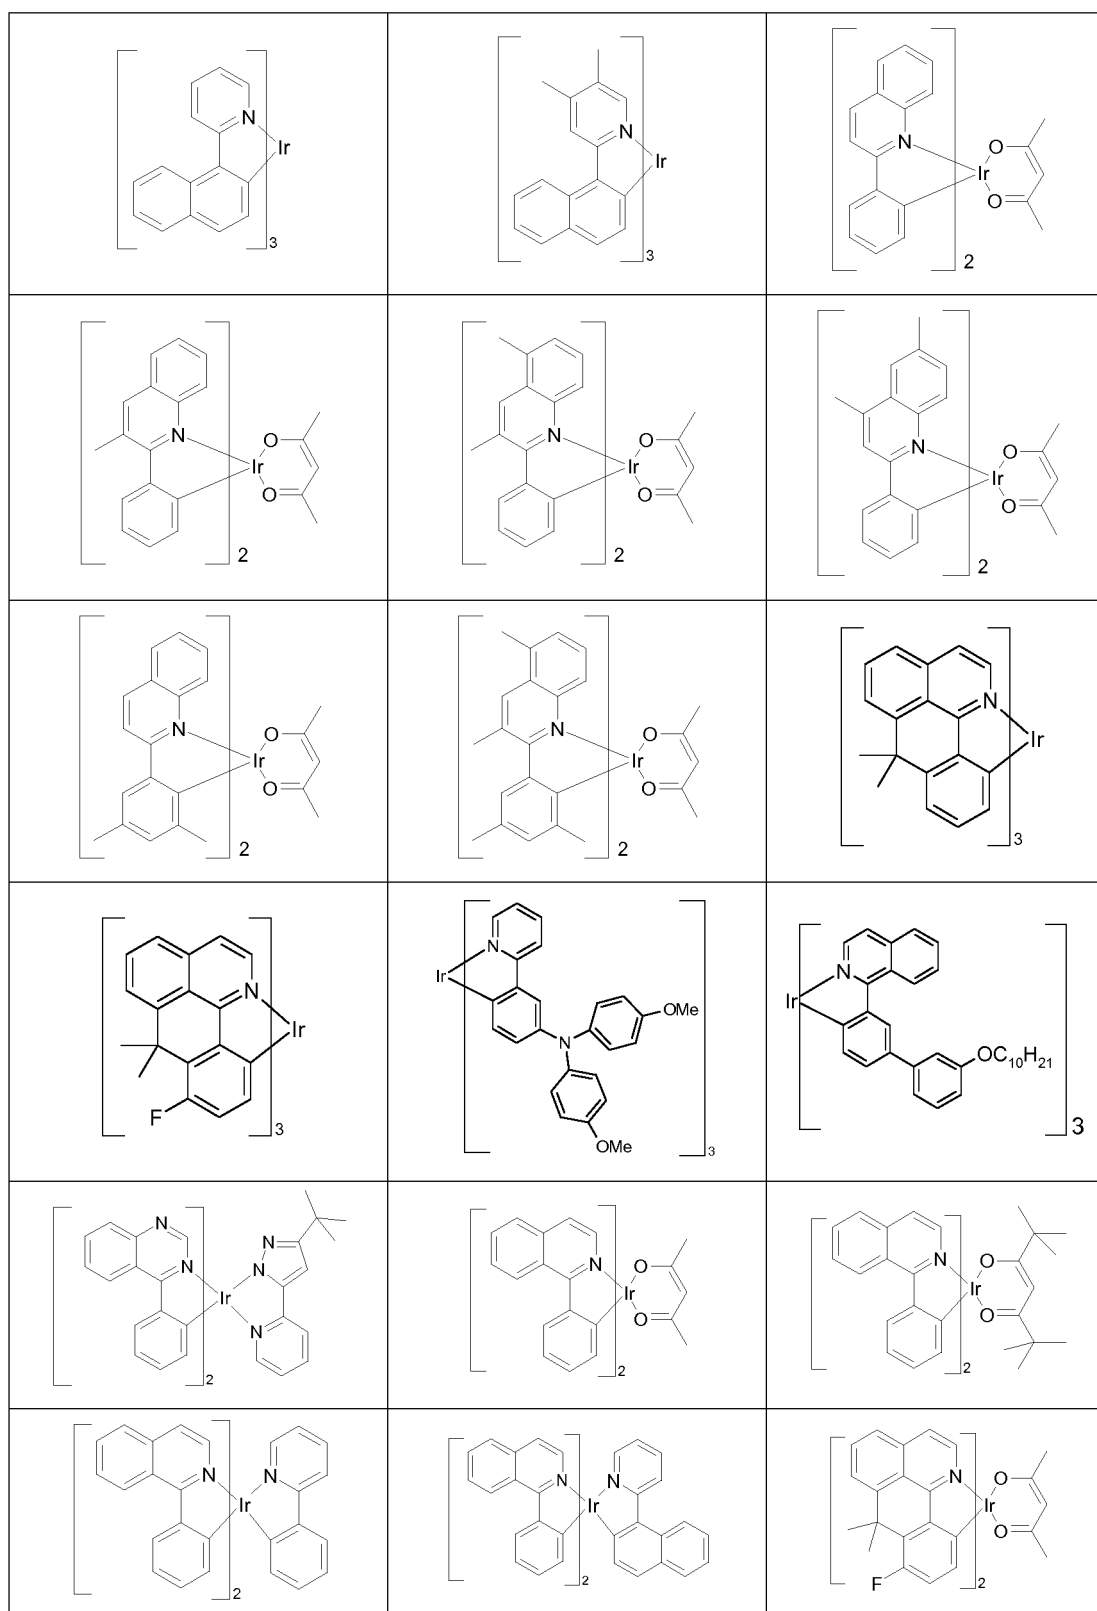


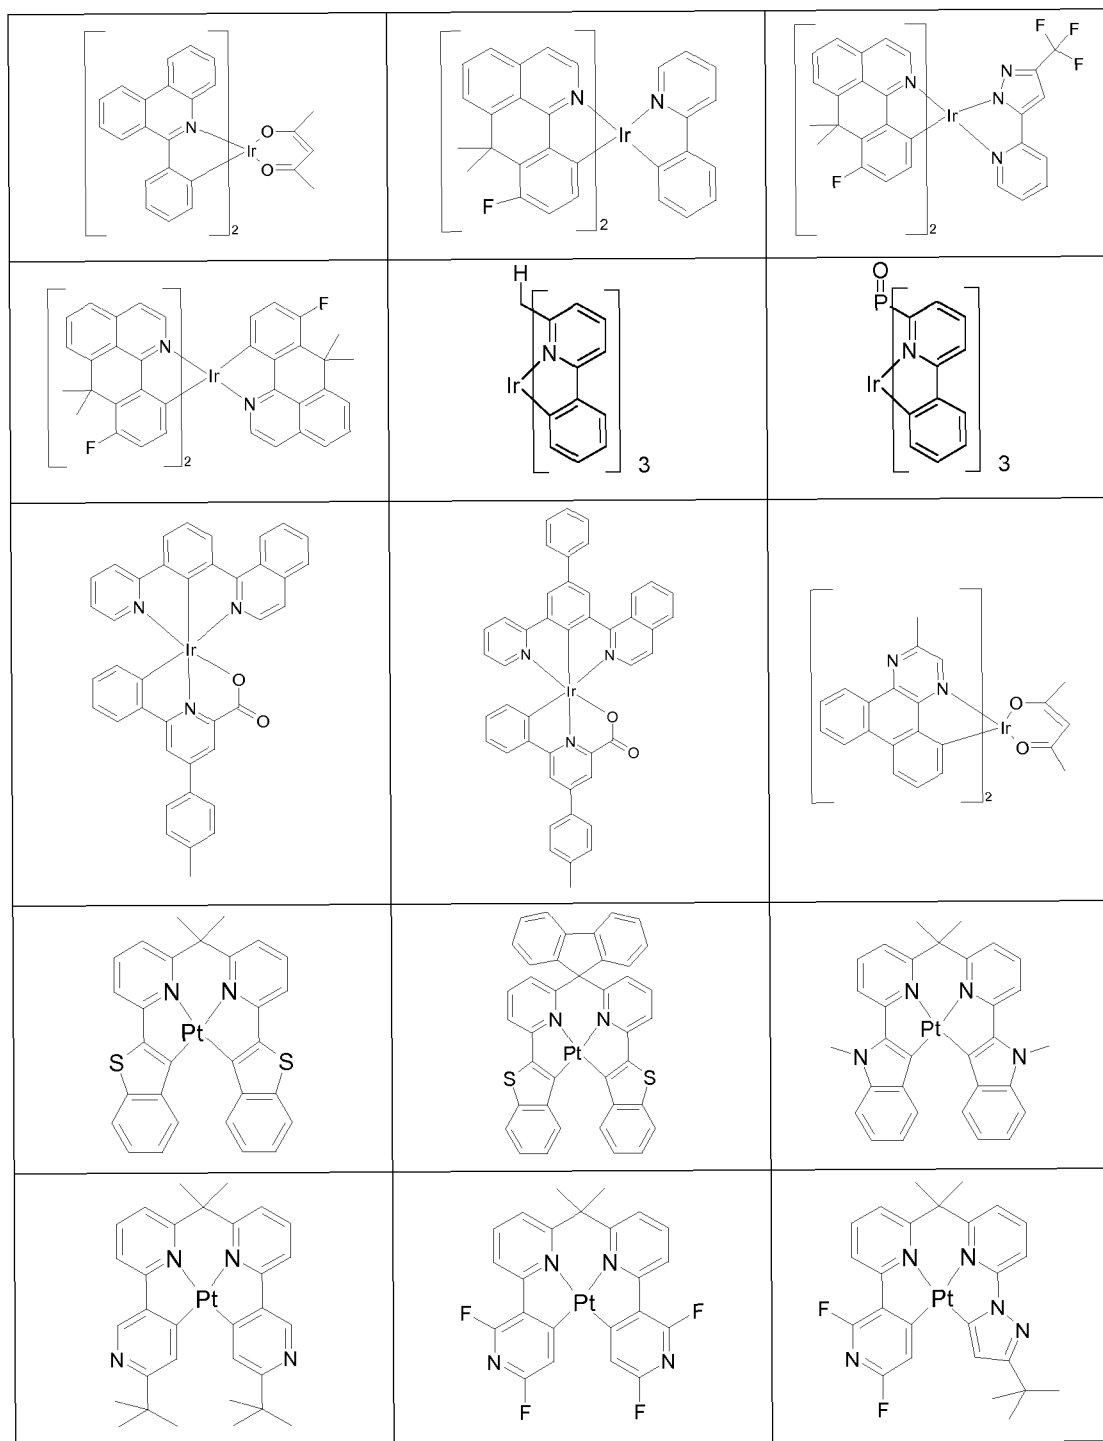


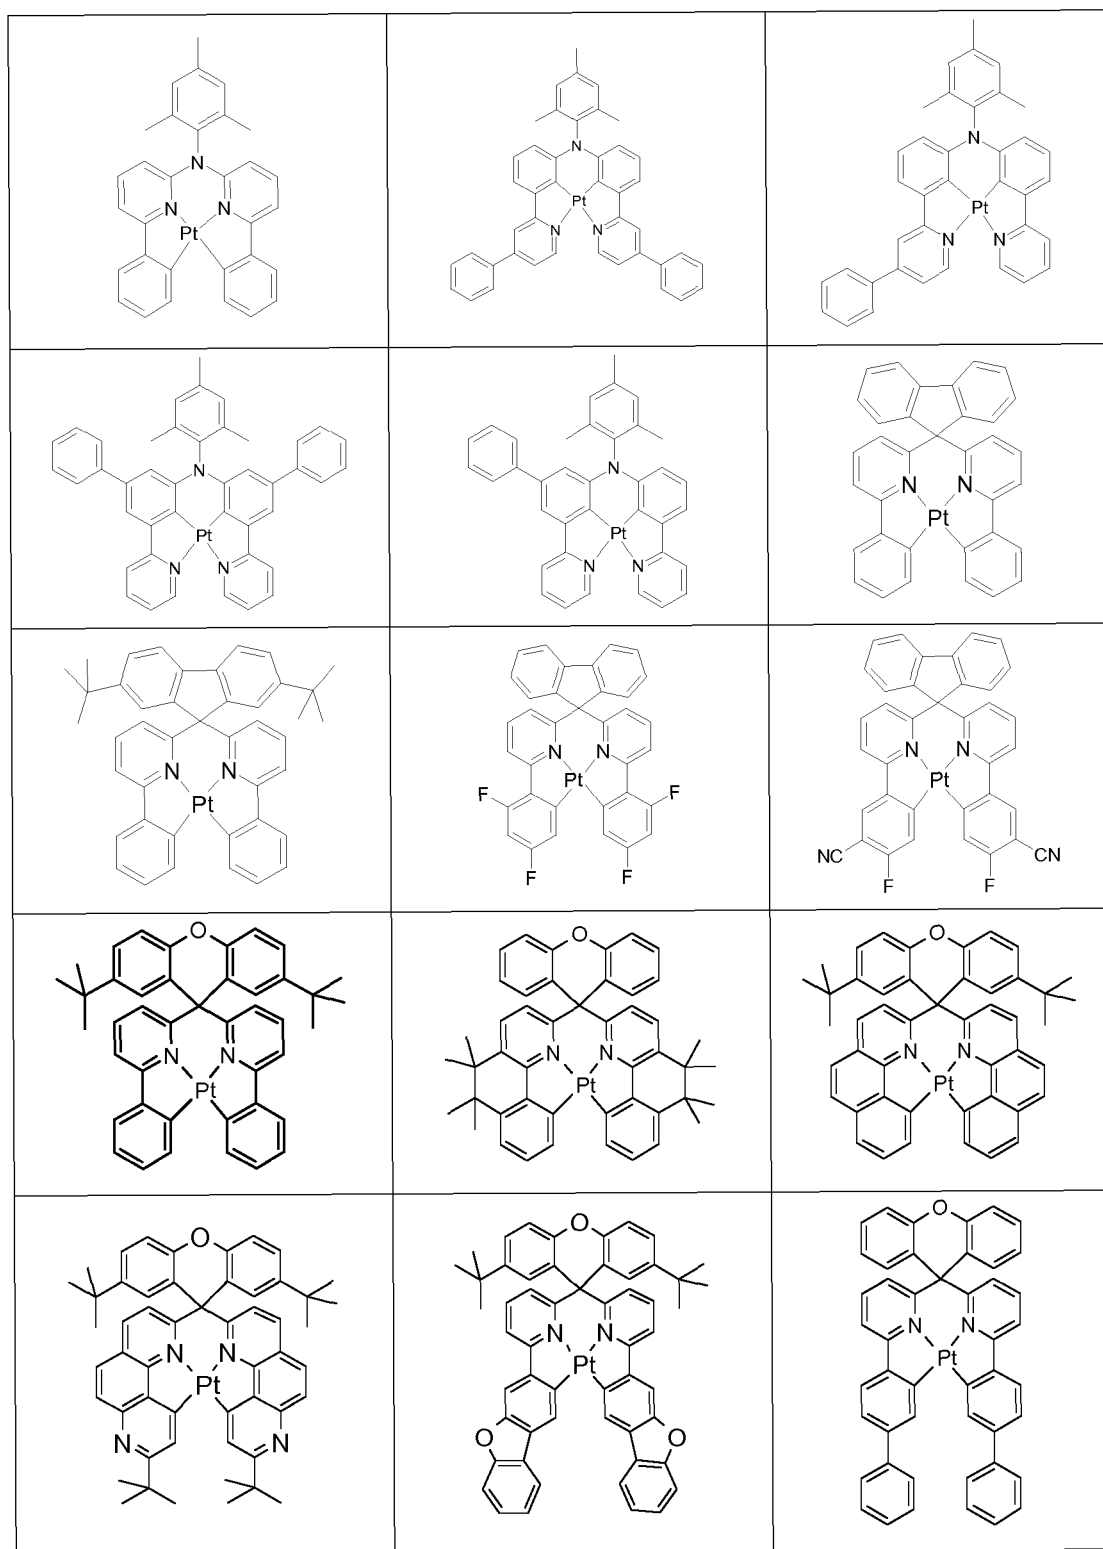

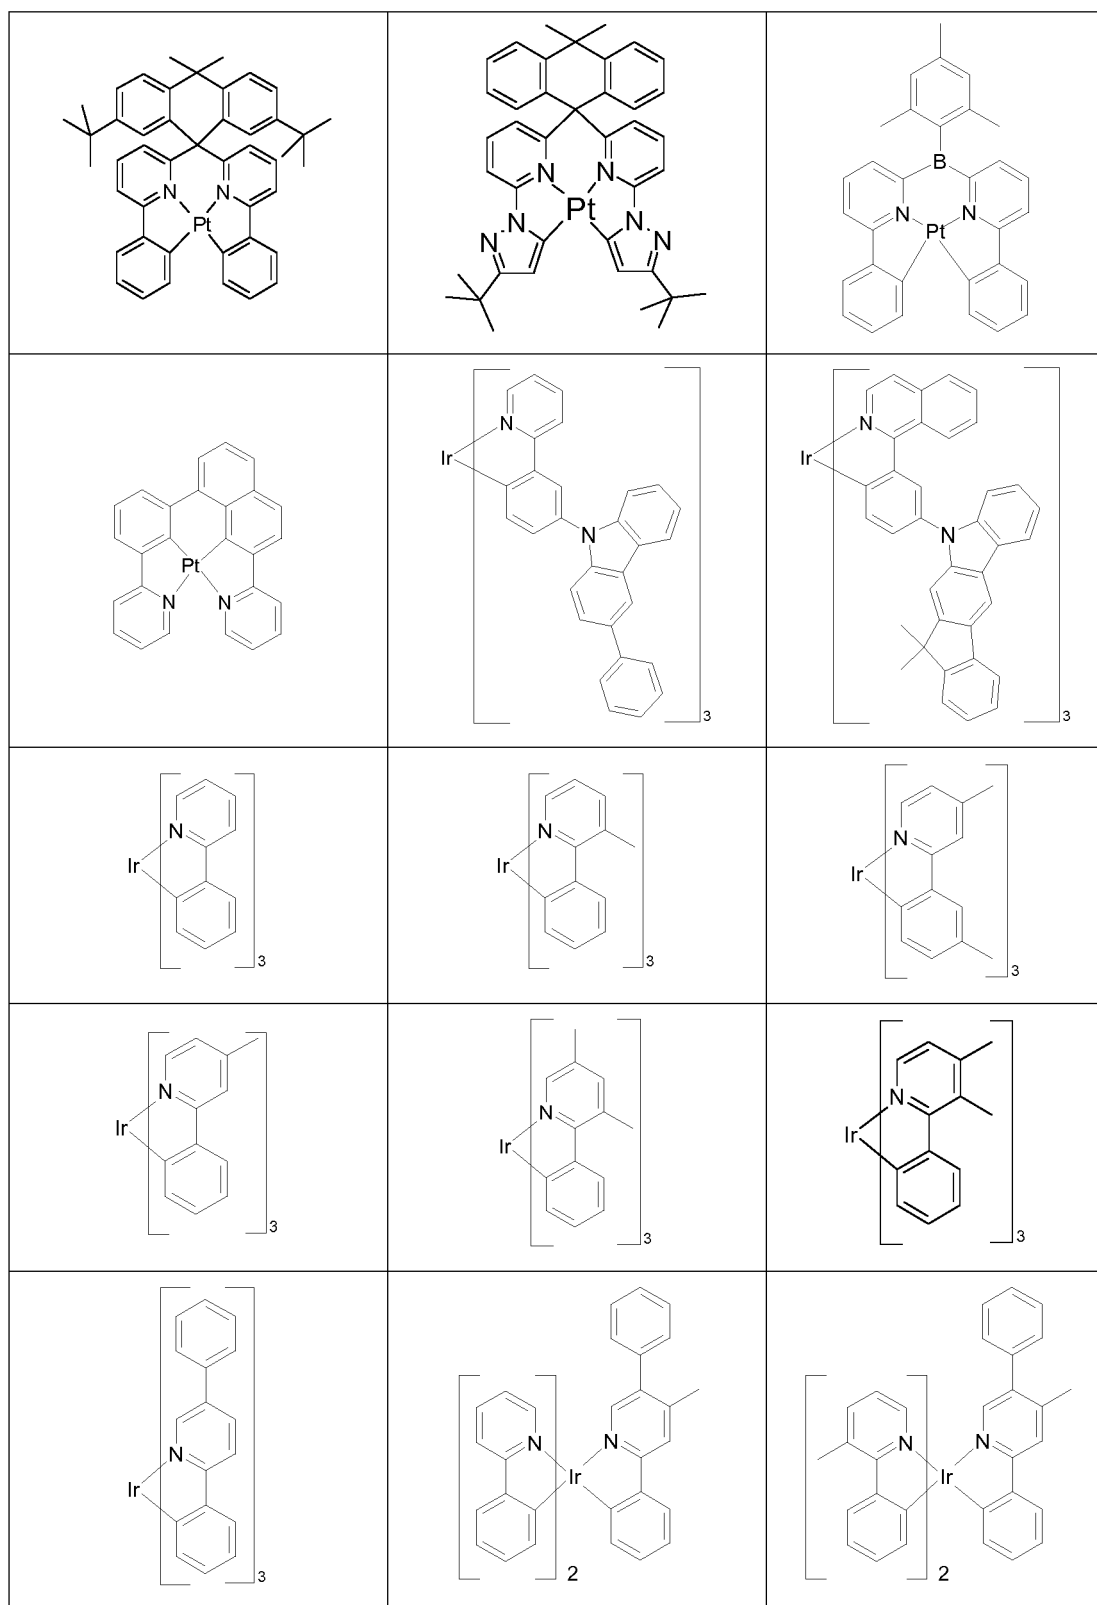

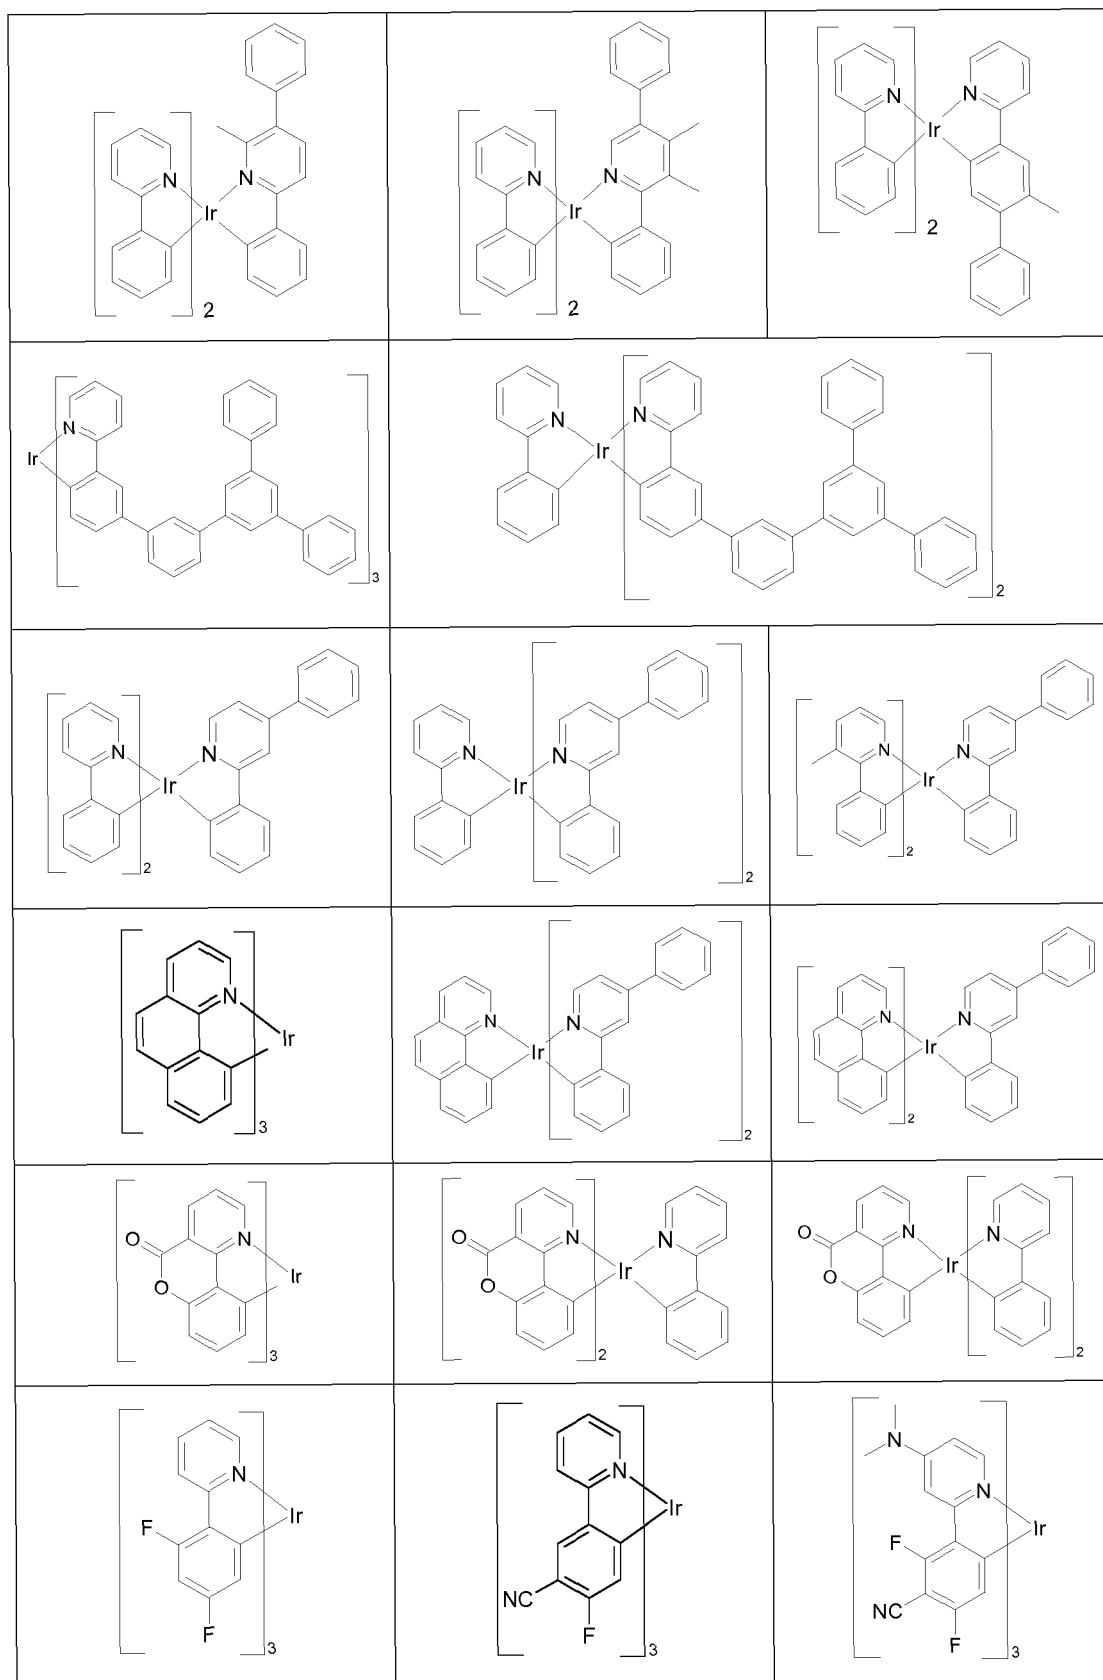

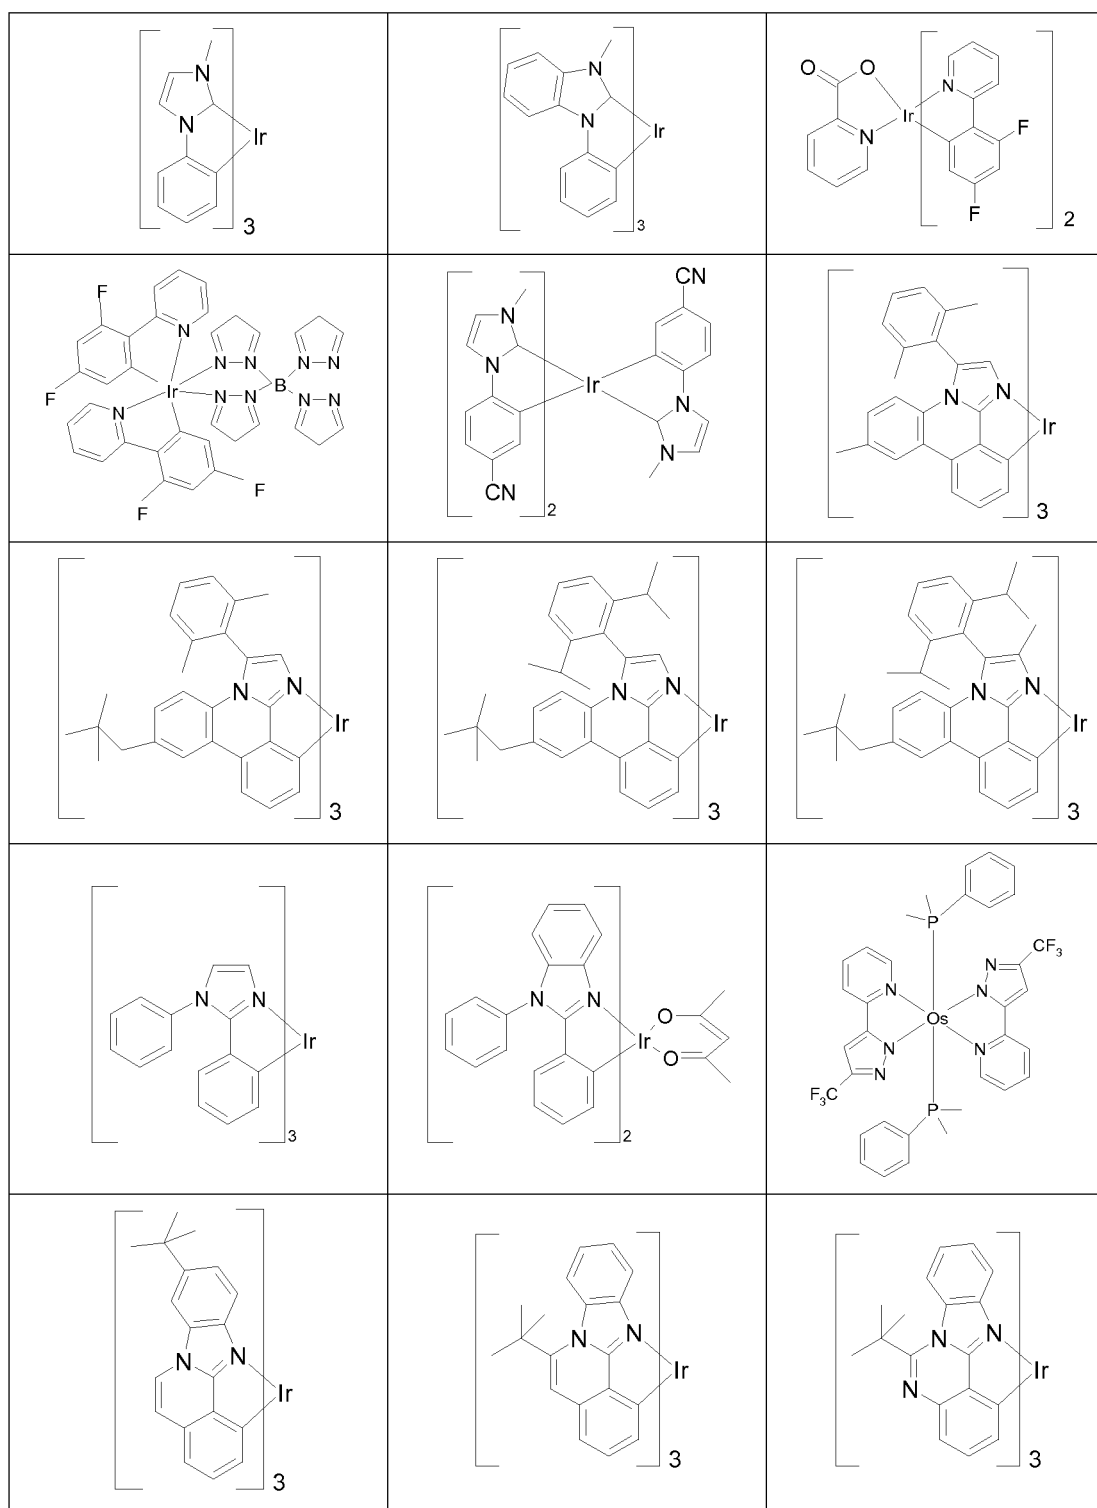

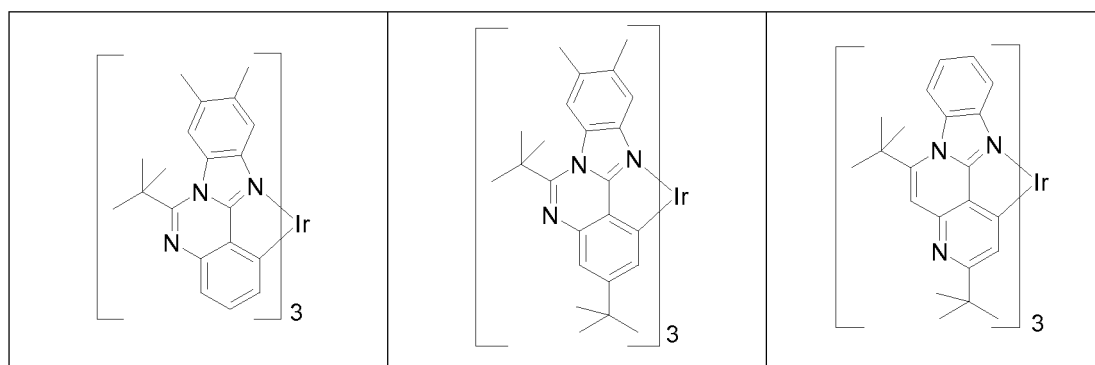

[0071] More preferably, the compound comprising at least one structure of formula (III) or as per the preferred embodiments may be used as matrix material in combination with a further matrix material, for example an electron- and/or hole-conducting matrix material, and a phosphorescent compound. In one embodiment of this combination, the compound of the invention is preferably effective as a wide band gap material, as described in detail above and hereinafter. The further matrix material here may be a compound comprising at least one structure of formula (III) or as per the preferred embodiments, or a compound which differs from compounds of the present invention. Preferably, the total proportion of the matrix material in the emitting layer is between 99% and 1% by weight, preferably between 98% and 10% by weight, more preferably between 97% and 60% by weight and especially between 95% and 70% by weight of the compound comprising at least one structure of formula (III) or as per the preferred embodiments, based on the overall mixture of emitter and matrix material. Correspondingly, the mixture contains between 1% and 99% by weight, preferably between 2% and 90% by weight, more preferably between 3% and 40% by weight and especially between 5% and 30% by weight of the emitter, based on the overall mixture of emitter and matrix material. In the case of use of a mixture of two or more emitters rather than just one emitter, these preference limits apply correspondingly to the total proportion of emitters in the emitting layer. The proportion of the matrix material of the invention is preferably in the range from 5% to 95% by weight, particularly from 20% to 85% by weight and especially preferably in the range from 50% to 75% by weight, based on the matrix material. Correspondingly, the proportion of the compound used as electron- and/or hole-conducting matrix material is from 95% to 5% by weight, particularly preferably in the range from 80% to 15% by weight and especially preferably in the range from 50% to 25% by weight, based on the matrix material.

[0072] When the compound comprising at least one structure of formula (III) or as per the preferred embodiments is used as matrix material for fluorescent compounds, the proportion of the matrix material in the emitting layer is between 50.0% and 99.9% by weight, preferably between 80.0% and 99.5% by weight, more preferably between 90.0% and 99.0% by weight. Correspondingly, the proportion of the dopant is between 0.1% and 50.0% by weight, preferably between 0.1% and 20.0% by weight, more preferably between 0.5% and 15% by weight, most preferably between 1.0% and 10.0% by weight.

[0073] Preferred dopants are selected from the class of the monostyrylamines, the distyrylamines, the tristyrylamines, the tetrastyrylamines, the styrylphosphines, the styryl ethers and the arylamines. A monostyrylamine is understood to mean a compound containing one substituted or unsubstituted styryl group and at least one preferably aromatic amine. A distyrylamine is understood to mean a compound containing two substituted or unsubstituted styryl groups and at least one preferably aromatic amine. A tristyrylamine is understood to mean a compound containing three substituted or unsubstituted styryl groups and at least one preferably aromatic amine. A tetrastyrylamine is understood to mean a compound containing four substituted or unsubstituted styryl groups and at least one preferably aromatic amine. The styryl groups are more preferably stilbenes which may also have still further substitution. Corresponding phosphines and ethers are defined in analogy to the amines. An arylamine or an aromatic amine in the context of this invention is understood to mean a compound containing three substituted or unsubstituted aromatic or heteroaromatic ring systems bonded directly to the nitrogen. Preferably, at least one of these aromatic or heteroaromatic ring systems is a fused ring system, preferably having at least 14 aromatic ring atoms. Preferred examples of these are aromatic anthracenamines, aromatic anthracenediamines, aromatic pyrenamines, aromatic pyrenediamines, aromatic chrysenamines or aromatic chrysenediamines. An aromatic anthracenamine is understood to mean a compound in which a diarylamino group is bonded directly to an anthracene group, preferably in the 9 position. An aromatic anthracenediamine is understood to mean a compound in which two diarylamino groups are bonded directly to an anthracene group, preferably in the 9,10 positions. Aromatic pyrenamines, pyrenediamines, chrysenamines and chrysenediamines are defined analogously, where the diarylamino groups are bonded to the pyrene preferably in the 1 position or 1,6 positions. Further preferred dopants are selected from indenofluorenamines and -fluorenediamines, for example according to WO 06/122630, benzoindenofluorenamines and -fluorenediamines, for example according to WO 08/006449, and dibenzoindenofluorenamines and -fluorenediamines, for example according to WO 07/140847. Examples of dopants from the class of the

styrylamines are substituted or unsubstituted trisubstituted benzenes or the dopants described in WO 06/000388, WO 06/058737, WO 06/000389, WO 07/065549 and WO 07/115610. Further suitable fluorescent dopants are the fused aromatic hydrocarbons disclosed in WO 2010/012328.

[0074] In a further embodiment of the invention, the compounds comprising at least one structure of formula (III) or as per the preferred embodiments are used as hole transport material or as hole injection material or as electron blocker material or as exciton blocker material. The compound is preferably used in a hole transport layer or in a hole injection layer or in an electron blocker layer or in an exciton blocker layer. A hole injection layer in the context of this invention is a layer directly adjoining the anode. A hole transport layer in the context of this invention is a layer between a hole injection layer and an emission layer. An electron blocker layer or exciton blocker layer in the context of this invention is a layer which directly adjoins an emitting layer on the anode side. When the compounds comprising at least one structure of formula (III) are used as hole transport material or as hole injection material, it may be preferable when they are doped with electron acceptor compounds, for example with F₄-TCNQ or with compounds as described in EP 1476881 or EP 1596445.

[0075] In yet a further embodiment of the invention, the compounds comprising at least one structure of formula (III) are used as electron transport material or as hole blocker material in an electron transport layer or a hole blocker layer. It may additionally be preferable when the compound is doped with electron donor compounds. A hole blocker layer in the context of this invention is a layer which is disposed between an emitting layer and an electron transport layer and directly adjoins the emitting layer. When the compound comprising at least one structure of formula (III) is used as electron transport material, it may be preferable to use it as a mixture with a further compound. Preferred mixture components are alkali metal compounds, preferably lithium compounds, more preferably Liq (lithium quinolate) or Liq derivatives.

[0076] Additionally preferred is an organic electroluminescent device, characterized in that one or more layers are coated by a sublimation process. In this case, the materials are applied by vapour deposition in vacuum sublimation systems at a pressure of less than 10⁻⁵ mbar, preferably less than 10⁻⁶ mbar. However, it should be noted that the pressure may also be even lower, for example less than 10⁻⁷ mbar.

[0077] Preference is likewise given to an organic electroluminescent device, characterized in that one or more layers are coated by the OVPD (organic vapour phase deposition) method or with the aid of a carrier gas sublimation. In this case, the materials are applied at a pressure between 10⁻⁵ mbar and 1 bar. A special case of this method is the OVJP (organic vapour jet printing) method, in which the materials are applied directly by a nozzle and thus structured (for example, M. S. Arnold et al., Appl. Phys. Lett. 2008, 92, 053301).

[0078] Preference is additionally given to an organic electroluminescent device, characterized in that one or more layers are produced from solution, for example by spin-coating, or by any printing method, for example screen printing, flexographic printing or offset printing, but more preferably LITI (light-induced thermal imaging, thermal transfer printing) or inkjet printing. For this purpose, soluble compounds are needed. High solubility can be achieved by suitable substitution of the compounds. It is possible here to apply not just solutions of individual materials but also solutions containing a plurality of compounds, for example matrix material and dopant.

[0079] The organic electroluminescent device can also be produced as a hybrid system by applying one or more layers from solution and applying one or more other layers by vapour deposition. For example, it is possible to apply an emitting layer comprising a compound comprising at least one structure of formula (III) and a phosphorescent dopant from solution, and to apply a hole blocker layer and/or an electron transport layer thereto by vapour deposition under reduced pressure. It is likewise possible to apply the emitting layer comprising a compound comprising at least one structure of formula (III) and a phosphorescent dopant by vapour deposition under reduced pressure, and to apply one or more other layers from solution. Alternatively or additionally, it is also possible, for example, to apply an emitting layer from solution and to apply an electron transport layer comprising a compound comprising at least one structure of formula (III), optionally in combination with an organic alkali metal compound, thereto by vapour deposition under reduced pressure.

[0080] These methods are known in general terms to those skilled in the art and can be applied by those skilled in the art without difficulty to organic electroluminescent devices comprising compounds comprising at least one structure of formula (III) or the above-detailed preferred embodiments.

[0081] The compounds of the invention, when used in organic electroluminescent devices, have the following surprising advantages over the prior art:

1. The compounds of the invention have high thermal stability and can be sublimed without decomposition.
2. The compounds of the invention have high solubility in standard organic solvents, for example toluene, and very good film formation properties, and are therefore of particularly good suitability for processing from solution.
3. The compounds of the invention are especially suitable as wide band gap materials and lead to an improvement in efficiency.

4. The OLEDs produced with the compounds of the invention generally have a very long lifetime.

5. The OLEDs produced with the compounds of the invention generally have a very high quantum efficiency.

[0082] The present application text is aimed at the use of the compounds of the invention in relation to OLEDs and PLEDs and the corresponding displays. In spite of this restriction of the description, it is possible for the person skilled in the art, without further inventive activity, also to use the compounds of the invention in other electronic devices, for example in organic field-effect transistors (O-FETs), organic thin-film transistors (O-TFTs), organic light-emitting transistors (O-LETs), organic integrated circuits (O-ICs), organic solar cells (O-SCs), organic field-quench devices (O-FQDs), light-emitting electrochemical cells (LECs), organic laser diodes (O-lasers) or organic photoreceptors.

[0083] The use of the compounds of the invention in the corresponding devices, and likewise these devices themselves, likewise form part of the subject-matter of the present invention.

[0084] The invention is described in more detail by the examples which follow.


Examples

[0085] All syntheses are conducted in an argon atmosphere and in dry solvents, unless stated otherwise. The figures in brackets for the substances known from the literature are the corresponding CAS numbers.

Part A: Preparation of compounds of the invention

A.1 Preparation of 3,3'-dibromobenzophenone **K1**


[0086]



[0087] 3,3'-Dibromobenzophenone **K1** can be prepared according to J. Mater. Chem. C 2014, 2, 2028-2036.



A.2 Preparation of 9,9-bis(3-bromophenyl)fluorene **F(Br)₂**

[0088]







[0089] About 10 ml of a solution of 2-bromobiphenyl (80.0 g, 343 mmol) and 1,2-dibromoethane (3.6 ml, 43 mmol) in a mixture of 640 ml of toluene, 520 ml of tetrahydrofuran and 60 ml of ethylene glycol dimethyl ether are added to 8.8 g of magnesium (334 mmol) and heated. After onset of the reaction, the heating is removed and the remaining solution is added dropwise in such a way that reflux is maintained. On completion of addition, the mixture is heated to reflux for 1 h. Subsequently, under gentle reflux, a solution of the ketone **K1** (80.0 g, 235 mmol) in 800 ml of tetrahydrofuran is added dropwise and the mixture is stirred under reflux for 5 h. The heating is removed and the mixture is stirred for 14 h. The solvents are removed completely on a rotary evaporator. The remaining residue is taken up in a mixture of 920 ml of glacial acetic acid and 13.2 ml of a 33% solution of hydrogen bromide in acetic acid, and heated to reflux for 6 h. After removing the heating, the mixture is stirred for 16 h. The solid material formed is filtered off with suction, washed with about 150 ml of glacial acetic acid and three times with 250 ml each time of ethanol and then dried in a vacuum drying cabinet. This leaves 101.6 g (213 mmol, 91% of theory) of the product as a light grey solid having a purity of about 99% by ¹H NMR.

[0090] In an analogous manner, it is possible to prepare the following compound **BuF(Br)₂** from the ketone **K1** and the appropriate bromide:

Ex.	Bromide	Product	Yield
BuF(Br) ₂	 [70728-89-1]		82%


A.3 Preparation of substituted 9,9-diphenylfluorene derivatives

[0091] The boronic acids and boronic esters used in the syntheses described hereinafter are summarized in the following table:

 [1257248-43-3] BS1	 [333432-28-3] BS2	 [1036378-83-2] BS3	 [912844-88-3] BS4
--	---	---	---



A.3.1 Preparation of **F(BS1)₂**

[0092]




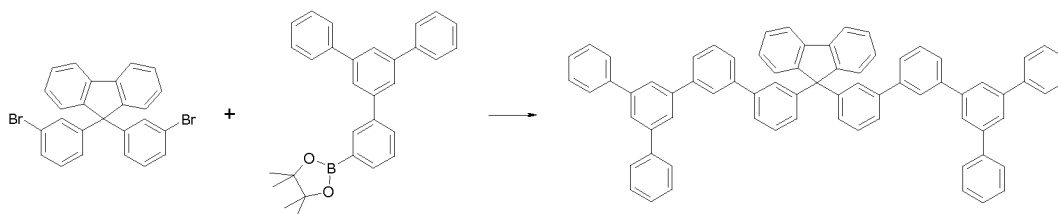


[0093] 9,9-Bis-(3-bromophenyl)fluorene **F(Br)₂** (15.4 g, 32.4 mmol), 2-[3-(3,5-diphenylphenyl)phenyl]-4,4,5,5-tetramethyl-1,3,2-dioxaborolane (28.7 g, 66.4 mmol), 1.87 g of tetrakis(triphenylphosphine)palladium(0) and 100 ml of a 20% solution of tetraethylammonium hydroxide in water are heated under reflux in 350 ml of tetrahydrofuran for 14 h. After cooling, the solvents are removed on a rotary evaporator. The remaining residue is hot-extracted with about 300 ml of ethyl acetate over a bed of alumina (basic, activity level 1). After removing the heating, the mixture is stirred at room temperature for a further 48 h. The solid material formed is filtered off with suction, recrystallized five times from toluene and finally fractionally sublimed twice (390°C, p about 10⁻⁵ mbar). This leaves 10.2 g (11.0 mmol, 34% of theory) as a colourless solid having a purity of 99.9% by HPLC.

[0094] In an analogous manner, it is possible to prepare the following compounds:

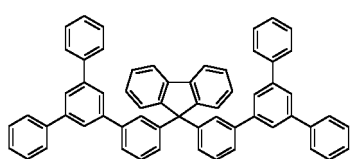Ex.	Fluorene	Boronic acid/ester	Product	Yield
F(BS3) ₂	F(Br) ₂			41%


(continued)


Ex.	Fluorene	Boronic acid/ester	Product	Yield
F(BS4) ₂	F(Br) ₂			28%
BuF(BS4) ₂	BuF(Br) ₂			32%

A.3.2 Preparation of asymmetrically substituted 9,9-diphenylfluorenes

Method A)

[0095] Compounds asymmetrically substituted with respect to the mirror plane of the 9,9-diphenylfluorene can be obtained in analogy to the preparation of **F(BS1)₂** by simultaneous reaction of **F(Br)₂** with 0.55 equivalent each of two different boronic acids and/or boronic esters (Boron A and Boron B in Table 1) as mixtures of three products, as shown by way of example by the following scheme:

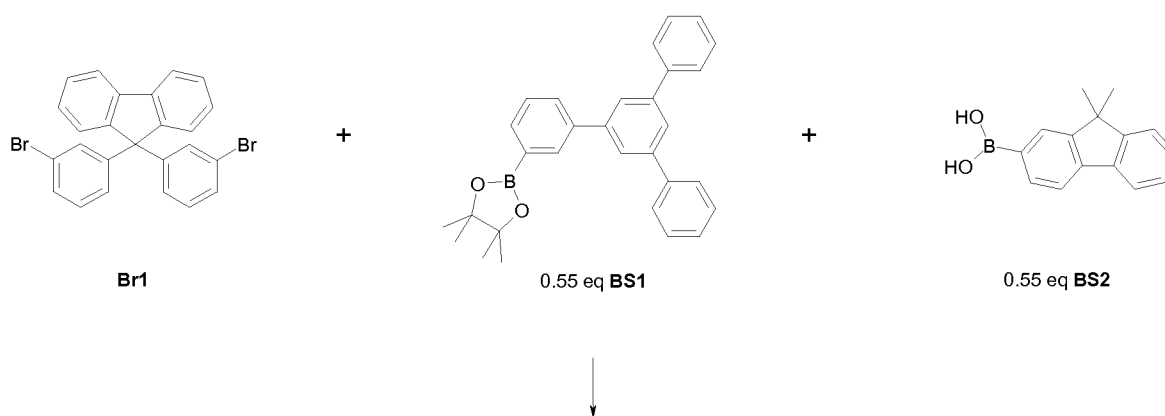

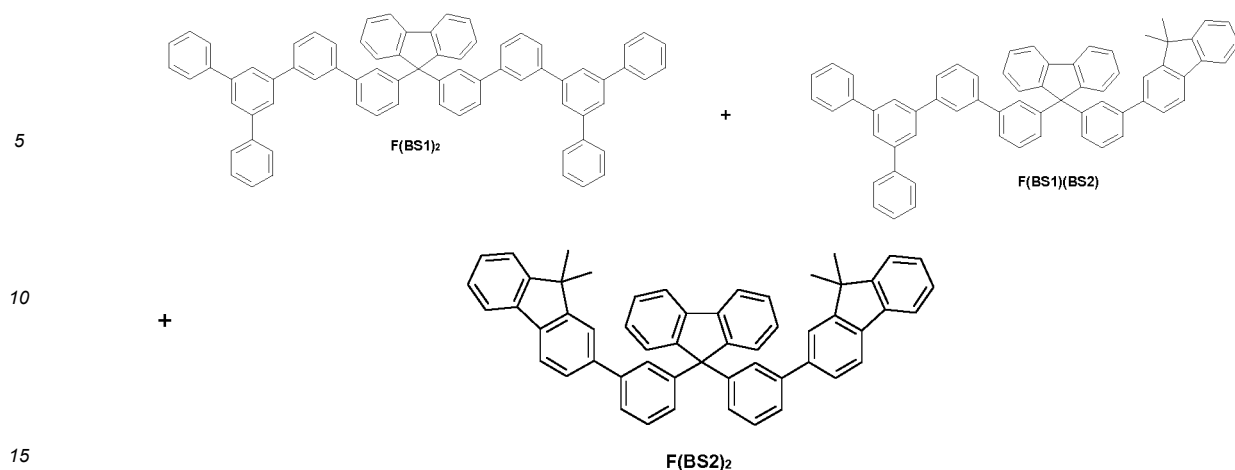

[0096] The crude products of this mixed substitution can be separated by chromatography (e.g. CombiFlash Torrent from A. Semrau). Chromatographic media and eluent mixtures suitable for this purpose are known to those skilled in the art. The products thus isolated can optionally finally be purified further by recrystallization and/or sublimation analogously to the preparation of $F(BS1)_2$ as per A.3.1.


Table 1: Products from the simultaneous reaction of $F(Br)_2$ with two boronic acids/boronic esters (Boron A and Boron B) by Method A

Ex.	Boron A	Boron B	Product isolated	Yield
$F(BS1)_2$	0.55 eq BS1	0.55 eq BS2		23%
$F(BS1)(BS2)$				30% (22%)
$F(BS2)_2$				32%

[0097] The yield reported is based in each case on the products isolated after chromatographic separation and, in brackets, after sublimation thereof.

Method B)


[0098] Further compounds asymmetrically substituted with respect to the mirror plane of the 9,9-diphenylfluorene can be obtained in analogy to Method A by reaction of $F(Br)_2$ with just 0.5 equivalent of a boronic acid or boronic ester as a mixture of three products, as shown by way of example by the following scheme:

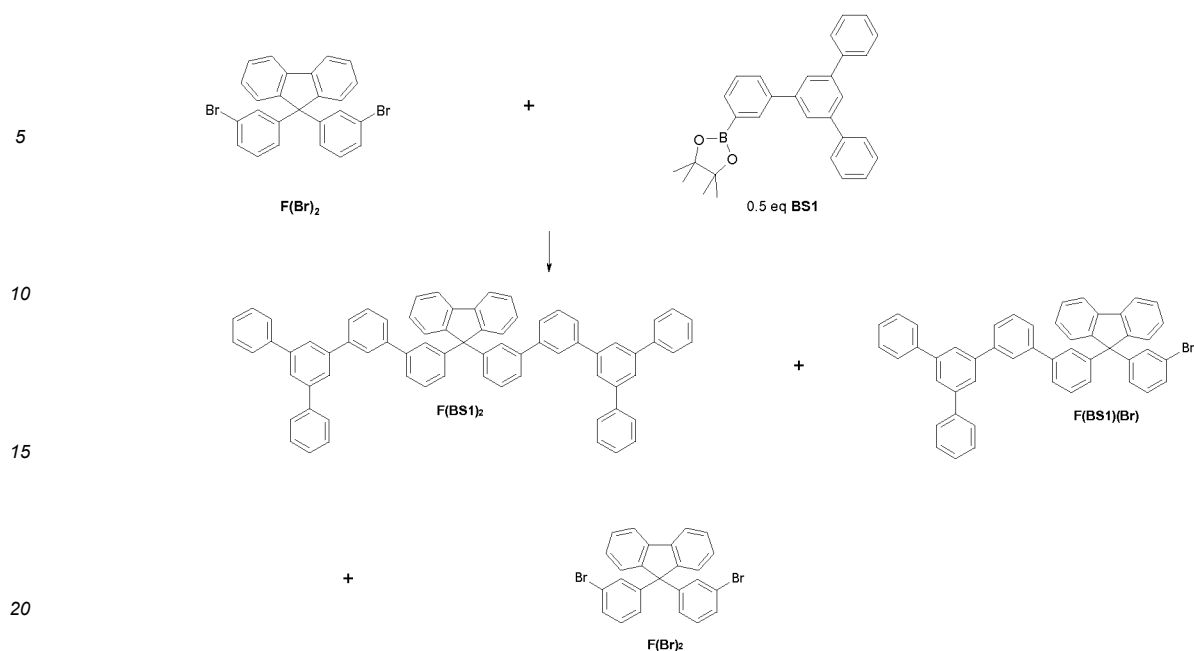

[0099] The crude products of this substoichiometric substitution can be separated by chromatography (e.g. CombiFlash
Torrent from A. Semrau). Chromatographic media and eluent mixtures suitable for this purpose are known to those
skilled in the art.

Ex.	Boron A	Product isolated	Yield
$F(BS1)_2$	0.5% BS1		21%
$F(BS1)(Br)$			33%
$F(Br)_2$			29%

[0100] The $F(BS1)(Br)$ thus obtained can be used, without further purification, to prepare $F(BS1)(H)$ by reaction with
n-butyllithium and subsequent quenching with water:

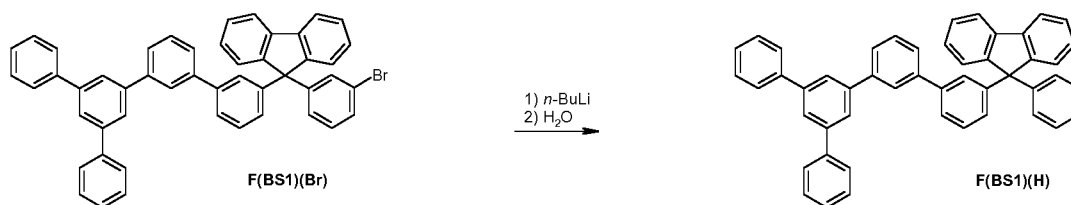

F(BS1)(Br) (4.9 g, 7.0 mmol) is initially charged in 50 ml of tetrahydrofuran and cooled down to -78°C. 2.85 ml of an *n*-butyllithium solution (2.5 M in *n*-hexane, 7.1 mmol) are slowly added dropwise and the mixture is stirred for 1 h, then the cooling is removed. At an internal temperature of about 0°C, 1 ml of water is added dropwise. The mixture is stirred for 1 h and then dried over sodium sulphate. The organic solvents are removed on a rotary evaporator. The residue is recrystallized once from a mixture of toluene and heptane (2:1 v/v). Final fractional sublimation (340°C, p about 10⁻⁵ mbar) leaves 2.5 g of **F(BS1)(H)** (4.0 mmol, 57% of theory) as a colourless solid having a purity of 99.9% by HPLC.


Part B: Device examples

[0101] There are already many descriptions of the production of completely solution-based OLEDs in the literature, for example in WO 2004/037887. There have likewise been many previous descriptions of the production of vacuum-based OLEDs, including in WO 2004/058911. In the examples discussed hereinafter, layers applied in a solution-based and vacuum-based manner are combined within an OLED, and so the processing up to and including the emission layer was effected from solution and in the subsequent layers (hole blocker layer and electron transport layer) from vacuum. For this purpose, the previously described general methods are matched to the circumstances described here and combined as follows:

The structure of the components is as follows:

- substrate
- ITO (50 nm)
- hole injection layer (HIL) (20 nm)
- hole transport layer (HTL) (20 nm)
- emission layer (EML) (60 nm)
- hole blocker layer (HBL) (10 nm)
- electron transport layer (ETL) (40 nm)
- cathode

[0102] Substrates used are glass plates coated with structured ITO (indium tin oxide) of thickness 50 nm. For better processing, they are coated with PEDOT:PSS (poly(3,4-ethylenedioxy-2,5-thiophene) polystyrene-sulphonate, purchased from Heraeus Precious Metals GmbH & Co. KG, Germany). PEDOT:PSS is spun on from water under air and subsequently baked under air at 180°C for 10 minutes in order to remove residual water. The hole transport layer and the emission layer are applied to these coated glass plates. The hole transport layer used is crosslinkable. A polymer of the structure shown below is used, which can be synthesized according to WO 2010/097155.

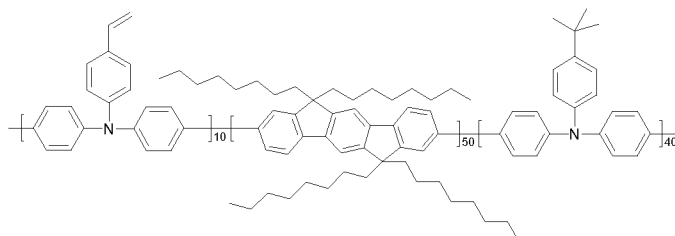

HTM polymer

[0103] The hole transport polymer is dissolved in toluene. The typical solids content of such solutions is about 5 g/l when, as here, the layer thickness of 20 nm which is typical of a device is to be achieved by means of spin-coating. The layers are spun on in an inert gas atmosphere, argon in the present case, and baked at 180°C for 60 minutes.

[0104] The emission layer is always composed of at least one matrix material (host material) and an emitting dopant (emitter). In addition, mixtures of a plurality of matrix materials and co-dopants may occur. Details given in such a form as H1 (40%):H2 (40%):D (20%) mean here that the material H1 is present in the emission layer in a proportion by weight of 40%, the material H2 in a proportion by weight of likewise 40%, and the dopant D in a proportion by weight of 20%. The mixture for the emission layer is dissolved in toluene or optionally chlorobenzene. The typical solids content of such solutions is about 18 g/l when, as here, the layer thickness of 60 nm which is typical of a device is to be achieved by means of spin-coating. The layers are spun on in an inert gas atmosphere, argon in the present case, and baked at 160°C for 10 minutes. Materials used are listed in Tables 2 and 3 - these are both compounds of the invention and comparative examples.

[0105] The materials for the electron transport layer are applied by thermal vapour deposition in a vacuum chamber. The electron transport layer, for example, may consist of more than one material, the materials being added to one

another by co-evaporation in a particular proportion by volume. Details given in such a form as ETM1 :ETM2 (50%:50%) mean here that the ETM1 and ETM2 materials are present in the layer in a proportion by volume of 50% each. The materials used in the present case are shown in Table 2.

[0106] The cathode is formed by the thermal evaporation of an aluminium layer of thickness 100 nm.

[0107] The OLEDs are characterized in a standard manner. For this purpose, the electroluminescence spectra, current-voltage-luminance characteristics (IUL characteristics) assuming Lambertian radiation characteristics and the (operating) lifetime are determined. The IUL characteristics are used to determine parameters such as the operating voltage U (in V) and the external quantum efficiency (in %) at a particular brightness. LD80 @ 10 000 cd/m² is the lifetime until the OLED, given a starting brightness of 10 000 cd/m², has dropped to 80% of the starting intensity, i.e. to 8000 cd/m². The optoelectronic characteristics of the various OLEDs are collated in Table 5. The example Comp. is a comparative example according to the prior art; examples I1-I9 show data of OLEDs comprising materials of the invention. The exact description of the materials used in the EML can be found in Table 4.

[0108] Some of the examples are elucidated in detail hereinafter, in order to illustrate the advantages of the inventive compounds.

Table 2: Structural formulae of the materials used in the OLEDs (without materials of the invention)


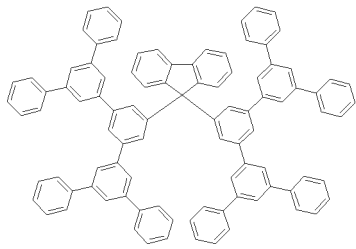
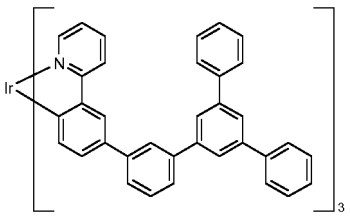






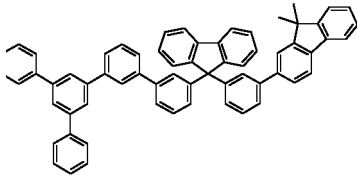


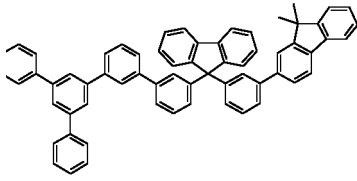
		
RefH 1	RefH2	DG
		
ETM1	ETM2	DR

Table 3: Structural formulae of the materials of the invention used in the OLEDs

		
F(BS1) ₂	F(BS3) ₂	F(BS4) ₂
		
Tab	F(BS1)(H)	BuF(BS4) ₂
		
I	F(BS1)(BS2)	

(continued)

e 3		
-----	--	--

Table 4: EML mixtures in the different device examples (in examples Comp1 and I1 to I6, RefH1, H2 and DG are mixed in a ratio of 40:40:20; in the examples Comp2 and I7 to I9, a mixture of RefH1, H2, DG and DR in a ratio of 20:54:20:6 is used).

	EML composition
Comp1	RefH1; RefH2; DG
I1	RefH1; F(BS1) ₂ ; DG
I2	RefH1; F(BS3) ₂ ; DG
I3	RefH1; F(BS4) ₂ ; DG
I4	RefH1; F(BS1)(BS2); DG
I5	RefH1; F(BS1)(H); DG
I6	RefH1; BuF(BS4) ₂ ; DG
Comp2	RefH1; RefH2; DG; DR
I7	RefH1; F(BS1) ₂ ; DG; DR
I8	RefH1; F(BS1)(BS2); DG; DR
I9	RefH1; F(BS1)(H); DG; DR


Table 5: Working examples comprising the materials of the invention

Exp.	Voltage at 10 mA/cm ²	Efficiency at 1000 cd/m ²	LT80 at 10 000 cd/m ² [h]
Comp1	7.4	15.0%	220
I1	7.5	16.1%	300
I2	7.3	15.4%	210
I3	7.0	15.5%	200
I4	7.5	16.0%	250
I5	7.0	15.1%	190
I6	6.9	16.3%	230
Comp2	7.9	13.6%	245
I7	8.0	13.6%	305
I8	7.8	13.9%	290
I9	7.5	13.5%	270

[0109] As Table 5 shows, the materials of the invention, when used as wide bandgap material in the EML of the OLEDs, result in improvements over the prior art, particularly with regard to lifetime, but also efficiency and operating voltage.

Claims

1. Compound comprising at least one structure of the formula (III)

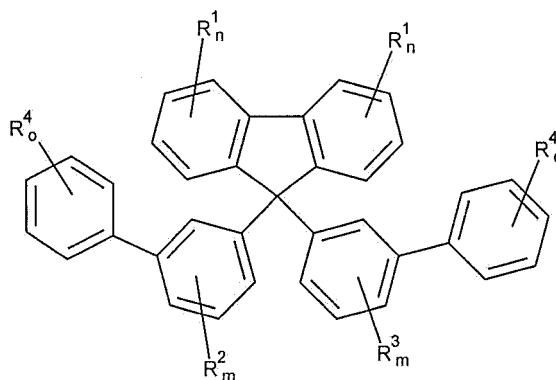

Formula (III)

where the symbols used are as follows:

R^1 , R^2 , R^3 , R^4 is the same or different at each instance and is H, D, F, $\text{Si}(\text{R}^5)_3$, a straight-chain alkyl or alkoxy group having 1 to 40 carbon atoms or a branched or cyclic alkyl or alkoxy group having 3 to 40 carbon atoms, each of which may be substituted by one or more R^5 radicals, where one or more nonadjacent CH_2 groups may be replaced by -O- and where one or more hydrogen atoms may be replaced by D or F, or an aromatic ring system which has 5 to 40 aromatic ring atoms and may be substituted in each case by one or more R^5 radicals, or a combination of these systems; at the same time, it is also possible for two or more adjacent R^1 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system; at the same time, it is also possible for two or more adjacent R^2 substituents together to form a mono- or polycyclic, aliphatic ring system; at the same time, it is also possible for two or more adjacent R^3 substituents together to form a mono- or polycyclic, aliphatic ring system; at the same time, it is also possible for two or more adjacent R^4 substituents together to form a mono- or polycyclic, aliphatic ring system;

R^5 is the same or different at each instance and is H, D, F, $\text{Si}(\text{R}^6)_3$, a straight-chain alkyl or alkoxy group having 1 to 40 carbon atoms or a branched or cyclic alkyl or alkoxy group having 3 to 40 carbon atoms, each of which may be substituted by one or more R^6 radicals, where one or more nonadjacent CH_2 groups may be replaced by -O- and where one or more hydrogen atoms may be replaced by D or F, or an aromatic ring system which has 5 to 40 aromatic ring atoms and may be substituted in each case by one or more R^6 radicals, or a combination of these systems; at the same time, it is also possible for two or more adjacent R^5 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system;

R^6 is the same or different at each instance and is H, D, F or an aliphatic and/or aromatic hydrocarbyl radical having 1 to 20 carbon atoms, in which hydrogen atoms may also be replaced by F; at the same time, it is also possible for two or more adjacent R^6 substituents together to form a mono- or polycyclic, aliphatic or aromatic ring system;

m is independently 0 or 1, where the sum total of the indices m is not more than 1;


n is independently 0, 1, 2, 3 or 4;

o is independently 0, 1, 2, 3, 4 or 5;

with the proviso that the R^2 radicals and the R^4 radicals comprise a total of at least 12 aromatic carbon ring atoms.

2. Compound according to at least one of the preceding claims, **characterized in that** the compound has a molecular weight of not more than 5000 g/mol.
3. Compound according to at least one of the preceding claims, **characterized in that** the compound is a hydrocarbon or a fluorinated hydrocarbon, preferably a hydrocarbon.
4. Compound according to at least one of the preceding claims, **characterized in that** the R^1 radicals do not form a fused ring system with the ring atoms of the fluorene structure.
5. Compound according to at least one of the preceding claims, **characterized in that** the R^2 radicals do not form a fused ring system with the ring atoms of the phenyl group to which the R^2 radicals are bonded.

6. Compound according to at least one of the preceding claims, **characterized in that** the R^3 radicals do not form a fused ring system with the ring atoms of the phenyl group to which the R^3 radicals are bonded.
7. Compound according to at least one of the preceding claims which can be represented by a structure of the formula (IV)

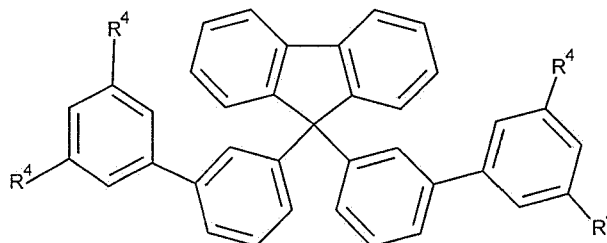


Formula (IV)

where the R^4 symbol used is as defined in Claim 1.

8. Composition comprising at least one compound according to one or more of Claims 1 to 7 and at least one further compound selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, electron transport materials, electron injection materials, hole conductor materials, hole injection materials, electron blocker materials and hole blocker materials.
9. Formulation comprising at least one compound according to one or more of Claims 1 to 7 and/or at least one composition according to Claim 8 and at least one solvent.
10. Use of a compound according to one or more of Claims 1 to 7 or of a composition according to Claim 8 in an electronic device, preferably as a wide band gap material.
11. Electronic device comprising at least one compound according to one or more of Claims 1 to 7 or a composition according to Claim 8, wherein the electronic device is selected from the group consisting of organic electroluminescent devices (OLEDs, PLEDs), organic field-effect transistors (O-FETs), organic thin-film transistors (O-TFTs), organic light-emitting transistors (O-LETs), organic integrated circuits (O-ICs), organic solar cells (O-SCs), organic field-quench devices (O-FQDs), light-emitting electrochemical cells (LECs), organic laser diodes (O-lasers) or organic photoreceptors.

Patentansprüche

1. Verbindung, umfassend mindestens eine Struktur der Formel (III)

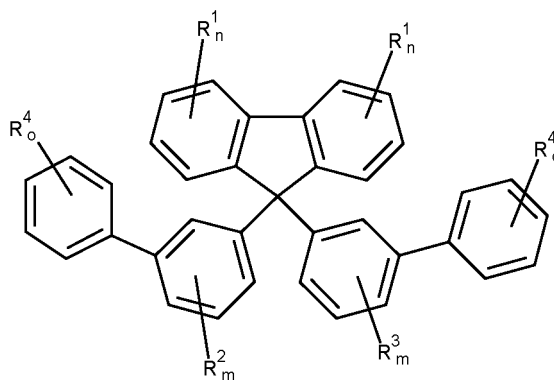

Formel (III)

wobei für die verwendeten Symbole gilt:

R^1 , R^2 , R^3 , R^4 ist bei jedem Auftreten gleich oder verschieden H, D, F, $\text{Si}(\text{R}^5)_3$, eine geradkettige Alkyl- oder Alkoxygruppe mit 1 bis 40 Kohlenstoffatomen oder eine verzweigte oder cyclische Alkyl- oder Alkoxygruppe mit 3 bis 40 Kohlenstoffatomen, die jeweils mit einem oder mehreren Resten R^5 substituiert sein kann, wobei eine oder mehrere nicht benachbarte CH_2 -Gruppen durch -O-ersetzt sein können und wobei ein oder mehrere Wasserstoffatome durch D oder F ersetzt sein können, oder ein aromatisches Ringsystem mit 5 bis 40 aromatischen Ringatomen, das jeweils durch einen oder mehrere Reste R^5 substituiert sein kann, oder eine Kombination dieser Systeme; dabei können zwei oder mehr benachbarte Substituenten R^1 auch miteinander ein mono- oder polycyclisches, aliphatisches oder aromatisches Ringsystem bilden; dabei können zwei oder mehr benachbarte Substituenten R^2 auch miteinander ein mono- oder polycyclisches, aliphatisches Ringsystem bilden; dabei können zwei oder mehr benachbarte Substituenten R^3 auch miteinander ein mono- oder polycyclisches, aliphatisches Ringsystem bilden; dabei können zwei oder mehr benachbarte Substituenten R^4 auch miteinander ein mono- oder polycyclisches, aliphatisches Ringsystem bilden;

R^5 ist bei jedem Auftreten gleich oder verschieden H, D, F, $\text{Si}(\text{R}^6)_3$, eine geradkettige Alkyl- oder Alkoxygruppe mit 1 bis 40 Kohlenstoffatomen oder eine verzweigte oder cyclische Alkyl- oder Alkoxygruppe mit 3 bis 40 Kohlenstoffatomen, die jeweils mit einem oder mehreren Resten R^6 substituiert sein kann, wobei eine oder mehrere nicht benachbarte CH_2 -Gruppen durch -O- ersetzt sein können und wobei ein oder mehrere Wasserstoffatome durch D oder F ersetzt sein können, oder ein aromatisches Ringsystem mit 5 bis 40 aromatischen Ringatomen, das jeweils durch einen oder mehrere Reste R^6 substituiert sein kann, oder eine Kombination dieser Systeme; dabei können zwei oder mehr benachbarte Substituenten R^5 auch miteinander ein mono- oder polycyclisches, aliphatisches oder aromatisches Ringsystem bilden;

R^6 ist bei jedem Auftreten gleich oder verschieden H, D, F oder ein aliphatischer und/oder aromatischer Kohlenwasserstoffrest mit 1 bis 20 C-Atomen, in dem auch Wasserstoffatome durch F ersetzt sein können; dabei können zwei oder mehr benachbarte Substituenten R^6 auch miteinander ein mono- oder polycyclisches, aliphatisches oder aromatisches Ringsystem bilden;


m stellt jeweils unabhängig 0 oder 1 dar, wobei die Summe der Indices m höchstens 1 beträgt;

n stellt jeweils unabhängig 0, 1, 2, 3 oder 4 dar;

o stellt jeweils unabhängig 0, 1, 2, 3, 4 oder 5 dar;

mit der Maßgabe, dass die Reste R^2 und die Reste R^4 in Summe mindestens zwölf aromatische Kohlenstoffringatome umfassen.

2. Verbindung nach mindestens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Verbindung ein Molekulargewicht von nicht mehr als 5000 g/mol aufweist.
3. Verbindung nach mindestens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Verbindung ein Kohlenwasserstoff oder ein fluorierter Kohlenwasserstoff ist, vorzugsweise ein Kohlenwasserstoff.
4. Verbindung nach mindestens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Reste R^1 mit den Ringatomen der Fluorenstruktur kein kondensiertes Ringsystem bilden.
5. Verbindung nach mindestens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Reste R^2 mit den Ringatomen der Phenylgruppe, an die die Reste R^2 gebunden sind, kein kondensiertes Ringsystem bilden.
6. Verbindung nach mindestens einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die R^3 -Reste mit den Ringatomen der Phenylgruppe, an die die Reste R^3 gebunden sind, kein kondensiertes Ringsystem bilden.
7. Verbindung nach mindestens einem der vorhergehenden Ansprüche, darstellbar durch eine Struktur der Formel (IV)

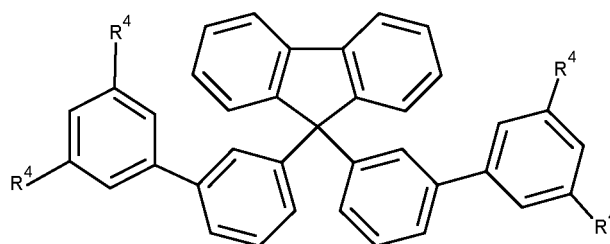


Formel (IV)

wobei das verwendete Symbol R⁴ die in Anspruch 1 genannte Bedeutung aufweist.

8. Zusammensetzung, umfassend mindestens eine Verbindung nach einem oder mehreren der Ansprüche 1 bis 7 und mindestens eine weitere Verbindung ausgewählt aus der Gruppe bestehend aus fluoreszierenden Emittern, phosphoreszierenden Emittern, Hostmaterialien, Matrixmaterialien, Elektronentransportmaterialien, Elektroneninjektionsmaterialien, Lochleitermaterialien, Lochinjektionsmaterialien, Elektronenblockiermaterialien und Lochblockiermaterialien.
9. Formulierung, umfassend mindestens eine Verbindung nach einem oder mehreren der Ansprüche 1 bis 7 und/oder mindestens eine Zusammensetzung nach Anspruch 8 und mindestens ein Lösungsmittel.
10. Verwendung einer Verbindung nach einem oder mehreren der Ansprüche 1 bis 7 oder einer Zusammensetzung nach Anspruch 8 in einer elektronischen Vorrichtung, vorzugsweise als Wide-Band-Gap-Material.
11. Elektronische Vorrichtung, umfassend mindestens eine Verbindung nach einem oder mehreren der Ansprüche 1 bis 7 oder eine Zusammensetzung nach Anspruch 8, wobei die elektronische Vorrichtung ausgewählt ist aus der Gruppe bestehend aus organischen Elektrolumineszenzvorrichtungen (OLEDs, PLEDs), organischen Feldeffekttransistoren (O-FETs), organischen Dünnschichttransistoren (O-TFTs), organischen lichtemittierenden Transistoren (O-LETs), organischen integrierten Schaltungen (O-ICs), organischen Solarzellen (O-SCs), organischen Feld-Quench-Devices (O-FQDs), lichtemittierenden elektrochemischen Zellen (LECs), organischen Laserdioden (O-Laser) oder organischen Photorezeptoren.

Revendications

1. Composé comprenant au moins une structure de formule (III)

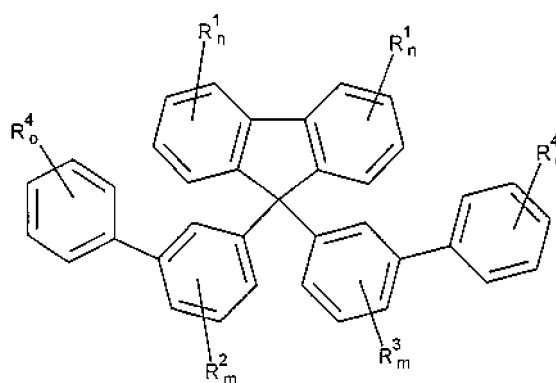

Formule (III)

où les symboles utilisés sont comme suit :

R¹, R², R³, R⁴ sont identiques ou différents dans chaque cas et sont H, D, F, Si(R⁵)₃, un groupe alkyle ou alcoxy à chaîne linéaire ayant 1 à 40 atomes de carbone ou un groupe alkyle ou alcoxy ramifié ou cyclique ayant 3 à 40 atomes de carbone, dont chacun peut être substitué par un ou plusieurs radicaux R⁵, où un ou plusieurs

groupes CH₂ non adjacents peuvent être remplacés par -O- et où un ou plusieurs atomes d'hydrogène peuvent être remplacés par D ou F, ou un système cyclique aromatique qui a 5 à 40 atomes de cycle aromatique et peut être substitué dans chaque cas par un ou plusieurs radicaux R⁵, ou une combinaison de ces systèmes ; simultanément, il est également possible que deux ou plus de deux substituants R¹ adjacents forment conjointement un système cyclique aliphatique ou aromatique, mono- ou polycyclique ; simultanément, il est également possible que deux ou plus de deux substituants R² adjacents forment conjointement un système cyclique aliphatique, mono- ou polycyclique ; simultanément, il est également possible que deux ou plus de deux substituants R³ adjacents forment conjointement un système cyclique aliphatique, mono- ou polycyclique ; simultanément, il est également possible que deux ou plus de deux substituants R⁴ adjacents forment conjointement un système cyclique aliphatique, mono- ou polycyclique ;

R⁵ est identique ou différent dans chaque cas et est H, D, F, Si(R⁶)₃, un groupe alkyle ou alcoxy à chaîne linéaire ayant 1 à 40 atomes de carbone ou un groupe alkyle ou alcoxy ramifié ou cyclique ayant 3 à 40 atomes de carbone, dont chacun peut être substitué par un ou plusieurs radicaux R⁶, où un ou plusieurs groupes CH₂ non adjacents peuvent être remplacés par -O- et où un ou plusieurs atomes d'hydrogène peuvent être remplacés par D ou F, ou un système cyclique aromatique qui a 5 à 40 atomes de cycle aromatique et peut être substitué dans chaque cas par un ou plusieurs radicaux R⁶, ou une combinaison de ces systèmes ; simultanément, il est également possible que deux ou plus de deux substituants R⁵ adjacents forment conjointement un système cyclique aliphatique ou aromatique, mono- ou polycyclique ;

R⁶ est identique ou différent dans chaque cas et est H, D, F ou un radical hydrocarbyle aliphatique et/ou aromatique ayant 1 à 20 atomes de carbone, dans lequel des atomes d'hydrogène peuvent également être remplacés par F ; simultanément, il est également possible que deux ou plus de deux substituants R⁶ adjacents forment conjointement un système cyclique aliphatique ou aromatique, mono- ou polycyclique ;


m est indépendamment 0 ou 1, où la somme totale des indices m n'est pas supérieure à 1 ;

n est indépendamment 0, 1, 2, 3 ou 4 ;

0 est indépendamment 0, 1, 2, 3, 4 ou 5 ;

à condition que les radicaux R² et les radicaux R⁴ comprennent un total d'au moins 12 atomes de carbone de cycle aromatique.

2. Composé selon au moins l'une des revendications précédentes, **caractérisé en ce que** le composé a un poids moléculaire d'au plus 5000 g/mol.
3. Composé selon au moins l'une des revendications précédentes, **caractérisé en ce que** le composé est un hydrocarbure ou un hydrocarbure fluoré, de préférence un hydrocarbure.
4. Composé selon au moins l'une des revendications précédentes, **caractérisé en ce que** les radicaux R¹ ne forment pas un système cyclique condensé avec les atomes de cycle de la structure de fluorène.
5. Composé selon au moins l'une des revendications précédentes, **caractérisé en ce que** les radicaux R² ne forment pas un système cyclique condensé avec les atomes de cycle du groupe phényle auquel les radicaux R² sont liés.
6. Composé selon au moins l'une des revendications précédentes, **caractérisé en ce que** les radicaux R³ ne forment pas un système cyclique condensé avec les atomes de cycle du groupe phényle auquel les radicaux R³ sont liés.
7. Composé selon au moins l'une des revendications précédentes qui peut être représenté par une structure de formule (IV)

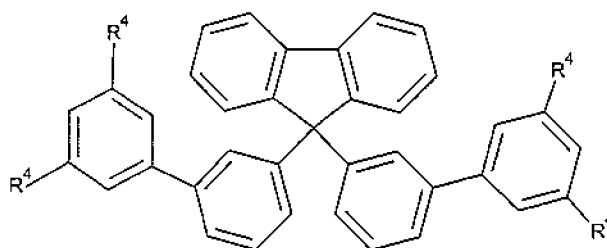

Formule (IV)

où le symbole R^4 utilisé est tel que défini dans la revendication 1.

8. Composition comprenant au moins un composé selon un ou plusieurs des revendications 1 à 7 et au moins un composé supplémentaire choisi dans le groupe constitué d'émetteurs fluorescents, émetteurs phosphorescents, matériaux hôtes, matériaux de matrice, matériaux de transport d'électron, matériaux d'injection d'électron, matériaux conducteurs de trou, matériaux d'injection de trou, matériaux bloqueurs d'électron et matériaux bloqueurs de trou.
9. Formulation comprenant au moins un composé selon un ou plusieurs des revendications 1 à 7 et/ou au moins une composition selon la revendication 8 et au moins un solvant.
10. Utilisation d'un composé selon un ou plusieurs des revendications 1 à 7 ou d'une composition selon la revendication 8 dans un dispositif électronique, de préférence en tant que matériau à large bande interdite.
11. Dispositif électronique comprenant au moins un composé selon un ou plusieurs des revendications 1 à 7 ou une composition selon la revendication 8, le dispositif électronique étant choisi dans le groupe constitué de dispositifs électroluminescents organiques (OLED, PLED), transistors à effet de champ organiques (O-FET), transistors à couche mince organiques (O-TFT), transistors électroluminescents organiques (O-LET), circuits intégrés organiques (O-IC), cellules solaires organiques (O-SC), dispositifs d'extinction de champ organiques (O-FQD), cellules électrochimiques électroluminescentes (LEC), diodes laser organiques (O-lasers) ou photorécepteurs organiques.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4539507 A [0002]
- US 5151629 A [0002]
- EP 0676461 A [0002]
- WO 9827136 A [0002]
- WO 2009124627 A [0003]
- WO 2011060859 A [0003]
- US 20120061714 A [0004]
- JP 2011082238 A [0004]
- EP 1993154 A [0004]
- US 20130221335 A [0004]
- WO 2008147110 A [0004]
- US 20120080667 A [0004]
- US 20110253994 A [0004]
- US 20120056171 A [0004]
- WO 2015046955 A [0004]
- CN 103194215 [0004]
- CN 104037339 [0004]
- WO 02072714 A [0053]
- WO 03019694 A [0053]
- WO 05011013 A [0061]
- WO 2014094964 A [0066]
- WO 0070655 A [0069]
- WO 0141512 A [0069]
- WO 200202714 A [0069]
- WO 200215645 A [0069]
- EP 1191613 A [0069]
- EP 1191612 A [0069]
- EP 1191614 A [0069]
- WO 2005033244 A [0069]
- WO 2014023377 A [0069]
- WO 2015104045 A [0069]
- WO 2015117718 A [0069]
- EP 15000307 [0069]
- WO 06122630 A [0073]
- WO 08006449 A [0073]
- WO 07140847 A [0073]
- WO 06000388 A [0073]
- WO 06058737 A [0073]
- WO 06000389 A [0073]
- WO 07065549 A [0073]
- WO 07115610 A [0073]
- WO 2010012328 A [0073]
- EP 1476881 A [0074]
- EP 1596445 A [0074]
- WO 2004037887 A [0101]
- WO 2004058911 A [0101]
- WO 2010097155 A [0102]

Non-patent literature cited in the description

- *J. Mater. Chem. C*, 2014, 2028-2036 [0045]
- Session 21 OLED (5). T. MATSUMOTO ; T. NAKADA ; J. ENDO ; K. MORI ; N. KAWAMURA ; A. YOKOI ; J. KIDO. Multiphoton Organic EL Device Having Charge Generation Layer. IDMC, 2003 [0060]
- M. S. ARNOLD et al. *Appl. Phys. Lett.*, 2008, vol. 92, 053301 [0077]
- *J. Mater. Chem. C*, 2014, vol. 2, 2028-2036 [0087]

专利名称(译)	有机电致发光材料		
公开(公告)号	EP3297978B1	公开(公告)日	2020-04-01
申请号	EP2016721637	申请日	2016-04-27
申请(专利权)人(译)	MERCK PATENT GMBH		
当前申请(专利权)人(译)	MERCK PATENT GMBH		
[标]发明人	JOOSTEN DOMINIK MAIER FLAIG FLORIAN HAYER ANNA HEIL HOLGER		
发明人	JOOSTEN, DOMINIK MAIER-FLAIG, FLORIAN HAYER, ANNA HEIL, HOLGER		
IPC分类号	C09K11/06 C07C13/567 C07C13/72 H01L51/00 H01L51/50		
CPC分类号	C07C13/567 C07C13/72 C07C2603/18 C09K11/06 C09K2211/1007 C09K2211/1011 H01L51/0052 H01L51/0058 H01L51/5012 H01L51/5016 H01L51/5056 H01L51/5072 H01L51/5096 Y02E10/549 H01L51/5024 C07C13/62 C07C2601/14 C07C2602/08 C07C2602/10 C07C2603/40 C07C2603/52 C07C2603/97 H01L51/0054 H01L51/0055 H01L51/0056		
优先权	2015001477 2015-05-18 EP		
其他公开文献	EP3297978A1		
外部链接	Espacenet		

摘要(译)

本发明涉及苝衍生物和有机电子器件，其中这些化合物在发光层中用作基质材料和/或用作空穴传输材料和/或用作电子阻挡剂或激子阻挡剂材料和/或用作电子传输材料。。

