

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 June 2002 (27.06.2002)

PCT


(10) International Publication Number
WO 02/50925 A1

- (51) International Patent Classification⁷: **H01L 51/20**, H05B 33/04 (74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB01/02370 (81) Designated States (*national*): CN, JP, KR.
- (22) International Filing Date: 6 December 2001 (06.12.2001) (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 00204653.0 20 December 2000 (20.12.2000) EP
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: **LIEDENBAUM, Coen, T., H., F.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

Published:
— with international search report
— entirely in electronic form (except for this front page) and available upon request from the International Bureau

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE, PARTICULARLY AN ELECTROLUMINESCENT DISPLAY DEVICE, AND METHOD OF MANUFACTURING SUCH A DEVICE

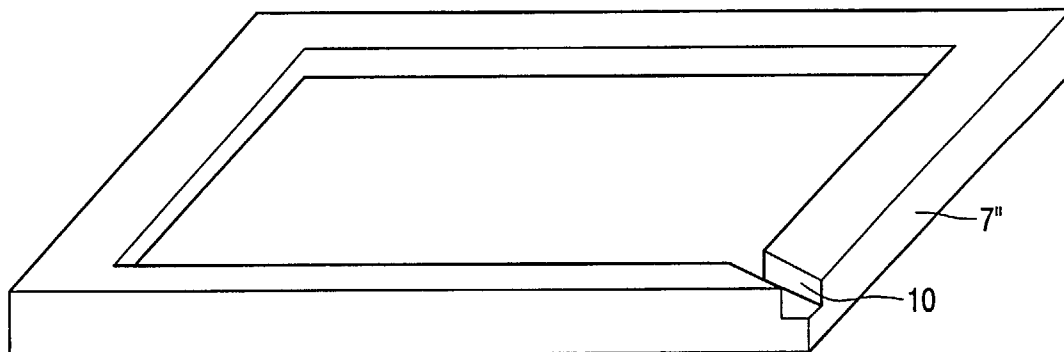

(57) Abstract: The invention relates to a device, particularly an electroluminescent display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an electroluminescent element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. At least one channel is provided in said interface.



WO 02/50925 A1

Device, particularly an electroluminescent display device, and method of manufacturing such a device

The invention relates to a device, particularly an electroluminescent (EL) display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an EL element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. The invention also
5 relates to a method of manufacturing said device, the method at least comprising the steps of applying a thermosetting adhesive to the interface of at least one of the parts, bringing the parts together and thus forming a cavity (for) accommodating one or more components such as an electroluminescent element, and heating the device so as to cure the thermosetting adhesive.

10 An EL display device emits light when the device is suitably connected to a power supply. If the light emission originates in an organic material, said device is referred to as an organic EL device. An (organic) EL device can be used, inter alia, as a thin light source having a large luminous surface area, such as a backlight for a liquid crystal display (LCD) or a watch. An (organic) EL device can also be used as a display if the EL device comprises a
15 (large) number of EL elements, which may or may not be independently addressable.

A device of the type mentioned in the opening paragraph is disclosed in European patent application EP 0 350 907 A2. This publication describes (in conjunction with Fig. 2) a conventional thin film EL panel which is prepared by forming, on a glass base plate (2), a lower transparent electrode (3), a lower insulating layer (4), a luminescent layer
20 (5), an upper insulating layer (6) and an upper electrode (7), in this order. The constitution of the layers (3 to 7) is called an EL element (1). In order to prevent moisture from reaching the EL element, it is covered by a glass cover (8) which is adhered to the glass base plate (2) by a thermosetting adhesive, such as an epoxy. By heating the entire assembly to a temperature typically in the range of e.g. from 80 to 130°C during 45 to 5 minutes, respectively, the
25 epoxy is cured and the cover is sealed onto the glass plate.

During this process, the viscosity of the adhesive initially decreases to a level that allows it to flow over the substrate. At the same time, the pressure of the gas trapped in the cavity defined by the cover and the substrate increases. As a result of this concurrence, the adhesive seal may be damaged or even broken.

It is an object of the present invention to avoid this kind of damage or at least reduce the risk that such damage occurs.

To this end, the device according to the present invention is characterized in that at least one channel is provided in said interface. Such a channel allows controlled
5 displacement of the adhesive while curing the adhesive, thus relieving the pressure on the rest of the seal.

It is preferred that a reservoir for the adhesive is present at one or both ends of the channel(s), preferably at least a capillary reservoir at the end of the channel that is farthest removed from the cavity, i.e. outside the cavity. Thus, adhesive can be supplied from the
10 channel and from within the cavity and the displaced adhesive is captured by the outside reservoir without risking interference of the adhesive with other components of the device.

The invention also relates to a method of manufacturing a device as described above which method is characterized in that, after bringing the parts together, at least one channel is present in the interface of these parts, and in that the amount of adhesive in the
15 channel and/or in the cavity near the channel is such that the increase of pressure resulting from said heating is at least partially relieved by displacement of the adhesive in the channel(s).

The invention will now be further explained with reference to the drawings in which two embodiments of the device according to the present invention are schematically
20 shown.

Figure 1 is a cross-section of a device in which the present invention can be applied.

Figure 2 shows a cover in accordance with the state of the art which is commonly used in devices of the kind shown in Figure 1.

25 Figures 3, 4 and 5 show three embodiments of a cover in accordance with the present invention.

Figure 6 shows the typical changes in the viscosity of a thermosetting adhesive while curing.

Figure 1 shows an electroluminescent (EL) display device 1, comprising a
30 glass substrate 2 on which several layers have been deposited by means of processes which are generally known in the art, such as physical or chemical vapor deposition. The device 1 comprises an active or emissive layer 3 comprising an organic electro-luminescent material, such as a coumarin, or a conjugated polymer like PPV (poly(P-phenylene vinylene)) or a PPV-derivative, sandwiched between two patterns of electrode layers of an electrically

conductive material. In this example, the electrode layers comprise column or data electrodes 4, which are deposited directly onto the glass substrate 2, and row or selection electrodes 5, thus forming a matrix of light-emitting diodes (LEDs). At least electrode layer 4 is made of a material, such as indium tin oxide (ITO), which is transparent to the light emitted by the active layer 3. During operation, the column electrodes 4 are driven in such a way that they are at a sufficiently high positive voltage relative to the row electrodes 5, to inject holes in the active layer 3.

After depositing the electrodes 4, 5 and the active layer 3, a pattern of a thermosetting adhesive 6, such as a two-component epoxy resin, is plotted onto the glass substrate 2 and across electrically conductive tracks 4' and 5'. The shape of the pattern of the plotted adhesive is substantially equal to the shape of the interface, such as a lower rim, of a cover, in this case a pre-formed lid 7 of a metal sheet material, with which the assembly is to be hermetically sealed. The traces 4' and 5' provide an electric connection to pads outside the perimeter of the lid 7.

After placing the lid 7, which in this particular example has a rectangular shape, in general register with and on top of the plotted adhesive 6, the adhesive 6 is cured by elevating the temperature of the entire assembly. Typically, the temperature is raised from room temperature, i.e. approximately 25°C, to a temperature of 80°C. As a result of this increase in temperature, the pressure of the gas trapped in the cavity 8 defined by the substrate 2 and the cover 7 also increases, thus exerting considerable forces on the seal. At the outset of the curing process, the adhesive in the seal still has a low viscosity. Accordingly, the seal is still rather vulnerable and may be damaged by said forces.

This problem could be suppressed by providing a hole 9 in the lid 7' as shown in Fig. 2, which serves to equalize the pressure inside and outside the cavity 8. However, such a hole 9 has to be sealed in a separate and additional process step and the resulting seal remains a potentially weak spot in the finished product.

Figs. 3, 4 and 5 show three embodiments of a lid 7'' in accordance with the present invention. The interface or rim 11 of the lid 7'' in Fig. 3 is provided with a channel 10 in one of its four corners. The channel 10 may be provided in the plane of the rim 11 as depicted in Figs. 3 and 4, or may be provided through to the lid 7'' having an opening in the plane of the rim 11. Once the adhesive 6 has been plotted onto the substrate 2 and/or onto the rim 11 into the channel 10 of the lid 7'', the lid 7'' is placed over the EL element, thus defining the cavity and forming an uncured seal. The seal is subsequently cured by heating

the assembly to a temperature at which the components in the adhesive begin the react (cross-link).

Figure 6 shows an example of typical changes in the viscosity of a thermosetting adhesive when the temperature is raised from room temperature, i.e. approximately 25°C at time $t = 10$ minutes to a temperature of 80°C. As in most liquid materials, the viscosity initially drops as a result of the increased temperature (e.g., $t = 10$ min to $t \cong 12$ min). Once the cross-linking of the components starts, the viscosity of the adhesive gradually increases until the curing is completed (e.g., $t \cong 12$ min to $t \cong 15$ min).

The present invention utilizes this behavior of the adhesive: when the adhesive is still in a liquid phase, it can be easily displaced in the channel 10 which connects the cavity to the outside environment. Thus the gas inside the cavity 8 is allowed to expand and an effective pressure relief for the rest of the seal is provided. By the time the adhesive begins to cure, the temperature and hence the pressure of said gas will substantially not increase any further, or at least not to such an extent that the integrity of the seal is at risk, and pressure relief is no longer required. When the obtained device cools down, the pressure in the cavity will drop e.g. to a level which is substantially equal to atmospheric pressure or, depending on the dimensions of the cavity and the channel(s), a sub-atmospheric pressure. In the latter case, the strength of the seal is enhanced even further.

It is preferred that an additional amount of adhesive is applied at or near the end of the channel(s) nearest the cavity. In that case, the corner of the lid 7'' where the channel 10 is located effectively serves as a supply reservoir.

A (receiving) reservoir for the adhesive is preferably present at the other end of the channel. Fig. 4 shows a reservoir essentially consisting of two elongated recesses 12 adjacent the end of the channel 10 that is farthest remote from the cavity 8. During expansion of the gas inside the cavity 8, the adhesive present in the cavity 8 and the channel 10 is pushed outwards and captured by the capillary recesses formed by the elongated recesses 12 and the top surface of the glass substrate 2.

Pressure relief is further enhanced if the device comprises two or more channels, for instance, one in each corner of the lid 7''. It is preferred that the volume of the channel(s) or, if one or more reservoirs are present, the combined volume of the channel(s) and the reservoir(s), is substantially equal to or larger than the difference of the volume of the gas contained in the cavity at the operating temperature of the device and the volume of said gas at the curing temperature of the adhesive.

A getter may be present in the cavity, e.g. attached to the internal surface of the lid. The lid may be shaped in such a way as to reduce the volume of the cavity and hence the ability of the gas in the cavity to expand.

As a matter of course, the channel(s) can be provided in the substrate, e.g. by means of etching, instead of or in addition to the channel(s) in the lid or other parts defining the cavity. Moreover, it is not necessary that the channel (or channels) bridges the entire interface. Instead, the channel may, for instance, extend upwardly through the edge and the upper surface of the lid, provided that such a channel remains in fluid communication with the adhesive in the seal whilst curing. Also, the lid may have other shapes, e.g. octagonal or oval, and may be made of a transparent material, e.g. when the lid covers (one of) the display side(s) of the EL element.

The invention is not limited to the embodiments described above and can be varied in a number of ways within the scope of the claims. For instance, although the above description is primarily directed towards EL devices, the invention can be applied in other devices where the increase of pressure of internal or trapped gases during the thermosetting of an adhesive in a seal may cause damage to that seal.

In summary, the invention relates to a device, particularly an electroluminescent display device, comprising two or more parts which define a cavity for accommodating one or more components, such as an electroluminescent element, and which are sealed together by means of a thermosetting adhesive present at the interface of the two or more parts. At least one channel is provided in said interface.

CLAIMS:

1. A device, particularly an electroluminescent display device (1), comprising two or more parts (2, 7) which define a cavity (8) for accommodating one or more components, such as an electroluminescent element (3, 4, 5), and which are sealed together by means of a thermosetting adhesive (6) present at the interface (11) of the two or more parts (2, 7), **characterized in that** at least one channel (10) is provided in said interface (11).
2. A device as claimed in claim 1, wherein a reservoir for the adhesive (6) is present at one or both ends of the channel(s) (10).
3. A device as claimed in claim 2, wherein a capillary reservoir (12) is located at the end of the channel(s) (10) that is (are) farthest remote from said cavity (8), i.e. outside the cavity (8).
4. A device as claimed in any one of the preceding claims, wherein one of the parts (2, 7'') has a substantially polygonal, e.g. rectangular, interface (11) with the channel(s) (10) being located in one (or more) of the corners of the polygonal interface (11).
5. A device as claimed in any one of the preceding claims, which device comprises a substantially flat substrate (2) on which an electroluminescent element (3, 4, 5) is deposited and a pre-formed cover (7'') of a sheet material, which is shaped to define part of the cavity (8), the channel(s) (10) and, optionally, the reservoir(s).
6. A method of manufacturing a device, particularly an electroluminescent display device (1), comprising two or more parts (2, 7), the method at least comprising the steps of applying a thermosetting adhesive (6) to the interface (11) of at least one of the parts (2, 7), bringing the parts (2, 7) together and thus forming a cavity (8) (for) accommodating one or more components, such as an electroluminescent element (3, 4, 5), and heating the device so as to cure the thermosetting adhesive (6), **characterized in that**, after bringing the parts (2, 7'') together, at least one channel (10) is present in the interface (11) of these parts

(2, 7), and in that the amount of adhesive (6) in the channel (10) and/or in the cavity (8) near the channel (10) is such that the increase of pressure resulting from the said heating is at least partially relieved by displacement of the adhesive (6) in the channel(s) (10).

- 5 7. A method as claimed in claim 6, wherein the adhesive (6) flowing out of the channel (10) is captured by at least one reservoir (12) outside said cavity (8).

1/3

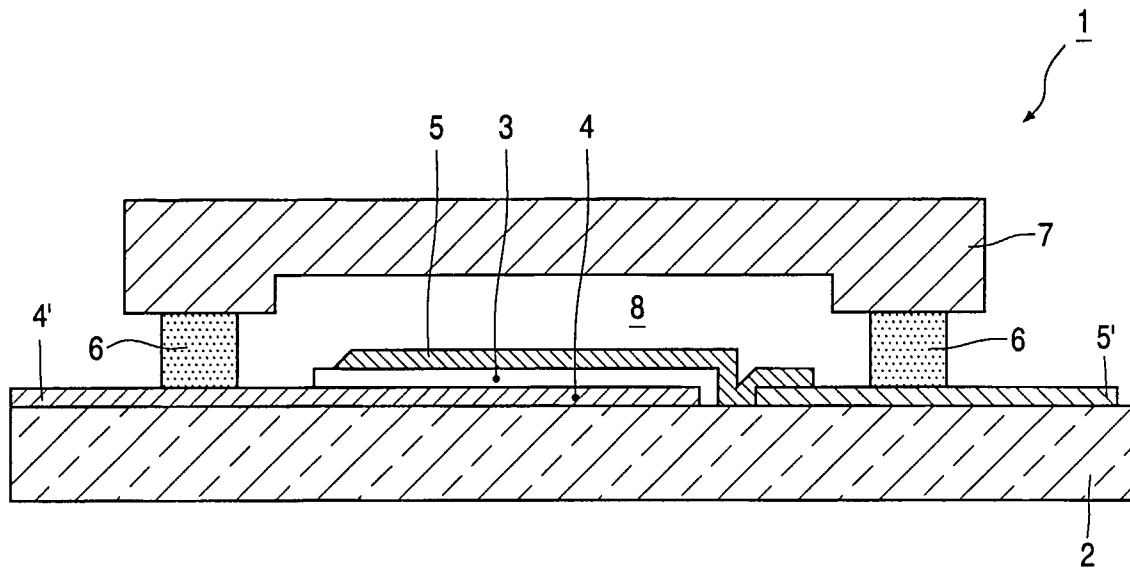


FIG. 1

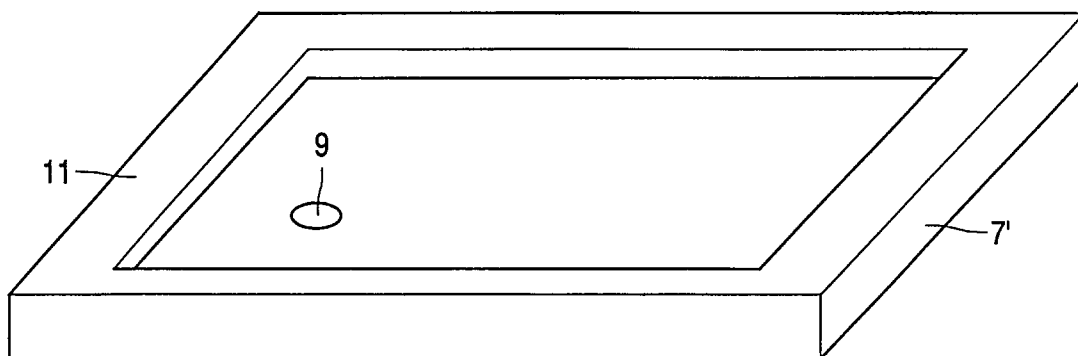


FIG. 2

2/3

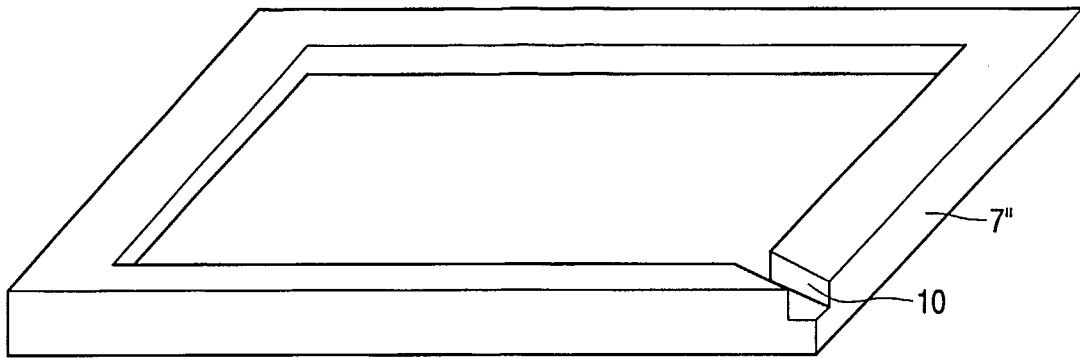


FIG. 3

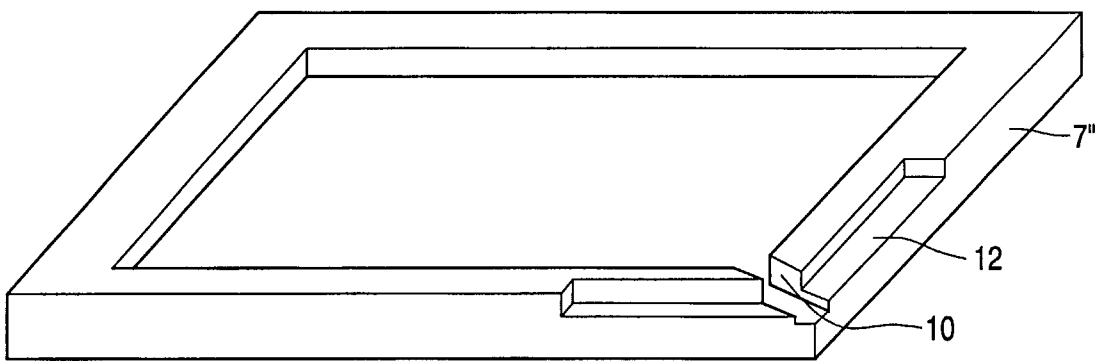


FIG. 4

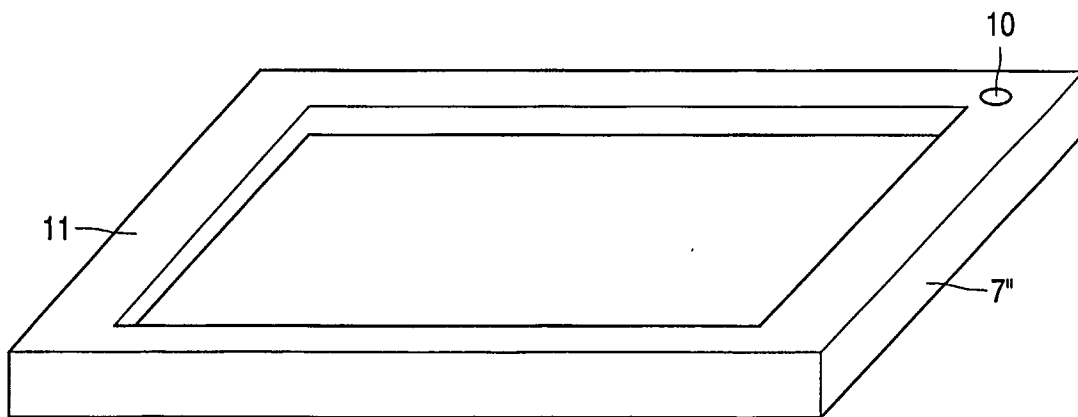


FIG. 5

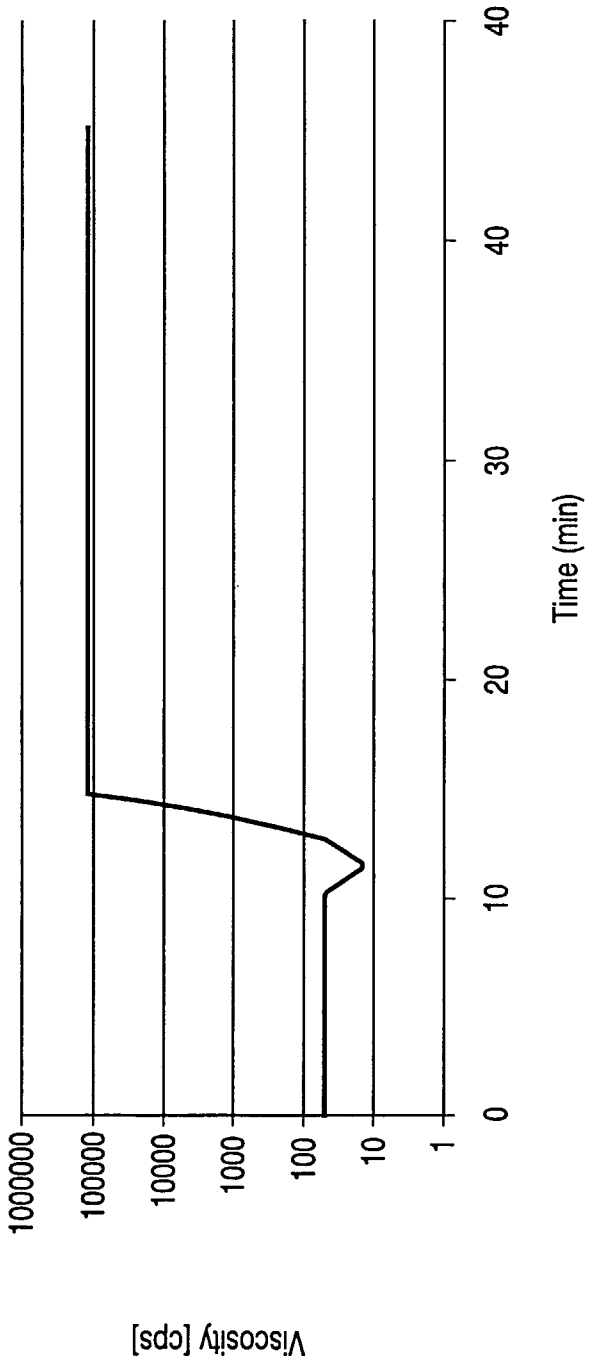


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02370

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01L51/20 H05B33/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) -& JP 2000 100562 A (HOKURIKU ELECTRIC IND CO LTD), 7 April 2000 (2000-04-07) abstract; figures ---	1,2,5-7
X	DATABASE WPI Section Ch, Week 198828 Derwent Publications Ltd., London, GB; Class A85, AN 1988-193989 XP002192596 -& JP 63 131494 A (HOYA CORP), 3 June 1988 (1988-06-03) figures --- -/--	1,5,6

☒ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

11 March 2002

Date of mailing of the international search report

21/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Laere, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 01/02370

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 12, 3 January 2001 (2001-01-03) & JP 2000 243555 A (TOYOTA MOTOR CORP), 8 September 2000 (2000-09-08) abstract ---	1,5,6
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 12, 29 October 1999 (1999-10-29) -& JP 11 186609 A (SUMITOMO ELECTRIC IND LTD), 9 July 1999 (1999-07-09) abstract ---	1-7
P,X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 23, 10 February 2001 (2001-02-10) -& JP 2001 155854 A (TOYOTA MOTOR CORP), 8 June 2001 (2001-06-08) abstract; figures -----	1,5
P,A		6

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter 1al Application No

PCT/IB 01/02370

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2000100562 A	07-04-2000	NONE	
JP 63131494 A	03-06-1988	NONE	
JP 2000243555 A	08-09-2000	NONE	
JP 11186609 5 A		NONE	
JP 2001155854 A	08-06-2001	NONE	

专利名称(译)	装置，特别是电致发光显示装置，以及制造这种装置的方法		
公开(公告)号	EP1346419A1	公开(公告)日	2003-09-24
申请号	EP2001271664	申请日	2001-12-06
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	LIEDENBAUM COEN T H F		
发明人	LIEDENBAUM, COEN, T., H., F.		
IPC分类号	H05B33/04 H01L51/50 H01L51/52 H05B33/10 H01L51/20		
CPC分类号	H01L51/5246 H01L51/524		
代理机构(译)	deguelle Wilhelmus科技先驱格拉德斯胡富，hendrikus		
优先权	2000204653 2000-12-20 EP		
外部链接	Espacenet		

摘要(译)

本发明涉及一种装置，特别是一种电致发光显示装置，包括两个或多个部分，这两个或多个部分限定了用于容纳一种或多种组分的空腔，例如电致发光元件，并且通过存在于界面处的热固性粘合剂密封在一起。两个或更多部分。在所述界面中提供至少一个通道。