

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 December 2008 (31.12.2008)

PCT

(10) International Publication Number
WO 2009/001953 A1

(51) International Patent Classification:
H01L 51/52 (2006.01) *H01L 51/54* (2006.01)

DENKO K.K., 1-1-1, Oonodai, Midori-ku, Chiba-shi,
Chiba, 2670056 (JP).

(21) International Application Number:
PCT/JP2008/061800

(74) Agent: **SUZUKI, Shunichiro**; S.SUZUKI & ASSO-
CIATES, Gotanda Yamazaki Bldg. 6F, 13-6, Nishigotanda
7-chome, Shinagawa-ku, Tokyo, 1410031 (JP).

(22) International Filing Date: 24 June 2008 (24.06.2008)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2007-170646 28 June 2007 (28.06.2007) JP

(71) Applicant (*for all designated States except US*): **SHOWA
DENKO K.K.** [JP/JP]; 13-9, Shibadai-mon 1-chome, Mi-
nato-ku, Tokyo, 1058518 (JP).

(72) Inventor; and



(75) Inventor/Applicant (*for US only*): **TAKAHASHI,
Yoshiaki** [JP/JP]; c/o Corporate R & D Center SHOWA

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PHOSPHORESCENT POLYMER COMPOUNDS AND ORGANIC ELECTROLUMINESCENT DEVICES MANU-
FACTURED THEREWITH

[Fig. 1]

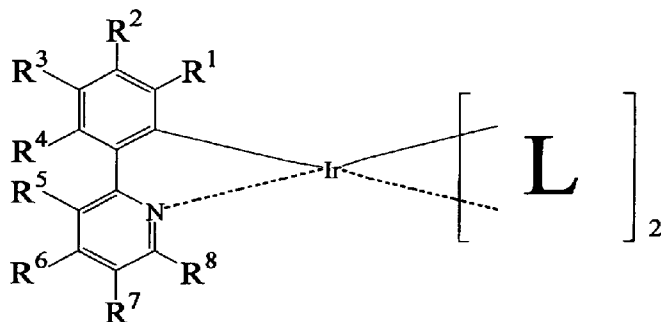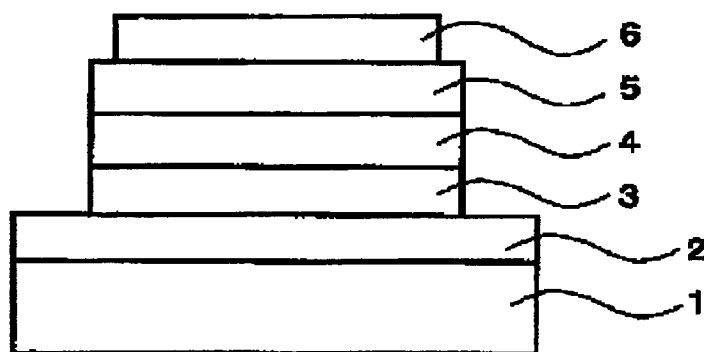

... (1)

(57) Abstract: A phosphorescent polymer compound has high luminance efficiency and long life. An organic electroluminescent device includes the compound. The phosphorescent polymer compound includes structural units that are derived from a compound represented by Formula (1): wherein R1 to R8 are each independently a hydrogen atom, a halogen atom, a cyano group, an alkyl group, an aryl group, a heteroaryl group, an amino group optionally substituted with an alkyl group, an alkoxy group, a silyl group optionally substituted with an alkyl group, or a group having a radically polymerizable functional group, and one of R1 to R8 is a group having a radically polymerizable functional group; and L is a ligand with a specific five-membered ring structure, and the two ligands L may be the same or different from each other.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

DESCRIPTION

PHOSPHORESCENT POLYMER COMPOUNDS AND ORGANIC ELECTROLUMINESCENT
DEVICES MANUFACTURED THEREWITH

5 FIELD OF THE INVENTION

[0001]

The present invention relates to phosphorescent polymer
compounds. In more detail, the invention relates to
phosphorescent polymer compounds that are suited for use as
10 light-emitting materials for organic electroluminescent devices,
and to organic electroluminescent devices manufactured with the
compounds.

BACKGROUND ART

15 [0002]

To expand the applications of organic electroluminescent
devices (hereinafter also referred to as organic EL devices), active
research has been conducted seeking development of materials with
phosphorescent compounds having high luminance efficiency. In
20 particular, for organic EL devices to be used in displays, materials
are required to show high luminance efficiency and ensure stable
and long performance of the devices.

[0003]

Patent Document 1 discloses a luminescent polymer material

that has a phosphorescent iridium complex as a side chain of the polymer. The iridium complex has two phenylpyridine ligands and one β -diketonate ligand coordinated to an iridium atom, and the β -diketonate ligand is bonded to the polymer main chain. The
5 luminescence from the iridium complex is probably attributed to electron transition between the metal and the phenylpyridine ligands or within the phenylpyridine ligands.

[0004]

Patent Document 2 discloses a phosphorescent iridium complex
10 (and a polymer thereof) that has two phenylpyridine ligands and one β -diketonate ligand with a polymerizable functional group. This polymerizable iridium complex affords polymers similar to those described in Patent Document 1.

[0005]

15 Patent Documents 3 and 4 disclose luminescent polymer materials wherein a tris(phenylpyridine) iridium complex structure that is a side chain provides phosphorescence emission. The light emission is probably attributed to electron transition between the metal and the phenylpyridine ligands or within the
20 phenylpyridine ligands. It is possible that all the three phenylpyridine ligands may be involved in the light emitting.

[0006]

However, organic EL devices manufactured using the luminescent materials of Patent Documents 1 to 4 are still

unsatisfactory in luminance efficiency and durability.

Patent Document 1: JP-A-2004-531850

Patent Document 2: JP-A-2004-526024

Patent Document 3: JP-A-2002-293830

5 Patent Document 4: JP-A-2006-8996

SUMMARY OF THE INVENTION

[0007]

It is therefore an object of the present invention to provide organic EL devices having high luminance efficiency and long life.

10 [0008]

The present inventors studied diligently to solve the aforementioned problems, and have determined causes that decrease the luminance efficiency and life of organic EL devices with luminescent polymer materials. First, in the conventional luminescent polymer materials, the iridium complex structure that is a light-emitting site has too many emitting ligands. Second, the light-emitting sites have so high degree of freedom that they will form an excimer together or with a charge carrier. Third, the emitting ligands are physically close to quenchers generated during the operation of the device. The present inventors have then found that the luminance efficiency and life of organic EL devices are improved by limiting the emitting ligand in an iridium complex structure to only one ligand bonded to the main chain of a polymer compound. The present invention has been completed based

15

20

on the findings.


[0009]

The present invention relates to the following [1] to [5].

[1] A phosphorescent polymer compound comprising structural

5 units that are derived from a compound represented by Formula (1):

[0010]

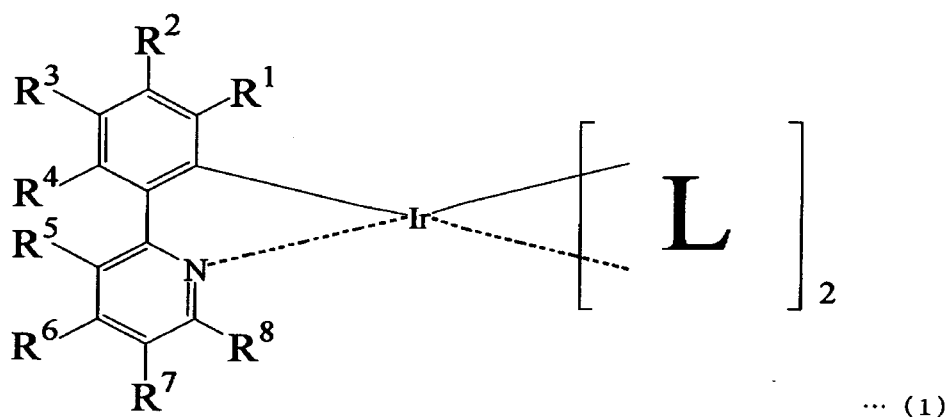

wherein R¹ to R⁸ are each independently a hydrogen atom, a halogen atom, a cyano group, a C1-10 alkyl group, a C6-10 aryl group, a C1-15 heteroaryl group, an amino group optionally substituted with a C1-10 alkyl group, a C1-10 alkoxy group, a silyl group optionally substituted with a C1-10 alkyl group, or a group having a radically polymerizable functional group, and one of R¹ to R⁸ is a group having a radically polymerizable functional group;


15 [0011]

L is a ligand represented by any of Formulae (1a) to (1i) below, and the two ligands L may be the same or different from each other; and


the five-membered ring in the ligand L may have a substituent

group selected from the group consisting of C1-10 alkyl groups, amino groups optionally substituted with a C1-10 alkyl group, and C1-10 alkoxy groups;


[0012]




... (1 a)




... (1 b)




... (1 c)




... (1 d)




... (1 e)




... (1 f)



... (1 g)



... (1 h)



... (1 i)

wherein R^9 to R^{12} are each independently a hydrogen atom, a halogen atom, a cyano group, a C1-10 alkyl group, an amino group optionally

substituted with a C1-10 alkyl group, a C1-10 alkoxy group, or a silyl group optionally substituted with a C1-10 alkyl group.

[2] The phosphorescent polymer compound described in [1], which further comprises structural units derived from at least
5 one of hole-transporting polymerizable compounds and electron-transporting polymerizable compounds.

[0013]

[3] An organic electroluminescent device comprising a pair of electrodes, and one or more organic compound layers including
10 at least an emitting layer between the electrodes, the emitting layer comprising the polymer compound described in [1] or [2].

[0014]

[4] A process for producing organic electroluminescent devices, comprising a step of forming one or more organic compound
15 layers on an anode, the one or more organic compound layers including at least a layer comprising the polymer compound described in [1] or [2], and a step of forming a cathode on the organic compound layer.

[0015]

20 [5] A display apparatus including the organic electroluminescent device described in [3].

[0016]

Organic EL devices manufactured with the phosphorescent polymer compound according to the present invention have superior

luminance efficiency and life.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a sectional view showing an organic EL device
5 according to an embodiment of the present invention.

DESCRIPTION OF NUMERALS

- 1: transparent substrate
- 2: anode
- 3: hole-transporting layer
- 10 4: emitting layer
- 5: electron-transporting layer
- 6: cathode

DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 [0017]


The present invention will be described in detail.

(Phosphorescent polymer compounds)

Phosphorescent sites

The phosphorescent polymer compound of the invention
20 includes structural units derived from a phosphorescent compound
(iridium complex) represented by Formula (1) below. The
structural units are phosphorescent sites in the phosphorescent
polymer compound.

[0018]

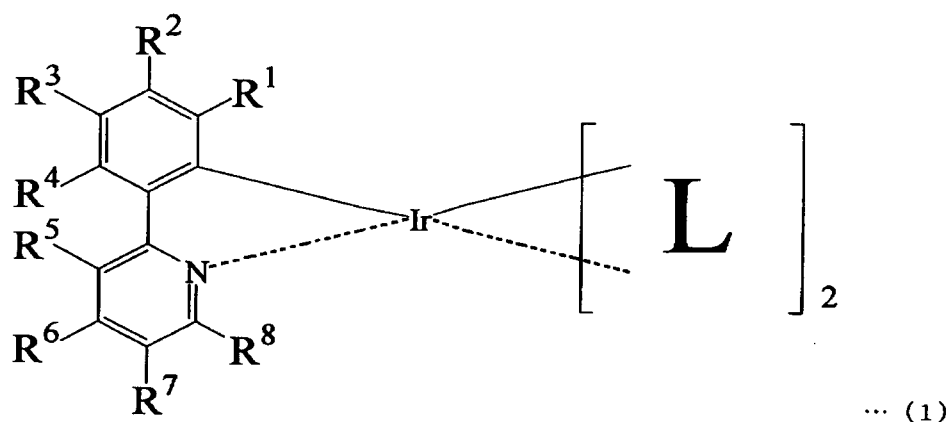


In Formula (1), R^1 to R^8 are each independently a hydrogen
 5 atom, a halogen atom, a cyano group, a C1-10 alkyl group, a C6-10
 aryl group, a C1-15 heteroaryl group, an amino group optionally
 substituted with a C1-10 alkyl group, a C1-10 alkoxy group, a silyl
 group optionally substituted with a C1-10 alkyl group, or a group
 having a radically polymerizable functional group, and one of R^1
 10 to R^8 is a group having a radically polymerizable functional group;

[0019]


L is a ligand represented by any of Formulae (1a) to (1i)
 below, and the two ligands L may be the same or different from
 each other; and

15 the five-membered ring in the ligand L may have a substituent
 group selected from the group consisting of C1-10 alkyl groups,
 amino groups optionally substituted with a C1-10 alkyl group, and
 C1-10 alkoxy groups;


[0020]




... (1 a)




... (1 b)




... (1 c)




... (1 d)




... (1 e)




... (1 f)



... (1 g)



... (1 h)



... (1 i)

wherein R^9 to R^{12} are each independently a hydrogen atom, a halogen atom, a cyano group, a C1-10 alkyl group, an amino group optionally substituted with a C1-10 alkyl group, a C1-10 alkoxy group, or a silyl group optionally substituted with a C1-10 alkyl group.

[0021]

In the compound of Formula (1), the LUMO (lowest unoccupied molecular orbital) energy level in the five-membered ring of the ligand L is higher than the LUMO energy level in the pyridine of the phenylpyridine ring. For example, according to molecular orbital calculation using the density functional theory (B3LYP), the LUMO energy level of pyridine is -0.6117 eV, whereas those of imidazol, pyrazole and 1,2,4-triazole are 0.8798 eV, 0.6743 eV and 0.2212 eV, respectively. Because the five-membered rings of the ligands L have a relatively high LUMO energy level, the excited electrons in the excited iridium complex are concentrated in the phenylpyridine ring in the compound of Formula (1) and therefore the ligands L will not emit light.

[0022]

In the compound of Formula (1), the emitting ligand in the iridium complex structure is limited to one ligand (phenylpyridine ring) that will be bonded to the main chain of the polymer compound. It is probably due to this limitation that the organic EL devices manufactured with the compound of Formula (1) surpass conventional organic EL devices in luminance efficiency and life.

[0023]

(R¹ to R⁸)

Referring to R¹ to R⁸, examples of the halogen atoms include fluorine, chlorine, bromine and iodine atoms.

[0024]

Examples of the C1-10 alkyl groups include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, t-butyl, amyl, hexyl, octyl and decyl groups.

5 [0025]

Examples of the C6-10 aryl groups include phenyl, tolyl, xylyl, mesityl and naphthyl groups.

Examples of the C1-15 heteroaryl groups include pyridyl, pyrazyl, quinolyl, isoquinolyl, pyrrolyl, imidazolyl, pyrazolyl,
10 oxazolyl, oxadiazolyl, thiazolyl, benzoxazolyl, benzothiazolyl, thienyl, furyl, carbazolyl and tetrazol groups.

[0026]

Examples of the amino groups optionally substituted with a C1-10 alkyl group include amino, dimethylamino, diethylamino
15 and dibutylamino groups.

[0027]

Examples of the C1-10 alkoxy groups include methoxy, ethoxy, propoxy, isopropoxy, butoxy, isobutoxy, t-butoxy, hexyloxy, 2-ethylhexyloxy and decyloxy groups.

20 [0028]

Examples of the silyl groups optionally substituted with a C1-10 alkyl group include trimethylsilyl, triethylsilyl, t-butyldimethylsilyl and trimethoxysilyl groups.

[0029]

Examples of the radically polymerizable functional groups include allyl, alkenyl (e.g., vinyl, 2-propenyl), styryl, acryloyloxy and methacryloyloxy groups, with the vinyl, styryl, acryloyloxy and methacryloyloxy groups being preferred.

[0030]

One of R^1 to R^8 is a group having the radically polymerizable functional group.

Preferably, R^1 to R^8 are each independently a hydrogen atom, a fluorine atom, a cyano group, a methyl group, a t-butyl group, a dimethylamino group or a methoxy group. In more detail, from the viewpoints of efficiency and life of organic EL devices, one or more of R^2 , R^3 , R^6 and R^7 in Formula (1) are preferably each independently a fluorine atom, a cyano group, a methyl group, a t-butyl group or a methoxy group, and the remaining groups of R^1 to R^8 other than the above group(s) and group(s) having the radically polymerizable functional group are preferably each a hydrogen atom. Also preferably, either or both of R^2 and R^3 are each independently a methyl group or a t-butyl group, and the remaining groups of R^1 to R^8 other than the above group(s) and group(s) having the radically polymerizable functional group are each a hydrogen atom.


[0031]

The groups having the radically polymerizable functional group may have a divalent group between the radically polymerizable

functional group and the carbon atom on the benzene or pyridine ring coordinated to iridium. Such divalent groups are hereinafter referred to as spacers. Examples of the spacers include saturated hydrocarbon chains and hydrocarbon chains having heteroatoms. To

5 make sure that the ligand is located near the polymer main chain, the spacer preferably has the longest chain composed of 1 to 5 atoms. Examples of the groups having the radically polymerizable functional group with the spacer include those represented by Formulae (a1) to (a8) below:

10 [0032]

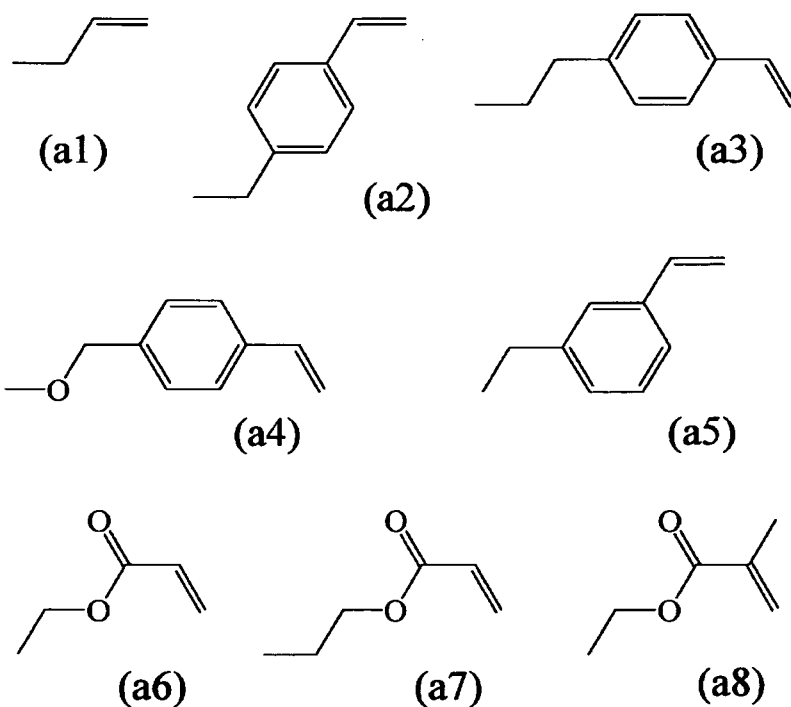

(R⁹ to R¹²)

Referring to R⁹ to R¹², examples of the halogen atoms include

15 fluorine, chlorine, bromine and iodine atoms.

[0033]

Examples of the C1-10 alkyl groups include methyl, ethyl, propyl, isopropyl, butyl, isobutyl, t-butyl, amyl, hexyl, octyl and decyl groups.

5 [0034]

Examples of the amino groups optionally substituted with a C1-10 alkyl group include amino, dimethylamino, diethylamino and dibutylamino groups.

[0035]

10 Examples of the C1-10 alkoxy groups include methoxy, ethoxy, propoxy, isopropoxy, butoxy, isobutoxy, t-butoxy, hexyloxy, 2-ethylhexyloxy and decyloxy groups.

[0036]

15 Examples of the silyl groups optionally substituted with a C1-10 alkyl group include trimethylsilyl, triethylsilyl, t-butyldimethylsilyl and trimethoxysilyl groups.

[0037]

20 Preferably, R^9 to R^{12} are each independently a hydrogen atom, a fluorine atom, a cyano group, a methyl group, a t-butyl group, a dimethylamino group or a methoxy group. In more detail, from the viewpoints of efficiency and life of organic EL devices, either or both of R^{10} and R^{11} in Formulae (1a) to (1i) are preferably each independently a methyl group, a t-butyl group or a methoxy group, and the remaining groups of R^9 to R^{12} other than the above group(s)

are preferably each a hydrogen atom.

[0038]

(Five-membered ring)

In the five-membered ring of the ligand L, the substituent
5 groups on the carbon atoms may be a fluorine atom, a cyano group,
a C1-10 alkyl group, a C1-10 alkoxy group or a trifluoromethyl
group. Of these, a fluorine atom or a C1-10 alkyl group is
preferable. The substituent groups on the nitrogen atoms in the
five-membered ring are preferably C1-10 alkyl groups.

10 [0039]

(Process for producing compounds of Formula (1))

The compounds represented by Formula (1) may be produced
by a process including the following steps (i) and (ii):


Step (i):

15 A compound L' represented by any of Formulae (1a') to (1i')
below is reacted with iridium chloride trihydrate ($\text{IrCl}_3(\text{H}_2\text{O})_3$)
to give a compound represented by Formula (α) below.


Step (ii):

The compound of Formula (α) is reacted with a compound
20 represented by Formula (β) below in the presence of silver
trifluoromethanesulfonate to produce the compound represented by
Formula (1).


[0040]




... (1 a')




... (1 b')




... (1 c')




... (1 d')




... (1 e')




... (1 f')



... (1 g')




... (1 h')



... (1 i')


In Formulae (1a') to (1i'), R^9 to R^{12} are as defined in Formulae (1a) to (1i), and the five-membered rings may have substituents such as C1-10 alkyl groups, amino groups optionally substituted with a C1-10 alkyl group, and C1-10 alkoxy groups.

[0041]



In Formula (α), L is as defined in Formula (1).

[0042]



5

In Formula (β), R¹ to R⁸ are as defined in Formula (1).

[0043]

Charge-transporting units

The phosphorescent polymer compound may contain structural units derived from at least one of hole-transporting polymerizable compounds and electron-transporting polymerizable compounds.

The hole-transporting polymerizable compounds and electron-transporting polymerizable compounds will be collectively referred to as the charge-transporting polymerizable compounds.

[0044]

The phosphorescent polymer compound preferably contains structural units derived from one or more hole-transporting

polymerizable compounds or structural units derived from one or more electron-transporting polymerizable compounds. This polymer compound may be applied by a coating technique to form a uniform emitting layer which has high electric charge mobility and high luminance efficiency.

[0045]

More preferably, the phosphorescent polymer compound contains structural units derived from one or more hole-transporting polymerizable compounds and structural units derived from one or more electron-transporting polymerizable compounds. With hole-transporting properties and electron-transporting properties, this phosphorescent polymer compound allows for more efficient recombination of holes and electrons in the vicinity of the compound, thus providing higher luminance efficiency.

[0046]

The hole-transporting polymerizable compounds and electron-transporting polymerizable compounds are not particularly restricted except that they have substituent groups with polymerizable functional groups. Known charge-transporting compounds may be used.

[0047]

The polymerizable functional groups may refer to radically polymerizable functional groups.

Examples of the polymerizable functional groups include allyl, alkenyl, acryloyloxy, methacryloyloxy, urethane(meth)acryloyloxy (e.g., methacryloyloxyethyl carbamate) and vinylamide groups, and derivatives of these groups.


5 Of these, the alkenyl groups are preferred.

[0048]

In detail, Formulae (A1) to (A12) below illustrate preferred examples of the substituent groups with the polymerizable functional groups that are the alkenyl groups. Of these

10 substituent groups, those of Formulae (A1), (A5), (A8) and (A12) are more preferred because the polymerizable functional groups are easily introduced in the charge-transporting compounds.


[0049]

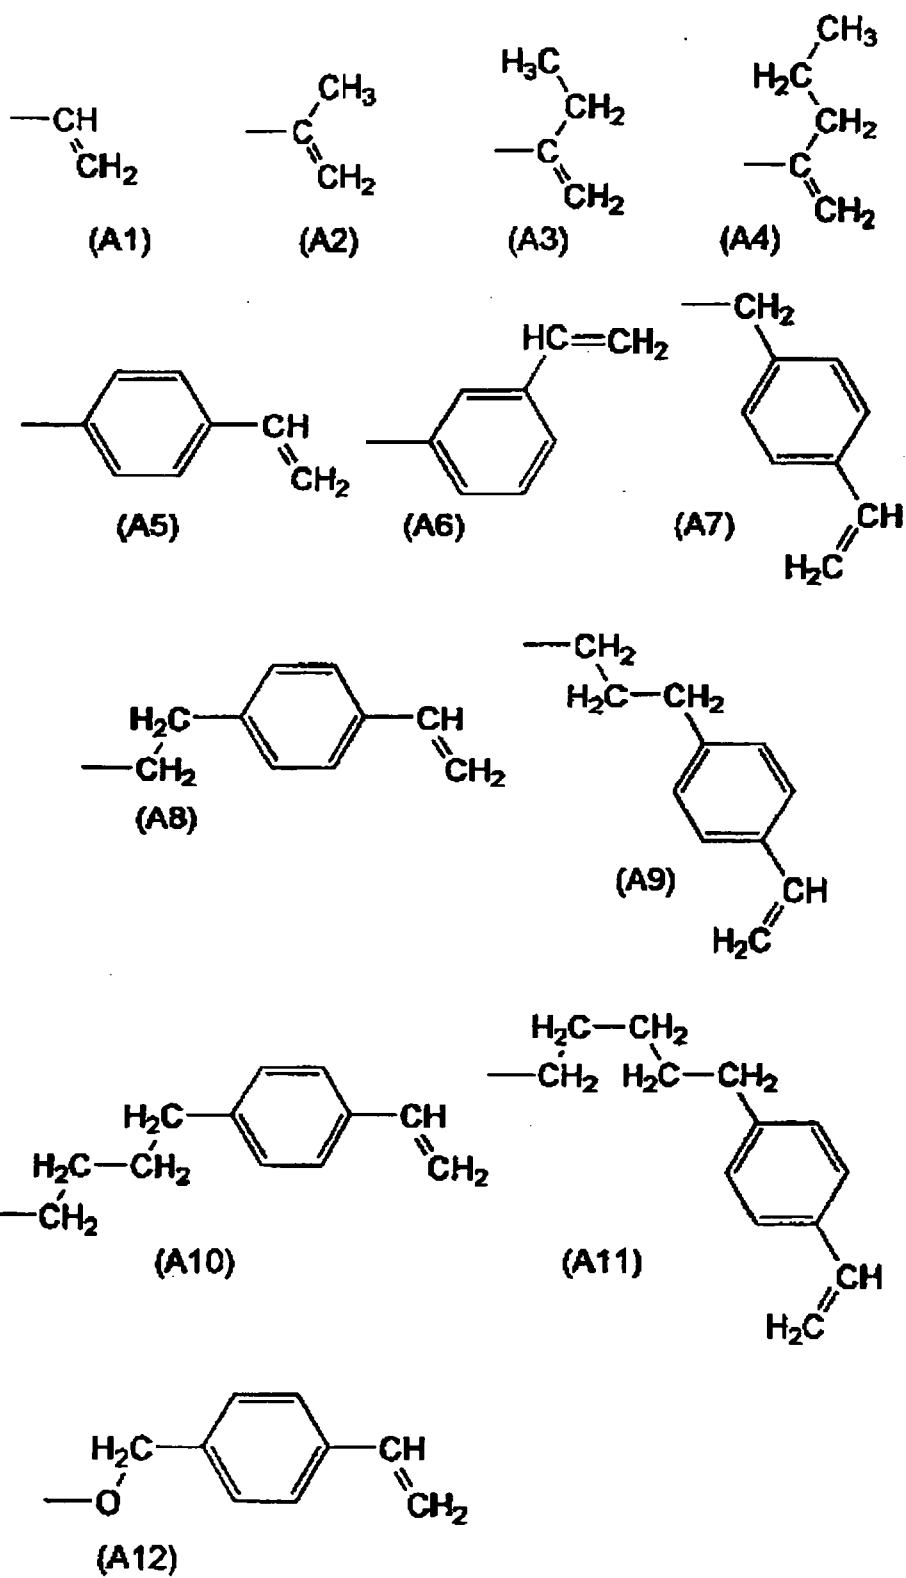


Formulae (E1) to (E6) below illustrate preferred examples of the hole-transporting polymerizable compounds. Of these, the compounds of Formulae (E1) to (E3) are more preferred in terms of electric charge mobility in the non-conjugated polymer

5 compounds.


[0050]




(E1)




(E2)




(E3)



(E4)




(E5)




(E6)

Formulae (E7) to (E15) below illustrate preferred examples of the electron-transporting polymerizable compounds. Of these, the compounds of Formulae (E7) and (E12) to (E14) are more preferred in terms of electric charge mobility in the non-conjugated polymer compounds.


[0051]




(E7)

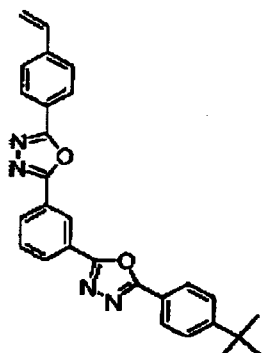


(E8)




(E9)




(E10)




(E11)




(E12)



(E13)



(E14)

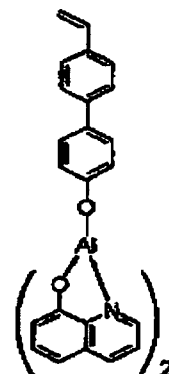

(E15)

In Formulae (E1) to (E15), the substituent group represented
 5 by Formula (A1) may be replaced by the substituent groups
 represented by Formulae (A2) to (A12). In particular, the
 compounds having the substituent groups represented by Formulae

(A1) and (A5) are preferable because the functional groups are easily introduced in the polymerizable compounds.

[0052]

Of the hole-transporting polymerizable compounds, those of
5 Formulae (E1) to (E3) are more preferable. Of the
electron-transporting polymerizable compounds, those of Formulae
(E7) and (E12) to (E14) are more preferable. With these
polymerizable compounds, holes and electrons recombine on the
phosphorescent polymer compound more efficiently and higher
10 luminance efficiency is achieved. The charge-transporting
polymerizable compounds together with the phosphorescent compound
form an organic layer having a uniform composition. Organic EL
devices including such organic layer show excellent durability.

[0053]

15 Phosphorescent polymer compounds

The phosphorescent polymer compound may be an oligomer
compound or a polymer compound. The phosphorescent polymer
compound preferably has a weight-average molecular weight of 1,000
to 5,000,000, more preferably 2,000 to 1,000,000, still more
20 preferably 3,000 to 100,000. As used herein, the molecular weight
is measured by GPC (gel permeation chromatography) relative to
polystyrene standards. When the molecular weight is in the above
range, the polymer is soluble in organic solvents and gives uniform
films.

[0054]

The polymer compound may attain desired properties by appropriately controlling the amounts of the iridium complex and the charge-transporting polymerizable compound

5 (hole-transporting polymerizable compound and/or electron-transporting polymerizable compound). The polymer compound may be a random copolymer, a block copolymer or an alternating copolymer.

[0055]

10 Assume that the letter m represents the number of structural units derived from the iridium complex in the polymer compound, and the letter n represents the number of structural units derived from the charge-transporting compound (the total structural units derived from the hole-transporting polymerizable compound and/or

15 the electron-transporting polymerizable compound) (m and n are integers of 1 or greater). The ratio of the iridium complex-derived structural units to the total structural units, namely, the ratio $m/(m+n)$, is preferably in the range of 0.001 to 0.5, more preferably 0.001 to 0.2. When the ratio $m/(m+n)$ is within the range, the

20 electric charge mobility is high and the concentration quenching is small, in other words, organic EL devices show high luminance efficiency.

[0056]

As already mentioned, the polymer compound may include

structural units derived from the hole-transporting compound and structural units derived from the electron-transporting compound. Here, assume that the letter x represents the number of structural units from the hole-transporting compound, and the letter y represents the number of structural units from the electron-transporting compound (x and y are integers of 1 or greater). These and the above n have the following relation: $n = x + y$. An optimum ratio of the structural units from the hole-transporting compound to the total structural units derived from the charge-transporting compounds, namely, an optimum ratio x/n , and an optimum ratio of the structural units from the electron-transporting compound to the total structural units derived from the charge-transporting compounds, namely, an optimum ratio y/n , are variable depending on the charge-transporting capacity of each of the structural units, and the charge-transporting capacity and concentration of the structural units from the iridium complex. In the case where this polymer is the only compound to form the emitting layer of the organic EL device, the ratio x/n and the ratio y/n are preferably each 0.05 to 0.95, more preferably 0.20 to 0.80, wherein $x/n + y/n = 1$.

[0057]

The phosphorescent polymer compound may contain structural units derived from other polymerizable compounds while still

achieving the advantages of the invention. Examples of such polymerizable compounds include, but are not limited to, compounds without charge-transporting properties such as alkyl (meth)acrylates such as methyl acrylate and methyl methacrylate, styrene and derivatives thereof.

[0058]

The polymer compound is preferably produced by radical polymerization.

(Process for manufacturing organic EL devices)

An embodiment of an organic EL device according to the present invention is shown in Fig. 1. However, the constitution of the organic EL devices of the invention is not limited thereto. In Fig. 1, an anode (2) is formed on a transparent substrate (1). Between the anode (2) and a cathode (6), a hole-transporting layer (3), an emitting layer (4) and an electron-transporting layer (5) are provided in this order. In another embodiment of the organic EL device, 1) the hole-transporting layer and the emitting layer, or 2) the emitting layer and the electron-transporting layer may be provide between the anode (2) and the cathode (6). In a still another embodiment, 3) a layer including a hole-transporting material, an emitting material and an electron-transporting material, 4) a layer including a hole-transporting material and an emitting material, and 5) a layer including an emitting material and an electron-transporting material may be formed singly or in

combination of two or more kinds between the electrodes.

[0059]

An organic compound layer containing the phosphorescent polymer compound that has the phosphorescent sites and charge-transporting sites is an emitting layer having both hole-transporting properties and electron-transporting properties. In other words, organic EL devices of high luminance efficiency are manufactured using the organic compound layer without other layers of organic compound materials.

10 [0060]

(Substrate)

For use in the organic EL devices of the invention, insulating substrates that are transparent at wavelengths of light emitted from the emitting material are suitably used. Specific examples include glass, and transparent plastics such as PET (polyethyleneterephthalate) and polycarbonates.

[0061]

(Process for producing organic compound layers)

The organic compound layers may be produced by any methods without limitation. An exemplary method is given below. First, the phosphorescent polymer compound is dissolved in a solvent to give a solution. The solvents used herein are not particularly limited, and examples thereof include chlorine solvents such as chloroform, methylene chloride and dichloroethane; ether solvents

such as tetrahydrofuran and anisole; aromatic hydrocarbon solvents such as toluene and xylene; ketone solvents such as acetone and methyl ethyl ketone; and ester solvents such as ethyl acetate, butyl acetate and ethyl cellosolve acetate. The solution is then spread on a base by inkjet printing, spin coating, dip coating or printing, thereby forming the organic compound layer. The concentration of the solution depends on the compounds used and film-forming conditions. For example, for the spin coating or dip coating, the concentration is preferably 0.1 to 10 wt%. The organic layer may be formed easily as described above, leading to simplified production steps and the increasing of area of EL devices.

[0062]

(Other materials)

The organic compound layers may contain polymer materials as binders. Examples of the polymer materials include polymethyl methacrylates, polycarbonates, polyesters, polysulfones and polyphenyleneoxides.

[0063]

The organic compound layers may be formed of a material that is a mixture of materials with different functions, for example emitting materials, hole-transporting materials and electron-transporting materials. The organic compound layer containing the phosphorescent polymer compound may contain another

hole-transporting material and/or electron-transporting material to increase charge-transporting properties. Such charge-transporting materials may be low molecular-weight compounds or high molecular-weight compounds.

5 [0064]

A hole-injection layer may be provided between the anode and the emitting layer to reduce the injection barrier and facilitate hole injection. The hole-injection layer may be produced using known materials such as copper phthalocyanine,
10 polyethylenedioxythiophene (PEDOT)/polystyrenesulfonic acid (PSS) mixture, and fluorocarbons.

[0065]

To improve electron injection efficiency, an insulating layer 0.1 to 10 nm in thickness may be formed between the cathode
15 and the electron-transporting layer or between the cathode and an organic compound layer adjacent to the cathode. The insulating layer may be formed using known materials such as lithium fluoride, sodium fluoride, magnesium fluoride, magnesium oxide and alumina.

[0066]

20 Examples of the hole-transporting materials to form the hole-transporting layer or to be mixed in the emitting layer include TPD

(N,N'-dimethyl-N,N'-(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine); α -NPD (4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl);

low-molecular triphenylamine derivatives such as m-MTDATA
(4,4',4''-tris(3-methylphenylphenylamino)triphenylamine);
polyvinylcarbazole; high molecular-weight compounds obtained by
introducing polymerizable substituent groups in the above
5 triphenylamine derivatives followed by polymerization; and
phosphorescent polymer compounds such as
polyparaphenylenevinylene and polydialkylfluorene. The high
molecular-weight compounds include compounds with triphenylamine
skeletons disclosed in JP-A-H08-157575. The hole-transporting
10 materials may be used singly or two or more kinds may be used in
combination. The hole-transporting materials may form respective
layers that are laminated. The thickness of the hole-transporting
layer is not particularly limited and is variable depending on
the conductivity of the hole-transporting layer. But the
15 thickness is preferably in the range of 1 nm to 5 μm , more preferably
5 nm to 1 μm , particularly preferably 10 nm to 500 nm.
[0067]

Examples of the electron-transporting materials to form the
electron-transporting layer or to be mixed in the emitting layer
20 include low molecular-weight compounds such as quinolinol
derivatives such as Alq3 (aluminum trisquinolinolate), oxadiazole
derivatives, triazole derivatives, imidazole derivatives,
triazine derivatives and triarylborane derivatives; and high
molecular-weight compounds obtained by introducing polymerizable

functional groups to the above low molecular-weight compounds followed by polymerization. The high molecular-weight compounds include poly(PBD) disclosed in JP-A-H10-1665. The electron-transporting materials may be used singly or two or more
5 kinds may be used in combination. The electron-transporting materials may form respective layers that are laminated. The thickness of the electron-transporting layer is not particularly limited and is variable depending on the conductivity of the electron-transporting layer. But the thickness is preferably in
10 the range of 1 nm to 5 μ m, more preferably 5 nm to 1 μ m, particularly preferably 10 nm to 500 nm.

[0068]

To inhibit holes from passing through the emitting layer and thereby to ensure efficient recombination of holes and electrons
15 in the emitting layer, a hole-blocking layer may be provided on the emitting layer on the cathode side. The hole-blocking layer may be produced using known materials such as triazole derivatives, oxadiazole derivatives and phenanthroline derivatives.

[0069]

20 The methods for producing the hole-transporting layers and electron-transporting layers include dry film-forming methods such as resistance heating deposition, electron beam deposition and sputtering; and wet film-forming methods such as spin coating, casting, microgravure coating, gravure coating, bar coating, roll

coating, wire bar coating, dip coating, spray coating, screen printing, flexographic printing, offset printing and inkjet printing. The dry film-forming methods are suitable for low molecular-weight compounds, and the wet film-forming methods are
5 suitable for high molecular-weight compounds.

[0070]

(Materials and production of anode and cathode)

Examples of preferred anode materials for use in the organic EL devices include known transparent conductive materials such
10 as ITO (indium tin oxide), tin oxide, zinc oxide and conductive polymers such as polythiophene, polypyrrole and polyaniline. The electrode formed of the transparent conductive material preferably has a surface resistance of 1 to 50 $\Omega/\square$ (ohms per square). The thickness of the anode is preferably 50 to 300 nm.

15 [0071]

Examples of preferred cathode materials for use in the organic EL devices include known cathode materials such as alkali metals such as Li, Na, K and Cs; alkaline earth metals such as Mg, Ca and Ba; Al; MgAg alloy; and alloys of Al and alkali metals or alkaline
20 earth metals such as AlLi and AlCa. The thickness of the cathode is preferably 10 nm to 1 μm , more preferably 50 to 500 nm. When the cathode is formed using highly active metals such as alkali metals and alkaline earth metals, the thickness of the cathode is preferably 0.1 to 100 nm, more preferably 0.5 to 50 nm. In

this case, a metal layer that is stable in air is laminated on the cathode to protect the cathode metal. Examples of the protective metals include Al, Ag, Au, Pt, Cu, Ni and Cr. The thickness of the protective metal layer is preferably 10 nm to 1 μm , more preferably 50 to 500 nm.

[0072]

The methods for producing the anode include electron beam deposition, sputtering, chemical reactions and coating. The methods for forming the cathode include resistance heating deposition, electron beam deposition, sputtering and ion plating.

[0073]

(Applications of organic EL devices)

The organic EL devices of the present invention are suitably used as pixels in display apparatuses of matrix system or segment system according to conventional techniques. The organic EL devices are also suitable as area light sources without forming pixels.

[0074]

The organic EL devices find applications in displays, backlights, electrophotographic systems, illuminating light sources, recording light sources, exposing sources, reading light sources, signs, advertising displays, interior accessories and optical communication systems.

EXAMPLES

[0075]

The present invention will be described in detail by examples without limiting the scope of the invention.

5 The polymer compounds were analyzed by the following methods.

[0076]

(1) Molecular weight

The molecular weight was measured with a gel permeation chromatograph (GPC) under the following conditions.

10 Columns: Shodex KF-G, KF804L, KF802 and KF801

Eluting solvent: Tetrahydrofuran (THF)

Temperature: 40°C

Detector: RI (Shodex RI-71)

[0077]

15 (2) Composition analysis

^1H -NMR and ^{13}C -NMR analyses were performed under the following conditions.

Apparatus: JNM EX270 manufactured by JEOL Ltd.

67.5 MHz

20 Solvent: Deuterated chloroform (CDCl_3)

[0078]

ICP elemental analysis was performed under the following conditions.

Apparatus: ICPS 8000 manufactured by Shimadzu Corporation

[0079]

Mass spectroscopy (ESI) was performed under the following conditions.

Spectrometer: LCQ Advantage manufactured by ThermoQuest

5 Corp.

Flow solvent: Acetonitrile (0.5 ml/min)

The organic EL devices were tested for external quantum efficiency, maximum brightness and luminance half life by the following methods.

10 [0080]

(3) Maximum external quantum efficiency (%)

The organic EL device was placed in the dark. A spectroradiometer (CS-1000T manufactured by Konica Minolta Holdings, Inc.) was located 100 cm away from the emitting surface
15 in a perpendicular direction. A predetermined voltage was applied to the organic EL device for 1 second to cause the device to emit light. The current passing through the device, the front brightness observed on the anode side of the device, and an emission spectrum were measured at a viewing angle of 0.2 degree. The voltage
20 was increased stepwise by 0.1 V starting from 0 V. The current, brightness and emission spectrum were measured immediately after the voltage was increased. The external quantum efficiency was calculated from the data obtained, and the maximum value was determined as the external quantum efficiency of the device.

[0081]

(4) Maximum brightness (cd/m^2)

The front brightness was measured in the same manner as the measurement of the maximum external quantum efficiency, except
5 that the voltage was increased stepwise by 0.5 V. The maximum value was determined as the maximum brightness of the device.

[0082]




(5) Luminance half life (h)

The EL device was energized in the same manner as described
10 in the measurement of the maximum external quantum efficiency while measuring the front brightness, and the EL device was energized to a brightness of 100 cd/m^2 . A silicon photodiode was attached to the device on the anode side. While the current was maintained constant, the photocurrent through the photodiode was measured.
15 The time required until the photocurrent was reduced by half was determined as the luminance half life.

[0083]

[Synthetic Example 1: Synthesis of iridium complex (1)]

[0084]

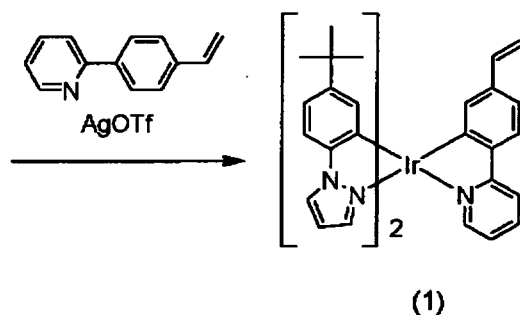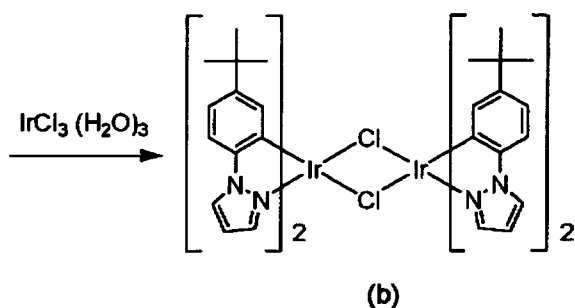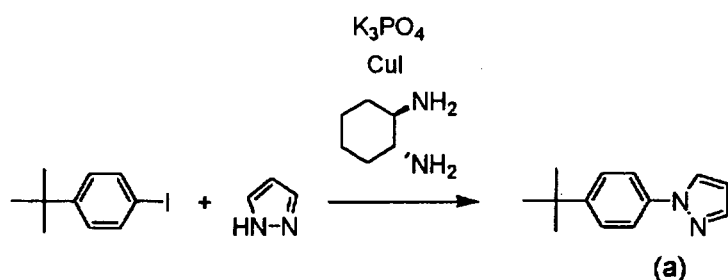

5.166 g (19.9 mmol) of 4-*t*-butyliodobenzene, 1.50 g (22.0 mmol) of pyrazole, 8.51 g (40.1 mmol) of tripotassium phosphate, 78 mg (0.41 mmol) of copper (I) iodide, 237 mg (2.08 mmol) of trans-1,2-cyclohexanediamine and 30 ml of dioxane were stirred together at 110°C for 22 hours. The resultant reaction liquid was filtered through a glass filter, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel column chromatography (eluting solvent: chloroform), and 2.7 g (13.5 mmol) of a compound (a) was obtained (68% yield).

Subsequently, 1.004 g (5.01 mmol) of the compound (a), 0.846 g (2.40 mmol) of iridium chloride trihydrate, 21 ml of 2-ethoxyethanol and 7 ml of water were mixed and heated under reflux for 12 hours. The resultant reaction liquid was combined with
5 a small amount of water, and the precipitated product was filtered off, washed with methanol and dried under reduced pressure to afford 1.4 g (1.1 mmol) of an iridium complex (b) (92% yield).

Thereafter, 3.96 g (3.16 mmol) of the iridium complex (b), 1.30 g (7.2 mmol) of 2-(4-vinylphenyl)pyridine (synthesized
10 according to a method disclosed in JP-A-2002-293830), 1.70 g (6.62 mmol) of silver trifluoromethanesulfonate and 300 ml of toluene were mixed and heated under reflux for 3 hours. The resultant reaction liquid was filtered through Celite, and the solvent was evaporated under reduced pressure. The residue was purified by
15 silica gel column chromatography (eluting solvent: toluene). As a result, 0.60 g (0.78 mmol) of an iridium complex (1) was obtained (12% yield).

The identification data of the iridium complex (1) are as follows.

20 [0085]

$^1\text{H-NMR}$ (CDCl_3): 7.9–6.8 (17H), 6.52 (1H), 6.35 (2H), 5.51 (1H), 5.04 (1H), 1.12 (9H), 1.10 (9H)

Elemental analysis:


theoretical values ($\text{C}_{39}\text{H}_{40}\text{IrN}_5$): C: 60.76, H: 5.23, N: 9.08

measured values: C: 60.55, H: 5.19, N: 9.52

Mass spectroscopy (ESI): 771 (M^+)

[Synthetic Example 2: Synthesis of iridium complex (2)]

[0086]

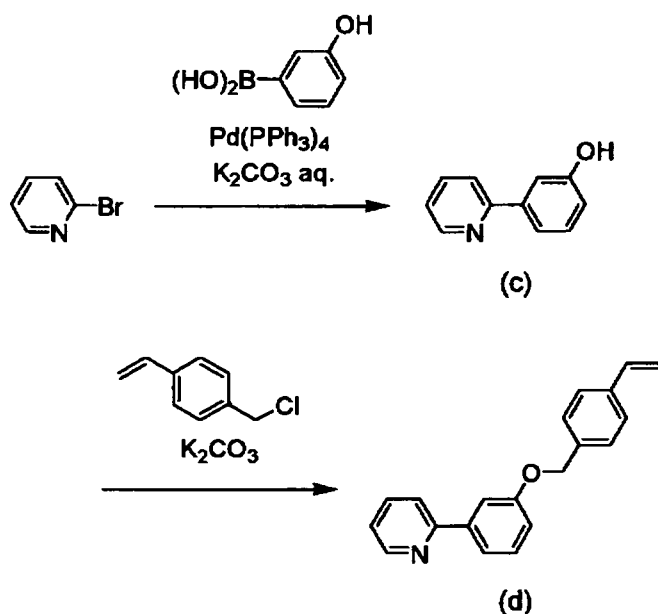

5

10.5 g (66 mmol) of 2-bromopyridine, 9.2 g (67 mmol) of 3-hydroxyphenylboronic acid, 1.0 g (0.87 mmol) of tetrakis(triphenylphosphine)palladium and 100 ml of 1,2-dimethoxyethane were mixed together. To the mixture, 100 ml of an aqueous solution of 27.0 g (195 mmol) of potassium carbonate was added, and the mixture was stirred with heating for 5 hours. To the reaction mixture obtained, a 2N aqueous hydrochloric acid solution was added to adjust the pH of the aqueous phase to approximately 7. The organic phase was extracted with ethyl acetate. The solvent was evaporated from the extract under reduced pressure. The residue was purified by silica gel column


10

15

chromatography (eluting solvent: chloroform/ethyl acetate = 1/1), and 9.6 g (56 mmol) of a compound (c) was obtained (85% yield).

Subsequently, 5.8 g (34 mmol) of the compound (c), 6.0 g (39 mmol) of 4-vinylbenzyl chloride, 8.5 g (62 mmol) of potassium carbonate and 100 ml of acetone were mixed and heated under reflux
5 for 24 hours. The resultant reaction mixture was filtered through Celite, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel column chromatography (eluting solvent: chloroform/ethyl acetate = 10/1), and 7.1 g (25
10 mmol) of a compound (d) was obtained (73% yield).

[0087]

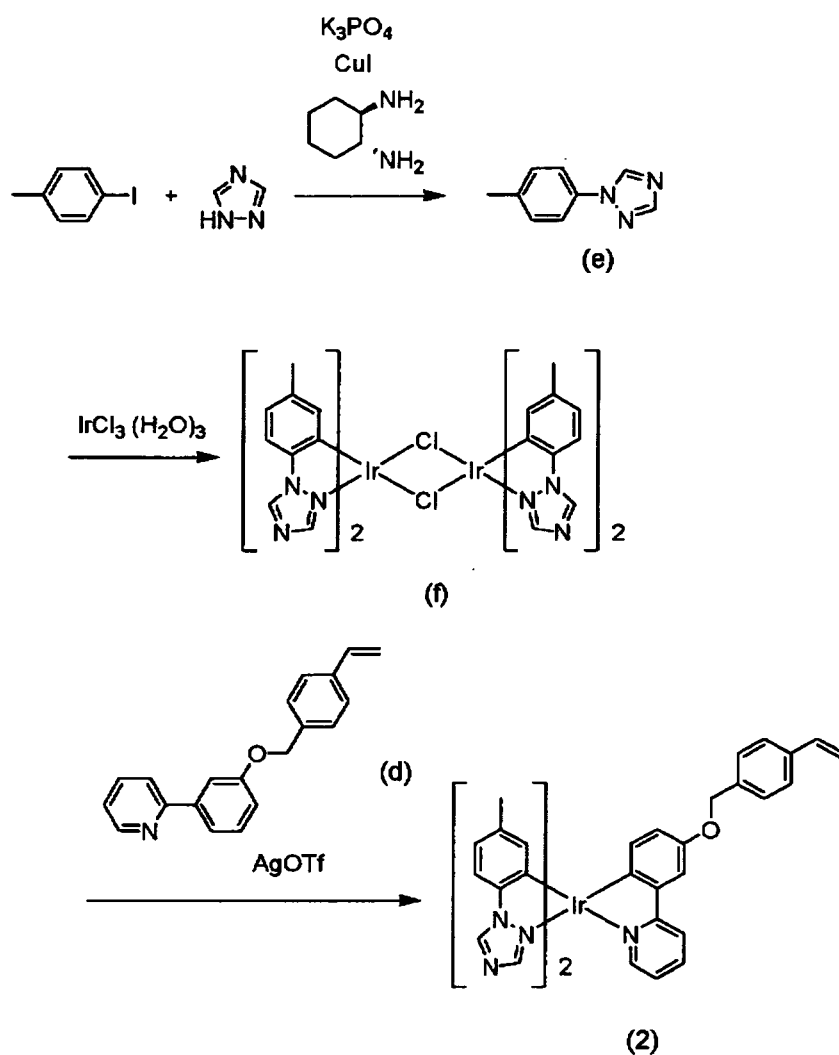

8.0 g (37 mmol) of 4-iodotoluene, 3.0 g (43 mmol) of 1,2,4-triazole, 15 g (71 mmol) of tripotassium phosphate, 90 mg
 5 (0.47 mmol) of copper (I) iodide, 250 mg (2.2 mmol) of trans-1,2-cyclohexanediamine and 40 ml of dioxane were stirred together at 110°C for 24 hours. The resultant reaction liquid was filtered through a glass filter, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel
 10 column chromatography (eluting solvent: chloroform), and 3.6 g

(23 mmol) of a compound (e) was obtained (61% yield).

Subsequently, 2.50 g (16 mmol) of the compound (e), 2.55 g (7.2 mmol) of iridium chloride trihydrate, 30 ml of 2-ethoxyethanol and 10 ml of water were mixed and heated under reflux for 12 hours. The resultant reaction liquid was combined with a small amount of water, and the precipitated product was filtered off, washed with methanol and dried under reduced pressure to afford 3.7 g (3.4 mmol) of an iridium complex (f) (94% yield).

Thereafter, 2.9 g (2.7 mmol) of the iridium complex (f), 1.9 g (6.6 mmol) of the compound (d), 1.7 g (6.6 mmol) of silver trifluoromethanesulfonate and 150 ml of toluene were mixed and heated under reflux for 3 hours. The resultant reaction liquid was filtered through Celite, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel column chromatography (eluting solvent: dichloromethane). As a result, 0.50 g (0.63 mmol) of an iridium complex (2) was obtained (12% yield).

The identification data of the iridium complex (2) are as follows.

[0088]

$^1\text{H-NMR}$ (CDCl_3): 8.5–7.0 (21H), 6.71 (1H), 5.72 (1H), 5.21 (1H), 4.86 (2H), 2.29 (3H), 2.25 (3H)

Elemental analysis:

theoretical values ($\text{C}_{38}\text{H}_{32}\text{IrN}_7\text{O}$): C: 57.42, H: 4.06, N:


12.33

measured values: C: 57.80, H: 3.94, N: 12.08

Mass spectroscopy (ESI): 795 (M^+)

[Synthetic Example 3: Synthesis of iridium complex (3)]

5 [0089]

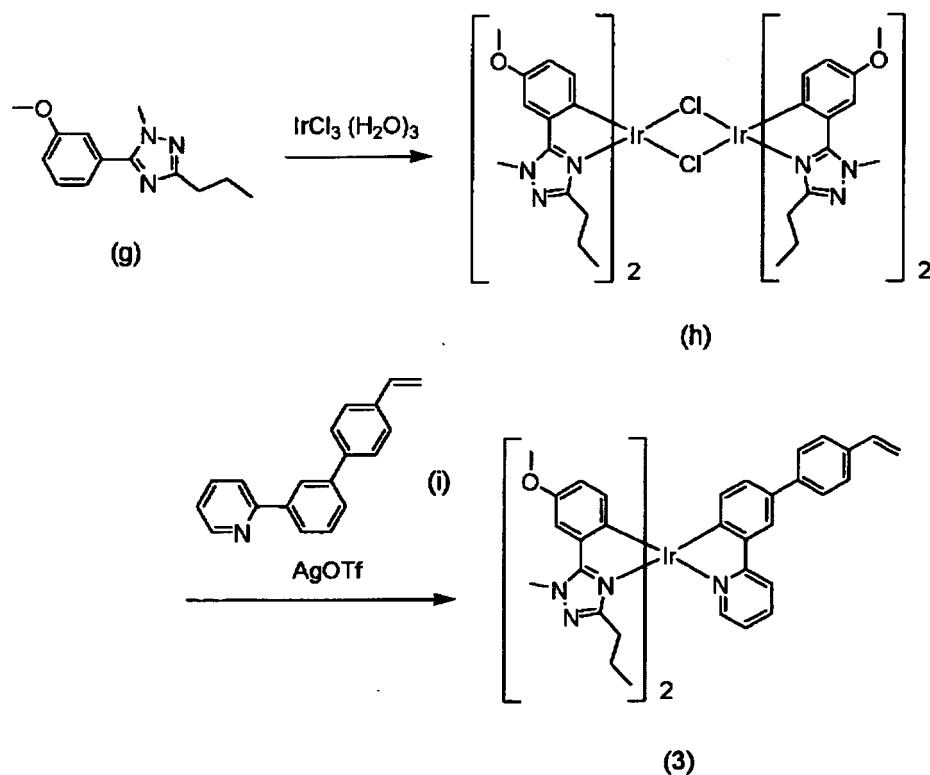

4.0 g (17 mmol) of a compound (g) (synthesized according to a method described in Chemistry of Materials, Vol. 18, pp. 5119-5129, 2006), 3.0 g (8.5 mmol) of iridium chloride trihydrate, 45 ml of 2-ethoxyethanol and 15 ml of water were mixed and heated under reflux for 12 hours. The resultant reaction liquid was combined with a small amount of water, and the precipitated product was filtered off, washed with methanol and dried under reduced pressure to afford 5.0 g (3.6 mmol) of an iridium complex (h) (85%

yield).

Thereafter, 3.5 g (2.5 mmol) of the iridium complex (h),
1.5 g (5.8 mmol) of a compound (i) (synthesized according to a
method disclosed in JP-A-2006-8996), 1.5 g (5.8 mmol) of silver
5 trifluoromethanesulfonate and 150 ml of toluene were mixed and
heated under reflux for 3 hours. The resultant reaction liquid
was filtered through Celite, and the solvent was evaporated under
reduced pressure. The residue was purified by silica gel column
chromatography (eluting solvent: dichloromethane). As a result,
10 0.40 g (0.44 mmol) of an iridium complex (3) was obtained (9% yield).

The identification data of the iridium complex (3) are as
follows.

[0090]

$^1\text{H-NMR}$ (CDCl_3): 8.0–6.9 (13H), 6.77 (1H), 6.50 (4H), 5.76
15 (1H), 5.21 (1H), 4.20 (6H), 3.65 (6H), 2.22 (2H), 1.90 (2H), 1.35
(2H), 1.14 (2H), 0.66 (6H)

Elemental analysis:


theoretical values ($\text{C}_{45}\text{H}_{46}\text{IrN}_7\text{O}$): C: 59.45, H: 5.10, N:
10.78

20 measured values: C: 59.32, H: 4.97, N: 10.51

Mass spectroscopy (ESI): 909 (M^+)

[Synthetic Example 4: Synthesis of iridium complex (4)]

[0091]

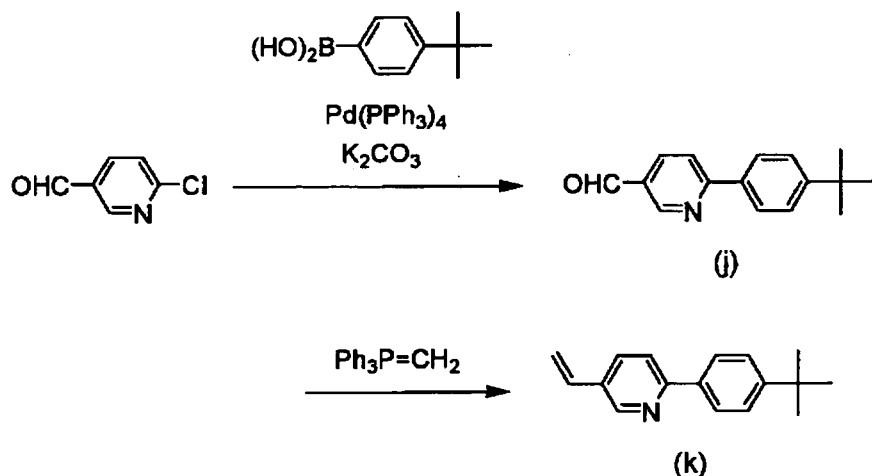


5.0 g (35 mmol) of 2-chloro-5-formylpyridine, 6.5 g (37 mmol) of 4-*t*-butylphenylboronic acid, 0.50 g (0.43 mmol) of tetrakis(triphenylphosphine)palladium and 50 ml of 1,2-dimethoxyethane were mixed together. To the mixture, 50 ml of an aqueous solution of 14.0 g (101 mmol) of potassium carbonate was added, and the mixture was stirred with heating for 5 hours. The organic phase was extracted with ethyl acetate. The solvent was evaporated from the extract under reduced pressure. The residue was purified by silica gel column chromatography (eluting solvent: chloroform/ethyl acetate = 4/1), and 4.5 g (19 mmol) of a compound (j) was obtained (54% yield).

5.3 g (15 mmol) of methyltriphenylphosphonium bromide and 25 ml of tetrahydrofuran were mixed together, and the mixture was cooled with ice. To the mixture, 1.7 g (15 mmol) of potassium-*t*-butoxide was added, followed by stirring for 1 hour. To the mixture, a solution of 3.1 g (13 mmol) of the compound (j)

in tetrahydrofuran (20 ml) was added dropwise, and the resultant mixture was stirred at room temperature for 3 hours. The solvent was evaporated from the reaction liquid under reduced pressure. The residue was purified by silica gel column chromatography (eluting solvent: chloroform), and 2.6 g (11 mmol) of a compound (k) was obtained (84% yield).

[0092]

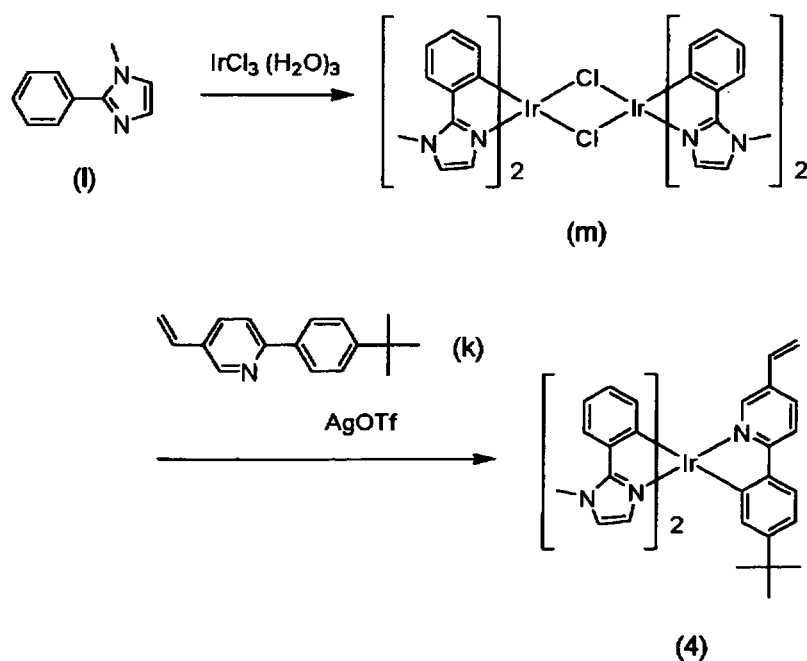

6.0 g (38 mmol) of a compound (1) (synthesized according to a method described in Tetrahedron Letters, Vol. 46, pp. 8369-8372, 2005), 6.5 g (18 mmol) of iridium chloride trihydrate, 60 ml of 2-ethoxyethanol and 20 ml of water were mixed and heated under reflux for 12 hours. The resultant reaction liquid was combined with a small amount of water, and the precipitated product was filtered off, washed with methanol and dried under reduced pressure to afford 7.5 g (6.9 mmol) of an iridium complex (m) (77% yield).

Thereafter, 3.0 g (2.8 mmol) of the iridium complex (m),
1.5 g (6.3 mmol) of the compound (k), 1.5 g (5.8 mmol) of silver
trifluoromethanesulfonate and 100 ml of toluene were mixed and
heated under reflux for 3 hours. The resultant reaction liquid
5 was filtered through Celite, and the solvent was evaporated under
reduced pressure. The residue was purified by silica gel column
chromatography (eluting solvent: toluene). As a result, 0.45 g
(0.61 mmol) of an iridium complex (4) was obtained (11% yield).

The identification data of the iridium complex (4) are as
10 follows.

[0093]

$^1\text{H-NMR}$ (CDCl_3): 7.8–6.8 (18H), 6.47 (1H), 6.50, 5.48 (1H),
5.15 (1H), 3.57 (6H), 1.09 (9H)

Elemental analysis:



15 theoretical values ($\text{C}_{37}\text{H}_{36}\text{IrN}_5$): C: 59.82, H: 4.88, N: 9.43

measured values: C: 60.05, H: 4.79, N: 9.22

Mass spectroscopy (ESI): 743 (M^+)

[Synthetic Example 5: Synthesis of iridium complex (R1)]

[0094]

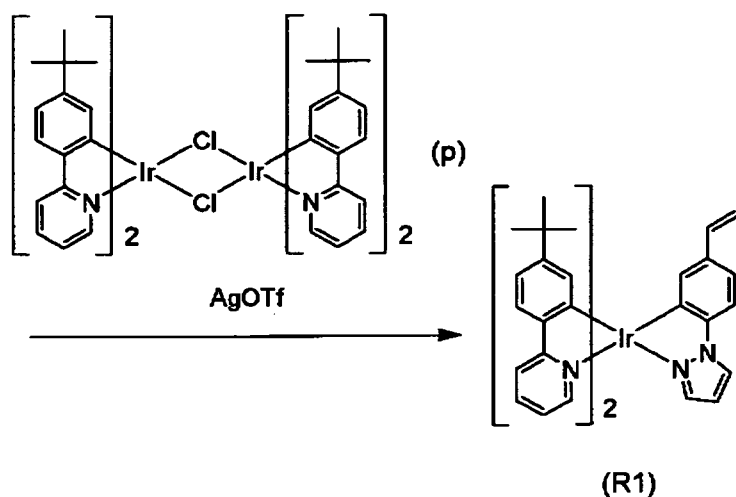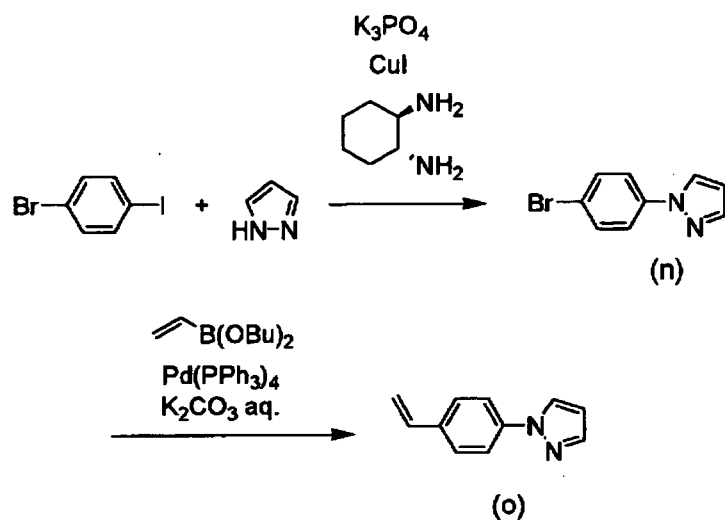

10 g (35 mmol) of 4-bromoiodobenzene, 2.4 g (35 mmol) of pyrazole, 15 g (71 mmol) of tripotassium phosphate, 90 mg (0.47
 5 mmol) of copper (I) iodide, 250 mg (2.2 mmol) of trans-1,2-cyclohexanediamine and 50 ml of dioxane were stirred together at 110°C for 24 hours. The resultant reaction liquid was filtered through a glass filter, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel
 10 column chromatography (eluting solvent: chloroform), and 3.2 g

(14 mmol) of a compound (n) was obtained (41% yield).

Subsequently, 3.0 g (13 mmol) of the compound (n), 2.5 g (14 mmol) of vinylboronic acid dibutyl ester, 0.50 g (0.43 mmol) of tetrakis(triphenylphosphine)palladium and 30 ml of

5 1,2-dimethoxyethane were mixed together. To the mixture, 25 ml of an aqueous solution of 5.4 g (39 mmol) of potassium carbonate was added, and the mixture was stirred with heating for 5 hours. The organic phase was extracted with ethyl acetate. The solvent was evaporated from the extract under reduced pressure. The
10 residue was purified by silica gel column chromatography (eluting solvent: chloroform), and 1.9 g (11 mmol) of a compound (o) was obtained (86% yield).

Thereafter, 1.0 g (5.9 mmol) of the compound (o), 3.5 g (2.7 mmol) of an iridium complex (p) (synthesized according to a method
15 disclosed in JP-A-2006-8996), 1.6 g (6.2 mmol) of silver trifluoromethanesulfonate and 50 ml of toluene were mixed and heated under reflux for 3 hours. The resultant reaction liquid was filtered through Celite, and the solvent was evaporated under reduced pressure. The residue was purified by silica gel column
20 chromatography (eluting solvent: toluene). As a result, 0.56 g (0.72 mmol) of an iridium complex (R1) was obtained (13% yield).

The identification data of the iridium complex (R1) are as follows.

[0095]

$^1\text{H-NMR}$ (CDCl_3): 8.0–6.8 (18H), 6.56 (1H), 6.22 (2H), 5.73 (1H), 5.04 (1H), 1.11 (9H), 0.98 (9H)

Elemental analysis:

theoretical values ($\text{C}_{41}\text{H}_{41}\text{IrN}_4$): C: 62.97, H: 5.28, N: 7.16


5 measured values: C: 63.10, H: 5.17, N: 7.01

Mass spectroscopy (ESI): 782 (M^+)

[Synthetic Example 6: Synthesis of iridium complexes (R2) to (R4)]


2-(4-vinylphenyl)pyridine, the compound (d) and the compound (i) were each reacted with the dinuclear iridium complex
10 in the same manner as the synthesis of the iridium complex (R1),
resulting in iridium complexes (R2), (R3) and (R4), respectively.

[0096]




(R2)

[0097]

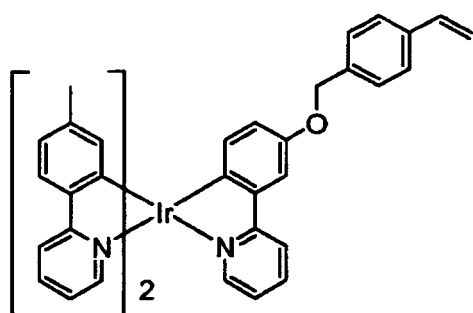

(R3)

[0098]

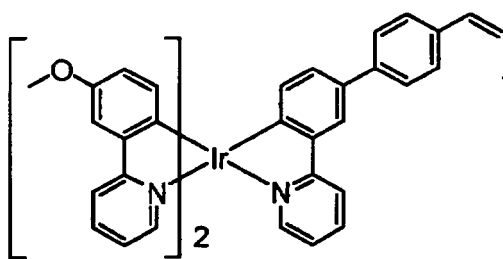

(R4)

5

The identification data of the iridium complex (R2) are as follows.

$^1\text{H-NMR}$ (CDCl_3): 7.9–6.8 (21H), 6.58 (1H), 5.54 (1H), 4.96 (1H), 1.09 (18H)

10

Elemental analysis:

theoretical values ($\text{C}_{43}\text{H}_{42}\text{IrN}_3$): C: 65.12, H: 5.34, N: 5.30

measured values: C: 65.44, H: 5.30, N: 5.16

Mass spectroscopy (ESI): 793 (M^+)

[0099]

15

The identification data of the iridium complex (R3) are as

follows.

$^1\text{H-NMR}$ (CDCl_3): 8.0-6.8 (25H), 6.75 (1H), 5.65 (1H), 5.19 (1H), 4.21 (2H), 2.30 (3H), 2.17 (3H)

Elemental analysis:

5 theoretical values ($\text{C}_{44}\text{H}_{36}\text{IrN}_3\text{O}$): C: 64.84, H: 4.45, N: 5.16

measured values: C: 65.02, H: 4.26, N: 5.09

Mass spectroscopy (ESI): 815 (M^+)

[0100]

10 The identification data of the iridium complex (R4) are as follows.

$^1\text{H-NMR}$ (CDCl_3): 8.0-6.8 (25H), 6.76 (1H), 5.75 (1H), 5.23 (1H), 3.66 (6H)

Elemental analysis:

15 theoretical values ($\text{C}_{43}\text{H}_{34}\text{IrN}_3\text{O}_2$): C: 63.22, H: 4.19, N: 5.14

measured values: C: 63.56, H: 5.27, N: 4.98

Mass spectroscopy (ESI): 817 (M^+)

[0101]

20 [Example 1: Synthesis of polymer compound (1a)]

An airtight container was charged with 80 mg of the iridium complex (1), 460 mg of the polymerizable compound of Formula (E1) and 460 mg of the polymerizable compound of Formula (E7). Dehydrated toluene (5.0 ml) was added to the container.

Subsequently, a toluene solution (0.1 M, 0.10 ml) of 2,2'-azobis(isobutyronitrile) was added, and resulting mixture was degassed by conducting five freeze-pump-thaw procedures. The evacuated container was tightly closed. The materials were stirred at 60°C for 60 hours. After the reaction, the reaction liquid was added dropwise to 200 ml of acetone, and a precipitate resulted. The product was purified by being reprecipitated twice in toluene and acetone, and was dried at 50°C in vacuo overnight to afford a polymer compound (1a). The polymer compound (1a) had a weight-average molecular weight (Mw) of 53600 and a molecular weight distribution (Mw/Mn) of 3.12. From the ICP elemental analysis and ¹³C-NMR analysis, the ratio m/(m + n) in the polymer compound (1a) was estimated to be 0.051. In the polymer compound (1a), the ratios x/n and y/n were 0.45 and 0.55, respectively.

[0102]

[Examples 2 to 4 and Comparative Examples 1 to 4: Synthesis of polymer compounds (2a) to (4a) and comparative polymer compounds (1b) to (4b)]

Polymer compounds (2a) to (4a) and comparative polymer compounds (1b) to (4b) were produced in the same manner as in Example 1, except for the use of the iridium complexes and the polymerizable compounds shown in Table 1.

[0103]

Table 1

	Polymer compound	Composition of polymer compound	Mw	Mw/Mn	m/(m + n)	x/n	y/n
Ex. 1	1a	Iridium complex (1) 80 mg Polymerizable compound (E1) 460 mg Polymerizable compound (E7) 460 mg	53600	3.12	0.051	0.45	0.55
Ex. 2	2a	Iridium complex (2) 80 mg Polymerizable compound (E6) 460 mg Polymerizable compound (E14) 460 mg	54200	2.83	0.082	0.46	0.54
Ex. 3	3a	Iridium complex (3) 80 mg Polymerizable compound (E6) 460 mg Polymerizable compound (E14) 460 mg	42500	2.28	0.091	0.44	0.56
Ex. 4	4a	Iridium complex (4) 80 mg Polymerizable compound (E6) 460 mg Polymerizable compound (E14) 460 mg	40600	3.27	0.085	0.44	0.56
Comp. Ex. 1	1b	Iridium complex (R1) 80 mg Polymerizable compound (E1) 460 mg Polymerizable compound (E7) 460 mg	42400	2.78	0.049	0.43	0.57
Comp. Ex. 2	2b	Iridium complex (R2) 80 mg Polymerizable compound (E1) 460 mg Polymerizable compound (E7) 460 mg	44100	2.53	0.060	0.45	0.55
Comp. Ex. 3	3b	Iridium complex (R3) 80 mg Polymerizable compound (E6) 460 mg Polymerizable compound (E14) 460 mg	39000	2.21	0.088	0.48	0.52
Comp. Ex. 4	4b	Iridium complex (R4) 80 mg Polymerizable compound (E6) 460 mg Polymerizable compound (E14) 460 mg	57600	2.73	0.085	0.46	0.54

(Manufacturing and evaluation of organic EL devices)

[Example 5]

An ITO glass substrate (product of NIPPO ELECTRIC CO., LTD.) was used. The glass substrate was a 25 mm square, and
5 two stripe electrodes (anodes) of ITO (indium tin oxide) were formed with a width of 4 mm on one surface of the substrate.
[0104]

The ITO glass substrate was spin coated with poly(3,4-ethylenedioxythiophene) polystyrenesulfonic acid
10 (product name: Baytron P manufactured by Bayer AG) at 3500 rpm for 40 seconds. The coated substrate was dried in a vacuum dryer at reduced pressure and 60°C for 2 hours, resulting in an anode buffer layer having a thickness of about 50 nm.
Subsequently, 90 mg of the polymer compound (1a) was dissolved
15 in 2910 mg of toluene (special grade, manufactured by Wako Pure Chemical Industries, Ltd.). The solution was filtered through a 0.2 μ m filter and the filtrate was obtained as a coating solution.
The coating solution was spread over the anode buffer layer by spin coating at 3000 rpm for 30 seconds. The coating was
20 dried at room temperature (25°C) for 30 minutes to form an emitting layer, which was approximately 100 nm in thickness.
[0105]

The substrate with the emitting layer was placed in a deposition apparatus. Barium and aluminum were codeposited

in a weight ratio of 1:10 such that two stripe cathodes were formed with a width of 3 mm and in a direction perpendicular to the anode-extending direction. The cathodes were approximately 50 nm thick.

5 [0106]

Thereafter, leads (wires) were attached to the anode and cathode in an argon atmosphere. Thus, four organic EL devices 4 mm in length and 3 mm in width were manufactured. The organic EL devices were energized using a programmable direct
10 voltage/current source (TR6143 manufactured by ADVANTEST CORPORATION) to emit light.

[0107]

Table 2 sets forth the maximum external quantum efficiency, maximum brightness and luminance half life from 100 cd/m² initial
15 brightness at a constant current.

[Example 6]

Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer
20 compound (2a) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and luminance half life from 100 cd/m² initial brightness at a constant current.

[0108]

[Example 7]

Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer compound (3a) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and luminance half life from 100 cd/m² initial brightness at a constant current.

[0109]

10 [Example 8]

Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer compound (4a) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and luminance half life from 100 cd/m² initial brightness at a constant current.

[0110]

[Comparative Example 5]

20 Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer compound (1b) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and

luminance half life from 100 cd/m² initial brightness at a constant current.

[0111]

[Comparative Example 6]

5 Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer compound (2b) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and
10 luminance half life from 100 cd/m² initial brightness at a constant current.

[0112]

[Comparative Example 7]

 Organic EL devices were manufactured and tested in the
15 same manner as in Example 5, except that the coating solution for the emitting layer was prepared from 90 mg of the polymer compound (3b) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and
luminance half life from 100 cd/m² initial brightness at a
20 constant current.

[0113]

[Comparative Example 8]

 Organic EL devices were manufactured and tested in the same manner as in Example 5, except that the coating solution

for the emitting layer was prepared from 90 mg of the polymer compound (4b) and 2910 mg of toluene. Table 2 sets forth the maximum external quantum efficiency, maximum brightness and luminance half life from 100 cd/m² initial brightness at a
5 constant current.

[0114]

Table 2

	Maximum external quantum efficiency (%)	Maximum brightness (cd/m ²)	Luminance half life (h)
Ex. 5	7.5	24400	6900
Ex. 6	7.8	25100	7700
Ex. 7	6.9	30600	8000
Ex. 8	7.7	22900	7100
Comp. Ex. 5	6.9	21900	2800
Comp. Ex. 6	7.5	31000	4100
Comp. Ex. 7	6.8	22500	3400
Comp. Ex. 8	6.8	26600	3900

INDUSTRIAL APPLICABILITY


5 [0115]

The organic EL devices of the invention are suited for use in displays, backlights, electrophotographic systems, illuminating light sources, recording light sources, exposing sources, reading light sources, signs, advertising displays,

10 interior accessories and optical communication systems.

CLAIMS

1. A phosphorescent polymer compound comprising structural units that are derived from a compound represented by Formula (1):

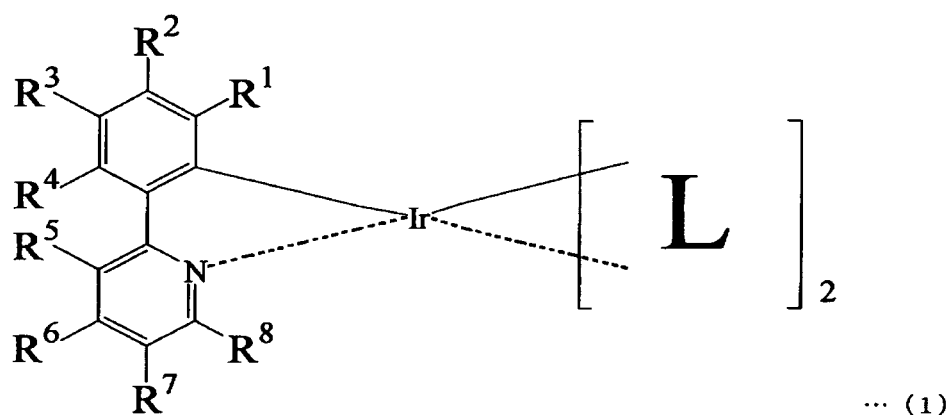


wherein R¹ to R⁸ are each independently a hydrogen atom, a halogen atom, a cyano group, a C1-10 alkyl group, a C6-10 aryl group, a C1-15 heteroaryl group, an amino group optionally substituted with a C1-10 alkyl group, a C1-10 alkoxy group, a silyl group optionally substituted with a C1-10 alkyl group, or a group having a radically polymerizable functional group, and one of R¹ to R⁸ is a group having a radically polymerizable functional group;


L is a ligand represented by any of Formulae (1a) to (1i) below, and the two ligands L may be the same or different from each other; and

the five-membered ring in the ligand L may have a substituent group selected from the group consisting of C1-10


alkyl groups, amino groups optionally substituted with a C1-10 alkyl group, and C1-10 alkoxy groups;




... (1 a)




... (1 b)




... (1 c)




... (1 d)




... (1 e)




... (1 f)



... (1 g)



... (1 h)



... (1 i)

wherein R^9 to R^{12} are each independently a hydrogen atom, a halogen atom, a cyano group, a C1-10 alkyl group, an amino group optionally substituted with a C1-10 alkyl group, a C1-10 alkoxy group, or a silyl group optionally substituted with a C1-10

alkyl group.

2. The phosphorescent polymer compound according to claim 1, which further comprises structural units derived from
5 at least one of hole-transporting polymerizable compounds and electron-transporting polymerizable compounds.


3. An organic electroluminescent device comprising a pair of electrodes, and one or more organic compound layers
10 including at least an emitting layer between the electrodes, the emitting layer comprising the polymer compound of claim 1 or 2.

4. A process for producing organic electroluminescent
15 devices, comprising a step of forming one or more organic compound layers on an anode, the one or more organic compound layers including at least a layer comprising the polymer compound of claim 1 or 2, and a step of forming a cathode on the organic compound layer.

20

5. A display apparatus including the organic electroluminescent device of claim 3.

[Fig. 1]

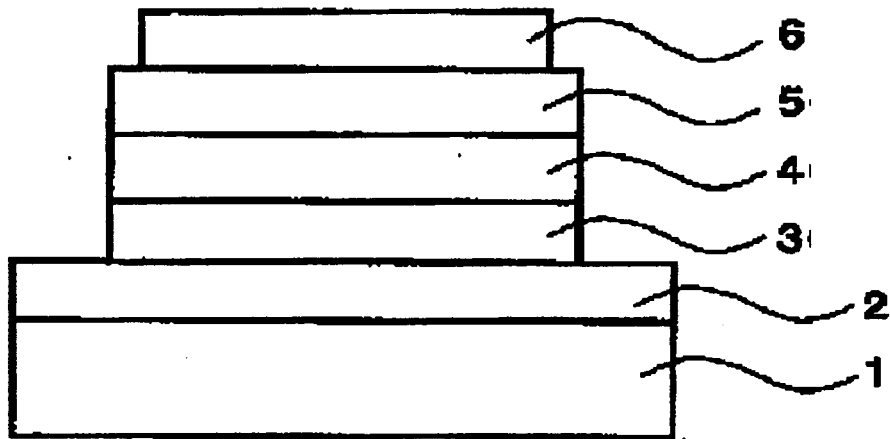

INTERNATIONAL SEARCH REPORT

International application No
PCT/JP2008/061800

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01L51/52 H01L51/54

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01L C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2004/101707 A (ISIS INNOVATION [GB]; UNIV ST ANDREWS [GB]; BURN PAUL LESLIE [GB]; SAM) 25 November 2004 (2004-11-25) page 19, line 3 - page 22, line 4	1-5
A	WO 03/102109 A (STARCK H C GMBH [DE]; MARSITZKY DIRK [DE]; HEUER HELMUT-WERNER [DE]; W) 11 December 2003 (2003-12-11) compounds B-I-2, B-II-1, B-II-3, B-II-4	1-5
A	US 2006/251923 A1 (LIN CHUN [US] ET AL) 9 November 2006 (2006-11-09) examples 1-25	1-5
A	US 2006/008670 A1 (LIN CHUN [US] ET AL) 12 January 2006 (2006-01-12) claims 1-80	1-5

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

6 November 2008

Date of mailing of the international search report

13/11/2008

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Welter, Steve

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/JP2008/061800

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2004101707 A	25-11-2004	CN 1791655 A EP 1636322 A1 JP 2007504272 T KR 20060018218 A US 2007009759 A1	21-06-2006 22-03-2006 01-03-2007 28-02-2006 11-01-2007
WO 03102109 A	11-12-2003	AU 2003238177 A1 CN 1671819 A EP 1513911 A1 HK 1083347 A1 JP 2005528508 T US 2006093852 A1	19-12-2003 21-09-2005 16-03-2005 08-08-2008 22-09-2005 04-05-2006
US 2006251923 A1	09-11-2006	EP 1878053 A1 KR 20080007570 A WO 2006121811 A1	16-01-2008 22-01-2008 16-11-2006
US 2006008670 A1	12-01-2006	WO 2006046980 A1	04-05-2006

专利名称(译)	磷光聚合物化合物和用其制造的有机电致发光器件		
公开(公告)号	EP2160776A1	公开(公告)日	2010-03-10
申请号	EP2008765849	申请日	2008-06-24
[标]申请(专利权)人(译)	昭和电工株式会社		
申请(专利权)人(译)	昭和电工株式会社制		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	TAKAHASHI YOSHIAKI		
发明人	TAKAHASHI, YOSHIAKI		
IPC分类号	H01L51/52 H01L51/54 C07F15/00 C09K11/06		
CPC分类号	H01L51/0085 C09K11/06 C09K2211/1029 C09K2211/1044 C09K2211/1059 C09K2211/1425 C09K2211/1466 C09K2211/185 H01L51/0037 H01L51/0043 H01L51/0059 H01L51/007 H01L51/0072 H01L51/008 H01L2251/308		
优先权	2007170646 2007-06-28 JP		
其他公开文献	EP2160776B1		
外部链接	Espacenet		

摘要(译)

磷光聚合物化合物具有高发光效率和长寿命。有机电致发光器件包括该化合物。磷光聚合物化合物包括衍生自由式(1)表示的化合物的结构单元：其中R₁至R₈各自独立地为氢原子，卤素原子，氰基，烷基，芳基，杂芳基，任选被烷基取代的氨基，烷氧基，任选被烷基取代的甲基硅烷基，或具有可自由基聚合的官能团的基团，并且R₁至R₈之一是具有可自由基聚合的官能团的基团。；L是具有特定五元环结构的配体，并且两个配体L可以彼此相同或不同。