



(51) International Patent Classification:

C09K 11/06 (2006.01) **C09D 11/36** (2014.01)
H01L 51/00 (2006.01) **C09D 11/033** (2014.01)
H01L 51/56 (2006.01)

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/EP2017/076429

Published:

— with international search report (Art. 21(3))

(22) International Filing Date:

17 October 2017 (17.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16196589.2 31 October 2016 (31.10.2016) EP

(71) Applicant: **MERCK PATENT GMBH** [DE/DE]; Frank-
furter Strasse 250, 64293 Darmstadt (DE).

(72) Inventors: **BÉALLE, Gaëlle**; Werderstrasse 20, 69120
HEIDELBERG (DE). **LEONHARD, Christoph**; Die
Halde 14, 64853 OTZBERG (DE). **TSENG, Hsin-
Rong**; Walter-Leiske-Strasse 37, 60320 FRANKFURT AM
MAIN (DE). **HAMBURGER, Manuel**; Brunhildstrasse
5, 68199 MANNHEIM (DE). **JATSCH, Anja**; Hattsteiner
Strasse 12, 60489 FRANKFURT AM MAIN (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: FORMULATION OF AN ORGANIC FUNCTIONAL MATERIAL

(57) Abstract: The present invention relates to a formulation containing at least one organic functional material and at least four different organic solvents, a first organic solvent A, a second organic solvent B, a third organic solvent C, and a fourth organic solvent D, wherein the first organic solvent A comprises a group, which is capable of receiving or giving a hydrogen bonding, the second organic solvent B has a boiling point in the range from 50 to 350°C, the third organic solvent C has a boiling point in the range from 100 to 300°C, and the fourth organic solvent D has a boiling point in the range from 200 to 400°C, is present in an amount from 0,01 to 1 vol.-% and has a viscosity of ≥ 15 mPas, the solubility of the at least one organic functional material in the second organic solvent B and in the fourth organic solvent D is ≥ 5 g/l, the boiling point of the third organic solvent C is at least 10°C lower than the boiling point of the second organic solvent B; and the boiling point of the fourth organic solvent D is at least 10°C higher than the boiling point of the second organic solvent B; as well as to electroluminescent devices prepared by using these formulations.



Formulation of an organic functional material

Technical Field

The present invention relates to a formulation containing at least one
5 organic functional material and at least four different organic solvents, a first organic solvent A, a second organic solvent B, a third organic solvent C, and a fourth organic solvent D, characterized in that

- the first organic solvent A comprises a group, which is capable of receiving or giving a hydrogen bonding,
- 10 - the second organic solvent B has a boiling point in the range from 150 to 350°C,
- the third organic solvent C has a boiling point in the range from 100 to 300°C, and
- the fourth organic solvent D has a boiling point in the range from 200 to 400°C, is present in an amount from 0.01 to 15 vol.-% and has a viscosity of ≥ 15 mPas,
- 15 - the solubility of the at least one organic functional material in the second organic solvent B and in the fourth organic solvent D is ≥ 5 g/l,
- the boiling point of the third organic solvent C is at least 10°C lower than the boiling point of the second organic solvent B; and
- 20 - the boiling point of the fourth organic solvent D is at least 10°C higher than the boiling point of the second organic solvent B;

as well as to electroluminescent devices prepared by using these formulations.

25

Background Art

Organic Light Emitting Devices (OLEDs) have been fabricated for a long time by vacuum deposition processes. Other techniques such as inkjet printing have been recently thoroughly investigated because of their
30 advantages such as cost savings and scale-up possibilities. One of the main challenges in multi-layer printing is to identify the relevant parameters to obtain a homogeneous deposition of inks on the substrate. To trigger

these parameters, such as surface tension, viscosity or boiling point, some additives can be added to the formulation.

Technical Problem and Object of the Invention

5 Many solvents have been proposed in organic electronic devices for inkjet printing. However, the number of important parameters playing a role during deposition and drying process makes the choice of the solvent very challenging. Thus, formulations containing organic semiconductors used for deposition by inkjet printing still need to be improved. One object of the
10 present invention is to provide a formulation of an organic semiconductor which allows a controlled deposition to form organic semiconductor layers having good layer properties and efficient performance. A further object of the present invention is to provide a formulation of an organic semiconductor which allows an excellent film uniformity when deposited
15 and dried on a substrate using e.g. an inkjet printing method thereby giving good layer properties and efficient performance.

In JP 2015/191792 A2 a solute is disclosed, composed of the constituent material or its precursor of the functional layer, dissolved in a first and
20 second solvent, wherein the first solvent has a first solubility parameter and a first boiling point and the second solvent has a smaller second solubility parameter than the first solubility parameter and a second lower boiling point than the first boiling point, the first boiling point is $\geq 250^{\circ}\text{C}$ and the second boiling point is $\geq 170^{\circ}\text{C}$, the difference between the second and the
25 first boiling point is $\geq 40^{\circ}\text{C}$ and the second solubility parameter is $9.0 (\text{cal}/\text{cm}^3)^{1/2}$ or less.

In EP 2924083 A1 an ink for functional layer formation is disclosed, comprising a first component that is a solute, a second component that has
30 a boiling point in the range from 280 to 350°C , is a good solvent for the first component, and is at least one type selected from the group consisting of an aromatic hydrocarbon including at least two aromatic rings, aromatic

glycol ether, aliphatic glycol ether, aliphatic acetate, and aliphatic ester, and a third component that has a boiling point in the range from 200 to 300°C, is a good solvent for the first component, and is at least one type selected from the group consisting of an aromatic hydrocarbon, an aromatic ether, and an aliphatic ether, wherein the proportion of the second component in a mixed solvent including the second component and the third component is 10 wt% or greater.

In US 2013/256636 A1 a function layer ink for forming a functional layer by a liquid coating method is disclosed, wherein the function layer material contains a macromolecular or low-molecular-weight material, and a mixed solvent containing 0.1 % by weight or more of solvent A having a viscosity in the range from 0.01 to 0.05 Pa·s, and solvent B having a viscosity of less than 0.01 Pa·s and a lower boiling point than the solvent A, the mixed solvent has a viscosity of less than 0.02 Pa·s and a boiling point in the range from 200 to 350°C.

In WO 2005/083814 A1, solutions of at least one organic semiconductor containing at least one high-molecular weight constituent in a solvent mixture of at least three different solvents A, B and C are disclosed. Solvents A and B are good solvents for the organic semiconductor, the solvent C is a bad solvent for the organic semiconductor.

In WO 2005/112145 A1 single-phase, liquid compositions (solutions) are disclosed comprising at least one organic semiconductor which comprises at least one high-molecular-weight component, and at least one organic solvent A which is a good solvent for the organic semiconductor, and at least one organic solvent B which is a poor solvent for the organic semiconductor, characterised in that the following applies to the boiling points (b.p.) of solvents A and B: $b.p.(A) > b.p.(B)$.

Solution to Problem

The above objects of the present invention are solved by providing a formulation comprising at least one organic functional material and at least four different organic solvents, a first organic solvent A, a second organic solvent B, a third organic solvent C and a fourth organic solvent D, characterized in that the first organic solvent A comprises a group, which is capable of receiving or giving a hydrogen bonding, the second organic solvent B has a boiling point in the range from 150 to 350°C, the third organic solvent C has a boiling point in the range from 100 to 300°C, and the fourth organic solvent D has a boiling point in the range from 200 to 400°C, is present in an amount from 0,01 to 15 vol.-% and has a viscosity of ≥ 15 mPas, the solubility of the at least one organic functional material in the second organic solvent B and in the fourth organic solvent D is ≥ 5 g/l, the boiling point of the third organic solvent C is at least 10°C lower than the boiling point of the second organic solvent B and the boiling point of the fourth organic solvent D is at least 10°C higher than the boiling point of the second organic solvent B.

Advantageous Effects of Invention

The inventors have surprisingly found that the use of the formulation of the present invention allows an effective ink deposition to form uniform and well-defined organic layers of functional materials which have good layer properties and performance.

Brief Description of Drawings

Figure 1 shows a typical layer structure of a device containing a substrate, an ITO anode, a hole-injection layer (HIL), a hole-transport layer (HTL), a green-emissive layer (G-EML), a hole blocking layer (HBL), an electron-transport layer (ETL) and an Al cathode.


Figures 2 to 22 show the film profiles of the films prepared in Reference Example as well as in the Working Examples 1 to 20.

Figures 23 to 25 show electroluminescent (EL) images of the device of Reference 1, as well as of the devices of Examples 1 and 2.

Description of Embodiments

5 The present invention relates to a formulation containing at least one organic functional material and at least four different organic solvents, a first organic solvent A, a second organic solvent B, a third organic solvent C and a fourth organic solvent D, characterized in that the first organic solvent A comprises a group, which is capable of receiving or giving a hydrogen
10 bonding, the second organic solvent B has a boiling point in the range from 150 to 350°C, the third organic solvent C has a boiling point in the range from 100 to 300°C and the fourth organic solvent D has a boiling point in the range from 200 to 400°C, is present in an amount from 0,01 to 15 vol.-% and has a viscosity of ≥ 15 mPas, the solubility of the at least one
15 organic functional material in the second organic solvent B and the fourth organic solvent D is ≥ 5 g/l, the boiling point of the third organic solvent C is at least 10°C lower than the boiling point of the second organic solvent B and the boiling point of the fourth organic solvent D is at least 10°C higher than the boiling point of the second organic solvent B.

20 A clear definition of a hydrogen bond donor/acceptor can be found in the *CRC Handbook of solubility parameters and other cohesion parameters, second edition, Allan F. M Barton, 1991*. The following definition is mentioned: "Hydrogen-bonding interaction is a particular type of Lewis acid-
25 base reaction in which the electron acceptor is a Brönsted acid. A convenient definition is that a hydrogen bond is a second bond formed to another atom by a covalently bound hydrogen atom. In the following scheme, atoms X and Y have electronegativities (relative tendencies of the bonded atom to attract electrons) higher than that of H, for example, C, N,
30 P, O, S, F, Cl, Br, or I:

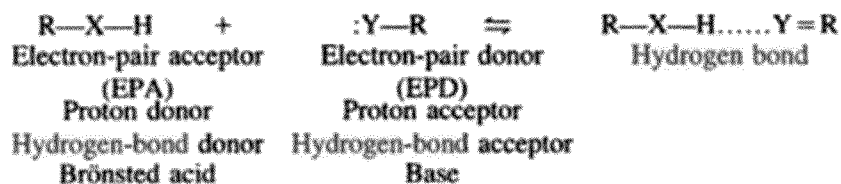

5

Also the classification by Pimentel and McClellan (*The hydrogen Bond*, W. H. Freeman, San Francisco, 1960) of liquids according to their hydrogen bonding characteristics has been used widely:

- Proton donor, such as trichloromethane,
- 10 - Proton acceptor, such as ketones, aldehydes, esters, ethers, tertiary amines, aromatic hydrocarbons, alkenes,
- Proton donor/acceptor, such as alcohols, carboxylic acids, water, primary and secondary amines.


15 Preferred Embodiments

In a preferred embodiment, the formulation is characterized in that the first organic solvent A comprises at least one group, preferably one group, which is capable of giving a hydrogen bonding.

20 In a more preferred embodiment, the formulation is characterized in that the at least one group, preferably the one group, of the first organic solvent A, which is capable of giving a hydrogen bonding is either an OH- or NH-group.

25 In one preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to general formula (I)

30

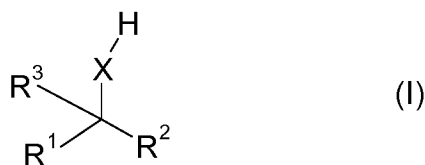

wherein

X is O or NR⁴,

R¹, R² and R³ are identical or different at each occurrence, and are H,

5 D, a straight-chain alkyl group having from 1 to 12 carbon atoms or a branched or cyclic alkyl group having from 3 to 12 carbon atoms, in which one or more non-adjacent CH₂ groups may be replaced by -O-, -S-, -NR⁵-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F or an aryl or heteroaryl group which has from 4 to 14 carbon atoms and may be substituted by one or more nonaromatic R⁵ radicals, and a plurality of substituents R⁵, either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic, aromatic or

10 heteroaromatic ring system, which may be substituted by a plurality of substituents R⁵, or two of R¹, R² and R³ may together in turn form a mono- or polycyclic, aliphatic, aromatic or heteroaromatic rings system having from 4 to 14 carbon atoms, which may be substituted by a plurality of substituents R⁵;

15 R⁴ is H, a straight-chain alkyl group having from 1 to 12 carbon atoms, a branched or cyclic alkyl group having from 3 to 12 carbon atoms or an aryl or heteroaryl group which has from 4 to 14 carbon atoms, which may be substituted by one or more nonaromatic R⁵ radicals, and


20

R⁵ are identical or different at each instance, and are H, a straight-chain alkyl or alkoxy group having from 1 to 12 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in

25

which one or more non-adjacent CH₂ groups may be replaced by -O-, -S-, -CO-O-, -C=O-, -CH=CH- or -C≡C-.

30 In one more preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to general formula (II)




5

wherein R^1 , R^2 and R^3 are defined as described above.

In another more preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to general formula (III)

10

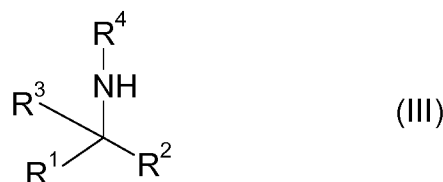

15

wherein R^1 , R^2 , R^3 and R^4 are defined as described above.

In a third and fourth most preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to general formula (II) or (III)

20


wherein

R^1 , R^2 and R^3 are identical or different at each occurrence, and are a straight-chain alkyl group having from 1 to 8 carbon atoms or a branched or cyclic alkyl group having from 3 to 8 carbon atoms, in which one or more non-adjacent CH_2 groups may be replaced by $-\text{O}-$, $-\text{NH}-$, $-\text{CO}-\text{O}-$, $-\text{C}=\text{O}-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$, and in which one or more hydrogen atoms may be replaced by F or an aryl or heteroaryl group which has from 4 to 10 carbon atoms and may be substituted by one or more nonaromatic R^5 radicals, and wherein R^5 is defined as described above.

30

In a first more preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to formula (I) wherein X is O and R³ is Ar¹-Y-, which is illustrated by the following formula (IV)

5

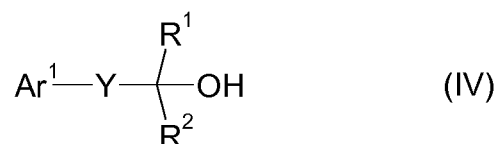

10

wherein

R¹, R² are identical or different at each instance, and are H or a straight-chain alkyl group having from 1 to 5 carbon atoms, preferably from 1 to 3 carbon atoms and more preferably 1 carbon atom,

15

Ar¹ is an aryl or heteroaryl group which has from 4 to 14 carbon atoms and may be substituted by one or more nonaromatic R⁵ radicals, which may be substituted by a plurality of substituents R⁵,

20

R⁵ are identical or different at each instance, and are H, a straight-chain alkyl or alkoxy group having from 1 to 12 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more non-adjacent CH₂ groups may be replaced by -O-, -S-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and

Y is a linear or branched -C_nH_{2n-} group with n = 1 to 10 carbon atoms, wherein one or more non-adjacent CH₂ groups of the group Y may be replaced by -O-.

25

In a second more preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to formula (II)

wherein

30

R¹, R² are identical or different at each instance, and are H or a straight-chain alkyl group having from 1 to 3, preferably 1, carbon atoms, and




5 R^3 is H, D, a straight-chain alkyl group having from 1 to 12 carbon atoms or a branched or cyclic alkyl group having from 3 to 12 carbon atoms, in which one or more non-adjacent CH_2 groups may be replaced by -O-, -S-, -NR⁵-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F.











In a most preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to formula (III) wherein R^4 is H.









10 In a most preferred embodiment, the formulation of the present invention is characterized in that the first organic solvent A is a solvent according to formula (II) or (IV) wherein R^1 is H and R^2 is either H or CH_3 .








15 Examples of preferred first solvents and their boiling points (BP) and melting points (MP) are shown in the following Table 1.

Table 1: Preferred first organic solvents A and their boiling points (BP) and melting points (MP).


20	Solvent A	BP (°C)	MP(°C)
	 CAS 122-99-6 2-phenoxy ethanol	244	11
25	 CAS 770-35-4 1-phenoxy-2-propanol	243	Liquid at RT
30	 CAS 2050-25-1 Diethylene glycol monobenzyl ether	311	Liquid at RT

	 CAS 111-46-6 Diethylene glycol	245	Liquid at RT
5	 CAS 55489-58-2 Triethylene glycol monobenzyl ether	358	Liquid at RT
	 CAS 55934-93-5 Tripropylene glycol monobutylether	276	-75
10	 CAS 107-88-0 1,3-butanediol	203	Liquid at RT
15	 CAS 112-57-2 Tetraethylenepentamine	340	-40
	 CAS 4169-04-4 2-Phenoxy-1-propanol	244	Liquid at RT
20	 CAS 6180-61-6 3-Phenoxy-1-propanol	248	Liquid at RT
	 CAS 622-08-2 2-(Benzyloxy)ethanol	256	Liquid at RT
25	 CAS 13605-19-1 2-(3-tolyloxy)ethanol	272	Liquid at RT
30	 CAS 15149-10-7 2-(4-methylphenoxy) ethanol	262	Solid at RT

5	 CAS 4369-08-8 1-(4-Methylphenoxy)-2-propanol	263	Solid at RT
	 CAS 100-86-7 2-methyl-1-phenyl-2-propanol	216	Liquid at RT
10	 CAS 4317-61-7 1-(2-methylphenoxy)-2-propanol	263	Liquid at RT
15	 CAS 3360-41-6 4-phenyl-1-butanol	273	Liquid at RT
20	 CAS 1123-85-9 2-phenyl-1-propanol	242	Liquid at RT
	 CAS 60-12-8 2-phenyl-1-ethanol	220	Liquid at RT
25	 CAS 122-97-4 3-phenyl-1-propanol	250	Liquid at RT
30	 CAS 60222-64-2 4 (4-methylphenoxy) 1-butanol	293	Liquid at RT

5	 CAS 106859-21-6 2-(4-Methylphenoxy)-1-butanol	288	Solid at RT
	 CAS 4369-08-8 1-(4-methylphenoxy)-2-propanol	260	Solid at RT
10	 CAS 52449-00-0 3-(4-methylphenoxy)-1-propanol	278	Liquid at RT
15	 CAS 1927-71-5 4-phenoxy-1-butanol	304	Solid at RT
20	 CAS 93-86-7 2-(2,5-dimethylphenoxy)ethanol	277	Solid at RT
25	 CAS 56101-99-6 1-Phenoxyethanol	225	Liquid at RT
30	 CAS 54411-10-8 2-(4-Ethylphenoxy)ethanol	278	-

5

 CAS 6161-86-0 2-(2-methylphenoxy) ethanol	265	-
--	-----	---

10

Preferably, the first organic solvent A has a surface tension of ≥ 20 mN/m. More preferably, the surface tension of the first organic solvent A is in the range from 25 to 50 mN/m and most preferably in the range from 28 to 45 mN/m.

15

Preferably, the first organic solvent A has a boiling point in the range from 150 to 350°C, more preferably in the range from 175 to 325°C and most preferably in the range from 200 to 300°C.

20

The content of the first solvent A is in the range from 5 to 60 vol.-%, preferably in the range from 10 to 60 vol.-%, more preferably in the range from 15 to 55 vol.-%, and most preferably in the range from 20 to 50 vol.-%, based on the total amount of solvents in the formulation.

25

The formulations of the present invention comprise at least a second organic solvent B which is different from the first organic solvent A. The second organic solvent B is employed together with the first organic solvent A.

30

Suitable second organic solvents B are preferably organic solvents which include inter alia, ketones, ethers, esters, amides such as di-C₁₋₂-alkylformamides, sulfur compounds, nitro compounds, hydrocarbons, halogenated hydrocarbons (e.g. chlorinated hydrocarbons), aromatic or heteroaromatic hydrocarbons (e.g. naphthalene derivatives) and halogenated aromatic or heteroaromatic hydrocarbons.

Preferably, the second organic solvent B can be chosen from one of the following groups: substituted and non-substituted aromatic or linear ethers such as 3-phenoxytoluene or anisole; substituted or non-substituted arene derivatives; substituted or non-substituted indanes such as hexamethyl-
5 indane; substituted and non-substituted aromatic or linear ketones; substituted and non-substituted heterocycles such as pyrrolidinones, pyridines, pyrazines; other fluorinated or chlorinated aromatic hydrocarbons, substituted or non-substituted naphthalenes such as alkyl substituted naphthalenes, such as 1-ethyl naphthalene.

10

Particularly preferred second organic solvents B are, for example, 1-ethylnaphthalene, 2-ethylnaphthalene, 2-propylnaphthalene, 2-(1-methylethyl)-naphthalene, 1-(1-methylethyl)-naphthalene, 2-butylnaphthalene, 1,6-dimethylnaphthalene, 2,2'-dimethylbiphenyl, 3,3'-dimethylbiphenyl, 1-acetylnaphthalene, 1,2,3,4-tetramethylbenzene, 1,2,3,5-tetramethyl-
15 benzene, 1,2,3-trimethylbenzene, 1,2,4,5-tetramethylbenzene, 1,2,4-trichlorobenzene, 1,2,4-trimethylbenzene, 1,2-dihydronaphthalene, 1,2-dimethylnaphthalene, 1,3-benzodioxole, 1,3-diisopropylbenzene, 1,3-dimethylnaphthalene, 1,4-benzodioxane, 1,4-diisopropylbenzene, 1,4-dimethylnaphthalene, 1,5-dimethyltetralin, 1-benzothiophene,
20 thianaphthalene, 1-bromonaphthalene, 1-chloromethylnaphthalene, 1-methoxynaphthalene, 1-methylnaphthalene, 2,3-benzofuran, 2,3-dihydrobenzofuran, 2,3-dimethylanisole, 2,4-dimethylanisole, 2,5-dimethylanisole, 2,6-dimethylanisole, 2-bromo-3-bromomethylnaphthalene, 2-bromomethylnaphthalene, 2-bromonaphthalene, 2-ethoxynaphthalene, 2-isopropyl-
25 anisole, 2-methylanisole, 2-methylindole, 3,4-dimethylanisole, 3,5-dimethylanisole, 3-methylanisole, 4-methylanisole, 5-methoxyindane, 5-methoxyindole, 5-tert-butyl-m-xylene, 6-methylquinoline, 8-methylquinoline, acetophenone, anisole, benzonitrile, benzothiazole, benzylacetate,
30 bromobenzene, butylphenylether, cyclohexylbenzene, decahydronaphthol, dimethoxytoluene, 3-phenoxytoluene, diphenylether, propiophenone, hexylbenzene, indane, hexamethylindane, indene, isochromane, cumene,

m-cymene, mesitylene, propylbenzene, o-dichlorobenzene, phenetol, ethoxybenzene, phenylacetate, p-cymene, propiophenone, sec-butylbenzene, t-butylbenzene, veratrol, pyrrolidinone, dimethylacetamide, and decalin.

5

The second organic solvent B has a boiling point in the range from 150 to 350°C, preferably in the range from 175 to 325°C and most preferably in the range from 200 to 300°C.

10

The content of the second organic solvent B is in the range from 5 to 95 vol.-%, preferably in the range from 10 to 75 vol.-%, more preferably in the range from 15 to 70 vol.-%, and most preferably in the range from 20 to 65 vol.-%, based on the total amount of organic solvents in the formulation.

15



The at least one organic functional material has a solubility in the second organic solvent B which is ≥ 5 g/l, preferably ≥ 10 g/l and more preferably ≥ 15 g/l.







Table 2: Preferred second organic solvents B and their boiling points (BP) and melting points (MP).






20







25








30






Solvent B	BP (°C)	MP(°C)
 CAS 3586-14-9 3-Phenoxytoluene	271	Liquid at RT
 CAS 136-60-7 Butylbenzoate	249	Liquid at RT

5	 CAS 827-52-1 Cyclohexylbenzene	239	Liquid at RT
10	 CAS 1127-76-0 1-Ethyl-naphthalene	258	-15
15	 CAS 7774-44-9 Cyclohexylisovalerate	223	Liquid at RT
20	 CAS 16409-46-4 Menthylisovalerate	270	Liquid at RT
25	 CAS 6243-10-3 Cyclohexylhexanoate	255	Liquid at RT
30	 CAS 103-93-5 p-Tolylisobutyrate	237	Liquid at RT

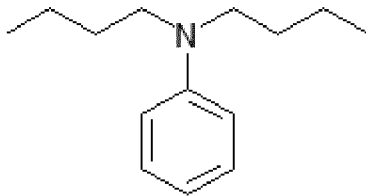5	 CAS 605-39-0 2,2'-Dimethylbiphenyl	259	18
10	 CAS 571-58-4 1,4-Dimethylnaphthalene	267	-18
15	 CAS 612-75-9 3,3'-Dimethylbiphenyl	279	5-7
20	 CAS 941-98-0 1-Acetylnaphthalene	302	10.5
25	 CAS 613-29-6 N,N-dibutylaniline	275	Liquid at RT

5	 CAS 119-60-8 Dicyclohexyl methanone	266	Liquid at RT
10	 CAS 94-08-6 Ethyl p-toluate	232	Liquid at RT
15	 CAS 2315-68-6 Propyl benzoate	211	Liquid at RT
20	 CAS 32357-25-8 Propyl 2-methylbenzoate	240	Liquid at RT
25	 CAS 87-24-1 Ethyl o-toluate	227	Liquid at RT
30	 CAS 120-33-2 Ethyl m-toluate	234	Liquid at RT

5	 CAS 119-64-2 Tetralin	207	Liquid at RT
10	 CAS 643-58-3 2-methyl biphenyl	255	Liquid at RT
15	 CAS 20115-23-5 Phenyl pentanoate	297	Liquid at RT
20	 CAS 4346-18-3 Phenyl butanoate	225	Liquid at RT
25	 CAS 14617-92-6 4-methylphenyl butanoate	244	Liquid at RT
30	 CAS 90-12-0 1-methyl naphthalene	243	Liquid at RT
35	 CAS 1680-51-9 6-methyltetralin	229	Liquid at RT

5	 CAS 2809-64-5 5-methyltetralin	234	Liquid at RT
10	 CAS 21564-91-0 1,5-dimethyltetralin	239	-
15	 CAS 22531-20-0 6-ethyltetralin	244	-
20	 CAS 939-27-5 2-ethyl naphthalene	258	Liquid at RT
25	 CAS 80-73-9 1,3-dimethyl-2-imidazolidinone	221	Liquid at RT

25 The formulations of the present invention comprise at least a third organic solvent C which is different from the first organic solvent A and the second organic solvent B. The third organic solvent C is employed together with the first organic solvent A and the second organic solvent B.

30 The third organic solvent C has a boiling point in the range from 100 to 300°C, preferably in the range from 125 to 275°C and most preferably in




the range from 150 to 250°C. Furthermore, the boiling point of the third organic solvent C is at least 10°C lower, preferably at least 20°C lower and more preferably at least 30°C lower than the boiling point of the second organic solvent B.



5

The content of the third organic solvent C is preferably in the range from 1 to 30 vol.-%, more preferably in the range from 3 to 25 vol.-%, and most preferably in the range from 5 to 20 vol.-%, based on the total amount of organic solvents in the formulation.

10

Table 3: Preferred third organic solvents C and their boiling points (BP) and melting points (MP).

	Solvent C	BP (°C)	MP(°C)
15	 CAS 112-40-3 Dodecane	216	-10
	 CAS 124-18-5 Decane	174	-29
20	 CAS 2189-60-8 1-Phenyloctane	261	-36
25	 CAS 538-68-1 Pentylbenzene	205	-75
30	 CAS 4685-47-6 3,4-Dimethylanisole	200	Liquid at RT

5	 CAS 93-58-3 Methylbenzoate	198	-12
10	 CAS 93-89-0 Ethylbenzoate	212	-34

The formulations of the present invention comprise at least a fourth organic solvent D which is different from the first organic solvent A, the second organic solvent B and the third organic solvent C. The fourth organic solvent D is employed together with the first organic solvent A, the second organic solvent B and the third organic solvent C.

Suitable fourth organic solvents D are preferably organic solvents which include inter alia, mono- or polysubstituted naphthalene derivatives, partially or fully hydrogenated mono- or polysubstituted naphthalene derivatives, mono- or polysubstituted indane derivatives and fully hydrogenated anthracene derivatives.

Particularly preferred fourth organic solvents D are, for example, 1-cyclohexyl naphthalene, 1-phenyl naphthalene, 1-cyclohexyl decahydronaphthalene, and 1-phenyl-1,2,3,4-tetrahydronaphthalene.

The fourth organic solvent D has a boiling point in the range from 200 to 400°C, preferably in the range from 225 to 375°C and most preferably in the range from 250 to 350°C.



The content of the fourth organic solvent D is from 0,01 to 15 vol.-%, preferably from 0,1 to ≤ 15 vol.-%, based on the total amount of organic solvents in the formulation.





- 5 The viscosity of the fourth organic solvent D is ≥ 15 mPas, preferably ≥ 20 mPas and most preferably ≥ 25 mPas.


The at least one organic functional material has a solubility in the fourth organic solvent D which is ≥ 5 g/l.

10

Table 4: Preferred fourth organic solvents D and their boiling points (BP) and melting points (MP).

	Solvent D	BP (°C)	MP(°C)
15		324	Liquid at RT
20	CAS 605-02-7 1-Phenylnaphthalene		
25		301	Liquid at RT
30	CAS 858198-92-2 1-phenyl decahydronaphthalene		

5	 CAS 22236-62-0 1-cyclohexyl decahydronaphthalene	301	Liquid at RT
10	 CAS 3042-69-1 Cyclohexylnaphthalene	300	Liquid at RT
15			
20	 CAS 90501-15-8 5-cyclohexyl-1,2,3,4-tetrahydro- naphthalene	341	Liquid at RT
25			
30	 CAS 80039-48-1 1-cyclohexyl-1,2,3,4-tetrahydro- naphthalene	322	Liquid at RT

5	 CAS 3018-20-0 1-phenyl-1,2,3,4-tetrahydro-naphthalene	320	Liquid at RT
---	--	-----	--------------

10 The content of the at least one organic functional material in the formulation is in the range from 0.001 to 20 weight-%, preferably in the range from 0.01 to 10 weight-%, more preferably in the range from 0.1 to 5 weight-% and most preferably in the range from 0.3 to 5 weight-%, based on the total weight of the formulation.

15 Furthermore, the formulation according to the present invention has a viscosity preferably in the range from 1 to 50 mPa·s, more preferably in the range from 2 to 40 mPa·s, and most preferably in the range from 2 to 20 mPa·s.

20 The viscosity of the formulations and solvents according to the present invention is measured with a 1° cone-plate rotational rheometer of the type Discovery AR3 (Thermo Scientific). The equipment allows a precise control of the temperature and sheer rate. The measurement of the viscosity is carried out at a temperature of 25.0°C (+/- 0.2°C) and a sheer rate of 500 s⁻¹. Each sample is measured three times and the obtained measured values are averaged.

25 The formulation according to the present invention has a surface tension preferably in the range from 15 to 50 mN/m, more preferably in the range from 20 to 45 mN/m and most preferably in the range from 25 to 40 mN/m.

30

Preferably, the organic solvent blend comprises a surface tension in the range from 15 to 50 mN/m, more preferably in the range from 20 to 45 mN/m and most preferably in the range from 25 to 40 mN/m.

- 5 The surface tension can be measured using a FTA (First Ten Angstrom) 1000 contact angle goniometer at 20°C. Details of the method are available from First Ten Angstrom as published by Roger P. Woodward, Ph.D. "Surface Tension Measurements Using the Drop Shape Method".
- Preferably, the pendant drop method can be used to determine the surface
10 tension. This measurement technique dispenses a drop from a needle in a bulk liquid or gaseous phase. The shape of the drop results from the relationship between the surface-tension, gravity and density differences. Using the pendant drop method, the surface tension is calculated from the shadow image of a pendant drop using
- 15 <http://www.kruss.de/services/education-theory/glossary/drop-shape-analysis>. A commonly used and commercially available high precision drop shape analysis tool, namely FTA1000 from First Ten Ångstrom, was used to perform all surface tension measure-ments. The surface tension is determined by the software FTA1000. All measurements were performed at
20 room temperature which is in the range between 20°C and 25°C. The standard operating procedure includes the determination of the surface tension of each formulation using a fresh disposable drop dispensing system (syringe and needle). Each drop is measured over the duration of one minute with sixty measurements which are later on averaged. For each
25 formulation three drops are measured. The final value is averaged over said measurements. The tool is regularly cross-checked against various liquids having well known surface tensions.

- 30 The formulation according to the present invention comprises at least one organic functional material which can be employed for the production of functional layers of electronic devices. Functional materials are generally

the organic materials which are introduced between the anode and the cathode of an electronic device.

5 The term organic functional material denotes, inter alia, organic conductors, organic semiconductors, organic fluorescent compounds, organic phosphorescent compounds, organic light-absorbent compounds, organic light-sensitive compounds, organic photosensitisation agents and other organic photoactive compounds. The term organic functional material furthermore encompasses organometallic complexes of transition metals, rare
10 earths, lanthanides and actinides.

The organic functional material is selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, exciton-blocking materials, electron-transport materials, electron-
15 injection materials, hole-conductor materials, hole-injection materials, n-dopants, p-dopants, wide-band-gap materials, electron-blocking materials and hole-blocking materials.

Preferred embodiments of organic functional materials are disclosed in
20 detail in WO 2011/076314 A1, where this document is incorporated into the present application by way of reference.

In a preferred embodiment, the organic functional material is an organic semiconductor selected from the group consisting of hole-injecting, hole-
25 transporting, emitting, electron-transporting and electron-injecting materials.

The organic functional material can be a compound having a low molecular weight, a polymer, an oligomer or a dendrimer, where the organic functional material may also be in the form of a mixture. Thus, the formulations
30 according to the present invention may comprise two or more different compounds having a low molecular weight, one compound having a low molecular weight and one polymer or two polymers (blend).

Organic functional materials are frequently described via the properties of the frontier orbitals, which are described in greater detail below. Molecular orbitals, in particular also the highest occupied molecular orbital (HOMO) and the lowest unoccupied molecular orbital (LUMO), their energy levels and the energy of the lowest triplet state T_1 or of the lowest excited singlet state S_1 of the materials can be estimated based on quantum-chemical calculations. In order to calculate these properties for organic substances without metals, firstly a geometry optimisation is carried out using the "Ground State/Semi-empirical/Default Spin/AM1/Charge 0/Spin Singlet" method. An energy calculation is subsequently carried out on the basis of the optimised geometry. The "TD-SCF/DFT/Default Spin/B3PW91" method with the "6-31G(d)" base set (charge 0, spin singlet) is used here. For metal-containing compounds, the geometry is optimised via the "Ground State/Hartree-Fock/Default Spin/LanL2MB/Charge 0/Spin Singlet" method. The energy calculation is carried out analogously to the above-described method for the organic substances, with the difference that the "LanL2DZ" base set is used for the metal atom and the "6-31G(d)" base set is used for the ligands. The energy calculation gives the HOMO energy level HE_h or LUMO energy level LE_h in hartree units. The HOMO and LUMO energy levels in electron volts calibrated with reference to cyclic voltammetry measurements are determined therefrom as follows:

$$\text{HOMO(eV)} = ((HE_h * 27.212) - 0.9899) / 1.1206$$

$$\text{LUMO(eV)} = ((LE_h * 27.212) - 2.0041) / 1.385$$

For the purposes of the present application, these values are to be regarded as HOMO and LUMO energy levels respectively of the materials.

The lowest triplet state T_1 is defined as the energy of the triplet state having the lowest energy which arises from the quantum-chemical calculation described.

The lowest excited singlet state S_1 is defined as the energy of the excited singlet state having the lowest energy which arises from the quantum-chemical calculation described.

5

The method described herein is independent of the software package used and always gives the same results. Examples of frequently used programs for this purpose are "Gaussian09W" (Gaussian Inc.) and Q-Chem 4.1 (Q-Chem, Inc.).

10

Compounds having hole-injection properties, also called hole-injection materials herein, simplify or facilitate the transfer of holes, i.e. positive charges, from the anode into an organic layer. In general, a hole-injection material has an HOMO level which is in the region of or above the level of the anode, i.e. in general is at least -5.3 eV.

15

Compounds having hole-transport properties, also called hole-transport materials herein, are capable of transporting holes, i.e. positive charges, which are generally injected from the anode or an adjacent layer, for example a hole-injection layer. A hole-transport material generally has a high HOMO level of preferably at least -5.4 eV. Depending on the structure of an electronic device, it may also be possible to employ a hole-transport material as hole-injection material.

20

The preferred compounds which have hole-injection and/or hole-transport properties include, for example, triarylamine, benzidines, tetraaryl-para-phenylenediamines, triarylphosphines, phenothiazines, phenoxazines, dihydrophenazines, thianthrenes, dibenzo-para-dioxins, phenoxathiynes, carbazoles, azulenes, thiophenes, pyrroles and furans as well as their derivatives and further O-, S- or N-containing heterocycles having a high HOMO (HOMO = highest occupied molecular orbital).

30

As compounds which have hole-injection and/or hole-transport properties, particular mention may be made of phenylenediamine derivatives (US 3615404), arylamine derivatives (US 3567450), amino-substituted chalcone derivatives (US 3526501), styrylanthracene derivatives (JP-A-56-46234), polycyclic aromatic compounds (EP 1009041), polyarylalkane derivatives (US 3615402), fluorenone derivatives (JP-A-54-110837), hydrazone derivatives (US 3717462), acylhydrazones, stilbene derivatives (JP-A-61-210363), silazane derivatives (US 4950950), polysilanes (JP-A-2-204996), aniline copolymers (JP-A-2-282263), thiophene oligomers (JP Heisei 1 (1989) 211399), polythiophenes, poly(N-vinylcarbazole) (PVK), polypyrroles, polyanilines and other electrically conducting macromolecules, porphyrin compounds (JP-A-63-2956965, US 4720432), aromatic dimethylidene-type compounds, carbazole compounds, such as, for example, CDBP, CBP, mCP, aromatic tertiary amine and styrylamine compounds (US 4127412), such as, for example, triphenylamines of the benzidine type, triphenylamines of the styrylamine type and triphenylamines of the diamine type. It is also possible to use arylamine dendrimers (JP Heisei 8 (1996) 193191), monomeric triarylamine (US 3180730), triarylamine containing one or more vinyl radicals and/or at least one functional group containing active hydrogen (US 3567450 and US 3658520), or tetraaryldiamines (the two tertiary amine units are connected via an aryl group). More triarylamine groups may also be present in the molecule. Phthalocyanine derivatives, naphthalocyanine derivatives, butadiene derivatives and quinoline derivatives, such as, for example, dipyrzino[2,3-f:2',3'-h]quinoxalinehexacarbonitrile, are also suitable.


Preference is given to aromatic tertiary amines containing at least two tertiary amine units (US 2008/0102311 A1, US 4720432 and US 5061569), such as, for example, NPD (α -NPD = 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl) (US 5061569), TPD 232 (= N,N'-bis-(N,N'-diphenyl-4-aminophenyl)-N,N'-diphenyl-4,4'-diamino-1,1'-biphenyl) or MTDATA

(MTDATA or m-MTDATA = 4,4',4''-tris[3-methylphenyl]phenylamino]-triphenylamine) (JP-A-4-308688), TBDB (= N,N,N',N'-tetra(4-biphenyl)-diaminobiphenylene), TAPC (= 1,1-bis(4-di-*p*-tolylaminophenyl)cyclohexane), TAPPP (= 1,1-bis(4-di-*p*-tolylaminophenyl)-3-phenylpropane),
 5 BDTAPVB (= 1,4-bis[2-[4-[N,N-di(*p*-tolyl)amino]phenyl]vinyl]benzene), TTB (= N,N,N',N'-tetra-*p*-tolyl-4,4'-diaminobiphenyl), TPD (= 4,4'-bis[N-3-methylphenyl]-N-phenylamino)biphenyl), N,N,N',N'-tetraphenyl-4,4'''-diamino-1,1',4',1'',4'',1'''-quaterphenyl, likewise tertiary amines containing carbazole units, such as, for example, TCTA (= 4-(9H-carbazol-9-yl)-N,N-bis[4-(9H-carbazol-9-yl)phenyl]benzenamine). Preference is likewise given to hexa-
 10 azatriphenylene compounds in accordance with US 2007/0092755 A1 and phthalocyanine derivatives (for example H₂Pc, CuPc (= copper phthalocyanine), CoPc, NiPc, ZnPc, PdPc, FePc, MnPc, ClAlPc, ClGaPc, ClInPc, ClSnPc, Cl₂SiPc, (HO)AlPc, (HO)GaPc, VOPc, TiOPc, MoOPc, GaPc-O-GaPc).
 15 GaPc).


Particular preference is given to the following triarylamine compounds of the formulae (TA-1) to (TA-12), which are disclosed in EP 1162193 B1, EP 650 955 B1, *Synth.Metals* **1997**, 91(1-3), 209, DE 19646119 A1,
 20 WO 2006/122630 A1, EP 1 860 097 A1, EP 1834945 A1, JP 08053397 A, US 6251531 B1, US 2005/0221124, JP 08292586 A, US 7399537 B2, US 2006/0061265 A1, EP 1 661 888 and WO 2009/041635. The said compounds of the formulae (TA-1) to (TA-12) may also be substituted:

25


30

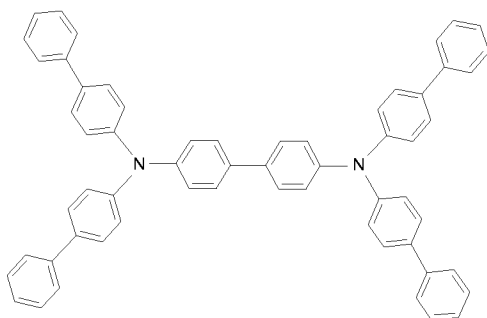

formula TA-1




formula TA-2

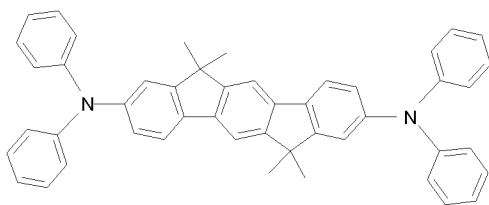


5

formula TA-3

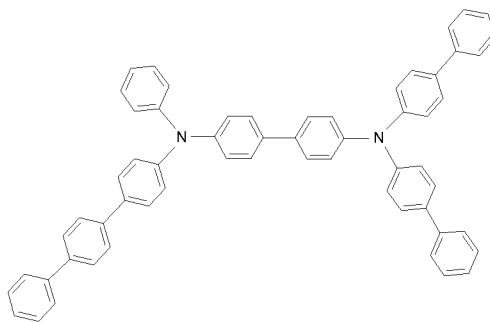


formula TA-4

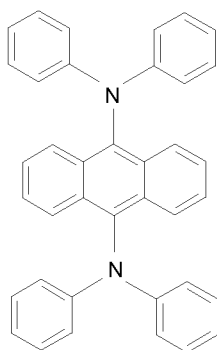


10

formula TA-5




formula TA-6

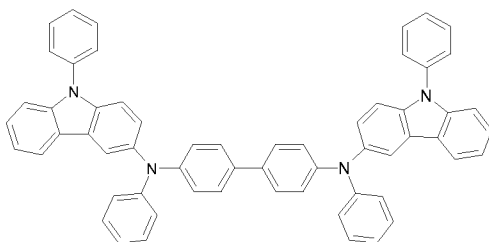


20

formula TA-7

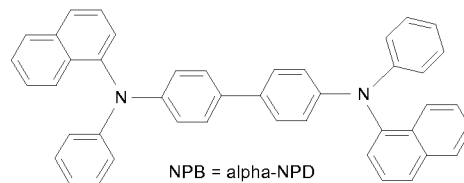


formula TA-8

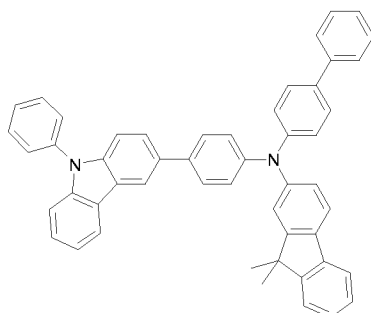


25

formula TA-9

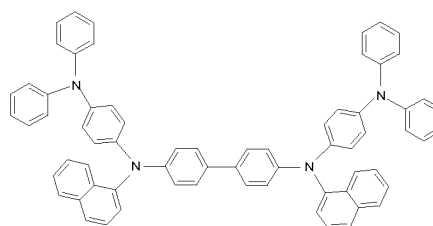


formula TA-10

30

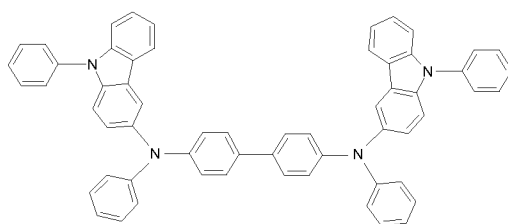

formula TA-11

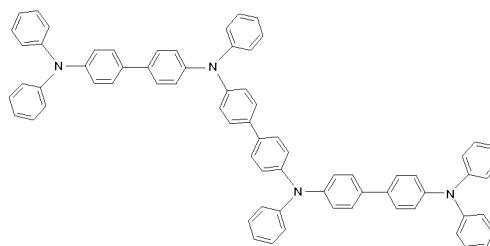

formula TA-12

Further compounds which can be employed as hole-injection materials are described in EP 0891121 A1 and EP 1029909 A1, injection layers in general in US 2004/0174116 A1.


These arylamines and heterocycles which are generally employed as hole-injection and/or hole-transport materials preferably result in an HOMO in the polymer of greater than -5.8 eV (vs. vacuum level), particularly preferably greater than -5.5 eV.

Compounds which have electron-injection and/or electron-transport properties are, for example, pyridines, pyrimidines, pyridazines, pyrazines, oxadiazoles, quinolines, quinoxalines, anthracenes, benzanthracenes, pyrenes, perylenes, benzimidazoles, triazines, ketones, phosphine oxides and phenazines and derivatives thereof, but also triarylboranes and further O-, S- or N-containing heterocycles having a low LUMO (LUMO = lowest unoccupied molecular orbital).

Particularly suitable compounds for electron-transporting and electron-injecting layers are metal chelates of 8-hydroxyquinoline (for example LiQ, AlQ₃, GaQ₃, MgQ₂, ZnQ₂, InQ₃, ZrQ₄), BAlQ, Ga oxinoid complexes, 4-azaphenanthren-5-ol-Be complexes (US 5529853 A, cf. formula ET-1), butadiene derivatives (US 4356429), heterocyclic optical brighteners (US 4539507), benzimidazole derivatives (US 2007/0273272 A1), such as, for example, TPBI (US 5766779, cf. formula ET-2), 1,3,5-triazines, for example spirobifluorenyltriazine derivatives (for example in accordance with DE


102008064200), pyrenes, anthracenes, tetracenes, fluorenes, spiro-
fluorenes, dendrimers, tetracenes (for example rubrene derivatives), 1,10-
phenanthroline derivatives (JP 2003-115387, JP 2004-311184, JP 2001-
267080, WO 02/043449), silacyclopentadiene derivatives (EP 1480280,
5 EP 1478032, EP 1469533), borane derivatives, such as, for example, tri-
arylborane derivatives containing Si (US 2007/0087219 A1, cf. formula ET-
3), pyridine derivatives (JP 2004-200162), phenanthrolines, especially 1,10-
phenanthroline derivatives, such as, for example, BCP and Bphen, also
several phenanthrolines connected via biphenyl or other aromatic groups
10 (US 2007-0252517 A1) or phenanthrolines connected to anthracene
(US 2007-0122656 A1, cf. formulae ET-4 and ET-5).

15

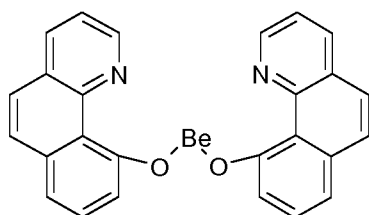

20


formula ET-1

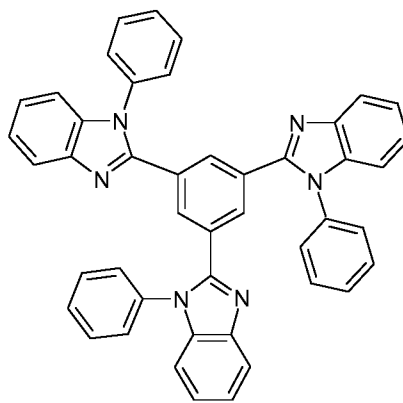


TPBI

2,2',2''-(1,3,5-benzenetriyl)tris(1-phenyl-1H-benzimidazole)
formula ET-2

25

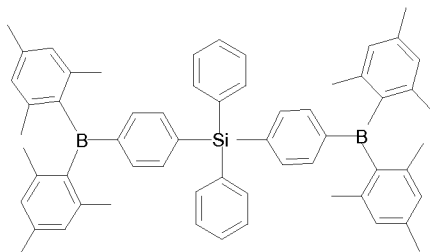


formula ET-3



formula ET-4

30



formula ET-5


5

Likewise suitable are heterocyclic organic compounds, such as, for example, thiopyran dioxides, oxazoles, triazoles, imidazoles or oxadiazoles.

Examples of the use of five-membered rings containing N, such as, for example, oxazoles, preferably 1,3,4-oxadiazoles, for example compounds of the formulae ET-6, ET-7, ET-8 and ET-9, which are disclosed, inter alia, in US 2007/0273272 A1; thiazoles, oxadiazoles, thiadiazoles, triazoles, inter alia, see US 2008/0102311 A1 and Y.A. Levin, M.S. Skorobogatova, Khimiya Geterotsiklicheskikh Soedinenii 1967 (2), 339-341, preferably compounds of the formula ET-10, silacyclopentadiene derivatives. Preferred compounds are the following of the formulae (ET-6) to (ET-10):


10

15

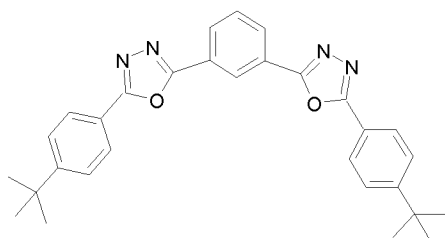


20

formula ET-6




25

formula ET-7




30

formula ET-8



formula ET-9

5



formula ET-10

10


It is also possible to employ organic compounds, such as fluorenones, fluorenylidene-methanes, perylene-tetracarboxylic acids, anthraquinone-dimethanes, diphenyl-quinones, anthrones and anthraquinone-diethylene-diamines and derivatives thereof.

15

Preference is given to 2,9,10-substituted anthracenes (with 1- or 2-naphthyl and 4- or 3-biphenyl) or molecules which contain two anthracene units (US 2008/0193796 A1, cf. formula ET-11). Also very advantageous is the connection of 9,10-substituted anthracene units to benzimidazole derivatives (US 2006/147747 A and EP 1551206 A1, cf. formulae ET-12 and ET-13).


20

25

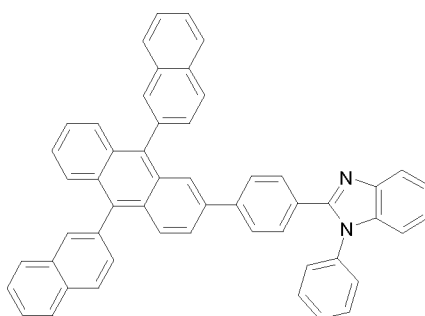

formula ET-11

30

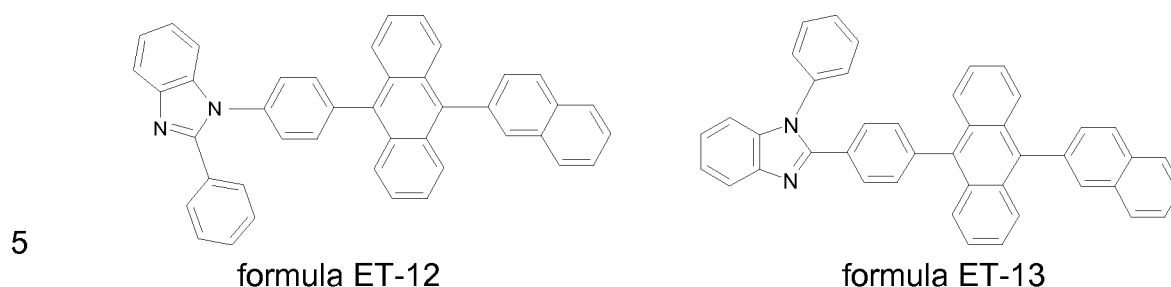

10 The compounds which are able to generate electron-injection and/or electron-transport properties preferably result in an LUMO of less than -2.5 eV (vs. vacuum level), particularly preferably less than -2.7 eV.

15 The present formulations may comprise emitters. The term emitter denotes a material which, after excitation, which can take place by transfer of any type of energy, allows a radiative transition into a ground state with emission of light. In general, two classes of emitter are known, namely fluorescent and phosphorescent emitters. The term fluorescent emitter denotes materials or compounds in which a radiative transition from an excited singlet state into the ground state takes place. The term phosphorescent emitter preferably denotes luminescent materials or compounds which

20 contain transition metals.

Emitters are frequently also called dopants if the dopants cause the properties described above in a system. A dopant in a system comprising a matrix material and a dopant is taken to mean the component whose proportion in the mixture is the smaller. Correspondingly, a matrix material in a

25 system comprising a matrix material and a dopant is taken to mean the component whose proportion in the mixture is the greater. Accordingly, the term phosphorescent emitter can also be taken to mean, for example, phosphorescent dopant.

30

Compounds which are able to emit light include, inter alia, fluorescent emitters and phosphorescent emitters. These include, inter alia, compounds containing stilbene, stilbenamine, styrylamine, coumarine, rubrene, rhodamine, thiazole, thiadiazole, cyanine, thiophene, paraphenylene, perylene, phtalocyanine, porphyrin, ketone, quinoline, imine, anthracene and/or pyrene structures. Particular preference is given to compounds which are able to emit light from the triplet state with high efficiency, even at room temperature, i.e. exhibit electrophosphorescence instead of electrofluorescence, which frequently causes an increase in the energy efficiency. Suitable for this purpose are firstly compounds which contain heavy atoms having an atomic number of greater than 36. Preference is given to compounds which contain d- or f-transition metals which satisfy the above-mentioned condition. Particular preference is given here to corresponding compounds which contain elements from group 8 to 10 (Ru, Os, Rh, Ir, Pd, Pt). Suitable functional compounds here are, for example, various complexes, as described, for example, in WO 02/068435 A1, WO 02/081488 A1, EP 1239526 A2 and WO 2004/026886 A2.

Preferred compounds which can serve as fluorescent emitters are described by way of example below. Preferred fluorescent emitters are selected from the class of the monostyrylamines, the distyrylamines, the tristyrylamines, the tetrastyrylamines, the styrylphosphines, the styryl ethers and the arylamines.

A monostyrylamine is taken to mean a compound which contains one substituted or unsubstituted styryl group and at least one, preferably aromatic, amine. A distyrylamine is taken to mean a compound which contains two substituted or unsubstituted styryl groups and at least one, preferably aromatic, amine. A tristyrylamine is taken to mean a compound which contains three substituted or unsubstituted styryl groups and at least one, preferably aromatic, amine. A tetrastyrylamine is taken to mean a compound which contains four substituted or unsubstituted styryl groups and at least one,

preferably aromatic, amine. The styryl groups are particularly preferably stilbenes, which may also be further substituted. Corresponding phosphines and ethers are defined analogously to the amines. An arylamine or an aromatic amine in the sense of the present invention is taken to mean a compound which contains three substituted or unsubstituted aromatic or heteroaromatic ring systems bonded directly to the nitrogen. At least one of these aromatic or heteroaromatic ring systems is preferably a condensed ring system, preferably having at least 14 aromatic ring atoms. Preferred examples thereof are aromatic anthracenamines, aromatic anthracenediamines, aromatic pyrenamines, aromatic pyrenediamines, aromatic chrysenamines or aromatic chrysenediamines. An aromatic anthracenamine is taken to mean a compound in which one diarylamino group is bonded directly to an anthracene group, preferably in the 9-position. An aromatic anthracenediamine is taken to mean a compound in which two diarylamino groups are bonded directly to an anthracene group, preferably in the 2,6- or 9,10-position. Aromatic pyrenamines, pyrenediamines, chrysenamines and chrysenediamines are defined analogously thereto, where the diarylamino groups are preferably bonded to the pyrene in the 1-position or in the 1,6-position.


Further preferred fluorescent emitters are selected from indenofluorenamines or indenofluorenediamines, which are described, inter alia, in WO 2006/122630; benzoindenofluorenamines or benzoindenofluorenediamines, which are described, inter alia, in WO 2008/006449; and dibenzoindenofluorenamines or dibenzoindenofluorenediamines, which are described, inter alia, in WO 2007/140847.

Examples of compounds from the class of the styrylamines which can be employed as fluorescent emitters are substituted or unsubstituted tristilbenamines or the dopants described in WO 2006/000388, WO 2006/058737,

WO 2006/000389, WO 2007/065549 and WO 2007/115610. Distyrylbenzene and distyrylbiphenyl derivatives are described in US 5121029. Further styrylamines can be found in US 2007/0122656 A1.


- 5 Particularly preferred styrylamine compounds are the compounds of the formula EM-1 described in US 7250532 B2 and the compounds of the formula EM-2 described in DE 10 2005 058557 A1:

10

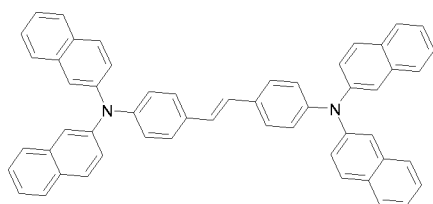

formula EM-1

15

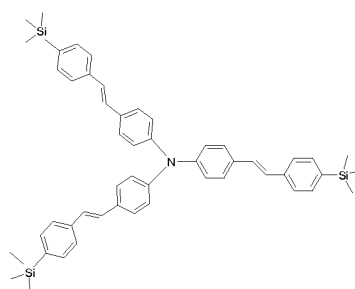


formula EM-2

Particularly preferred triarylamine compounds are compounds of the formulae EM-3 to EM-15 disclosed in CN 1583691 A, JP 08/053397 A and US 6251531 B1, EP 1957606 A1, US 2008/0113101 A1, US 2006/210830 A ,


20

WO 2008/006449 and DE 102008035413 and derivatives thereof:

25

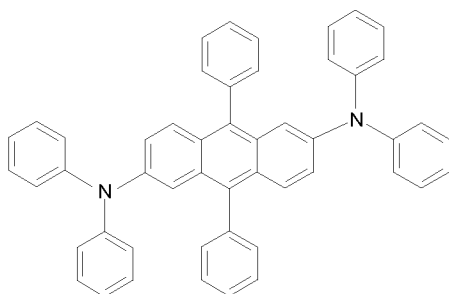


formula EM-3

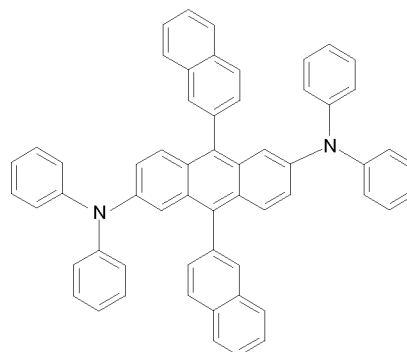


formula EM-4

30

5




formula EM-5

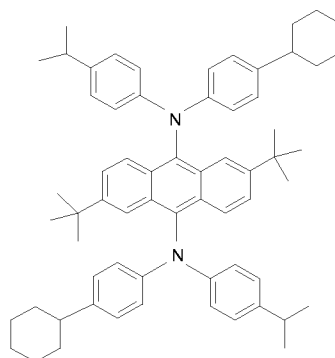


formula EM-6

10

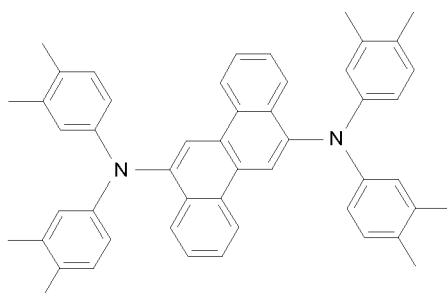


formula EM-7

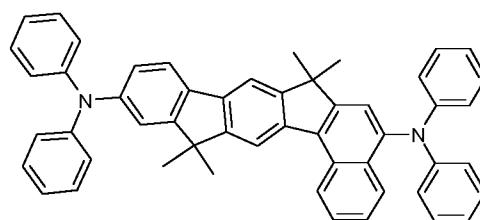


formula EM-8

15

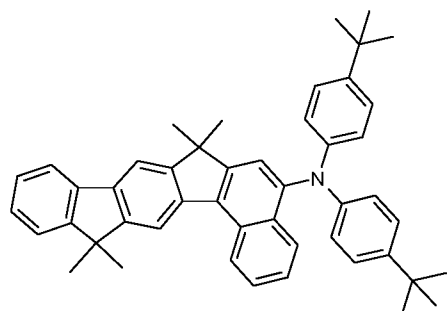


formula EM-9

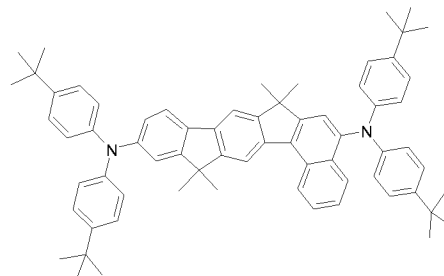


formula EM-10

20

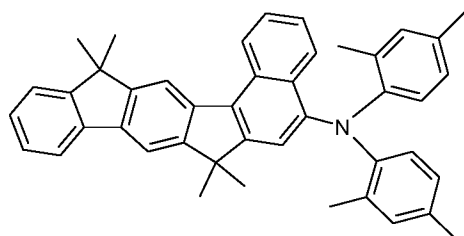

formula EM-11

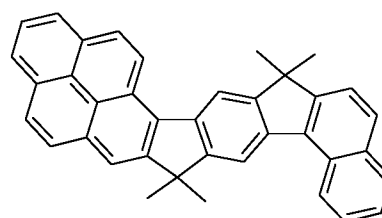


formula EM-12


25

30

5

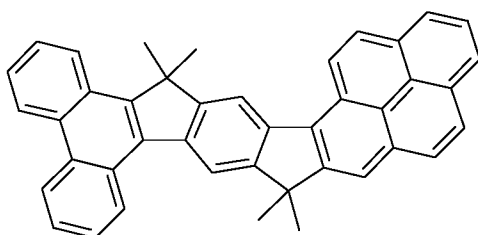


formula EM-13

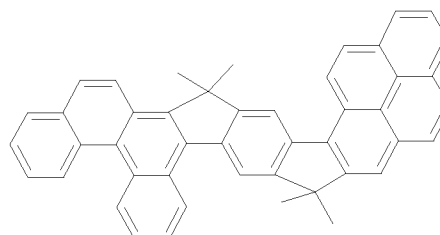

formula EM-14

10

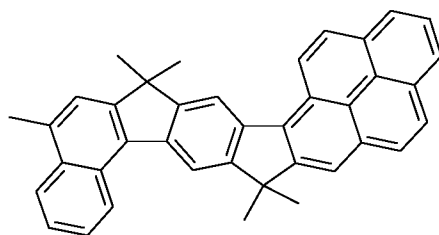

formula EM-15

15

20

Further preferred compounds which can be employed as fluorescent emitters are selected from derivatives of naphthalene, anthracene, tetracene, benzanthracene, benzophenanthrene (DE 10 2009 005746), fluorene, fluoranthene, periflanthene, indenoperylene, phenanthrene, perylene (US 2007/0252517 A1), pyrene, chrysene, decacycene, coronene, tetraphenylcyclopentadiene, pentaphenylcyclopentadiene, fluorene, spirofluorene, rubrene, coumarine (US 4769292, US 6020078, US 2007/0252517 A1), pyran, oxazole, benzoxazole, benzothiazole, benzimidazole, pyrazine, cinnamic acid esters, diketopyrrolopyrrole, acridone and quinacridone (US 2007/0252517 A1).

25

Of the anthracene compounds, particular preference is given to 9,10-substituted anthracenes, such as, for example, 9,10-diphenylanthracene and 9,10-bis(phenylethynyl)anthracene. 1,4-Bis(9'-ethynylantracenyl)-benzene is also a preferred dopant.

30

Preference is likewise given to derivatives of rubrene, coumarine, rhodamine, quinacridone, such as, for example, DMQA (= N,N'-dimethylquinacri-

done), dicyanomethylenepyran, such as, for example, DCM (= 4-(dicyanoethylene)-6-(4-dimethylaminostyryl-2-methyl)-4H-pyran), thiopyran, polymethine, pyrylium and thiapyrylium salts, periflanthene and indenoperylene.

- 5 Blue fluorescent emitters are preferably polyaromatic compounds, such as, for example, 9,10-di(2-naphthylanthracene) and other anthracene derivatives, derivatives of tetracene, xanthene, perylene, such as, for example, 2,5,8,11-tetra-*t*-butylperylene, phenylene, for example 4,4'-bis(9-ethyl-3-carbazovinylene)-1,1'-biphenyl, fluorene, fluoranthene, arylpyrenes
10 (US 2006/0222886 A1), arylenevinylenes (US 5121029, US 5130603), bis-(azinyl)imine-boron compounds (US 2007/0092753 A1), bis(azinyl)methene compounds and carbostyryl compounds.

- Further preferred blue fluorescent emitters are described in C.H. Chen et al.: "Recent developments in organic electroluminescent materials" Macro-
15 mol. Symp. 125, (1997) 1-48 and "Recent progress of molecular organic electroluminescent materials and devices" Mat. Sci. and Eng. R, 39 (2002), 143-222.

- 20 Further preferred blue-fluorescent emitters are the hydrocarbons disclosed in WO 2010/012328 A1, WO 2014/111269 A2 and PCT/EP2017/066712.

- Preferred compounds which can serve as phosphorescent emitters are described below by way of example.


- 25 Examples of phosphorescent emitters are revealed by WO 00/70655, WO 01/41512, WO 02/02714, WO 02/15645, EP 1191613, EP 1191612, EP 1191614 and WO 2005/033244. In general, all phosphorescent complexes as are used in accordance with the prior art for phosphorescent
30 OLEDs and as are known to the person skilled in the art in the area of organic electroluminescence are suitable, and the person skilled in the art

will be able to use further phosphorescent complexes without inventive step.

5 Phosphorescent metal complexes preferably contain Ir, Ru, Pd, Pt, Os or Re, more preferably Ir.

Preferred ligands are 2-phenylpyridine derivatives, 7,8-benzoquinoline derivatives, 2-(2-thienyl)pyridine derivatives, 2-(1-naphthyl)pyridine derivatives, 1-phenylisoquinoline derivatives, 3-phenylisoquinoline derivatives or
10 2-phenylquinoline derivatives. All these compounds may be substituted, for example by fluoro, cyano and/or trifluoromethyl substituents for blue. Auxiliary ligands are preferably acetylacetonate or picolinic acid.

15 In particular, complexes of Pt or Pd with tetradentate ligands of the formula EM-16 are suitable

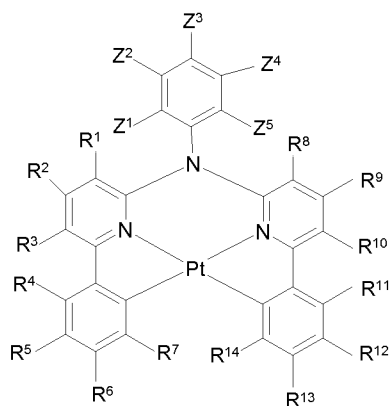

formula EM-16

25

The compounds of the formula EM-16 are described in greater detail in US 2007/0087219 A1, where, for an explanation of the substituents and indices in the above formula, reference is made to this specification for disclosure purposes. Furthermore, Pt-porphyrin complexes having an enlarged
30 ring system (US 2009/0061681 A1) and Ir complexes, for example 2,3,7,8,12,13,17,18-octaethyl-21H, 23H-porphyrin-Pt(II), tetraphenyl-Pt(II)


- tetrabenzoporphyrin (US 2009/0061681 A1), *cis*-bis(2-phenylpyridinato-N,C^{2'})Pt(II), *cis*-bis(2-(2'-thienyl)pyridinato-N,C^{3'})Pt(II), *cis*-bis(2-(2'-thienyl)-quinolinato-N,C^{5'})Pt(II), (2-(4,6-difluorophenyl)pyridinato-N,C^{2'})Pt(II) (acetylacetonate), or tris(2-phenylpyridinato-N,C^{2'})Ir(III) (= Ir(ppy)₃, green), bis(2-phenylpyridinato-N,C^{2'})Ir(III) (acetylacetonate) (= Ir(ppy)₂ acetylacetonate, green, US 2001/0053462 A1, Baldo, Thompson et al. *Nature* 403, (2000), 750-753), bis(1-phenylisoquinolinato-N,C^{2'})(2-phenylpyridinato-N,C^{2'})-iridium(III), bis(2-phenylpyridinato-N,C^{2'})(1-phenylisoquinolinato-N,C^{2'})-iridium(III), bis(2-(2'-benzothienyl)pyridinato-N,C^{3'})iridium(III) (acetylacetonate), bis(2-(4',6'-difluorophenyl)pyridinato-N,C^{2'})iridium(III) (piccolinate) (Flrpic, blue), bis(2-(4',6'-difluorophenyl)pyridinato-N,C^{2'})Ir(III) (tetrakis(1-pyrazolyl)borate), tris(2-(biphenyl-3-yl)-4-tert-butylpyridine)-iridium(III), (ppz)₂Ir(5phdpym) (US 2009/0061681 A1), (45ooppz)₂-Ir(5phdpym) (US 2009/0061681 A1), derivatives of 2-phenylpyridine-Ir complexes, such as, for example, PQIr (= iridium(III) bis(2-phenylquinolyl-N,C^{2'})acetylacetonate), tris(2-phenylisoquinolinato-N,C)Ir(III) (red), bis(2-(2'-benzo[4,5-a]thienyl)pyridinato-N,C^{3'})Ir (acetylacetonate) ([Btp₂Ir(acac)], red, Adachi et al. *Appl. Phys. Lett.* 78 (2001), 1622-1624).
- Likewise suitable are complexes of trivalent lanthanides, such as, for example, Tb³⁺ and Eu³⁺ (J. Kido et al. *Appl. Phys. Lett.* 65 (1994), 2124, Kido et al. *Chem. Lett.* 657, 1990, US 2007/0252517 A1), or phosphorescent complexes of Pt(II), Ir(I), Rh(I) with maleonitrile dithiolate (Johnson et al., *JACS* 105, 1983, 1795), Re(I) tricarbonyl-diimine complexes (Wrighton, *JACS* 96, 1974, 998, inter alia), Os(II) complexes with cyano ligands and bipyridyl or phenanthroline ligands (Ma et al., *Synth. Metals* 94, 1998, 245).

Further phosphorescent emitters having tridentate ligands are described in US 6824895 and US 10/729238. Red-emitting phosphorescent complexes are found in US 6835469 and US 6830828.

Particularly preferred compounds which are used as phosphorescent dopants are, inter alia, the compounds of the formula EM-17 described, inter alia, in US 2001/0053462 A1 and *Inorg. Chem.* 2001, 40(7), 1704-1711, JACS 2001, 123(18), 4304-4312, and derivatives thereof.

5

10

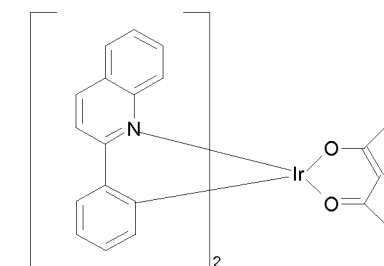


formula EM-17

Derivatives are described in US 7378162 B2, US 6835469 B2 and JP 2003/253145 A.

15


Furthermore, the compounds of the formulae EM-18 to EM-21 described in US 7238437 B2, US 2009/008607 A1 and EP 1348711, and derivatives thereof, can be employed as emitters.

20



formula EM-18


25




formula EM-19

30

5

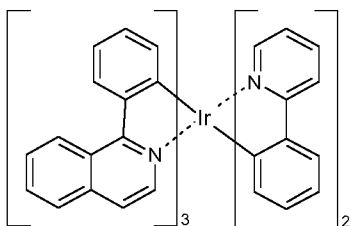

formula EM-20



formula EM-21

10

Quantum dots can likewise be employed as emitters, these materials being disclosed in detail in WO 2011/076314 A1.

15

Compounds which are employed as host materials, in particular together with emitting compounds, include materials from various classes of substances.

20

Host materials generally have larger band gaps between HOMO and LUMO than the emitter materials employed. In addition, preferred host materials exhibit properties of either a hole- or electron-transport material. Furthermore, host materials can have both electron- and hole-transport properties.

25

Host materials are in some cases also called matrix material, in particular if the host material is employed in combination with a phosphorescent emitter in an OLED.

30

Preferred host materials or co-host materials, which are employed, in particular, together with fluorescent dopants, are selected from the classes of the oligoarylenes (for example 2,2',7,7'-tetraphenylspirobifluorene in accordance with EP 676461 or dinaphthylanthracene), in particular the oligoarylenes containing condensed aromatic groups, such as, for example, anthracene, benzanthracene, benzophenanthrene (DE 10 2009 005746, WO 2009/069566), phenanthrene, tetracene, coronene, chrysene, fluorene, spirofluorene, perylene, phthaloperylene, naphthaloperylene, decacyclene,

rubrene, the oligoarylenevinylens (for example DPVBi = 4,4'-bis(2,2-diphenylethenyl)-1,1'-biphenyl or spiro-DPVBi in accordance with EP 676461), the polypodal metal complexes (for example in accordance with WO 04/081017), in particular metal complexes of 8-hydroxyquinoline, for example AlQ₃ (= aluminium(III) tris(8-hydroxyquinoline)) or bis(2-methyl-8-quinolinolato)-4-(phenylphenolinolato)aluminium, also with imidazole chelate (US 2007/0092753 A1) and the quinoline-metal complexes, amino-quinoline-metal complexes, benzoquinoline-metal complexes, the hole-conducting compounds (for example in accordance with WO 2004/058911), the electron-conducting compounds, in particular ketones, phosphine oxides, sulfoxides, etc. (for example in accordance with WO 2005/084081 and WO 2005/084082), the atropisomers (for example in accordance with WO 2006/048268), the boronic acid derivatives (for example in accordance with WO 2006/117052) or the benzantracenes (for example in accordance with WO 2008/145239).

Particularly preferred compounds which can serve as host materials or co-host materials are selected from the classes of the oligoarylenes, comprising anthracene, benzantracene and/or pyrene, or atropisomers of these compounds. An oligoarylene in the sense of the present invention is intended to be taken to mean a compound in which at least three aryl or arylene groups are bonded to one another.

Preferred host materials are selected, in particular, from compounds of the formula (H-1)



where Ar⁴, Ar⁵, Ar⁶ are on each occurrence, identically or differently, an aryl or heteroaryl group having 5 to 30 aromatic ring atoms, which may optionally be substituted, and p represents an integer in the range from 1 to 5; the

sum of the π electrons in Ar^4 , Ar^5 and Ar^6 is at least 30 if $p = 1$ and at least 36 if $p = 2$ and at least 42 if $p = 3$.


5 In the compounds of the formula (H-1), the group Ar^5 particularly preferably stands for anthracene, and the groups Ar^4 and Ar^6 are bonded in the 9- and 10-position, where these groups may optionally be substituted. Very particularly preferably, at least one of the groups Ar^4 and/or Ar^6 is a condensed aryl group selected from 1- or 2-naphthyl, 2-, 3- or 9-phenanthrenyl or 2-, 3-, 4-, 5-, 6- or 7-benzanthracenyl. Anthracene-based compounds are
10 described in US 2007/0092753 A1 and US 2007/0252517 A1, for example 2-(4-methylphenyl)-9,10-di-(2-naphthyl)anthracene, 9-(2-naphthyl)-10-(1,1'-biphenyl)anthracene and 9,10-bis[4-(2,2-diphenylethenyl)phenyl]anthracene, 9,10-diphenylanthracene, 9,10-bis(phenylethynyl)anthracene and 1,4-bis(9'-ethynylanthracenyl)benzene. Preference is also given to com-
15 pounds containing two anthracene units (US 2008/0193796 A1), for example 10,10'-bis[1,1',4',1'']terphenyl-2-yl-9,9'-bisanthracenyl.

Further preferred compounds are derivatives of arylamine, styrylamine, fluorescein, diphenylbutadiene, tetraphenylbutadiene, cyclopentadiene,
20 tetraphenylcyclopentadiene, pentaphenylcyclopentadiene, coumarine, oxadiazole, bisbenzoxazoline, oxazole, pyridine, pyrazine, imine, benzothiazole, benzoxazole, benzimidazole (US 2007/0092753 A1), for example 2,2',2''-(1,3,5-phenylene)tris[1-phenyl-1H-benzimidazole], aldazine, stilbene, styrylarylene derivatives, for example 9,10-bis[4-(2,2-diphenyl-
25 ethenyl)phenyl]anthracene, and distyrylarylene derivatives (US 5121029), diphenylethylene, vinylanthracene, diaminocarbazole, pyran, thiopyran, diketopyrrolopyrrole, polymethine, cinnamic acid esters and fluorescent dyes.

30 Particular preference is given to derivatives of arylamine and styrylamine, for example TNB (= 4,4'-bis[N-(1-naphthyl)-N-(2-naphthyl)amino]biphenyl). Metal-oxinoid complexes, such as LiQ or AlQ₃, can be used as co-hosts.


Preferred compounds with oligoarylene as matrix are disclosed in US 2003/
0027016 A1, US 7326371 B2, US 2006/043858 A, WO 2007/114358,
WO 2008/145239, JP 3148176 B2, EP 1009044, US 2004/018383,
5 WO 2005/061656 A1, EP 0681019B1, WO 2004/013073A1, US 5077142,
WO 2007/065678 and DE 102009005746, where particularly preferred
compounds are described by the formulae H-2 to H-8.

10

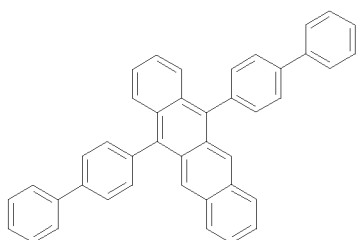


15

formula H-2

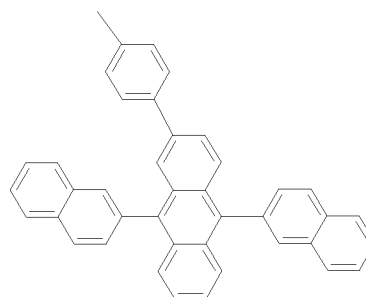


formula H-3

20

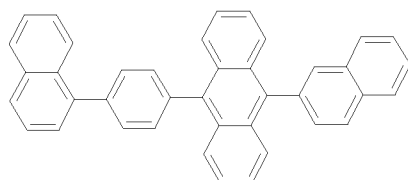


formula H-4

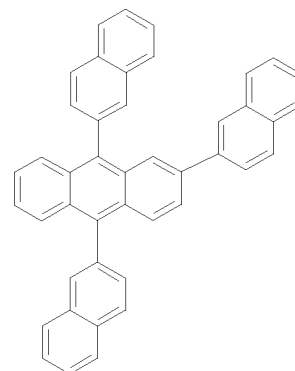


formula H-5

25

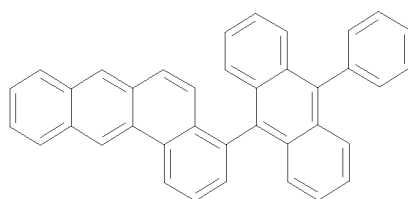


30

formula H-6

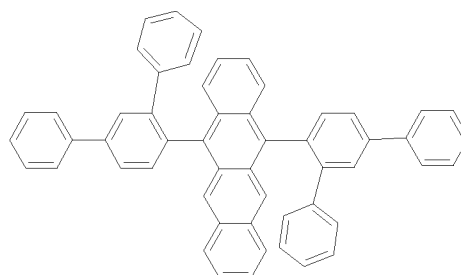

formula H-7

5

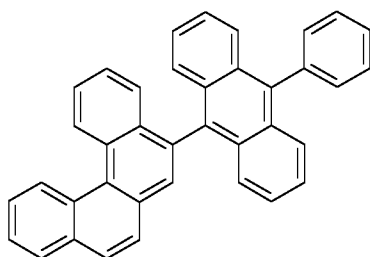

formula H-8

10

Furthermore, compounds which can be employed as host or matrix include materials which are employed together with phosphorescent emitters.

15

20



25

30


These compounds, which can also be employed as structural elements in polymers, include CBP (N,N-biscarbazolylbiphenyl), carbazole derivatives (for example in accordance with WO 2005/039246, US 2005/0069729, JP 2004/288381, EP 1205527 or WO 2008/086851), azacarbazoles (for example in accordance with EP 1617710, EP 1617711, EP 1731584 or JP 2005/347160), ketones (for example in accordance with WO 2004/093207 or in accordance with DE 102008033943), phosphine oxides, sulfoxides and sulfones (for example in accordance with WO 2005/003253), oligophenylenes, aromatic amines (for example in accordance with US 2005/0069729), bipolar matrix materials (for example in accordance with WO 2007/137725), silanes (for example in accordance with WO 2005/111172), 9,9-diarylfluorene derivatives (for example in accordance with DE 102008017591), azaboroles or boronic esters (for example in accordance with WO 2006/117052), triazine derivatives (for example in accordance with DE 102008036982), indolocarbazole derivatives (for example in accordance with WO 2007/063754 or WO 2008/056746), indenocarbazole derivatives (for example in accordance with DE 102009023155 and DE 102009031021), diazaphosphole derivatives (for example in accordance with DE 102009022858), triazole derivatives, oxazoles and oxazole derivatives, imidazole derivatives, polyarylalkane derivatives, pyrazoline derivatives, pyrazolone derivatives, distyrylpyrazine derivatives, thiopyran

dioxide derivatives, phenylenediamine derivatives, tertiary aromatic amines, styrylamines, amino-substituted chalcone derivatives, indoles, hydrazone derivatives, stilbene derivatives, silazane derivatives, aromatic dimethyldiene compounds, carbodiimide derivatives, metal complexes of 8-hydroxy-quinoline derivatives, such as, for example, AlQ₃, which may also contain triarylaminophenol ligands (US 2007/0134514 A1), metal complex/poly-silane compounds, and thiophene, benzothiophene and dibenzothiophene derivatives.

Examples of preferred carbazole derivatives are mCP (= 1,3-N,N-di-carbazolylbenzene (= 9,9'-(1,3-phenylene)bis-9H-carbazole)) (formula H-9), CDBP (= 9,9'-(2,2'-dimethyl[1,1'-biphenyl]-4,4'-diyl)bis-9H-carbazole), 1,3-bis(N,N'-dicarbazolyl)benzene (= 1,3-bis(carbazol-9-yl)benzene), PVK (polyvinylcarbazole), 3,5-di(9H-carbazol-9-yl)biphenyl and CMTTP (formula H-10). Particularly referred compounds are disclosed in US 2007/0128467 A1 and US 2005/0249976 A1 (formulae H-11 and H-13).

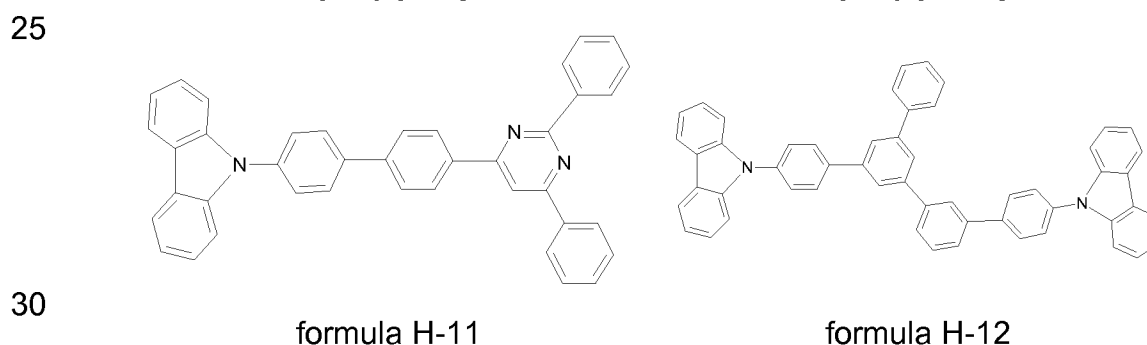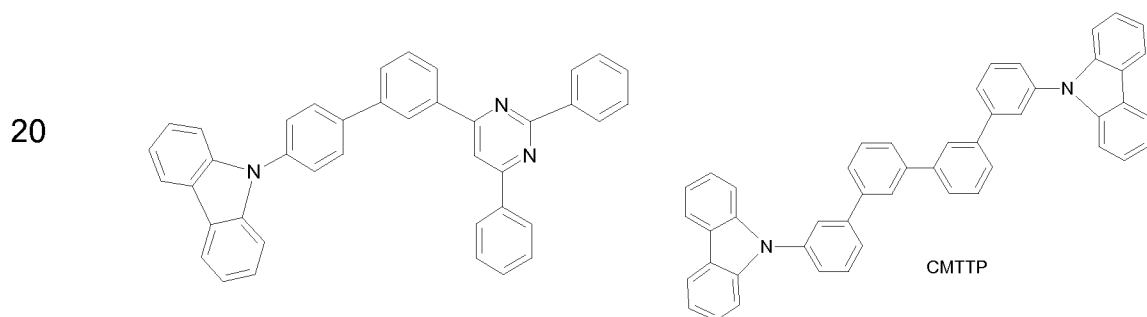

5

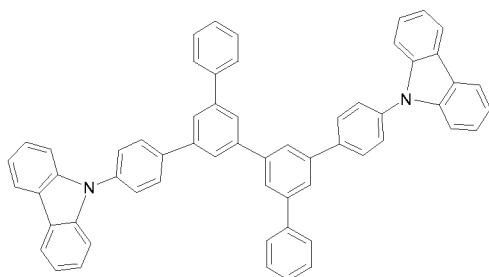


formula H-13

10

Preferred tetraaryl-Si compounds are disclosed, for example, in US 2004/0209115, US 2004/0209116, US 2007/0087219 A1 and in H. Gilman, E.A. Zuech, Chemistry & Industry (London, United Kingdom), 1960, 120.

Particularly preferred tetraaryl-Si compounds are described by the formulae H-14 to H-21.


15



UGH1

formula H-14


20

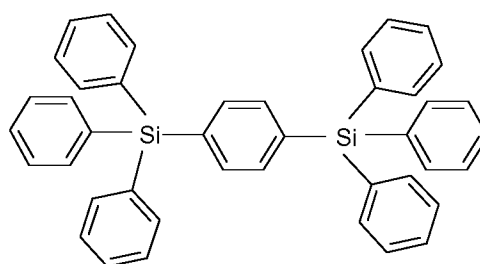

UGH2


formula H-15

25



UGH4

formula H-16

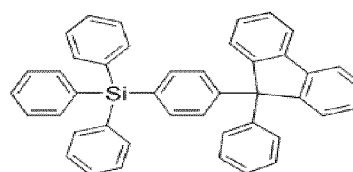


TPSi-F

formula H-17

30


5

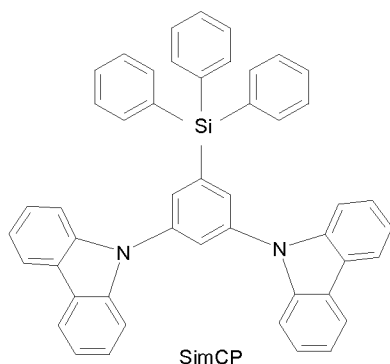

SimCP


formula H-18

10




formula H-20

15

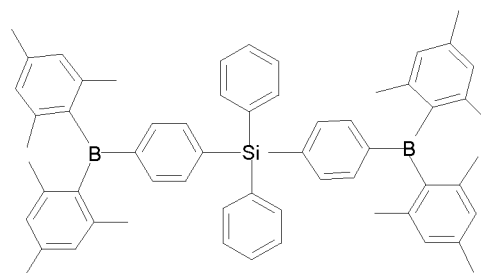

formula H-19

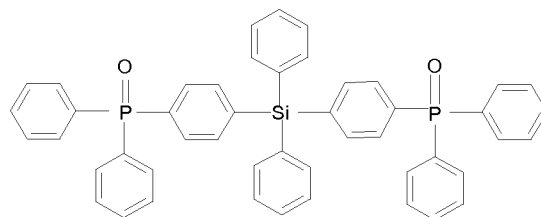


formula H-21

20


Particularly preferred compounds from group 4 for the preparation of the matrix for phosphorescent dopants are disclosed, inter alia, in DE 102009022858, DE 102009023155, EP 652273 B1, WO 2007/063754 and WO 2008/056746, where particularly preferred compounds are described by the formulae H-22 to H-25.

25

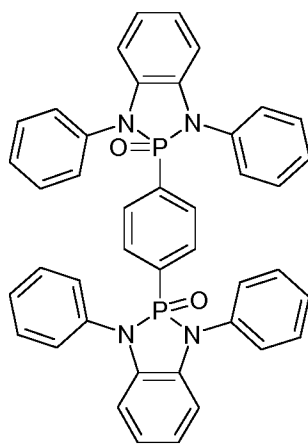


formula H-22

30

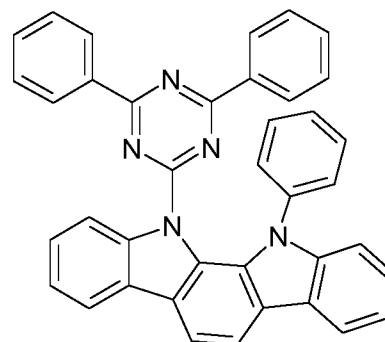


formula H-23

5



formula H-24

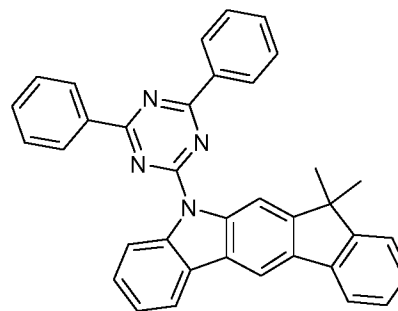

formula H-25

10

15

With respect to the functional compounds which can be employed in accordance with the invention and which can serve as host material, especial preference is given to substances which contain at least one nitrogen atom. These preferably include aromatic amines, triazine derivatives and carbazole derivatives. Thus, carbazole derivatives in particular exhibit surprisingly high efficiency. Triazine derivatives result in unexpectedly long lifetimes of the electronic devices.

20

It may also be preferred to employ a plurality of different matrix materials as a mixture, in particular at least one electron-conducting matrix material and at least one hole-conducting matrix material. Preference is likewise given to the use of a mixture of a charge-transporting matrix material and an electrically inert matrix material which is not involved in the charge transport to a significant extent, if at all, as described, for example, in WO 2010/108579.

25

30

It is furthermore possible to employ compounds which improve the transition from the singlet state to the triplet state and which, employed in support of the functional compounds having emitter properties, improve the phosphorescence properties of these compounds. Suitable for this purpose are, in particular, carbazole and bridged carbazole dimer units, as described, for example, in WO 2004/070772 A2 and WO 2004/113468 A1. Also suitable for this purpose are ketones, phosphine oxides, sulfoxides,

sulfones, silane derivatives and similar compounds, as described, for example, in WO 2005/040302 A1.

n-Dopants herein are taken to mean reducing agents, i.e. electron donors.

5 Preferred examples of n-dopants are W(hpp)₄ and other electron-rich metal complexes in accordance with WO 2005/086251 A2, P=N compounds (for example WO 2012/175535 A1, WO 2012/175219 A1), naphthylencarbo-
diimides (for example WO 2012/168358 A1), fluorenes (for example
WO 2012/031735 A1), free radicals and diradicals (for example
10 EP 1837926 A1, WO 2007/107306 A1), pyridines (for example EP 2452946
A1, EP 2463927 A1), N-heterocyclic compounds (for example WO
2009/000237 A1) and acridines as well as phenazines (for example US
2007/145355 A1).

15 Furthermore, the formulations may comprise a wide-band-gap material as functional material. Wide-band-gap material is taken to mean a material in the sense of the disclosure content of US 7,294,849. These systems exhibit particularly advantageous performance data in electroluminescent devices.

20 The compound employed as wide-band-gap material can preferably have a band gap of 2.5 eV or more, preferably 3.0 eV or more, particularly preferably 3.5 eV or more. The band gap can be calculated, inter alia, by means of the energy levels of the highest occupied molecular orbital (HOMO) and the lowest unoccupied molecular orbital (LUMO).

25 Furthermore, the formulations may comprise a hole-blocking material (HBM) as functional material. A hole-blocking material denotes a material which prevents or minimises the transmission of holes (positive charges) in a multilayer system, in particular if this material is arranged in the form of a
30 layer adjacent to an emission layer or a hole-conducting layer. In general, a hole-blocking material has a lower HOMO level than the hole-transport

material in the adjacent layer. Hole-blocking layers are frequently arranged between the light-emitting layer and the electron-transport layer in OLEDs.

5 It is basically possible to employ any known hole-blocking material. In addition to other hole-blocking materials described elsewhere in the present application, advantageous hole-blocking materials are metal complexes (US 2003/0068528), such as, for example, bis(2-methyl-8-quinolinolato)(4-phenylphenolato)aluminium(III) (BAIQ). Fac-tris(1-phenylpyrazolato-N,C2)-
10 iridium(III) (Ir(ppz)₃) is likewise employed for this purpose (US 2003/0175553 A1). Phenanthroline derivatives, such as, for example, BCP, or phthalimides, such as, for example, TMPP, can likewise be employed.

Furthermore, advantageous hole-blocking materials are described in WO 00/70655 A2, WO 01/41512 and WO 01/93642 A1.

15 Furthermore, the formulations may comprise an electron-blocking material (EBM) as functional material. An electron-blocking material denotes a material which prevents or minimises the transmission of electrons in a multilayer system, in particular if this material is arranged in the form of a
20 layer adjacent to an emission layer or an electron-conducting layer. In general, an electron-blocking material has a higher LUMO level than the electron-transport material in the adjacent layer.

It is basically possible to employ any known electron-blocking material. In
25 addition to other electron-blocking materials described elsewhere in the present application, advantageous electron-blocking materials are transition-metal complexes, such as, for example, Ir(ppz)₃ (US 2003/0175553).

30 The electron-blocking material can preferably be selected from amines, tri-arylamines and derivatives thereof.

Furthermore, the functional compounds which can be employed as organic functional materials in the formulations preferably have, if they are low-molecular-weight compounds, a molecular weight of $\leq 3,000$ g/mol, more preferably $\leq 2,000$ g/mol and most preferably $\leq 1,000$ g/mol.

5

Of particular interest are furthermore functional compounds which are distinguished by a high glass-transition temperature. In this connection, particularly preferred functional compounds which can be employed as organic functional material in the formulations are those which have a glass-transition temperature of $\geq 70^{\circ}\text{C}$, preferably $\geq 100^{\circ}\text{C}$, more preferably $\geq 125^{\circ}\text{C}$ and most preferably $\geq 150^{\circ}\text{C}$, determined in accordance with DIN 51005.

10

The formulations may also comprise polymers as organic functional materials. The compounds described above as organic functional materials, which frequently have a relatively low molecular weight, can also be mixed with a polymer. It is likewise possible to incorporate these compounds covalently into a polymer. This is possible, in particular, with compounds which are substituted by reactive leaving groups, such as bromine, iodine, chlorine, boronic acid or boronic acid ester, or by reactive, polymerisable groups, such as olefins or oxetanes. These can be used as monomers for the production of corresponding oligomers, dendrimers or polymers. The oligomerisation or polymerisation here preferably takes place via the halogen functionality or the boronic acid functionality or via the polymerisable group. It is furthermore possible to crosslink the polymers via groups of this type. The compounds and polymers according to the invention can be employed as crosslinked or uncrosslinked layer.

15

20

25

30


Polymers which can be employed as organic functional materials frequently contain units or structural elements which have been described in the context of the compounds described above, inter alia those as disclosed and extensively listed in WO 02/077060 A1, in WO 2005/014689 A2 and in

WO 2011/076314 A1. These are incorporated into the present application by way of reference. The functional materials can originate, for example, from the following classes:

- 5 Group 1: structural elements which are able to generate hole-injection and/or hole-transport properties;
- Group 2: structural elements which are able to generate electron-injection and/or electron-transport properties;
- 10 Group 3: structural elements which combine the properties described in relation to groups 1 and 2;
- Group 4: structural elements which have light-emitting properties, in particular phosphorescent groups;
- 15 Group 5: structural elements which improve the transition from the so-called singlet state to the triplet state;
- 20 Group 6: structural elements which influence the morphology or also the emission colour of the resultant polymers;
- Group 7: structural elements which are typically used as backbone.
- 25 The structural elements here may also have various functions, so that a clear assignment need not be advantageous. For example, a structural element of group 1 may likewise serve as backbone.
- 30 The polymer having hole-transport or hole-injection properties employed as organic functional material, containing structural elements from group 1, may preferably contain units which correspond to the hole-transport or hole-injection materials described above.

Further preferred structural elements of group 1 are, for example, triaryl-
amines, benzidines, tetraaryl-*para*-phenylenediamines, carbazoles,
azulenes, thiophenes, pyrroles and furanes and derivatives thereof and
5 further O-, S- or N-containing heterocycles having a high HOMO. These
arylamines and heterocycles preferably have an HOMO of above -5.8 eV
(against vacuum level), particularly preferably above -5.5 eV.

Preference is given, inter alia, to polymers having hole-transport or hole-
10 injection properties, containing at least one of the following recurring units
of the formula HTP-1:

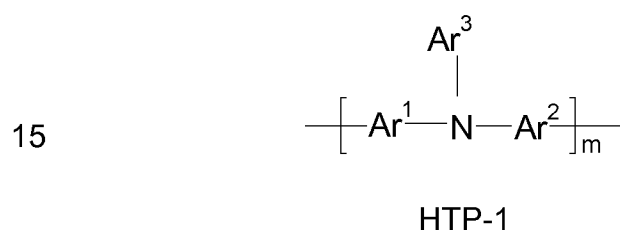


in which the symbols have the following meaning:


- 20 Ar^1 is, in each case identically or differently for different recurring units, a
single bond or a monocyclic or polycyclic aryl group, which may optio-
nally be substituted;
- 25 Ar^2 is, in each case identically or differently for different recurring units, a
monocyclic or polycyclic aryl group, which may optionally be substi-
tuted;
- 30 Ar^3 is, in each case identically or differently for different recurring units, a
monocyclic or polycyclic aryl group, which may optionally be substi-
tuted;

m is 1, 2 or 3.


Particular preference is given to recurring units of the formula HTP-1 which are selected from the group consisting of units of the formulae HTP-1A to HTP-1C:

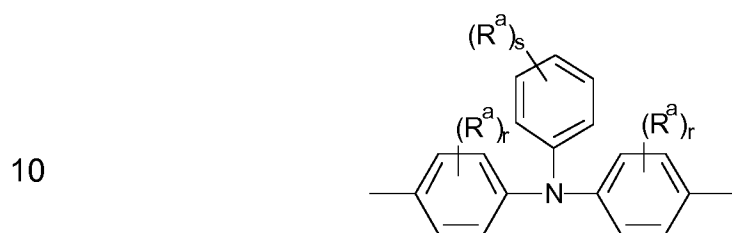

HTP-1A

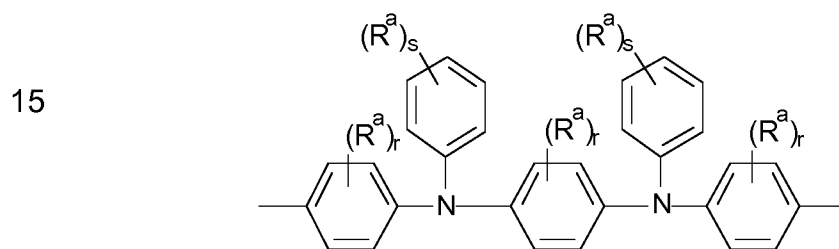

HTP-1B

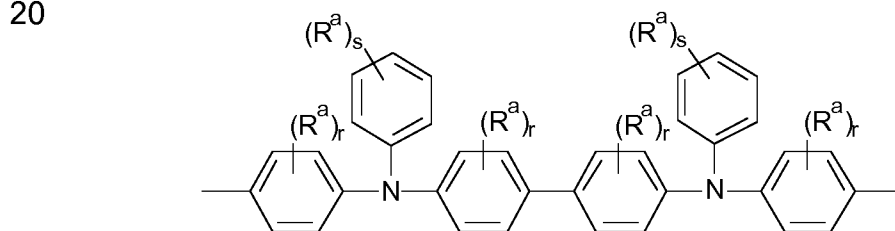

25 HTP-1C

in which the symbols have the following meaning:

30 R^a is on each occurrence, identically or differently, H, a substituted or unsubstituted aromatic or heteroaromatic group, an alkyl, cycloalkyl, alkoxy, aralkyl, aryloxy, arylthio, alkoxycarbonyl, silyl or carboxyl

group, a halogen atom, a cyano group, a nitro group or a hydroxyl group;


r is 0, 1, 2, 3 or 4, and

5

s is 0, 1, 2, 3, 4 or 5.

Preference is given, inter alia, to polymers having hole-transport or hole-injection properties, containing at least one of the following recurring units of the formula HTP-2:

10



in which the symbols have the following meaning:

15

T^1 and T^2 are selected independently from thiophene, selenophene, thieno[2,3-b]thiophene, thieno[3,2-b]thiophene, dithienothiophene, pyrrole and aniline, where these groups may be substituted by one or more radicals R^b ;

20

R^b is selected independently on each occurrence from halogen, -CN, -NC, -NCO, -NCS, -OCN, -SCN, -C(=O)NR⁰R⁰⁰, -C(=O)X, -C(=O)R⁰, -NH₂, -NR⁰R⁰⁰, -SH, -SR⁰, -SO₃H, -SO₂R⁰, -OH, -NO₂, -CF₃, -SF₅, an optionally substituted silyl, carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

25

R⁰ and R⁰⁰ are each independently H or an optionally substituted carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

30

Ar⁷ and Ar⁸ represent, independently of one another, a monocyclic or polycyclic aryl or heteroaryl group, which may optionally be substituted and may optionally be bonded to the 2,3-position of one or both adjacent thiophene or selenophene groups;

5

c and e are, independently of one another, 0, 1, 2, 3 or 4, where
 $1 < c + e \leq 6$;

10

d and f are, independently of one another, 0, 1, 2, 3 or 4.

Preferred examples of polymers having hole-transport or hole-injection properties are described, inter alia, in WO 2007/131582 A1 and WO 2008/009343 A1.

15

The polymer having electron-injection and/or electron-transport properties employed as organic functional material, containing structural elements from group 2, may preferably contain units which correspond to the electron-injection and/or electron-transport materials described above.

20

Further preferred structural elements of group 2 which have electron-injection and/or electron-transport properties are derived, for example, from pyridines, pyrimidines, pyridazines, pyrazines, oxadiazoles, quinolines, quinoxalines and phenazines and derivatives thereof, but also triarylboranes or further O-, S- or N-containing heterocycles having a low LUMO level. These structural elements of group 2 preferably have an LUMO of below -2.7 eV (against vacuum level), particularly preferably below -2.8 eV.

25

30

The organic functional material can preferably be a polymer which contains structural elements from group 3, where structural elements which improve the hole and electron mobility (i.e. structural elements from groups 1 and 2) are connected directly to one another. Some of these structural elements

can serve as emitters here, where the emission colours may be shifted, for example, into the green, red or yellow. Their use is therefore advantageous, for example, for the generation of other emission colours or a broad-band emission by polymers which originally emit in blue.

5

The polymer having light-emitting properties employed as organic functional material, containing structural elements from group 4, may preferably contain units which correspond to the emitter materials described above. Preference is given here to polymers containing phosphorescent groups, in particular the emitting metal complexes described above which contain corresponding units containing elements from groups 8 to 10 (Ru, Os, Rh, Ir, Pd, Pt).

10

The polymer employed as organic functional material containing units of group 5 which improve the transition from the so-called singlet state to the triplet state can preferably be employed in support of phosphorescent compounds, preferably the polymers containing structural elements of group 4 described above. A polymeric triplet matrix can be used here.

15

Suitable for this purpose are, in particular, carbazole and connected carbazole dimer units, as described, for example, in DE 10304819 A1 and DE 10328627 A1. Also suitable for this purpose are ketone, phosphine oxide, sulfoxide, sulfone and silane derivatives and similar compounds, as described, for example, in DE 10349033 A1. Furthermore, preferred structural units can be derived from compounds which have been described above in connection with the matrix materials employed together with phosphorescent compounds.

20

25

The further organic functional material is preferably a polymer containing units of group 6 which influence the morphology and/or the emission colour of the polymers. Besides the polymers mentioned above, these are those which have at least one further aromatic or another conjugated structure

30

which do not count amongst the above-mentioned groups. These groups accordingly have only little or no effect on the charge-carrier mobilities, the non-organometallic complexes or the singlet-triplet transition.

- 5 Structural units of this type are able to influence the morphology and/or the emission colour of the resultant polymers. Depending on the structural unit, these polymers can therefore also be used as emitters.

10 In the case of fluorescent OLEDs, preference is therefore given to aromatic structural elements having 6 to 40 C atoms or also tolan, stilbene or bis-styrylarylene derivative units, each of which may be substituted by one or more radicals. Particular preference is given here to the use of groups derived from 1,4-phenylene, 1,4-naphthylene, 1,4- or 9,10-anthrylene, 1,6-, 2,7- or 4,9-pyrenylene, 3,9- or 3,10-perylenylene, 4,4'-biphenylene, 4,4''-
15 terphenylylene, 4,4'-bi-1,1'-naphthylylene, 4,4'-tolanylene, 4,4'-stilbenylene or 4,4''-bisstyrylarylene derivatives.

20 The polymer employed as organic functional material preferably contains units of group 7, which preferably contain aromatic structures having 6 to 40 C atoms which are frequently used as backbone.


25 These include, inter alia, 4,5-dihdropyrene derivatives, 4,5,9,10-tetrahydropyrene derivatives, fluorene derivatives, which are disclosed, for example, in US 5962631, WO 2006/052457 A2 and WO 2006/118345 A1, 9,9-spirobifluorene derivatives, which are disclosed, for example, in WO 2003/020790 A1, 9,10-phenanthrene derivatives, which are disclosed, for example, in WO 2005/104264 A1, 9,10-dihydrophenanthrene derivatives, which are disclosed, for example, in WO 2005/014689 A2, 5,7-dihydrodibenzoxepine derivatives and cis- and trans-indenofluorene
30 derivatives, which are disclosed, for example, in WO 2004/041901 A1 and WO 2004/113412 A2, and binaphthylene derivatives, which are disclosed, for example, in WO 2006/063852 A1, and further units which are disclosed,

for example, in WO 2005/056633 A1, EP 1344788 A1, WO 2007/043495 A1, WO 2005/033174 A1, WO 2003/099901 A1 and DE 102006003710.

Particular preference is given to structural units of group 7 which are
 5 selected from fluorene derivatives, which are disclosed, for example, in
 US 5,962,631, WO 2006/052457 A2 and WO 2006/118345 A1, spiro-
 bifluorene derivatives, which are disclosed, for example, in WO 2003/
 020790 A1, benzofluorene, dibenzofluorene, benzothiophene and dibenzo-
 fluorene groups and derivatives thereof, which are disclosed, for example,
 10 in WO 2005/056633 A1, EP 1344788 A1 and WO 2007/043495 A1.

Especially preferred structural elements of group 7 are represented by the
 general formula PB-1:

15

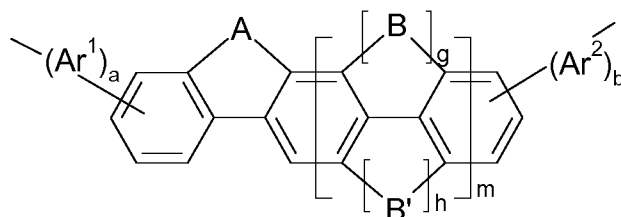

20

formula PB-1

in which the symbols and indices have the following meanings:

A, B and B' are each, also for different recurring units, identically or differ-
 25 ently, a divalent group, which is preferably selected from -CR^cR^d-, -NR^c-,
 -PR^c-, -O-, -S-, -SO-, -SO₂-, -CO-, -CS-, -CSe-, -P(=O)R^c-, -P(=S)R^c-
 and -SiR^cR^d-;

R^c and R^d are selected on each occurrence, independently, from H, halo-
 30 gen, -CN, -NC, -NCO, -NCS, -OCN, -SCN, -C(=O)NR⁰R⁰⁰, -C(=O)X,
 -C(=O)R⁰, -NH₂, -NR⁰R⁰⁰, -SH, -SR⁰, -SO₃H, -SO₂R⁰, -OH, -NO₂, -CF₃,

-SF₅, an optionally substituted silyl, carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms, where the groups R^c and R^d may optionally form a spiro group with a fluorene radical to which they are bonded;

5

X is halogen;

R⁰ and R⁰⁰ are each, independently, H or an optionally substituted carbyl or hydrocarbyl group having 1 to 40 carbon atoms, which may optionally be substituted and may optionally contain one or more heteroatoms;

10

g is in each case, independently, 0 or 1 and h is in each case, independently, 0 or 1, where the sum of g and h in a sub-unit is preferably 1;

15

m is an integer ≥ 1 ;

Ar¹ and Ar² represent, independently of one another, a monocyclic or polycyclic aryl or heteroaryl group, which may optionally be substituted and may optionally be bonded to the 7,8-position or the 8,9-position of an indeno-fluorene group; and

20

a and b are, independently of one another, 0 or 1.


If the groups R^c and R^d form a spiro group with the fluorene group to which these groups are bonded, this group preferably represents a spiro-bifluorene.

25

Particular preference is given to recurring units of the formula PB-1 which are selected from the group consisting of units of the formulae PB-1A to PB-1E:


30

5

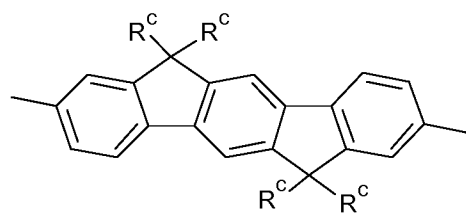


formula PB-1A

10

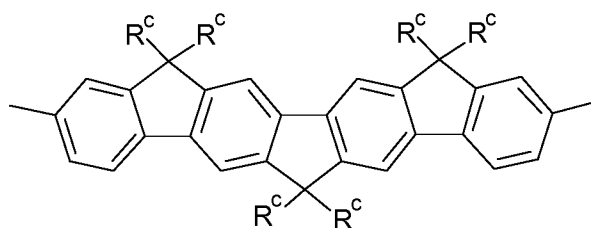


formula PB-1B

15

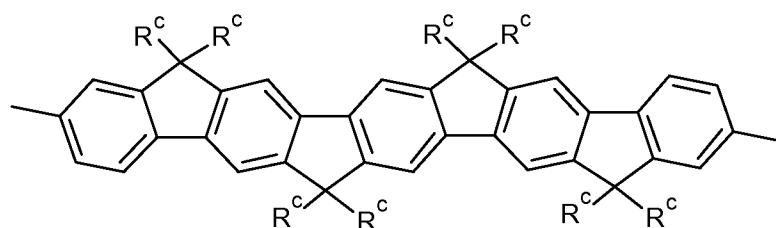

formula PB-1C


20

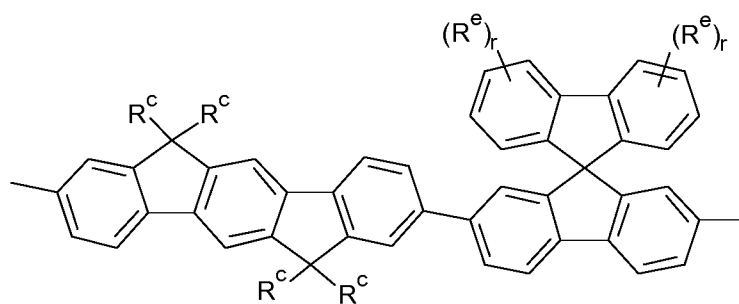

25

formula PB-1D

30

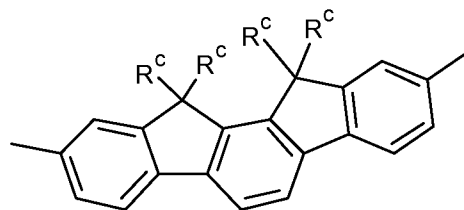


formula PB-1E


where R^c has the meaning described above for formula PB-1, r is 0, 1, 2, 3 or 4, and R^e has the same meaning as the radical R^c .

R^e is preferably -F, -Cl, -Br, -I, -CN, -NO₂, -NCO, -NCS, -OCN, -SCN,
 5 -C(=O)NR⁰R⁰⁰, -C(=O)X, -C(=O)R⁰, -NR⁰R⁰⁰, an optionally substituted silyl,
 aryl or heteroaryl group having 4 to 40, preferably 6 to 20, C atoms, or a
 straight-chain, branched or cyclic alkyl, alkoxy, alkylcarbonyl, alkoxy-
 carbonyl, alkylcarbonyloxy or alkoxy-carbonyloxy group having 1 to 20, pref-
 10 erably 1 to 12, C atoms, where one or more hydrogen atoms may optionally
 be substituted by F or Cl, and the groups R⁰, R⁰⁰ and X have the meaning
 described above for formula PB-1.

Particular preference is given to recurring units of the formula PB-1 which
 are selected from the group consisting of units of the formulae PB-1F to
 15 PB-1I:

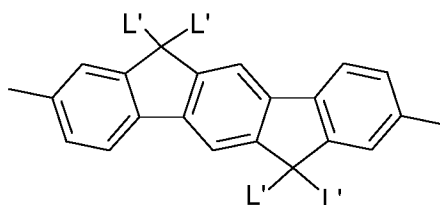


formula PB-1F

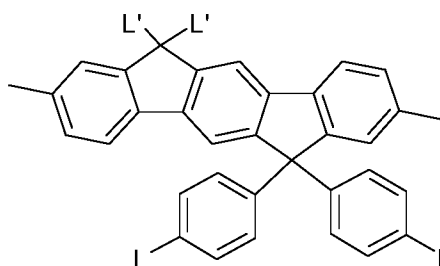

formula PB-1G


- 71 -

5

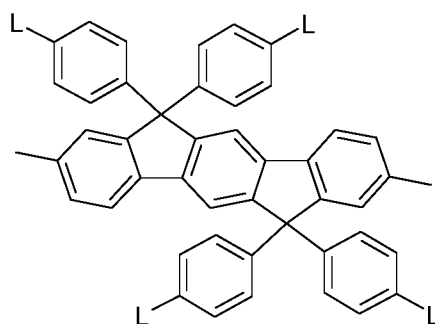

formula PB-1H

10

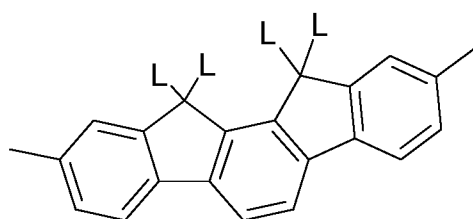

formula PB-1I

15

in which the symbols have the following meaning:

L is H, halogen or an optionally fluorinated, linear or branched alkyl or alkoxy group having 1 to 12 C atoms and preferably stands for H, F, methyl, i-propyl, t-butyl, n-pentoxy or trifluoromethyl; and

20

L' is an optionally fluorinated, linear or branched alkyl or alkoxy group having 1 to 12 C atoms and preferably stands for n-octyl or n-octyloxy.

25

For carrying out the present invention, preference is given to polymers which contain more than one of the structural elements of groups 1 to 7 described above. It may furthermore be provided that the polymers preferably contain more than one of the structural elements from one group described above, i.e. comprise mixtures of structural elements selected from one group.

30

Particular preference is given, in particular, to polymers which, besides at least one structural element which has light-emitting properties (group 4),

preferably at least one phosphorescent group, additionally contain at least one further structural element of groups 1 to 3, 5 or 6 described above, where these are preferably selected from groups 1 to 3.

- 5 The proportion of the various classes of groups, if present in the polymer, can be in broad ranges, where these are known to the person skilled in the art. Surprising advantages can be achieved if the proportion of one class present in a polymer, which is in each case selected from the structural elements of groups 1 to 7 described above, is preferably in each case
10 ≥ 5 mol%, particularly preferably in each case ≥ 10 mol%.

The preparation of white-emitting copolymers is described in detail, inter alia, in DE 10343606 A1.

- 15 In order to improve the solubility, the polymers may contain corresponding groups. It may preferably be provided that the polymers contain substituents, so that on average at least 2 non-aromatic carbon atoms, particularly preferably at least 4 and especially preferably at least 8 non-aromatic carbon atoms are present per recurring unit, where the average relates to the
20 number average. Individual carbon atoms here may be replaced, for example, by O or S. However, it is possible for a certain proportion, optionally all recurring units, to contain no substituents which contain non-aromatic carbon atoms. Short-chain substituents are preferred here, since long-chain substituents can have adverse effects on layers which can be obtained
25 using organic functional materials. The substituents preferably contain at most 12 carbon atoms, preferably at most 8 carbon atoms and particularly preferably at most 6 carbon atoms in a linear chain.

- 30 The polymer employed in accordance with the invention as organic functional material can be a random, alternating or regioregular copolymer, a block copolymer or a combination of these copolymer forms.

In a further embodiment, the polymer employed as organic functional material can be a non-conjugated polymer having side chains, where this embodiment is particularly important for phosphorescent OLEDs based on polymers. In general, phosphorescent polymers can be obtained by free-radical copolymerisation of vinyl compounds, where these vinyl compounds contain at least one unit having a phosphorescent emitter and/or at least one charge-transport unit, as is disclosed, inter alia, in US 7250226 B2. Further phosphorescent polymers are described, inter alia, in JP 2007/211243 A2, JP 2007/197574 A2, US 7250226 B2 and JP 2007/059939 A.

In a further preferred embodiment, the non-conjugated polymers contain backbone units, which are connected to one another by spacer units. Examples of such triplet emitters which are based on non-conjugated polymers based on backbone units are disclosed, for example, in DE 102009023154.

In a further preferred embodiment, the non-conjugated polymer can be designed as fluorescent emitter. Preferred fluorescent emitters which are based on non-conjugated polymers having side chains contain anthracene or benzanthracene groups or derivatives of these groups in the side chain, where these polymers are disclosed, for example, in JP 2005/108556, JP 2005/285661 and JP 2003/338375.

These polymers can frequently be employed as electron- or hole-transport materials, where these polymers are preferably designed as non-conjugated polymers.

Furthermore, the functional compounds employed as organic functional materials in the formulations preferably have, in the case of polymeric compounds, a molecular weight M_w of $\geq 10,000$ g/mol, particularly preferably $\geq 20,000$ g/mol and especially preferably $\geq 40,000$ g/mol.

The molecular weight M_w of the polymers here is preferably in the range from 10,000 to 2,000,000 g/mol, particularly preferably in the range from 20,000 to 1,000,000 g/mol and very particularly preferably in the range from 40,000 to 300,000 g/mol. The molecular weight M_w is determined by means of GPC (= gel permeation chromatography) against an internal polystyrene standard.

The publications cited above for description of the functional compounds are incorporated into the present application by way of reference for disclosure purposes.

The formulations according to the invention may comprise all organic functional materials which are necessary for the production of the respective functional layer of the electronic device. If, for example, a hole-transport, hole-injection, electron-transport or electron-injection layer is built up precisely from one functional compound, the formulation comprises precisely this compound as organic functional material. If an emission layer comprises, for example, an emitter in combination with a matrix or host material, the formulation comprises, as organic functional material, precisely the mixture of emitter and matrix or host material, as described in greater detail elsewhere in the present application.

Besides the said components, the formulation according to the invention may comprise further additives and processing assistants. These include, inter alia, surface-active substances (surfactants), lubricants and greases, additives which modify the viscosity, additives which increase the conductivity, dispersants, hydrophobicising agents, adhesion promoters, flow improvers, antifoams, deaerating agents, diluents, which may be reactive or unreactive, fillers, assistants, processing assistants, dyes, pigments, stabilisers, sensitisers, nanoparticles and inhibitors.

The present invention furthermore relates to a process for the preparation of a formulation according to the present invention, wherein the at least one organic functional material, which can be employed for the production of functional layers of electronic devices, and the at least four different organic solvents A, B, C and D are mixed.

A formulation in accordance with the present invention can be employed for the production of a layer or multilayered structure in which the organic functional materials are present in layers, as are required for the production of preferred electronic or opto-electronic components, such as OLEDs.

The formulation of the present invention can preferably be employed for the formation of functional layers on a substrate or one of the layers applied to the substrate. The substrates can either have bank structures or not.

The present invention likewise relates to a process for the production of an electronic device in which a formulation according to the present invention is applied to a substrate and dried.

The functional layers can be produced, for example, by flood coating, dip coating, spray coating, spin coating, screen printing, relief printing, gravure printing, rotary printing, roller coating, flexographic printing, offset printing or nozzle printing, preferably ink-jet printing on a substrate or one of the layers applied to the substrate.

After the application of a formulation according to the present invention to a substrate or a functional layer already applied, a drying step can be carried out in order to remove the solvents from the continuous phase described above. The drying can preferably be carried out at relatively low temperature and over a relatively long period in order to avoid bubble formation and to obtain a uniform coating. The drying can preferably be carried out at a temperature in the range from 80 to 300°C, more preferably

150 to 250°C and most preferably 160 to 200°C. The drying here can preferably be carried out at a pressure in the range from 10^{-6} mbar to 2 bar, more preferably in the range from 10^{-2} mbar to 1 bar and most preferably in the range from 10^{-1} mbar to 100 mbar. During the drying process, the
5 temperature of the substrates can be vary from -15°C to 250°C. The duration of the drying depends on the degree of drying to be achieved, where small amounts of water can optionally be removed at relatively high temperature and in combination with sintering, which is preferably to be carried out.

10

It may furthermore be provided that the process is repeated a number of times, with formation of different or identical functional layers. Crosslinking of the functional layer formed can take place here in order to prevent dissolution thereof, as is disclosed, for example, in EP 0 637 899 A1.

15

The present invention also relates to an electronic device obtainable by a process for the production of an electronic device.

20 The present invention furthermore relates to an electronic device having at least one functional layer comprising at least one organic functional material which is obtainable by the above-mentioned process for the production of an electronic device.

25 An electronic device is taken to mean a device which comprises anode, cathode and at least one functional layer in between, where this functional layer comprises at least one organic or organometallic compound.

30 The organic electronic device is preferably an organic electroluminescent device (OLED), a polymeric electroluminescent device (PLED), an organic integrated circuit (O-IC), an organic field-effect transistor (O-FET), an organic thin-film transistor (O-TFT), an organic, light-emitting transistor (O-LET), an organic solar cell (O-SC), an organic photovoltaic (OPV) cell,

an organic, optical detector, an organic photoreceptor, an organic field-quench device (O-FQD), an organic electrical sensor, a light-emitting electrochemical cell (LEC) or an organic laser diode (O-laser), more preferably an organic electroluminescent device (OLED) or a polymeric
5 electroluminescent device (PLED).

Active components are generally the organic or inorganic materials which are introduced between the anode and the cathode, where these active components effect, maintain and/or improve the properties of the electronic
10 device, for example its performance and/or its lifetime, for example charge-injection, charge-transport or charge-blocking materials, but in particular emission materials and matrix materials. The organic functional material which can be employed for the production of functional layers of electronic devices accordingly preferably comprises an active component of the elec-
15 tronic device.

Organic electroluminescent devices are a preferred embodiment of the present invention. The organic electroluminescent device comprises a cathode, an anode and at least one emitting layer.
20

It is furthermore preferred to employ a mixture of two or more triplet emitters together with a matrix. The triplet emitter having the shorter-wave emission spectrum serves as co-matrix here for the triplet emitter having the longer-wave emission spectrum.
25

The proportion of the matrix material in the emitting layer in this case is preferably between 50 and 99.9% by vol., more preferably between 80 and 99.5% by vol. and most preferably between 92 and 99.5% by vol. for fluorescent emitting layers and between 85 and 97% by vol. for
30 phosphorescent emitting layers.

Correspondingly, the proportion of the dopant is preferably between 0.1 and 50% by vol., more preferably between 0.5 and 20% by vol. and most preferably between 0.5 and 8% by vol. for fluorescent emitting layers and between 3 and 15% by vol. for phosphorescent emitting layers.

5

An emitting layer of an organic electroluminescent device may also encompass systems which comprise a plurality of matrix materials (mixed-matrix systems) and/or a plurality of dopants. In this case too, the dopants are generally the materials whose proportion in the system is the smaller and the matrix materials are the materials whose proportion in the system is the greater. In individual cases, however, the proportion of an individual matrix material in the system may be smaller than the proportion of an individual dopant.

10

The mixed-matrix systems preferably comprise two or three different matrix materials, more preferably two different matrix materials. One of the two materials here is preferably a material having hole-transporting properties and the other material is a material having electron-transporting properties. However, the desired electron-transporting and hole-transporting properties of the mixed-matrix components may also be combined principally or completely in a single mixed-matrix component, where the further mixed-matrix component(s) fulfil(s) other functions. The two different matrix materials may be present here in a ratio of 1:50 to 1:1, preferably 1:20 to 1:1, more preferably 1:10 to 1:1 and most preferably 1:4 to 1:1. Mixed-matrix systems are preferably employed in phosphorescent organic electroluminescent devices. Further details on mixed-matrix systems can be found, for example, in WO 2010/108579.

20

25


Apart from these layers, an organic electroluminescent device may also comprise further layers, for example in each case one or more hole-injection layers, hole-transport layers, hole-blocking layers, electron-transport layers, electron-injection layers, exciton-blocking layers, electron-

30


- blocking layers, charge-generation layers (IDMC 2003, Taiwan; Session 21 OLED (5), T. Matsumoto, T. Nakada, J. Endo, K. Mori, N. Kawamura, A. Yokoi, J. Kido, *Multiphoton Organic EL Device Having Charge Generation Layer*) and/or organic or inorganic p/n junctions. It is possible here for one
5 or more hole-transport layers to be p-doped, for example with metal oxides, such as MoO₃ or WO₃, or with (per)fluorinated electron-deficient aromatic compounds, and/or for one or more electron-transport layers to be n-doped. It is likewise possible for interlayers, which have, for example, an exciton-blocking function and/or control the charge balance in the electro-
10 luminescent device, to be introduced between two emitting layers. However, it should be pointed out that each of these layers does not necessarily have to be present. These layers may likewise be present on use of the formulations according to the invention, as defined above.
- 15 In a further embodiment of the present invention, the device comprises a plurality of layers. The formulation according to the present invention can preferably be employed here for the production of a hole-transport, hole-injection, electron-transport, electron-injection and/or emission layer.
- 20 The present invention accordingly also relates to an electronic device which comprises at least three layers, but in a preferred embodiment all said layers, from hole-injection, hole-transport, emission, electron-transport, electron-injection, charge-blocking and/or charge-generation layer and in which at least one layer has been obtained by means of a formulation to be
25 employed in accordance with the present invention. The thickness of the layers, for example the hole-transport and/or hole-injection layer, can preferably be in the range from 1 to 500 nm, more preferably in the range from 2 to 200 nm.
- 30 The device may furthermore comprise layers built up from further low-molecular-weight compounds or polymers which have not been applied by the use of formulations according to the present invention. These can also

be produced by evaporation of low-molecular-weight compounds in a high vacuum.


According to one preferred embodiment of the present invention, the device comprises an emitting layer which is applied by evaporation of low-molecular-weight compounds. According to such embodiment, any matrix materials and emitters which are known in the state of the art for use in vacuum-applied emitting layers may be used. As triplet matrix materials for such purpose, in particular, the following materials can be used:

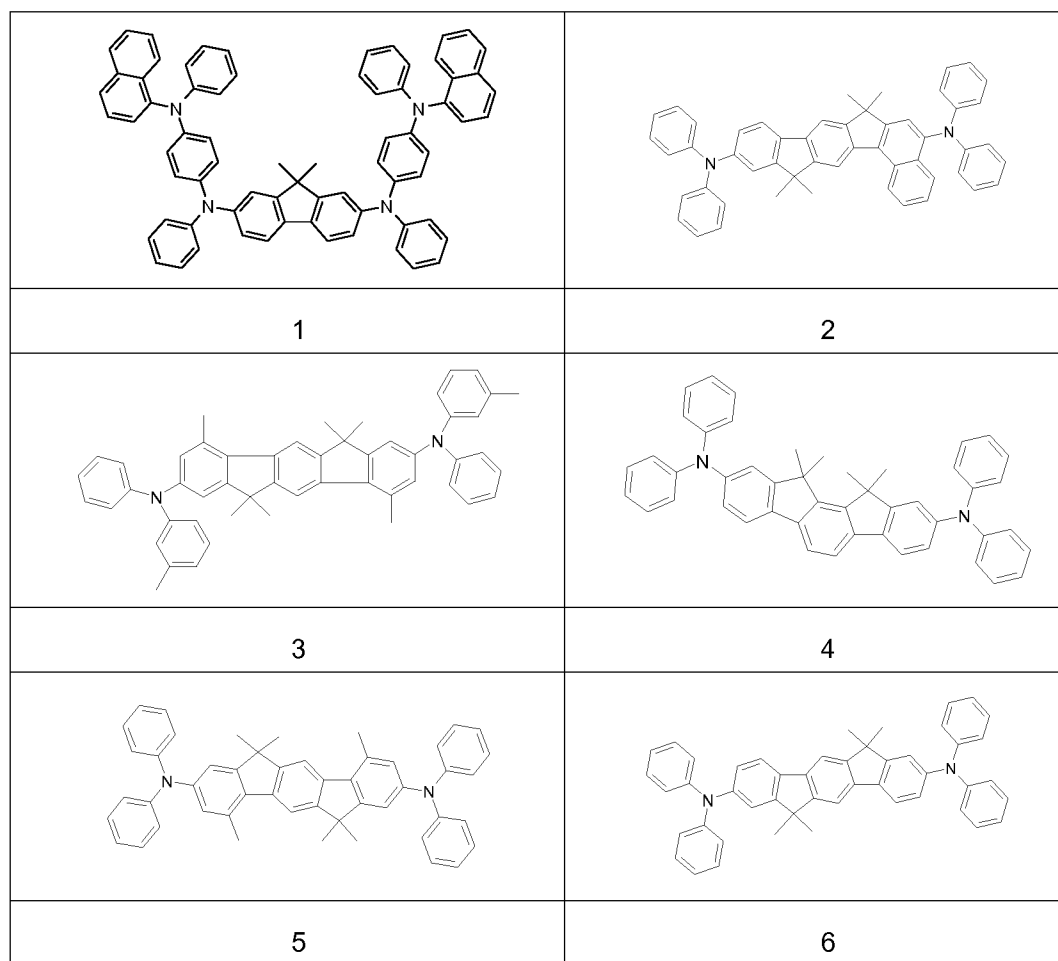

5

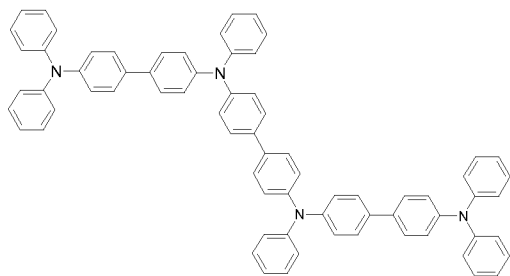


7

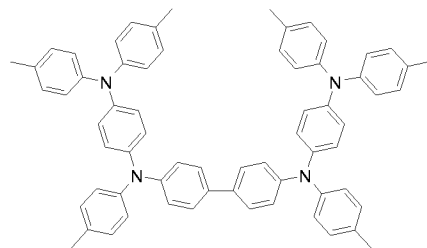


8

10




9

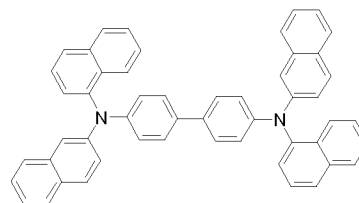


10

15




11

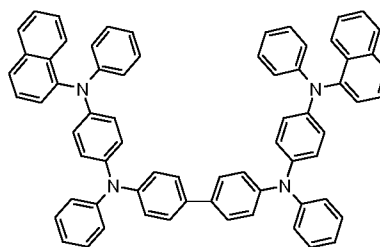


12

20

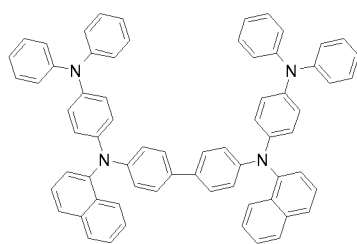


13

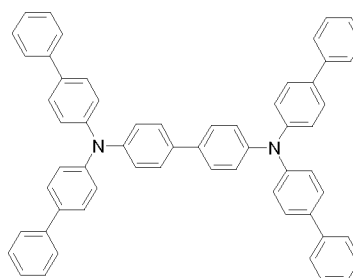


14

25






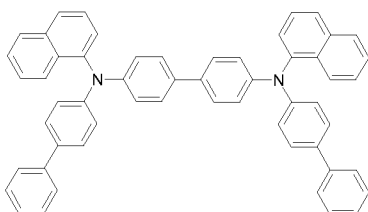


15

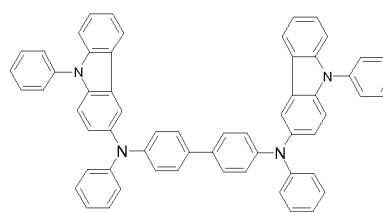

16

30

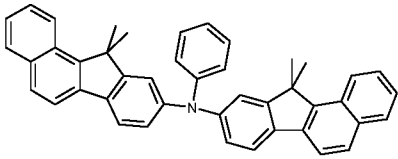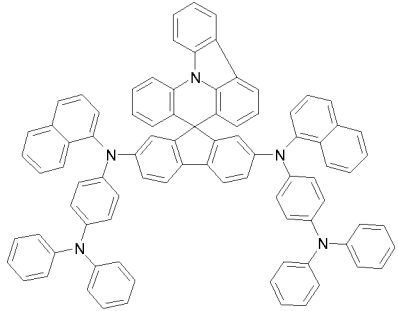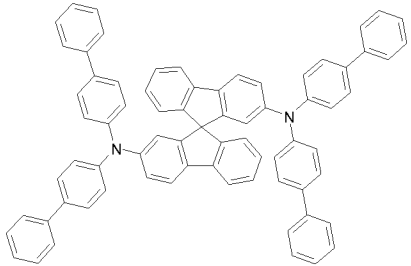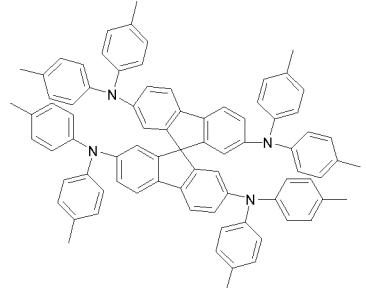5		
	17	18
10		
	19	20
15		
20	21	22

These materials can also be used as hole transport materials in hole transporting layers which are applied by vapor deposition. The synthesis of these compounds, if not disclosed specifically in the prior art, can be done by the skilled person according to methods generally known in the prior art. For example, the synthesis of compound (22) can be done as described in WO 2007/072952 for the synthesis of compound 3 of that application (see p. 32-33).

It may additionally be preferred to use the compounds to be employed not as the pure substance, but instead as a mixture (blend) together with further polymeric, oligomeric, dendritic or low-molecular-weight substances of any desired type. These may, for example, improve the electronic properties or themselves emit.

In a preferred embodiment of the present invention, the formulations according to the invention comprise organic functional materials which are employed as host materials or matrix materials in an emitting layer. The formulation here may comprise the emitters described above in addition to the host materials or matrix materials. The organic electroluminescent device here may comprise one or more emitting layers. If a plurality of emission layers are present, these preferably have a plurality of emission maxima between 380 nm and 750 nm, resulting overall in white emission, i.e. various emitting compounds which are able to fluoresce or phosphoresce are used in the emitting layers. Very particular preference is given to three-layer systems, where the three layers exhibit blue, green and orange or red emission (for the basic structure see, for example, WO 2005/011013). White-emitting devices are suitable, for example, as backlighting of LCD displays or for general lighting applications.

It is also possible for a plurality of OLEDs to be arranged one above the other, enabling a further increase in efficiency with respect to the light yield to be achieved.

In order to improve the coupling-out of light, the final organic layer on the light-exit side in OLEDs can, for example, also be in the form of a nano-foam, resulting in a reduction in the proportion of total reflection.

Preference is furthermore given to an organic electroluminescent device in which one or more layers are applied by means of a sublimation process, in which the materials are applied by vapour deposition in vacuum sublimation

units at a pressure below 10^{-5} mbar, preferably below 10^{-6} mbar, more preferably below 10^{-7} mbar.

5 It may furthermore be provided that one or more layers of an electronic device according to the present invention are applied by means of the OVPD (organic vapour phase deposition) process or with the aid of carrier-gas sublimation, in which the materials are applied at a pressure between 10^{-5} mbar and 1 bar.

10 It may furthermore be provided that one or more layers of an electronic device according to the present invention are produced from solution, such as, for example, by spin coating, or by means of any desired printing process, such as, for example, screen printing, flexographic printing or offset printing, but particularly preferably LITI (light induced thermal
15 imaging, thermal transfer printing) or ink-jet printing.

The device usually comprises a cathode and an anode (electrodes). The electrodes (cathode, anode) are selected for the purposes of the present invention in such a way that their band energies correspond as closely as
20 possible to those of the adjacent, organic layers in order to ensure highly efficient electron or hole injection.

The cathode preferably comprises metal complexes, metals having a low work function, metal alloys or multilayered structures comprising various
25 metals, such as, for example, alkaline-earth metals, alkali metals, main-group metals or lanthanoids (for example Ca, Ba, Mg, Al, In, Mg, Yb, Sm, etc.). In the case of multilayered structures, further metals which have a relatively high work function, such as, for example, Ag and Ag nanowire (Ag NW) can also be used in addition to the said metals, in which case
30 combinations of the metals, such as, for example, Ca/Ag or Ba/Ag, are generally used. It may also be preferred to introduce a thin interlayer of a material having a high dielectric constant between a metallic cathode and

the organic semiconductor. Suitable for this purpose are, for example, alkali-metal or alkaline-earth metal fluorides, but also the corresponding oxides (for example LiF, Li₂O, BaF₂, MgO, NaF, etc.). The layer thickness of this layer is preferably between 0.1 and 10 nm, more preferably between 0.2 and 8 nm, and most preferably between 0.5 and 5 nm.

The anode preferably comprises materials having a high work function. The anode preferably has a potential greater than 4.5 eV vs. vacuum. Suitable for this purpose are on the one hand metals having a high redox potential, such as, for example, Ag, Pt or Au. On the other hand, metal/metal oxide electrodes (for example Al/Ni/NiO_x, Al/PtO_x) may also be preferred. For some applications, at least one of the electrodes must be transparent in order to facilitate either irradiation of the organic material (O-SCs) or the coupling-out of light (OLEDs/PLEDs, O-lasers). A preferred structure uses a transparent anode. Preferred anode materials here are conductive, mixed metal oxides. Particular preference is given to indium tin oxide (ITO) or indium zinc oxide (IZO). Preference is furthermore given to conductive, doped organic materials, in particular conductive, doped polymers, such as, for example, poly(ethylenedioxythiophene) (PEDOT) and polyaniline (PANI) or derivatives of these polymers. It is furthermore preferred for a p-doped hole-transport material to be applied as hole-injection layer to the anode, where suitable p-dopants are metal oxides, for example MoO₃ or WO₃, or (per)fluorinated electron-deficient aromatic compounds. Further suitable p-dopants are HAT-CN (hexacyanohexaazatriphenylene) or the compound NDP9 from Novaled. A layer of this type simplifies hole injection in materials having a low HOMO, i.e. an HOMO with a large value.

In general, all materials as are used for the layers in accordance with the prior art can be used in the further layers, and the person skilled in the art will be able to combine each of these materials with the materials according to the invention in an electronic device without inventive step.

The device is correspondingly structured in a manner known per se, depending on the application, provided with contacts and finally hermetically sealed, since the lifetime of such devices is drastically shortened in the presence of water and/or air.

5

The formulations according to the invention and the electronic devices, in particular organic electroluminescent devices, obtainable therefrom are distinguished over the prior art by one or more of the following surprising advantages:

10

1. The electronic devices obtainable using the formulations according to the invention exhibit very high stability and a very long lifetime compared with electronic devices obtained using conventional methods.

15

2. The formulations according to the invention can be processed using conventional methods, so that cost advantages can also be achieved thereby.

20

3. The organic functional materials employed in the formulations according to the invention are not subject to any particular restrictions, enabling the process of the present invention to be employed comprehensively.

25

4. The coatings obtainable using the formulations of the present invention exhibit excellent quality, in particular with respect to the uniformity of the coating.

These above-mentioned advantages are not accompanied by an impairment of the other electronic properties.

30

It should be pointed out that variations of the embodiments described in the present invention fall within the scope of this invention. Each feature disclosed in the present invention can, unless this is explicitly excluded, be replaced by alternative features which serve the same, an equivalent or a similar purpose. Thus, each feature disclosed in the present invention is, unless stated otherwise, to be regarded as an example of a generic series or as an equivalent or similar feature.

All features of the present invention can be combined with one another in any way, unless certain features and/or steps are mutually exclusive. This applies, in particular, to preferred features of the present invention. Equally, features of non-essential combinations can be used separately (and not in combination).

It should furthermore be pointed out that many of the features, and in particular those of the preferred embodiments of the present invention, are themselves inventive and are not to be regarded merely as part of the embodiments of the present invention. For these features, independent protection can be sought in addition or as an alternative to each invention presently claimed.

The teaching on technical action disclosed with the present invention can be abstracted and combined with other examples.

The invention is explained in greater detail below with reference to working examples, but without being restricted thereby.

The person skilled in the art will be able to use the descriptions to produce further electronic devices according to the invention without the need to employ inventive skill and thus can carry out the invention throughout the range claimed.

Working Examples

A) Film formation

- 5 21 inks were made at a concentration of 7 g/L for the hole-injection layer (HIL), as shown in Table 5. The composition is identical to the inks used for the device examples (see below). The inks were ink-jet printed and film profiles were measured after drying. The solvent 3-phenoxy toluene was chosen as a reference and shows a U-shape film profile, as can be seen
- 10 from Figure 2. In general, by adding a solvent containing hydrogen bond (2-phenoxy ethanol) to a mixture of 1-Ethyl-naphthalene/pentylbenzene, the film profile shows a significant improvement, meaning that a flat film can be achieved. However, the film in Example 1 is slightly rough (roughness in the center area is 1.8 nm). To reduce the roughness, an additional solvent, 1-
- 15 Phenyl-naphthalene, is added (Examples 2 to 8). As can be seen in the Table 5, the roughness is improved to less than 1 nm. Flat films can be achieved by adjusting the ratio of 1-Phenyl-naphthalene from 0 to 5%. The film profile becomes W-shape when there is too much of 1-Phenyl-naphthalene in the formulation (Example 8, with 10% 1-Phenyl-naphthalene).
- 20 Further inks are prepared, comprising various solvents containing hydrogen bond (see Examples 9 to 20 in Table 5) and 1-Ethyl-naphthalene/pentylbenzene/1-Phenyl-naphthalene. All these film profiles are significantly improved and show a higher flatness compared to the reference.
- 25 A profile-meter Alpha-step D120 from KLA-Tencor Corporation with a 2 μ m stylus was used to measure the film profiles. A flatness factor is calculated by the following formula and used to determine the flatness:

30
$$Flatness\ factor = \frac{|(H_{edge} - H_{center})|}{H_{center}} \times 100\%$$

where

H_{edge} is the height of pixel edge, and H_{center} is the height of pixel center, measured across the short axis of the pixel.

- 5 The film is considered as flat when the flatness factor is equal or smaller than 10%.

Root Mean Square roughness is calculated in a range of 10 μm around the pixel center along the short axis of the pixel by the following formular

10

$$R_q = \sqrt{\frac{1}{n} \sum_{i=1}^n (H_i - H_{mean})^2}$$

- 15 Where H_i is the height value at the position i , and H_{mean} is the mean of the height value in the center 10 μm .

Table 5: Solvent systems and their corresponding profile and roughness.

20

	Solvent(s)	Ratio (%)	Film profile shown in Fig.	Flatness factor (%)	Roughness (nm)
Reference 1	3-phenoxy toluene	100	2	36 (U-shape)	0.7
Example 1	1-ethylnaphthalene	30	3	2 (Flat)	1.8
	2-phenoxy ethanol	35			
	Pentylbenzene	35			
25 Example 2	1-ethylnaphthalene	30	4	2 (flat)	0.5
	2-phenoxy ethanol	33			
	Pentylbenzene	35			
	1-Phenyl-naphthalene	2			
30 Example 3	1-ethylnaphthalene	30	5	9 (slight Hiil-shape)	0.8
	2-phenoxy ethanol	40			
	Pentylbenzene	27			
	1-Phenyl-naphthalene	3			

5	Example 4	1-ethylnaphthalene	40	6	6 (Flat)	0.8
		2-phenoxy ethanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
10	Example 5	1-ethylnaphthalene	33	7	6 (Flat)	0.9
		2-phenoxy ethanol	30			
		Pentylbenzene	33			
		1-Phenyl-naphthalene	4			
15	Example 6	1-ethylnaphthalene	35	8	12 (Hill-shape)	0.4
		2-phenoxy ethanol	30			
		Pentylbenzene	30			
		1-Phenyl-naphthalene	5			
20	Example 7	1-ethylnaphthalene	40	9	6 (Flat)	0.7
		2-phenoxy ethanol	40			
		Pentylbenzene	15			
		1-Phenyl-naphthalene	5			
25	Example 8	1-ethylnaphthalene	35	10	6 (W-shape)	0.3
		2-phenoxy ethanol	40			
		Pentylbenzene	15			
		1-Phenyl-naphthalene	10			
30	Example 9	1-ethylnaphthalene	40	11	3 (Flat)	0.2
		1-phenoxy-2-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
	Example 10	1-ethylnaphthalene	40	12	6 (Flat)	0.8
		2-Phenoxy-1-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
	Example 11	1-ethylnaphthalene	40	13	5 (Flat)	0.8
		3-Phenoxy-1-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
	Example 12	1-ethylnaphthalene	40	14	1 (Flat)	0.7
		2-(Benzyloxy)ethanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			

5	Example 13	1-ethylnaphthalene	40	15	7 (Flat)	1.0
		2-(3-tolyloxy)ethanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
10	Example 14	1-ethylnaphthalene	40	16	13 (slight U- shape)	0.9
		1-(4-Methylphenoxy)- 2-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
15	Example 15	1-ethylnaphthalene	40	17	8 (Flat)	0.9
		2-methyl-1-phenyl-2- propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
20	Example 16	1-ethylnaphthalene	40	18	11 (slight U- shape)	0.6
		2-phenyl-1-ethanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
25	Example 17	1-ethylnaphthalene	40	19	8 (Flat)	1.2
		2-phenyl-1-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
30	Example 18	1-ethylnaphthalene	40	20	9 (Flat)	0.6
		1-(2-methylphenoxy)- 2-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
	Example 19	1-ethylnaphthalene	40	21	11 (slight U- shape)	0.3
		4-phenyl-1-butanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			
	Example 20	1-ethylnaphthalene	40	22	3 (Flat)	0.5
		3-phenyl-1-propanol	40			
		Pentylbenzene	17			
		1-Phenyl-naphthalene	3			

B) Device performance


To further check if the inks are suitable for device performance, several examples of HIL inks from Table 4 were chosen to fabricate devices. The device structure is shown in Figure 1.

Description of Fabrication Process


Glass substrates covered with pre-structured ITO and bank material were cleaned using ultrasonication in isopropanol followed by de-ionized water, then dried using an air-gun and a subsequent annealing on a hot-plate at 230°C for 2 hours.

A hole-injection layer (HIL) using a composition of a polymer (e.g. polymer P2) and a salt (e.g. salt D1) as described in PCT/EP2015/002476 was inkjet-printed onto the substrate and dried in vacuum. HIL inks were prepared for each example using solvent mixtures mentioned in table 5. The HIL was then annealed at 185°C for 30 minutes in air.


On top of the HIL, a hole-transport layer (HTL) was inkjet-printed, dried in vacuum and annealed at 210°C for 30 minutes in nitrogen atmosphere. As material for the hole-transport layer, polymer HTM-1 dissolved in 3-phenoxy toluene at a concentration of 7 g/l was used. The structure of the polymer HTM-1 is the following:

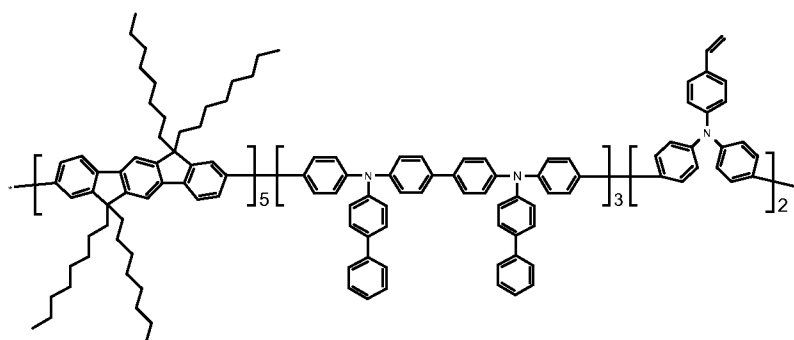


The green emissive layer (G-EML) was also inkjet-printed, vacuum dried and annealed at 160°C for 10 minutes in nitrogen atmosphere. The ink for the green emissive layer contained in all working examples two host materials (*i.e.* HM-1 and HM-2) as well as one triplet emitter (EM-1) prepared in 3-phenoxy toluene at a concentration of 12 g/l. The materials were used in the following ratio: HM-1 : HM-2 : EM-1 = 40 : 40 : 20. The structures of the materials are the following:

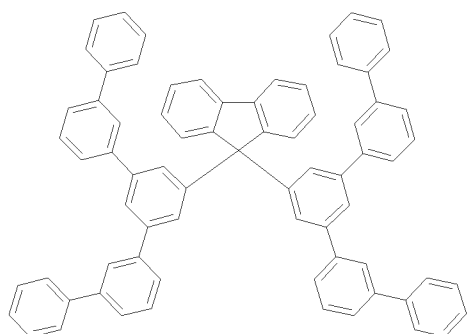

HM-1

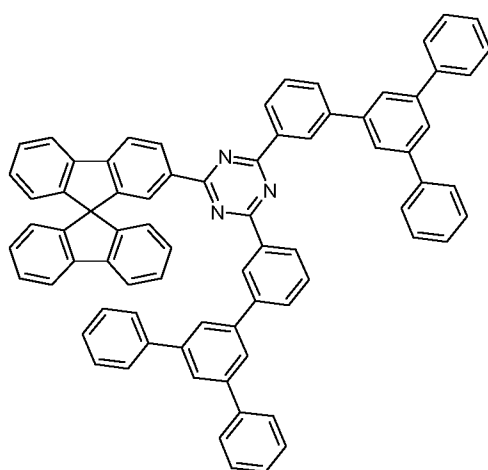

HM-2




EM-1

All inkjet printing processes were performed under yellow light and under ambient conditions.

The devices were then transferred into a vacuum deposition chamber where the deposition of a common hole blocking layer (HBL), an electron-transport layer (ETL), and a cathode (Al) was done using thermal evaporation (see Figure 1). The devices were then characterized in the glovebox.

In the hole blocking layer (HBL) ETM-1 was used as a hole-blocking material. The material has the following structure:

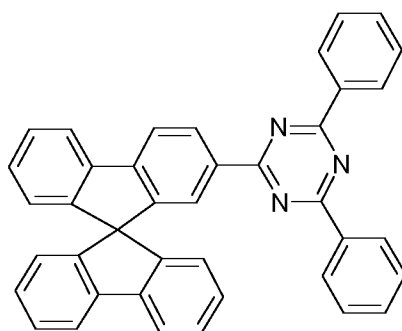

ETM-1

In the electron transport layer (ETL) a 50:50 mixture of ETM-1 and LiQ was used. LiQ is lithium 8-hydroxyquinolate.

Finally, the Al electrode is vapor-deposited. The devices were then encapsulated in a glove box and physical characterization was performed in ambient air. Figure 1 shows the device structure.

5 The device is driven with constant voltage provided by a Keithley 230 voltage source. The voltage over the device as well as the current through the device are measured with two Keithley 199 DMM multimeters. The brightness of the device is detected with a SPL-025Y brightness sensor, a combination of a photodiode with a photonic filter. The photo current is
10 measured with a Keithley 617 electrometer. For the spectra, the brightness sensor is replaced by a glass fiber which is connected to the spectrometer input. The device lifetime is measured under a given current with an initial luminance. The luminance is then measured over time by a calibrated photodiode.

15

Results and Discussion

Three devices were prepared, including Reference 1 (from 3-PT, U-shape HIL profile), Device Example 1 (3-solvents system, flat HIL with rough
20 surface), and Device Example 2 (4-solvents system, flat HIL with smooth surface). The solvents used for the device of Example 1 are 1-ethylnaphthalene : 2-phenoxyethanol : pentylbenzene (30:35:35). The solvents used for the device of Example 2 are 1-ethylnaphthalene : 2-phenoxyethanol : pentylbenzene : 1-phenylnaphthalene (40:40:17:3).
25 Electroluminescent (EL) images of the 3 devices are shown in Figure 23, 24 and 25. The picture in Figure 24 clearly shows some surface texture (due to the high surface roughness created by the 3-solvents mixture of the HIL layer). This issue can be solved with adding a small amount of 1-phenylnaphthalene, as shown in Figure 25. Table 6 summarizes luminance
30 efficiencies and external quantum efficiencies (EQE) at 1000 cd/m², as well as the device lifetimes (LT80) at 3000 cd/m². Surprisingly, no major differences were observed in device results with or without surface

roughness. Lifetimes in particular demonstrate values as high as the reference. These results indicate that the new 4 solvents system provides no damage to the device, and greatly improves film profile. One can notice that the operation voltage is lower in the examples which have a flat film profile. This indicates that the current and voltage are uniformly distributed in the pixel, resulting in better operation conditions and emissive color.

Table 6: Luminance efficiency, external quantum efficiency, operational voltage and device lifetime.


	Luminance efficiency at 1000 cd/m ² (cd/A)	External quantum efficiency at 1000 cd/m ² (%)	Operation voltage at 1000 cd/m ² (V)	Lifetime (LT80) at 3000 cd/m ² (hrs)
Ref. 1	75	20.1	5.1	9000
Device Ex. 1	76	20.3	4.9	9200
Device Ex. 2	75	20.1	4.9	9500

Patent Claims

1. Formulation containing at least one organic functional material and at least four different organic solvents, a first organic solvent A, a second organic solvent B, a third organic solvent C and a fourth organic solvent D, characterized in that
- 5
- the first organic solvent A comprises a group, which is capable of receiving or giving a hydrogen bonding,
 - the second organic solvent B has a boiling point in the range from 10
 - 150 to 350°C,
 - the third organic solvent C has a boiling point in the range from 100 to 300°C, and
 - the fourth organic solvent D has a boiling point in the range from 200 to 400°C, is present in an amount from 0,01 to 15 vol.-% and
 - 15 has a viscosity of ≥ 15 mPas,
 - the solubility of the at least one organic functional material in the second organic solvent B and in the fourth organic solvent D is ≥ 5 g/l,
 - the boiling point of the third organic solvent C is at least 10°C
 - 20 lower than the boiling point of the second organic solvent B, and
 - the boiling point of the fourth organic solvent D is at least 10°C higher than the boiling point of the second organic solvent B.
2. Formulation according to claim 1, characterized in that the first organic solvent A comprises a group, which is capable of giving a hydrogen bonding.
- 25
3. Formulation according to claim 1 or 2, characterized in that the group of the first organic solvent A, which is capable of giving a hydrogen bonding is either an OH- or NH-group.
- 30

4. Formulation according to one or more of claims 1 to 3, characterized in that the first organic solvent A is a solvent according to general formula (I)

5

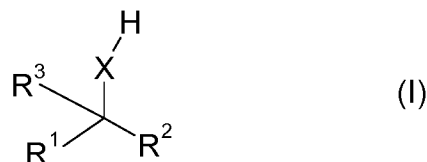

10

wherein

X is O or NR⁴,


R¹, R² and R³ are identical or different at each occurrence, and are H, D, a straight-chain alkyl group having from 1 to 12 carbon atoms or a branched or cyclic alkyl group having from 3 to 12 carbon atoms, in which one or more non-adjacent CH₂ groups may be replaced by -O-, -S-, -NR⁵-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F or an aryl or heteroaryl group which has from 4 to 14 carbon atoms and may be substituted by one or more nonaromatic R⁵ radicals, and a plurality of substituents R⁵, either on the same ring or on the two different rings, may together in turn form a mono- or polycyclic, aliphatic, aromatic or heteroaromatic ring system, which may be substituted by a plurality of substituents R⁵, or two of R¹, R² and R³ may together in turn form a mono- or polycyclic, aliphatic, aromatic or heteroaromatic rings system having from 4 to 14 carbon atoms, which may be substituted by a plurality of substituents R⁵;

R⁴ is H, a straight-chain alkyl group having from 1 to 12 carbon atoms, a branched or cyclic alkyl group having from 3 to 12 carbon atoms or an aryl or heteroaryl group which has from 4 to 14 carbon atoms, which may be substituted by one or more nonaromatic R⁵ radicals, and

30


5 R^5 are identical or different at each instance, and are H, a straight-chain alkyl or alkoxy group having from 1 to 12 carbon atoms or a branched or cyclic alkyl or alkoxy group having from 3 to 20 carbon atoms, in which one or more non-adjacent CH_2 groups may be replaced by -O-, -S-, -CO-O-, -C=O-, -CH=CH- or -C≡C-.

5. Formulation according to claim 4, characterized in that the first organic solvent A is a solvent according to general formula (II)



wherein R^1 , R^2 and R^3 are defined as in claim 4.

15 6. Formulation according to claim 4, characterized in that the first organic solvent A is a solvent according to general formula (III)

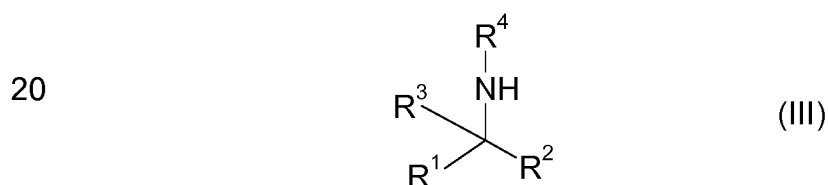

wherein R^1 , R^2 , R^3 and R^4 are defined as in claim 4.

25 7. Formulation according to claim 5 or 6, characterized in that the first organic solvent A is a solvent according to general formula (II) or (III) wherein

30 R^1 , R^2 and R^3 are identical or different at each occurrence, and are a straight-chain alkyl group having from 1 to 8 carbon atoms or a branched or cyclic alkyl group having from 3 to 8 carbon atoms, in which one or more non-adjacent CH_2 groups may be

replaced by -O-, -NH-, -CO-O-, -C=O-, -CH=CH- or -C≡C-, and in which one or more hydrogen atoms may be replaced by F or an aryl or heteroaryl group which has from 4 to 10 carbon atoms and may be substituted by one or more nonaromatic R⁵ radicals, and wherein R⁵ is defined as in claim 4.

5

10

15

20

25

30

8. Formulation according to one or more of claims 5 to 7, characterized in that the first organic solvent A is a solvent according to formula (II) or (III) wherein R¹ and/or R² are H.

9. Formulation according to one or more of claims 6 to 8, characterized in that the first organic solvent A is a solvent according to formula (III) wherein R⁴ is H.

10. Formulation according to one or more of claims 1 to 9, characterized in that the first organic solvent A has a surface tension of ≥ 20 mN/m.

11. Formulation according to one or more of claims 1 to 10, characterized in that the content of the first organic solvent A is in the range from 5 to 60 vol.-%, based on the total amount of solvents in the formulation.

12. Formulation according to one or more of claims 1 to 11, characterized in that the first organic solvent A has a boiling point in the range from 150 to 350°C.

13. Formulation according to one or more of claims 1 to 12, characterized in that the content of the second organic solvent B is in the range from 5 to 95 vol.-%, based on the total amount of solvents in the formulation.

14. Formulation according to one or more of claims 1 to 13, characterized in that the second organic solvent B has a boiling point in the range from 200 to 300°C.
- 5 15. Formulation according to one or more of claims 1 to 10, characterized in that the content of the third organic solvent C is in the range from 1 to 30 vol.-%, based on the total amount of solvents in the formulation.
- 10 16. Formulation according to one or more of claims 1 to 15, characterized in that the formulation has a surface tension in the range from 15 to 50 mN/m.
17. Formulation according to one or more of claims 1 to 16, characterized in that the formulation has a viscosity in the range from 1 to 50 mPa s.
- 15 18. Formulation according to one or more of claims 1 to 17, characterized in that the content of the at least one organic functional material in the formulation is in the range from 0.001 to 20 weight-%, based on the total weight of the formulation.
- 20 19. Formulation according to one or more of claims 1 to 18, characterized in that the at least one organic functional material is selected from the group consisting of organic conductors, organic semiconductors, organic fluorescent compounds, organic phosphorescent compounds, organic light-absorbent compounds, organic light-sensitive compounds, organic photosensitisation agents and other organic photoactive compounds such as organometallic complexes of transition metals, rare earths, lanthanides and actinides.
- 25 20. Formulation according to claim 19, characterized in that the at least one organic functional material is selected from the group consisting of fluorescent emitters, phosphorescent emitters, host materials, matrix materials, exciton-blocking materials, electron-transport
- 30

materials, electron-injection materials, hole-conductor materials, hole-injection materials, n-dopants, p-dopants, wide-band-gap materials, electron-blocking materials and hole-blocking materials.

- 5 21. Formulation according to claim 20, characterized in that the at least one organic functional material is an organic semiconductor selected from the group consisting of hole-injecting, hole-transporting, emitting, electron-transporting and electron-injecting materials.
- 10 22. Formulation according to claim 21, characterized in that the at least one organic semiconductor is selected from the group consisting of hole-injecting, hole-transporting and emitting materials.
- 15 23. Formulation according to claim 21 or 22, characterized in that the hole-injecting and hole-transporting material is a polymeric compound or a blend of a polymeric compound and a non-polymeric compound.
- 20 24. Formulation according to claim 21 or 22, characterized in that the at least one emitting material is a mixture of two or more different compounds having a low molecular weight.
- 25 25. Process for the preparation of a formulation according to one or more of claims 1 to 24, characterized in that the at least one organic functional material and the at least four solvents are mixed.
- 30 26. Process for the preparation of an electroluminescent device, characterized in that at least one layer of the electroluminescent device is prepared in that a formulation according to one of more of claims 1 to 24 is deposited, preferably printed, more preferably ink-jet printed, on a surface and subsequently dried.
- 30 27. Electroluminescent device, characterized in that at least one layer is prepared in that a formulation according to one or more of claims 1 to

24 is deposited, preferably printed, more preferably ink-jet printed, on a surface and subsequently dried.

5

10

15

20


25

30

Figure 1


100 nm	Al Cathode
20 nm	ETL
20 nm	HBL
60 nm	G-EML
20 nm	HTL
30 nm	HIL (Ref., Ex. 1 to 8)
50 nm	ITO Anode
	Substrate

Figure 2

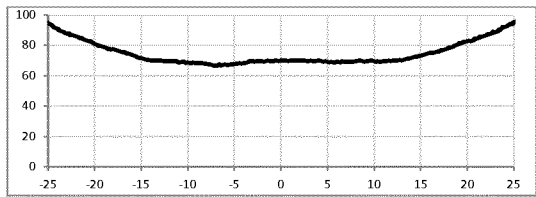


Film profile of the film of Reference Example

Figure 3

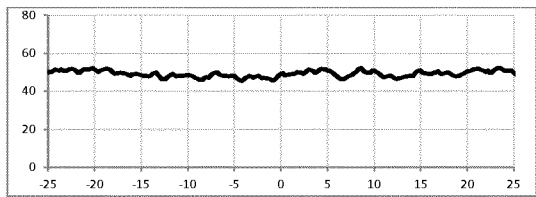


Film profile of the film of Example 1

Figure 4

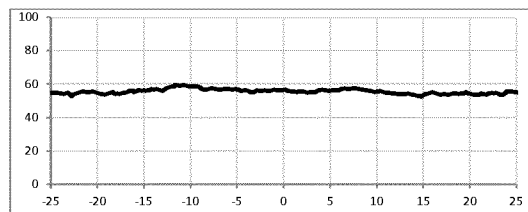


Film profile of the film of Example 2

Figure 5

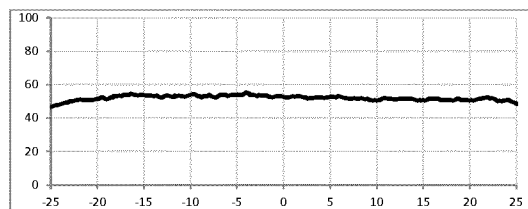


Film profile of the film of Example 3

Figure 6

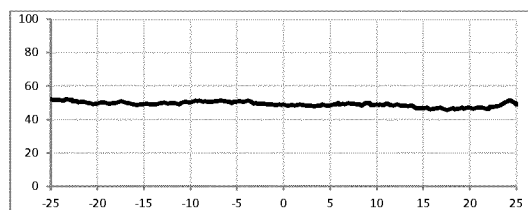

Film profile of the film of Example 4


Figure 7

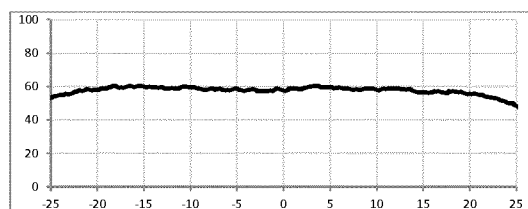

Film profile of the film of Example 5


- 3/7 -

Figure 8

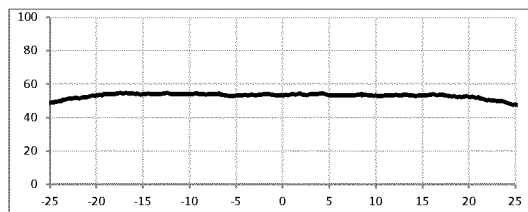


Film profile of the film of Example 6

Figure 9

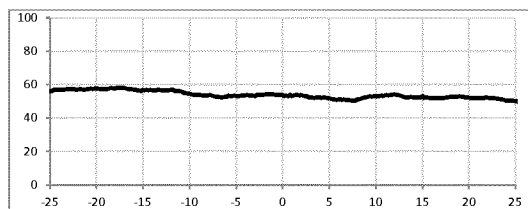


Film profile of the film of Example 7

Figure 10

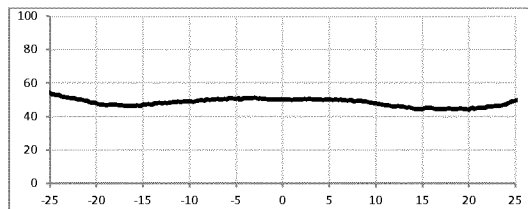


Film profile of the film of Example 8

Figure 11

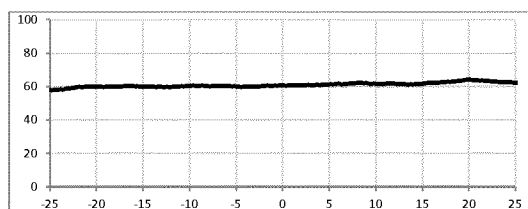


Film profile of the film of Example 9

Figure 12

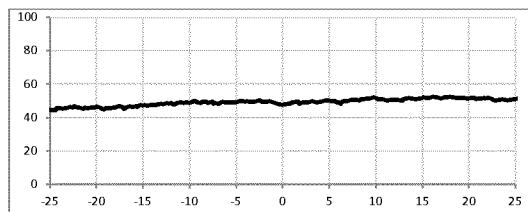


Film profile of the film of Example 10

Figure 13

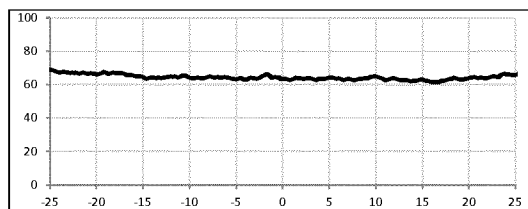


Film profile of the film of Example 11

Figure 14

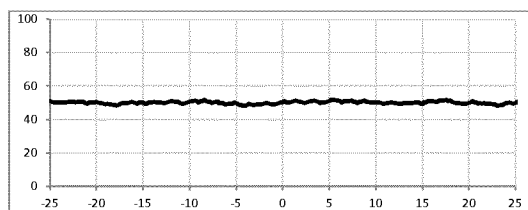


Film profile of the film of Example 12

Figure 15

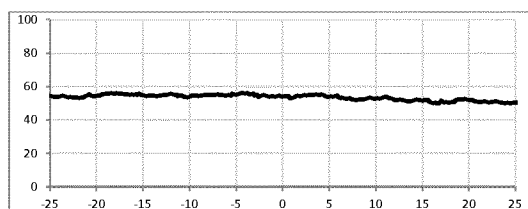


Film profile of the film of Example 13

Figure 16

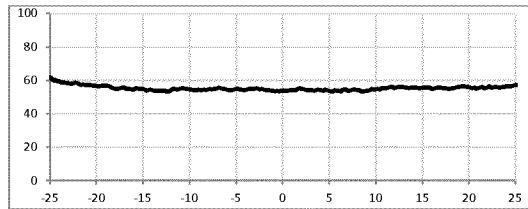


Film profile of the film of Example 14

Figure 17

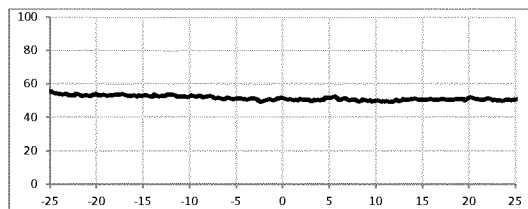


Film profile of the film of Example 15

Figure 18

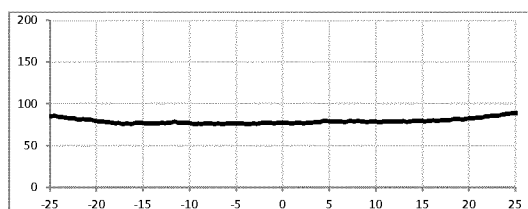


Film profile of the film of Example 16

Figure 19

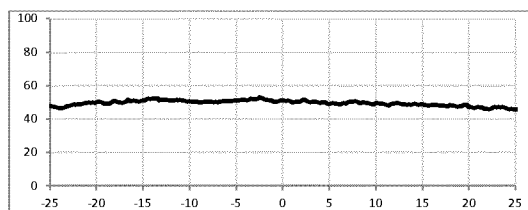


Film profile of the film of Example 17

Figure 20

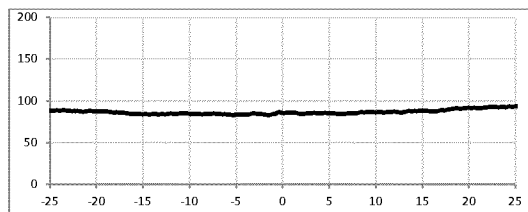


Film profile of the film of Example 18

Figure 21

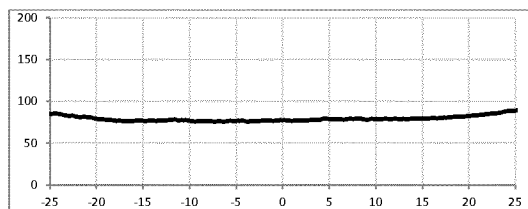


Film profile of the film of Example 19

Figure 22

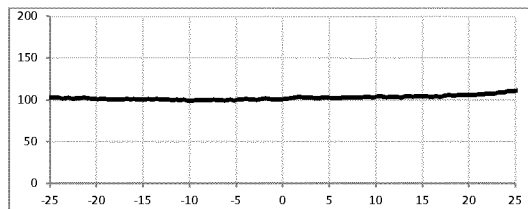

Film profile of the film of Example 20

Figure 23

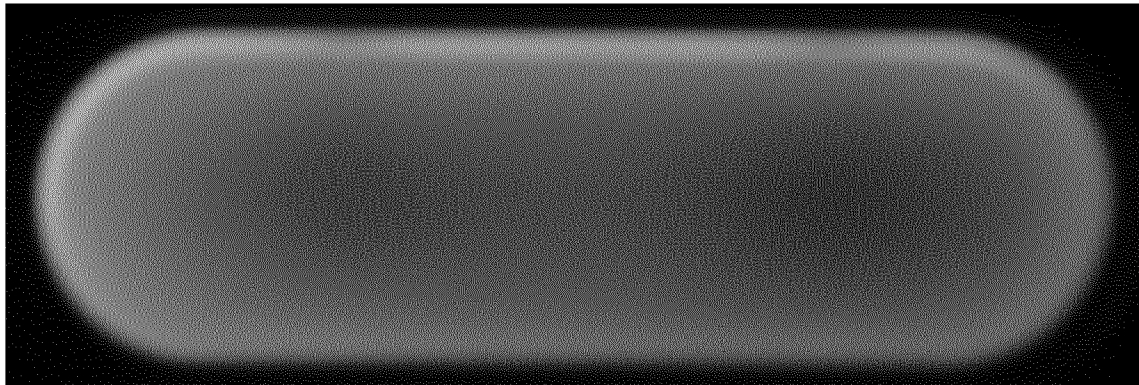


EL Image of Device Reference 1

5

10

Figure 24

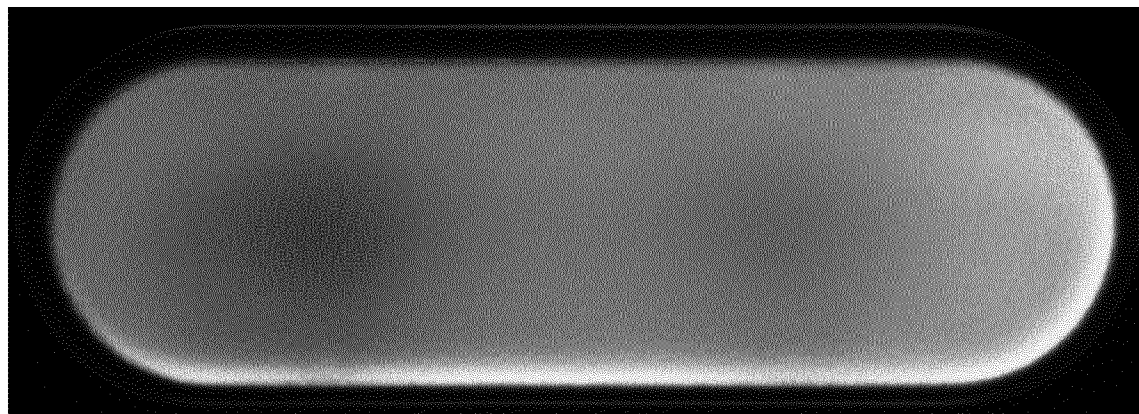


EL Image of Device Example 1

15

20

Figure 25

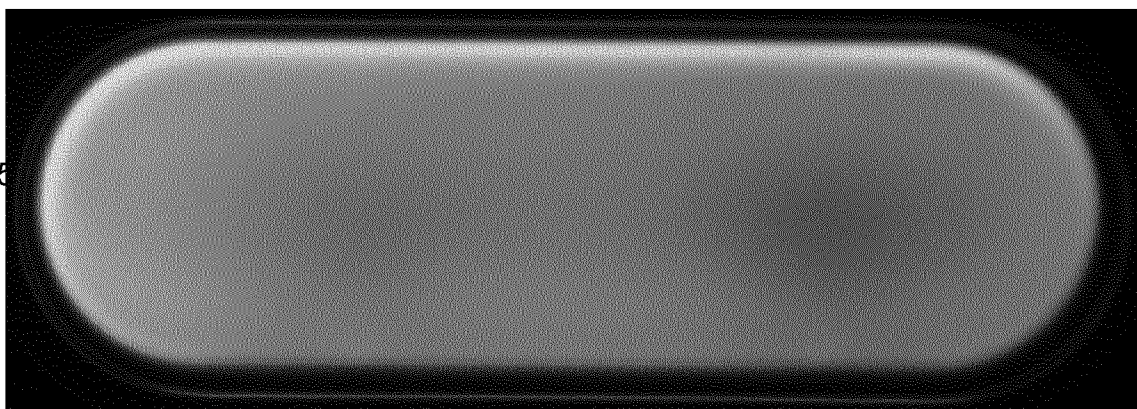

EL Image of Device Example 2

25

30

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2017/076429

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C09K11/06 H01L51/00 H01L51/56 C09D11/36 C09D11/033
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09K H01L C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/256603 A1 (CHESTERFIELD REID JOHN [US] ET AL) 3 October 2013 (2013-10-03)	1,2, 10-13, 15-27 3-9,14
A	table 5	
X	US 2013/256636 A1 (WATANABE SHOTARO [JP]) 3 October 2013 (2013-10-03) cited in the application	27
A	figures 10A,10B,11A; example 1	1-26
X	EP 2 924 083 A1 (SEIKO EPSON CORP [JP]) 30 September 2015 (2015-09-30) cited in the application	27
A	example 13	1-26
X,P	EP 3 168 269 A1 (SEIKO EPSON CORP [JP]) 17 May 2017 (2017-05-17) paragraphs [0106] - [0134]; figures 11-16	1-27
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 January 2018

Date of mailing of the international search report

30/01/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Pöttsch, Robert

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/076429

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/173578 A1 (SPREITZER HUBERT [DE] ET AL) 26 July 2007 (2007-07-26)	27
A	example 3 -----	1-26
X	GB 2 466 842 A (CAMBRIDGE DISPLAY TECH [GB]) 14 July 2010 (2010-07-14)	27
A	table 1 -----	1-26
X	WO 2011/149804 A2 (CORNING INC [US]; HE MINGQIAN [US]; LI JIANFENG [US]; LIN JEN-CHIEH [C]) 1 December 2011 (2011-12-01)	27
A	example 6; table 4 -----	1-26
X	US 2015/132496 A1 (SON YOUNGTAE [KR]) 14 May 2015 (2015-05-14)	27
A	example 1 -----	1-26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/076429

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2013256603	A1	03-10-2013	CN	103262278 A		21-08-2013
			EP	2656411 A1		30-10-2013
			JP	2014504021 A		13-02-2014
			KR	20130143627 A		31-12-2013
			US	2013256603 A1		03-10-2013
			WO	2012088194 A1		28-06-2012

US 2013256636	A1	03-10-2013	CN	103360862 A		23-10-2013
			JP	6015073 B2		26-10-2016
			JP	2013214397 A		17-10-2013
			KR	20130112003 A		11-10-2013
			TW	201343875 A		01-11-2013
			US	2013256636 A1		03-10-2013

EP 2924083	A1	30-09-2015	CN	104946006 A		30-09-2015
			EP	2924083 A1		30-09-2015
			JP	2015185640 A		22-10-2015
			KR	20150110366 A		02-10-2015
			TW	201536878 A		01-10-2015
			US	2015270485 A1		24-09-2015

EP 3168269	A1	17-05-2017	CN	106905766 A		30-06-2017
			EP	3168269 A1		17-05-2017
			JP	2017088780 A		25-05-2017
			KR	20170056458 A		23-05-2017
			US	2017137651 A1		18-05-2017

US 2007173578	A1	26-07-2007	CN	1922744 A		28-02-2007
			DE	102004007777 A1		08-09-2005
			EP	1716604 A1		02-11-2006
			JP	4861197 B2		25-01-2012
			JP	2007527624 A		27-09-2007
			KR	20070001138 A		03-01-2007
			US	2007173578 A1		26-07-2007
			WO	2005083814 A1		09-09-2005

GB 2466842	A	14-07-2010	GB	2466842 A		14-07-2010
			TW	201033300 A		16-09-2010
			WO	2010079330 A1		15-07-2010

WO 2011149804	A2	01-12-2011	CN	103080226 A		01-05-2013
			EP	2576691 A2		10-04-2013
			JP	5937578 B2		22-06-2016
			JP	2013533608 A		22-08-2013
			TW	201213384 A		01-04-2012
			US	2011291054 A1		01-12-2011
			WO	2011149804 A2		01-12-2011

US 2015132496	A1	14-05-2015	CN	104638198 A		20-05-2015
			KR	20150054160 A		20-05-2015
			US	2015132496 A1		14-05-2015

专利名称(译)	配制有机功能材料		
公开(公告)号	EP3532565A1	公开(公告)日	2019-09-04
申请号	EP2017781524	申请日	2017-10-17
申请(专利权)人(译)	MERCK PATENT GMBH		
当前申请(专利权)人(译)	MERCK PATENT GMBH		
[标]发明人	BEALLE GAELE LEONHARD CHRISTOPH TSENG HSIN RONG HAMBURGER MANUEL JATSCH ANJA		
发明人	BÉALLE, GAËLLE LEONHARD, CHRISTOPH TSENG, HSIN-RONG HAMBURGER, MANUEL JATSCH, ANJA		
IPC分类号	C09K11/06 H01L51/00 H01L51/56 C09D11/36 C09D11/033		
CPC分类号	C09D11/033 C09D11/36 C09K11/06 H01L51/0007 H01L51/0005 H01L51/4273 H01L51/506 H01L51/5076 H01L51/5092		
优先权	2016196589 2016-10-31 EP		
外部链接	Espacenet		

摘要(译)

本发明涉及含有至少一种有机功能材料和至少四种不同的有机溶剂，第一有机溶剂A，第二有机溶剂B，第三有机溶剂C和第四有机溶剂D的制剂，其中第一有机溶剂A包含能够接受或提供氢键的基团，第二有机溶剂B的沸点为50-350°C，第三有机溶剂C的沸点为100至300°C，并且第四有机溶剂D具有200-400°C的沸点，以0.01-1体积%的量存在并具有 $\geq 15\text{mPas}$ 的粘度，至少一种有机功能材料在第二有机溶剂B和第四有机溶剂D中的溶解度 $\geq 5\text{g/l}$ ，第三有机溶剂C的沸点至少低于10°C的沸点第二有机溶剂B;并且第四有机溶剂D的沸点比第二有机溶剂B的沸点高至少10°C;以及通过使用这些制剂制备的电致发光器件。