



US 20110121309A1

(19) **United States**(12) **Patent Application Publication**
LEE et al.(10) **Pub. No.: US 2011/0121309 A1**(43) **Pub. Date: May 26, 2011**(54) **METHOD OF FABRICATING POLYSILICON LAYER, THIN FILM TRANSISTOR, ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICE INCLUDING THE SAME, AND METHOD OF FABRICATING THE SAME****Publication Classification**(51) **Int. Cl.****H01L 51/50** (2006.01)**H01L 27/12** (2006.01)**H01L 33/08** (2010.01)**H01L 21/84** (2006.01)**H01L 21/20** (2006.01)(52) **U.S. Cl. 257/72; 257/347; 438/34; 438/158; 438/486; 257/E33.053; 257/E51.018; 257/E27.111; 257/E21.703; 257/E21.09**

(57)

ABSTRACT

A method of fabricating an organic light emitting diode (OLED) display device having a thin film transistor including a polysilicon layer. The method of fabricating a polysilicon layer includes forming a buffer layer on a substrate, forming a metal catalyst layer on the buffer layer, diffusing a metal catalyst into the metal catalyst layer to the buffer layer, removing the metal catalyst layer, forming an amorphous silicon layer on the buffer layer, and annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer. The thin film transistor includes a substrate, a buffer layer disposed on the substrate, a semiconductor layer disposed on the buffer layer, a gate insulating layer disposed above the substrate and on the semiconductor layer, a gate electrode disposed on the gate insulating layer, a source electrode and a drain electrode both electrically connected to the semiconductor layer, and a metal silicide disposed between the buffer layer and the semiconductor layer.

(75) **Inventors:** **Dong-Hyun LEE**, Yongin-City (KR); **Ki-Yong Lee**, Yongin-City (KR); **Jin-Wook Seo**, Yongin-City (KR); **Tae-Hoon Yang**, Yongin-City (KR); **Yun-Mo Chung**, Yongin-City (KR); **Byoung-Keon Park**, Yongin-City (KR); **Kil-Won Lee**, Yongin-City (KR); **Jong-Ryuk Park**, Yongin-City (KR); **Bo-Kyung Choi**, Yongin-City (KR); **Byung-Soo So**, Yongin-City (KR)(73) **Assignee:** **Samsung Mobile Display Co., Ltd.**, Yongin-City (KR)(21) **Appl. No.: 12/890,002**(22) **Filed: Sep. 24, 2010**(30) **Foreign Application Priority Data**

Nov. 20, 2009 (KR) 10-2009-0112770

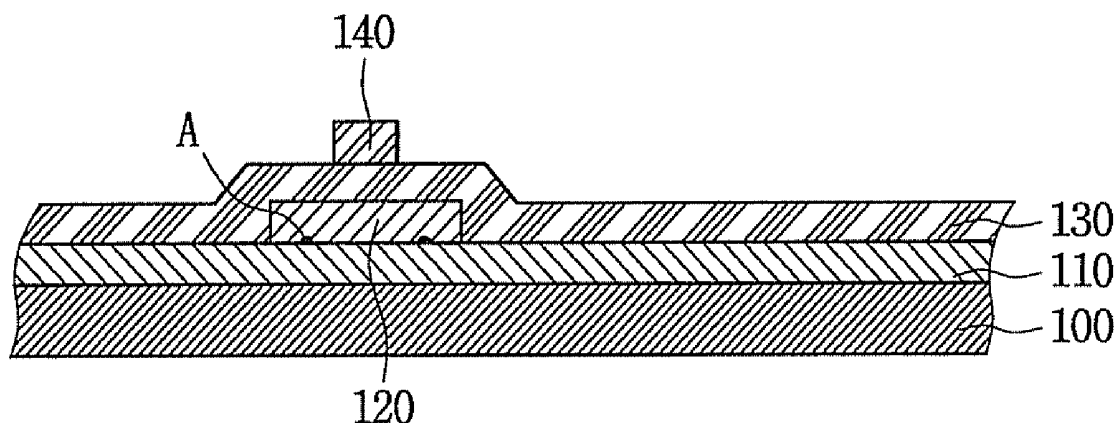


FIG. 1A



FIG. 1B

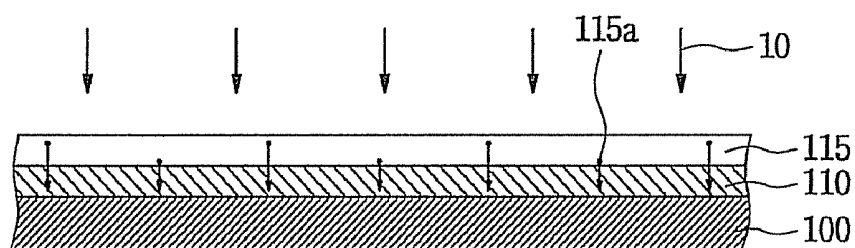


FIG. 1C

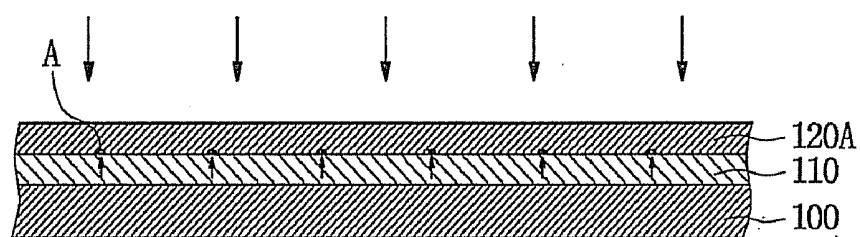


FIG. 1D

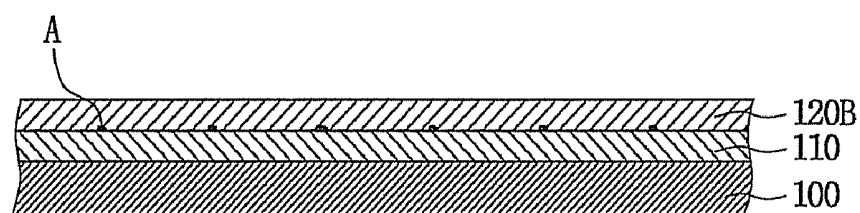


FIG. 1E

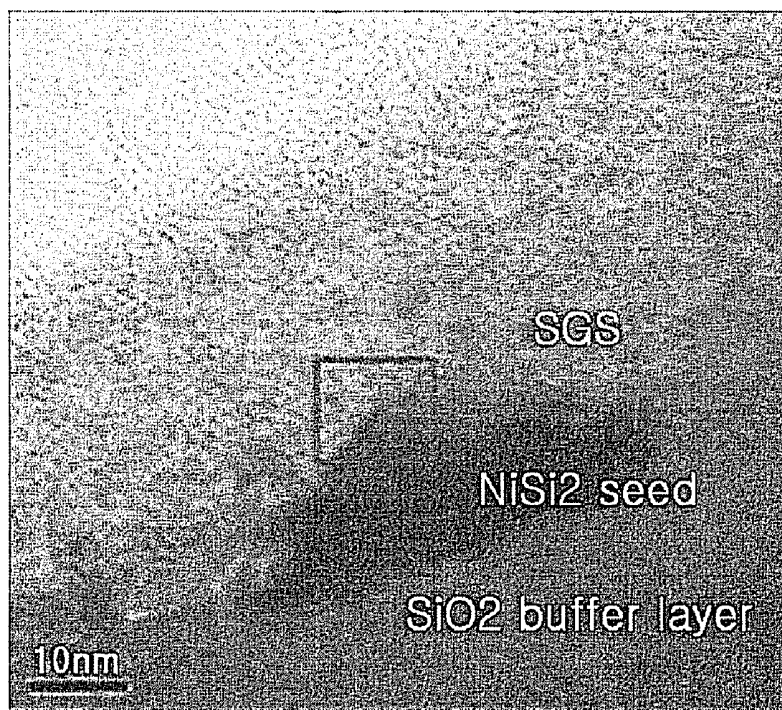


FIG. 1F

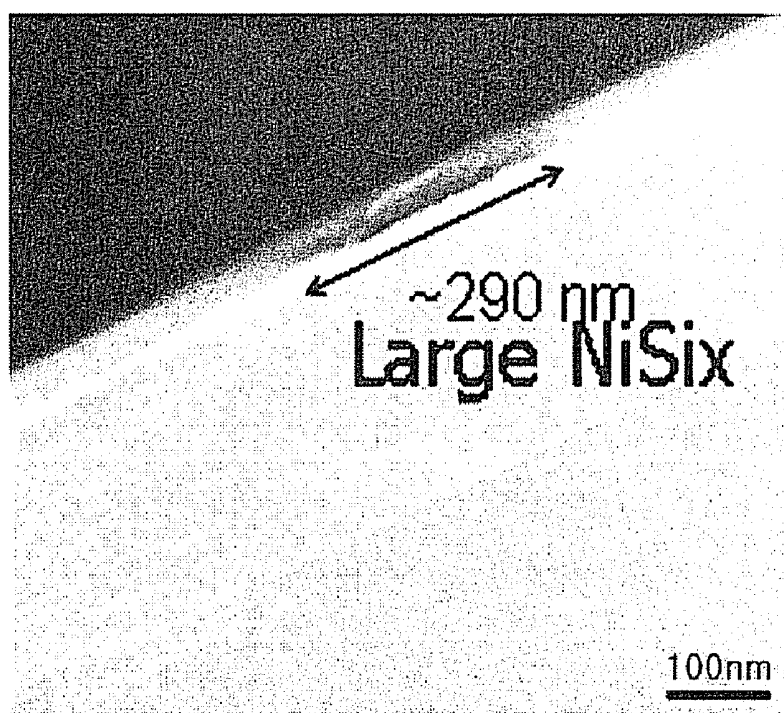


FIG. 1G

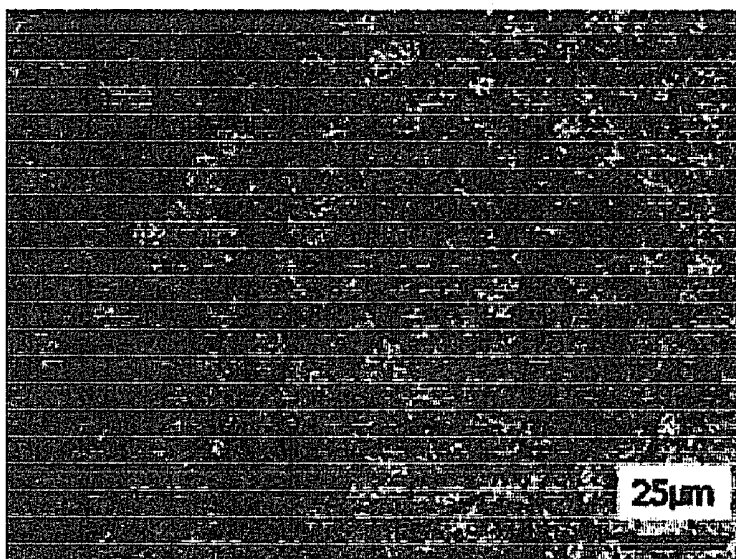


FIG. 1H

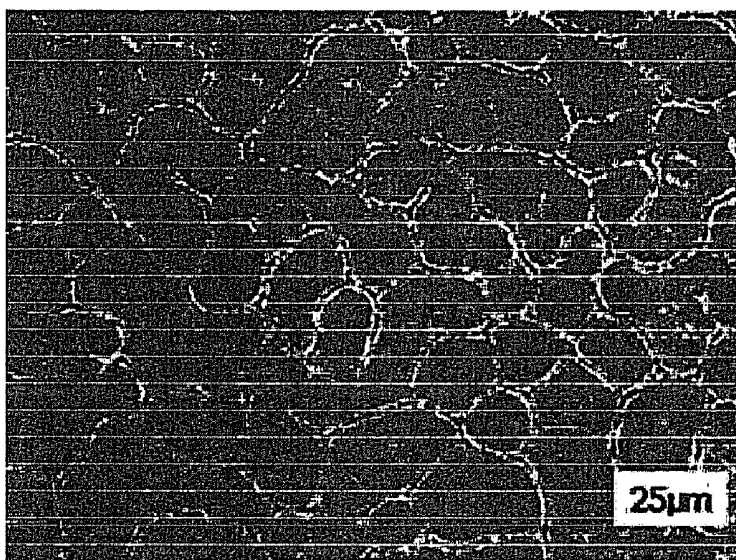


FIG. 1I

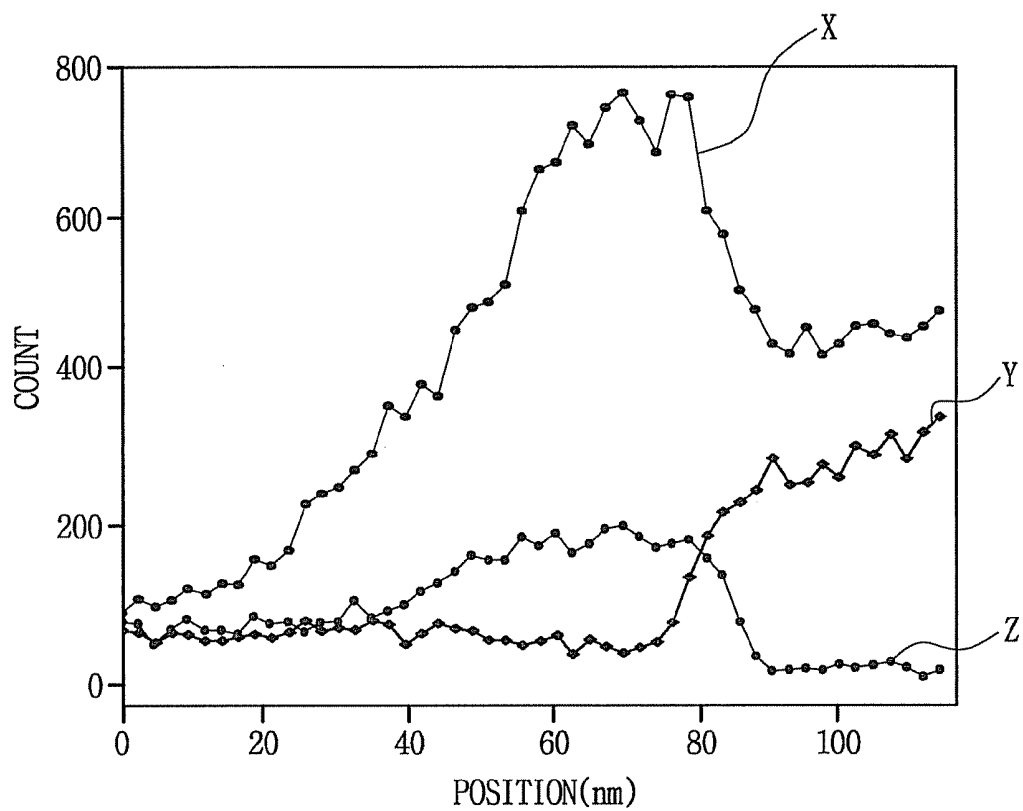


FIG. 1J

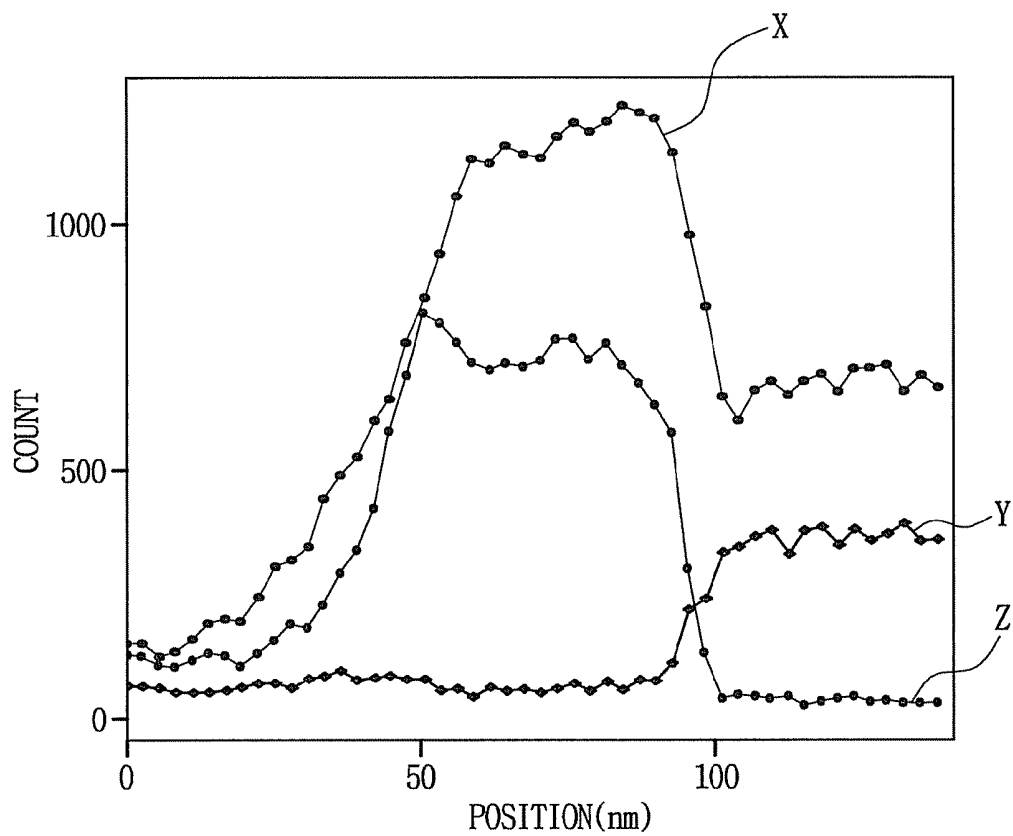


FIG. 2A



FIG. 2B

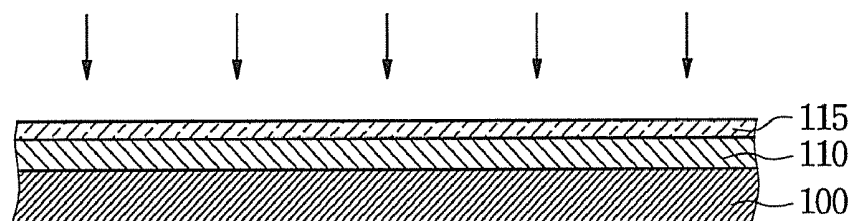


FIG. 2C

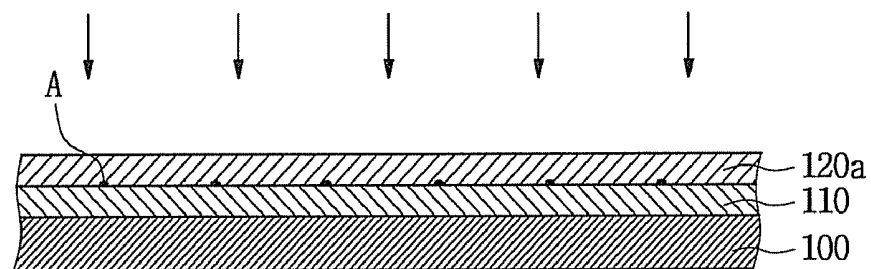


FIG. 2D

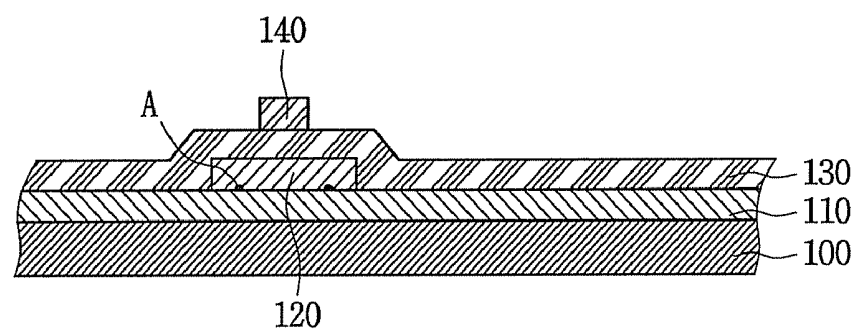


FIG. 2E

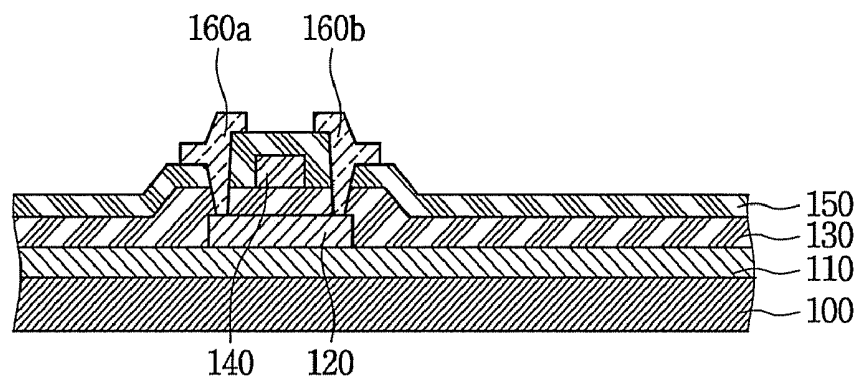


FIG. 3A

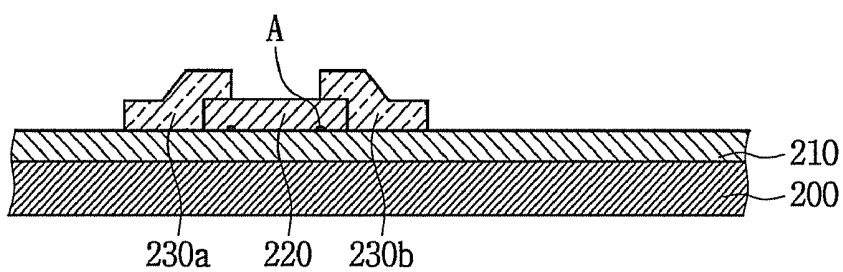


FIG. 3B

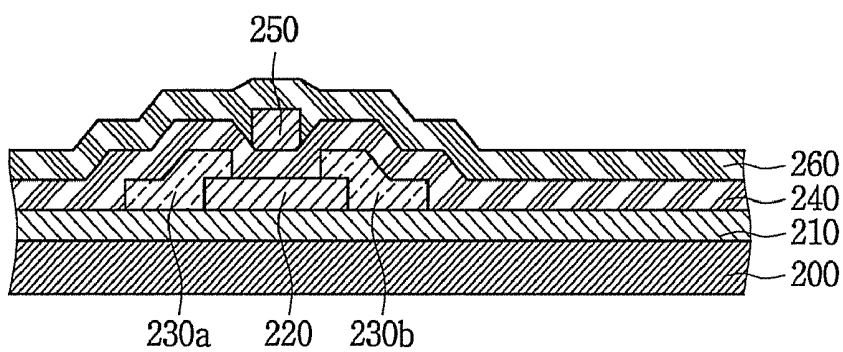


FIG. 4A




FIG. 4B


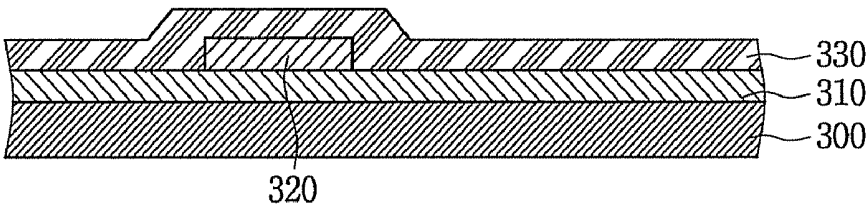


FIG. 4C

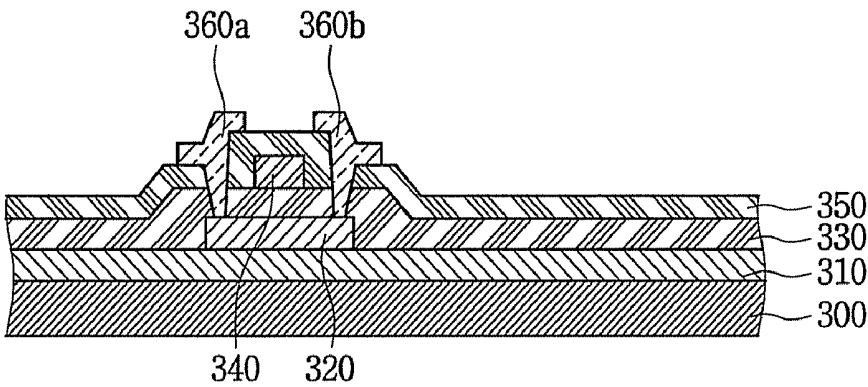

**METHOD OF FABRICATING POLYSILICON
LAYER, THIN FILM TRANSISTOR, ORGANIC
LIGHT EMITTING DIODE DISPLAY DEVICE
INCLUDING THE SAME, AND METHOD OF
FABRICATING THE SAME**

**CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] This application claims the benefit of Korean Patent Application No. 10-2009-0112770, filed Nov. 20, 2009, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference.

BACKGROUND

[0002] 1. Field

[0003] Aspects of the present invention relate to a method of fabricating a polysilicon layer, a thin film transistor using the same, an organic light emitting diode display device including the same, and a method of fabricating the same. More particularly, aspects of the present invention relate to a method of fabricating a polysilicon layer including diffusing a metal catalyst in a buffer layer and crystallizing an amorphous silicon layer into a polysilicon layer using the metal catalyst in the buffer layer, a thin film transistor having the reduced residual metal catalyst and improved characteristics when it is used as a semiconductor layer, an organic light emitting diode display device including the same, and a method of fabricating the same.

[0004] 2. Description of the Related Art

[0005] In general, polysilicon layers have advantages of high electric field effect mobility, applicability to high speed operation circuits, and enablement of complementary metal-oxide semiconductor (CMOS) circuits, and thus, the polysilicon layers are widely used as semiconductor layers of thin film transistors (TFTs). The TFTs using the polysilicon layers are used as active devices of active matrix liquid crystal displays (AMLCDs) and as switching devices and drive devices of organic light emitting diode (OLED) display devices.

[0006] Methods of crystallizing an amorphous silicon layer into a polysilicon layer include solid phase crystallization (SPC), excimer laser crystallization (ELC), metal induced crystallization (MIC), metal induced lateral crystallization (MILC), and other similar methods.

[0007] Currently, methods of crystallizing amorphous silicon using metal are being widely researched due to an advantage of a lower crystallization temperature and a shorter crystallization time than that of the SPC. Crystallization methods using metal include MIC, MILC, super grain silicon (SGS) crystallization, and other similar methods. However, the above methods of using metal as a catalyst have a contamination problem due to the metal catalyst, and thus, device characteristics of the TFT may deteriorate.

SUMMARY

[0008] Aspects of the present invention provide a method of fabricating a polysilicon layer capable of reducing the amount of a metal catalyst remaining in a semiconductor layer crystallized using the metal catalyst, a TFT having improved electrical characteristics, a method of fabricating the same, an OLED display device, and a method of fabricating the same.

[0009] According to an aspect of the present invention, a method of fabricating a polysilicon layer includes: forming a buffer layer on a substrate; forming a metal catalyst layer on the buffer layer; diffusing a metal catalyst into the metal catalyst layer to the buffer layer; removing the metal catalyst layer; forming an amorphous silicon layer on the buffer layer; and annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer.

[0010] According to another aspect of the present invention, a thin film transistor includes: a substrate; a buffer layer disposed on the substrate; a semiconductor layer disposed on the buffer layer; a gate insulating layer disposed above both the substrate and the semiconductor layer; a gate electrode disposed on the gate insulating layer; a source electrode and a drain electrode both electrically connected to the semiconductor layer; and a metal silicide disposed between the buffer layer and the semiconductor layer.

[0011] A method of fabricating the thin film transistor, an organic light emitting diode display device including the same, and a method of fabricating the same are also provided.

[0012] Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] These and/or other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0014] FIGS. 1A to 1D are views explaining a method of fabricating a polysilicon layer in accordance with an embodiment of the present invention;

[0015] FIG. 1E is a photograph of a seed group region of a polysilicon layer crystallized by a metal catalyst;

[0016] FIG. 1F is a photograph of a seed group region of a polysilicon layer in accordance with aspects of the present invention;

[0017] FIG. 1G is a photograph of the polysilicon layer secco-etched in accordance with aspects of the present invention;

[0018] FIG. 1H is a photograph of a general polysilicon layer secco-etched by a metal catalyst;

[0019] FIG. 1I is a graph showing an energy dispersive x-ray (EDS) analysis result representing positions of the polysilicon and the seed in accordance with the present invention;

[0020] FIG. 1J is a graph showing an EDS analysis result representing positions of the polysilicon and the seed of a general polysilicon layer crystallized by a metal catalyst;

[0021] FIGS. 2A to 2E are views of a TFT in accordance with a second embodiment of the present invention;

[0022] FIGS. 3A to 3B are views of a TFT in accordance with a third embodiment of the present invention;

[0023] FIGS. 4A to 4C are views of a TFT in accordance with a fourth embodiment of the present invention; and

[0024] FIGS. 5A and 5B are views of an OLED display device in accordance with a fifth embodiment of the present invention.

**DETAILED DESCRIPTION OF THE
EMBODIMENTS**

[0025] Reference will now be made in detail to the present embodiments of the present invention, examples of which are

illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

[0026] As referred to herein, it is to be understood that where is stated herein that one element, film or layer is “formed on” or “disposed on” a second element, layer or film, the first element, layer or film may be formed or disposed directly on the second element, layer or film or there may be intervening elements, layers or films between the first element, layer or film and the second element, layer or film. Further, as used herein, the term “formed on” is used with the same meaning as “located on” or “disposed on” and is not meant to be limiting regarding any particular fabrication process.

[0027] FIGS. 1A to 1D are views explaining a crystallization process in accordance with an embodiment of the present invention. First, as shown in FIG. 1A, a buffer layer 110 is formed on a substrate 100 formed of glass or plastic. The buffer layer 110 is formed of a single layer or a combination layer selected from insulating layers such as a silicon oxide layer and a silicon nitride layer using chemical vapor deposition (CVD) or physical vapor deposition (PVD). However, aspects of the present invention are not limited thereto and the buffer layer 110 may be formed of other suitable materials or combinations thereof. A lower layer is formed of the silicon nitride layer to prevent diffusion of impurities generated by the substrate, and an upper layer, formed as the buffer layer 110 diffusing a metal catalyst, is formed of the silicon oxide layer in consideration of adhesion characteristics to amorphous silicon to be deposited.

[0028] The buffer layer 110 prevents diffusion of moisture or impurities generated from the substrate 100 or provides the metal catalyst diffused into the buffer layer to crystallize the silicon layer through annealing, thereby forming a metal silicide to crystallize the silicon layer. The buffer layer 110 is formed to a thickness of 10 Å to 5000 Å. When the thickness is larger than 5000 Å, the substrate 100 may be bent or shrunk during the annealing for crystallization, and when the thickness is smaller than 10 Å, the amount of the metal catalyst present in the buffer layer is reduced. Therefore, the amount of the metal catalyst diffused into an amorphous silicon layer to be formed later is also reduced, making it difficult to crystallize the polysilicon layer.

[0029] Referring to FIG. 1B, the metal catalyst is deposited on the buffer layer 110 to form a metal catalyst layer 115. The metal catalyst includes any one selected from the group consisting of Ni, Pd, Ag, Au, Al, Sn, Sb, Cu, Tr, and Cd. However, aspects of the present invention are not limited thereto, and other suitable materials may be used as the metal catalyst. In addition, the metal catalyst layer 115 is formed on the buffer layer 110 at a surface density of 10^{11} to 10^{15} atoms/cm². When the surface density of the metal catalyst is smaller than 10^{11} atoms/cm², the amount of seeds, or, in other words, cores for crystallization, is too small to crystallize the amorphous silicon layer into the polysilicon layer through SGS. When the surface density of the metal catalyst is larger than 10^{15} atoms/cm², the amount of the metal catalyst diffused into the amorphous silicon layer is increased and the amount of the remaining metal catalyst is also increased, thus deteriorating characteristics of the semiconductor layer formed by patterning the polysilicon layer.

[0030] Next, the substrate 100 is annealed in an arrow direction 10 to diffuse the metal catalyst of the metal catalyst

layer 115 into the buffer layer 110, and then, the metal catalyst layer 115 is removed. The annealing is performed at a temperature of 200° C. to 900° C. for several seconds to several hours to diffuse a metal catalyst A. In this case, it is possible to prevent deformation of the substrate due to excessive annealing when the annealing is performed at that temperature for that time, thereby reducing manufacturing costs and increasing a yield. The annealing uses any one of a furnace process, a rapid thermal annealing (RTA) process, an ultraviolet (UV) process, and a laser process.

[0031] Referring to FIG. 1C, an amorphous silicon layer 120A is formed on the buffer layer 110 including the metal catalyst A. When the substrate 100 is annealed, the amorphous silicon layer 120A is crystallized into a polysilicon layer 120B by the metal catalyst A remaining in the buffer layer 110. That is, the metal catalyst A diffused into the buffer layer 110 is bonded to silicon of the amorphous silicon layer 120A to form a metal silicide, and the metal silicide forms a seed, which is a core for crystallization. As a result, crystal grows from the seed to crystallize the amorphous silicon layer into the polysilicon layer.

[0032] Before forming the amorphous silicon layer 120A, an insulating layer formed of a silicon nitride layer, a silicon oxide layer, or a combination layer thereof, is formed on the buffer layer 110. However, aspects of the present invention are not limited thereto, and the insulating layer may not be formed on the buffer layer 110. When the insulating layer is formed as described above, since the amount of the metal catalyst A diffused into the amorphous silicon layer 120A is adjustable, it is possible to increase the size of the crystal and reduce the amount of the metal catalyst in the semiconductor layer 120 (see FIG. 2D).

[0033] Although the crystallization has been described as being performed after removing the metal catalyst layer 115 and before annealing the amorphous silicon layer 120A, the crystallization may be performed without removing the metal catalyst layer 115.

[0034] Referring to FIG. 1D, the metal catalyst A, which is also referred to as a seed A, formed as described above is disposed between the polysilicon layer 120B and the buffer layer 110 so that the seed A is disposed up to approximately 10 nm below where the buffer layer 110 and the substrate 100 contact. In addition, a crystal grows from the seed A to crystallize the amorphous silicon layer 120A into the polysilicon layer 120B. Thereby, the polysilicon layer 120B, in accordance with aspects of the present invention, is manufactured.

[0035] FIG. 1E is a cross-sectional transmission electron micrograph (TEM) photograph of a seed group region of the polysilicon layer 120B crystallized by the metal catalyst A in the buffer layer 110 as described above. FIG. 1F is a cross-sectional TEM photograph of a seed group region of the polysilicon layer 120B crystallized by the metal catalyst A diffused from an upper part of the amorphous silicon layer 120A through a conventional SGS method.

[0036] As shown in FIGS. 1E and 1F, it is appreciable that the polysilicon layer, in accordance with aspects of the present invention, includes a seed group region having a plane shape in which seeds are collected and formed at an interface between the buffer layer 110 and the polysilicon layer 120B. Furthermore, it is appreciable that a triangular cone shaped seed group region is disposed at an interface between the buffer layer 110 and the polysilicon layer 120B formed through crystallization by the metal catalyst A diffused from an upper portion of the conventional amorphous silicon layer

120A, for example, SGS. The triangular cone shaped seed group occurs because the annealing for diffusion of the metal catalyst A after deposition on the buffer layer **110** can provide a seed group region having a widely spread shape according to aspects of the present invention. In contrast, in the conventional SGS method, the metal catalyst A is directly diffused downward from the upper surface to be gathered between the polysilicon layer **120B** and the buffer layer **110**, thus forming a seed group region different from the crystallization according to aspects of the present invention.

[0037] FIG. 1G is a photograph in which the polysilicon layer **120B**, in accordance with aspects of the present invention, is secco-etched. FIG. 1H is a photograph in which the polysilicon layer **1108**, having the metal catalyst A diffused from an upper portion of the amorphous silicon layer **120A** to be crystallized, is secco-etched. Comparing FIG. 1G with FIG. 1H, while the metal catalyst A, or seed A, in a grain boundary cannot be observed from FIG. 1G, the seed A in the grain boundary can be clearly observed from FIG. 1H by the conventional SGS method. The grain boundary cannot be observed in FIG. 1G because the crystallization, according to aspects of the present invention, provides the seed A included in the interface of the buffer layer **110** and the amorphous silicon layer **120A** and the seed A is widely spread in the buffer layer **110**.

[0038] FIG. 1I is a graph showing an energy dispersive x-ray (EDS) analysis result in the seed group region of the polysilicon layer **120B** in accordance with aspects of the present invention, and FIG. 1J is a graph showing the EDS analysis result in the seed group region of the general polysilicon layer X crystallized by a metal catalyst A (see FIG. 1D). As described above, it is appreciable that while a metal silicide Z, in accordance with aspects of the present invention, is present at a position about 10 nm in a buffer layer Y when positions of the polysilicon layer X, the metal silicide Z and the buffer layer Y in FIG. 1I are observed, a large amount of the metal silicide Z is present only in the polysilicon layer X and the interface in FIG. 1J, but is not present in the buffer layer Y.

[0039] Therefore, the polysilicon layer X crystallized by the metal catalyst A (see FIG. 1D) diffused into the buffer layer Y, in accordance with aspects the present invention, is different in shape of a polysilicon layer, is different with respect to a seed and is also different with respect to a shape of a seed group region existing in a silicon layer and a buffer layer of a conventional method of crystallization. Thus, according to aspects of the present invention, it is possible to form a high quality semiconductor device.

[0040] FIGS. 2A to 2E are views of a TFT in accordance with a second embodiment of the present invention, which is formed using the method of fabricating the polysilicon layer similar to the first embodiment. Referring to FIG. 2A, a substrate **100** is prepared, and a buffer layer **110** is formed on the substrate **100**.

[0041] Referring to FIG. 2B, a metal catalyst layer **115** is formed on the buffer layer **110**, and then, the substrate **100** is annealed to diffuse a metal catalyst A (see FIG. 2C) in the metal catalyst layer **115** into the buffer layer **110**.

[0042] Referring to FIG. 2C, after removing the metal catalyst layer **115**, an amorphous silicon layer **120A** is formed on the buffer layer **110** and then annealed to crystallize the amorphous silicon layer **120A** into a polysilicon layer (not shown) using the metal catalyst A present in the buffer layer **110**.

[0043] Similar to the first embodiment, before forming the amorphous silicon layer **120A**, a silicon oxide layer, a silicon nitride layer or a combination layer thereof is formed, and then, the amorphous silicon layer **120a** is formed and annealed to be crystallized. Although the crystallization has been described as being performed after removing the metal catalyst layer **115** and before annealing the amorphous silicon layer, aspects of the present invention are not limited thereto and the crystallization may be performed without removing the metal catalyst layer.

[0044] Referring to FIG. 2D, the crystallized polysilicon layer is patterned to form a semiconductor layer **120**. Then, a gate insulating layer **130** is formed on the entire surface of the substrate **100**, and a gate electrode **140** is formed to correspond to the semiconductor layer **120**. The gate insulating layer **130** is a silicon oxide layer, a silicon nitride layer, or a combination layer thereof. However, aspects of the present invention are not limited thereto and the gate insulating layer **130** may be formed of other suitable materials. The gate electrode **140** is formed on the gate insulating layer **130** by forming a single layer of aluminum or an aluminum alloy such as aluminum-neodymium (Al—Nd), or a combination layer, in which an aluminum alloy is deposited on a chromium (Cr) or molybdenum (Mo) alloy, as a gate electrode metal layer (not shown), and etching the gate electrode metal layer through photolithography and etching. However, aspects of the present invention are not limited thereto, and the gate electrode **140** may be formed of other suitable materials.

[0045] Referring to FIG. 2E, an interlayer insulating layer **150** is formed on the entire surface of the substrate **100**. Source electrode **160a** and drain electrode **160b** are electrically connected to the semiconductor layer **120** and are formed to complete a thin-film transistor (TFT) in accordance with the second embodiment of the present invention.

[0046] A third embodiment relates to a TFT formed using the method of fabricating a polysilicon layer similar to that of the first embodiment. FIGS. 3A and 3B show the TFT. First, referring to FIG. 3A, a substrate **200** is prepared, and a buffer layer **210** is formed on the substrate **200**. Then, a semiconductor layer **220** formed of the polysilicon layer (not shown) crystallized using the method of the first embodiment is formed. Since the polysilicon layer (not shown) formed by a method similar to that of the first embodiment is patterned to form the semiconductor layer **220**, a seed A is between the semiconductor layer **220** and the buffer layer **210**. Next, a portion of the semiconductor layer **220** is opened to form source electrode **230a** and drain electrode **230b** connected to the semiconductor layer **220**.

[0047] Referring to FIG. 3B, a gate insulating layer **240** is formed on the entire surface of the substrate **200**. Then, a gate electrode **250** is formed to correspond to the semiconductor layer **220**, and an interlayer insulating layer **260** is formed above the entire surface of the substrate **200**, completing a TFT in accordance with the third embodiment of the present invention.

[0048] FIGS. 4A and 4B are views of a TFT formed using the method of fabricating a polysilicon layer in accordance with the first embodiment of the present invention.

[0049] Referring to FIG. 4A, a buffer layer **310**, into which a metal catalyst is diffused through a method similar to that as described with respect to the embodiment of FIG. 1, is formed on a substrate **300**. Then, the surface of the buffer layer **310** is cleaned with ozone (O₃).

[0050] Referring to FIG. 4B, a semiconductor layer 320 formed of the polysilicon layer (not shown) through a method similar to that as described with respect to the embodiment of FIG. 1 is formed on the buffer layer 310. Since an oxide layer is formed on the surface of the buffer layer 310 due to the O₃ cleaning, it is possible to form a polysilicon layer (not shown) having a larger grain size by functioning as a diffusion layer between the buffer layer 310 and an amorphous silicon layer crystallized to form the semiconductor layer 320 and adjusting the metal catalyst diffused into an amorphous silicon layer (not shown).

[0051] Then, a gate insulating layer 330, a gate electrode 340, an interlayer insulating layer 350, and source electrode 360a and drain electrode 360b are formed on the substrate 300 to complete a TFT in accordance with the fourth embodiment of the present invention. The fourth embodiment is manufactured in a manner similar to that as described with respect to as the second embodiment, except that the fourth embodiment further includes cleaning the buffer layer using O₃.

[0052] FIGS. 5A to 5B are views of an organic light emitting diode (OLED) display device in accordance with a fifth embodiment of the present invention. The fifth embodiment relates to an OLED display device including the TFT formed in the second embodiment, and thus, detailed descriptions thereof will be omitted. Referring to FIG. 5A, a passivation layer 170 is formed on the entire surface of a substrate 100 including the TFT formed in the first embodiment, and a planarization layer 175 is formed on the passivation layer 170. However, aspects of the present invention are not limited thereto and the passivation layer 170 may be omitted. Next, a first electrode 180 is formed to be electrically connected to one of the source electrode 160a and the drain electrode 160b of the TFT.

[0053] Referring to FIG. 5B, a pixel defining layer 185 opening a portion of the first electrode 180 and defining a pixel is formed. Then, an organic layer 190 including an organic emission layer (not shown) is formed on the first electrode 180. Although not shown, the organic layer 190 may further include a hole injection layer, a hole transport layer, an electron transport layer, and other similar features. A second electrode 195 is formed on an entire surface of the substrate 100 to complete an OLED display device in accordance with the fifth embodiment of the present invention.

[0054] As can be seen from the foregoing, after diffusing a metal catalyst into a buffer layer, a metal silicide is formed at an interface of an amorphous silicon layer to perform crystallization using the metal catalyst in the buffer layer so that the amounts of the metal catalyst and the metal silicide in the amorphous silicon layer can be minimized, and thus it is possible to provide a TFT having improved characteristics of a semiconductor layer, and an OLED display device including the same.

[0055] Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

What is claimed is:

1. A method of fabricating a polysilicon layer, comprising: forming a buffer layer on a substrate; forming a metal catalyst layer on the buffer layer; diffusing a metal catalyst in the metal catalyst layer into the buffer layer; removing the metal catalyst layer; forming an amorphous silicon layer on the buffer layer; and

annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer.

2. The method according to claim 1, wherein the metal catalyst includes any one selected from the group consisting of Ni, Pd, Ag, Au, Al, Sn, Sb, Cu, Tr and Cd.

3. The method according to claim 1, wherein the buffer layer is formed to a thickness of about 10 Å to about 5000 Å.

4. The method according to claim 1, wherein the buffer layer is formed of any one selected from a silicon oxide layer, a silicon nitride layer, and a combination layer thereof.

5. The method according to claim 1, wherein the metal catalyst is diffused into the buffer layer through the annealing of the substrate.

6. The method according to claim 1, wherein the annealing is performed after the forming of the amorphous silicon layer on the buffer layer.

7. The method according to claim 1, wherein crystallizing the amorphous silicon layer is performed by growing a crystal from a metal silicide disposed between the buffer layer and the amorphous silicon layer.

8. The method according to claim 1, further comprising, after removing the metal catalyst layer, forming a silicon oxide layer, a silicon nitride layer, or a combination layer thereof on the buffer layer.

9. A thin film transistor comprising:

- a substrate;
- a buffer layer disposed on the substrate;
- a semiconductor layer disposed on the buffer layer;
- a gate insulating layer disposed above both the substrate and the semiconductor layer;
- a gate electrode disposed on the gate insulating layer;
- a source electrode and a drain electrode both electrically connected to the semiconductor layer; and
- a metal silicide disposed between the buffer layer and the semiconductor layer.

10. The thin film transistor according to claim 9, wherein the buffer layer includes a metal catalyst therein.

11. The thin film transistor according to claim 10, wherein the metal catalyst includes any one selected from the group consisting of Ni, Pd, Ag, Au, Al, Sn, Sb, Cu, Tr and Cd.

12. The thin film transistor according to claim 9, wherein the buffer layer has a thickness of about 10 Å to about 5000 Å.

13. The thin film transistor according to claim 9, wherein the buffer layer is formed of any one selected from a silicon oxide layer, a silicon nitride layer, and a combination layer thereof.

14. The thin film transistor according to claim 9, wherein a seed group region, in which the metal silicide is gathered, has a plane shape.

15. The thin film transistor according to claim 14, wherein the metal silicide is disposed up to 10 nm below an upper side of the buffer layer.

16. The thin film transistor according to claim 9, further comprising any one of a silicon oxide layer, a silicon nitride layer, and a combination layer thereof, disposed between the buffer layer and the semiconductor layer.

17. A method of fabricating a thin film transistor, comprising:

- forming a buffer layer on a substrate;
- forming a metal catalyst layer on the buffer layer;
- diffusing a metal catalyst in the metal catalyst layer into the buffer layer;
- removing the metal catalyst layer;
- forming an amorphous silicon layer on the buffer layer;

annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer;
 patterning the polysilicon layer to form a semiconductor layer;

forming a gate insulating layer on the substrate;
 forming a gate electrode on the gate insulating layer; and
 forming source and drain electrodes insulated from the gate electrode and connected to the semiconductor layer, wherein the annealing is performed after forming the amorphous silicon layer on the buffer layer.

18. The method according to claim 17, wherein the metal catalyst layer includes a metal catalyst at a surface density of 10^{11} atoms/cm² to 10^{15} atoms/cm².

19. The method according to claim 17, wherein the buffer layer is formed to a thickness of about 10 Å to about 5000 Å.

20. The method according to claim 17, wherein the metal catalyst is diffused into the buffer layer through the annealing of the substrate.

21. The method according to claim 17, wherein the annealing is performed at a temperature of about 200° C. to about 900° C.

22. The method according to claim 21, further comprising, after removing the metal catalyst layer, forming a silicon oxide layer, a silicon nitride layer, or a combination layer thereof on the buffer layer.

23. A thin film transistor comprising:

a substrate;

a buffer layer disposed on the substrate;

a semiconductor layer disposed on the buffer layer;

a source electrode and a drain electrode disposed on respective sides of the semiconductor layer so as to expose an opening portion of the semiconductor layer;

a gate insulating layer disposed on the substrate, the source electrode and the drain electrode;

a gate electrode corresponding to the semiconductor layer and disposed on the gate insulating layer; and

a metal silicide is disposed between the buffer layer and the semiconductor layer.

24. The thin film transistor according to claim 23, wherein the buffer layer includes a metal catalyst therein.

25. The thin film transistor according to claim 23, wherein the metal catalyst includes any one selected from the group consisting of Ni, Pd, Ag, Au, Al, Sn, Sb, Cu, Tr and Cd.

26. The thin film transistor according to claim 23, wherein the buffer layer has a thickness of about 10 Å to about 5000 Å.

27. The thin film transistor according to claim 23, wherein the buffer layer is any one selected from a silicon oxide layer, a silicon nitride layer, and a combination layer thereof.

28. The thin film transistor according to claim 23, wherein a seed group region, in which the metal silicide is gathered, has a plane shape.

29. The thin film transistor according to claim 28, wherein the metal silicide is disposed up to 10 nm below an upper side of the buffer layer.

30. The thin film transistor according to claim 23, further comprising a silicon oxide layer, a silicon nitride layer, or a combination layer thereof, disposed between the buffer layer and the semiconductor layer.

31. A method of fabricating a thin film transistor, comprising:

forming a buffer layer on a substrate;

forming a metal catalyst layer on the buffer layer;

cleaning the substrate using ozone;

removing the metal catalyst layer;

forming an amorphous silicon layer on the buffer layer;
 annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer;

patterning the polysilicon layer to form a semiconductor layer;

forming a gate insulating layer on the substrate;

forming a gate electrode on the gate insulating layer; and

forming a source electrode and a drain electrode, both insulated from the gate electrode and both connected to the semiconductor layer,

wherein the annealing is performed after forming the amorphous silicon layer on the buffer layer.

32. The method according to claim 31, wherein the metal catalyst layer includes a metal catalyst at a surface density of 10^{11} atoms/cm² to 10^{15} atoms/cm².

33. The method according to claim 31, wherein the buffer layer is formed to a thickness of about 10 Å to about 5000 Å.

34. The method according to claim 31, wherein the metal catalyst is diffused into the buffer layer through the annealing of the substrate.

35. The method according to claim 31, wherein the annealing is performed at a temperature of about 200° C. to about 900° C.

36. The method according to claim 31, further comprising, after removing the metal catalyst layer, forming a silicon oxide layer, a silicon nitride layer, or a combination layer thereof on the buffer layer.

37. An organic light emitting diode display device comprising:

a substrate;

a buffer layer disposed on the substrate;

a semiconductor layer disposed on the buffer layer;

a gate insulating layer disposed on the substrate including the semiconductor layer;

a gate electrode disposed on the gate insulating layer;

a source electrode and a drain electrode both electrically connected to the semiconductor layer; and

a metal silicide disposed between the buffer layer and the semiconductor layer.

38. The organic light emitting diode display device according to claim 37, wherein the buffer layer includes a metal catalyst therein.

39. The organic light emitting diode display device according to claim 37, wherein the metal catalyst includes any one selected from the group consisting of Ni, Pd, Ag, Au, Al, Sn, Sb, Cu, Tr and Cd.

40. The organic light emitting diode display device according to claim 37, wherein the buffer layer has a thickness of about 10 Å to about 5000 Å.

41. The organic light emitting diode display device according to claim 37, wherein the buffer layer is formed of any one selected from a silicon oxide layer, a silicon nitride layer, and a combination layer thereof.

42. The organic light emitting diode display device according to claim 37, wherein a seed group region, in which the metal silicide is gathered, has a plane shape.

43. The organic light emitting diode display device according to claim 37, wherein the metal silicide is disposed up to 10 nm below an upper side of the buffer layer.

44. The organic light emitting diode display device according to claim 37, further comprising a silicon oxide layer, a silicon nitride layer, or a combination layer thereof, disposed between the buffer layer and the semiconductor layer.

45. A method of fabricating an organic light emitting diode display device, comprising:

- forming a buffer layer on a substrate;
- forming a metal catalyst layer on the buffer layer;
- removing the metal catalyst layer;
- forming an amorphous silicon layer on the buffer layer;
- annealing the substrate to crystallize the amorphous silicon layer into a polysilicon layer;
- patterning the polysilicon layer to form a semiconductor layer;
- forming a gate insulating layer on the substrate;
- forming a gate electrode on the gate insulating layer;
- forming a source electrode and a drain electrode both insulated from the gate electrode and both connected to the semiconductor layer; and
- forming a first electrode electrically connected to one of the source electrode, the drain electrode, an organic layer, and a second electrode,

wherein the annealing is performed after the forming of the amorphous silicon layer on the buffer layer.

46. The method according to claim **45**, wherein the metal catalyst layer includes a metal catalyst at a surface density of 10^{11} atoms/cm² to 10^{15} atoms/cm².

47. The method according to claim **45**, wherein the buffer layer is formed to a thickness of about 10 Å to about 5000 Å.

48. The method according to claim **45**, wherein the metal catalyst is diffused into the buffer layer through the annealing of the substrate.

49. The method according to claim **45**, wherein the annealing is performed at a temperature of about 200° C. to about 900° C.

50. The method according to claim **45**, further comprising, after removing the metal catalyst layer, forming a silicon oxide layer, a silicon nitride layer, or a combination layer thereof on the buffer layer.

* * * * *

专利名称(译)	制造多晶硅层的方法，薄膜晶体管，包括该方法的有机发光二极管显示装置及其制造方法		
公开(公告)号	US20110121309A1	公开(公告)日	2011-05-26
申请号	US12/890002	申请日	2010-09-24
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星移动显示器有限公司.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE DONG HYUN LEE KI YONG SEO JIN WOOK YANG TAE HOON CHUNG YUN MO PARK BYOUNG KEON LEE KIL WON PARK JONG RYUK CHOI BO KYUNG SO BYUNG SOO		
发明人	LEE, DONG-HYUN LEE, KI-YONG SEO, JIN-WOOK YANG, TAE-HOON CHUNG, YUN-MO PARK, BYOUNG-KEON LEE, KIL-WON PARK, JONG-RYUK CHOI, BO-KYUNG SO, BYUNG-SOO		
IPC分类号	H01L51/50 H01L27/12 H01L33/08 H01L21/84 H01L21/20		
CPC分类号	H01L21/02488 H01L21/02532 H01L29/78675 H01L29/66757 H01L29/78603 H01L21/02672 H01L21/0206 H01L21/02491 H01L21/477 H01L27/1277 H01L27/3244		
优先权	1020090112770 2009-11-20 KR		
其他公开文献	US9070717		
外部链接	Espacenet USPTO		

摘要(译)

一种制造有机发光二极管 (OLED) 显示装置的方法，所述有机发光二极管显示装置具有包括多晶硅层的薄膜晶体管。制造多晶硅层的方法包括在基板上形成缓冲层，在缓冲层上形成金属催化剂层，将金属催化剂层扩散到金属催化剂层中，去除金属催化剂层，形成非晶硅在缓冲层上形成层，并对衬底进行退火以使非晶硅层结晶成多晶硅层。薄膜晶体管包括基板，设置在基板上的缓冲层，设置在缓冲层上的半导体层，设置在基板上和半导体层上的栅极绝缘层，设置在栅极绝缘层上的栅电极，源电极和漏电极都电连接到半导体层，金属硅化物设置在缓冲层和半导体层之间。

