



US 20020125487A1

(19) **United States**(12) **Patent Application Publication****Koyama et al.**(10) **Pub. No.: US 2002/0125487 A1**(43) **Pub. Date: Sep. 12, 2002**(54) **LIGHT EMITTING DEVICE, DISPLAY
DEVICE AND ELECTRONIC INSTRUMENT**

Mar. 6, 2002 (JP) 2002-060135

(75) Inventors: **Tomoko Koyama**, Suwa-shi (JP);
Takeo Kaneko, Misato-Mura (JP)Correspondence Address:
OLIFF & BERRIDGE, PLC
P.O. BOX 19928
ALEXANDRIA, VA 22320 (US)**Publication Classification**(51) **Int. Cl.⁷** **H01L 27/15**; **H01L 31/12**;
H01L 33/00(52) **U.S. Cl.** **257/79**(73) Assignee: **SEIKO EPSON CORPORATION**,
Tokyo (JP)(21) Appl. No.: **10/090,755**(22) Filed: **Mar. 6, 2002**(30) **Foreign Application Priority Data**

Mar. 9, 2001 (JP) 2001-066612

(57) **ABSTRACT**

A light emitting device has a substrate and a light-emitting section formed on the substrate. The light-emitting section includes a light-emitting layer in which light is generated by electro-luminescence, first and second electrodes used to apply electric charges to the light-emitting layer, and first and second dielectric multi-layered films between which the light-emitting layer is interposed. The first and second electrodes are disposed to avoid overlap with a light-emitting region in the light-emitting layer as viewed from a light emitting direction.

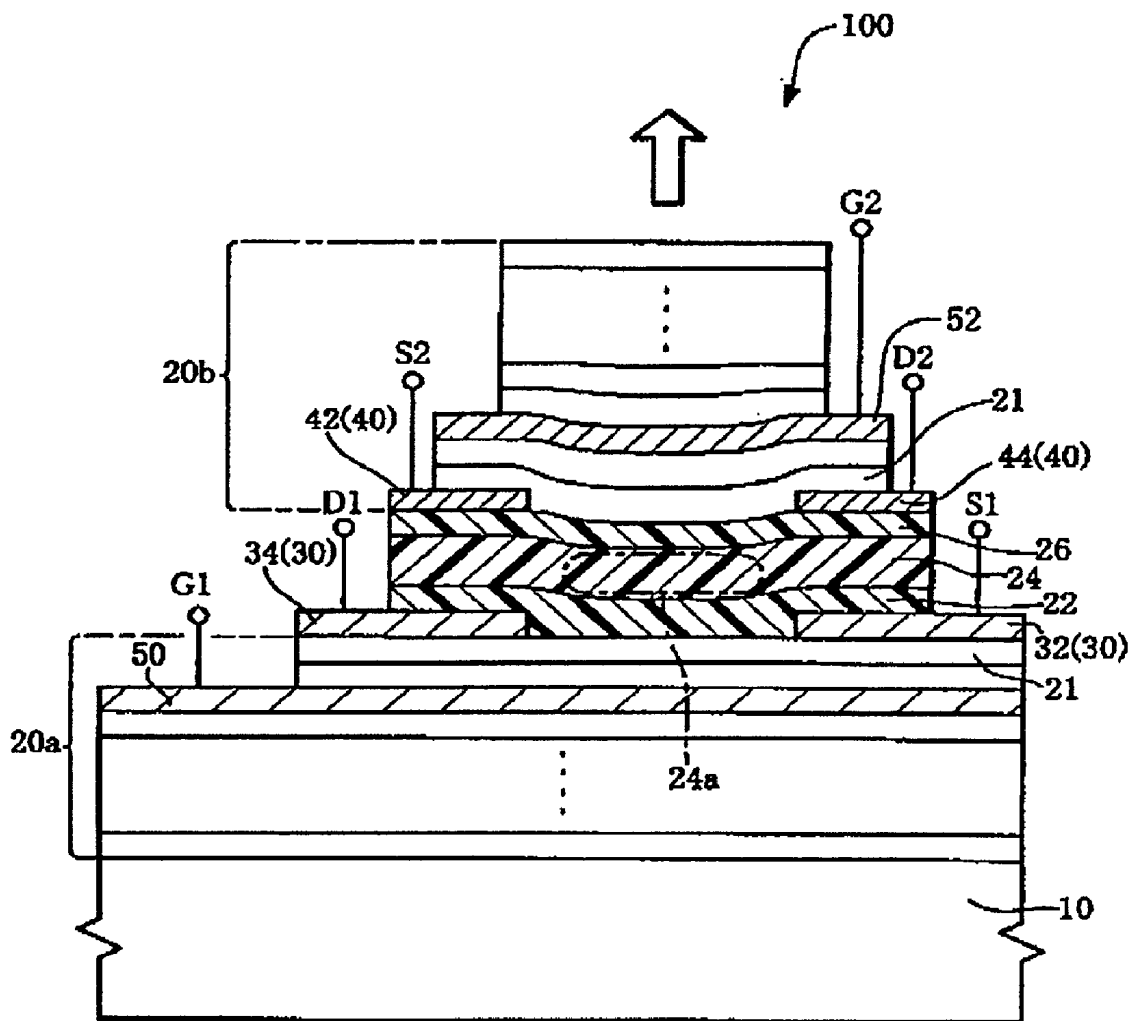


FIG. 1

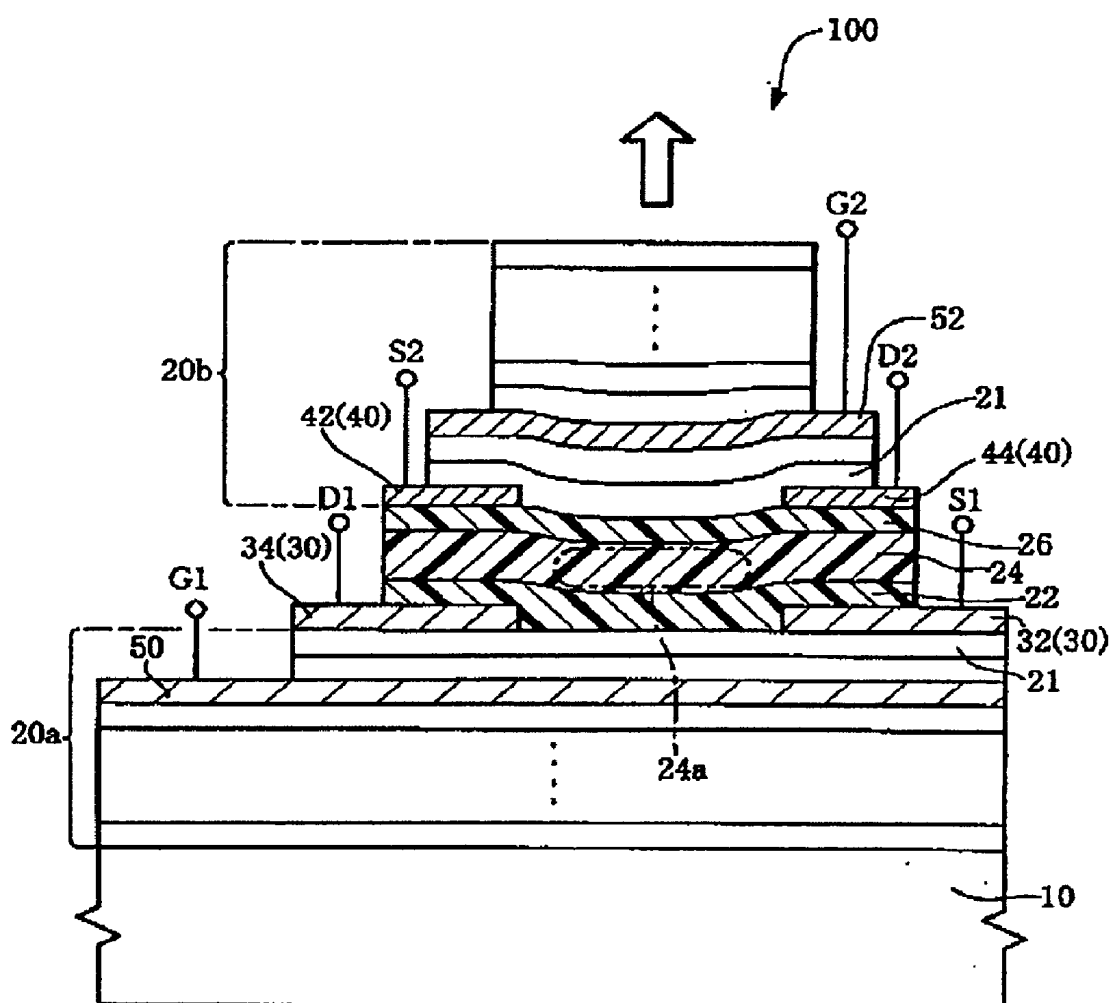


FIG. 4

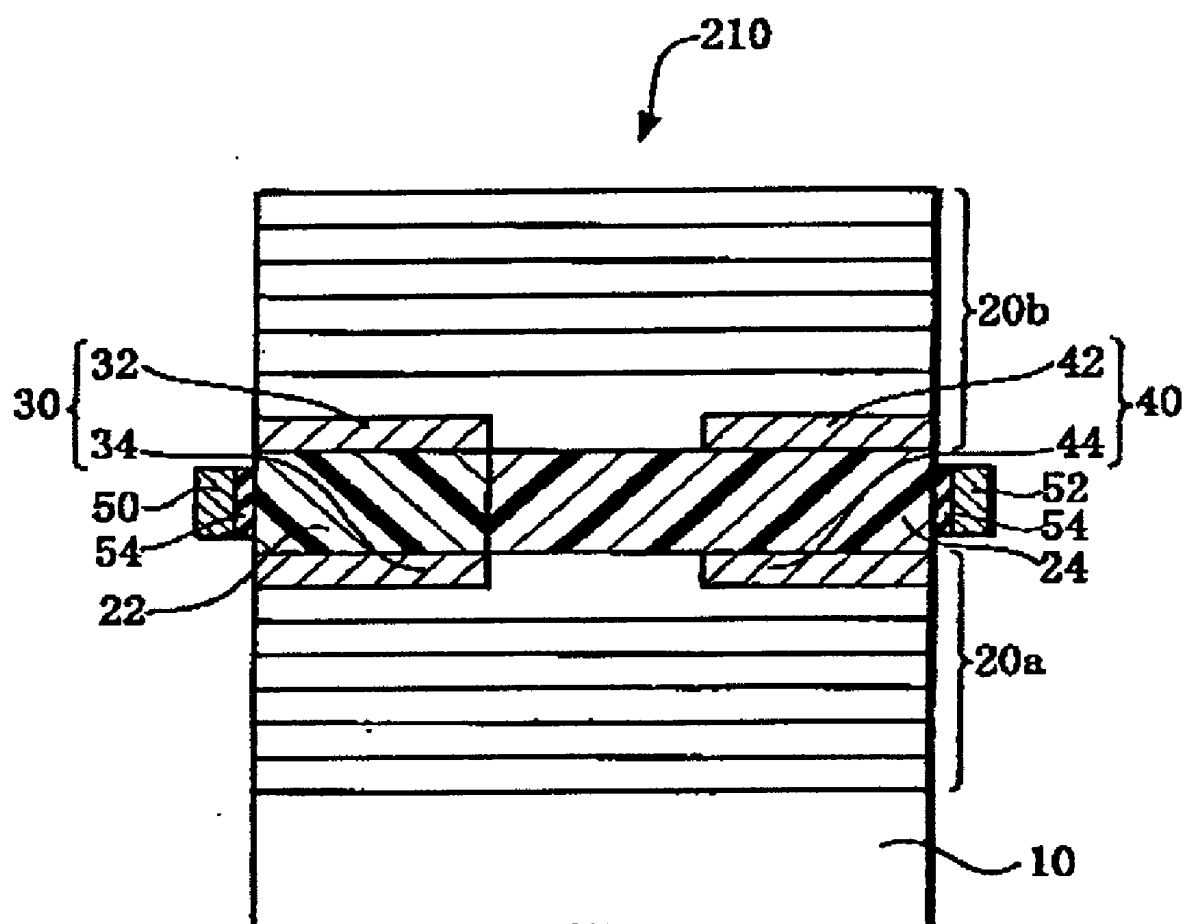


FIG. 5

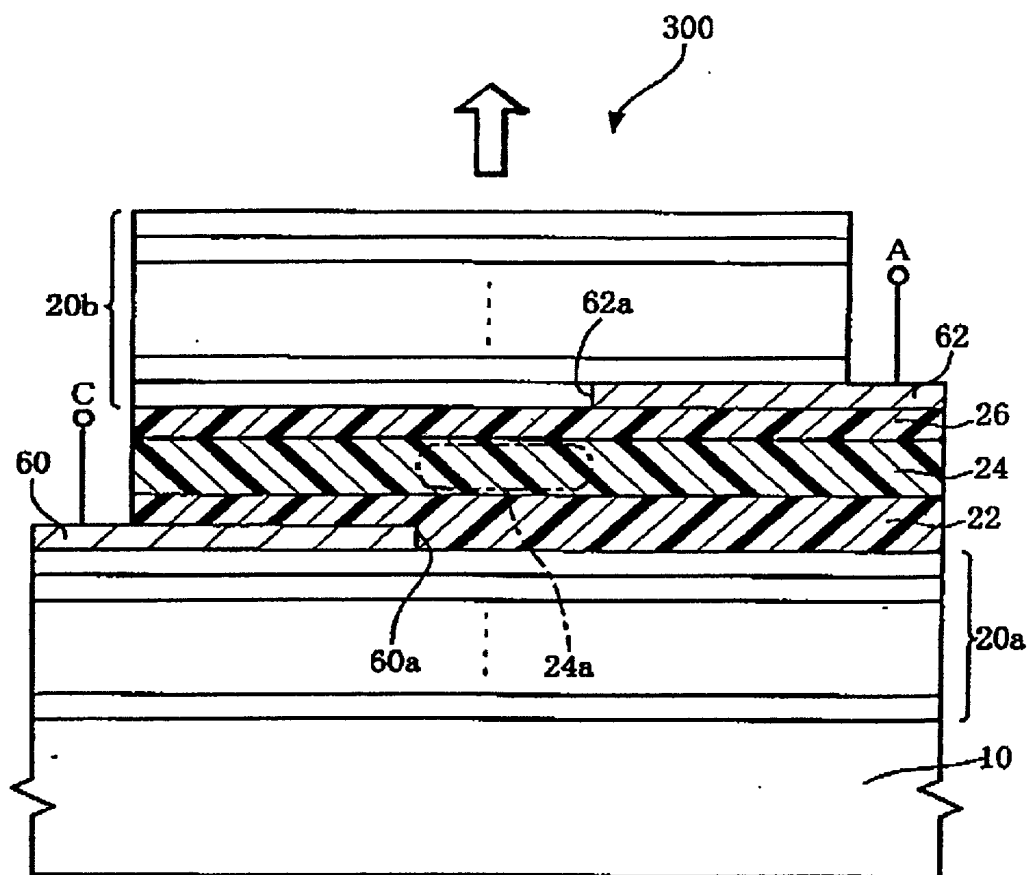


FIG. 6

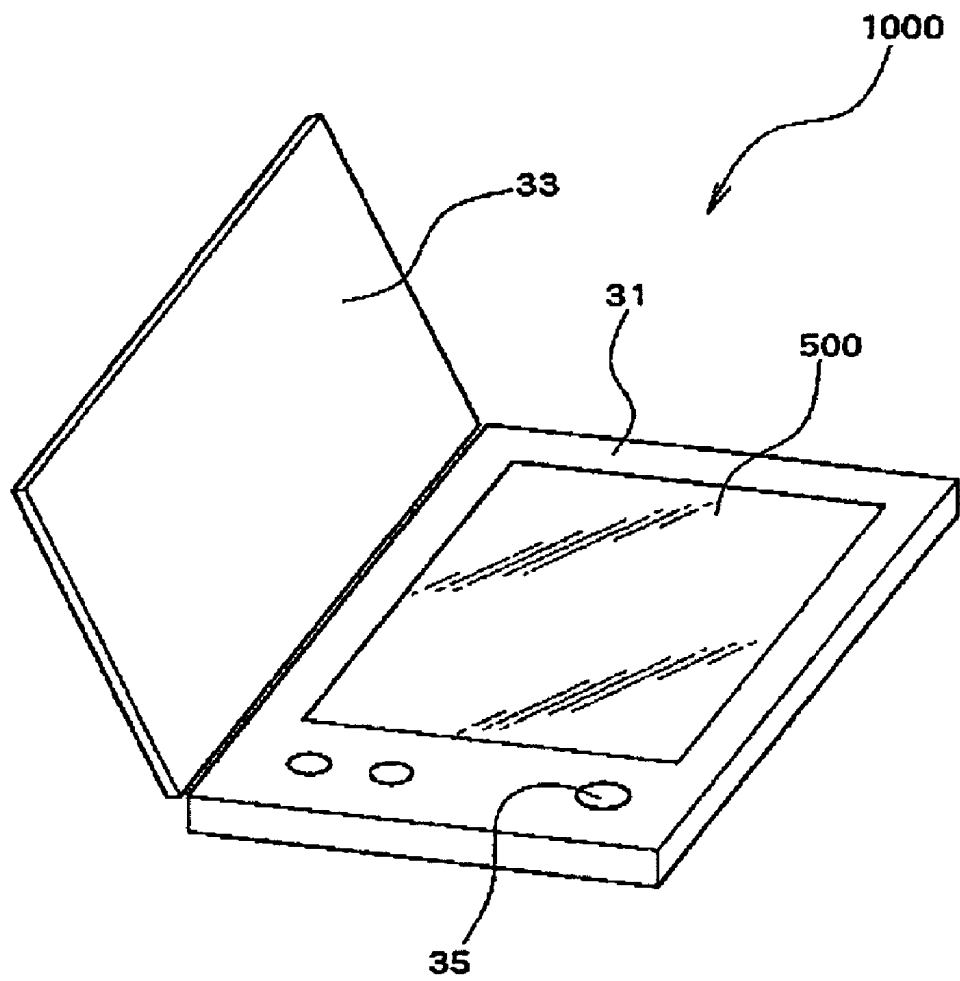


FIG. 7

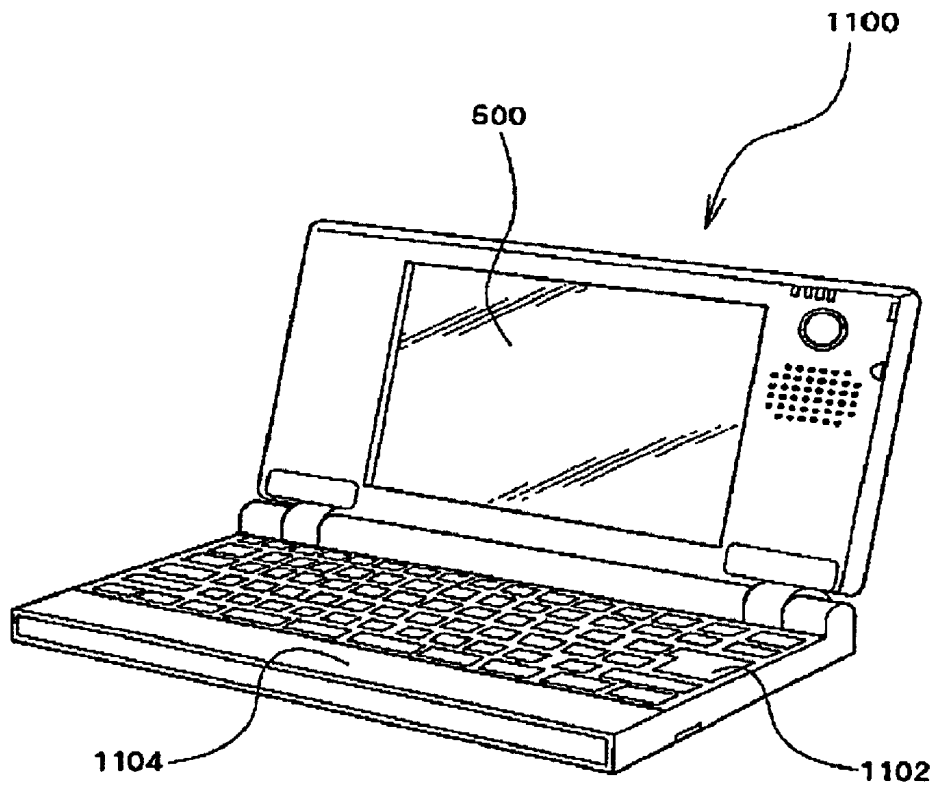


FIG. 8

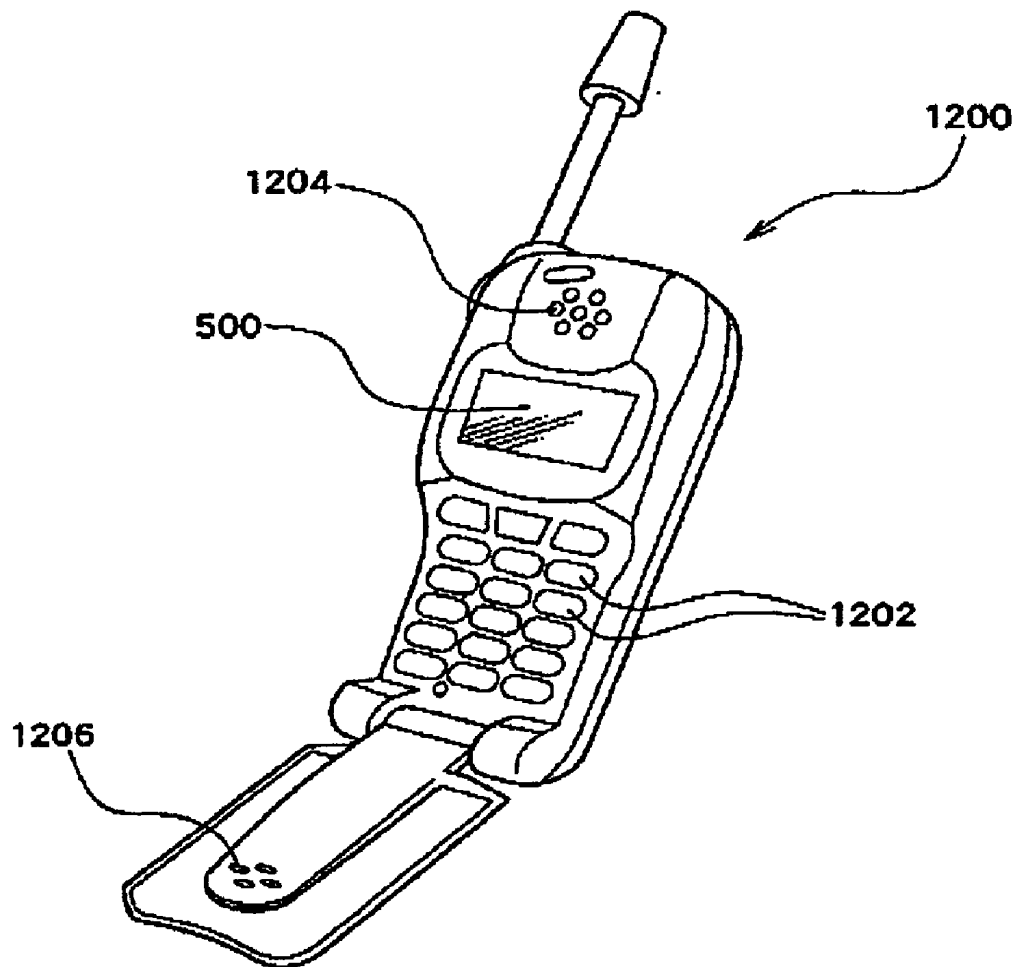


FIG. 9

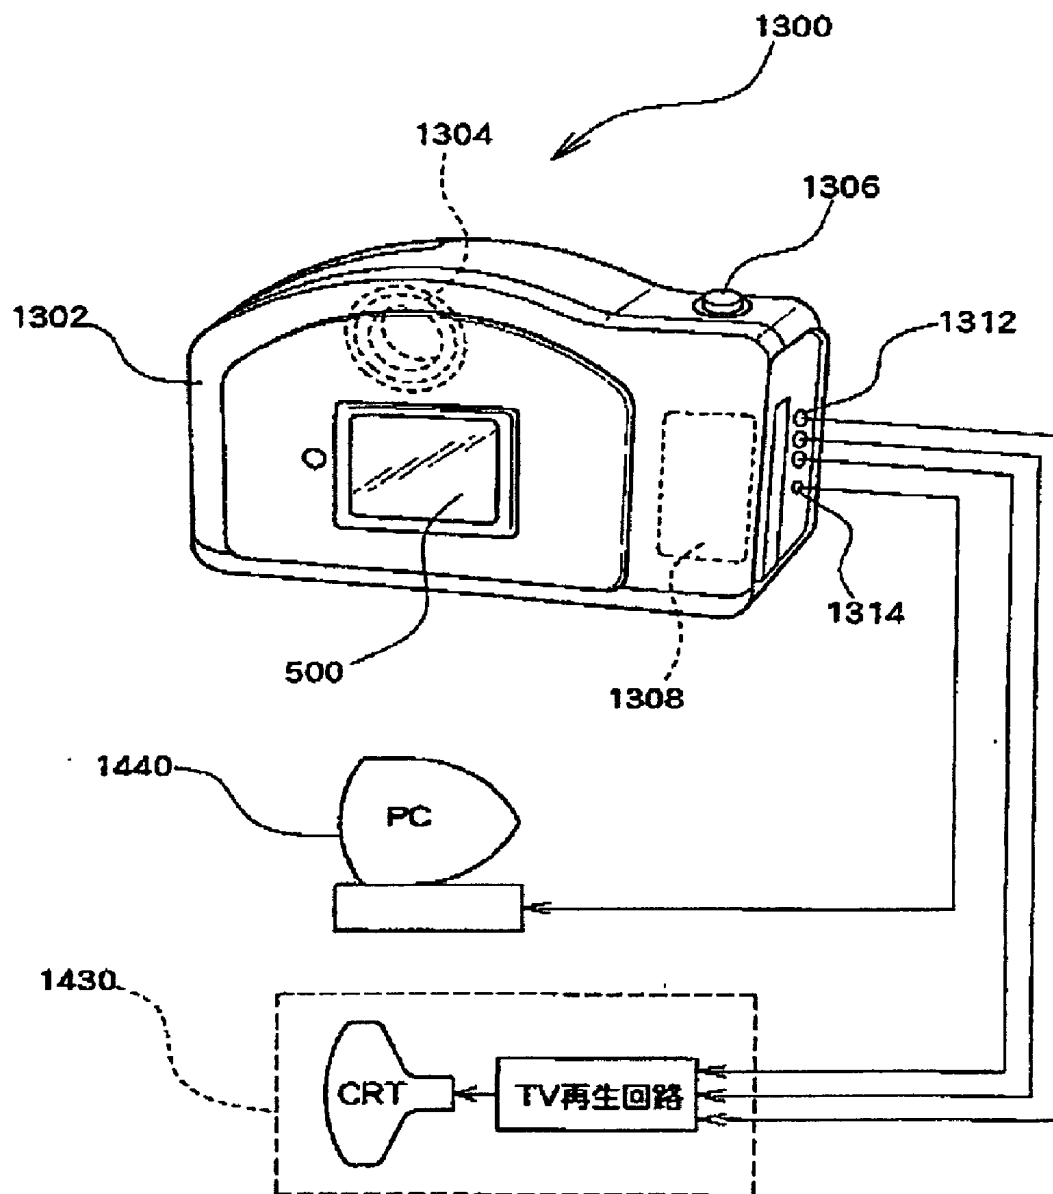


FIG. 10


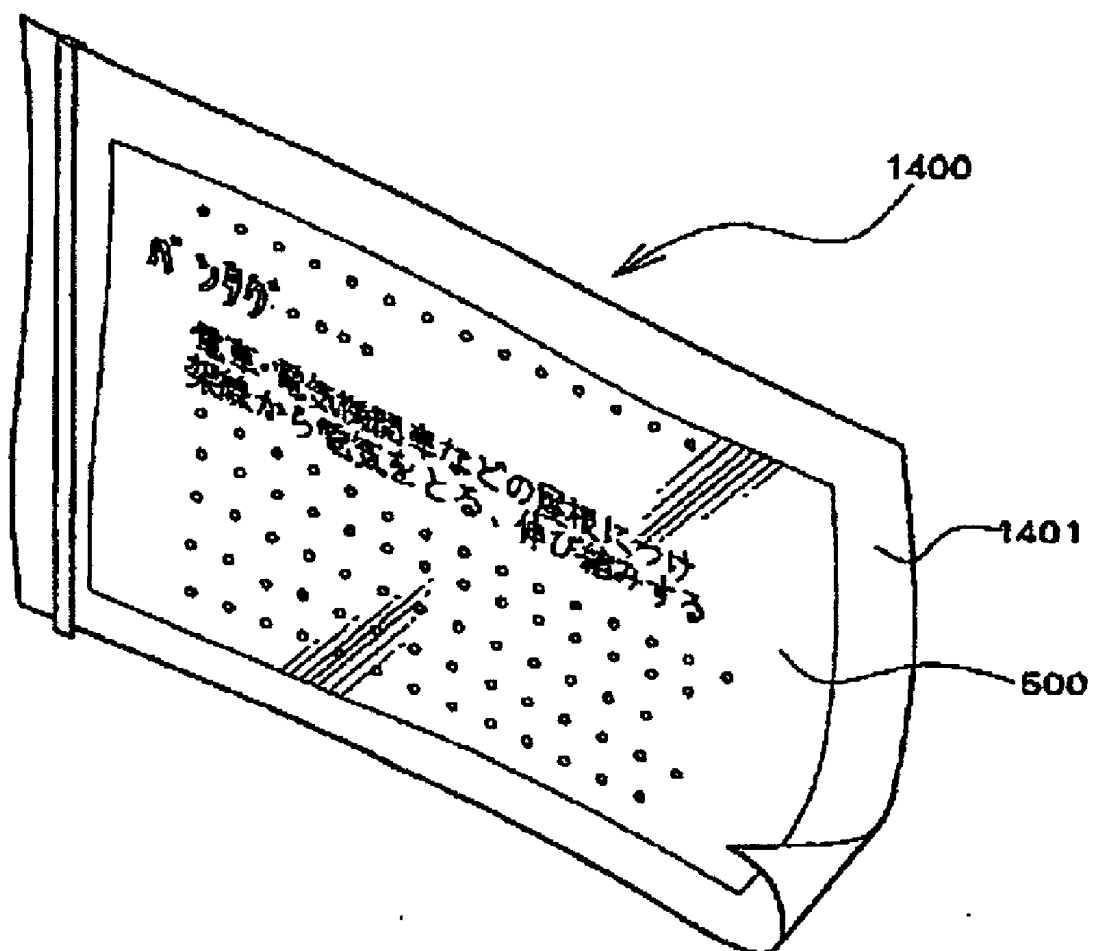


FIG. 11

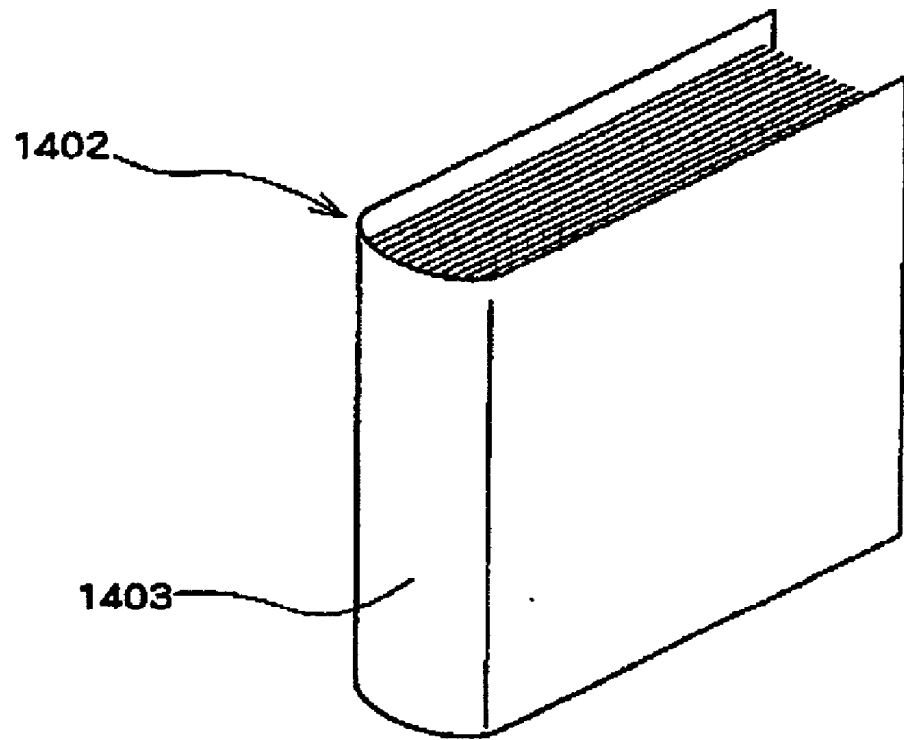

LIGHT EMITTING DEVICE, DISPLAY DEVICE AND ELECTRONIC INSTRUMENT

[0001] Japanese Patent Application No. 2001-66612, filed on Mar. 9, 2001, and Japanese Patent Application No. 2002-60135 filed on Mar. 6, 2002 are herein incorporated by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to a surface-emitting type of light emitting device using electro-luminescence (EL), and a display device and an electronic instrument using the light emitting device.

[0003] In an EL light emitting element using EL, isotropic light emission deteriorates the directivity so that the intensity of a light in a specific direction is low, and the emitted light cannot be utilized at high efficiency.

BRIEF SUMMARY OF THE INVENTION

[0004] The present invention may provide a light emitting device that is superior in wavelength selectivity of light to be emitted in a direction intersecting a substrate and capable of efficiently utilizing light.

[0005] The present invention may also provide a display device and an electronic instrument using the light emitting device.

[0006] According to one aspect of the present invention, there is provided a light emitting device having a substrate and a light-emitting section provided on the substrate, and emitting light in a direction intersecting the substrate,

[0007] wherein the light-emitting section comprises:

[0008] a light-emitting layer in which light is generated by electro-luminescence;

[0009] an electrode used to apply electric charges to the light-emitting layer; and

[0010] first and second dielectric multi-layered films between which the light-emitting layer is interposed; and

[0011] wherein the electrode is disposed to avoid overlap with at least part of a light-emitting region in the light-emitting layer, as viewed from a light emitting direction.

[0012] The first and second dielectric multi-layered films of this light emitting device enables to improve the wavelength selectivity. As a result, the light generated in the light-emitting layer by electro-luminescence emits at high efficiency in a narrow wavelength band corresponding to a high reflectance band of the first and second dielectric multi-layered films. In addition, since the electrode is disposed to avoid overlap with the light-emitting region in the light-emitting layer as viewed from the light emitting direction, absorption or scattering of light due to the electrode can be reduced. Therefore, the light generated in the light-emitting layer can be utilized at high efficiency.

[0013] "The electrode is disposed to avoid overlap with the light-emitting region in the light-emitting layer as viewed from the light emitting direction" means to dispose the electrode so that the light generated in the light-emitting region of the light-emitting layer is not obstructed by the

electrode as much as possible during transmission of the light between the first and second dielectric multi-layered films. More concretely, the electrode is not provided in a place overlapping the entirety or part of the light-emitting region as viewed from a direction in which the dielectric multi-layered films are piled (or a direction intersecting a surface of the substrate).

[0014] The present invention has various features as follows.

[0015] (A) As the electrode, the light emitting device may comprise: a first electrode formed of a pair of electrode layers used to apply electrons to the light-emitting layer; and a second electrode formed of a pair of electrode layers used to apply holes to the light-emitting layer. In this configuration, since the first and second electrodes respectively comprise a pair of electrode layers, one of a pair of the electrode layers can be used as a so-called source, while the other can be used as a so-called drain. The "source" is a region which supplies electrons and the "drain" is a region which supplies holes, for example. Accordingly, holes can be led to a hole transport layer from the drain to the source by applying a voltage so that the drain has positive potential to the source. Similarly, electrons can be led to an electron transport layer from the source to the drain by applying a voltage so that the source has negative electric potential to the drain.

[0016] (B) The first electrode may be connected to an electron transport layer and the second electrode may be connected to a hole transport layer. This configuration enables to apply a predetermined voltage to the electron transport layer by using the first electrode, and apply a predetermined voltage to the hole transport layer by using the second electrode. Since voltage can be separately applied to the electron transport layer and the hole transport layer, a large number of electrons and holes can be transported.

[0017] (C) The light emitting device may further comprise: a third electrode disposed to interpose an insulating layer between the first electrode and the third electrode; and a fourth electrode disposed to interpose another insulating layer between the second electrode and the fourth electrode. The third and fourth electrodes may have a function as a gate for the first and second electrodes. For example, by applying a predetermined voltage to the third and fourth electrodes, the electron transport layer and the hole transport layer can be made to have different potentials, resulting that a lot of electrons in the electron transport layer and a lot of holes in the hole transport layer can be moved into the light-emitting layer. Thus, the number of the electrons and holes contributing to light emission in the light-emitting layer can be increased, and the light emission efficiency can be raised.

[0018] (D) The first and second electrodes may be disposed as follows.

[0019] First, the first electrode may be disposed on one side of the light-emitting layer and the second electrode may be disposed on the other side of the light-emitting layer, in the direction intersecting the substrate or the light emitting direction.

[0020] Second, the first electrode may be disposed on one side of the light-emitting layer and the second electrode may be disposed on the other side of the light-emitting layer, in a direction parallel to a surface of the substrate.

[0021] (E) A wavelength band of a light reflected on the first and second dielectric multi-layered film may be included in a wavelength band of a light generated in the light-emitting layer. In this configuration, the first and second dielectric multi-layered films can form a so-called optical resonator. The light is emitted from a film having lower reflectance in the pair of the dielectric multi-layered films.

[0022] The light emitting device according to the present invention can be applied to a display device. This display device can be applied to various types of electronic instruments. Alternatively, the light emitting device according to the present invention can be applied to various types of electronic instruments. Examples of such display device and electronic instruments will be described later.

[0023] Now, part of examples of materials usable for each component of the light emitting device according to the invention will be described below. It should be understood that these materials are part of known materials, and it goes without saying that materials other than these examples can be similarly used.

[0024] Light-emitting Layer

[0025] A material for the light-emitting layer is selected among well-known chemical compounds in order to obtain the light having a predetermined wavelength. It may be either of organic and inorganic compounds, but preferably, is an organic compound in view of a profusion of kinds and a characteristic of forming a film.

[0026] It is possible to use such organic compound as aromatic diamine derivative (TPD), oxadiazole derivative (PBD), oxadiazole dimer (OXD-8), distyryl arylene derivative (DSA), beryllium-benzquinolinol complex (Bebq), triphenyl amine derivative (MTDATA), rubrene, quinacridone, triazole derivative, polyphenylene, polyalkylfluorene, polyalkylthiophene, azomethine zinc complex, porphyrin zinc complex, benzoxazole zinc complex and phenanthroline europium. which are disclosed in, for example, the Japanese Patent Application Laid-Open No. 10-153967.

[0027] More concretely, the material of the organic light-emitting layer to be used can be such well-known material that is disclosed in the Japanese Patent Application Laid-Open No. 63-70257, the Japanese Patent Application Laid-Open No. 63-175860, the Japanese Patent Application Laid-Open No. 2-135361, the Japanese Patent Application Laid-Open No. 2-135359, the Japanese Patent Application Laid-Open No. 3-152184, the Japanese Patent Application Laid-Open No. 8-248276 or the Japanese Patent Application Laid-Open No. 10-153967. These compounds may be used single or in combination of two or more kinds.

[0028] ZnS:Mn (in red area), ZnS:TbOF (in green area), SrS:Cu, SrS:Ag and SrS:Ce (in blue area) are exemplified as the inorganic compound.

[0029] Dielectric Multi-layered Film

[0030] In the light-emitting section, the dielectric multi-layered film has a structure where materials whose refractive indices are different each other are piled alternately. In such a piled layer structure, a layer of silicon oxide (SiO_2) and a layer of silicon nitride (SiN_x), for example, are piled alternately. Alternatively, two layers selected among TiO_2 ,

Ta_2O_5 , MgF_2 and ZnS , for example, may be piled alternately to form the dielectric multi-layered film.

[0031] Electrode Layer

[0032] An electron applying type of metal, an alloy and an electricity conductive type of compound, which have a small work function (not more than 4 eV, for example), and compound thereof may be used for a cathode, that is, an electrode for applying electrons to the light-emitting layer. Such electrode material to be used may be the one disclosed in the Japanese Patent Application Laid-Open No. 8-248276, for example.

[0033] A metal, an alloy and an electricity conductive type of compound, which have a large work function (not lower than 4 eV, for example), and compound thereof may be used for an anode, that is, an electrode for applying holes to the light-emitting layer. In the case that an optically transparent material is used as the anode, a conductive transparent material such as CuI, ITO, SnO , and ZnO can be used. When the transparence is not required, a metal such as gold can be used.

[0034] It is preferable that the following relation is established for the first electrode connected to the electron transport layer:

Work function of one electrode layer (source) > Lowest unoccupied molecular orbital (LUMO) of the electron transport layer < Work function of the other electrode layer (drain)

[0035] Furthermore, it is preferable that the following relation is established for the second electrode connected to the hole transport layer:

Work function of one electrode layer (source) < Highest Occupied molecular orbital (HOMO) of the hole transport layer < Work function of the other electrode layer (drain)

[0036] The third and fourth electrodes are not especially limited so long as they are conductive layers having a function as the aforementioned gate for the first and second electrodes. When the third and fourth electrodes form a dielectric multi-layered film, however, it is required that their materials satisfy the characteristic of the film.

[0037] Hole Transport Layer

[0038] A material for the hole transport layer provided in accordance with requirements may be selected for use from materials used as a hole applying material for a well-known optical conductive material or from well-known materials used for a hole applying layer of an organic light emitting device. The material for the hole transport layer has one of functions for applying holes and for providing an electron barrier, and may be either organic or inorganic. Concretely, exemplified is the material disclosed in the Japanese Patent Application Laid-Open No. 8-248276, for example.

[0039] Electron Transport Layer

[0040] A material for the electron transport layer provided in accordance with requirements, which is only required to have a function of transporting to the organic light-emitting layer electrons applied from the cathode, may be selected from well-known materials. Concretely, exemplified is the material disclosed in the Japanese Patent Application Laid-open No. 8-248276, for example.

[0041] Further, each layer of the light emitting device can be formed in the well-known manner. For example, an optimal film-forming method can be selected for a material of each layer of the light emitting device. Concretely, vacuum evaporation, spin coating, LB or an inkjet method can be selected, for example.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0042] FIG. 1 is a cross-sectional view schematically showing a light emitting device according to the first embodiment of the present invention;

[0043] FIG. 2 is a cross-sectional view schematically showing a light emitting device according to the second embodiment of the present invention;

[0044] FIG. 3 is a sectional view taken along the line A-A of FIG. 2;

[0045] FIG. 4 is a cross-sectional view schematically showing a modification of a light emitting device according to the second embodiment of the present invention;

[0046] FIG. 5 is a cross-sectional view schematically showing a light emitting device according to the third embodiment of the present invention;

[0047] FIG. 6 is a perspective view showing an electronic book as an example of the electronic instruments according to the present invention;

[0048] FIG. 7 is a perspective view showing a personal computer as an example of the electronic instruments according to the present invention;

[0049] FIG. 8 is a perspective view showing a portable phone as an example of the electronic instruments according to the present invention;

[0050] FIG. 9 is a perspective view showing a digital still camera as example of the electronic instruments according to the present invention;

[0051] FIG. 10 is a perspective view showing an electronic paper as example of the electronic instruments according to the present invention; and

[0052] FIG. 11 is a perspective view showing an electronic notebook as example of the electronic instruments according to the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENT

1. First Embodiment

[0053] 1.1 Device Structure

[0054] FIG. 1 is a cross-sectional view schematically showing a light emitting device 100 according to the first embodiment of the present invention.

[0055] The light emitting device 100 includes a light-emitting section on a substrate 10. The light-emitting section comprises a first dielectric multi-layered film 20a, an electron transport layer 22, a light-emitting layer 24, a hole transport layer 26 and a second dielectric multi-layered film 20b, which are piled in order.

[0056] The first dielectric multi-layered film 20a is provided thereon with a first electrode 30 consisting of a pair of electrode layers 32 and 34 for applying electrons to the electron transport layer 22. In this embodiment, one electrode layer 32 works as a source (S1) and the other electrode layer 34 works as a drain (D1). The electrode layers 32 and 34 are spaced each other, so that electrons are applied to the electron transport layer 22 by applying a predetermined voltage to the electrodes 32 and 34.

[0057] Further, the hole transport layer 26 is provided thereon with a second electrode 40 consisting of a pair of electrode layers 42 and 44 for applying holes to the hole transport layer 26. In this embodiment, one electrode layer 42 works as a source (S2) and the other electrode layer 44 works as a drain (D2). The electrode layers 42 and 44 are spaced each other, so that holes are applied to the hole transport layer 26 by applying a predetermined voltage to the electrodes 42 and 44.

[0058] Accordingly, the electrode layers 32, 34 and 42, 44 forming respectively the first and second electrodes 30 and 40 are disposed so as not to overlap a light-emitting region 24a of the light-emitting layer 24 in the direction that the light emits, which is shown by an arrow in FIG. 1.

[0059] The light-emitting layer 24 is formed from a material generating a light by means of an electro-luminescence. The aforementioned materials may be used for the light-emitting layer 24, the electron transport layer 22 and the hole transport layer 26.

[0060] In a direction perpendicular to the substrate 10, the electron transport layer 22, the light-emitting layer 24 and the hole transport layer 26 are interposed between the first and second dielectric multi-layered films 20a and 20b.

[0061] The first and second dielectric multi-layered films 20a and 20b have a structure in which materials having different refractive indices are piled alternately like a piled layer consisting of a layer of silicon oxide and a layer of silicon nitride, for example. Each of such alternately piled layers is formed to be about $\lambda/4n$ (wherein λ denotes a predetermined wavelength in a wavelength band of a light generated in the light-emitting layer 24) in thickness.

[0062] The first and second dielectric multi-layered films 20a and 20b reflect a light in a predetermined wavelength band. The wavelength band of a light reflected on the first and second dielectric multi-layered films 20a and 20b is defined on the basis of the wavelength band of a light generated in the light-emitting layer 24. That is, the first and second dielectric multi-layered films 20a and 20b are formed so that the wavelength band of the light reflected thereon is included in that of the light generated in the light-emitting layer 24. In this structure, in the light generated in the light-emitting layer 24, only the light having the wavelength in a high reflectance band of the first and second dielectric multi-layered films 20a and 20b is selectively reflected. As a result, the light can emit with a narrow width of spectrum at a high light-emission efficiency. The wavelength band of the light reflected on the first and second dielectric multi-layered films 20a and 20b is preferably almost identical to that of the light generated in the light-emitting layer 24 in order to further raise the light-emission efficiency.

[0063] In this embodiment of the invention, the reflectance of the second dielectric multi-layered film 20b is set smaller

than that of the first dielectric multi-layered film **20a**. Thus, the light emits from the side of the second dielectric multi-layered film **20b**. The reflectance of a pair of dielectric multi-layered films is set properly in accordance with the desirable direction that the light emits.

[0064] Further, a third electrode **50** is provided so as to face to the first electrode **30** (the electrode layers **32**, **34**) with a dielectric layer **21**, which forms the first dielectric multi-layered film **20a**, intervening therebetween. Similarly, a fourth electrode **52** is provided so as to face to the second electrode **40** (the electrode layers **42**, **44**) with a dielectric layer **21**, which forms the second dielectric multi-layered film **20b**, intervening therebetween.

[0065] Both of these third and fourth electrodes **50** and **52** form the layers of the dielectric multi-layered films **20a** and **20b**. Namely, the third and fourth electrodes **50** and **52** have the refractive indices and optical film thickness required for the dielectric multi-layered films **20a** and **20b**, as well as conductivity. Materials for these electrodes **50** and **52** are not especially limited so long as the above requirements are satisfied, and may be ITO, for example, for use.

[0066] 1.2 Device Operation and Effects

[0067] In the light emitting device **100** in this embodiment, the light emits in accordance with the following mechanism.

[0068] A large number of electrons can be applied to the electron transport layer **22** by applying a predetermined voltage to the electrode layer (source) **32** and the electrode layer (drain) **34** of the first electrode **30**. A large number of holes can be applied to the hole transport layer **26** by applying a predetermined voltage to the electrode layer (source) **42** and the electrode layer (drain) **44** of the second electrode **40**. That is, applying a voltage so that the drain has a positive potential for the source can introduce a large number of holes into the hole transport layer **26** from the drain to the source. On the other hand, applying a voltage so that the source has a negative potential for the drain can introduce electrons into the electron transport layer **22** from the source to the drain.

[0069] Moreover, applying a predetermined voltage to the third electrode **50** and the fourth electrode **52** can cause the electron transport layer **22** and the hole transport layer **26** to have potential difference, which results in transportation to the light-emitting layer **24** of a large number of electrons in the electron transport layer **22** and holes in the hole transport layer **26**. Therefore, the numbers of electrons and holes contributing to light emission in the light-emitting layer **24** can be increased, and thereby, the light emission efficiency can be raised.

[0070] In this embodiment of the invention, the first electrode **30** is connected to the electron transport layer **22**, while the second electrode **40** is connected to the hole transport layer **26**. Therefore, the voltage can be separately applied to the electron transport layer **22** and the hole transport layer **26**, respectively, so that, in this view also, a number of electrons and holes can be transported.

[0071] Thus, excitons are generated by combining in the light-emitting layer **24** the electrons applied to the electron transport layer **22** and the holes applied to the hole transport layer **26**, and then, light is generated when the excitons are deactivated.

[0072] The light generated in the light-emitting layer **24** is increased in wavelength selectivity through an optical resonator comprising a pair of the dielectric multi-layered films **20a** and **20b**. As a result, the light generated in the light-emitting layer **24** by means of the electro-luminescence emits at a high efficiency in a narrow wavelength band corresponding to the wavelength of the optical resonator.

[0073] Furthermore, in accordance with the light emitting device **100**, the first and second electrodes **30** and **40** are disposed so as not to overlap the light-emitting region **24a** of the light-emitting layer **24** in the direction that the light emits. As a result, the absorption and scattering of light caused by the electrode layers **32**, **34** and **42**, **44** forming the first and second electrodes **30** and **40** can be reduced, so that the light generated in the light-emitting layer **24** can be utilized at high efficiency.

2. Second Embodiment

[0074] 2.1 Device Structure

[0075] FIG. 2 is a cross-sectional view showing a light emitting device **200** according to the second embodiment of the present invention. FIG. 3 is a sectional view taken along the line A-A of FIG. 2, showing a main component. Disposition of the electron transport layer, the light-emitting layer and the hole transport layer is different from that of the first embodiment. The description below mainly concentrates on the differences between the first and second embodiments, and components having substantially the same functions as the components of FIG. 1 are denoted by the same reference numbers.

[0076] The light emitting device **200** includes a light-emitting section on a substrate **10**. The light-emitting section comprises a first dielectric multi-layered film **20a**, a light-emitting layer **24** and a second dielectric multi-layered film **20b**, which are piled in order. In a direction parallel to a surface of the substrate **10**, provided is an electron transport layer **22** on one side of the light-emitting layer **24** and a hole transport layer **26** on the other side.

[0077] A pair of electrode layers **32** and **34** (a first electrode **30**) is provided on the top and the bottom surfaces of the electron transport layer **22** for applying electrons to the electron transport layer **22**. In this embodiment, one electrode layer **32** works as a source (S1) and the other electrode layer **34** works as a drain (D1). Thus, applying a predetermined voltage to the electrodes **32** and **34** causes electrons to be applied to the electron transport layer **22**.

[0078] Further, a pair of electrode layers **42** and **44** (a second electrode **40**) is provided on the top and the bottom surfaces of the hole transport layer **26** for applying holes to the hole transport layer **26**. In this embodiment of the invention, one electrode layer **42** works as a source (S2) and the other electrode layer **44** works as a drain (D2). Thus, applying a predetermined voltage to the electrodes **42** and **44** causes holes to be applied to the hole transport layer **26**.

[0079] Accordingly, the electrode layers **32**, **34** and **42**, **44** forming respectively the first and second electrodes **30** and **40** are disposed so as not to overlap the light-emitting layer **24** in the direction that the light emits, which is shown by an arrow in FIG. 2.

[0080] Further, a third electrode **50** is provided outside the electron transport layer **22** (on the opposite side of the

light-emitting layer **24**) with an insulating layer **54** inserted therebetween. The third electrode **50** is electrically separated through the insulating layer **54** from the electrode layers **32** and **34** forming the first electrode **30**. Similarly, a fourth electrode **52** is provided outside the hole transport layer **26** (on the opposite side of the light-emitting layer **24**) with an insulating layer **54** inserted therebetween. The fourth electrode **52** is electrically separated through the insulating layer **54** from the electrode layers **42** and **44** forming the second electrode **40**.

[0081] The third and fourth electrodes **50** and **52** respectively include projecting portions **50a** and **52a**, which enter into the electron transport layer **22** and the hole transport layer **26**, as shown in **FIG. 3**. Such projecting portions **50a** and **52a** enable a voltage to be selectively applied only to the center part of the light-emitting layer **24**, so that light emission can be concentrated at the center part. Therefore, absorption of the light in the first electrode **30** and the second electrode **40** can be reduced, which further raises the light emission efficiency.

[0082] Description of the first and second dielectric multi-layered films **20a** and **20b** is omitted here since they are same as those of the first embodiment.

[0083] 2.2 Device Operation and Effects

[0084] The light emitting device **200** in this embodiment of the invention basically has the same operation and effects as those of the first embodiment. Therefore, only operation and effects in this embodiment different from those of the first embodiment will be now described.

[0085] That is, in this embodiment of the invention, in addition to the effects in the first embodiment, the third electrode **50** and the fourth electrode **52** working as a gate are connected through a thin insulating layer **54** to the electron transport layer **22** and the hole transport layer **26**, so that electrons and holes can be effectively transported at a low gate voltage.

[0086] 2.3 Modification

[0087] **FIG. 4** is a sectional view of a modification of a light emitting device in the second embodiment. Members having the substantially same functions as those of **FIGS. 2 and 3** are marked with the same reference numbers and their detailed description will be omitted here. A light emitting device **210** in this modification is same as the light emitting device **200** shown in **FIGS. 2 and 3** except that the hole transport layer is not provided in this modification. That is, the electrode layers **42** and **44** forming the second electrode **40** are arranged to be connected to the light-emitting layer **24** directly not through the hole transport layer. Instead of the hole transport layer, the electron transport layer or both of the electron transport layer and the hole transport layer may be omitted from provision.

[0088] This is also applicable to the other embodiments. Namely, in the first embodiment and the third embodiment described later, at least one of the electron transport layer **22** and the hole transport layer **26** may be provided in the device, or both of them may be omitted from provision.

3. Third Embodiment

[0089] 3.1 Device Structure

[0090] **FIG. 5** is a cross-sectional view schematically showing a light emitting device **300** according to the third embodiment of the present invention. The structure of the first and second electrodes in this embodiment is different from those of the first and second embodiments. The description below mainly concentrates on the differences between the first and second embodiments and the third embodiment, and components having substantially the same functions as the components of **FIG. 1** are denoted by the same reference numbers.

[0091] The light emitting device **300** includes a light-emitting section on a substrate **10**. The light-emitting section comprises a first dielectric multi-layered film **20a**, an electron transport layer **22**, a light-emitting layer **24**, a hole transport layer **26** and a second dielectric multi-layered film **20b**, which are piled in order.

[0092] The first dielectric multi-layered film **20a** is provided thereon with a cathode **60** connected to the electrode transport layer **22**. The hole transport layer **26** is provided thereon with an anode **62** connected to the hole transport layer **26**. The cathode **60** and the anode **62** are disposed so as not to overlap a light-emitting region **24a** of the light-emitting layer **24** in the direction that the light emits, which is shown by an arrow in **FIG. 5**. More concretely, an end portion **60a** of the cathode **60** and an end portion **62a** of the anode **62** are spaced each other.

[0093] Description of the first and second dielectric multi-layered films **20a** and **20b** is omitted here since they are same as those of the first embodiment.

[0094] 3.2 Device Operation and Effects

[0095] In the light emitting device **300** in this embodiment of the invention, the light emits in accordance with the following mechanism. That is, applying a predetermined voltage to the cathode **60** and the anode **62** enables electrons to be applied to the electron transport layer **22** as well as holes to be applied to the hole transport layer **22**. Thus, excitons are generated by combining in the light-emitting layer **24** the electrons applied to the electron transport layer **22** and the holes applied to the hole transport layer **26**, and then, light is generated when the excitons are deactivated.

[0096] The light generated in the light-emitting layer **24** is increased in wavelength selectivity through an optical resonator comprising a pair of the dielectric multi-layered films **20a** and **20b**. As a result, the light generated in the light-emitting layer **24** by means of the electro-luminescence emits at a high efficiency in a narrow wavelength band corresponding to the wavelength of the optical resonator.

[0097] Furthermore, in accordance with the light emitting device **300**, the cathode **60** and the anode **62** are disposed so as not to overlap the light-emitting region **24a** of the light-emitting layer **24** in the direction that the light emits. As a result, the absorption and scattering of the light caused by the cathode **60** and the anode **62** can be reduced, so that the light generated in the light-emitting layer **24** can be utilized at high efficiency.

4. Fourth Embodiment

[0098] 4.1 Display Device and Electronic Instrument

[0099] The light emitting device of the present invention such as the light emitting device **100**, **200**, **210** and **300** can be applied to a display device **500**. The display device **500** having such a light emitting device can be applied to an electronic instrument. FIGS. **6** to **11** are perspective views showing examples of electronic instruments to which the display device **500** having one of the light emitting devices **100**, **200**, **210** and **300** is applied.

[0100] FIG. **6** is a perspective view showing an electronic book **1000** as an example of the electronic instrument according to this embodiment of the present invention. The electronic book **1000** includes a book-shaped frame **32**, a cover **33** hinged on the frame to be opened and closed. The display device **500** having an exposed display screen is provided onto the frame **32**, and an operating section **35** is also provided. A controller, a counter and a memory (not shown) are provided in the frame **32**. The display device according to this embodiment has a pixel portion (not shown) formed by filling a thin element with an electronic ink and a peripheral integrated circuit (not shown) unified with this pixel portion. The peripheral circuit has a decoding type of scan driver and a data driver.

[0101] FIG. **7** is a perspective view showing a personal computer **1100** as an example of the electronic instrument according to this embodiment of the invention. The personal computer **1100** includes a main body **1104** having a keyboard **1102**, and a display unit having the above-described display device **500**.

[0102] FIG. **8** is a perspective view showing a portable phone **1200** as an example of the electronic instrument according to this embodiment of the invention. The portable phone **1200** includes a plurality of operation buttons, a receiver **1204**, a transmitter **1206** and the above display device **500**, as shown in FIG. **8**.

[0103] FIG. **9** is a perspective view showing a digital still camera **1300** as an example of the electronic instrument according to this embodiment of the invention. FIG. **9** shows a structure of the digital still camera **1300** and also simply shows a connection between the digital still camera **1300** and external devices.

[0104] A photographic camera usually exposes a film by using an optical image of an object, but the digital still camera **1300** conducts electro-optical conversion of an optical image of an object by using CCD and generates an image signal. The above display device **500** is provided on the back side of the digital still camera **1300** and displays an object based on the image signal from CCD. In other words, the display device **500** functions as a finder to display an object. A light receiving unit **1304** including an optical lens, CCD or the like is provided on the viewer side of a case **1302** (or a back side in FIG. **9**). If a photographer confirms an object displayed on the display device **500** and depresses a shutter button **1306**, the image signal from CCD at that time is transferred and stored into a memory of a circuit board **1308**. The digital still camera **1300** also includes a video signal output terminal **1312** and an input/output terminal **1314** for data communication on a side surface of the case **1302**. As shown in FIG. **9**, a TV monitor **1430** and a personal computer **1440** can be respectively connected to the video

signal output terminal **1312** and the input/output terminal **1314**, if required. In addition, the image signal stored in the memory of the circuit board **1308** can be output to the TV monitor **1430** or the personal computer **1440** by the predetermined operation.

[0105] FIG. **10** is a perspective view showing an electronic paper **1400** as an example of the electronic instrument according to this embodiment of the invention. The electronic paper **1400** includes a main component **1401** formed of a rewritable sheet having a feel and flexibility similar to a real paper, and a display unit having the above display device **500**, as shown in FIG. **10**.

[0106] FIG. **11** is a perspective view showing an electronic notebook **1402** as an example of the electronic instrument according to this embodiment of the invention. The electronic notebook **1402** has a plurality of sheets of the electronic paper **1400** of FIG. **10** bound by a cover **1403**, as shown in FIG. **11**. The electronic notebook **1402** can change displayed content of the electronic paper **1400** in a bound state by providing a display data input means in the cover **1403**.

[0107] In addition to these electronic book **1000** of FIG. **6**, personal computer **1100** of FIG. **7**, portable phone **1200** of FIG. **8**, digital still camera **1300** of FIG. **9**, electronic paper **1400** of FIG. **10** and electronic notebook **1402** of FIG. **11**, it should be noted that various other instruments such as a liquid crystal television, a view-finder or monitor type of video tape recorder, a car navigation device, a pager, an electronic pocket notebook, an electronic calculator, a wordprocessor, a workstation, a TV phone, a POS terminal, an IC card, a mini-disk player, or a device provided with a touch panel can be provided as other examples. It goes without saying that the display device **500** can be used as a display unit of these electronic instruments.

[0108] Although the present invention has been described with reference to above described embodiments, the present invention is not limited thereto and various modifications can be made within the scope of the invention.

[0109] For example, the dielectric multi-layered films of the light emitting device may comprise not the third and fourth electrodes but other layers. As in the light emitting device according to the second embodiment (see FIG. **3**), a projecting portion may be formed in the first and second electrodes used to apply a voltage to the light-emitting layer, enabling to make an electric current concentrate.

What is claimed is:

1. A light emitting device having a substrate and a light-emitting section provided on the substrate, and emitting light in a direction intersecting the substrate,

wherein the light-emitting section comprises:

a light-emitting layer in which light is generated by electro-luminescence;

an electrode used to apply electric charges to the light-emitting layer; and

first and second dielectric multi-layered films between which the light-emitting layer is interposed; and

wherein the electrode is disposed to avoid overlap with at least part of a light-emitting region in the light-emitting layer, as viewed from a light emitting direction.

2. The light emitting device as defined in claim 1, comprising as the electrode:

a first electrode formed of a pair of electrode layers used to apply electrons to the light-emitting layer; and

a second electrode formed of a pair of electrode layers used to apply holes to the light-emitting layer.

3. the light emitting device as defined in claim 2,

wherein the first electrode is connected to an electron transport layer and the second electrode is connected to a hole transport layer.

4. The light emitting device as defined in claim 3, further comprising:

a third electrode disposed to interpose an insulating layer between the first electrode and the third electrode; and

a fourth electrode disposed to interpose another insulating layer between the second electrode and the fourth electrode.

5. The light emitting device as defined in claim 2,

wherein the first electrode is disposed on one side of the light-emitting layer and the second electrode is disposed on the other side of the light-emitting layer, in the direction intersecting the substrate.

6. The light emitting device as defined in claim 2,

wherein the first electrode is disposed on one side of the light-emitting layer and the second electrode is disposed on the other side of the light-emitting layer, in a direction parallel to a surface of the substrate.

7. The light emitting device as defined in claim 1,

wherein a wavelength band of a light reflected on the first and second dielectric multi-layered film is included in a wavelength band of a light generated in the light-emitting layer.

8. A light emitting device having a substrate and a light-emitting section provided on the substrate, and emitting light in a direction intersecting the substrate,

wherein the light-emitting section comprises:

a light-emitting layer in which light is generated by electro-luminescence;

an electrode used to apply electric charges to the light-emitting layer; and

first and second dielectric multi-layered films between which the light-emitting layer is interposed; and

wherein the electrode includes a cathode and an anode disposed to avoid overlap with at least part of a light-emitting region in the light-emitting layer, as viewed from a light emitting direction.

9. The light emitting device as defined in claim 8,

wherein the cathode is disposed on one side of the light-emitting region and the anode is disposed on the other side of the light-emitting region, in the direction intersecting the substrate.

10. A light emitting device comprising:

a substrate;

a light-emitting layer in which light is generated by electro-luminescence;

first and second dielectric multi-layered films between which the light-emitting layer is interposed in a direction intersecting the substrate;

at least one transport layer of a first electric charge transport layer disposed on one side of the light-emitting layer and the second electric charge transport layer disposed on the other side of the light-emitting layer, in the direction intersecting the substrate;

a first electrode formed of a pair of electrode layers used to apply first electric charges to the light-emitting layer; and

a second electrode formed of a pair of electrode layers used to apply second electric charges to the light-emitting layer,

wherein the first and second electrodes are disposed to avoid overlap with at least part of a light-emitting region in the light-emitting layer, as viewed from a light emitting direction.

11. The light emitting device as defined in claim 10,

wherein the first electrode is connected to the first electric charge transport layer and the second electrode is connected to the second electric charge transport layer.

12. The light emitting device as defined in claim 10, further comprising:

a third electrode that is a layer keeping away from the first electrode and included in the first dielectric multi-layered film; and

a fourth electrode that is a layer keeping away from the second electrode and included in the second dielectric multi-layered film.

13. A light emitting device comprising:

a substrate;

a light-emitting layer in which light is generated by electro-luminescence;

first and second dielectric multi-layered films between which the light-emitting layer is interposed in a direction intersecting the substrate;

at least one transport layer of a first electric charge transport layer disposed on one side of the light-emitting layer and the second electric charge transport layer disposed on the other side of the light-emitting layer, in a direction parallel to a surface of the substrate;

a first electrode formed of a pair of electrode layers used to apply first electric charges to the light-emitting layer; and

a second electrode formed of a pair of electrode layers used to apply second electric charges to the light-emitting layer,

wherein the first and second electrodes are disposed to avoid overlap with at least part of a light-emitting region in the light-emitting layer, as viewed from a light emitting direction.

- 14.** The light emitting device as defined in claim 13,
wherein the first electrode is connected to the first electric charge transport layer and the second electrode is connected to the second electric charge transport layer.
- 15.** The light emitting device as defined in claim 13, further comprising:
a third electrode disposed to interpose an insulating layer between the first electrode and the third electrode; and

- a fourth electrode disposed to interpose another insulating layer between the second electrode and the fourth electrode.
- 16.** A display device using the light emitting device as defined in any one of claims 1 to 15.
- 17.** An electronic instrument using the display device as defined in claim 16.
- 18.** An electronic instrument using the light emitting device as defined in any one of claims 1 to 15.

* * * * *

专利名称(译)	发光装置，显示装置和电子仪器		
公开(公告)号	US20020125487A1	公开(公告)日	2002-09-12
申请号	US10/090755	申请日	2002-03-06
[标]申请(专利权)人(译)	精工爱普生株式会社		
申请(专利权)人(译)	SEIKO EPSON CORPORATION		
[标]发明人	KOYAMA TOMOKO KANEKO TAKEO		
发明人	KOYAMA, TOMOKO KANEKO, TAKEO		
IPC分类号	H05B33/26 H01L51/50 H01L51/52 H05B33/02 H05B33/24 H01L27/15 H01L31/12 H01L33/00		
CPC分类号	H01L51/5203 H01L51/5265 H01L2251/5315		
优先权	2001066612 2001-03-09 JP 2002060135 2002-03-06 JP		
其他公开文献	US6791115		
外部链接	Espacenet USPTO		

摘要(译)

发光器件具有基板和形成在基板上的发光部分。发光部分包括其中通过电致发光产生光的发光层，用于向发光层施加电荷的第一和第二电极，以及在其间发光的第一和第二电介质多层膜。- 插入层。设置第一和第二电极以避免与从发光方向观察的发光层中的发光区域重叠。

