



US 20040209114A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0209114 A1**
Li et al. (43) **Pub. Date: Oct. 21, 2004**

(54) **ORGANIC LIGHT-EMITTING DEVICE
HAVING PYRYLIUM SALT AS CHARGE
TRANSPORT MATERIAL**

(21) Appl. No.: **10/417,128**

(22) Filed: **Apr. 17, 2003**

(75) Inventors: **Xiao-Chang Charles Li**, Union City,
CA (US); **Kazunori Ueno**, Ebina (JP);
Akihito Saitoh, Yokohama (JP);
Hiroshi Tanabe, Yokohama (JP);
Tadashi Okamoto, Yokohama (JP)

Publication Classification

(51) **Int. Cl.⁷** **H05B 33/12**

(52) **U.S. Cl.** **428/690**; 428/917; 313/504;
313/506

Correspondence Address:

FITZPATRICK CELLA HARPER & SCINTO
30 ROCKEFELLER PLAZA
NEW YORK, NY 10112 (US)

(57) **ABSTRACT**

An organic light-emitting device (OLED) in which pyrylium salt or its derivative, such as thiapyrylium, selenapyrylium, or telluropirylium, is used as a charge transport material and/or at least a dopant or principal component in a charge transport layers.

(73) Assignee: **CANON KABUSHIKI KAISHA**

Figure 1

106--	Cathode
105--	ETL
103--	EM
101--	Anode

Figure 2

206--	Cathode
205--	ETL
203--	EM
202--	HTL
201--	Anode

Figure 3

306--	Cathode
303--	EM + ETL
301--	Anode

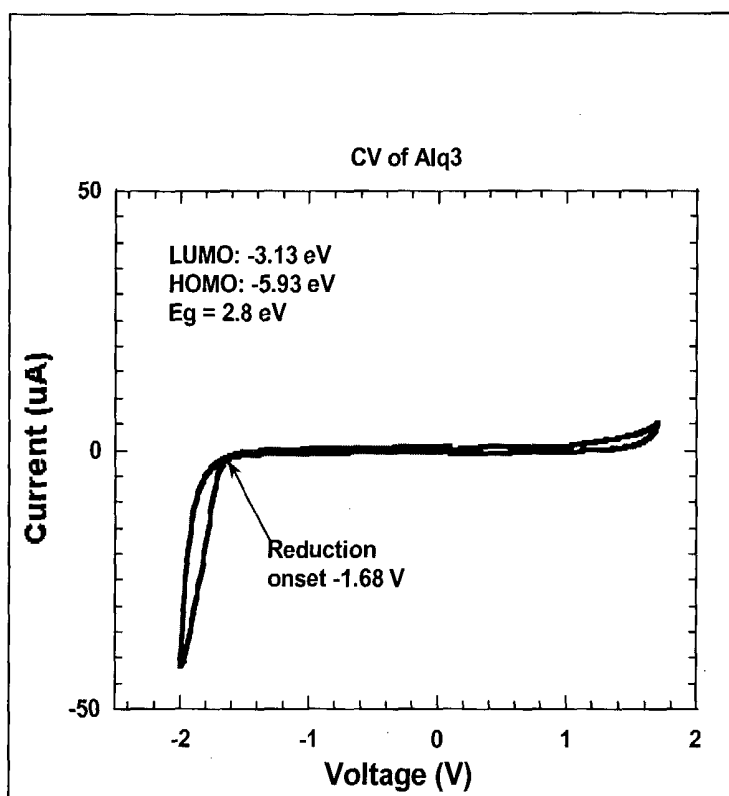


Figure 4.

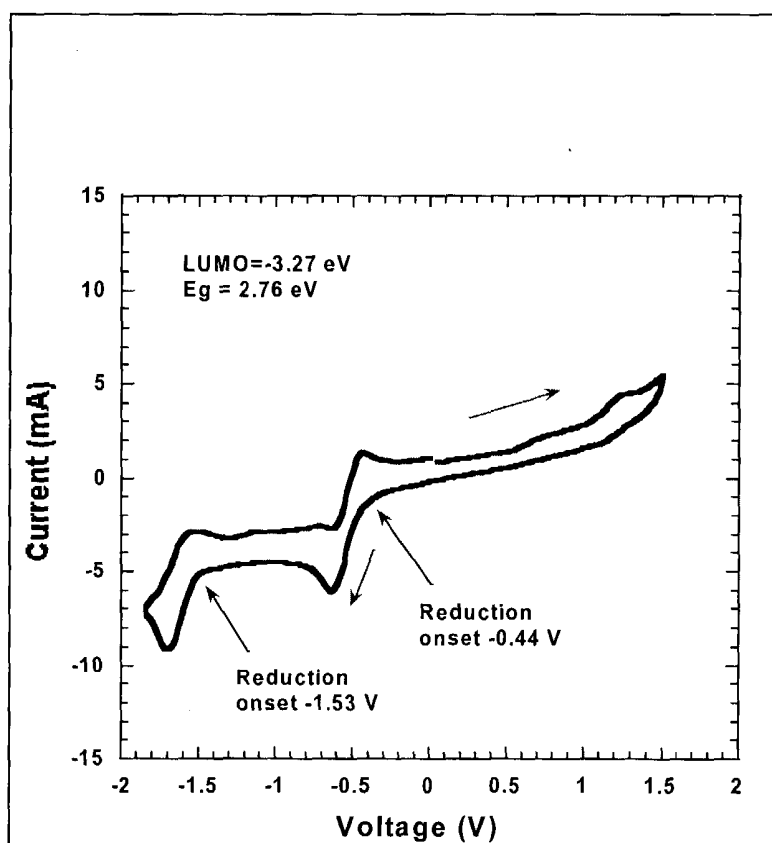


Figure 5.

ORGANIC LIGHT-EMITTING DEVICE HAVING PYRYLIUM SALT AS CHARGE TRANSPORT MATERIAL

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to an organic light emitting device (OLED) in which a charge transport material is used as the host material and/or as the charge transport layer.

[0003] 2. Description of the Related Art

[0004] Significant efforts have been expended in developing suitable materials for use in organic light emitting devices (OLEDs). Such devices are commercially attractive because they offer the promise of low-cost fabrication of high-density pixelated displays exhibiting bright electroluminescence with long life times, high efficiency and wide color range.

[0005] A typical OLED is fabricated by sandwiching an emissive layer between an anode and a cathode. Improved performance can be obtained by the provision of additional layers around the emissive layers so as to provide charge transport capabilities, such as an electron transport layer or a hole transport layer.

[0006] The stability and lifetime of an OLED may change with the various combinations of emissive material and charge transport material. As most luminescent materials have limited charge injection and transporting ability, and/or unbalanced charge injection ability in the device, the doping of emissive material (with a volume content less than 20%) into a host material can lead to much better performance because the host material can either enhance electron transport or enhance hole transport. Since electron injection of organic luminescent material has been less efficient than hole injection of organic luminescent material, host materials that have an electron enhancement function, have been widely used for high performance OLEDs. For example, U.S. Pat. No. 5,935,720 shows an OLED utilizing tris(8-hydroxyquinoline)aluminum Alq3 as host material because of its electron enhancement function. Due to its high electron affinity, Alq3 has also been widely explored as electron transport material for OLEDs.

[0007] However, recent scientific evidence showed that an OLED with Alq3 as the emissive layer and/or host material has intrinsic instability due to the poor hole injection ability of Alq3. In addition, current findings show that Alq3 has little electrochemical reversibility even under normal electrochemical reduction process.


[0008] Accordingly, because of consumer expectations of good efficiency, long lifetime and pure color for OLEDs, a need still exists for development of suitable materials used for OLEDs.

SUMMARY OF THE INVENTION

[0009] It is an object of the invention to provide an improved OLED in which pyrylium salt or its derivatives are

used as the charge transport material in a pure charge transport layer or in a host material to enhance charge transport property.

[0010] Thus, in one aspect, the invention is an OLED in which an emissive layer is sandwiched between at least a cathode and an anode, and in which the OLED includes a pyrylium salt or its derivatives such as thiapyrylium, selenapyrylium, and telluropirylium as a charge transport material. Suitable pyrylium salts and their derivatives are expressed according to the following general formula (I):

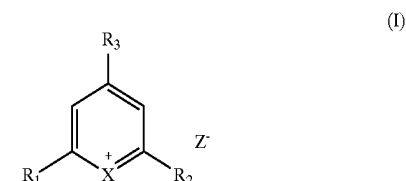

[0011] wherein R_1 , R_2 and R_3 represent an alkyl, aryl, or heteroaryl having up to 50 carbon atoms; Z represents an anionic function-including ion, such as Cl^- , Br^- , F^- , tetrafluoroborate, perchlorate, methanesulfonate, or phosphohexafluoride; and X is oxygen, sulfur, or selenium. The compound expressed according to formula (I) can be used directly as transport layer, can be used as a dopant in a charge transport layer, or can be incorporated into an emissive layer as a host to enhance the emissive layer's charge transport property.

[0012] Fabrication of a suitable charge transport layer using a pyrylium salt or its derivatives according to the above formula (I) can be accomplished through use of thermal deposition in a vacuum, or by spin coating of a solution thereof. In addition, high-density pixelated displays can be fabricated through use of suitable masking procedures, or by use of thermal or piezoelectric ink jet printing techniques.

[0013] The compound expressed according to formula (I) can be used directly as the charge transport layer, or can be incorporated into a polymer as a unit or as a pendent side group. In addition, the compound of the expressed formula can be doped into a matrix medium when the charge transport layer comprises a charge transport functional material plus a dopant. Further, the compound can be used as a host to enhance charge injection and transport property wherein a dopant emitter may be doped for controlling emission color.


[0014] The compound expressed according to formula (I) exhibits characteristics of high electron affinity and excellent reversibility. Representative charge transport mechanisms are shown below in accordance with Schemes 1 and 2, which show examples of the charge injection process for

2,4,6-triphenylpyrylium salt and 4,4'-bipyrylium salt, respectively.



DETAILED DESCRIPTION OF THE INVENTION

[0021] The pyrylium salt and its derivatives used in the present invention have the following general structure:

(I)



[0022] In the above formula (I), R_1 , R_2 and R_3 represent an alkyl, aryl, or heteroaryl having up to 50 carbon atoms; Z^- represents an anionic function-including ion, such as Cl^- , Br^- , F^- , tetrafluoroborate, perchlorate, methanesulfonate, or phosphohexafluoride; and X is oxygen, sulfur, or selenium.

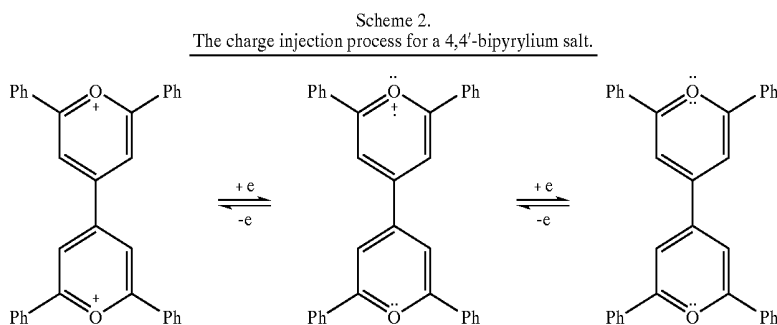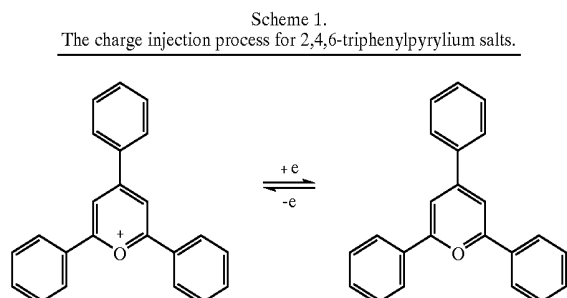

[0015] This brief summary has been provided so that the nature of the invention may be understood quickly. A more complete understanding of the invention can be obtained by reference to the following detailed description of the preferred embodiment thereof in connection with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is a schematic cross-sectional view of a two layer organic light emitting device.


[0017] FIG. 2 is a schematic cross-sectional view of a three layer organic light emitting device.

[0018] FIG. 3 is a schematic cross-sectional view of a single layer organic light emitting device.


[0019] FIG. 4 illustrates the cyclic voltametric analysis curve for Alq3.

[0020] FIG. 5 illustrates the cyclic voltametric analysis curve for TPPBF₄.


[0023] The compound expressed according to formula (I) exhibits characteristics of high electron affinity and excellent reversibility. Representative charge transport mechanisms are shown below in accordance with schemes 1 and 2, which show examples of the charge injection process for 2,4,6-triphenylpyrylium salt and 4,4'-bipyrylium salt, respectively.

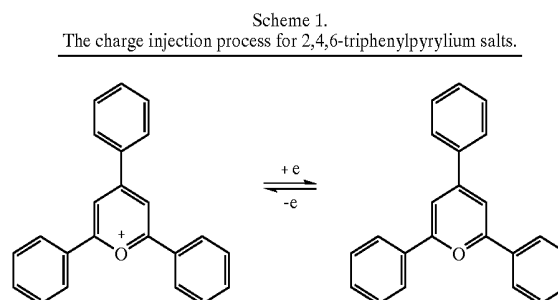


Scheme 2.
The charge injection process for a 4,4'-bipyrylium salt.

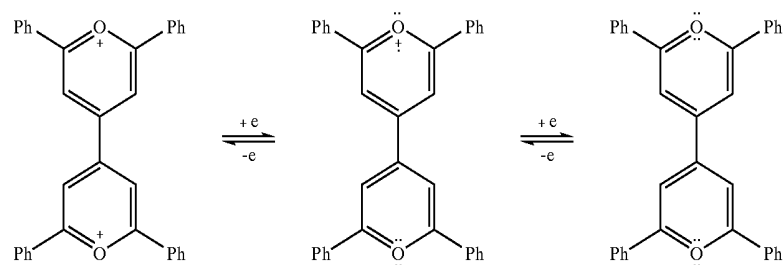

[0024] Some preferred pyrylium salts or pyrylium derivatives represented by formula (I) include the following compounds:

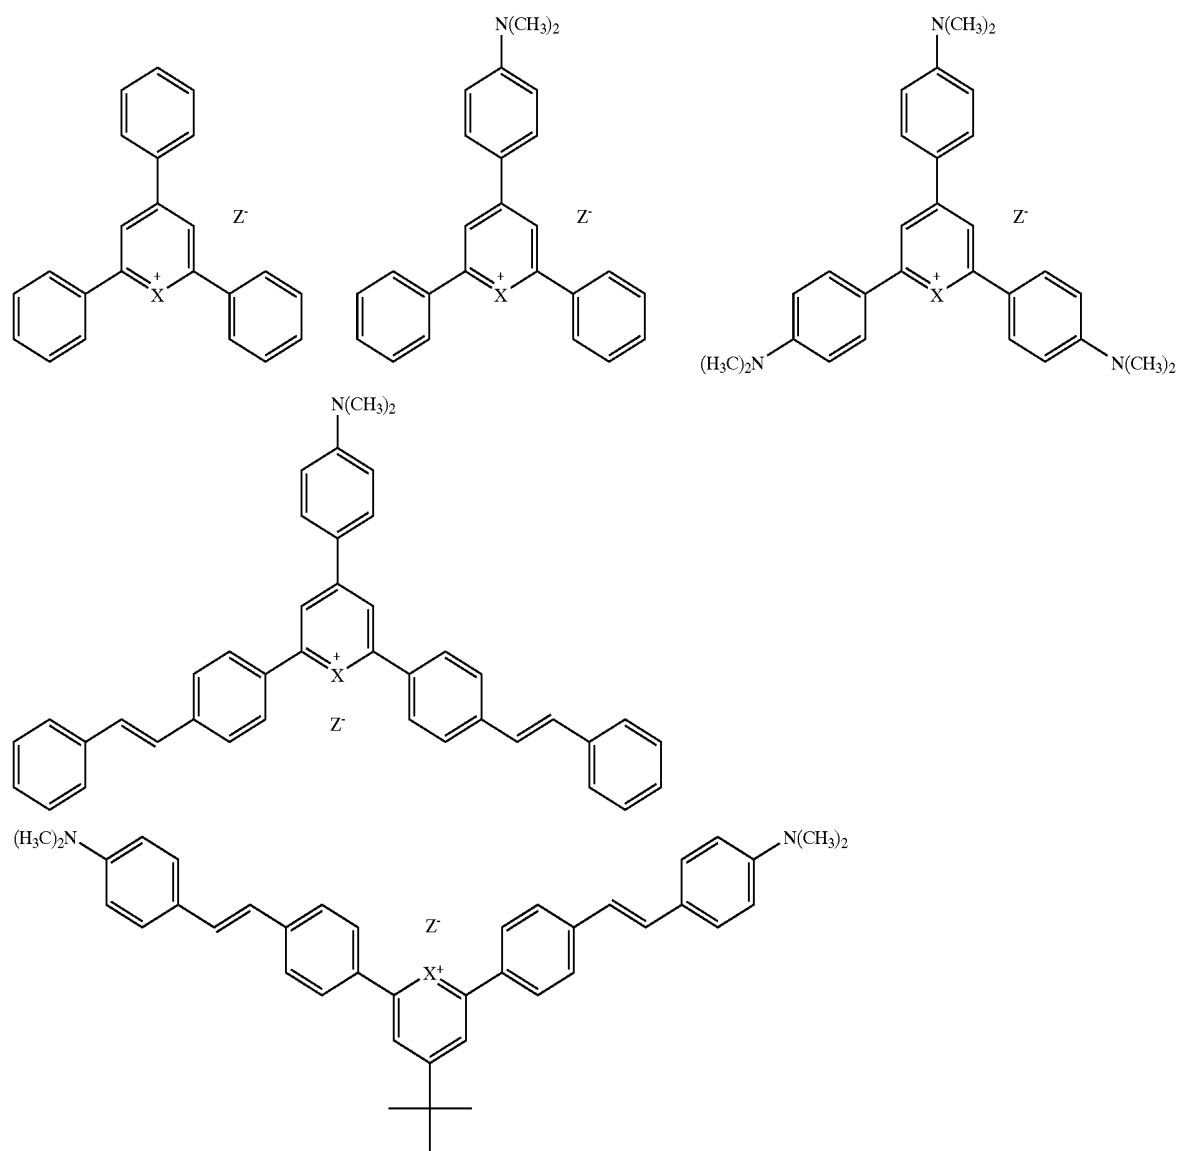

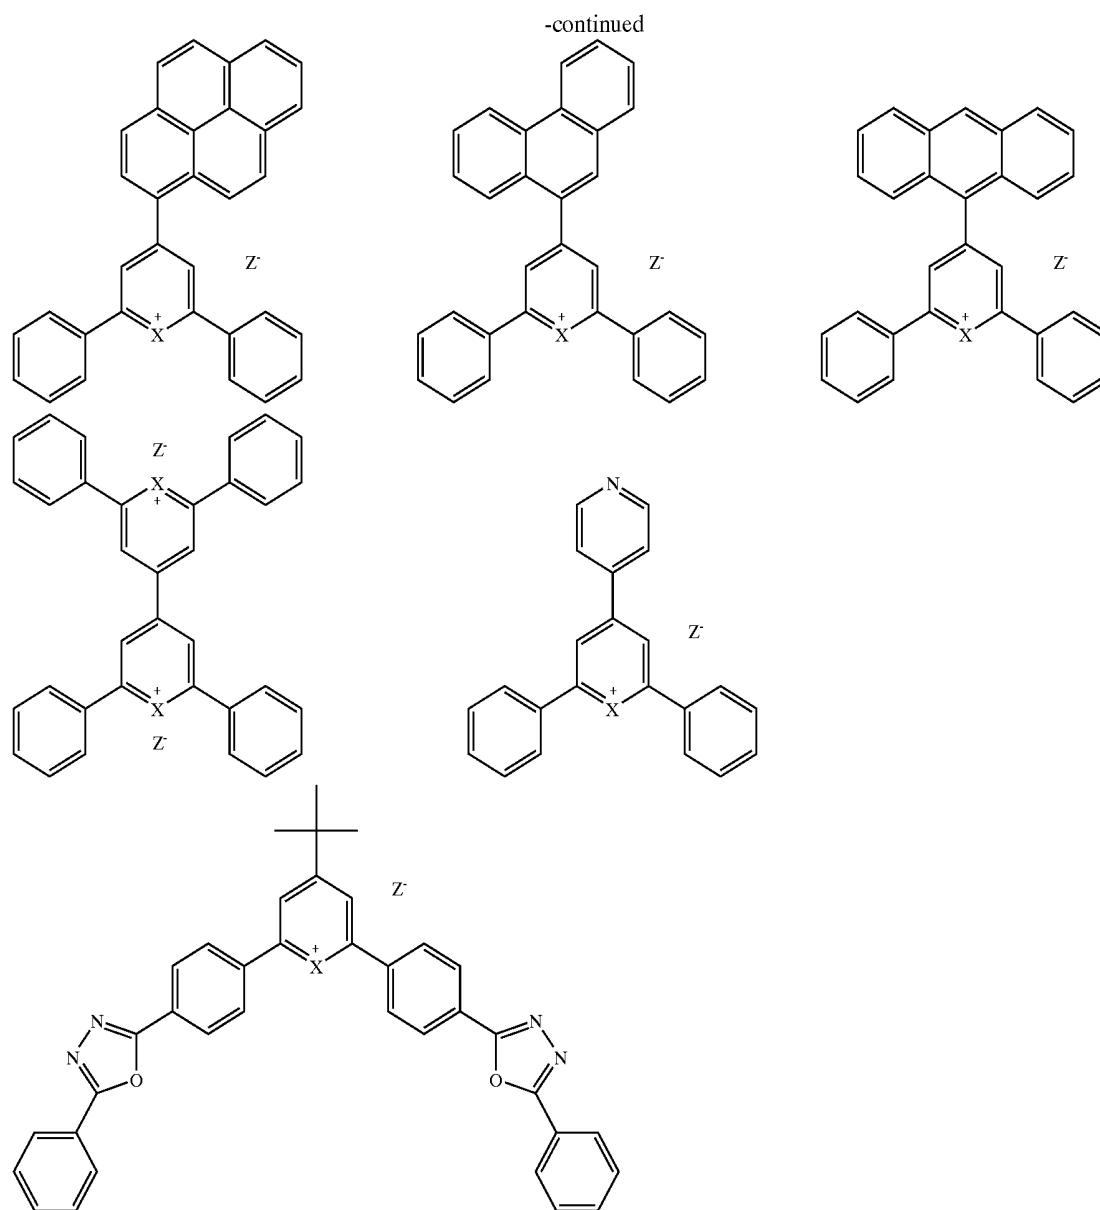

[0025] In the above preferred pyrylium salts or pyrylium derivatives, X is either O or S; and Z is an anionic function-including ion, such as Cl^- , Br^- , F^- , tetrafluoroborate, perchlorate, methanesulfonate, or phosphohexafluoride.

[0026] The compound expressed according to formula (I) can be used directly as the charge transport layer, or can be incorporated into a polymer as a unit or as a pendant side group. In addition, such a pyrylium salt or pyrylium derivative can be doped into a matrix medium when the charge transport layer comprises a charge transport functional material plus a dopant. Further, the pyrylium salt or pyrylium derivative can be used as a host to enhance charge injection and transport property wherein a dopant emitter may be doped for controlling emission color.

[0027] In one typical application, the compound expressed according to the above formula (I) can be used directly as the transport layer in multi-layer devices, such as a two layer

device, shown in FIG. 1, or a three layer device, shown in FIG. 2, as described more fully below.

[0028] In FIG. 1, a two layer device comprises an emissive layer 103 and an electron transport layer 105 sandwiched between a cathode 106 and an anode 101.

[0029] In FIG. 2, a three layer device comprises an emissive layer 203 sandwiched between an electron transport layer 205 and a hole transport layer 202. Additionally, the emissive layer 203, electron transport layer 205 and hole transport layer 202 are sandwiched between a cathode 206 and an anode 201.

[0030] General procedures for an fabrication of an OLED are as follows: To construct a three layer device, as in FIG. 2, a clean substrate coated with a patterned layer of indium tin oxide (ITO) is first obtained. Next, the substrate is treated with O_2 plasma for 1-5 minutes. Afterwards, the substrate is placed in a thermal evaporator and the pressure is lowered.

Then, organic and metallic layers are evaporated onto the substrate at a rate approximately between 1-3 Å/s. These organic and metallic layers may vary depending upon the desired OLED. A hole transport layer is usually evaporated with a thickness of ~200 Å. Next, an emissive layer is evaporated with a host and dopant. Normally, 100-400 Å of the emissive layer is deposited. Then, an electron transport material is evaporated to form a layer that is usually 200-400 Å thick. After the evaporation of the preferred organic and metallic layers, a mask is placed adjacent to the layer to define where metal areas corresponding to cathodes are to be evaporated. Then, about 120 Å of a Li—Al alloy is evaporated to improve electron injection into the device. Finally, after about 1500 Å of Al is deposited, the evaporator is allowed to cool.

[0031] Fabrication of a suitable charge transport layer using a pyrylium salt or its derivatives according to the above formula (I) can be accomplished through use of thermal deposition in a vacuum, or by spin coating of a solution thereof. In addition, high-density pixelated displays can be fabricated through use of suitable masking procedures, or by use of thermal or piezoelectric ink jet printing techniques.

[0032] In another typical application, the compound expressed according to the above formula (I) can be incorporated into an emissive layer as a host to enhance charge transport property in a single layer device, as shown in FIG. 3, in which the pyrylium salt or pyrylium derivative is doped into the emissive layer.

[0033] In FIG. 3, a single layer device comprises a combined layer 303, comprising an emissive layer and an electron transport layer, sandwiched between a cathode 306 and an anode 301.

COMPARATIVE EXAMPLE 1

[0034] Cyclic voltametric (CV) analysis of known electron transport material, tris(8-hydroxyquinoline)aluminum (Alq3), was carried out using tetrabutylammonium tetrafluoroborate (TBABF₄, 0.1 M in acetonitrile) as an electrolyte, Pt as a work electrode and Ag/Ag⁺ (0.1 M) as a reference electrode at a scan speed of 100 mV/s. FIG. 4 shows the CV curve, indicating an onset reduction, or surge of reduction at the electrode surface, of -1.68 V. The lowest unoccupied molecular orbital (LUMO) was estimated according to a general formula that gives LUMO (in eV) as the difference between -4.8 and the E_{red} (onset reduction potential in volts) of -1.68. According to this formula, the LUMO was approximately -3.12 eV.

EXAMPLE 1

[0035] A similar CV measurement for a pyrylium salt, 2,4,6-triphenyl pyrylium tetrafluoroborate (TPPFB₄), was performed according to the same conditions as above, in the measurement of Alq3. FIG. 5 shows the CV curve of the pyrylium salt, which indicates a lower onset reduction of -0.44 V and -1.53 V, demonstrating that reduction (or electron injection) is easier for pyrylium salt than Alq3. The LUMO for the pyrylium salt was -3.27 eV (using the second reduction onset for the estimation), being lower than Alq3. A CV comparison also indicates that pyrylium salt not only has lower LUMO level (easier electron injection), but also

has more reversible charge injection character (more stable electrochemical property) than Alq3, as revealed by the features of both CV curves.

EXAMPLE 2

[0036] An OLED device was fabricated with the device structure of ITO/α-NPD 30 nm/Alq3+DCM2 (2%) 20 nm/TPPFB₄ 30 nm/Al 100 nm, in which ITO refers to indium tin oxide coated glass substrate, α-NPD refers to a hole transport layer with N,N'-Di(naphthalen-1-yl)-N,N'-diphenyl-benzidine, DCM2 refers to a red dopant emitter, 4-(Dicyanomethylene)-2-methyl-6-(p-dimethylaminostyryl)-4H-pyran, and TPPFB₄ refers to 2,4,6-triphenyl pyrylium tetrafluoroborate as the electron transport layer. The device was fabricated according to procedures known in the art. The device emitted red light with a brightness of 315 cd/m² when a forward bias voltage of 5.2 V was applied. The brightness changed to 250 cd/m² at 5.2 V (retained 80% original brightness) after continuously working for 6 hours at 5.2 V.


COMPARATIVE EXAMPLE 2

[0037] An OLED device was fabricated in a similar manner as described in Example 2, with the exception of using Alq3 as the electron transport layer. The OLED had a device structure of ITO/α-NPD 30 nm/Alq3+DCM2 (2%) 20 nm/Alq3 30 nm/Al 100 nm. The device emitted red light with a brightness of 315 cd/m² when a forward bias voltage of 5.8 V was applied. The brightness changed to 180 cd/m² at 5.8 V (retained 58% original brightness) after continuously working for 6 hours at 5.8 V.

EXAMPLE 3

[0038] An OLED device was fabricated in a similar manner as described in Example 2, with the exception of using TPPBF₄ as a host material. The OLED had a device structure of ITO/α-NPD 30 nm/TPPBF₄+DCM2 (2%) 20 nm/TPPBF₄ 30 nm/Al 100 nm. The device emitted red light with a brightness of 315 cd/m² when a forward bias voltage of 4.8 V was applied. The brightness changed to 300 cd/m² at 4.8 V (retained 95% original brightness) after continuously working for 6 hours.

1. An organic light emitting device comprising an anode, a cathode, and one or more organic compound layers sandwiched between the anode and cathode, including a light emissive layer, wherein at least one of the organic compound layers includes charge transporting material of pyrylium salt or its derivative according to the following general formula (I):

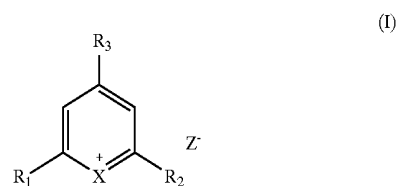

wherein R1, R2 and R3 represent an alkyl, aryl, or heteroaryl having up to 50 carbon atoms; Z represents an anionic function-including ion and X is oxygen, sulfur, selenium or tellurium.

2. An organic light emitting device according to claim 1, wherein the derivatives include thiapyrylium, selenapyrylium, and telluropirylium.

3. An organic light emitting device according to claim 1, wherein the pyrylium salt or its derivative is incorporated into a polymer as a unit or as a pendent side group.

4. An organic light emitting device according to claim 1, wherein the emissive layer includes a host of the pyrylium salt or its derivative.

5. An organic light-emitting device according to claim 1, wherein the pyrylium salt is 2,4,6-triphenylpyrylium salt.


6. An organic light-emitting device according to claim 1, wherein the pyrylium salt is 4,4'-bipyrylium salt.

7. An organic light emitting device comprising an emissive layer, at least one charge transport layer, an anode and a cathode,

wherein the emissive layer is sandwiched between two charge transport layers, a charge transport layer and an anode, or a charge transport layer and a cathode,

wherein the charge transport layer is either an electron transport layer or a hole transport layer, and

wherein the charge transport layer includes a pyrylium salt or derivative according to the following general formula (I):



(I)

wherein R1, R2 and R3 represent and alkyl, aryl, or heteroaryl having up to 50 carbon atoms; Z represents

an anionic function-including ion and X is oxygen, sulfur, selenium or tellurium.

8. An organic light emitting device according to claim 7, wherein the derivatives include thiapyrylium, selenapyrylium, and telluropyrylium.

9. An organic light-emitting device according to claim 7, wherein the pyrylium salt or derivative is incorporated into a polymer as a unit or as a pendent side group.

10. An organic light-emitting device according to claim 7, wherein the charge transport layer comprises a charge transport functional material and a pyrylium salt dopant.

11. An organic light-emitting device according to claim 7, wherein both of an electron transport layer and a hole transport layer are provided.

12. An organic light-emitting device according to claim 7, wherein the pyrylium salt is 2,4,6-triphenylpyrylium salt.

13. An organic light-emitting device according to claim 7, wherein the pyrylium salt is 4,4'-bipyrylium salt.

14. An organic light emitting device according to claim 1, wherein the anionic function-including ion is Cl⁻, Br⁻, F⁻, tetrafluoroborate, perchlorate, methanesulfonate, or phosphohexafluoride.


15. An organic light emitting device according to claim 7, wherein the anionic function-including ion is Cl⁻, Br⁻, F⁻, tetrafluoroborate, perchlorate, methanesulfonate, or phosphohexafluoride.

* * * * *

专利名称(译)	具有吡喃鎓盐作为电荷传输材料的有机发光装置		
公开(公告)号	US20040209114A1	公开(公告)日	2004-10-21
申请号	US10/417128	申请日	2003-04-17
[标]申请(专利权)人(译)	佳能株式会社		
申请(专利权)人(译)	佳能株式会社		
当前申请(专利权)人(译)	佳能株式会社		
[标]发明人	LI XIAO CHANG CHARLES UENO KAZUNORI SAITOH AKIHITO TANABE HIROSHI OKAMOTO TADASHI		
发明人	LI, XIAO-CHANG CHARLES UENO, KAZUNORI SAITOH, AKIHITO TANABE, HIROSHI OKAMOTO, TADASHI		
IPC分类号	H01L51/50 C09K11/06 H05B33/12 H05B33/14 H05B33/22		
CPC分类号	C09K11/06 C09K2211/1029 C09K2211/1048 C09K2211/1088 Y10S428/917		
其他公开文献	US6841270		
外部链接	Espacenet USPTO		

摘要(译)

使用吡喃鎓盐或其衍生物如噻喃鎓，硒噻喃或碲基吡喃作为电荷传输材料和/或至少电荷传输层中的掺杂剂或主要成分的有机发光器件 (OLED)。

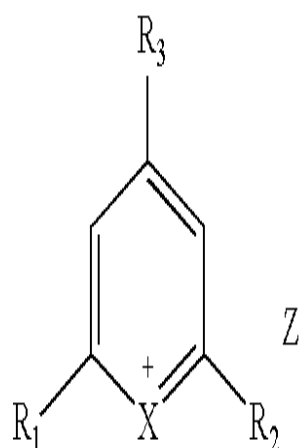

(I)