



US 20050088381A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0088381 A1**
Park et al. (43) **Pub. Date: Apr. 28, 2005**(54) **ACTIVE MATRIX ORGANIC
ELECTROLUMINESCENCE DISPLAY
DEVICE AND METHOD FOR
MANUFACTURING THE SAME****Publication Classification**(51) **Int. Cl.⁷** **G09G 3/30**(52) **U.S. Cl.** **345/77**(76) **Inventors: Jae Yong Park, Seoul (KR); Sung Ki
Kim, Seoul (KR)**(57) **ABSTRACT**

Correspondence Address:

**MCKENNA LONG & ALDRIDGE LLP
1900 K STREET, NW
WASHINGTON, DC 20006 (US)**(21) **Appl. No.: 10/992,643**(22) **Filed: Nov. 22, 2004****Related U.S. Application Data**(62) **Division of application No. 10/026,476, filed on Dec.
27, 2001, now Pat. No. 6,836,075.**(30) **Foreign Application Priority Data**

Dec. 29, 2000 (KR) 2000-85560

An active matrix organic electroluminescence display device and a method for manufacturing the same are disclosed. The active matrix organic electroluminescence display device includes a scan line in one direction, a data line substantially perpendicular to the scan line, a power line substantially parallel to the data line a distance from the data line, an electroluminescence device emitting light in a pixel region among the scan line, the data line and the power line, a switching transistor for switching a signal of the data line according to a signal of the scan line, and a driving transistor for applying a power supply of the power line to the electroluminescence device according to a signal applied through the switching transistor, the switching transistor or the driving transistor formed by a sequential lateral solidification (SLS) method.

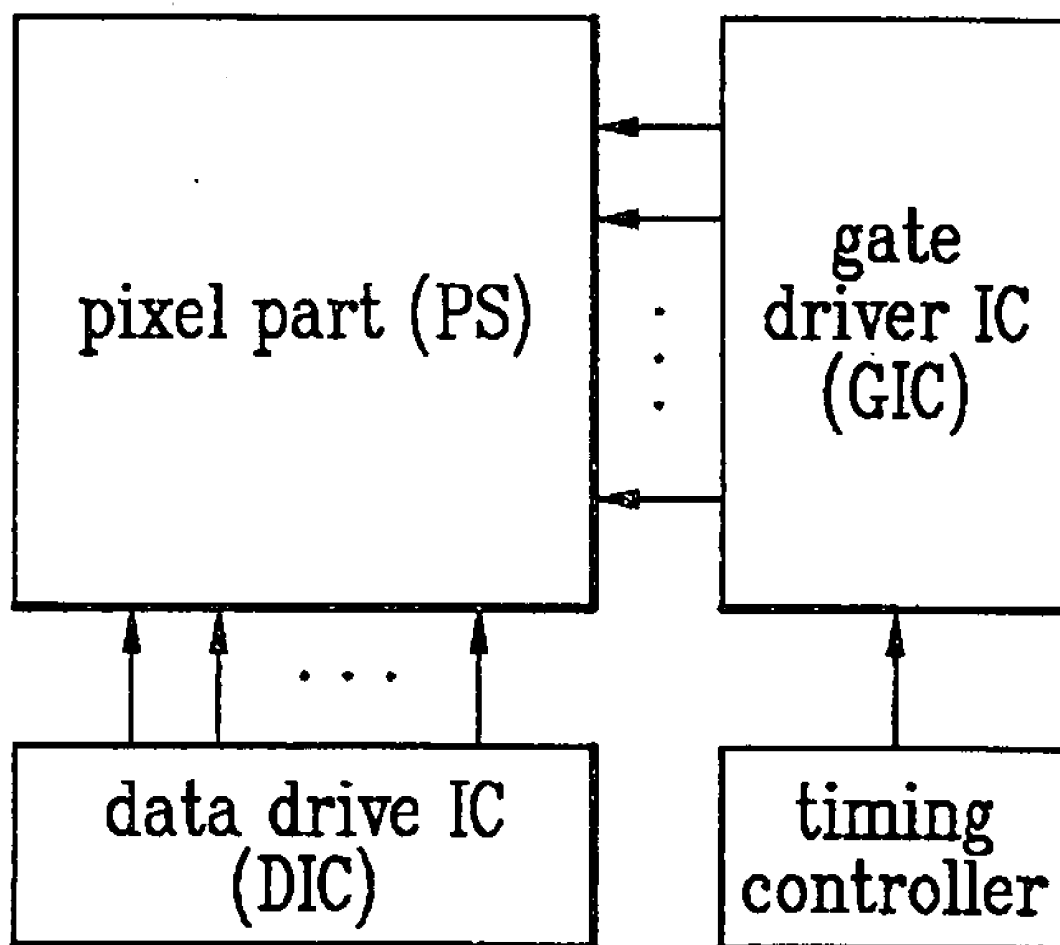


FIG. 1
Related Art

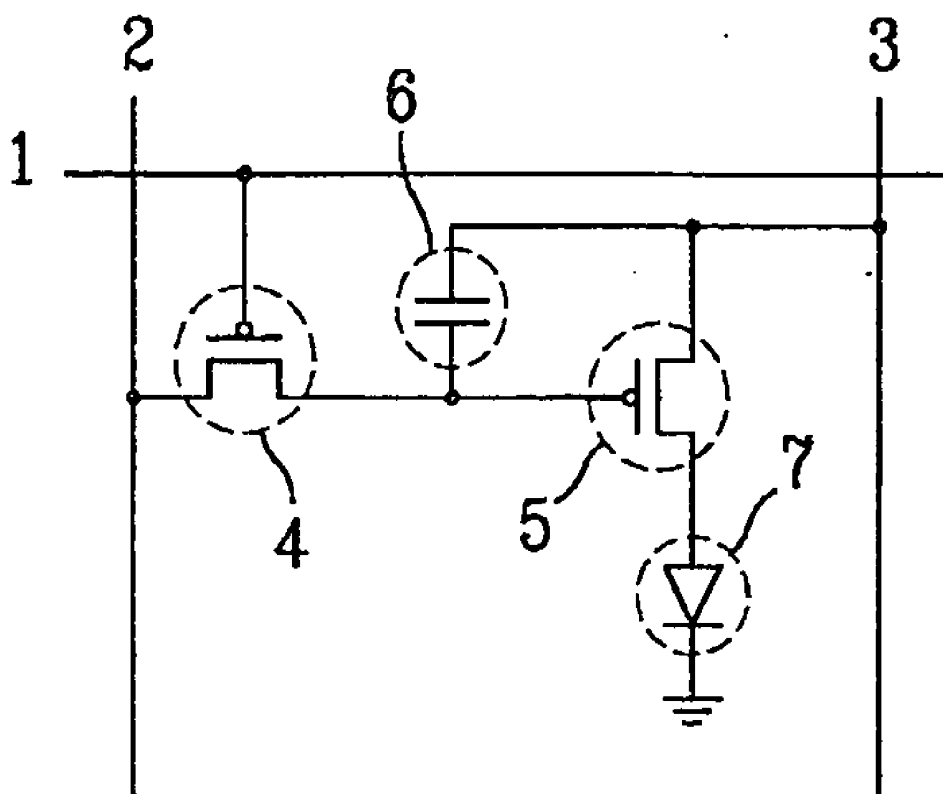


FIG. 2
Related Art

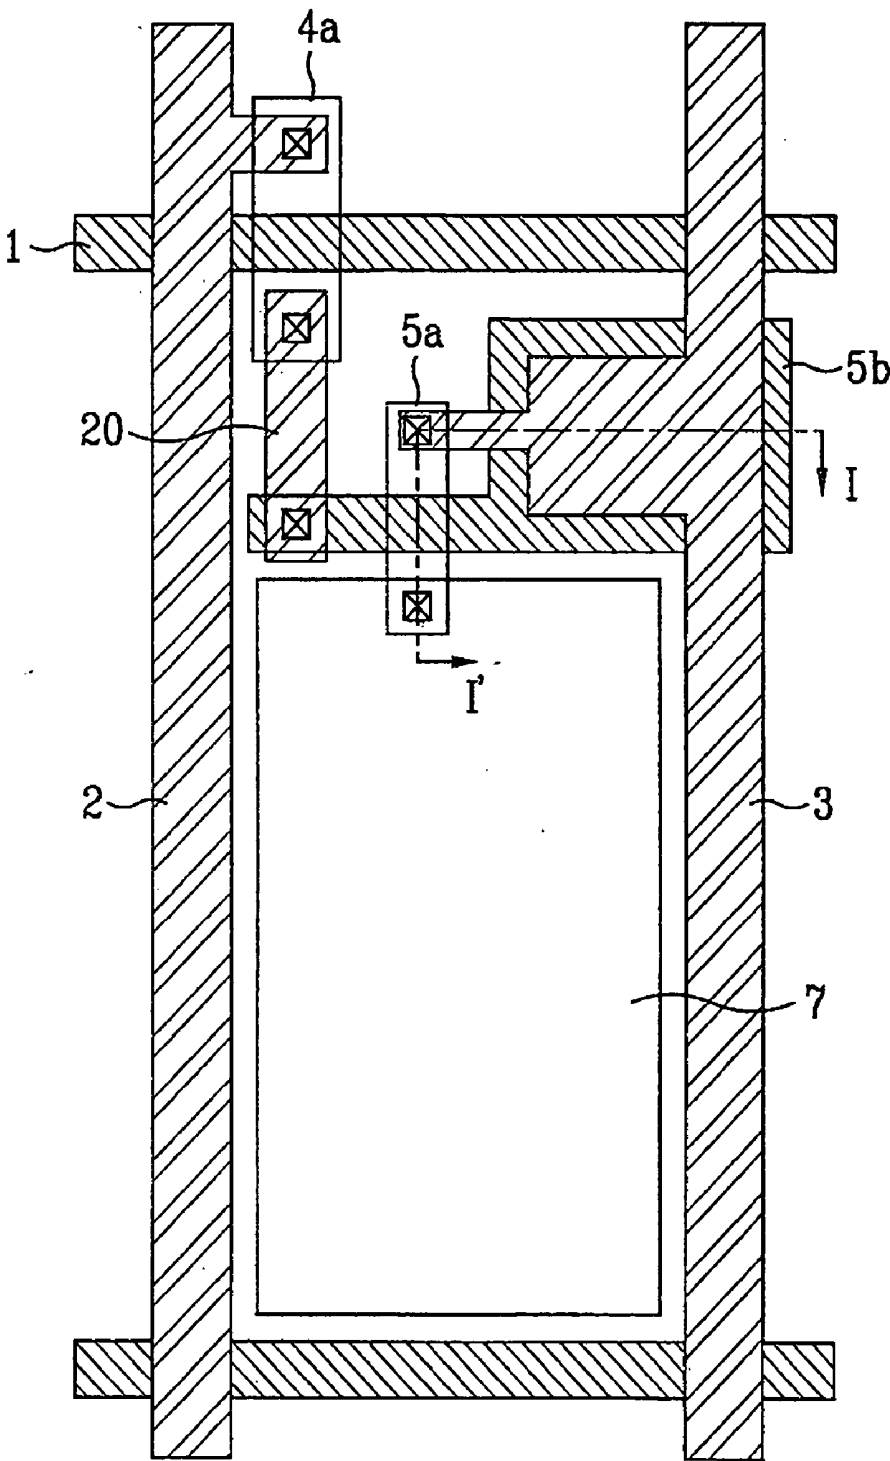


FIG. 3
Related Art

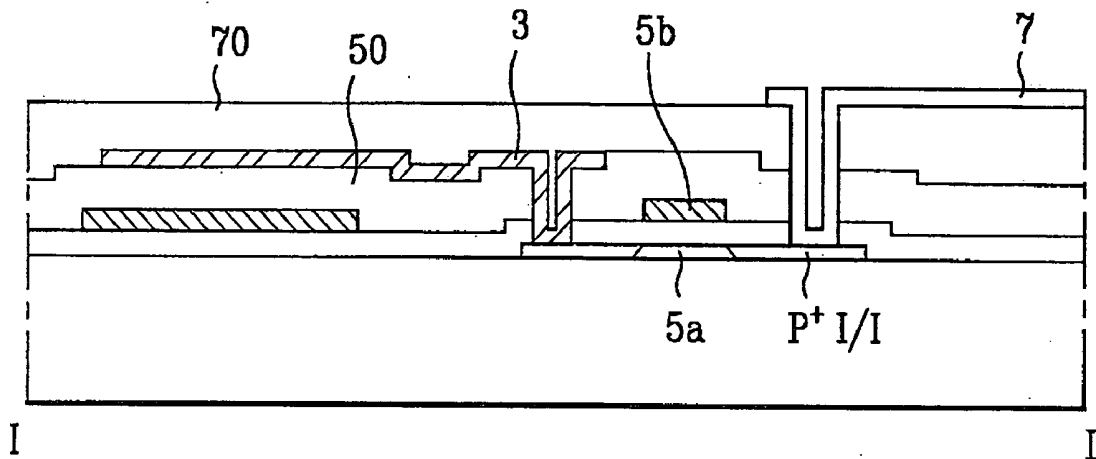


FIG. 4
Related Art

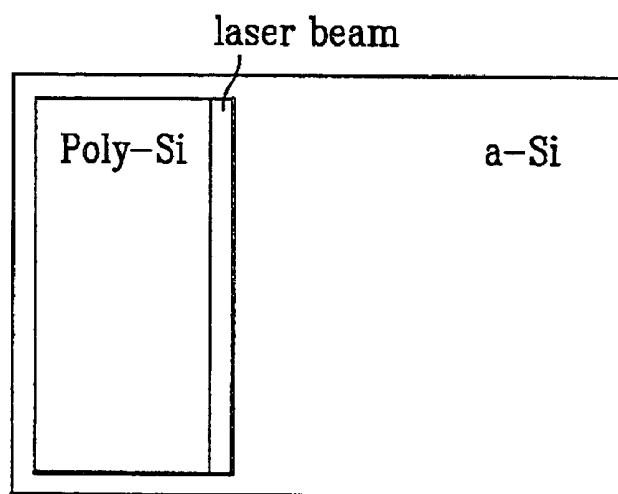


FIG. 5
Related Art

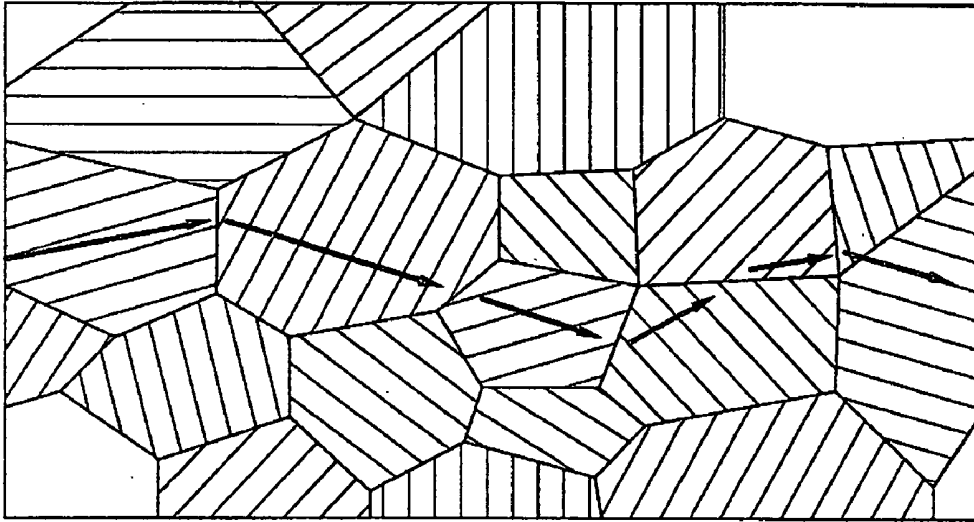


FIG. 6

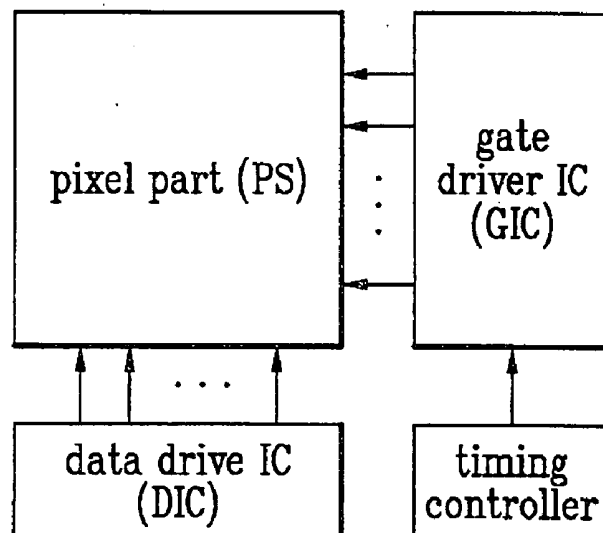


FIG. 7

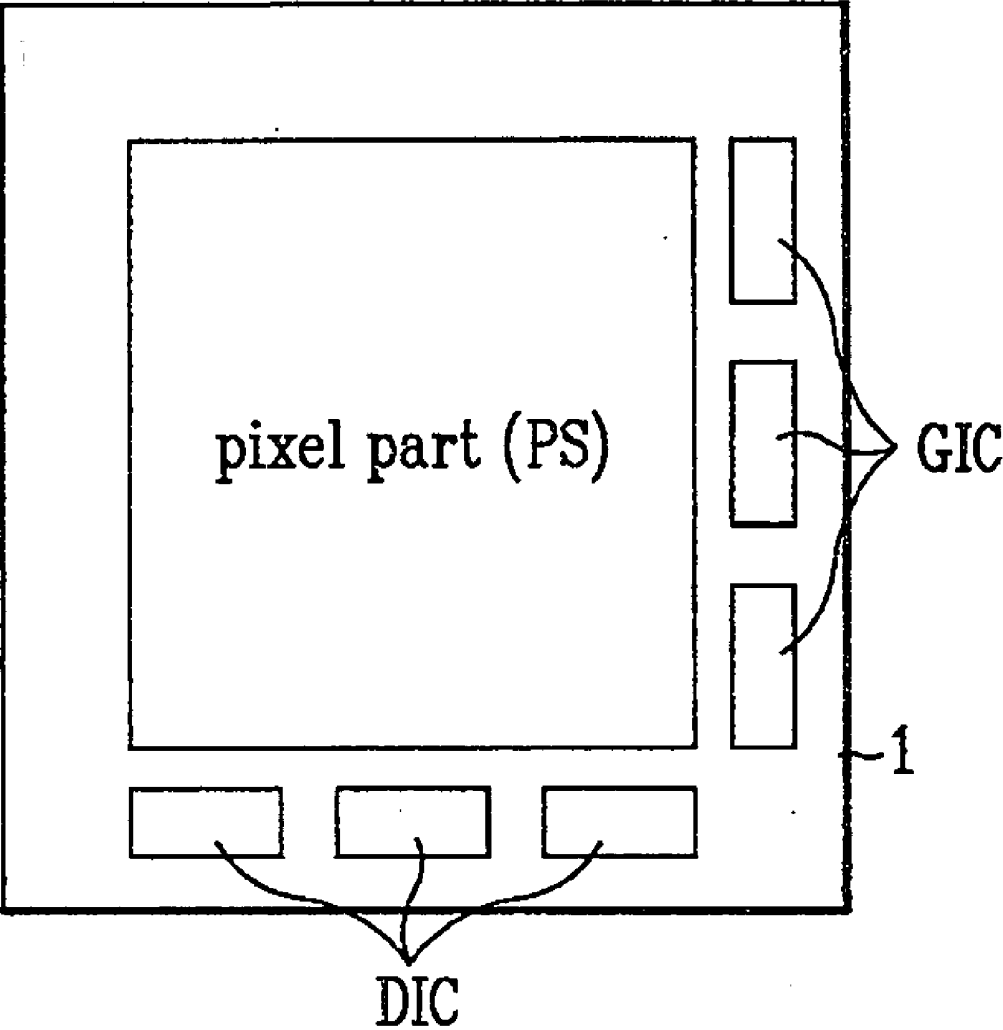


FIG. 8


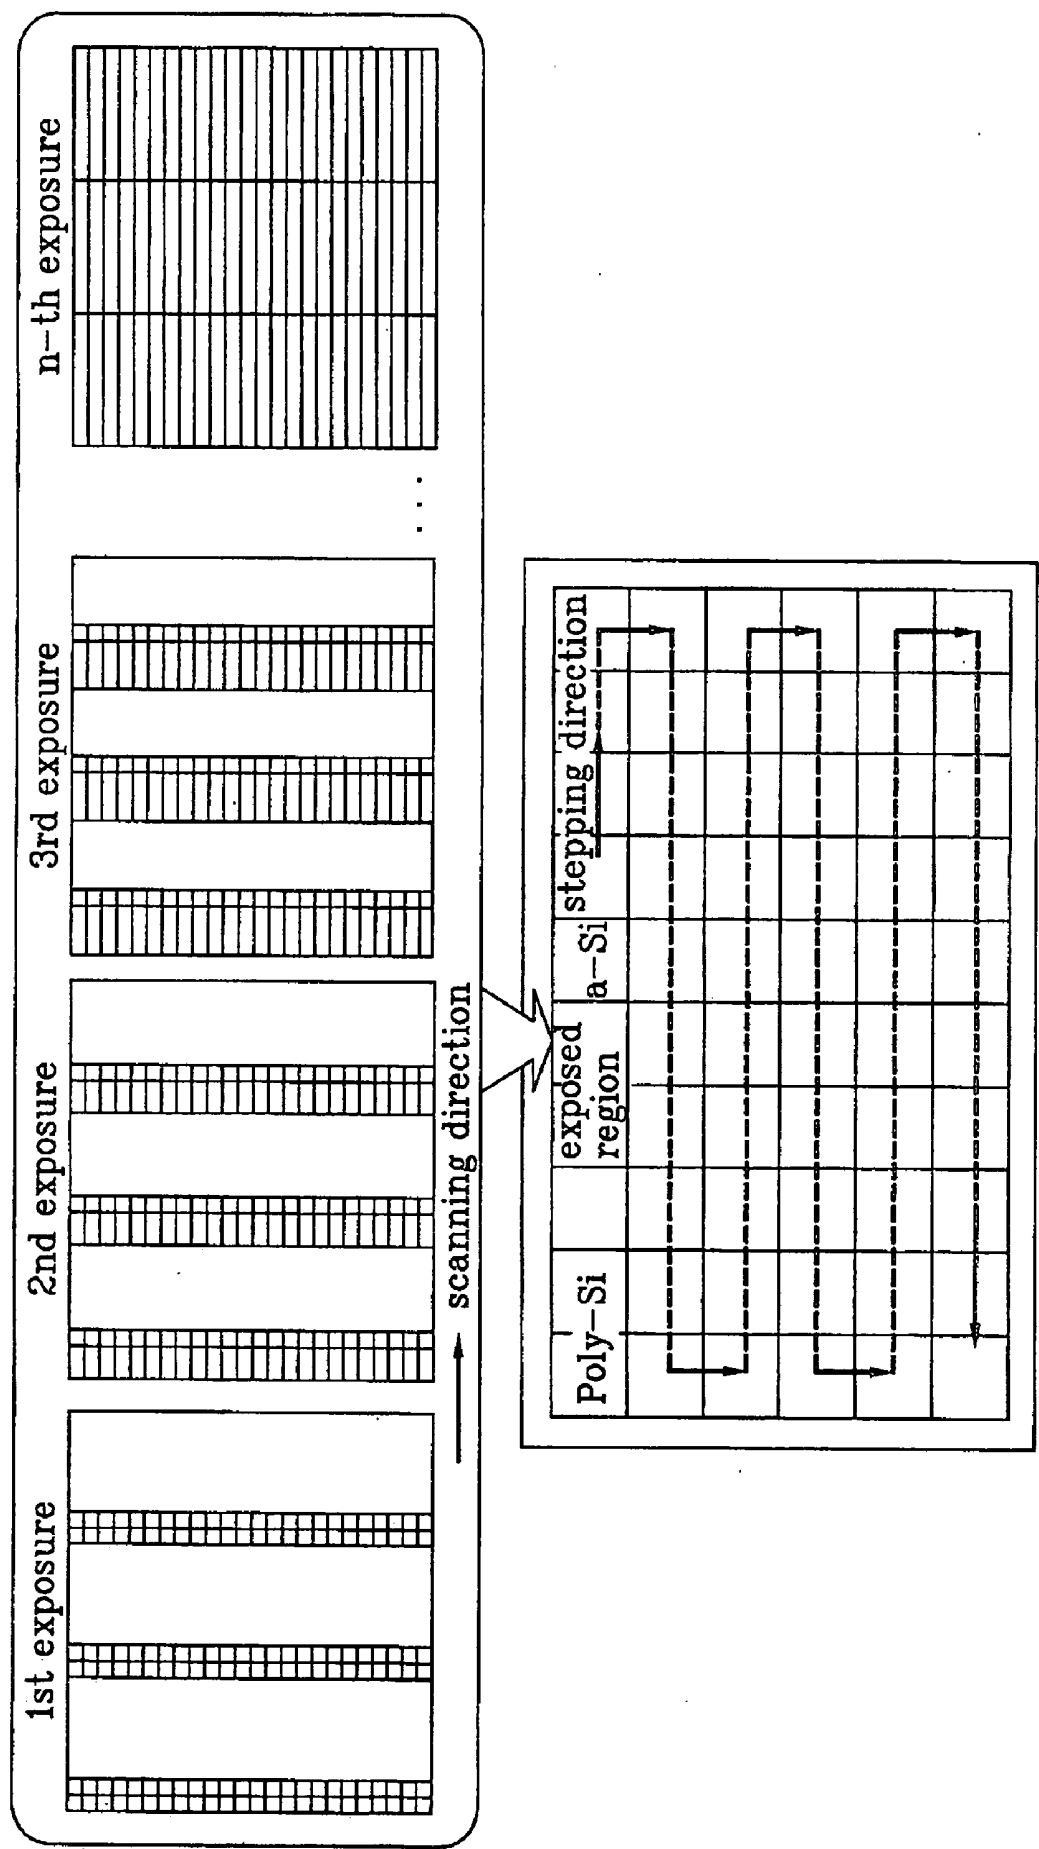


FIG. 9

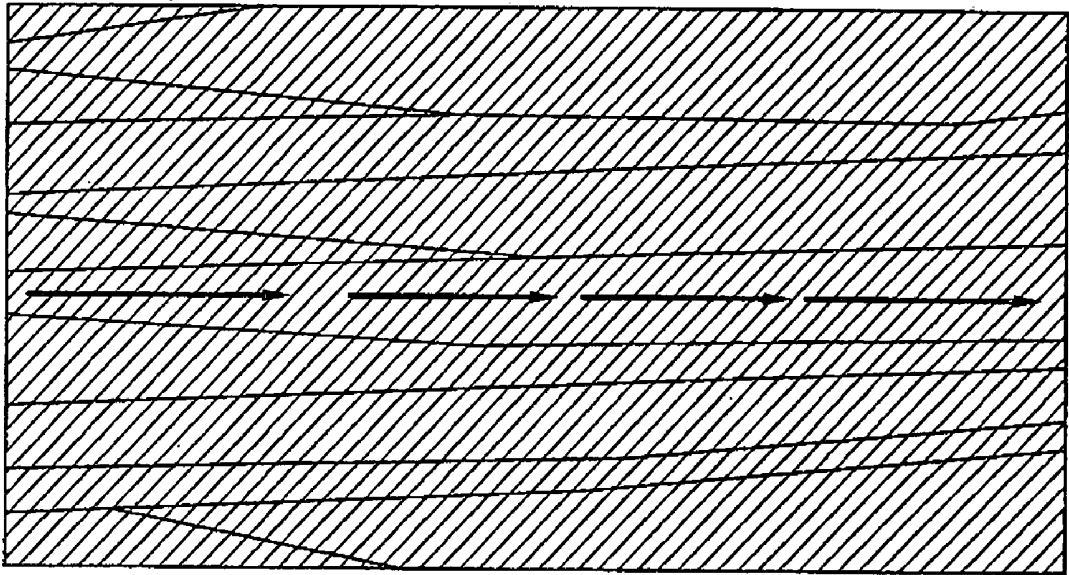

ACTIVE MATRIX ORGANIC ELECTROLUMINESCENCE DISPLAY DEVICE AND METHOD FOR MANUFACTURING THE SAME

[0001] This application claims the benefit of the Korean Application No. P.2000-085560 filed on Dec. 29, 2000, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to an active matrix organic electroluminescence display device, and more particularly, to an active matrix electroluminescence display device and a method for manufacturing the same by a sequential lateral solidification (SLS) method that can obtain greater uniformity of luminance and a packing density of an integrated circuit (IC) than a related art low temperature poly process.

[0004] 2. Discussion of the Related Art

[0005] Recently, various display devices such as liquid crystal display (LCD) device, a plasma display panel (PDP) device, a field emission display (FED) device and an electroluminescence (EL) device have been studied with development of flat display devices. These flat display devices are classified into two types according to a driving method: a passive matrix method and an active matrix method. The passive matrix method requires current greater than the active matrix method.

[0006] Accordingly, in current driving methods of the FED and EL devices, it is regarded that the active matrix method is more efficient than the passive matrix method because the passive matrix method requires a greater current level than the active matrix method even though a line transmission time is equal.

[0007] FIG. 1 is an equivalent circuit diagram of a unit pixel in a related art two transistor (2T) active matrix organic electroluminescence display (OED) device.

[0008] As shown in FIG. 1, the related art active matrix organic electroluminescence display device includes a scan line 1, a data line 2, a power line 3, an electroluminescence device 7, a switching transistor 4, a driving transistor 5 and a capacitor 6.

[0009] At this time, the scan line 1 is formed in one direction, and then the data line 2 is formed perpendicular to the scan line 1. The power line 3 is formed in parallel to the data line 2 at a distance from the data line 2. The electroluminescence device 7 emits lights according to a voltage applied in a pixel region formed by the scan line 1, the data line 2 and the power line 3. The switching transistor 4 switches a signal of the data line 2 according to a signal of the scan line 1. Subsequently, the driving transistor 5 applies a power supply of the power line to the electroluminescence device according to a signal applied through the switching transistor 4. The capacitor 6 is formed between the power line 3 and a gate electrode of the driving transistor 5.

[0010] A structure of the unit pixel in the related art active matrix organic electroluminescence display device and a

method of manufacturing the same will be described with reference to the accompanying drawings.

[0011] FIG. 2 is a layout of the related art active matrix organic electroluminescence display device of FIG. 1.

[0012] FIG. 3 is a sectional view of the related art active matrix organic electroluminescence display device taken along line I-I' of FIG. 2.

[0013] First and second semiconductor layers 4a and 5a having an island-shape are formed on portions of a substrate 10 where the switching and driving transistors 4 and 5 will be formed, respectively. At this time, an amorphous silicon a-Si:H is deposited on entire surface of the substrate. Then, the amorphous silicon is crystallized to a polysilicon in a scanning method using an excimer laser and is selectively removed to form the first and second semiconductor layers 4a and 5a.

[0014] A gate insulating layer 30 is formed on the entire surface of the substrate 10 including the first and second semiconductor layers 4a and 5a. Then, the scan line 1 is formed to cross the first semiconductor layer 4a on the gate insulating layer 30, and the gate electrode of the driving transistor 5b is formed to cross the second semiconductor layer 5a. At this time, the scan line 1 and the gate electrode 5b of the driving transistor are isolated from each other, and the gate electrode 5b is widened at a certain portion to form a capacitor overlapped with the power line 3, which will be formed in a later step.

[0015] Impurity ions are injected to the first and second semiconductor layers at both sides of the scan line 1 and the gate electrode 5b of the driving transistor, thereby forming source/drain regions, respectively.

[0016] Accordingly, the switching transistor 4 is formed by the scan line 1 and the first semiconductor layer 4a, and the driving transistor 5 is formed by the gate electrode 5b and the second semiconductor layer 5a.

[0017] An insulating interlayer 50 is formed on the entire surface of the substrate including the scan line 1 and the gate electrode 5b, and then contact holes are respectively formed at source and drain regions and the gate electrode 5b of the first semiconductor layer 4a, and the source region of the second semiconductor layer 5a.

[0018] The data line 2 connected with the source region of the first semiconductor layer 4a is formed perpendicular to the scan line 1 on the insulating interlayer 50. The power line 3 connected with the source region of the second semiconductor layer 5a is formed perpendicular to the scan line 1 to be overlapped with the gate electrode 5b. Then, an electrode pattern 20 is formed to connect the drain region of the first semiconductor layer 4a to the gate electrode 5b. At this time, the capacitor 6 is formed in a portion where the gate electrode 5b and the power line 3 overlap each other.

[0019] Then, an insulating layer 70 for planarization is formed on the entire surface of the substrate 10. The contact hole is formed at the drain region of the second semiconductor layer 5a on the insulating layer 70, thereby forming the electroluminescence device 7 connected to the drain region.

[0020] A method of manufacturing the related art active matrix organic electroluminescence display device having the above structure will be described as follows.

[0021] The amorphous silicon a-Si:H is deposited on the substrate **10**, and then is crystallized to the polysilicon by an excimer laser. Then, the crystallized polysilicon is selectively removed to form the first and second semiconductor layers **4a** and **5a** having an island shape corresponding to portions where the switching and driving transistors **4** and **5** will be formed, respectively.

[0022] A method for crystallizing the amorphous silicon to the polysilicon by the scanning method of the excimer laser will be described in detail.

[0023] FIG. 4 is a plan view for illustrating the method of crystallizing according to a related art laser annealing method (scanning method).

[0024] A laser beam having a width of 0.5 mm or less and a length shorter than an LCD panel is emitted to the amorphous silicon for crystallizing the amorphous silicon as polysilicon in the scanning method. At this time, the laser beam is transferred at 25 μm per pulse from one side of the LCD panel to other side vertically.

[0025] The gate insulating layer **30** is formed on the entire surface of the substrate **10** including the first and second semiconductor layers **4a** and **5a**, and then a metal layer is deposited on the entire surface of the substrate. Then, the metal layer is selectively removed to form the scan line **1** crossing the first semiconductor layer **4a** on the gate insulating layer **30**, simultaneously, to form the gate electrode **5b** of the driving transistor crossing the second semiconductor layer **5a**. At this time, the scan line **1** and the gate electrode **5b** of the driving transistor are isolated from each other. Then the gate electrode **5b** is widened at a certain portion to form a capacitor overlapped with the power line **3**, which will be formed in a later step.

[0026] Impurity ions are injected to the first and second semiconductor layers **4a** and **5a** using the scan line **1** and the gate electrode **5b** of the driving transistor as masks, thereby forming the source and drain regions of the switching and driving transistors.

[0027] Accordingly, the switching device **4** is formed by the scan line **1** and the first semiconductor layer **4a**, and the driving transistor **5** is formed by the gate electrode **5b** and the second semiconductor layer **5a**.

[0028] The insulating interlayer **50** is formed on the entire surface of the substrate **10** including the scan line **1** and gate electrode **5b**. Then, the insulating interlayer **50** and the gate insulating layer **30** are selectively removed to expose the source and drain regions and the gate electrode **5b** of the first semiconductor layer **4a**, and the source region of the second semiconductor layer **5a**, thereby forming each contact hole.

[0029] The metal layer is deposited on the entire surface of the substrate and then is selectively removed. Therefore, the data line **2** connected with the source region of the first semiconductor layer **4a** is formed perpendicular to the scan line **1** on the insulating interlayer **50**. Simultaneously, the power line **3** connected with the source region of the second semiconductor layer **5a** is formed perpendicular to the scan line **1** to be overlapped with the gate electrode **5b**. Then, the electrode pattern **20** is formed to connect the drain region of the first semiconductor layer **4a** to the gate electrode **5b**.

[0030] Then, the insulating layer **70** is formed on the entire surface of the substrate. The contact hole is formed at the

drain region of the second semiconductor layer **5a** on the insulating layer **70**, thereby forming the electroluminescence device **7** connected to the drain region.

[0031] However, the related art active matrix organic electroluminescence display device and the method for manufacturing it have the following problems.

[0032] FIG. 5 illustrates a grain boundary and a carrier movement direction of the polysilicon in the crystallizing method of the related art scanning method.

[0033] The amorphous silicon is crystallized to polysilicon by the excimer laser to form the first and second semiconductor layers, but the grain boundary is irregularly formed perpendicular to a channel direction. Accordingly, an operating voltage of each transistor is not uniform, thereby generating a line on a display panel.

[0034] That is, the amorphous silicon is deposited on the substrate, and then the amorphous silicon is crystallized to polysilicon in the scanning method by the excimer laser. At this time, the amorphous silicon includes Hydrogen at a certain ratio. Therefore, Hydrogen has to be removed and the amorphous silicon has to be crystallized at a low temperature to prevent deformation from occurring in the substrate. That is, the manufacturing process steps are complicated.

[0035] Also, a certain pulse is applied to each scanning line in the scanning method by the excimer laser, and the laser is not successively emitted. Accordingly, laser energy emitted to each scanning line is not uniform, thereby generating the line on the display panel. That is, a characteristic of a TFT according to each scanning line is irregular due to the lines on the display panel, so that the lines are reflected to the active matrix organic electroluminescence display device, thereby degrading uniformity of luminance.

[0036] That is, the semiconductor layer serves as a channel, and a current path is formed of silicon. At this time, a crystallized state of the silicon grain is irregular, so that the characteristic of the TFT driving each pixel is different. Therefore, even though an equal gray level is applied, the amount of the current in each TFT is different, thereby generating a luminance difference between pixels.

[0037] Also, since a size of the silicon grain is not regular, a non-uniform characteristic is generated in a boundary of the grain during fabricating the TFT, thereby generating non-uniform luminance.

[0038] To solve a problem such as the non-uniform luminance, technology forming four TFTs in the pixel region is used. However, the technology may generate defects in manufacturing process steps. Also, an aperture ratio may be decreased by an increased number of TFTs.

SUMMARY OF THE INVENTION

[0039] Accordingly, the present invention is directed to an active matrix organic electroluminescence display device that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0040] An advantage of the present invention is to provide an active matrix organic electroluminescence display device in which a thin film transistor (TFT) of a driving part for driving an electroluminescence (EL) device and/or a TFT of a driving integrated circuit (IC) connected to the driving part

are/is manufactured by a sequential lateral solidification (SLS) method, so that uniformity of the TFT characteristic is improved, thereby improving uniformity of luminance.

[0041] Another advantage of the present invention is to provide an active matrix organic electroluminescence display device in which a TFT of a driver IC (external driving circuit) is formed by an SLS method, so that it is possible to form a pixel and a driving circuit in the same substrate, thereby miniaturizing the active matrix organic electroluminescence display device by improving packing density.

[0042] Additional advantages and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0043] To achieve these and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an active matrix organic electroluminescence display device includes a scan line in one direction, a data line substantially perpendicular to the scan line, a power line substantially parallel to the data line, keeping a distance with the data line, an electroluminescence device emitting light, formed in a pixel region among the scan line, the data line and the power line, a switching transistor switching a signal of the data line according to a signal of the scan line, and a driving transistor applying a power supply of the power line to the electroluminescence device according to a signal applied through the switching transistor, the switching transistor or the driving transistor formed by a sequential lateral solidification (SLS) method.

[0044] In another aspect of the present invention, a method for manufacturing an active matrix organic electroluminescence display device includes the steps of depositing an amorphous silicon on a substrate, crystallizing the amorphous silicon to a polysilicon by an SLS method, forming first and second semiconductor layers in portions where switching and driving transistors will be formed by selectively removing the crystallized polysilicon, forming a gate insulating film on an entire surface of the substrate including the semiconductor layers, forming a scan line to cross the first semiconductor layer on the gate insulating layer, simultaneously, a gate electrode of the driving transistor to cross the second semiconductor layer, forming source and drain regions of switching and driving transistors on the first and second semiconductor layers at both sides of the scan line and the gate electrode of the driving transistor, depositing an insulating interlayer on the entire surface of the substrate, forming contact holes to expose the source and drain regions of the first semiconductor layer, the gate electrode of the driving transistor and the source region of the second semiconductor layer, respectively, forming a data line connected to the source region of the first semiconductor layer substantially perpendicular to the scan line on the insulating interlayer, simultaneously, a power line connected to the source region of the second semiconductor layer substantially perpendicular to the scan line, being overlapped with the gate electrode of the driving transistor, at the same time, an electrode pattern to connect the drain region

of the first semiconductor layer to the gate electrode of the driving transistor, forming an insulating layer for planarization to have a contact hole in the drain region of the second semiconductor layer, and forming an electroluminescence device connected to the drain region on the insulating layer.

[0045] In the present invention, at least one of a TFT of a driving part for driving an EL device and a TFT of a driver IC for driving the TFT of the driving part is formed by an SLS method, so that a polysilicon having crystallized grain and uniform grain size is formed, thereby improving uniformity of TFT characteristic. Therefore, uniform luminance of each pixel can be obtained in an active matrix organic electroluminescence display device driven by the TFT.

[0046] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0047] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention.

[0048] In the drawings:

[0049] FIG. 1 illustrates an equivalent circuit diagram of a unit pixel of a related art two transistor (2T) active matrix organic electroluminescence display device;

[0050] FIG. 2 illustrates a layout of the active matrix organic electroluminescence display device of FIG. 1;

[0051] FIG. 3 illustrates a sectional view of the active matrix organic electroluminescence display device taken along line I-I' of FIG. 2;

[0052] FIG. 4 illustrates a plan view for explaining a method of crystallizing by a related art scan method;

[0053] FIG. 5 illustrates a plan view of a polysilicon crystallized by the related art scan method;

[0054] FIG. 6 illustrates a method forming a TFT of a pixel region by a sequential lateral solidification (SLS) method in the active matrix organic electroluminescence display device according to a first embodiment of the present invention;

[0055] FIG. 7 illustrates a method forming a pixel region and a TFT of a driving IC for driving the pixel region by an SLS method in the active matrix organic electroluminescence display device according to a second embodiment of the present invention;

[0056] FIG. 8 illustrates a method for crystallizing by an SLS method according to the present invention; and

[0057] FIG. 9 illustrates a plan view of a polysilicon crystallized by an SLS method according to the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0058] Reference will now be made in detail to the illustrated embodiments of the present invention, examples of

which are illustrated in the accompanying drawings. Wherever possible, similar reference numbers will be used throughout the drawings to refer to the same or like parts.

[0059] FIG. 1 to FIG. 3 illustrate a layout and an equivalent circuit diagram of a unit pixel of an active matrix organic electroluminescence display device according to the present invention.

[0060] As shown in FIG. 1, a circuit structure of a pixel in the active matrix electroluminescence display device includes a scan line 1, a data line 2, a power line 3, an electroluminescence device 7, a switching transistor 4, a driving transistor 5 and a capacitor 6.

[0061] At this time, the scan line 1 is formed in one direction, and then the data line 2 is formed substantially perpendicular to the scan line 1. The power line 3 is formed substantially parallel to the data line 2 at a distance from the data line 2. The electroluminescence device 7 emits light according to a voltage applied in a pixel region formed by the scan line 1, the data line 2 and the power line 3. The switching transistor 4 switches a signal of the data line 2 according to a signal of the scan line 1. Subsequently, the driving transistor 5 applies a power supply of the power line 3 to the electroluminescence device according to a signal applied from the switching transistor 4. The capacitor 6 is formed between the power line 3 and a gate electrode of the driving transistor 5.

[0062] If a pixel part having a plurality of pixel regions of FIG. 1 to FIG. 3, and gate and data driver integrated circuits (ICs) for driving the pixel part are formed in the same substrate, a thin film transistor (TFT) of the pixel part and TFTs of each driver IC are formed by a sequential lateral solidification (SLS) method, thereby obtaining uniformity of the TFTs.

[0063] FIG. 6 illustrates a TFT of a pixel part by a sequential lateral solidification (SLS) method in the active matrix organic electroluminescence display device according to the first embodiment of the present invention.

[0064] As shown in FIG. 6, the pixel part PS is formed on a substrate, and gate and data driver ICs GIC and DIC having a driving circuit for driving the pixel part PS are formed in the external of the substrate. Then, an active layer of the TFT of the pixel part PS is crystallized by the SLS method, and the active layer of the TFTs of the gate and data driver ICs is formed by low temperature polysilicon (LTPS) low temperature process and an excimer laser method.

[0065] FIG. 7 illustrates a method forming a pixel part and a TFT of a driver IC for driving the pixel part by an SLS method in the active matrix organic electroluminescence display device according to the second embodiment of the present invention.

[0066] As shown in FIG. 7, if a pixel part and gate and data driver ICs are formed on the same substrate, the pixel part and semiconductor layers of the TFTs in each driver IC are crystallized by an SLS method.

[0067] At this time, the semiconductor layer of the TFT in the pixel part is formed by LTPS low temperature process and an excimer laser method (scanning method), and the semiconductor layer of the TFT in each driver IC is formed by the SLS method.

[0068] In each embodiment of the present invention, the SLS method is formed any one of an SLS high-throughput poly-Si, an SLS directional poly-Si and an SLS x-Si (crystal-Si).

[0069] A method for manufacturing the TFT of the active matrix organic electroluminescence display device will be described in detail.

[0070] As shown in FIG. 2 and FIG. 3, island-shaped first and second semiconductor layers 4a and 5a are formed in portions of a substrate 10 where each TFT 4 and 5 will be formed.

[0071] At this time, an amorphous silicon a-Si:H is deposited on an entire surface of the substrate. Then, the amorphous silicon is crystallized to a polysilicon in a scanning method using an excimer laser, and then is selectively removed to form the first and second semiconductor layers 4a and 5a.

[0072] A gate insulating layer 30 is formed on an entire surface of the substrate including the first and second semiconductor layers 4a and 5a, and then a scan line 1 is formed to cross the first semiconductor layer 4a on the gate insulating layer 30. Then, a gate electrode of a driving transistor 5b is formed to cross the second semiconductor layer 5a. At this time, the scan line 1 and the gate electrode 5b of the driving transistor are isolated from each other, and the gate electrode 5b is widened at a certain portion to form the capacitor overlapped with a power line 3, which will be formed in a later step.

[0073] Impurity ions are injected to the first and second semiconductor layers at both sides of the scan line 1 and the gate electrode 5b of the driving transistor, thereby forming source and drain regions, respectively.

[0074] Accordingly, the switching transistor (TFT) 4 is formed by the scan line 1 and the first semiconductor layer 4a, and the driving transistor (TFT) 5 is formed by the gate electrode 5b and the second semiconductor layer 5a.

[0075] An insulating interlayer 50 is formed on the entire surface of the substrate including the scan line 1 and the gate electrode 5b, and then contact holes are respectively formed at the source and drain regions and the gate electrode 5b of the first semiconductor layer 4a, and the source region of the second semiconductor layer 5a.

[0076] A data line 2 connected to the source region of the first semiconductor layer 4a is formed substantially perpendicular to the scan line 1 on the insulating interlayer 50. Then, a power line 3 connected with the source region of the second semiconductor layer 5a is formed substantially perpendicular to the scan line 1 to be overlapped with the gate electrode 5b. An electrode pattern 20 is formed to connect the drain region of the first semiconductor layer 4a to the gate electrode 5b. At this time, a capacitor 6 is formed in a portion where the gate electrode 5b and the power line 3 are overlapped to each other.

[0077] Then, an insulating layer for planarization 70 is formed on the entire surface of the substrate. The contact hole is formed at the drain region of the second semiconductor layer 5a on the insulating layer 70, thereby forming an electroluminescence device 7 connected to the drain region.

[0078] A method of manufacturing the active matrix organic electroluminescence display device having the above structure according to the present invention will be described as follows.

[0079] An amorphous silicon a-Si:H is deposited on a substrate **10**, and then is crystallized to a polysilicon by an SLS method. Then, the crystallized polysilicon is selectively removed to form the island shaped first and second semiconductor layers **4a** and **5a** corresponding to portions where switching and driving transistors **4** and **5** will be formed, respectively.

[0080] A method for crystallizing the amorphous silicon to the polysilicon by the SLS method will be described in detail.

[0081] FIG. 8 is a plan view for illustrating the method for crystallizing the amorphous silicon by the SLS method according to the present invention. FIG. 9 illustrates a plan view of a polysilicon crystallized by the SLS method according to the present invention.

[0082] A beam of $2\ \mu\text{m}\times 10\ \text{mm}$ is emitted to the amorphous silicon to form an exposing area of $10\times 10\ \text{mm}^2$ per pulse or less by the SLS method, thereby crystallizing the amorphous silicon to the polysilicon.

[0083] As shown in FIG. 8, the beam is primarily emitted to the amorphous silicon at a constant interval, and then the beam is secondarily emitted to portions of the amorphous silicon, so that the amorphous silicon is crystallized.

[0084] As a result, as shown in FIG. 9, a grain boundary of the polysilicon crystallized is formed in parallel to a channel direction, thereby enhancing the movement of electrons.

[0085] A gate insulating layer **30** is formed on an entire surface of the substrate including the first and second semiconductor layers **4a** and **5a**, and then a metal layer is deposited on the entire surface of the substrate. Then, the metal layer is selectively removed to form the scan line **1** crossing the first semiconductor layer **4a** on the gate insulating layer **30**, simultaneously, to form the gate electrode **5b** of the driving transistor crossing the second semiconductor layer **5a**.

[0086] At this time, the scan line **1** and the gate electrode **5b** of the driving transistor are isolated from each other, and then the gate electrode **5b** is widened at a certain portion to form the capacitor overlapped with the power line **3** that will be formed.

[0087] Impurity ions are injected to the first and second semiconductor layers **4a** and **5a** using the scan line **1** and the gate electrode **5b** of the driving transistor as masks, thereby forming the source and drain regions of the switching and driving transistors.

[0088] Accordingly, the switching transistor **4** is formed by the scan line **1** and the first semiconductor layer **4a**, and the driving transistor **5** is formed by the gate electrode **5b** and the second semiconductor layer **5a**.

[0089] An insulating interlayer **50** is formed on the entire surface of the substrate including the scan line **1** and gate electrode **5b**. Then, the insulating interlayer **50** and the gate insulating layer **30** are selectively removed to expose the source and drain regions and the gate electrode **5b** of the first

semiconductor layer **4a**, and the source region of the second semiconductor layer **5a**, thereby forming contact holes.

[0090] The metal layer is deposited on the entire surface of the substrate, and then is selectively removed, so that the data line **2** connected with the source region of the first semiconductor layer **4a** is formed substantially perpendicular to the scan line **1** on the insulating interlayer **50**. Simultaneously, the power line **3** connected with the source region of the second semiconductor layer **5a** is formed substantially perpendicular to the scan line **1** to be overlapped with the gate electrode **5b**. Then, the electrode pattern **20** is formed to connect the drain region of the first semiconductor layer **4a** to the gate electrode **5b**.

[0091] Then, the insulating layer for planarization **70** is formed on the entire surface of the substrate. The contact hole is formed at the drain region of the second semiconductor layer **5a** on the insulating layer **70**, thereby forming the electroluminescence device **7** connected to the drain region.

[0092] As mentioned above, the active matrix organic electroluminescence display device of the present invention has the following advantages.

[0093] First, a TFT of a driving part for driving an EL device and/or a TFT of a driver IC connected to the driving part are formed by an SLS method, thereby enhancing uniform luminance by improving the TFT characteristic. Therefore, it is possible to improve an aperture ratio of the device with a small number of transistors.

[0094] Furthermore, the TFT of the driver IC (external driving circuit) is formed by the SLS method, so that a pixel and a driving circuit can be formed in the same substrate, thereby obtaining miniaturization of the device.

[0095] It will be apparent to those skilled in the art than various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

1-6. (canceled)

7. A method for manufacturing an active matrix organic electroluminescence display device comprising the steps of:

depositing an amorphous silicon on a substrate;

crystallizing the amorphous silicon to a polysilicon by an SLS method;

forming first and second semiconductor layers in portions where switching and driving transistors will be formed by selectively removing the crystallized polysilicon;

forming a gate insulating film on an entire surface of the substrate including the semiconductor layers;

forming a scan line to cross the first semiconductor layer on the gate insulating layer and a gate electrode of the driving transistor to cross the second semiconductor layer;

forming source and drain regions of switching and driving transistors on the first and second semiconductor layers at both sides of the scan line and the gate electrode of the driving transistor;

depositing an insulating interlayer on the entire surface of the substrate;

forming contact holes to expose the source and drain regions of the first semiconductor layer, the gate electrode of the driving transistor and the source region of the second semiconductor layer, respectively;

forming a data line connected to the source region of the first semiconductor layer substantially perpendicular to the scan line on the insulating interlayer; a power line connected to the source region of the second semiconductor layer substantially perpendicular to the scan line, the scan line overlapped with the gate electrode of the driving transistor; and an electrode pattern to connect the drain region of the first semiconductor layer to the gate electrode of the driving transistor;

forming an insulating layer for planarization having a contact hole to the drain region of the second semiconductor layer; and

forming an electroluminescence device connected to the drain region on the insulating layer.

8. The method as claimed in claim 7, wherein the scan line and the gate electrode of the driving transistor are isolated from each other.

9. The method as claimed in claim 7, wherein the gate electrode is widened at a certain region to form a capacitor overlapped with the power line.

10. The method as claimed in claim 7, wherein the amorphous silicon is crystallized to a polysilicon by emitting a laser beam of about $2\text{ }\mu\text{m}\times 10\text{ mm}$ to have an exposing area of about $10\times 10\text{ mm}^2$ or less in the SLS method.

11. The method as claimed in claim 7, wherein, in the SLS method, the beams are primarily emitted to the amorphous silicon, and subsequently, the beams are secondarily emitted to portions crystallized by the primarily emitted beams, thereby crystallizing the amorphous silicon to the polysilicon.

12-14. (canceled)

* * * * *

专利名称(译)	有源矩阵有机电致发光显示装置及其制造方法		
公开(公告)号	US20050088381A1	公开(公告)日	2005-04-28
申请号	US10/992643	申请日	2004-11-22
[标]申请(专利权)人(译)	朴宰영 金성기		
申请(专利权)人(译)	朴宰Y. 金圣K.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK JAE YONG KIM SUNG KI		
发明人	PARK, JAE YONG KIM, SUNG KI		
IPC分类号	G09G3/30 G09G3/32 H01L21/20 H01L21/77 H01L21/84 H01L27/12 H01L27/32		
CPC分类号	G09G3/3225 G09G3/3233 G09G2300/0408 G09G2300/0809 H01L27/1285 H01L21/2026 H01L27/12 H01L27/3244 H01L27/3262 G09G2300/0842 H01L21/02675 H01L21/02532 H01L21/02595		
优先权	1020000085560 2000-12-29 KR		
其他公开文献	US7285435		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种有源矩阵有机电致发光显示装置及其制造方法。有源矩阵有机电致发光显示装置包括沿一个方向的扫描线，基本垂直于扫描线的数据线，与数据线基本平行的电源线，距数据线一定距离，电致发光装置在像素区域中发光扫描线，数据线和电源线之间，用于根据扫描线的信号切换数据线的信号的开关晶体管，以及用于将电源线的电源施加到电致发光器件的驱动晶体管根据通过开关晶体管施加的信号，通过顺序横向凝固 (SLS) 方法形成的开关晶体管或驱动晶体管。

