



US 20090027311A1

(19) **United States**(12) **Patent Application Publication**
Lee et al.(10) **Pub. No.: US 2009/0027311 A1**(43) **Pub. Date: Jan. 29, 2009**(54) **ORGANIC LIGHT-EMITTING DIODE (OLED)
DISPLAY APPARATUS AND METHOD OF
DRIVING THE SAME****Publication Classification**(51) **Int. Cl.**
G09G 3/30

(2006.01)

(52) **U.S. Cl.** **345/76; 345/211**(76) **Inventors:** **Dong-Woo Lee**, Suwon-si (KR);
Sung-Un Park, Suwon-si (KR)

Correspondence Address:

LEE & MORSE, P.C.**3141 FAIRVIEW PARK DRIVE, SUITE 500
FALLS CHURCH, VA 22042 (US)**(21) **Appl. No.:** **12/081,217**(22) **Filed:** **Apr. 11, 2008**(30) **Foreign Application Priority Data**

Jul. 23, 2007 (KR) 10-2007-0073474

(57) **ABSTRACT**

An organic light-emitting diode (OLED) display apparatus, including a control unit to receive an image signal and to generate a frame-based image data signal and a frame identification signal based at least in part on the received image signal, the frame identification signal being synchronized with the frame-based image data signal, a driving voltage supply unit to generate a first voltage for a switching unit and a second voltage for a display unit, and a switching unit to receive the first voltage and the frame identification signal and to supply the first voltage for the display unit based at least in part on the frame identification signal.

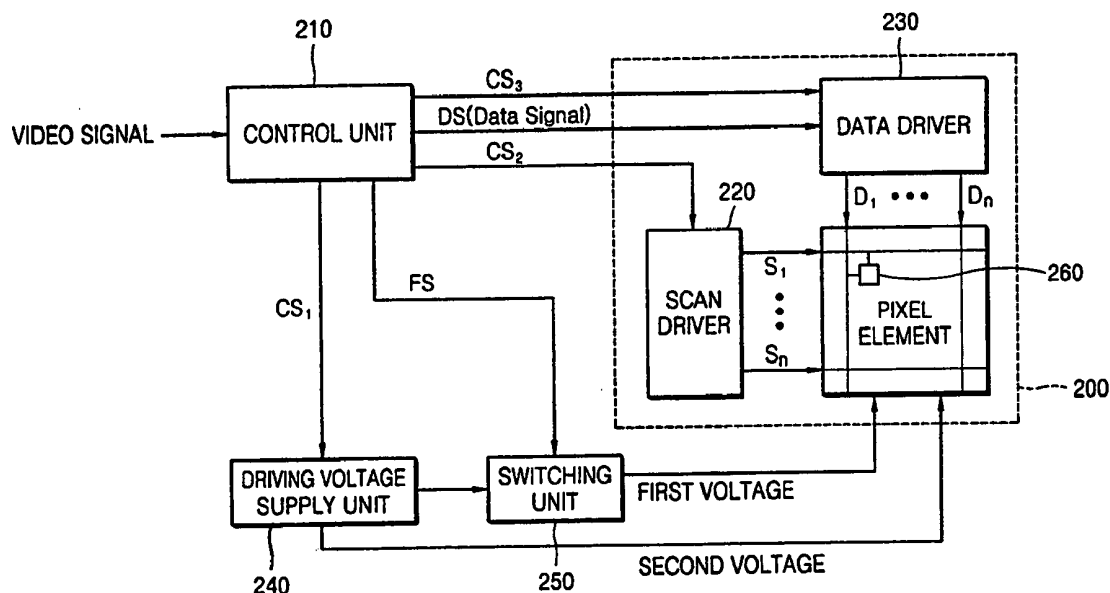


FIG. 1

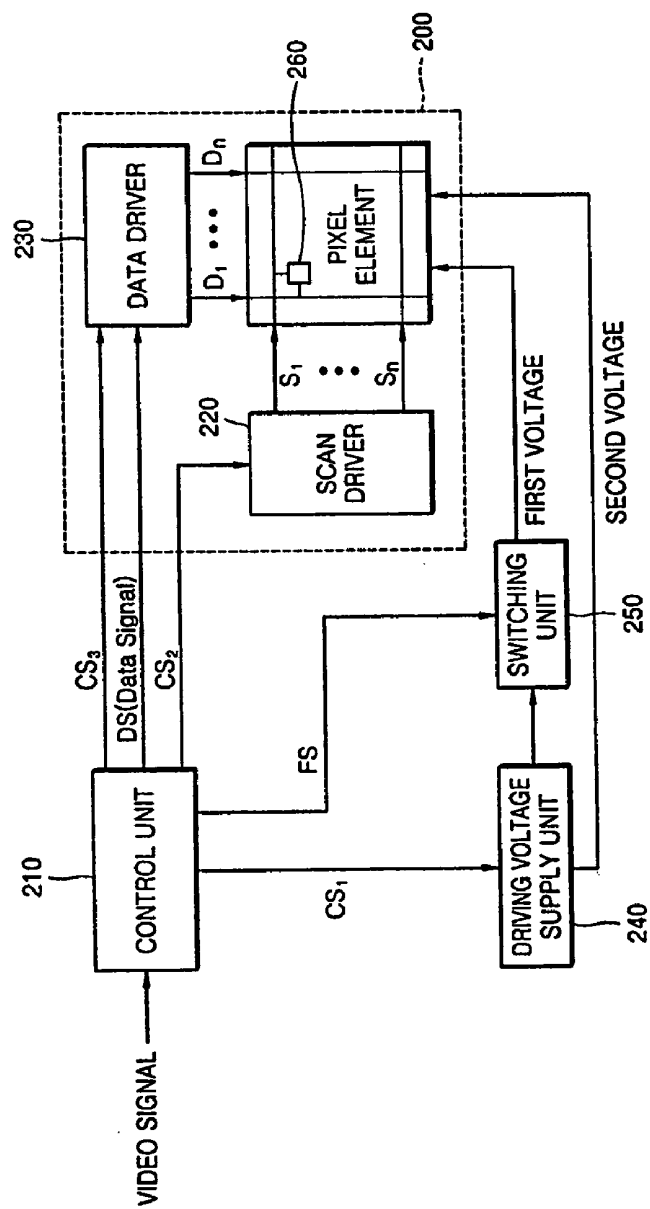


FIG. 2

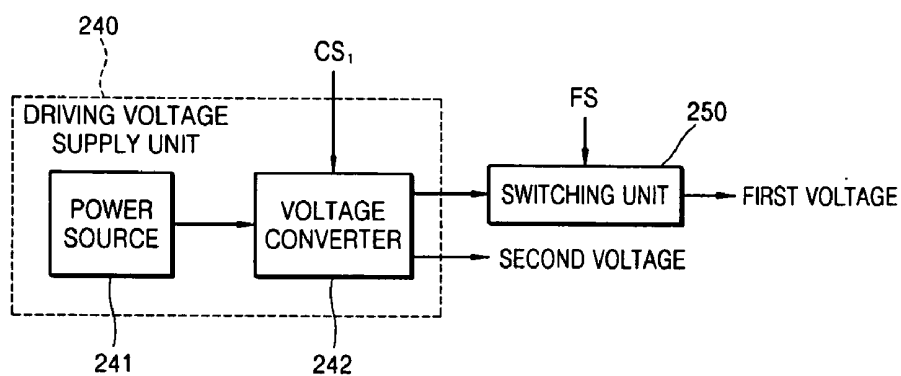


FIG. 3

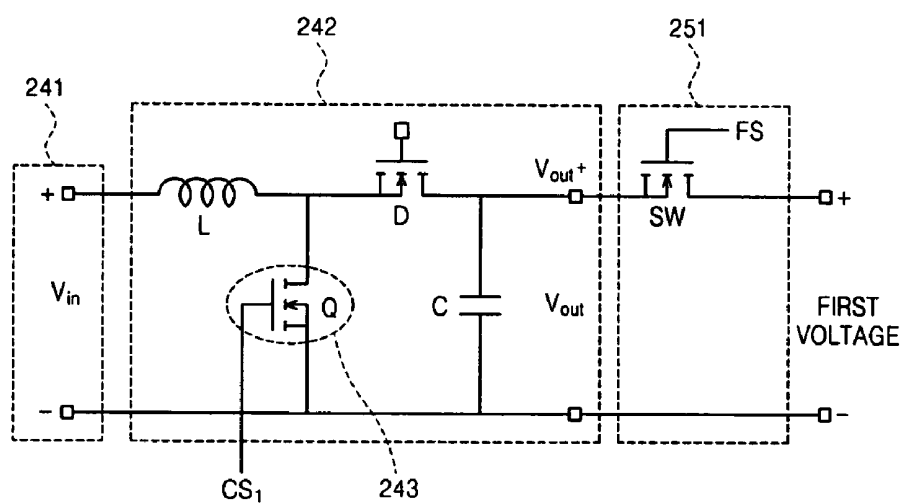


FIG. 4

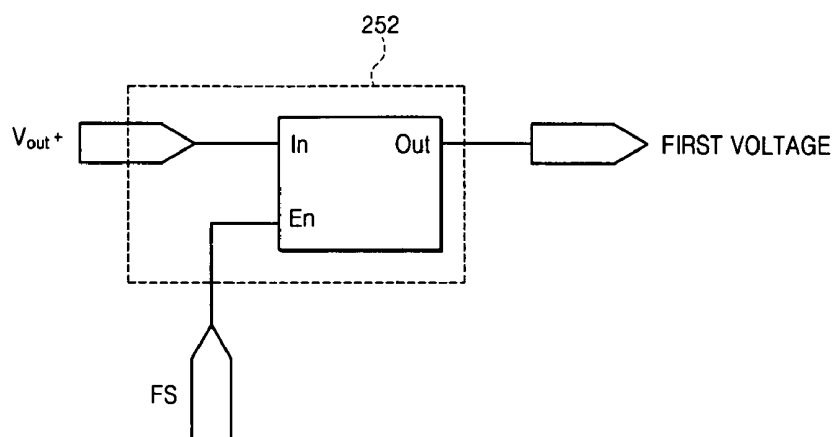


FIG. 5


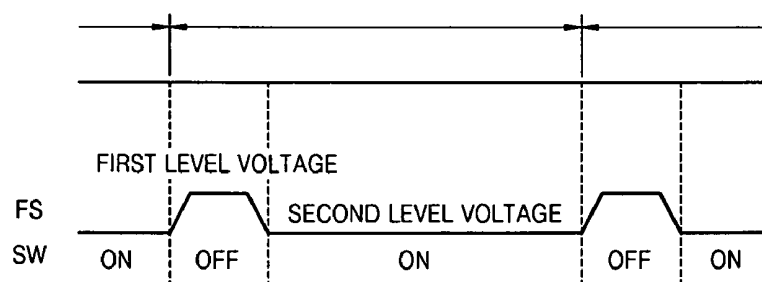


FIG. 6

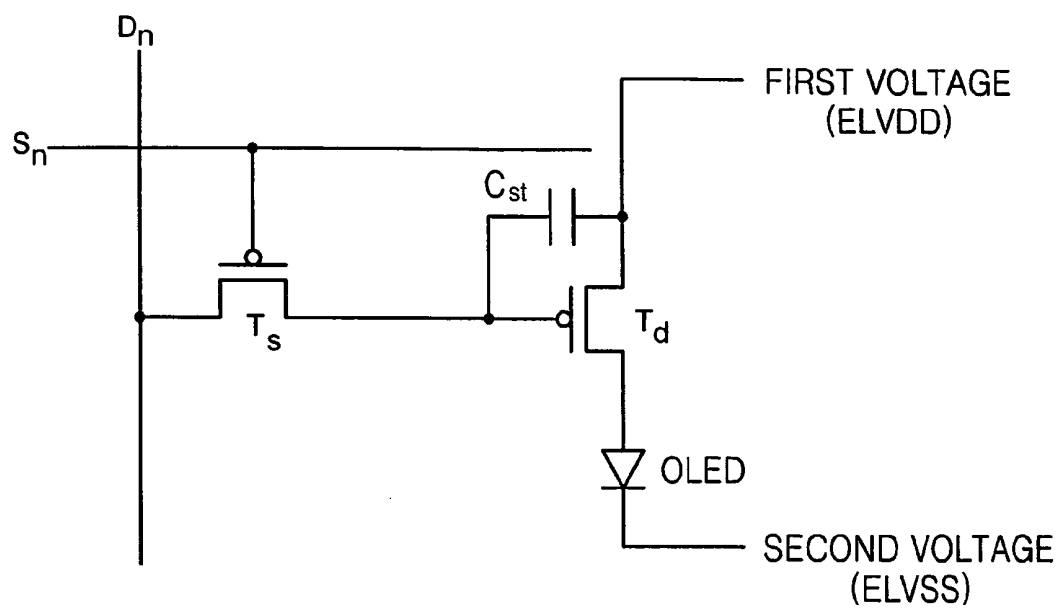

ORGANIC LIGHT-EMITTING DIODE (OLED) DISPLAY APPARATUS AND METHOD OF DRIVING THE SAME

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to an organic light-emitting diode (OLED) display apparatus and a method of driving the same. More particularly, the present invention relates to an OLED display apparatus and a method of driving the OLED display apparatus that may reduce or prevent a motion blur phenomenon in the OLED display apparatus.

[0003] 2. Description of the Related Art

[0004] In recent years, various flat panel display apparatuses have been developed, including liquid crystal displays (LCDs), field emission displays (FEDs), plasma display panels (PDPs), light-emitting diode (LED) displays. Among these conventional flat panel display apparatuses, displays capable of maintaining a display of images in the absence of continuously-updated image data are referred to as "hold type displays". For example, a hold type display may maintain a display of an image during an entire frame period of received image data. Active matrix organic light-emitting diode (AMOLED) displays are an example of a hold type display.

[0005] In conventional hold type display apparatuses such as those described above, each pixel includes at least one capacitor to supply current to the pixel during each frame period of received image data. In other words, in conventional hold type display apparatuses, a capacitor is charged with a voltage, and current is supplied to a pixel using the charged voltage.

[0006] In conventional hold type display apparatuses such as described above, a motion blur phenomenon may occur. A motion blur phenomenon occurs when a current corresponding to a voltage stored in a capacitor is continuously supplied to each pixel of a hold type display apparatus for each frame of image data, and an image includes moving images. The moving images may be blurred on the display apparatus due to an afterimage effect resulting from the current being continuously supplied to the pixels of the hold type display apparatus during an entire frame period of image data. Such a motion blur phenomenon lowers the display quality of a hold type display apparatus. A need, therefore, exists for a display apparatus that addresses one or more limitations and problems of the conventional art.

SUMMARY OF THE INVENTION

[0007] The present invention provides an OLED display apparatus and a method of operation that addresses one or more limitations and problems of the conventional art.

[0008] It is therefore a feature of an embodiment of the present invention to provide an OLED display apparatus that addresses one or more limitations and problems of the conventional art.

[0009] It is therefore another feature of an embodiment of the present invention to provide a method of operating an OLED display apparatus that may reduce or prevent a motion blur phenomenon in the OLED display apparatus.

[0010] At least one of the above and other features of the present invention may be realized by providing an OLED display apparatus, including a control unit to receive an image signal and to generate a frame-based image data signal and a frame identification signal based at least in part on the

received image signal, the frame identification signal being synchronized with the frame-based image data signal, a driving voltage supply unit to generate a first voltage for a switching unit and a second voltage for a display unit, and a switching unit to receive the first voltage and the frame identification signal and to supply the first voltage for the display unit based at least in part on the frame identification signal.

[0011] The frame identification signal may include data to identify a starting point of each frame included in the frame-based image data signal. Further, the switching unit may be further adapted to supply the first voltage to the display unit. The switching unit may be further adapted to supply the first voltage to the display unit when the frame identification signal indicates that the frame-based image data signal is not at a starting point of a frame.

[0012] The driving voltage supply unit may include a power source to supply an input voltage to a voltage converter, and a voltage converter to convert the input voltage from the power source to a first voltage higher than the input voltage and a second voltage lower than the input voltage. The data to identify a starting point of each frame included in the frame-based image data signal may include a voltage signal that has one of a first level voltage or a second level voltage based at least in part on the frame-based image data signal.

[0013] The switching unit may be adapted to enter an "off" state in response to the frame identification signal having a first level voltage, and is adapted to enter an "on" state in response to the frame identification signal having a second level voltage. The display unit may include a plurality of pixels. Further, each of the pixels may include a driving thin film transistor to supply a current to respective OLEDs.

[0014] At least one other of the above and other features of the present invention may be realized by providing a method of driving an OLED display apparatus, the method including generating a frame-based image data signal and a frame identification signal based at least in part on an image input signal, the frame identification signal identifying a starting point of each frame included in the frame-based image data signal, providing the frame-based image data signal to a display unit, and alternating a supply of a driving voltage to the display unit in response to the frame identification signal such that a driving voltage is supplied to the display unit only if the frame-based image data signal provided to the display unit is not at a starting point of a frame included in the frame-based image data signal.

[0015] The method of driving the OLED display apparatus may further include displaying images corresponding to the frame-based image data signal when the driving voltage is supplied to the display unit. The frame identification signal may include data to identify a starting point of each frame included in the frame-based image data signal.

[0016] The data to identify a starting point of each frame included in the frame-based image data signal may include a voltage signal that has one of a first level voltage or a second level voltage based at least in part on the frame-based image data signal. Alternating the supply of the driving voltage may further include not providing the driving voltage in response to the frame identification signal having a first level voltage, and providing the driving voltage in response to the frame identification signal having a second level voltage. Further, another driving voltage may be continuously supplied to the display unit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The above and other features and advantages of the present invention will become more apparent to those of

ordinary skill in the art by describing in detail exemplary embodiments thereof with reference to the attached drawings, in which:

[0018] FIG. 1 illustrates a schematic block diagram of an OLED display apparatus according to an embodiment of the present invention;

[0019] FIG. 2 illustrates a schematic block diagram of a driving voltage supply unit according to an embodiment of the present invention;

[0020] FIG. 3 illustrates an internal circuit of a voltage converter and a switching element according to an embodiment of the present invention;

[0021] FIG. 4 illustrates a schematic block diagram of a regulator according to an embodiment of the present invention;

[0022] FIG. 5 illustrates a timing diagram of a frame identification signal generated in a control unit according to an embodiment of the present invention; and

[0023] FIG. 6 illustrates a pixel circuit of an OLED display apparatus according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0024] Korean Patent Application No. 10-2007-0073474, filed on Jul. 23, 2007, in the Korean Intellectual Property Office, and entitled: "Organic Light-Emitting Display Apparatus and Method of Driving the Same," is incorporated by reference herein in its entirety.

[0025] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are illustrated. The invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0026] In the figures, the dimensions of layers and regions may be exaggerated for clarity of illustration. It will also be understood that when a layer or element is referred to as being "on" another layer or substrate, it can be directly on the other layer or substrate, or intervening layers may also be present. Further, it will be understood that when a layer is referred to as being "under" another layer, it can be directly under, and one or more intervening layers may also be present. In addition, it will also be understood that when a layer is referred to as being "between" two layers, it can be the only layer between the two layers, or one or more intervening layers may also be present. Like reference numerals refer to like elements throughout.

[0027] Referring to FIG. 1, an OLED display apparatus according to an embodiment of the present invention includes a display unit 200, a control unit 210, a driving voltage supply unit 240 and a switching unit 250. The display unit 200 includes a plurality of pixels 260, a scan driver 220 and a data driver 230. The control unit 210 may receive a video signal and may generate a frame-based image data signal DS and a frame identification signal FS. The frame-based image data signal DS may include image data, and the frame identification signal FS may include data identifying a starting point of each frame of the image data signal DS. In operation, the display unit 200 may display an image corresponding to the image data signal DS via the plurality of pixels 260.

[0028] The control unit 210 may also generate a driving voltage control signal CS₁, a scan driving control signal CS₂ and a data driving control signal CS₃. The control unit 210 may supply the image data signal DS and the data driving control signal CS₃ to the data driver 230. The control unit 210 may further supply the scan driving control signal CS₂ to the scan driver 220, may supply the frame identification signal FS to the data driver 230, and may supply the driving voltage control signal CS₁ to the driving voltage supply unit 240.

[0029] The driving voltage supply unit 240 may receive the driving voltage control signal CS₁ and may supply a driving voltage to the switching unit 250 responsive to the driving voltage control signal CS₁. The switching unit 250 may receive the driving voltage from the driving voltage supply unit 240 and may receive the frame identification signal FS from the control unit 210. The switching unit 250 may supply a first voltage to the display unit 200 responsive to the frame identification signal FS received from the control unit 210, explained in more detail with reference to FIGS. 2-5. The driving voltage supply unit 240 may supply a second voltage to the display unit 200 responsive to the driving voltage control signal CS₁.

[0030] The plurality of pixel elements 260 of the display unit 200 may be located at intersections between scan lines S₁-S_n and data lines D₁-D_m. The scan driver 220 may receive the scan driving control signal CS₂ from the control unit 210 and may sequentially supply scan signals to the scan lines S₁-S_n. The data driver 230 may receive the data driving control signal CS₃ and the image data signal DS from the control unit 210 and may supply image data to the data lines D₁-D_m.

[0031] Referring to FIG. 2, the driving voltage supply unit 240 illustrated in FIG. 1 may further include a power source 241 and a voltage converter 242. The power source 241 may supply an input voltage to the voltage converter 242. The voltage converter 242 may receive the input voltage from the power source 241 and the driving voltage control signal CS₁ from the control unit 210 (see FIG. 1), and may generate a first voltage to be supplied to the switching unit 250. The switching unit 250 may receive the first voltage from the voltage converter 242 and may receive a frame identification signal FS from the control unit 210 (see FIG. 1). The switching unit 250 may supply the first voltage to the display unit 200 (see FIG. 1) responsive to the frame identification signal FS. For example, as will be explained in more detail later, the frame signal FS may identify a starting point of each frame of image data, and the first voltage may not be supplied to the display unit 200 during the starting point of each frame. This may result in no image being displayed on the display device 200 during the starting point of each frame. Furthermore, the voltage converter 242 may also generate a second voltage to be supplied to the display unit 200 (see FIG. 1), and may supply the second voltage to the display unit 200 (see FIG. 1). The power source 241 may be a lithium (Li) ion battery or the like, although the scope of the present invention is not so limited.

[0032] The voltages generated by the voltage converter 242 may include a first voltage to be supplied to the switching unit 250 and a second voltage. The first voltage to be supplied to the switching unit 250 may be higher than the voltage provided from the power source 241 to the voltage converter 242. Furthermore, the second voltage may be lower than the voltage provided from the power source 241, for example. The voltage converter 242 may be a DC-DC converter, a booster converter or the like, although the scope of the present inven-

tion is not so limited. Furthermore, as will be explained in more detail later, the switching unit 250 may include a switching element, a regulator or the like.

[0033] Referring to FIG. 3, the voltage converter 242 as illustrated in FIG. 2 further includes a power source controller 243, a reflux diode D, an inductor L, a capacitor C and a plurality of the voltage terminals. The switching element 251 may include a switch SW and may be adapted to receive a frame identification signal FS. The switching element 251 may be connected to output terminals V_{out} including V_{out+} of the voltage converter 242, and may be utilized as a switching unit such as switching unit 250 of FIG. 1.

[0034] The voltage converter 242 may include a power switch Q and may receive a voltage from the power source 241 at terminals V_{in} . The power source controller 243 may also receive the driving voltage control signal CS_1 and may control the on/off state of the voltage converter 242 in response to the driving voltage control signal CS_1 . The voltage converter 242 may be controlled by zero voltage/current switching or by pulse width modulation (PWM), as just a few examples, but the scope of the present invention is not so limited.

[0035] An output terminal of the switching element 251 may be connected to the display unit 200 (see FIG. 1). When the switching element 251 is in an "on" state in response to the frame identification signal FS, the first voltage may be supplied to the display unit 200 (see FIG. 1). When the switching element 251 is in an "off" state in response to the frame identification signal FS, the first voltage may not be supplied to the display unit 200 (see FIG. 1), resulting in the display unit not displaying an image. As stated previously, an image may not be displayed on the display unit 200 during the starting point of each frame, for example. The switching element 251 may be a MOSFET transistor or the like, although the scope of the present invention is not so limited.

[0036] FIG. 4 is a schematic block diagram of a regulator 252 that may be employed as a switching unit such as switching unit 250 of FIG. 1. In FIG. 4, the regulator 252 may receive an input voltage V_{out+} from the driving voltage supply unit 240 (see FIGS. 1 and 3) at terminal In, and may also receive the frame identification signal FS from the control unit 210 (see FIG. 1) at terminal En. The regulator 252 may be enabled in an "on" state or in an "off" state in response to the frame identification signal FS. In other words, when the frame signal FS identifies a starting point of a frame of image data of the image data signal DS (see FIG. 1), the regulator may be enabled in an "off" state. When the frame signal FS identifies that the image data of the image data signal DS provided to the display unit is not a starting point of a frame, the regulator 252 may be enabled in the "on" state. When enabled in an "off" state, the regulator may not output the first voltage to the display unit 200. When enabled in an "on" state, the regulator 252 may output the first voltage from an output terminal of the regulator 252 to the display unit 200 (see FIG. 1). The regulator 252 may be an LDO regulator or the like, although the scope of the present invention is not so limited.

[0037] Referring to FIG. 5, the frame identification signal FS may be a signal generated based at least in part on the video signal received by control unit 210 (see FIG. 1). For example, the frame identification signal FS may be a signal synchronized with the image data signal DS to identify the starting point of each frame of the image data signal DS. In

this sense, the frame identification signal FS may indicate a vertical blanking interval. However, the scope of the present invention is not so limited.

[0038] Typically, one frame identification signal FS may be output for each frame included in the image data signal DS. The frame identification signal FS may include a first level voltage and a second level voltage, the first and second level voltages having different potentials. As illustrated in FIG. 5, when the first level voltage of the frame identification signal FS is generated and supplied to the switching unit 250 (see FIG. 1), the switch SW of switching element 251 may be off, and the switching unit 250 may be in an "off" state or disabled. When the second level voltage of the frame identification signal FS is generated and supplied to the switching unit 250 (see FIG. 1), the switch SW of switching element 251 may be on, and the switching unit 250 may be in an "on" state or enabled. In operation, the switching may be in an "off" state if the synchronized image data signal DS is at a vertical blanking interval. Conversely, the switching unit 250 may be in an "on" state if the synchronized image data signal DS is not at a vertical blanking interval. When the frame identification signal FS is in an "off" state, a first voltage is not supplied from the switching unit 250 to the display unit 200 (see FIG. 1). Accordingly, no image may be displayed on the display unit 200, thereby displaying a black screen and preventing a motion blur phenomenon. In this manner, the frame identification signal FS may be employed to identify the starting point of each frame included in the image data signal DS.

[0039] Continuing with FIG. 5, the first level voltage may be a voltage higher than the second level voltage. In other embodiments, however, the first level voltage may be a voltage lower than the second level voltage. Furthermore, if the first level voltage is lower than the second level voltage, the switching element 251 (see FIG. 3) or a regulator 252 (see FIG. 4) may be modified in order to operate as described above, for example.

[0040] Referring to FIG. 6, one embodiment of a pixel circuit for a pixel element 260 of display unit 200 (see FIG. 1) is illustrated, although other configurations are possible and remain in accordance with at least one embodiment. The pixel circuit includes a driving thin film transistor T_d , an OLED, a capacitor C_{st} , and a switching thin film transistor T_s . The pixel circuit is coupled to data line D_m and scan line S_n . A gate electrode of the driving thin film transistor T_d may receive image data from data driver 230 (see FIG. 1). The image data may be based at least in part on the image data signal DS provided from control unit 210 (see FIG. 1), for example. A first electrode of the driving thin film transistor T_d may receive a first voltage ELVDD from driving voltage supply unit 240 (see FIG. 1). A second electrode of the driving thin film transistor T_d may be connected to an anode of the OLED. A cathode of the organic light-emitting diode OLED may receive a second voltage ELVSS from the driving voltage supply unit 240 (see FIG. 1).

[0041] As described above with reference to FIG. 5, when a first level voltage of a frame identification signal FS is supplied to a switching unit 250 (see FIG. 1), the first voltage from the driving voltage supply unit 240 (see FIG. 1) is not supplied to the anode of the OLED. As a result, the OLED is turned off and a black screen is displayed on a display unit 200 (see FIG. 1). When a second level voltage of the frame identification signal FS is supplied to the switching unit 250 (see FIG. 1), the first voltage from the driving voltage supply unit

240 is supplied to the anode of the OLED. As a result, the OLED emits light, and images corresponding to the image data signal DS may be displayed on the display unit **200** (see FIG. 1).

[0042] Accordingly, when the first voltage is not supplied to the OLED of the display unit **200** by disabling the switching unit **250** for a given time for a particular frame, a voltage is not supplied to the OLED and a black screen may be displayed on the display unit **200**, resulting in the prevention of a motion blur phenomenon on the display unit **200**.

[0043] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

[0044] Exemplary embodiments of the present invention have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. Accordingly, it will be understood by those of ordinary skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims.

What is claimed is:

1. An organic light-emitting diode (OLED) display apparatus, comprising:

a control unit to receive an image signal and to generate a frame-based image data signal and a frame identification signal based at least in part on the received image signal, the frame identification signal being synchronized with the frame-based image data signal;

a driving voltage supply unit to generate a first voltage for a switching unit and a second voltage for a display unit; and

a switching unit to receive the first voltage and the frame identification signal and to supply the first voltage for the display unit based at least in part on the frame identification signal.

2. The OLED display apparatus as claimed in claim 1, wherein the frame identification signal includes data to identify a starting point of each frame included in the frame-based image data signal.

3. The OLED display apparatus as claimed in claim 2, wherein the switching unit is further adapted to supply the first voltage to the display unit.

4. The OLED display apparatus as claimed in claim 3, wherein the switching unit is further adapted to supply the first voltage to the display unit when the frame identification signal indicates that the frame-based image data signal is not at a starting point of a frame.

5. The OLED display apparatus as claimed in claim 1, wherein the driving voltage supply unit comprises:

a power source to supply an input voltage to a voltage converter; and

a voltage converter to convert the input voltage from the power source to a first voltage higher than the input voltage and a second voltage lower than the input voltage.

6. The OLED display apparatus as claimed in claim 2, wherein the data to identify a starting point of each frame included in the frame-based image data signal includes a voltage signal that has one of a first level voltage or a second level voltage based at least in part on the frame-based image data signal.

7. The OLED display apparatus as claimed in claim 6, wherein the switching unit is adapted to enter an "off" state in response to the frame identification signal having a first level voltage, and is adapted to enter an "on" state in response to the frame identification signal having a second level voltage.

8. The OLED display apparatus as claimed in claim 1, wherein the display unit includes a plurality of pixels.

9. The OLED display apparatus as claimed in claim 8, wherein each of the pixels comprises a driving thin film transistor to supply a current to respective OLEDs.

10. A method of driving an organic light-emitting diode (OLED) display apparatus, the method comprising:

generating a frame-based image data signal and a frame identification signal based at least in part on an image input signal, the frame identification signal identifying a starting point of each frame included in the frame-based image data signal;

providing the frame-based image data signal to a display unit; and

alternating a supply of a driving voltage to the display unit in response to the frame identification signal such that a driving voltage is supplied to the display unit only if the frame-based image data signal provided to the display unit is not at a starting point of a frame included in the frame-based image data signal.

11. The method of driving an OLED display apparatus as claimed in claim 10, further comprising displaying images corresponding to the frame-based image data signal when the driving voltage is supplied to the display unit.

12. The method of driving an OLED display apparatus as claimed in claim 10, wherein the frame identification signal includes data to identify a starting point of each frame included in the frame-based image data signal.

13. The method of driving an OLED display apparatus as claimed in claim 12, wherein the data to identify a starting point of each frame included in the frame-based image data signal includes a voltage signal that has one of a first level voltage or a second level voltage based at least in part on the frame-based image data signal.

14. The method of driving an OLED display apparatus as claimed in claim 13, wherein alternating the supply of the driving voltage further comprises not providing the driving voltage in response to the frame identification signal having a first level voltage, and providing the driving voltage in response to the frame identification signal having a second level voltage.

15. The method of driving an OLED display apparatus as claimed in claim 10, further comprising continuously supplying another driving voltage to the display unit.

* * * * *

专利名称(译)	有机发光二极管 (OLED) 显示装置及其驱动方法		
公开(公告)号	US20090027311A1	公开(公告)日	2009-01-29
申请号	US12/081217	申请日	2008-04-11
[标]申请(专利权)人(译)	李东WOO 朴成联合国		
申请(专利权)人(译)	李东宇 朴成-UN		
当前申请(专利权)人(译)	李东宇 朴成-UN		
[标]发明人	LEE DONG WOO PARK SUNG UN		
发明人	LEE, DONG-WOO PARK, SUNG-UN		
IPC分类号	G09G3/30		
CPC分类号	G09G3/3233 G09G2300/0866 G09G2330/02 G09G2320/0261		
优先权	1020070073474 2007-07-23 KR		
其他公开文献	US8264429		
外部链接	Espacenet USPTO		

摘要(译)

一种有机发光二极管 (OLED) 显示装置，包括：控制单元，用于接收图像信号并至少部分地基于所接收的图像信号生成基于帧的图像数据信号和帧识别信号，所述帧识别信号与基于帧的图像数据信号同步，驱动电压提供单元产生用于切换单元的第一电压和用于显示单元的第二电压，以及切换单元，用于接收第一电压和帧识别信号，至少部分地基于帧识别信号为显示单元提供第一电压。

