



US 20020180371A1

(19) **United States**(12) **Patent Application Publication**
Yamazaki et al.(10) **Pub. No.: US 2002/0180371 A1**(43) **Pub. Date: Dec. 5, 2002**(54) **DISPLAY DEVICE AND METHOD OF
MANUFACTURING THE SAME****Publication Classification**(51) **Int. Cl.⁷** **G09G 3/10**(52) **U.S. Cl.** **315/169.3; 315/169.4**(75) **Inventors:** **Shunpei Yamazaki**, Tokyo (JP); **Jun Koyama**, Kanagawa (JP); **Takeshi Nishi**, Kanagawa (JP); **Rumo Satake**, Kanagawa (JP)


Correspondence Address:

COOK, ALEX, MCFARRON, MANZO,
CUMMINGS & MEHLER, LTD.**Suite 2850****200 West Adams St.****Chicago, IL 60606 (US)**(73) **Assignee:** **Semiconductor Energy Laboratory Co. Ltd.**(21) **Appl. No.:** **10/078,187**(22) **Filed:** **Feb. 19, 2002**(30) **Foreign Application Priority Data**

Feb. 22, 2001 (JP) 2001-045925

(57) **ABSTRACT**

The object of the present invention is to propose a structure of a display device in which water is prevented from passing through the side faces of a display device using an organic light-emitting element and a gap between substrates is made uniform. On the first substrate having the light-emitting element provided thereon, the thicknesses of the layers deposited in the peripheral area, the pixel portion and the driving circuit portion are equalized with each other. Furthermore, an adhesive is provided as thin as possible in the peripheral area of the first substrate so as to bond a second substrate to the first substrate. As a result, the distance between the first substrate and the second substrate can be made uniform throughout the peripheral area of the first substrate, the pixel portion and the driving circuit. Moreover, since a protective film overlying the organic light-emitting element is also provided on the side faces of the second insulating film, water is prevented from entering the display device through its side faces.

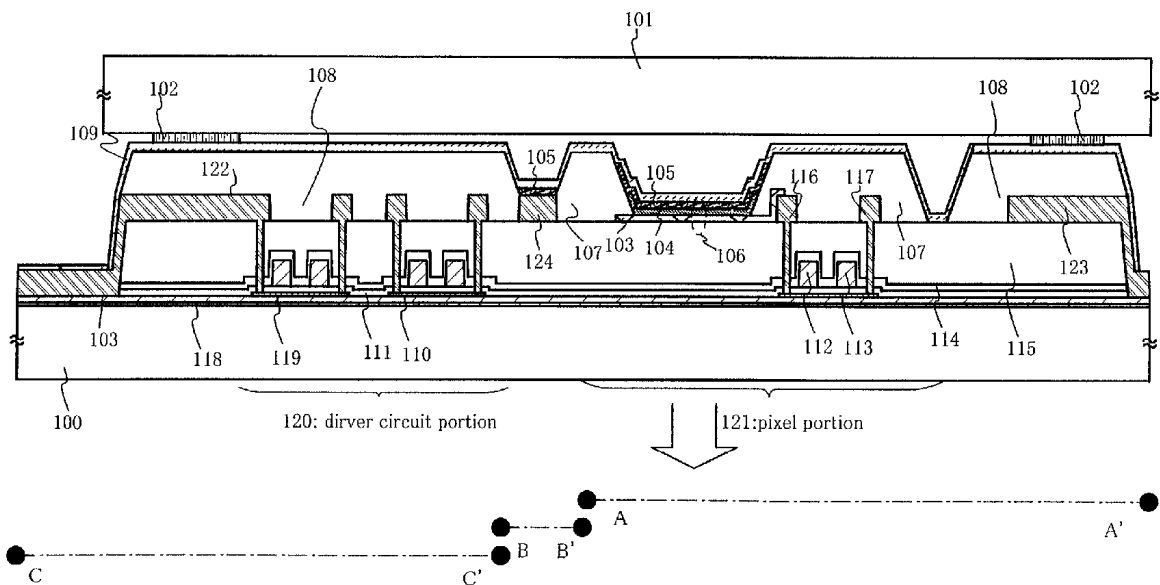

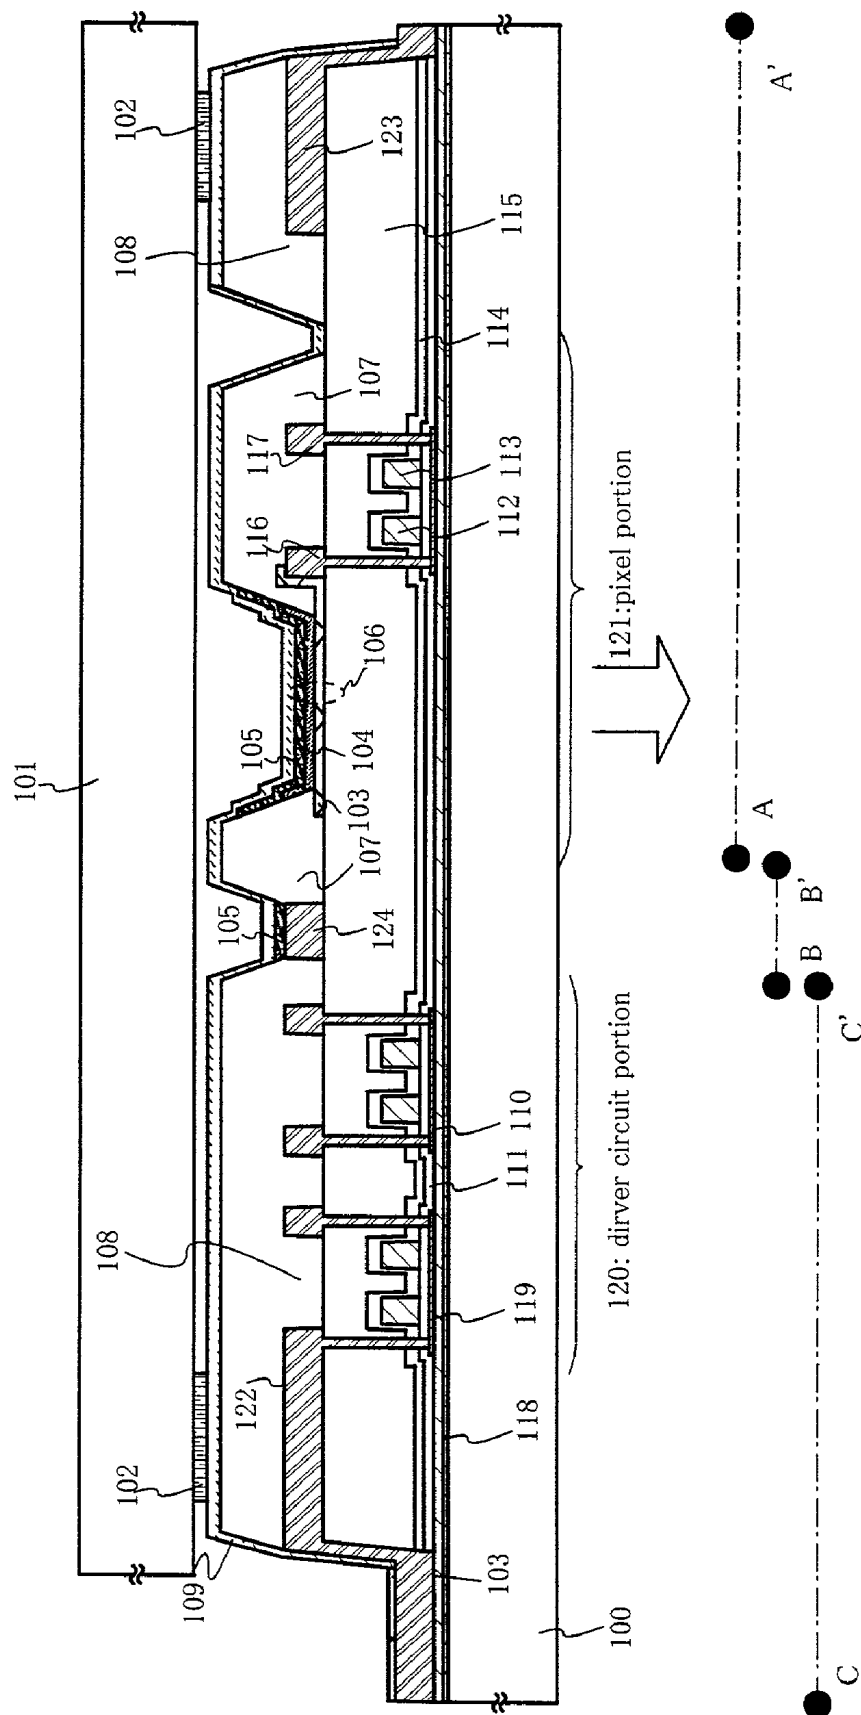


Fig. 1

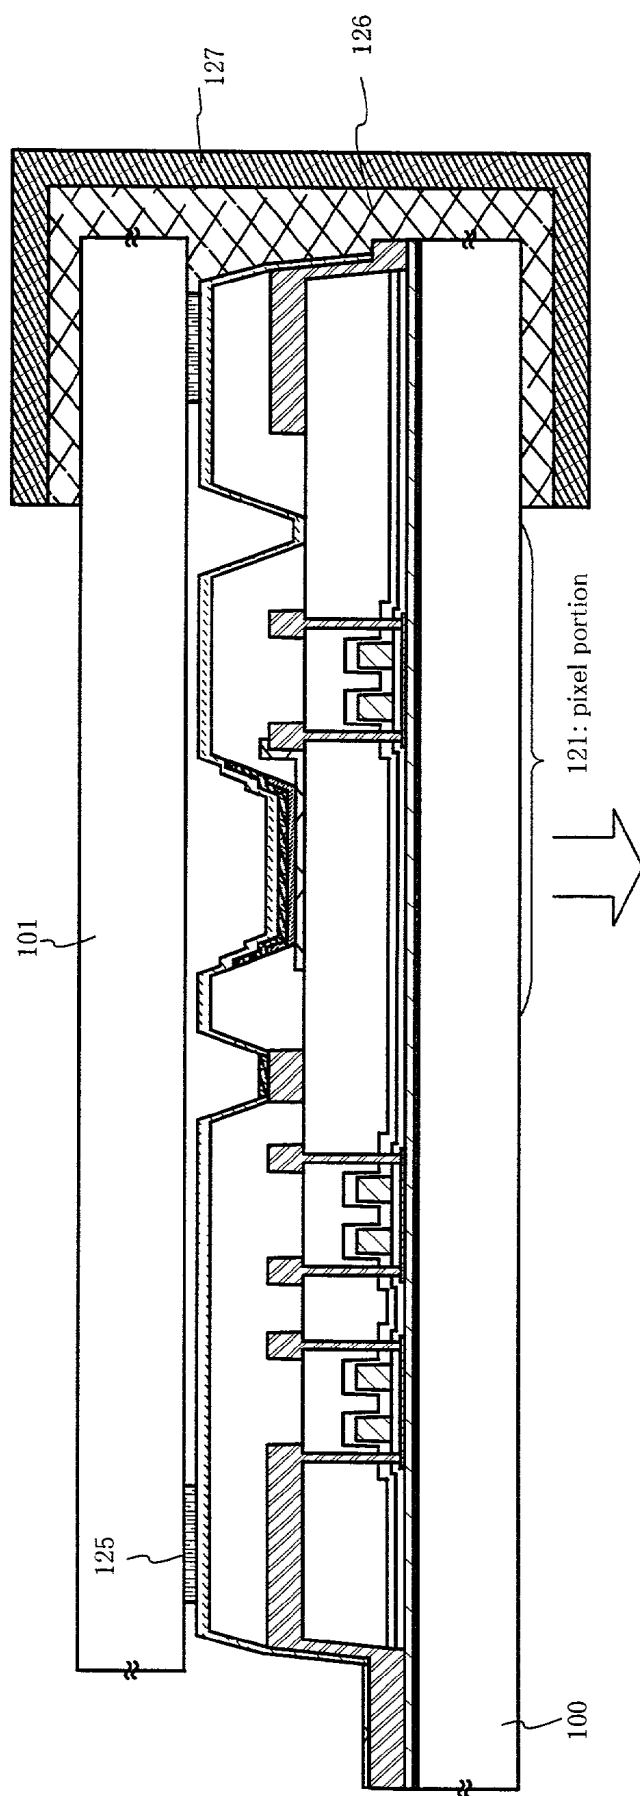


Fig. 2

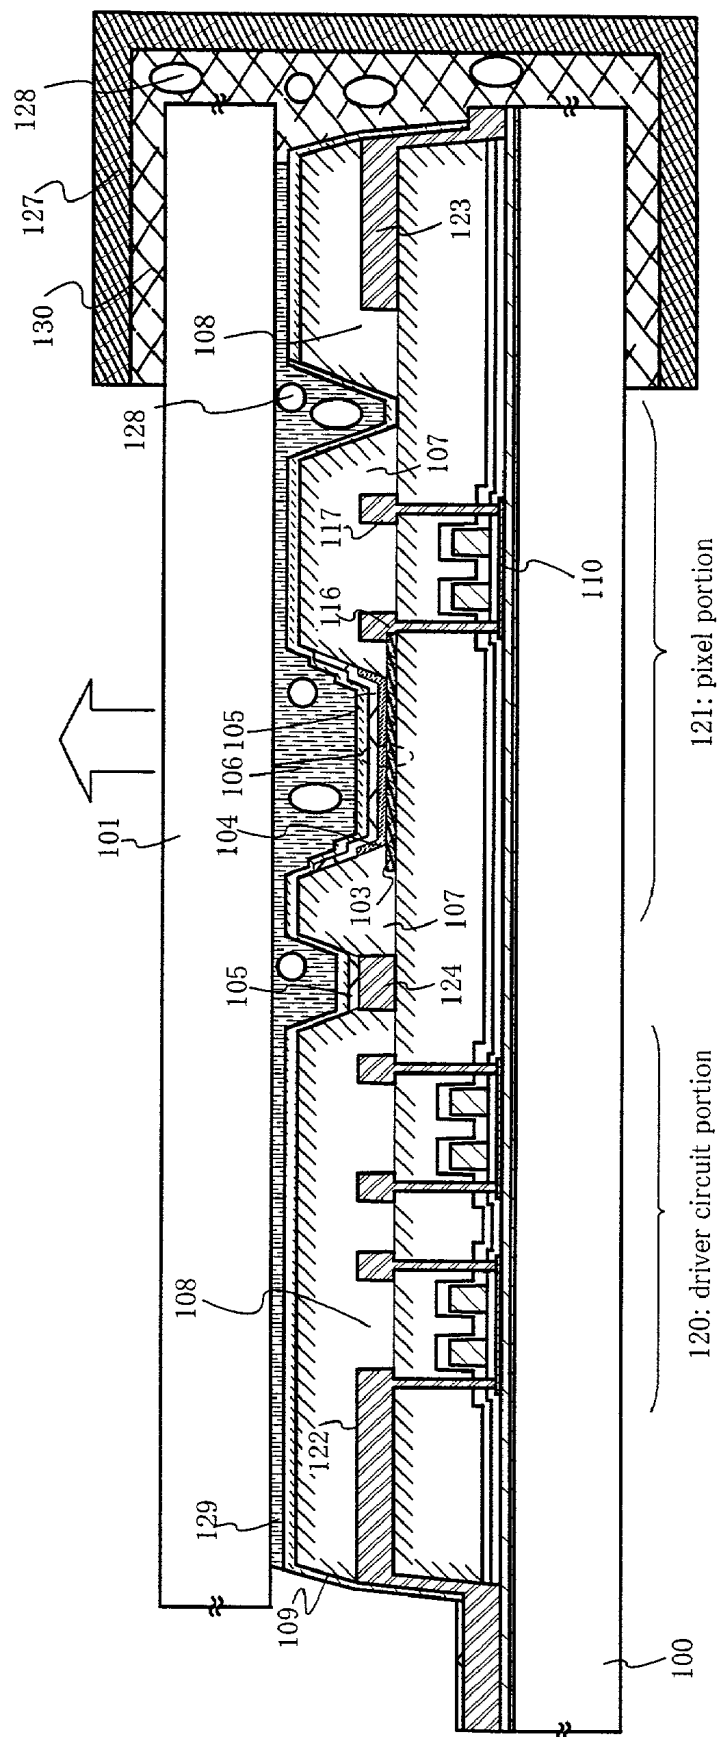


Fig. 3

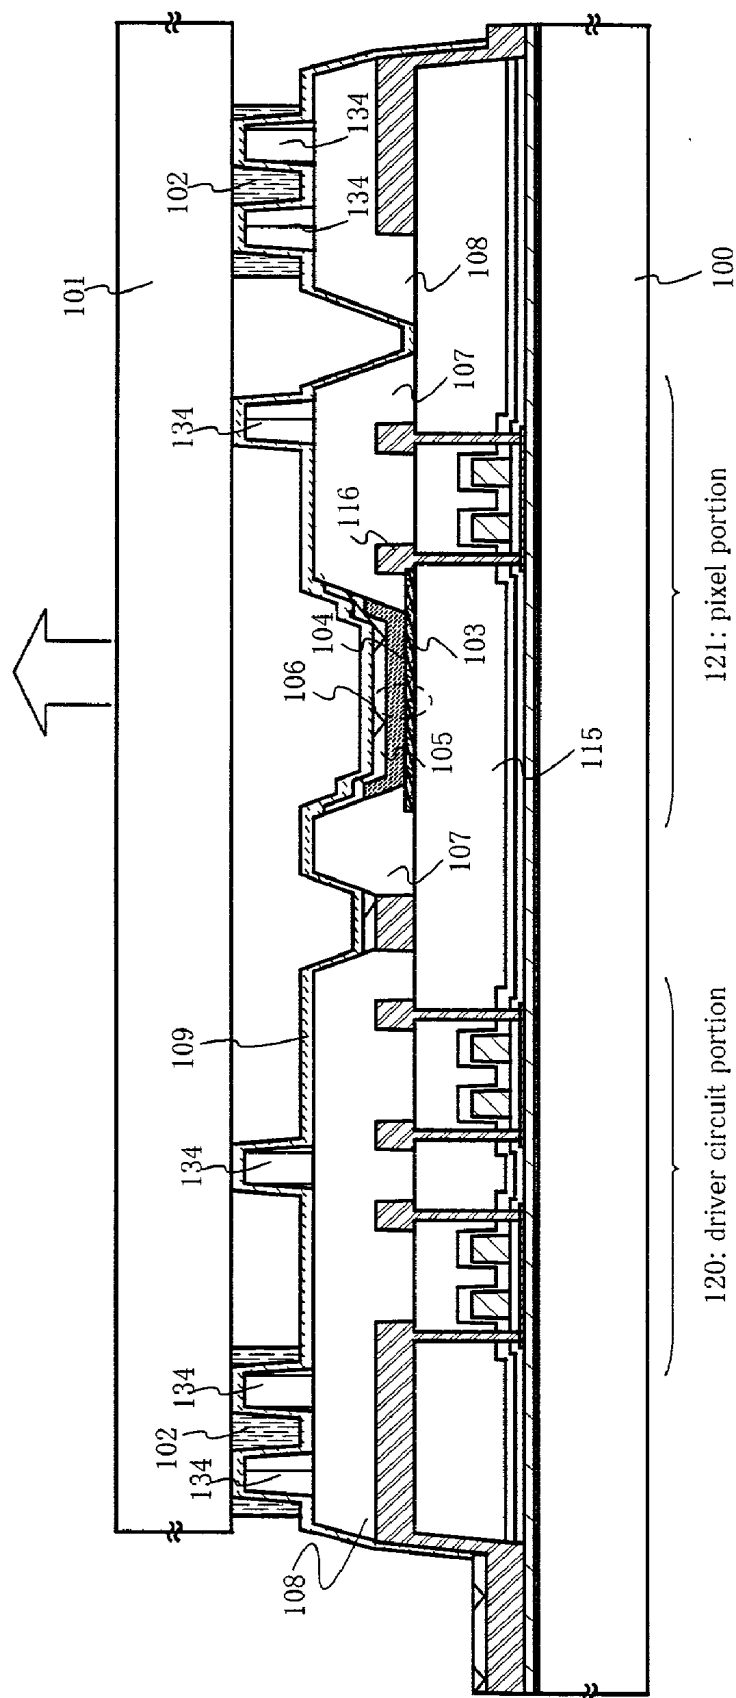


Fig. 4

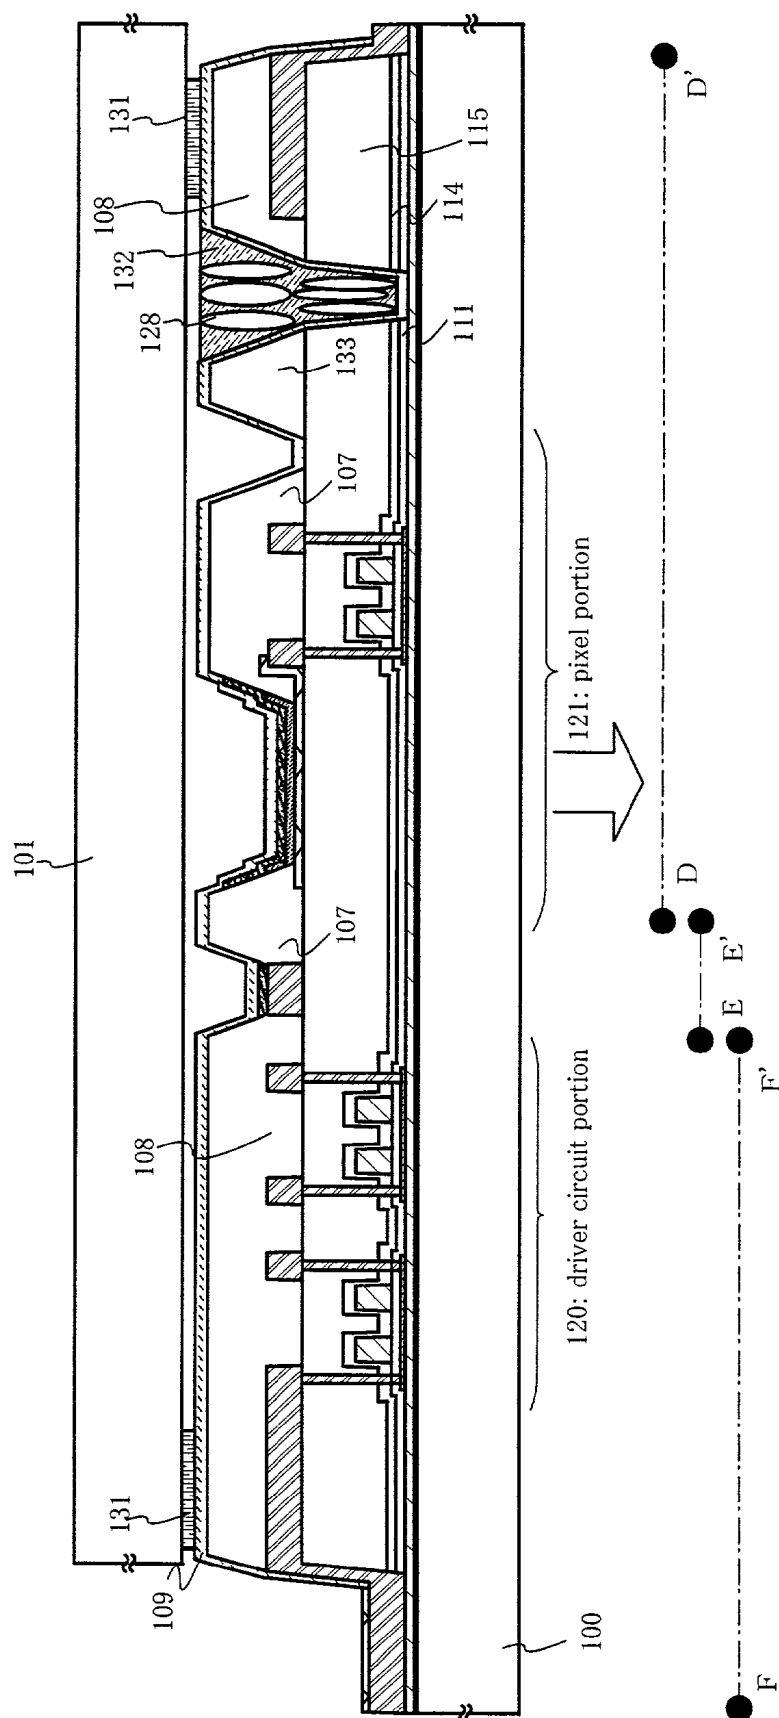


Fig. 5

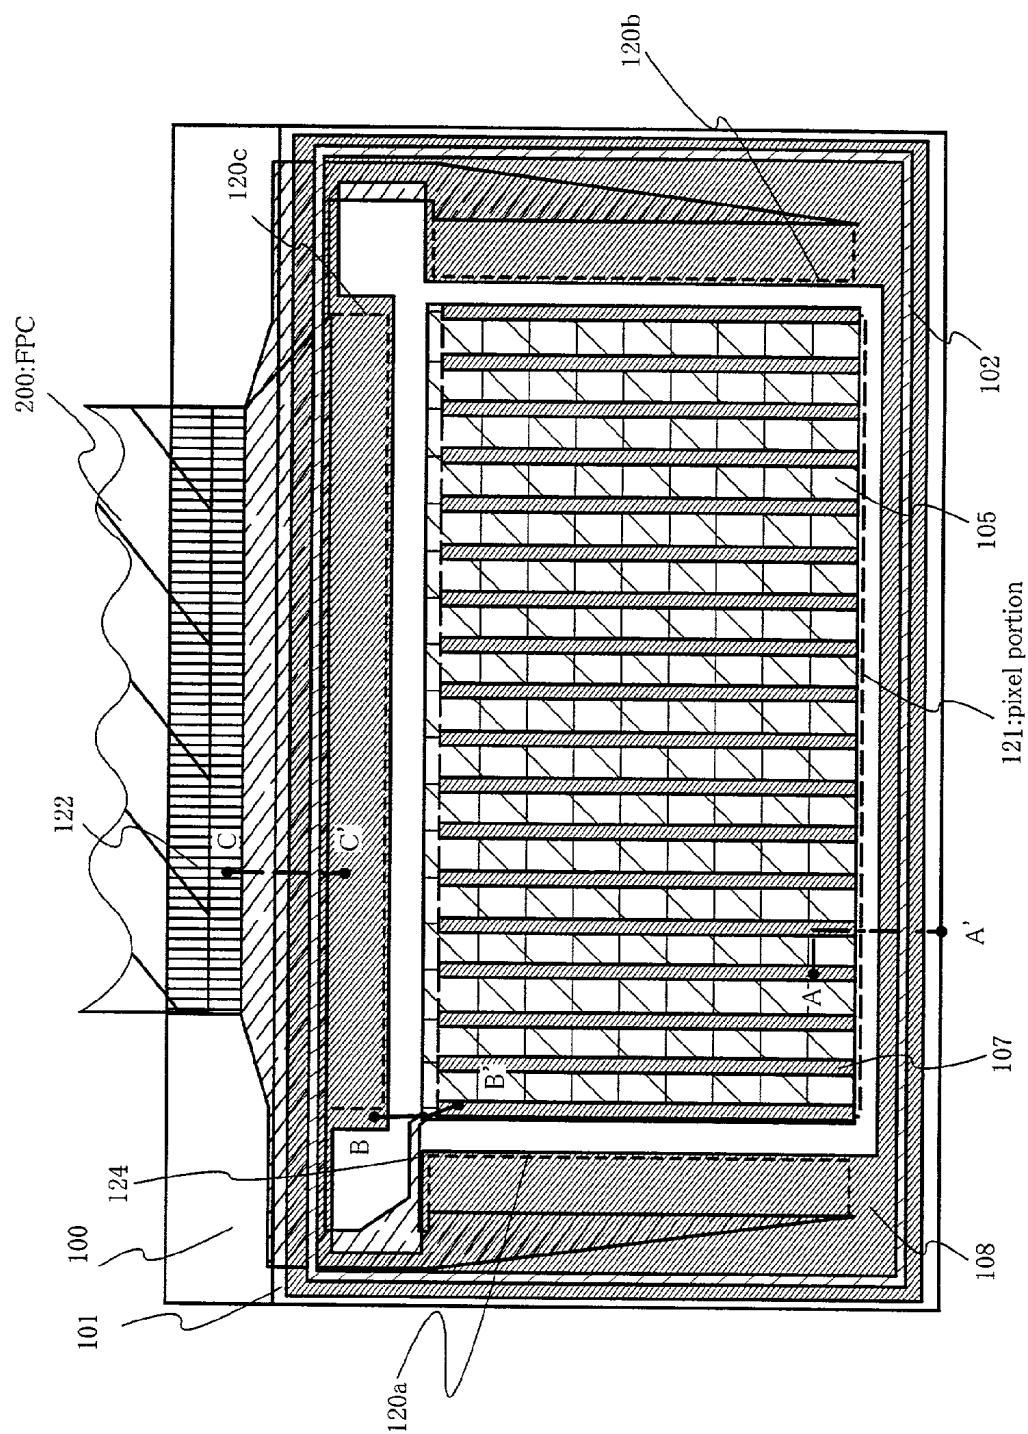


Fig. 6

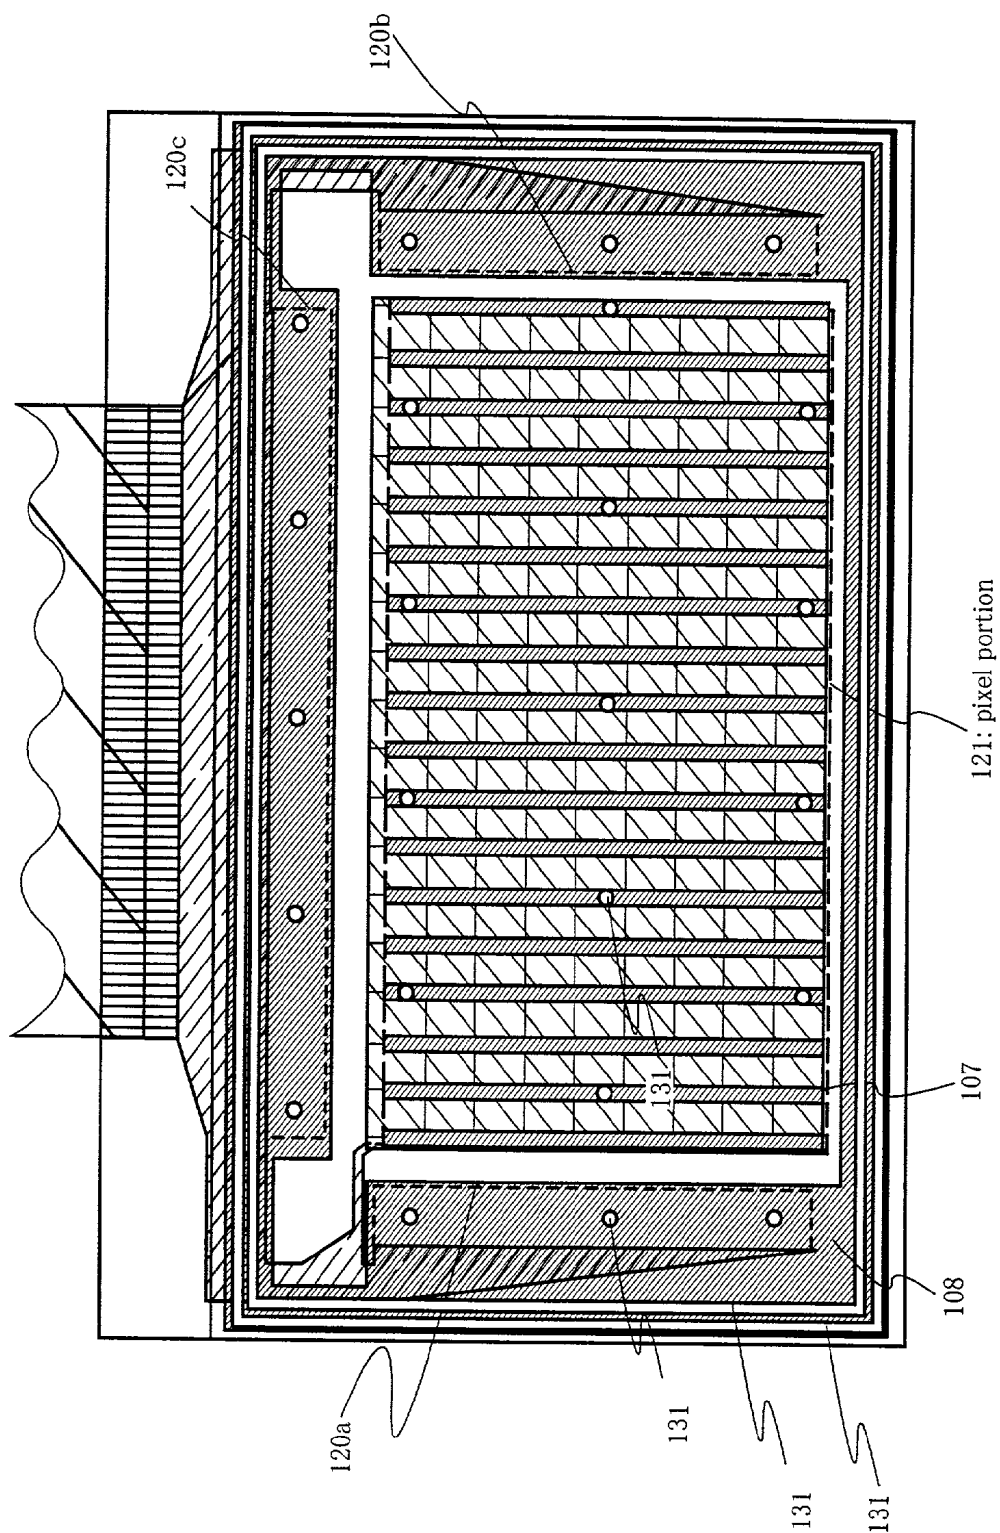


Fig. 7

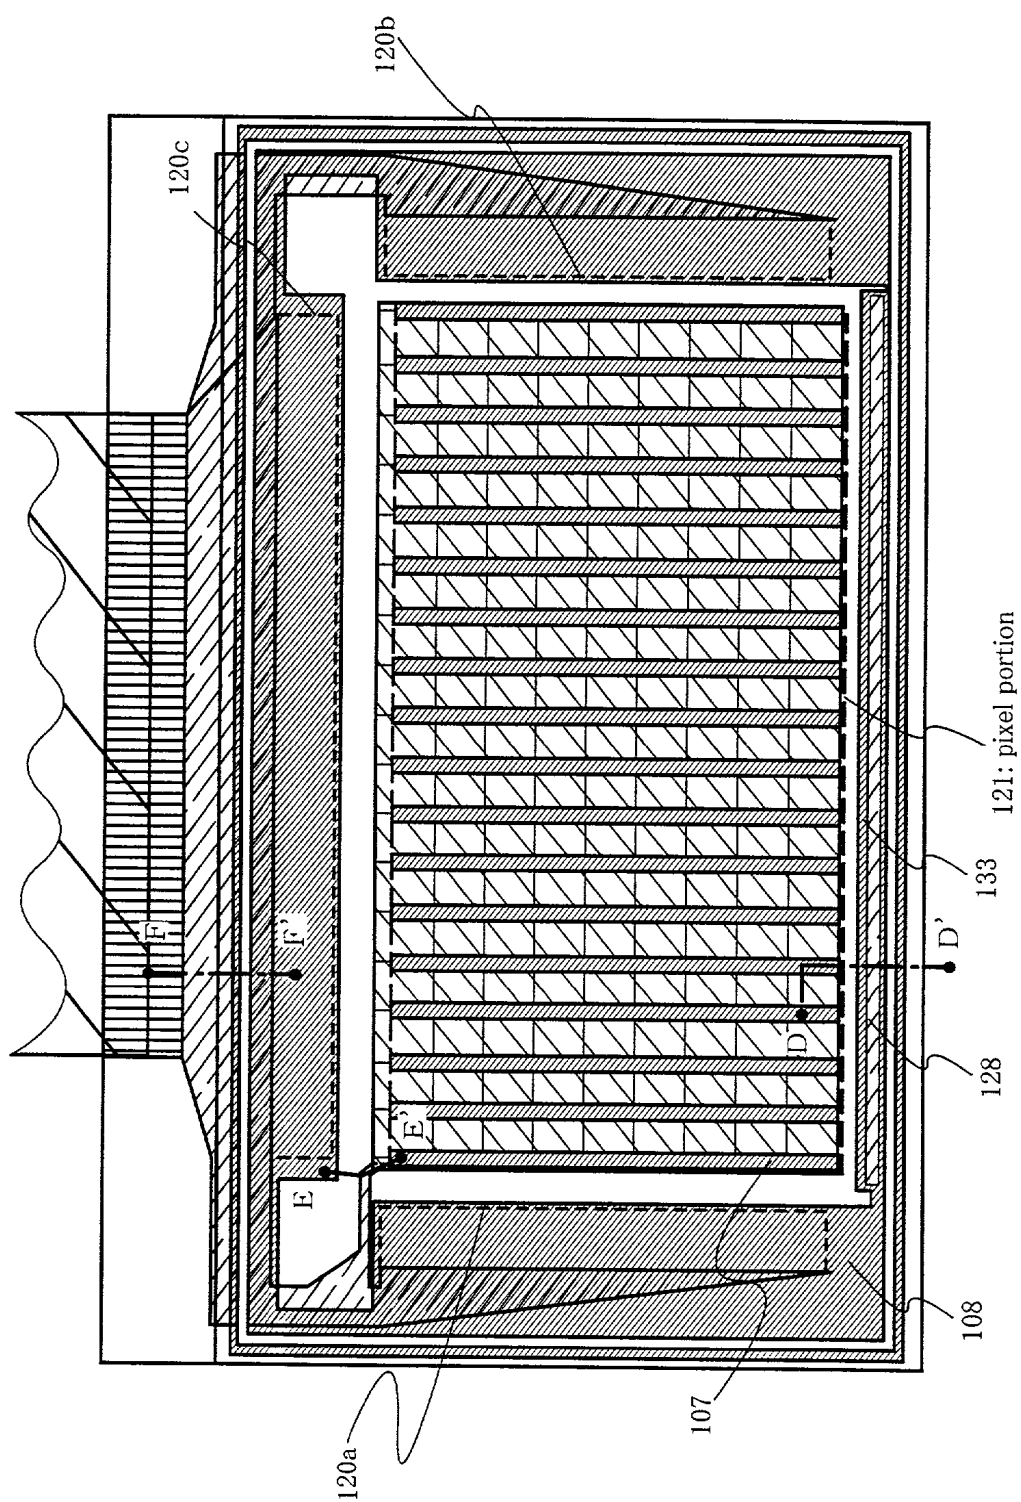


Fig. 8

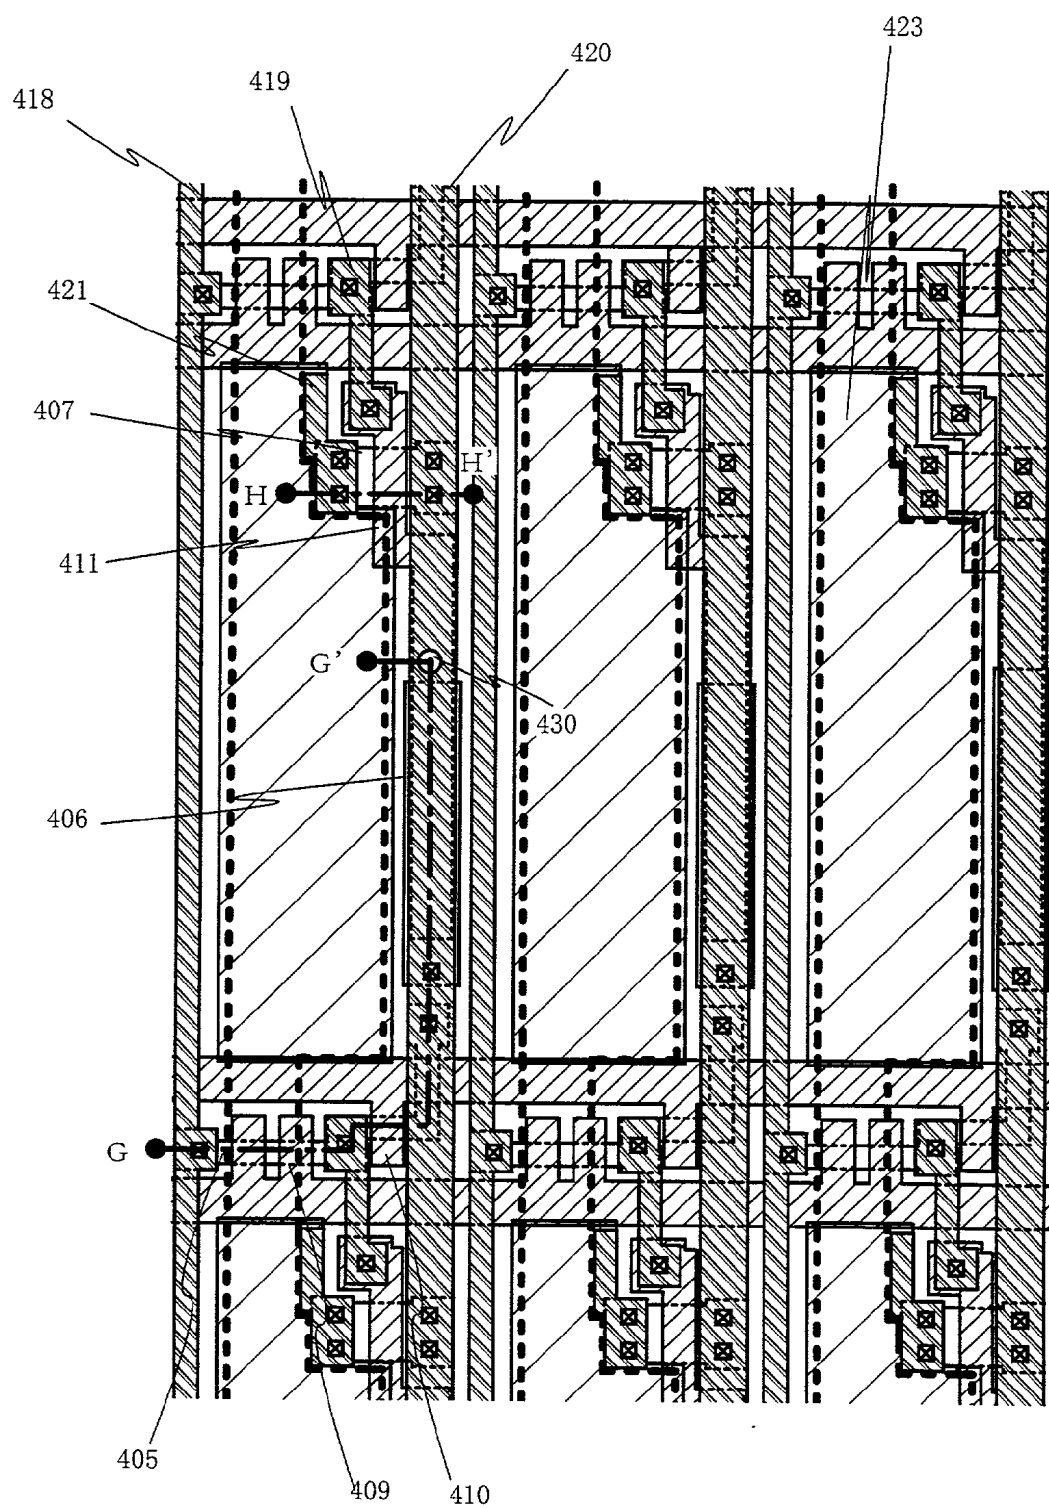


Fig. 9

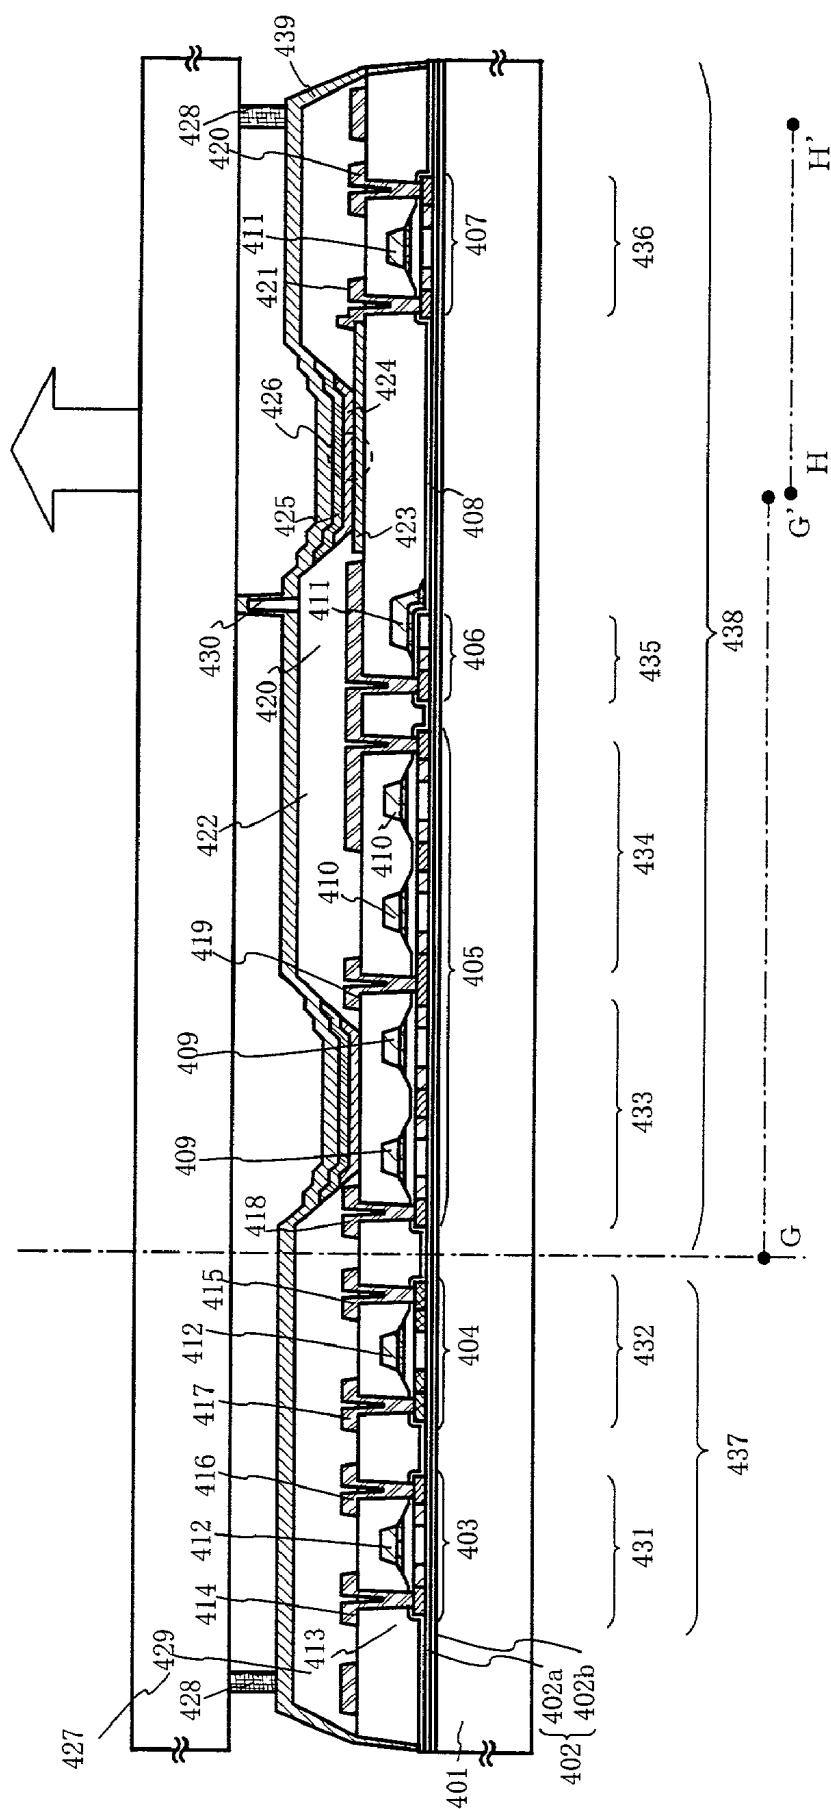


Fig. 10

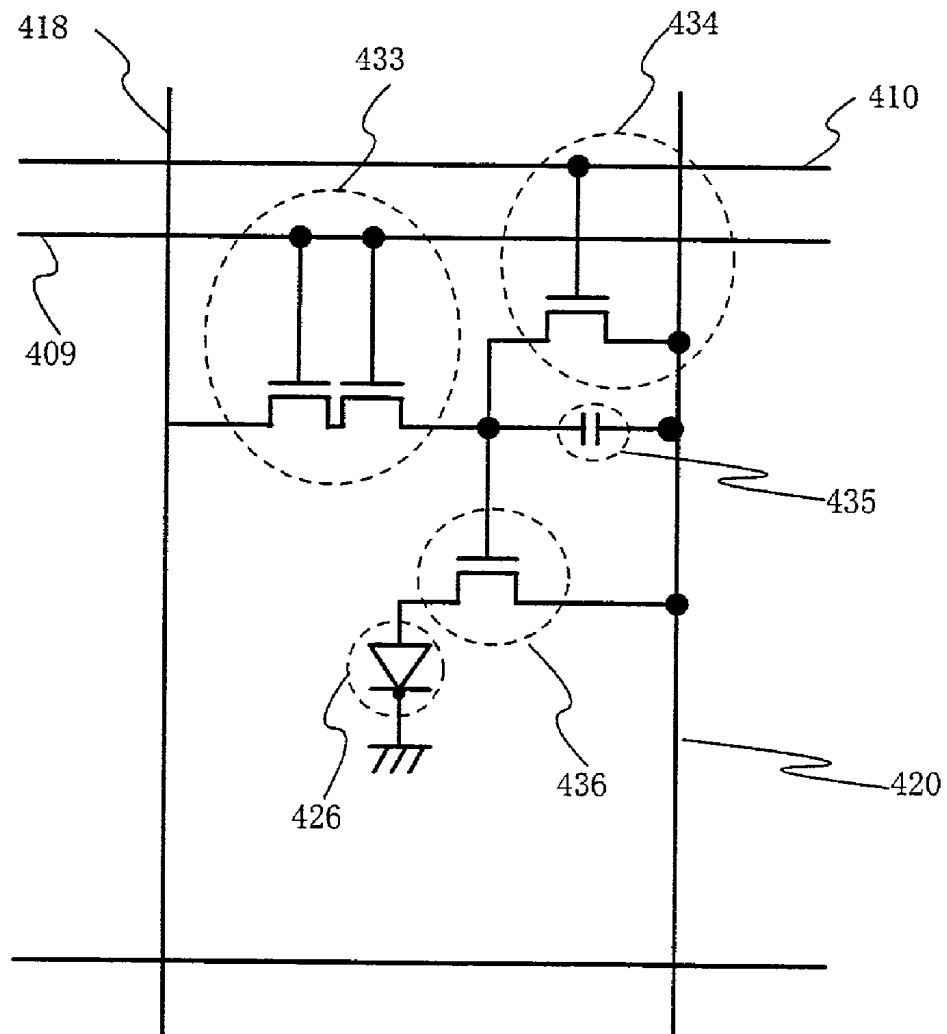


Fig. 11

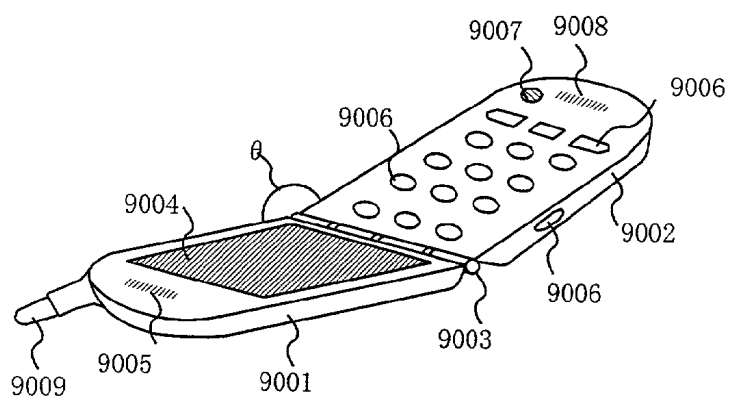


Fig. 12A

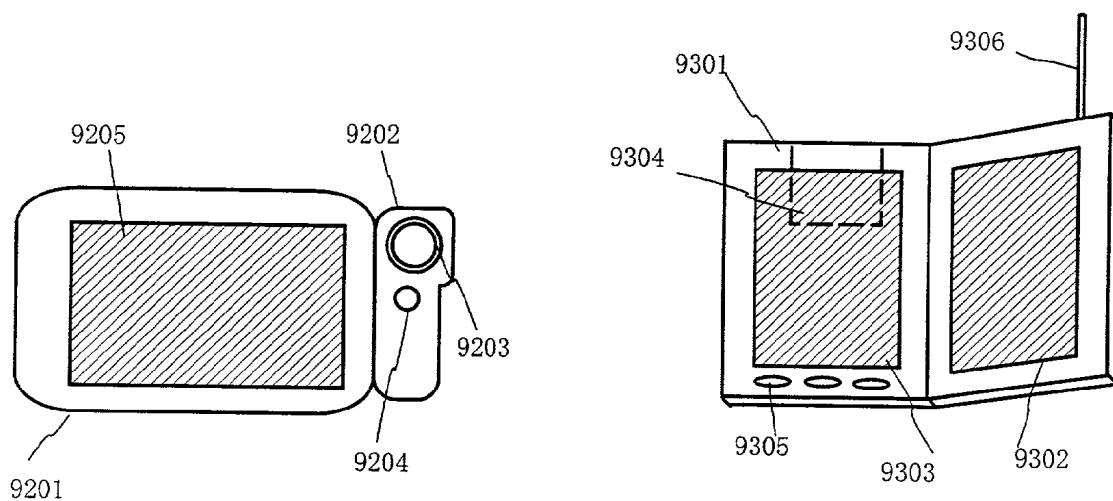


Fig. 12B

Fig. 12C

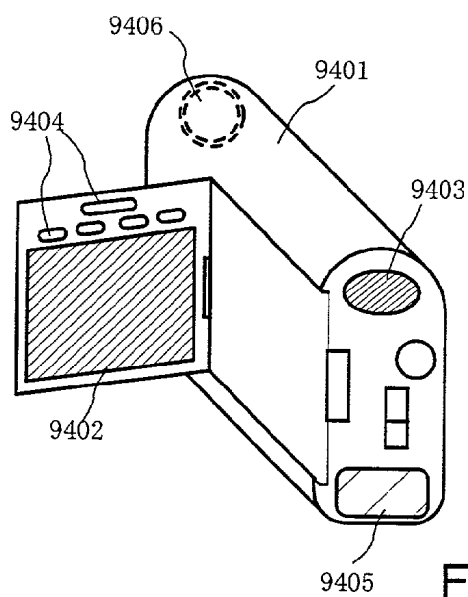


Fig. 12D

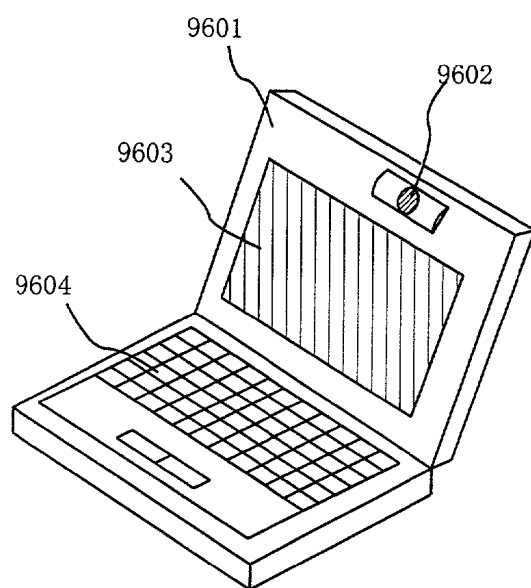


Fig. 13A

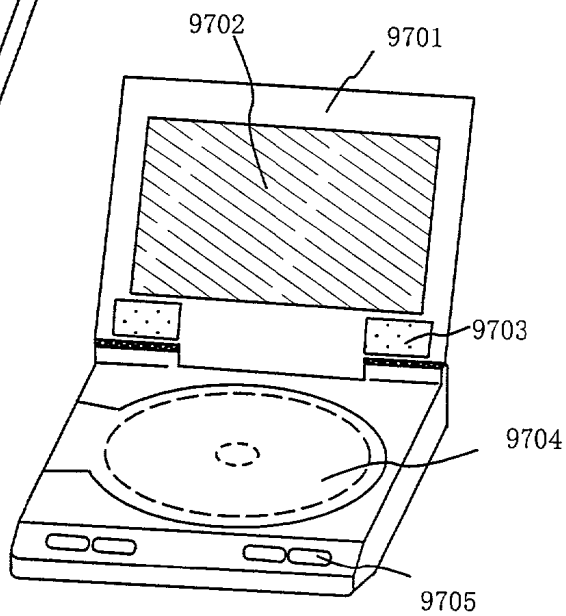


Fig. 13B

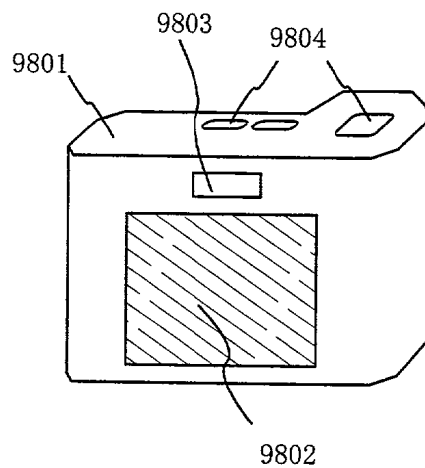


Fig. 13C

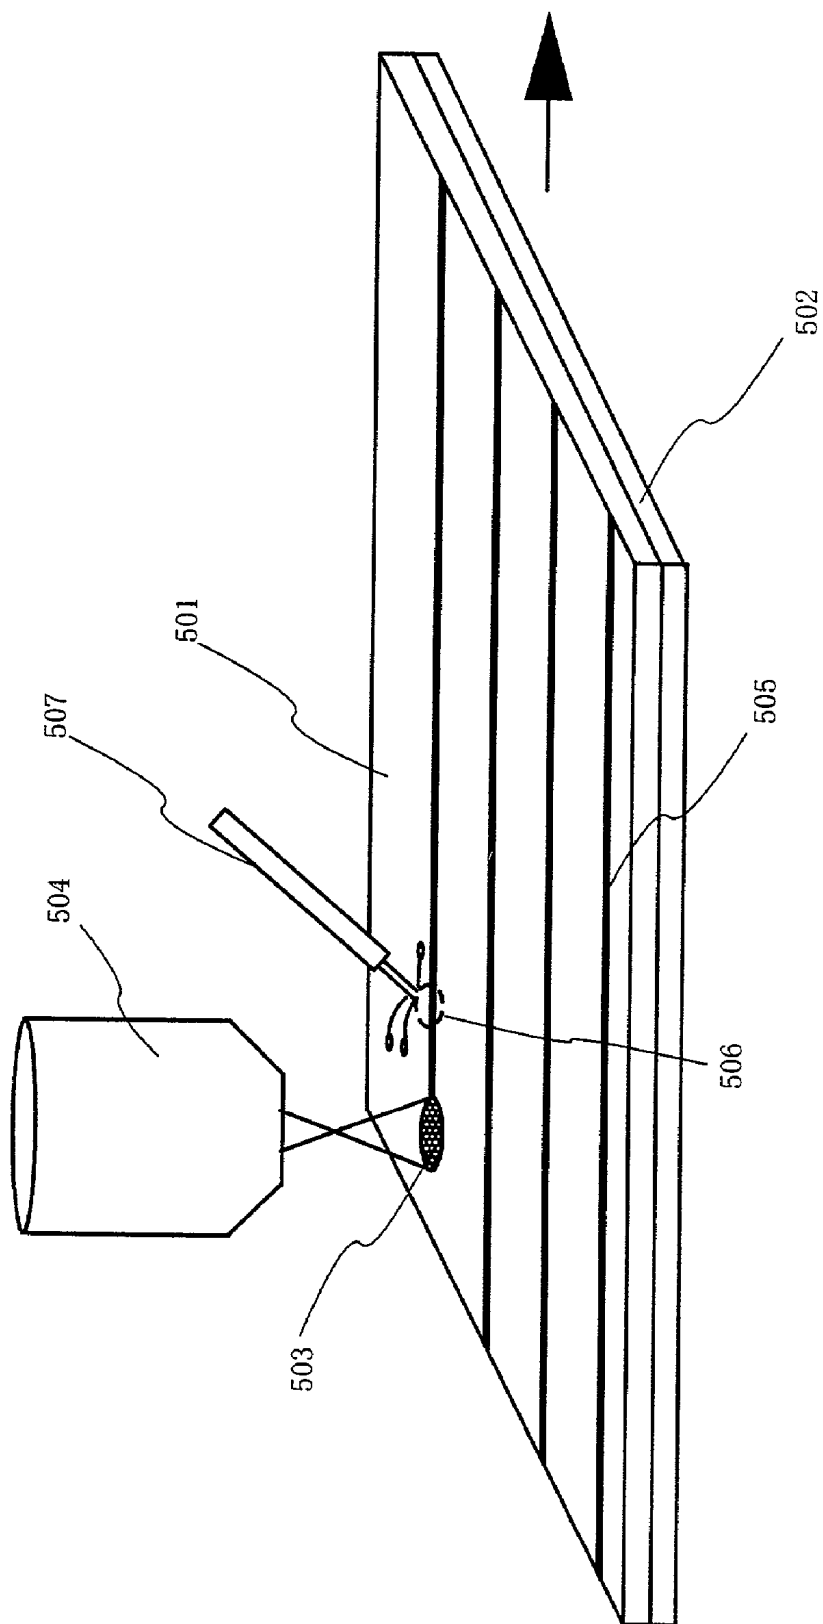


Fig. 14

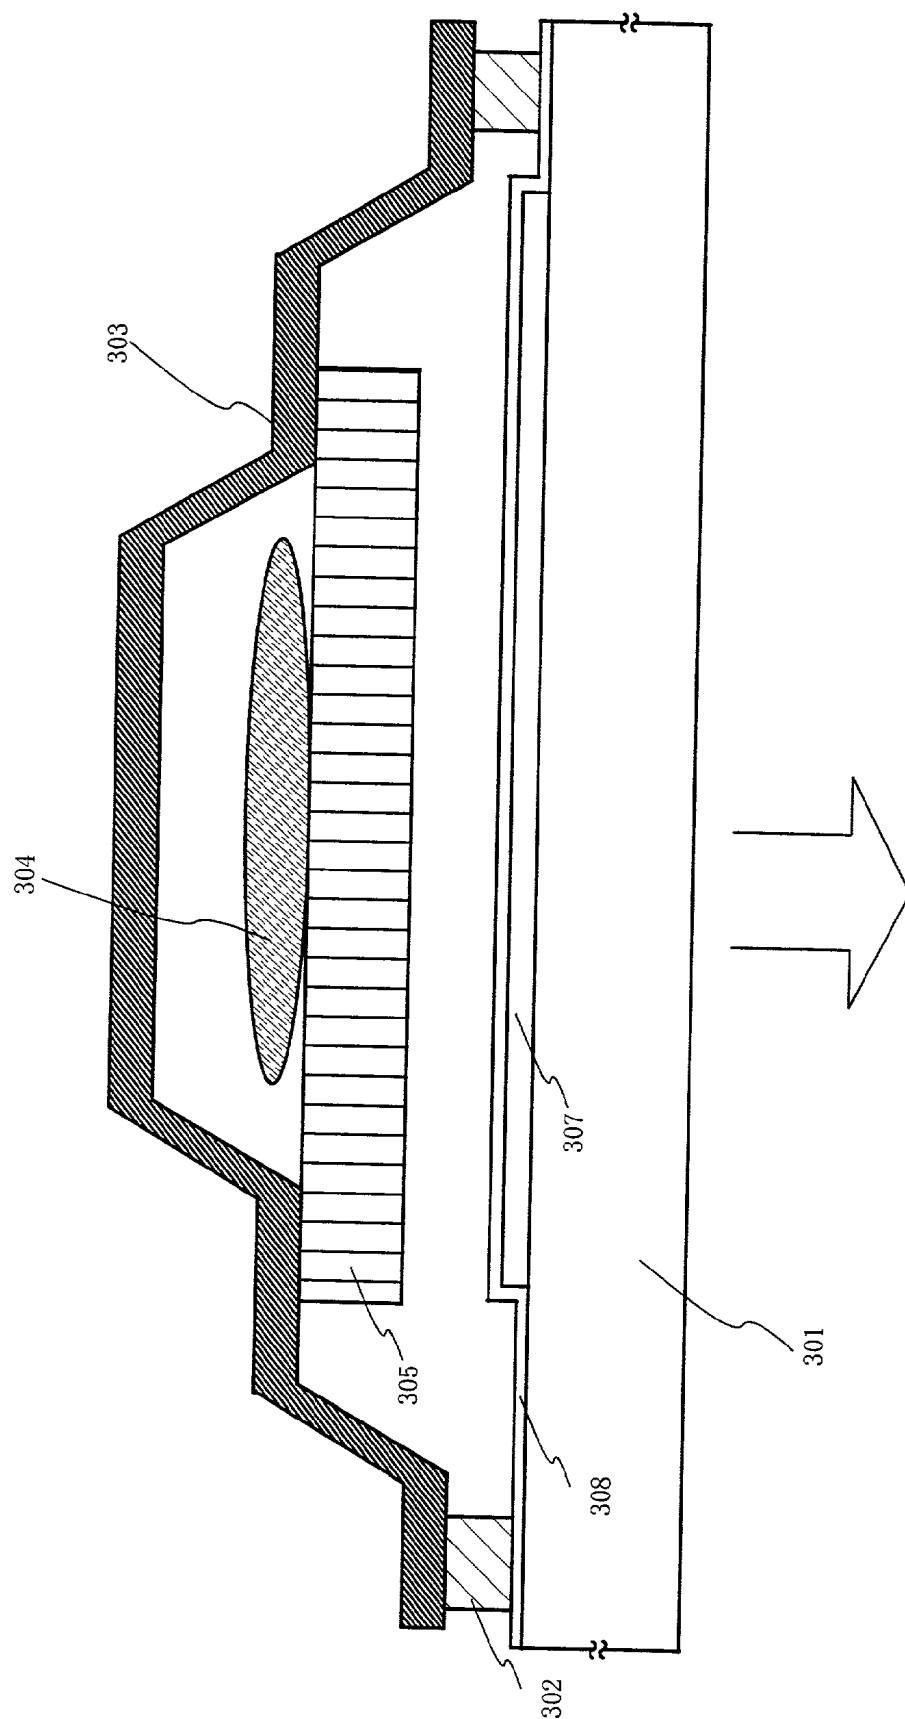


Fig. 15

DISPLAY DEVICE AND METHOD OF MANUFACTURING THE SAME

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a display device using an organic light-emitting element and a manufacturing method thereof. More specifically, the present invention relates to a sealing structure for protecting an organic light emitting element deposited onto a substrate, and to a display device, in which an element substrate (a substrate having at least an element such as a TFT) and a sealing substrate are provided in the proximity, and a manufacturing method thereof.

[0003] Throughout the specification, the term "organic light-emitting element" indicates an element including an organic compound film sandwiched between two electrodes to achieve light emission. One of the representative organic light-emitting elements is a light-emitting element using an organic light-emitting diode (OLED). The OLED includes an organic compound film sandwiched between two electrodes. Holes are injected to one of the electrodes while electrons are injected to the other electrode. The holes and the electrons are therefore coupled with each other to cause light emission.

[0004] 2. Description of the Related Art

[0005] In recent years, display devices using the organic light-emitting element are actively studied. The display devices using the organic light-emitting element can be reduced in weight as well as in thickness as compared with a conventional CRT, and thus their application to various uses is attempted. Portable telephones and personal digital assistants (PDAs) can be now connected to the Internet, resulting in a remarkable increase in the amount of information to be displayed as images. Accordingly, there arises an increasing demand for display devices to perform color display and to enhance their definition.

[0006] On the other hand, light weight is an important factor for the display device included in such a portable digital assistant. For example, a portable phone having less than 70 g in weight is now on the market. In order to reduce the weight of the portable digital assistant itself, a throughout review as to the weight of almost all the used components such as individual electric components, a body and a battery is performed. In order to realize a further reduction in weight, however, it is necessary to lighten the display device itself.

[0007] Since a display device including a pixel portion formed with an organic light-emitting element is a self-light emitting type display device, a light source such as a backlight is not required as is needed in liquid crystal display devices. Therefore, such a display device using the organic light-emitting element is promising means of realizing light weight and a thin body.

[0008] The organic light-emitting element is capable of emitting blue light and thus allows the realization of a full-color display self-light emitting type display device. However, various deterioration phenomena are observed in the organic light-emitting element. It is urgently required to

eliminate such phenomena as obstacles to the practical use of the organic light-emitting element.

[0009] For example, the dark spot, which is a non-light emitting point defect appearing in a pixel portion, is regarded as a problem that remarkably reduces the display quality. It is said that the dark spot is a progressive defect and the mere presence of water increases the number of dark spots even if the organic light-emitting element is not operated. It is believed that the cause of the dark spot is a high reactivity of a cathode containing an alkali metal or an alkali earth metal with water or oxygen.

[0010] Therefore, in the display device using the organic light-emitting element, a desiccant is placed in a sealed region surrounded by an element substrate, a sealing substrate and a sealing agent so that water and oxygen do not enter the organic light-emitting element. **FIG. 15** is a cross-sectional view showing a display device using a conventional organic light-emitting element. An element substrate **301** made of glass, on which an organic light-emitting element **307** is provided, and a sealing substrate **303** provided so as to be opposed to the element substrate **301**, are bonded to each other through a sealing agent **302** so that the organic light-emitting element is prevented from being exposed to the outside air. A fine protective film **308** having a thickness of 100 nm to 500 nm may be further provided on the organic light-emitting element **307** so as to prevent water from entering the organic light-emitting element **307**. A sealed region is filled with dry air. A distance between the element substrate **301** and the sealing substrate **303** is adjusted by mixing a filler, a spacer or the like into the sealing agent **302**.

[0011] The sealing substrate **303** has a hollow region made of a metal such as stainless steel or aluminum, which is processed into a dish-like shape. A desiccant **304** and a film sheet **305** are provided in the hollow region. The desiccant **304** has moisture-absorption characteristics so as to absorb water penetrating into the sealed region to prevent the degradation of the organic light-emitting element. If the desiccant **304** gets into the display area where the organic light-emitting element **307** is provided, display performance of the device is deteriorated. Thus, the film sheet **305** having a permeability to gas and vapor is bonded to the sealing substrate **303**, thereby confining the desiccant **304** within a concave portion of the sealing substrate **303**. The film sheet **305** has a thickness of 100 to 300 μm . In consideration of flexion of the film sheet **305** generated by the weight of the desiccant **304**, a gap between the film sheet **305** and the organic light-emitting element **307** where they are bonded to each other so as not to be in contact is required to be 50 to 200 μm . Accordingly, with the film sheet **305** provided in the hollow region of the sealing substrate **303**, the hollow region is required to have a depth of at least 150 to 500 μm . The placement of the film sheet **305** or the like increases the distance between the element substrate and the sealing substrate, making it difficult to reduce the thickness of the display device. In view of this problem, the present invention is to provide a display device, in which the element substrate **301** and the sealing substrate **303** can be provided in close proximity to each other so as to enable the reduction in thickness of the device, and a manufacturing method thereof.

[0012] Conventionally, in order to provide the hollow region in the sealing substrate where the desiccant is placed, it is required to use a sealing substrate made of a metal material that is easy to process. In the display device including the sealing substrate made of metal, however, the element substrate 301 made of glass can be uniquely used as a substrate through which light emitted from the organic light-emitting element is output. Thus, if thin film transistor (TFT) elements are provided on the element substrate, light emitted from the organic light-emitting element is obtained from the side of the element substrate through the TFT elements, resulting in lowered brightness of the emitted light. Moreover, the thinner the element substrate becomes, the lower the shock resistance becomes. As a result, the element substrate is likely to be fragile. In particular, when the sealing substrate made of metal and the element substrate made of glass are bonded to each other, the distortion is generated by a sudden change in temperature due to the difference in thermal expansion coefficient, causing the cracking in the element substrate.

[0013] Accordingly, a second object of the present invention is to provide a display device achieving a bright display with good visibility by increasing the brightness of light emitted from the organic light-emitting element and a manufacturing method thereof. In addition, a third object of the present invention is to provide a display device, in which breakage due to a sudden change in temperature is restrained and a manufacturing method thereof.

[0014] Furthermore, the sealing agent placed on the side faces of the display device is made of an organic resin material, which has a high moisture permeability as compared with inorganic type glass materials and metal materials. For example, the organic resin material has a permeability of 15 g/m² for 24 hr. to 30 g/m² for 24 hr. at 60° C. and a humidity of 90%. Although the amount of water penetrating into the sealed region through the element substrate made of glass from the front side of the display device and the amount of water penetrating into the sealed region through the sealing substrate made of a metal material from the rear side of the display device are negligibly small, water which enters the sealed region through the sealing agent having a high moisture permeability from the side faces of the display device causes the deterioration of the organic light-emitting element. Thus, it is necessary to take measures to cope with this problem.

[0015] Since the amount of water passing through the sealing agent is determined by the product of the area of the sealing agent exposed to the outside air multiplied by the moisture permeability of the sealing agent, it is preferred that the area of the sealing agent exposed to the outside air is as small as possible, that is, the sealing agent is as thin as possible. However, the sealing agent serves not only to bond the sealing substrate and the element substrate to each other, but also to control the distance between the sealing substrate and the element substrate. Thus, it is necessary to determine the thickness of the sealing agent in consideration of the distance between the element substrate and the sealing substrate so that the element substrate and the sealing substrate do not come in contact with each other to break the organic light-emitting element provided on the element substrate and the transistors that make a current flow through the organic light-emitting element.

[0016] In view of the above problem, a fourth object of the present invention is to provide a display device with enhanced reliability, in which the element substrate and the sealing substrate can be provided close to each other and the amount of water vapor passing from the side faces of the element device through an organic resin material such as a sealing agent to enter the sealed region is reduced so as to prolong the lifetime of the organic light-emitting element; and a manufacturing method thereof.

[0017] Alternatively, in order to reduce the amount of water entering from the side faces of the display device, a protective film having a low permeability to a fine gas and water vapor may be considered to be provided between the sealing agent and the outside air so as to contact the sealing agent. However, the formation of the protective film on the side faces of the sealing agent by using a vacuum apparatus after bonding the element substrate and the sealing substrate to each other through the sealing agent leads to an increase in manufacturing cost, thereby decreasing the advantages of the organic light-emitting element which is easily manufactured at a low cost. In addition, since a stress is applied onto a material that is applied onto the substrate by a dispenser system so as to cure the sealing agent, the sealing agent after curing has a gently undulating shape in the thickness direction between the substrates on the side faces of the sealing agent as well as in the width direction perpendicular to the thickness direction of the side faces of the sealing agent. It is difficult to form the protective film on such side faces of the sealing agent, whereby providing a part where the protective film is not formed.

[0018] As described above, it is difficult to reduce the amount of water passing through the sealing agent provided on the side faces of the display device. Accordingly, in the display device using the organic light-emitting element, there is a great need to reduce water passing through the side faces of the display device. Consequently, the fourth object of the present invention is important.

[0019] In addition to the appropriate realization of the first to fourth objects, the present invention enables the reduction in the number of paths through which water passes from the outside air and the control for making the distance between the element substrate (first substrate) and the sealing substrate (second substrate) uniform.

SUMMARY OF THE INVENTION

[0020] As one example of a structure of the present invention, when a bank is to be formed on the element substrate, an insulating film is formed in a closed curve form in the periphery of the element substrate in the same step of forming the bank. Then, an adhesive is formed on the insulating layer, which serves to bond the element substrate and the sealing substrate to each other. The adhesive is formed to have a small thickness, i.e., 0.05 to 0.5, μm . With the structure of the present invention, it is possible to provide the element substrate and the sealing substrate in the proximity, thereby achieving the first object of the present invention, that is, the reduction in thickness of the display device.

[0021] Furthermore, if substrates made of glass having light transmittance are used as the element substrate and the sealing substrate, light emitted from the organic light-emitting element can be obtained from the side of the sealing

substrate. In this case, an aperture ratio of each pixel is determined, independently of the ratio of the number of TFT elements to a pixel. As a result, display with high brightness can be realized, thereby achieving the second object of the present invention. In addition, the breakage due to a sudden change in temperature is restrained, because the element substrate and the sealing substrate have the same thermal expansion coefficient. Consequently, the third object of the present invention is achieved.

[0022] Furthermore, if the element substrate and the sealing substrate are provided in the proximity, the amount of water passing through the organic resin material (adhesive), which serves to bond the element substrate and the sealing substrate to each other, is reduced. As a result, the lifetime of the organic light-emitting element is expected to be prolonged, thereby achieving the fourth object of the present invention.

[0023] In the case where the element substrate and the sealing substrate are provided in the proximity, protections of the organic light-emitting element provided on the element substrate and of the transistors become important. Moreover, how and where to provide the desiccant becomes also an important factor, depending on the desired lifetime. This point will be appropriately described.

[0024] A method of enhancing the uniformity between the element substrate and the sealing substrate will be also appropriately described.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] In the accompanying drawings:

[0026] FIG. 1 is a cross-sectional view showing a display device using an organic light-emitting element according to Embodiment Mode 1;

[0027] FIG. 2 is a cross-sectional view showing a display device using an organic light-emitting element according to Embodiment Mode 2;

[0028] FIG. 3 is a cross-sectional view showing a display device using an organic light-emitting element according to Embodiment Mode 3;

[0029] FIG. 4 is a cross-sectional view showing a display device using an organic light-emitting element according to Embodiment Mode 4;

[0030] FIG. 5 is a cross-sectional view showing a display device using an organic light-emitting element according to Embodiment Mode 5;

[0031] FIG. 6 is a top plan view showing the appearance of a display device using the organic light-emitting element according to Embodiment Mode 1;

[0032] FIG. 7 is a top plan view showing the appearance of a display device using the organic light-emitting element according to Embodiment Mode 4;

[0033] FIG. 8 is a top plan view showing the appearance of a display device using the organic light-emitting element according to Embodiment Mode 5;

[0034] FIG. 9 is a top plan view showing a pixel portion in Embodiment 1;

[0035] FIG. 10 is a cross-sectional view of an active matrix substrate of Embodiment 1;

[0036] FIG. 11 is an equalizing circuit in the pixel portion of Embodiment 1;

[0037] FIGS. 12A to 12D are perspective views illustrating examples of electronic devices of Embodiment 3;

[0038] FIGS. 13A to 13C are perspective views illustrating examples of electronic devices of Embodiment 3;

[0039] FIG. 14 is a perspective view illustrating a method of cutting a glass substrate by the use of a CO₂ laser in Embodiment 2; and

[0040] FIG. 15 is a cross-sectional view showing a display device using a conventional organic light-emitting element.

DESCRIPTION OF THE PREFERRED EMBODIMENT MODES

[0041] Hereinafter, the preferred embodiment modes of the present invention will be described with reference to the accompanying drawings.

[0042] One example of the present invention is now described with reference to a cross-sectional view shown in FIG. 1. FIG. 1 shows a display device using an organic light-emitting element according to the present invention. A first substrate 100 is a light transmitting substrate made of glass. A TFT in a pixel portion 121 and a TFT in a driving circuit portion 120 provided in the periphery of the pixel portion 121 are formed on the first substrate 100. Base films 118 and 119 made of an inorganic material are provided on the first substrate 100. Each of the TFTs in the pixel portion and the driving circuit portion on the first substrate, includes: a semiconductor film 110; a gate insulating film 111 covering the semiconductor film 110; gate electrodes 112 and 113 provided above a channel region of the semiconductor film 110 through the gate insulating film 111; a first interlayer insulating film 114 made of an inorganic material, covering the gate electrodes 112 and 113 and the gate insulating film 111; a second interlayer insulating film 115 made of an organic material, provided on the first interlayer insulating film 114; and a drain electrode 116, a source electrode 117 and a wiring 122, formed by patterning the same conductor layer. One end of the wiring 122 is connected to the semiconductor film 110 in the driving circuit portion, and the other end serves as an external input terminal provided outside a sealed region. An FPC (flexible print circuit) is connected to the external input terminal through a first electrode 103 made of an ITO film.

[0043] An organic light-emitting element 106 consisting of a laminate of the first electrode 103, an organic compound film 104 and a second electrode 105 is provided on the second interlayer film 115. The first electrode 103 is an anode, for which a transparent conductive film having light transmittance, for example, an ITO (Indium Tin Oxide) film can be used. The second electrode 105 is a cathode, for which a thin metal film containing an alkali metal or an alkali earth metal such as MgAg or AlLi can be used. In order to prevent the breaking of the organic compound film 104 at the end of the first electrode 103 due to the weight of the first electrode 103 to cause the short-circuit between the first electrode 103 and the second electrode 105 at the

broken point, a bank is provided so as to cover the end of the first electrode **103**. The organic compound film **104** is provided along the gentle slope of the bank, and then the second electrode **105** is provided thereon, so that the short-circuit between the first electrode **103** and the second electrode **105** can be prevented. In the present invention, an insulating film having a thickness of 1 to 10 μm is patterned to form a first insulating film **107** serving as the bank and a second insulating film **108** provided in the periphery of the first substrate **100**.

[0044] For the propose of restraining water from entering the display device through its side faces and the reaction between the organic light-emitting element and water, a protective film **109** is formed as an uppermost layer on the first substrate **100** so as to cover the second electrode **105**, the first and second insulating films **107** and **108** and the second interlayer insulating film **115**. At the same time, the protective film **109** is also formed on the organic light-emitting element **106**, the side faces of the second interlayer insulating film **115**, and the side faces of the second insulating film **108**. Since the side faces of the second interlayer insulating film **115** and the second insulating film **108** are insulated from the outside air by the fine and hard protective film **109**, water is prevented from passing through the side faces of the display device to enter the sealed region. As the protective film **109**, a silicon nitride film or a DLC (Diamond like Carbon) film may be used. The DLC film is optimal as the protective film **109** because the DLC film is very hard and has excellent insulation properties, and thus can have a low gas permeability to vapor, oxygen or the like. In this manner, the element substrate **100**, on which the organic light-emitting element **106** is formed, is completed.

[0045] An adhesive **102** is provided above the second insulating film **108** which is provided in the periphery of the element substrate **100** so as to bond the element substrate **100** and a sealing substrate **101** to each other. The sealing substrate **101** is a second substrate having light transmittance. The adhesive **102** has a small thickness, i.e., a thickness of 0.05 to 0.5 μm , preferably, 0.05 to 0.2 μm . If the total thickness of the layers deposited under the adhesive **102** and the total thickness of the layers deposited in the pixel portion where the first insulating film **107** is provided, are adjusted to be equal to each other, the distance between the first substrate **100** and the second substrate **101** can be made uniform throughout the pixel portion and the peripheral area of the first substrate **100**. More desirably, in further consideration of the thickness of the adhesive **102**, when the sum of the thickness of the adhesive **102** and the total thickness of the underlying layers in the peripheral area of the first substrate **100** is designed to be equal to the total thickness of the deposited layers in the pixel portion where the first insulating film is provided or to the total thickness of the deposited layers in the driving circuit portion, the distance between the first substrate **100** and the second substrate **101** can be more certainly uniform throughout the pixel portion and the peripheral area of the first substrate **100**. To achieve such uniformity, a film having a dominant thickness in the laminate, for example, a second interlayer insulating film, a bank and an insulating film formed in the same manufacturing step as the bank, is required to be provided in the pixel portion, the driving circuit portion and the peripheral area of the first substrate **100**.

[0046] The reduction in thickness of the adhesive **102** allows the reduction in the amount of water passing from the outside air through the side faces of the adhesive **102** to enter the sealed region. Since an adhesive having adhesion and such characteristics that provide a thickness of 0.05 to 0.5 μm , preferably, 0.05 to 0.2 μm can be used in the present invention, even a conventional sealing agent may be used as an adhesive of the present invention as long as it has a thickness of 0.05 to 0.5 μm , preferably, 0.05 to 0.2 μm .

[0047] The sealed region surrounded by the element substrate **100**, the sealing substrate **101** and the adhesive **102** is filled with a dry gas. An inert gas such as nitrogen, argon, or helium is used as the dry gas. The dry gas contains a very small amount of the remaining water. However, since the adhesive **102** has a small thickness, i.e., a thickness of 0.05 to 0.5 μm , preferably, 0.05 to 0.2 μm , the volume of the sealed region, that is, the volume of the dry gas filling the sealed region is also small. Thus, the amount of water remaining in the dry gas within the sealed region is correspondingly small.

[0048] Moreover, since the moisture permeability of the organic resin film tends to be lowered if its width is large, it is preferred that the width of the organic resin film is increased by providing the second insulating film made of the organic resin film, which is formed in contact with the protective films on the side faces of the display device, so as to cover not only the underlying portion of the adhesive **102** but also the driving circuit portion **120**. However, if the area of a frame region is increased with the increase in the width of the second insulating film, the display performance is degraded. Thus, the width of the second insulating film is preferably 100 to 5000 μm . The designer can appropriately design the width of the second insulating film because it is determined by a photomask.

[0049] According to the present invention, since the protective film can be provided without unevenness on the side faces of the display device in simple manufacturing steps, the amount of water passing through the side faces of the display device to enter inside can be reduced. The organic resin material, which is exposed to the outside air on the side faces of the display device, serves as an adhesive. Since the adhesive can be made thinner as far as the material permits, the area of the adhesive exposed to the outside air can be reduced to be as small as possible.

[0050] In addition, the use of the second substrate made of glass as the sealing substrate allows the thermal expansion coefficients of the element substrate and the sealing substrate to be equal to each other. As a result, since the element substrate and the sealing substrate have the same thermal expansion coefficient, the cracking in the substrates in accordance with a change in temperature can be prevented from occurring even if the temperature of the environment where the device is used is suddenly changed. The present invention is particularly effective when the strength of the substrates is lowered with the reduction of their thickness. Certainly, since the element substrate and the sealing substrate are both made of glass having light transmittance, light emitted from the organic light-emitting element can be obtained from the side of the element substrate, with a first electrode of the organic light-emitting element being light transmissive and a second electrode being light reflective. On the contrary, light emitted from the organic light-emitting

ting element can be obtained from the side of the sealing substrate, with the first electrode being light reflective and the second electrode being light transmissive. The designer may appropriately determine from which substrate, i.e., the element substrate or the sealing substrate, light emitted from the organic light-emitting element is to be obtained.

[0051] The structure shown in FIG. 1 is intended to prolong the lifetime of the light-emitting element by providing the fine protective film on the side faces of the display device and the organic light-emitting element. The long-term reliability of the organic light-emitting element can be ensured by various methods in the embodiment modes described below. Furthermore, a method of providing a desiccant in the above structure will be also described. With the following embodiment modes, the uniformity of the distance between the first substrate and the second substrate of the organic light-emitting element can be improved by various methods. The following embodiment modes may be combined. Hereinafter, the present invention will be described in detail by way of example.

[0052] Embodiment Modes

[0053] (Embodiment Mode 1)

[0054] A first embodiment mode of the present invention will be described with reference to FIG. 1. FIG. 1 is a cross-sectional view showing an active-matrix display device using an organic light-emitting element. The components constituting the display device shown in FIG. will be described in the order of formation.

[0055] A driving circuit portion 120 and a pixel portion 121 are formed by using TFTs on a first substrate 100. As the first substrate 100, a substrate made of glass such as barium borosilicate glass, alumino borosilicate glass, or quartz glass is used.

[0056] The TFT in the driving circuit portion 120 and the TFT in the pixel portion 121 are provided on base films 118 and 119 having insulation properties. A silicon nitride oxide film having a thickness of 10 to 100 μm is formed as the base film 118, whereas a silicon nitride oxide film having a thickness of 20 to 200 nm is formed as the base film 119. In this embodiment mode, silicon nitride oxide films having different film qualities are deposited to form the base films 118 and 119.

[0057] The TFT is constituted by a semiconductor film 110, a gate insulating film 111, gate electrodes 112 and 113, a first interlayer insulating film 114, a second interlayer insulating film 115, a drain electrode 116 and a source electrode 117. A silicon film having a thickness of 10 to 150 nm is formed as the semiconductor film 110, and a nitride film having a thickness of 20 to 300 nm is formed as the gate insulating film 111. A laminate film including a tantalum nitride film having a thickness of 30 to 60 nm and a tungsten film having a thickness of 370 to 400 nm is formed as each of the gate electrodes 112 and 113. A silicon oxide film having a thickness of 50 to 150 nm is formed as the first interlayer insulating film 114, whereas an acrylic resin film having a thickness of 1 to 3 μm is formed as the second interlayer insulating film 115. As each of the drain electrode 116 and the source electrode 117, a laminate including a titanium film having a thickness of 50 to 800 nm, an aluminum alloy film containing aluminum as a main constituent, to which silicon is added as an impurity element,

having a thickness of 350 to 400 nm, and a titanium film having a thickness of 100 to 1600 nm, is formed. A conductor film 123, a wiring 122 and a wiring 124 are formed of the same layer as the drain electrode 116 and the source electrode 117.

[0058] As an anode, the first electrode 103 made of an ITO (Indium Tin Oxide) film, which is a conductive film having light transmittance, is formed. The first electrode 103 may be formed to have a thickness of 100 to 200 nm.

[0059] A bank made of a photosensitive organic resin film such as acrylic or polyimide is formed so as to partially overlap the end of the first electrode 103. A thickness of the bank is set to 1 to 10 μm . A photosensitive acrylic resin film is patterned to form a first insulating film 107 in a striped manner along a source wiring as the bank. A second insulating film 108 is formed so as to cover the peripheral area of the first substrate 100 and the driving circuit portion 120.

[0060] The formation of an organic compound film 104 in a striped manner along a gentle slope of the bank prevents the breaking of the organic compound film 104 at the end of the first electrode 103, which in turn prevents the short-circuit between the first electrode 103 and the second electrode 105 due to the broken point of the organic compound film 104. The organic compound film 104 is deposited in the order of: electron transport layer/light emitting layer/hole transport layer/hole injection layer. However, the organic compound film 104 may alternatively have a structure of: electron transport layer/light emitting layer/hole transport layer; or electron injection layer/electron transport layer/light emitting layer/hole transport layer/hole injection layer. In the present invention, any conventional structures may be used.

[0061] As specific examples of the light emitting layers, the following layers may be used: as a layer emitting red light, cyanopolyphenylene; as a layer emitting green light, polyphenylene vinylene; and as a layer emitting blue light, polyphenylene vinylene or polyalkylphenylene. A thickness of the light emitting layer may be set to 30 to 150 nm.

[0062] Since the above-mentioned materials are merely examples of the materials that can be used for the light emitting layers, the materials are not limited thereto. Materials for forming the light emitting layer, the hole transport layer, the hole injection layer, the electron transport layer and the electron injection layer may be freely selected in the possible combinations thereof.

[0063] As the second electrode 105, a cathode is made of a material containing magnesium (Mg), lithium, (Li) or calcium (Ca) having a small work function. Preferably, an electrode made of MgAg (a material obtained by mixing Mg and Ag at the ratio of Mg:Ag=10:1) may be used. Besides, an MgAgAl electrode, an LiAl electrode, and an LiFAl electrode can be cited as examples of the second electrode 105. The second electrode 105 is formed by using a material such as MgAg or LiF. A thickness of the second electrode 105 may be set to 100 to 200 nm. The second electrode 105 is formed in a striped manner between the banks, serving as a common electrode which is short-circuited outside the display area.

[0064] The organic light-emitting element 106 is formed by depositing the first electrode 103, the organic compound film 104, and the second electrode 105 in this order. The first

electrode **103** serves as a cathode having light reflectance, whereas the second electrode **105** serves as an anode having light transmittance, thereby allowing light emitted from the organic light-emitting element **106** to be output toward the side of the first substrate **100**.

[0065] As a protective film **109**, a DLC film having a thickness of 100 to 500 nm is used. The DLC film can be formed by a plasma CVD method, a microwave CVD method, an electron cyclotron resonance (ECR) CVD method, a sputtering method or the like. With any film formation method, the DLC film having good adhesion can be formed without heating the organic compound film. The DLC film is formed with the substrate being placed on the cathode. Alternatively, a negative bias is applied onto the substrate to form a fine and hard DLC film by utilizing the ion impact to some extent. As a reaction gas used for film growth, a hydrocarbon type gas, for example, CH_4 , C_2H_2 , C_6H_6 or the like is used. The reaction gas is ionized by glow discharge. The resulting ions are accelerated to collide against the cathode, across which a negative self-bias is applied, thereby forming the DLC film. In this method, a fine and smooth DLC film can be obtained. Since the substrate is scarcely heated to form the DLC film, the DLC film can be formed in the last manufacturing step of the first substrate **100**. The DLC film is provided so as to cover the second electrode **105**, the first insulating film **107** and the second insulating film **108**.

[0066] As the adhesive **102**, an epoxy type adhesive is used. Either an ultraviolet-curable resin or a heat-curable resin can be used as the adhesive **102**. It is preferred to select a material for the adhesive **102** in consideration of a heat resistance temperature of the organic light-emitting element **106**. It is desired that the adhesive **102** is formed as thin as possible. As the adhesive **102**, LIXON BOND, LX-0001 distributed by Tisso Co. Ltd. may be used. The lixon bond, LX-0001, is a two-part epoxy resin. After the application of LX-0001 on the first substrate **100**, LX-0001 is cured at 100° C. for two hours, applying the stress on the periphery of the first substrate **100** and the second substrate **101**. After the curing, the adhesive **102** can be formed to have a thickness of 0.2 to 0.5 μm by adjusting the stress and the amount of application. In Embodiment Mode 1, the distance between the first substrate **100** and the second substrate **101** is controlled by the total thickness of the base films **118** and **119**, the gate insulating film **111**, the first interlayer insulating film **114**, the second interlayer insulating film **115**, the wiring **122** or the conductor film **123**, the second insulating film **108** and the adhesive **102**. In this laminate structure, the adhesive **102** is not required to have a function of controlling the gap. Since it is sufficient for the adhesive **102** to have an adhesion function for bonding the substrates to each other, it is preferred that the adhesive **102** is formed as thin as possible so as to reduce the area of the adhesive **102** made of an organic resin material, which is exposed to the outside air on the side faces of the display device.

[0067] As the sealing substrate **101**, a second substrate made of glass such as barium borosilicate glass, aluminoborosilicate glass, or quartz glass is used.

[0068] Although not shown, the stripe-shaped second electrode **105** is short-circuited outside the display area to serve as a common electrode. In the region designated by a chain line B-B', one end of the wiring **124** is in contact with

the second electrode **105**. The other end of the wiring **124** serves as an external input terminal.

[0069] The conductor film **123** below the adhesive **102** is provided to equalize the total thickness of the laminate film below the adhesive **102** so that the distance between the first substrate **100** and the second substrate **101** is uniformed in the region surrounded by the adhesive **102**. The conductor film **123** is provided so as to cover the upper face and the side faces of the second interlayer insulating film **115** made of an organic resin film except the region where the external input terminal is provided, thereby preventing water from passing through the side faces of the second interlayer insulating film **115** to enter the inside of the display device.

[0070] Although not shown, the surface of the sealing substrate **101** may be scraped off by a sandblast method so that a desiccant is bonded to the scraped region by an adhesive.

[0071] Since the organic compound film and the second electrode **105** of the organic light-emitting element **106** are provided along the side faces of the first insulating film **107**, the laminate film constituting the light-emitting element **106** is not broken even if the stress is externally applied onto the second substrate **101**. Moreover, since the first insulating film **107** and the second insulating film **108** made of an elastic organic resin film are provided on the TFT in the pixel portion and the TFT in the driving circuit portion, the TFTs in the driving circuit portion and the pixel portion are not damaged even if the stress is externally applied onto the second substrate **101**.

[0072] A chain line A-A' indicates a cross section of the pixel portion **121** and the peripheral area of the first substrate **100**; a chain line B-B' shows a connection structure between the second electrode **105** and the wiring **124** connected to the external input terminal; and a chain line C-C' shows a connection structure between the FT1 in the driving circuit portion and the external input terminal.

[0073] FIG. 6 is a top plan view of this embodiment mode. FIG. 6 shows the appearance of a display device using an organic light-emitting element according to the present invention. The cross-sections cut along the chain lines A-A', B-B', and C-C' in FIG. 6 correspond to the chain lines A-A', B-B', and C-C' in FIG. 1, respectively. The same elements as those in FIG. are designated by the same reference numerals in FIG. 6.

[0074] The top plan view of FIG. 6 shows the first substrate **100** and the second substrate **101** having light transmittance, which are bonded to each other through the adhesive **102**. On the first substrate **100**, the pixel portion **121**, the driving circuit portion, a flexible printed circuit (FPC) **200**, the wirings **122** and **124** serving as external input terminals for attaching the FPC **200** onto the substrate, and the like are formed.

[0075] As the driving circuit portion, a first gate wiring side driving circuit portion **120a** and a second gate wiring side driving circuit portion **120b** are respectively provided on the ends of the gate wiring in the pixel portion so as to be connected to the gate wiring in the pixel portion. A source wiring side driving circuit portion **120c** is provided so as to be connected to a source wiring in the pixel portion.

[0076] The FPC **200** is bonded to the external input terminal **122** through an anisotropic conductive resin. The

first insulating film **107** serving as the bank is provided in a column direction in a striped manner. The second insulating film **108** is provided in a closed curve form in the peripheral area of the first substrate **100** so as to cover the first gate wiring side driving circuit portion **120a**, the second gate wiring side driving circuit portion **120b**, and the source wiring side driving circuit portion **120c**. The second electrode **105**, serving as a common electrode, is provided in a striped manner along the first insulating film **107** and is short-circuited outside the pixel portion.

[0077] The display device using the organic light-emitting element manufactured as described above can be used as a display section of various electronic appliances.

[0078] (Embodiment Mode 2)

[0079] Embodiment Mode 2 will be described with reference to a cross-sectional view of FIG. 2. FIG. 2 is a cross-sectional view showing an active-matrix organic light-emitting element of Embodiment Mode 2. In Embodiment Mode 2, the display device described in Embodiment Mode 1, whose periphery is further covered with an adhesive and a metal plate **127** having a U-shaped cross section so as to prevent water from entering the organic light-emitting element, is described.

[0080] With the reference to the top plan view of FIG. 6, the adhesive and the metal plate **127** are placed so as not to overlap the pixel portion **121**. In the region where the external input terminal **122** is formed so as to attach the FPC **200** thereto, the side face of the first substrate **100** and the side face of the second substrate **101** are separate from each other by 5 to 20 mm. Therefore, the adhesive and the metal plate **127** are provided in the periphery of the region where the end of the first substrate **100** and the end of the second substrate **101** overlap with each other except the above-mentioned region.

[0081] In Embodiment Mode 2, the metal plate **127** is formed to have a U-shape. The metal plate **127** is intentionally omitted on the pixel portion **121**, which occupies a dominant area on the external front face of the display device, and the back face of the pixel portion **121**. The reason for this is as follows. When the display device is made to be thinner, the strength of the first substrate **100** and the second substrate **101** is correspondingly lowered. In order to prevent the cracking from being generated in the first substrate **100** and the second substrate **101** by a sudden change in the temperature of the environment where the display device is used due to the difference in thermal expansion coefficient of the metal plate **127**, the first substrate **100** and the second substrate **101**, the overlapping area of the first substrate, the second substrate and the metal substrate is limited.

[0082] According to Embodiment Mode 2, a first adhesive **125** for bonding the first substrate **100** and the second substrate **101** to each other and a second adhesive **126** provided between the U-shaped metal plate **127** and the side face of the display device are provided in contact with each other. As a result, the water vapor contained in the outside air is prevented from passing through the side face of the display device to enter the sealed region. Thus, water can be prevented from entering the organic light-emitting element placed in the pixel portion **121**, in a low-cost and simple manner.

[0083] In Embodiment Mode 2, it is also possible to fill the second adhesive **126** placed between the metal plate **127** and the side face of the display device with a desiccant.

[0084] (Embodiment Mode 3)

[0085] Embodiment Mode 3 will be described with reference to a cross-sectional view of FIG. 3. FIG. 3 is a cross-sectional view showing an active-matrix organic light-emitting element according to Embodiment Mode 3. The differences from Embodiment Mode 1 will be described.

[0086] The thicknesses and the materials of the base films, the semiconductor film, the gate insulating film, the gate electrodes, and the first interlayer insulating film are the same as those in Embodiment Mode 1.

[0087] In Embodiment Mode 3, the second interlayer insulating film **115** formed of an organic resin film is thermally cured at 200 to 300° C. A resist is formed on the upper face of the second interlayer insulating film **115**, and is then etched by using a reactive gas. After formation of a contact hole reaching the semiconductor film **110**, the resist is removed. The surface of the second interlayer insulating film **115** is treated with a plasma using argon or nitrogen as a reactive gas. The reactive gas causes the molecular dissociation by plasma discharge decomposition to generate excited molecules, radicals and ions to be reacted with the second interlayer insulating film **115**. As a result, the quality of the surface of the second interlayer insulating film **115** is improved to refine its surface. As the second interlayer insulating film **115**, any one of an acrylic resin film, a polyimide resin film, and a polyamide resin film may be used. In this embodiment mode, an acrylic resin film is used.

[0088] The first electrode **103** is provided on the second interlayer insulating film **115** as a cathode of the organic light-emitting element. The cathode may be made of a known material such as MgAg or AlLi to have a thickness of 100 nm to 200 nm. Since the surface of the second interlayer insulating film **115** is refined, an impurity contained in the second interlayer insulating film **115** is prevented from being diffused to the first electrode **103** serving as the cathode of the organic light-emitting element.

[0089] Next, the drain electrode **116** is formed to have a thickness of 400 nm so as to overlap the end of the first electrode **103**. The source electrode **117**, the conductor film **123** and the wirings **122** and **124** are formed of the same layer as the drain electrode **116**. Next, an insulating film made of an organic material is formed to have a thickness of 1 to 10 μm , and is patterned to form the first insulating film **107** and the second insulating film **108**. In this embodiment mode, a photosensitive acrylic resin film having a thickness of 3 μm is used as the insulating film. The first insulating film **107** made of an organic resin is provided in a striped manner as a bank so as to cover the end of the first electrode **103**. The second insulating film **108** is provided in the peripheral area of the first substrate **100**. The first insulating film **107** and the second insulating film **108** are treated with a plasma, using argon or nitrogen as a reactive gas, thereby forming a fine and hard film on the surface of each insulating film.

[0090] Next, the organic compound film **104** is provided on the first electrode **103**. A known material may be used for the organic compound film **104**. Next, the second electrode **105** formed of a transparent conductive film is provided on

the organic compound film **104** as an anode. An ITO film may be used for the anode. The deposition of the first electrode, the organic compound film and the second electrode completes the organic light-emitting element **106**.

[0091] Then, a DLC film having a thickness of 100 nm is provided as the protective film **109** so as to cover the second electrode, the first insulating film and the second insulating film of the organic light-emitting element **106**.

[0092] Moreover, a gap between the first substrate **100** and the second substrate **101** is filled with a first adhesive **129**, whereby water and oxygen contained in the outside air can be prevented from entering the organic light-emitting element **106** through the side faces of the display device. Since the first adhesive **129** used in this embodiment mode is also provided above the organic light-emitting element **106**, it is necessary to sufficiently conduct the degassing and dehydration under vacuum. The first adhesive **129** is provided above the first substrate **100**, and the second substrate **101** is provided so as to be opposed to the first substrate **100**. Then, the stress is applied under vacuum so as to press the two substrates **100** and **101** against one another, thereby curing the first adhesive **129**. In the step of forming the layers from the base films to the protective film, even if the thickness of the laminate film in the driving circuit portion, the pixel portion and the peripheral area of the first substrate **100** slightly differs, the difference in thickness is absorbed by the adhesive **129** by providing the adhesive **129** on the laminate film.

[0093] Since the first adhesive **129** used in this embodiment mode is provided even above the organic light-emitting element, it is necessary to sufficiently conduct the degassing and dehydration under vacuum. A desiccant **128** in a granular form is dispersed in the first adhesive **129**. The finely ground desiccant, i.e., having a diameter of 1.0 μm or less, preferably, 0.2 μm or less, more preferably, 0.1 μm or less, is used so as not to generate the unevenness in the gap between the first substrate **100** and the second substrate **101**. As the desiccant **128**, calcium oxide, barium oxide or the like may be used. Since the desiccant **128** is provided in the proximity of the organic light-emitting element **106**, the concentration of water in the vicinity of the organic light-emitting element can be lowered to prolong the lifetime of the display device.

[0094] In the case where light emitted from the organic light-emitting element **106** is to be obtained from the side of the sealing substrate (second substrate) **101**, it is preferred to use barium oxide, which has a higher transparence than that of calcium oxide.

[0095] Next, in the same manner as Embodiment Mode 2, a second adhesive **130** is provided between the U-shaped metal plate **127** and the side faces of the display device so as to prevent water from passing through the side faces of the display device. This embodiment mode differs from Embodiment Mode 2 in that the desiccant **128** is also dispersed in the second adhesive **130**. Before entering the sealed region between the element substrate and the sealing substrate, water contained in the outside air is captured by the hygroscopic desiccant **128** dispersed in the second adhesive **130**. As a result, the lifetime of the display device can be intended to be prolonged. For example, dark spots due to the reaction between the cathode of the organic light-emitting element and water can be prevented from being generated.

[0096] In this embodiment mode, since a fine film is formed on the second insulating film **108**, water passing through the protective film **109** can be prevented from further passing through the side faces of the second insulating film **108** to enter the organic light-emitting element.

[0097] In Embodiment Mode 3, since the anode formed of a transparent conductive film is on the side of the second substrate **101** whereas the cathode having light reflectance is on the side of the first substrate **100**, light emitted from the organic light-emitting element **106** can be output from the side of the second substrate **101** made of glass. The light emitted from the organic light-emitting element **106** is externally obtained from second substrate **101** through the adhesive. Therefore, the obtained light appears as interference fringes if the gap between the first substrate and the second substrate in the pixel portion is not uniform. If the distance between the substrates in the pixel portion differs from that in the peripheral area of the first substrate, the distance between the substrates gradually varies from the peripheral area to the pixel portion to generate the interference fringes in the pixel portion. Thus, in order to uniform the distance between the substrates in the pixel portion, it is necessary to equalize the distance between the substrates in the peripheral area of the first substrate with that in the pixel portion. According to the present invention, even if the total thickness of the laminate layer on the first substrate **100** slightly varies in the pixel portion, the driving circuit portion, and the peripheral area of the first substrate, the variation in thickness of the laminate film is absorbed by the first adhesive. As a result, the distance between the first substrate and the second substrate can be made uniform throughout the peripheral area of the first substrate, the driving circuit portion, and the pixel portion.

[0098] (Embodiment Mode 4)

[0099] Embodiment Mode 4 will be described with reference to a cross-sectional view of FIG. 4. FIG. 4 is a cross-sectional view showing an active matrix organic light-emitting element according to Embodiment Mode 4.

[0100] The thicknesses and the materials of the base films, the semiconductor film, the gate insulating film, the gate electrodes, the first interlayer insulating film, and the second interlayer insulating film are the same as those in Embodiment Mode 1.

[0101] The drain electrode **116** is formed so as to overlap the end of the first electrode **103**. Then, a photosensitive polyimide resin film having a thickness of 2.0 μm is formed and patterned into the first insulating film **107** and the second insulating film **108**. The first insulating film **107** made of an organic resin is provided in a striped manner as a bank so as to cover the end of the first electrode **103**. The second insulating film **108** is provided in the peripheral area of the first substrate **100**.

[0102] Next, a photosensitive organic resin film is formed to have a thickness of 0.1 to 10 μm . Then, the photosensitive organic resin film is patterned and cured at 200 to 300° C. to form a convex-shaped third insulating film **134** as a spacer on the upper surface of the bank (first insulating film). A polyimide resin film or an acrylic resin film can be used as the photosensitive organic resin film; in this embodiment mode, an acrylic resin film is used. In this embodiment mode, spacers are also formed on the upper face of the

second insulating film **108**, for example, in the driving circuit portion **120** and the peripheral area of the first substrate **100**. The spacer provided in the peripheral area of the first substrate **100** is formed to have a closed curve form.

[0103] Next, the organic compound film **104** is provided on the first electrode **103**. A known material may be used for the organic compound film **104**. Next, the second electrode **105** formed of a transparent conductive film is provided on the organic compound film **104** as an anode. An ITO film may be used for the anode.

[0104] Then, the protective film **109** formed of a DLC film having a thickness of 80 nm is provided so as to cover the anode, the bank, the second insulating film, and the spacers of the organic light-emitting element. The protective film **109**, which serves to prevent water from entering inside, is formed on the side faces of the spacer. Thus, if a plurality of spacers having a closed curve form are provided in the peripheral area of the first substrate **100**, water passing through the side faces of the display device is blocked for a plurality of times by the protective film **109** provided on the side faces of the spacers. As a result, the amount of water entering the display device through its side faces can be reduced.

[0105] Next, the adhesive **102** is provided in the peripheral area of the first substrate **100**. A gap between the spacer having a closed curve form provided in the peripheral area of the first substrate **100** and another spacer having a closed curve form provided inside the aforementioned spacer is filled with the adhesive **102**. The second substrate **101** made of glass, which is used as the sealing substrate, is bonded to the element substrate **100** through the adhesive **102**.

[0106] In this embodiment mode, since the anode formed of a transparent conductive film is on the side of the second substrate **101** whereas the cathode having light reflectance is on the side of the first substrate **100**, light emitted from the organic light-emitting element can be output from the side of the second substrate **101** made of glass. When the light emitted from the organic light-emitting element is output from the side of the second substrate **101**, the obtained light appears as interference fringes to degrade the display quality if the gap between the first substrate and the second substrate in the pixel portion is not uniform. With the spacers being placed in the pixel portion, the driving circuit portion and the peripheral area as described in this embodiment mode, the uniformity of the gap between the first substrate and the second substrate is improved to enable the manufacturing of a display device with good display quality.

[0107] FIG. 7 is a top plan view of this embodiment mode. FIG. 7 shows the arrangement of convex-shaped third insulating films **131** serving as spacers in this embodiment mode. On the first insulating film **107** in the pixel portion **121**, the spacers having a circular cross section are placed at equal intervals in the horizontal and vertical directions of the pixel portion **121**. The spacers having a circular cross section are placed at equal intervals on the second insulating film **108** situated above the first gate wiring side driving circuit portion **120a**, the second gate wiring side driving circuit portion **120b** and the source wiring side driving circuit **120c**. In the peripheral area of the first substrate **100**, the spacers **131** are placed in a closed curve form on the second insulating film **108**. In FIG. 7, the spacers **131** having a closed curve form are formed in a double line.

However, the spacers **131** can be formed in a triple or quadruple line; it can be appropriately designed by the designer.

[0108] Although not shown, the surface of the sealing substrate or the element substrate may be scraped off by using a sandblast method to form a convex portion where the desiccant is to be placed. It is also possible to place an adhesive in the convex portion so as to fix the desiccant thereto. In this way, the desiccant is fixed through the adhesive to prevent the desiccant from moving.

[0109] (Embodiment Mode 5)

[0110] Embodiment Mode 5 will be described with reference to a cross-sectional view of FIG. 5. FIG. 5 is a cross-sectional view showing an active matrix organic light-emitting element of Embodiment Mode 5.

[0111] In Embodiment Mode 5, the gate insulating film **111**, the first interlayer insulating film **114**, the second interlayer insulating film **115** and the insulating films are etched to form an opening. It is preferred to set a depth of the opening to 3 to 15 μm . After formation of the protective film **109** as the uppermost layer of the first substrate **100**, the second adhesive **132**, in which the desiccant **128** is dispersed, is provided in the opening covered with the protective film **109**. As the desiccant **128**, calcium oxide or barium oxide can be used; in this embodiment mode, barium oxide is used. A syringe is filled with the second adhesive **132**, in which the granular desiccant **128** having a diameter of 0.3 to 1.0 μm is dispersed, by a known dispenser system. A gas pressure of a predetermined value is applied onto the upper end of the syringe so that the adhesive **132** and the desiccant **128** are ejected through a narrow nozzle on the lower end of the syringe toward the opening. The second adhesive **132** are fully subjected to degassing and dehydration before use.

[0112] Next, the first adhesive **131** is applied onto the peripheral area of the first substrate **100** by a known dispenser system, so that the first substrate **100** and the second substrate **101** are bonded to each other under dry air. As dry air, nitrogen or argon, which is an inert gas, is used.

[0113] In this embodiment mode, the insulating films such as the second interlayer insulating film and the second insulating film are patterned to provide a region where the desiccant is to be placed. Since water passing from the side faces of the display device through the adhesive is captured by the hygroscopic desiccant **128** before reaching the organic light-emitting element, it is possible to prevent the generation of dark spots due to the reaction between water and the cathode of the organic light-emitting element and the peeling of the cathode and the organic compound film.

[0114] In this embodiment mode, the insulating film formed of a photosensitive organic resin film is patterned to simultaneously form the first insulating film (bank) **107**, the second insulating film **108** provided in the peripheral area of the first substrate **100**, and a third insulating film **133** branching off from the second insulating film **108**.

[0115] FIG. 8 is a top plan view of Embodiment Mode 5. The insulating film formed of a photosensitive organic resin film is patterned to form the first insulating film **107**, the second insulating film **108**, and the third insulating film **133**. The first insulating film **107** is formed in a striped manner in the pixel portion **121** on the first substrate **100**. In the

peripheral area of the first substrate **100**, the second insulating film **108** is formed in a closed curve form so as to cover the first gate wiring side driving circuit portion **120a**, the second gate wiring side driving circuit portion **120b**, and the source wiring side driving circuit portion **120c**. The third insulating film **133** branches off from the second insulating film **108**. The desiccant **128** is provided in the gap between the third insulating film **133** and the second insulating film **108**. Since the desiccant **128** is fixed through the adhesive, the desiccant **128** can be prevented from moving. The cross-sections cut along the chain lines D-D, E-E' and F-F' in the top plan view of **FIG. 8** are shown in **FIG. 5**. The same elements as those in **FIG. 5** are designated by the same reference numerals in **FIG. 8**.

[0116] Embodiments

[0117] (Embodiment 1)

[0118] The present invention is applicable to any display devices using the organic light emitting element. **FIG. 10** shows an example of such display devices, illustrating an active-matrix display device manufactured by using TFTs. The TFTs in Embodiments are sometimes classified into amorphous silicon TFTs and polysilicon TFTs, depending on the material of a semiconductor film forming a channel formation region. The present invention is applicable to either of them if the channel formation region has a sufficiently high mobility.

[0119] An n-channel type TFT **431** and a p-channel type TFT **432** are formed in a driving circuit portion **437**. A TFT **433** for switching, a TFT **434** for reset, a TFT **436** for current control and a storage capacitor **435** are formed in a pixel portion **438**.

[0120] As a substrate **401**, a substrate made of glass such as quartz, barium borosilicate glass as is represented by #7059 glass and #1737 glass manufactured by Corning Inc., or alumino borosilicate glass, is used.

[0121] Next, a base film **402** formed of a silicon oxide film, a silicon nitride film or a silicon nitride oxide film is provided. For example, a silicon nitride oxide film **402a** made of SiH_4 , NH_3 and N_2O is formed to have a thickness of 10 to 200 nm (preferably, 50 to 100 nm) by a plasma CVD method. In the same manner, a silicon nitride oxide film **402b** made of SiH_4 and N_2O is deposited thereon to have a thickness of 50 to 200 nm (preferably, 100 to 150 nm). Although the base film **402** is shown as a double-layered structure, the base film **402** may be formed as a single-layer film of the above-described insulating film or a multi-layered structure including two or more layers.

[0122] Next, island-like semiconductor layers **403** to **407**, a gate insulating film **408**, and gate electrodes **409** to **412** are formed. Each of the island-like semiconductor layers **403** to **407** has a thickness of 10 to 150 nm, the gate insulating film has a thickness of 50 to 200 nm, and each of the gate electrodes has a thickness of 50 to 800 nm.

[0123] Next, an interlayer insulating film **413** consisting of an insulating film made of an inorganic material such as silicon nitride or silicon nitride oxide and an insulating film made of an organic material such as acrylic or polyimide is formed. A thickness of the interlayer insulating film **413** may be set to 1 to 3 μm . The insulating film made of an organic material is desired to have a sufficient thickness to level the

unevenness produced due to the island-like semiconductor films **403** to **407** and the gate electrode **409** to **412**.

[0124] Next, a cathode **423** of the organic light-emitting element is formed. For the cathode **423**, a material such as MgAg or LiF may be used. A thickness of the cathode **423** may be set to 100 to 200 nm.

[0125] Subsequently, a conductive film containing aluminum as a main component is formed to have a thickness of 1 to 5 μm and then is etched. As a result, a data wiring **418**, a drain side wiring **419**, a power supply wiring **420** and a drain side electrode **421** are formed in the pixel portion. The data wiring **418** is connected to the source side of the TFT **433** for switching while, although not shown, the drain side wiring **419** connected to the drain side of the TFT **433** for switching is connected to the gate electrode **411** of the TFT **436** for current control. The source side of the TFT **436** for current control is connected with the power supply wiring **420**. The drain side electrode **421** is provided so as to connect the drain side of the TFT **436** for current control with the cathode **423**. In the driving circuit portion **437**, the wirings **414** and **416** are connected to the island-like semiconductor film **403** of the n-channel type TFT **431**, whereas the wirings **415** and **417** are connected to the island-like semiconductor film **404** of the p-channel type TFT **432**.

[0126] Next, a photosensitive acrylic resin film is formed to have a thickness of 1 to 10 μm , and then is etched. As a result, a bank formed of the first insulating film is formed in the pixel portion **438** so as to cover the wirings **414** to **417**. The bank is formed so as to cover the end of the cathode **423**, thereby preventing the cathode **423** and the anode **425** from short-circuiting in this portion. A second insulating film **429** is formed in the driving circuit portion **437** and the peripheral area of the substrate **401**.

[0127] Then, an organic resin film such as an acrylic resin film is patterned to form a column-like spacer **430** at a desired position for maintaining the distance between the substrates. In this embodiment, a column-like spacer having a height of 1 μm is provided in the pixel portion **438**.

[0128] Next, an organic compound film **424** of the organic light-emitting element is formed. The organic compound film **424** is formed to have a single-layered or a multi-layered structure; a higher luminous efficiency can be obtained with a multi-layered structure. Generally, the organic compound film **424** is deposited on the anode **425** in the order of: hole injection layer/hole transport layer/light emitting layer/electron transport layer. However, the organic compound film **424** may have a structure of: hole transport layer/light emitting layer/electron transport layer; or hole injection layer/hole transport layer/light emitting layer/electron transport layer/electron injection layer. In the present invention, any conventional structures may be used.

[0129] In Embodiment 1, color display is performed by vapor-deposition of three light emitting layers corresponding to RGB. As specific examples of light emitting layers, the following may be used as the respective layers: as a layer emitting red light, cyanopolyphenylene; as a layer emitting green light, polyphenylene vinylene; and as a layer emitting blue light, polyphenylene vinylene or polyalkylphenylene. A thickness of the light emitting layer may be set to 30 to 150 nm. The above examples are merely some examples of the organic compounds that can be used as the light emitting layers, and thus the organic compounds are not limited thereto.

[0130] The organic compound film described in Embodiment 1 has a laminate structure including a light emitting layer and a hole injection layer made of PEDOT (polythiophen) or PAni (polyaniline).

[0131] Next, the anode 425 made of ITO (Indium Tin Oxide) is formed. In the above-described manner, the organic light-emitting element including the cathode made of a material such as MgAg or LiF, the organic compound film formed by the laminate of the light emitting layer and the hole transport layer, and the anode made of ITO is provided. By using a transparent electrode as the anode, light can be emitted in the direction indicated by the arrow in FIG. 10.

[0132] A DLC film 439 is formed on the entire surface area of the first substrate 401 so as to prevent water vapor or oxygen from passing through the sealed portion to deteriorate the organic light-emitting element. The DLC film 439 is formed on the entire surface except the external input terminal. When the DLC film is to be formed, the external input terminal may be covered with a masking tape or a shadow mask in advance.

[0133] An adhesive is applied onto the second insulating film 429, so that the second substrate having light transmittance is bonded to the first substrate under vacuum. Since the thickness of the adhesive is determined by the height of the column-like spacer 430 provided in the pixel portion, the distance between the substrate and the sealing substrate is adjusted so as to be uniform from the pixel portion to the peripheral area of the substrate.

[0134] FIG. 9 is a top plan view of the pixel portion shown in the cross-sectional view of FIG. 10. The same elements as those in FIG. 10 are designated by the same reference numerals in FIG. 9. The cross-sections corresponding to the chain lines G-G' and H-H' in FIG. 9 are shown in FIG. 10. A bank is provided outside the region surrounded by a dot line. Within the region surrounded by the dot line, light emitting layers which emit light of colors corresponding to RGB pixels and an anode are provided. The layout of the pixel portion shown in the top plan view of FIG. 9 is applicable to that of the pixel portion of the display device in Embodiment Mode 4. Moreover, the layout of the pixel portion shown in the top plan view of FIG. 9, from which the column-like spacer is omitted, is applicable to that of the pixel portion of the display device in Embodiment Modes 1 to 4.

[0135] FIG. 11 illustrates an equivalent circuit of such a pixel portion, in which the same elements as those in FIG. 10 are designated by the same reference numerals. The TFT 433 for switching has a multi-gate structure. An LDD overlapping with the gate electrode is provided for the TFT 436 for current control. The TFT using polysilicon demonstrates high operation speed. Accordingly, the deterioration such as hot carrier injection is likely to occur for such a TFT. For this reason, it is very effective to form TFTs having different structures (the TFT for switching having a sufficiently low OFF current and the TFT for current control having resistance against hot carrier injection) depending on their functions in the pixel so as to manufacture the display device with high reliability, capable of performing good image display (having high operation performance).

[0136] Even after the TFT 433 for switching in a conductive state is switched to be in a non-conductive state, it is

effective to provide a storage capacitor (condenser) 435 so as to obtain the display with high brightness by holding the TFT 436 for current control in a conductive state to maintain the light emitted from the organic light-emitting element.

[0137] Furthermore, in a time-division gray-scale system in which gray-scale display is performed by varying the time period of light emission of the organic light-emitting element 426, the TFT 434 for reset is brought into a conductive state so as to switch the organic light-emitting element from a light emission state to a non-light emission state, thereby controlling the time period of light emission of the organic light-emitting element 426.

[0138] In Embodiment 1, it is possible to disperse a granular desiccant having a diameter of 0.2 to 0.5 μm in the adhesive. As a result, the amount of water entering the display device through its side faces can be reduced.

[0139] (Embodiment 2)

[0140] In Embodiment 2, mother substrates (mother glasses), the area of each mother substrate corresponding to the total area of a plurality of unit panels, are bonded to each other. When the mother substrates are cut into individual panels, a CO₂ laser is used as cutting means.

[0141] A CO₂ laser employs carbon dioxide as a reactive medium, and is operated by exciting carbon dioxide to be in an inverted population state. Since the CO₂ laser generates light having a wavelength in an infrared region (10.6 μm), the object irradiated with laser light can be heated.

[0142] A method of cutting a glass substrate using a CO₂ laser will be described with reference to a perspective view of FIG. 14. FIG. 14 is a perspective view showing a method of cutting a glass substrate 501 irradiated with laser, of the glass substrates 501 and 502 that are bonded to each other. An ellipsoidal laser beam spot 503 is radiated onto the glass substrate 501 moving in the direction indicated by the arrow by an optical system 504 for performing laser radiation. A refrigerant is sprayed by a nozzle 507 onto the site (cooled site 506) in the rear of the beam spot 503. In this way, the site heated by the laser radiation is subsequently cooled in a quick manner to generate a thermal strain in the glass substrate 501. As a result, the glass substrate 501 is cut along a laser radiation line 505.

[0143] As an apparatus for cutting a glass substrate with a CO₂ laser, a laser scribe manufactured by Mitsubishi Diamond Industrial Co. Ltd. can be used. Two mother substrates may be simultaneously cut, or may be cut one by one. It is preferred to cut two mother substrates at a time because the tact of the manufacturing steps is improved to increase the productivity.

[0144] By radiating a CO₂ laser onto the surface of the glass substrate, the generation of waste by cutting the glass substrate can be restrained to prevent defects from occurring. Moreover, since a method of cutting the substrates with a CO₂ laser employs both the laser radiation and the spray of a cooling medium, the impact on the substrate is small. As a result, even with a thin mother substrate, it is possible to cut the glass substrate at a high yield.

[0145] (Embodiment 3)

[0146] A light-emitting device formed by implementing the present invention can be incorporated to various electric-

equipment, and a pixel portion is used as an image display portion. Given as such electronic equipment of the present invention are cellular phones, PDAs, electronic books, video cameras, lap-top computers, and image play back devices with the recording medium, for example, DVD (digital versatile disc), digital cameras, and the like. Specific examples of those are shown in **FIGS. 12A to 13C**.

[0147] **FIG. 12A** shows a cellular phone, which is composed of a display panel **9001**, an operation panel **9002**, and a connecting portion **9003**. The display panel **9001** is provided with a display device **9004**, an audio output portion **9005**, an antenna **9009**, etc. The operation panel **9002** is provided with operation keys **9006**, a power supply switch **9007**, an audio input portion **9008**, etc. The present invention is applicable to the display device **9004**.

[0148] **FIG. 12B** shows a mobile computer, or a portable information terminal, which is composed of a main body **9201**, a camera portion **9202**, an image receiving portion **9203**, operation switches **9204**, and a display device **9205**. The present invention can be applied to the display device **9205**. In such electronic devices, the display device of 3 to 5 inches is employed, however, by employing the display device of the present invention, the reduction of the weight in the portable information terminal can be attained.

[0149] **FIG. 12C** shows a portable book, which is composed of a main body **9301**, display devices **9302 to 9303**, and a memory medium **9304**, an operation switch **9305**, and an antenna **9306**, and which displays the data recorded in MD or DVD and the data received by the antenna. The present invention can be applied to the display devices **9302 to 9303**. In the portable book, the display device of the 4 to 12 inches is employed. However, by employing the display device of the present invention, the reduction of the weight and thickness in the portable book can be attained.

[0150] **FIG. 12D** shows a video camera, which is composed of a main body **9401**, a display device **9402**, an audio input portion **9403**, operation switches **9404**, a battery **9405**, an image receiving portion **9406**, and the like. The present invention can be applied to the display device **9402**.

[0151] **FIG. 13A** shows a personal computer, which is composed of a main body **9601**, an image input portion **9602**, a display device **9603**, and a key board **9604**. The present invention can be applied to the display device **9603**.

[0152] **FIG. 13B** shows a player employing a recording medium with programs recorded thereon (hereinafter referred to as recording medium), which is composed of a main body **9701**, a display device **9702**, a speaker portion **9703**, a recording medium **9704**, and an operation switch **9705**. The device employs DVD (digital versatile disc), CD, etc. as the recording medium so that music can be listened, movies can be seen and games and Internet can be done. The present invention can be applied to the display device **9702**.

[0153] **FIG. 13C** shows a digital camera, which is composed of a main body **9801**, a display device **9802**, an eyepiece portion **9803**, an operation switch **9804**, and an image receiving portion (not shown). The present invention can be applied to the display device **9802**.

[0154] The display device of the present invention is employed in the cellular phones in **FIG. 12A**, the mobile computer or the portable information terminal in **FIG. 12B**,

the portable book in **FIG. 12C**, and the personal computer in **FIG. 13A**. The display device can reduce the power consumption of the above device by displaying the black background in a standby mode.

[0155] In the operation of the cellular phone shown in **FIG. 12A**, luminance is lowered when the operation keys are used, and the luminance is raised after usage of the operation switch, whereby the low power consumption can be realized. Further, the luminance of the display device is raised at the receipt of a call, and the luminance is lowered during a call, whereby the low power consumption can be realized. Besides, in the case where the cellular phone is continuously used, the cellular phone is provided with a function of turning off a display by time control without resetting, whereby the low power consumption can be realized. Note that the above operations may be conducted by manual control.

[0156] The present invention can be applied to the display device which is employed in a navigation system, a refrigerator, a washing machine, a micro-wave oven, a telephone, a fax machine, etc. As described above, the applicable range of the present invention is so wide that the present invention can be applied to various products.

[0157] According to the present invention, since the element substrate and the sealing substrate can be provided in the proximity, the amount of water entering the display device through its side face can be reduced.

[0158] On the first substrate having the light-emitting element provided thereon, the total thicknesses of the layers deposited in the peripheral area of the first substrate, the pixel portion and the driving circuit portion are equalized with each other. Then, the adhesive is provided as thin as possible in the peripheral area of the first substrate so as to bond a second substrate to the first substrate. As a result, the distance between the first substrate and the second substrate can be made uniform throughout the peripheral area of the first substrate, the pixel portion and the driving circuit portion. More desirably, if the thickness of the laminate film deposited in the peripheral area of the first substrate is reduced by the thickness of the adhesive provided in the peripheral area of the first substrate, the distance between the first substrate and the second substrate can be made uniform throughout the peripheral area of the first substrate, the pixel portion and the driving circuit portion. To achieve this uniformity, it is recommended that among the layers deposited in the pixel portion, at least the second interlayer insulating film having a dominant thickness and the second insulating film formed of the same layer as the bank are formed below the adhesive.

[0159] Moreover, since the protective film for the organic light-emitting element is also provided on the side faces of the laminate film in the peripheral area of the first substrate, water can be prevented from entering the display device through its side faces.

What is claimed is:

1. A display device comprising:

a first electrode formed over a first substrate;

a first insulating film formed so as to cover an end of the first electrode;

- a light-emitting organic compound film over the first electrode and in contact with a side face of the first insulating film;
 - a second electrode formed over the light-emitting organic compound film;
 - a second insulating film formed over a periphery of the first substrate;
 - an adhesive layer formed on the second insulating film;
 - a second substrate in contact with the adhesive layer; and
 - a light-emitting element comprising the light-emitting organic compound film interposed between the first electrode and the second electrode,
- wherein the first insulating film and the second insulating film comprise a same material.
- 2.** A display device comprising:
- a first electrode formed over a first substrate;
 - a first insulating film formed so as to cover an end of the first electrode;
 - a light-emitting organic compound film over the first electrode and in contact with a side face of the first insulating film;
 - a second electrode formed over the light-emitting organic compound film;
 - a second insulating film formed over a periphery of the first substrate; and
 - a second substrate provided so as to overlap the first insulating film and the second insulating film; and
 - a light-emitting element comprising the light-emitting organic compound film interposed between the first electrode and the second electrode,
- wherein the first insulating film and the second insulating film comprise a same material, and
- wherein a gap between the first substrate and the second substrate is filled with an adhesive layer.
- 3.** A display device according to claim 1, wherein the second insulating film has a width of 100 to 5000 μm .
- 4.** A display device according to claim 2, wherein the second insulating film has a width of 100 to 5000 μm .
- 5.** A display device according to claim 1, wherein a protection layer covering the second electrode, the first insulating film and the second insulating film is provided.
- 6.** A display device according to claim 2, wherein a protection layer covering the second electrode, the first insulating film and the second insulating film is provided.
- 7.** A display device according to claim 5, wherein the first substrate and the second substrate comprise glass.
- 8.** A display device according to claim 6, wherein the first substrate and the second substrate comprise glass.
- 9.** A display device according to claim 1, wherein a gap between the first substrate and the second substrate is filled with an inactive gas or a nitrogen gas.
- 10.** A display device according to claim 2, wherein a gap between the first substrate and the second substrate is filled with an inactive gas or a nitrogen gas.
- 11.** A display device according to claim 1, wherein the adhesive layer has a thickness of 0.05 to 0.5 μm .
- 12.** A display device according to claim 2, wherein the adhesive layer has a thickness of 0.05 to 0.5 μm .
- 13.** A display device according to claim 1, wherein the first insulating film has a thickness of 1.0 to 10 μm .
- 14.** A display device according to claim 2, wherein the first insulating film has a thickness of 1.0 to 10 μm .
- 15.** A display device according to claim 1, wherein the second insulating film has a thickness of 1.0 to 10 μm .
- 16.** A display device according to claim 2, wherein the second insulating film has a thickness of 1.0 to 10 μm .
- 17.** A display device according to claim 1, wherein the first insulating film comprises any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.
- 18.** A display device according to claim 2, wherein the first insulating film comprises any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.
- 19.** A display device comprising:
- a first electrode formed over a first substrate;
 - a first insulating film formed so as to cover an end of the first electrode; and
 - a second insulating film provided in a convex manner on an upper face of the first insulating film,
 - a light-emitting element comprising a light-emitting organic compound film interposed between the first electrode and a second electrode.
- 20.** A display device comprising:
- a first electrode formed over a first substrate;
 - a first insulating film formed so as to cover an end of the first electrode;
 - a light-emitting organic compound film over the first electrode and in contact with the first insulating film;
 - a second electrode formed over the light-emitting organic compound film;
 - a second insulating film formed over a periphery of the first substrate;
 - a third insulating film provided in a convex manner on an upper face of the first insulating film;
 - an adhesive layer formed over the second insulating film; and
 - a second substrate in contact with the adhesive layer,
 - a light-emitting element comprising the light-emitting organic compound film interposed between the first electrode and the second electrode.
- 21.** A display device according to claim 20, wherein the first insulating film and the second insulating film comprise a same material.
- 22.** A display device according to claim 20, wherein the second insulating film has a width of 100 to 5000 μm .
- 23.** A display device according to claim 20, wherein a protection layer covering the second electrode, the first insulating film, the second insulating film and the third insulating film is provided.
- 24.** A display device according to claim 23, wherein the protective layer is in contact with an external input terminal.
- 25.** A display device according to claim 23, wherein the first substrate and the second substrate comprise glass.

26. A display device according to claim 20, wherein a gap between the first substrate and the second substrate is filled with an inert gas or a nitrogen gas.

27. A display device according to claim 20, wherein the adhesive layer has a thickness of 0.05 to 0.5 μm .

28. A display device according to claim 20, wherein the first insulating film has a thickness of 1.0 to 10 μm .

29. A display device according to claim 20, wherein the second insulating film has a thickness of 1.0 to 10 μm .

30. A display device according to claim 20, wherein the third insulating film has a thickness of 0.2 to 10 μm .

31. A display device according to claim 19, wherein the second insulating film comprises any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

32. A display device according to claim 20, wherein the second insulating film comprises any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

33. A display device comprising:

- a first electrode over a first substrate;

- a first insulating film provided so as to cover an end of the first electrode;

- a light-emitting organic compound film over the first electrode and in contact with a side face of the first insulating film;

- a second electrode over the light-emitting organic compound film;

- a light-emitting element comprising the light-emitting organic compound film interposed between the first electrode and second electrode;

- a second insulating provided in a periphery of the first substrate;

- a third insulating film provided along the second insulating film and interposed between the first insulating film and the second insulating film;

- a desiccant provided in a gap between the second insulating film and the third insulating film.

34. A display device according to claim 33, further comprising an adhesive layer above the second insulating film, wherein the adhesive layer is in contact with the second substrate.

35. A display device according to claim 33, wherein the first insulating film, the second insulating film and the third insulating film comprise the same material.

36. A display device according to claim 33, wherein the second insulating film has a width of 200 to 5000 μm .

37. A display device according to claim 33, wherein a protection layer covering the second electrode, the first insulating film, the second insulating film and the third insulating film is provided.

38. A display device according to claim 37, wherein the first substrate and the second substrate comprise glass.

39. A display device according to claim 38, wherein a gap between the first substrate and the second substrate is filled with an inert gas or a nitrogen gas.

40. A display device according to claim 33, wherein the adhesive layer has a thickness of 0.05 to 0.5 μm .

41. A display device according to claim 33, wherein the second insulating film comprises any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

42. A method of manufacturing a display device including an organic light-emitting element formed of an organic compound film sandwiched between a first electrode and a second electrode, comprising the steps of:

- selectively forming the first electrode on a first substrate;

- forming an insulating film;

- patterning the insulating film to form a first insulating film covering an end of the first electrode and a second insulating film provided in a periphery of the first substrate;

- forming an organic compound film on the first electrode;

- forming the second electrode on the organic compound film;

- providing an adhesive layer on the second insulating film; and

- bonding the first substrate and the second substrate to each other.

43. A method of manufacturing a display device including an organic light-emitting element formed of an organic compound film sandwiched between a first electrode and a second electrode, comprising the steps of:

- selectively forming the first electrode on a first substrate;

- forming an insulating film;

- patterning the insulating film to form a first insulating film covering an end of the first electrode and a second insulating film provided in a periphery area of the first substrate;

- forming an organic compound film on the first electrode;

- forming the second electrode on the organic compound film;

- providing an adhesive layer which covers the first insulating film, the second insulating film and the second electrode; and

- bonding the first substrate and the second substrate to each other.

44. A method of manufacturing a display device including an organic light-emitting element formed of an organic compound film sandwiched between a first electrode and a second electrode, comprising the steps of:

- selectively forming the first electrode on a first substrate;

- forming an insulating film;

- patterning the insulating film to form a first insulating film covering an end of the first electrode and a second insulating film provided in a periphery of the first substrate;

- forming an insulating film;

- patterning the insulating film formed in the fourth step to provide a convex-shaped third insulating film at least on an upper face of the first insulating film;

- forming an organic compound film on the first electrode so as to be in contact with a side face of the first insulating film;

- forming the second electrode on the organic compound film;

forming an adhesive layer on the second insulating film; and

bonding the first substrate and the second substrate to each other.

45. A method of manufacturing a display device including an organic light emitting element formed of an organic compound film sandwiched between a first electrode and a second electrode, comprising the steps of:

selectively forming the first electrode on a first substrate;

forming an insulating film;

patterning the insulating film to form a first insulating film covering an end of the first electrode, a second insulating film provided in a periphery of the first substrate, and a third insulating film provided between the first insulating film and the second insulating film;

forming the organic compound film on the first electrode;

forming the second electrode on the organic compound film;

filling a gap between the second insulating film and the third insulating film with a desiccant;

forming a layer having adhesion on the second insulating film; and

bonding the first substrate and the second substrate to each other.

46. A method of manufacturing a display device claim 42, further comprising, between the step of forming the second electrode and the step of providing the adhesive layer, a step of providing a protective film covering the first insulating film, the second insulating film and the second electrode.

47. A method of manufacturing a display device claim 43, further comprising, between the step of forming the second electrode and the step of providing the adhesive layer, a step of providing a protective film covering the first insulating film, the second insulating film and the second electrode.

48. A method of manufacturing a display device according to claim 44, further comprising, between the step of forming the second electrode and the step of forming the adhesive layer, a step of providing a protective film covering the first insulating film, the second insulating film, the third insulating film and the second electrode.

49. A method of manufacturing a display device according to claim 45, further comprising, between the step of forming the second electrode and the step of filling a gap between the second insulating film and the third insulating film, a step of providing a protective film covering the first insulating film, the second insulating film, the third insulating film and the second electrode.

50. A method of manufacturing a display device according to claim 42, wherein the second insulating film has a width of 100 to 5000 μm .

51. A method of manufacturing a display device according to claim 43, wherein the second insulating film has a width of 100 to 5000 μm .

52. A method of manufacturing a display device according to claim 44, wherein the second insulating film has a width of 100 to 5000 μm .

53. A method of manufacturing a display device according to claim 45, wherein the second insulating film has a width of 100 to 5000 μm .

54. A method of manufacturing a display device according to claim 50, wherein the second insulating film has a thickness of 1.0 to 10 μm .

55. A method of manufacturing a display device according to claim 51, wherein the second insulating film has a thickness of 1.0 to 10 μm .

56. A method of manufacturing a display device according to claim 52, wherein the second insulating film has a thickness of 1.0 to 10 μm .

57. A method of manufacturing a display device according to claim 53, wherein the second insulating film has a thickness of 1.0 to 10 μm .

58. A method of manufacturing a display device according to claim 54, wherein the second insulating film is made of any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

59. A method of manufacturing a display device according to claim 55, wherein the second insulating film is made of any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

60. A method of manufacturing a display device according to claim 56, wherein the second insulating film is made of any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

61. A method of manufacturing a display device according to claim 57, wherein the second insulating film is made of any one of a polyimide resin film, an acrylic resin film, and a polyamide resin film.

62. A method of manufacturing a display device according to claim 42, wherein, subsequent to the step bonding the first substrate and the second substrate, the first substrate and the second substrate are cut by a CO_2 laser.

63. A method of manufacturing a display device according to claim 42, wherein the first substrate and the second substrate are bonded to each other under an inert gas or a nitrogen atmosphere in the step of bonding the first substrate and the second substrate.

64. A method of manufacturing a display device according to claim 43, wherein the first substrate and the second substrate are bonded to each other under an inert gas or a nitrogen atmosphere in the step of bonding the first substrate and the second substrate.

65. A method of manufacturing a display device according to claim 44, wherein the first substrate and the second substrate are bonded to each other under an inert gas or a nitrogen atmosphere in the step of bonding the first substrate and the second substrate.

66. The method of manufacturing a display device according to claim 45, wherein the first substrate and the second substrate are bonded to each other under an inert gas or a nitrogen atmosphere in the step of bonding the first substrate and the second substrate.

67. A display device according to claim 1, wherein the semiconductor device is incorporated into an electronic equipment selected from the group consisting of a cellular phone, a mobile computer, a portable information terminal, an electronic book, a video camera, a personal computer, a DVD and a digital camera.

68. A display device according to claim 2, wherein the semiconductor device is incorporated into an electronic equipment selected from the group consisting of a cellular phone, a mobile computer, a portable information terminal, an electronic book, a video camera, a personal computer, a DVD and a digital camera.

69. A display device according to claim 19, wherein the semiconductor device is incorporated into an electronic equipment selected from the group consisting of a cellular phone, a mobile computer, a portable information terminal, an electronic book, a video camera, a personal computer, a DVD and a digital camera.

70. A display device according to claim 20, wherein the semiconductor device is incorporated into an electronic equipment selected from the group consisting of a cellular phone, a mobile computer, a portable information terminal,

an electronic book, a video camera, a personal computer, a DVD and a digital camera.

71. A display device according to claim 33, wherein the semiconductor device is incorporated into an electronic equipment selected from the group consisting of a cellular phone, a mobile computer, a portable information terminal, an electronic book, a video camera, a personal computer, a DVD and a digital camera.

* * * * *

专利名称(译)	显示装置及其制造方法		
公开(公告)号	US20020180371A1	公开(公告)日	2002-12-05
申请号	US10/078187	申请日	2002-02-19
[标]申请(专利权)人(译)	株式会社半导体能源研究所		
申请(专利权)人(译)	半导体能源研究所CO.LTD.		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	YAMAZAKI SHUNPEI KOYAMA JUN NISHI TAKESHI SATAKE RUMO		
发明人	YAMAZAKI, SHUNPEI KOYAMA, JUN NISHI, TAKESHI SATAKE, RUMO		
IPC分类号	H01L27/32 H01L51/52 H01L51/56 G09G3/10		
CPC分类号	H01L27/3246 H01L51/5246 H01L51/525 H01L2251/558 H01L51/56 H01L2251/5315 H01L51/5253		
优先权	2001045925 2001-02-22 JP		
其他公开文献	US6992439		
外部链接	Espacenet USPTO		

摘要(译)

本发明的目的是提出一种显示装置的结构，其中使用有机发光元件防止水通过显示装置的侧面，并且使基板之间的间隙均匀。在其上设置有发光元件的第一基板上，沉积在外围区域，像素部分和驱动电路部分中的层的厚度彼此相等。此外，在第一基板的周边区域中提供尽可能薄的粘合剂，以便将第二基板粘合到第一基板。结果，可以在第一基板，像素部分和驱动电路的整个外围区域中使第一基板和第二基板之间的距离均匀。此外，由于覆盖有机发光元件的保护膜也设置在第二绝缘膜的侧面上，所以防止水通过其侧面进入显示装置。

