



US 20030122751A1

(19) **United States**(12) **Patent Application Publication**
Chen et al.(10) **Pub. No.: US 2003/0122751 A1**(43) **Pub. Date: Jul. 3, 2003**(54) **METHOD FOR GENERATING UNIFORM
LUMINOSITY FOR DISPLAYING CONTENTS
OF ORGANIC LIGHT EMITTING DIODE****Publication Classification**(51) **Int. Cl.⁷** **G09G 3/32**(52) **U.S. Cl.** **345/82**(76) Inventors: **Yen-Hua Chen**, Taichung (TW);
Chih-Chung Chien, Taichung (TW)


Correspondence Address:

BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)(21) Appl. No.: **10/330,294**(22) Filed: **Dec. 30, 2002**(30) **Foreign Application Priority Data**

Dec. 31, 2001 (TW)..... 090133353

(57) **ABSTRACT**

A method for generating an uniform luminosity for displaying contents on an organic light emitting diode display device that include a plurality of pictures and a plurality of pixels has a driver circuit in the display device to light the pictures and pixels. The method includes: (A) setting a unit time which is the time of the driver chip to scan every pixel; (B) calculating the multiple of the area of every picture; (C) obtaining the multiple of the maximum area; and (D) calculating the multiple of the area of every picture according to step (B).

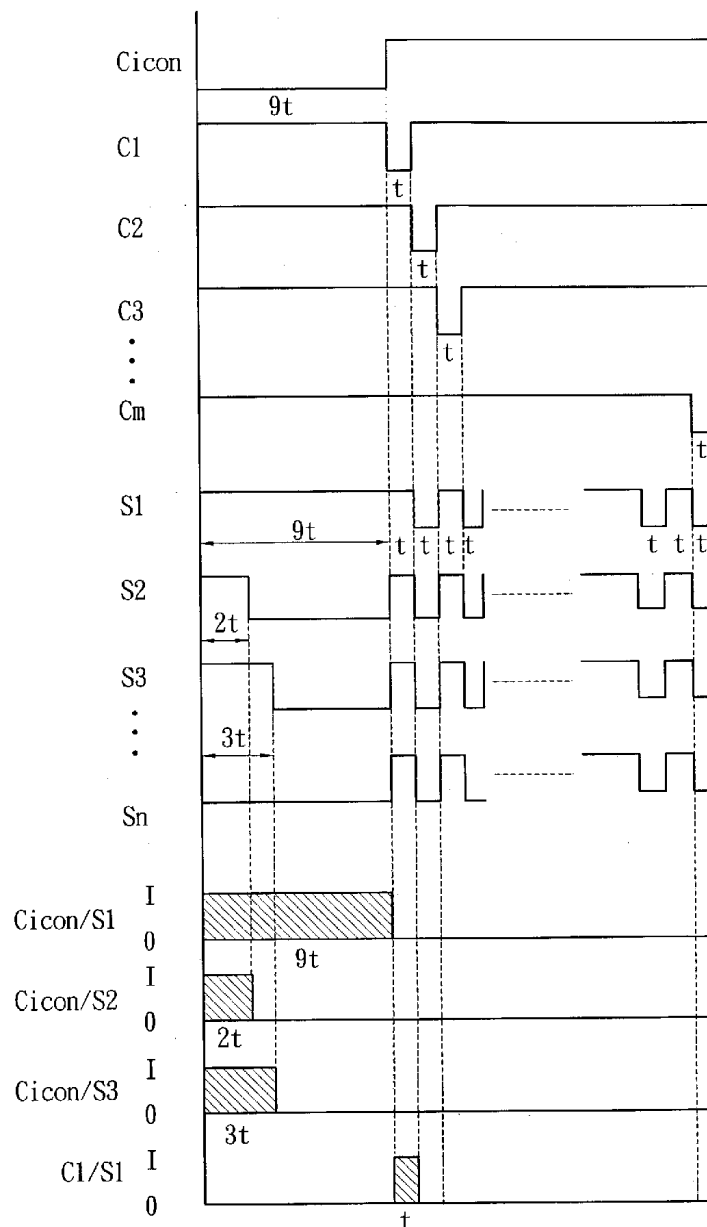

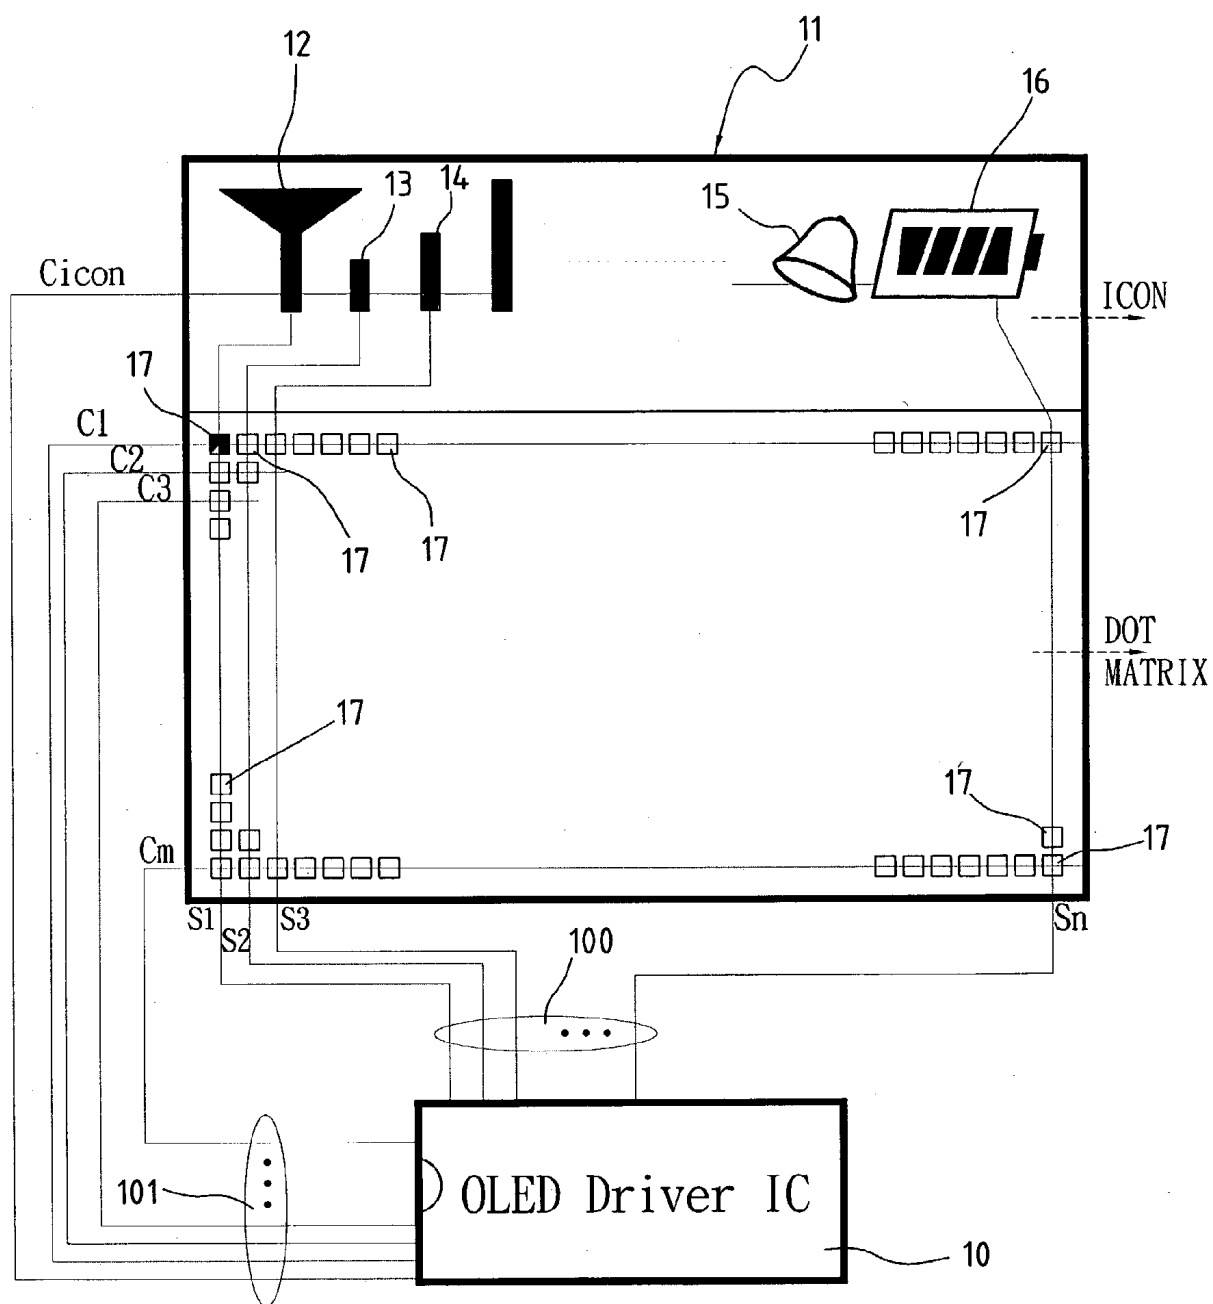


Fig. 1A
Prior Art

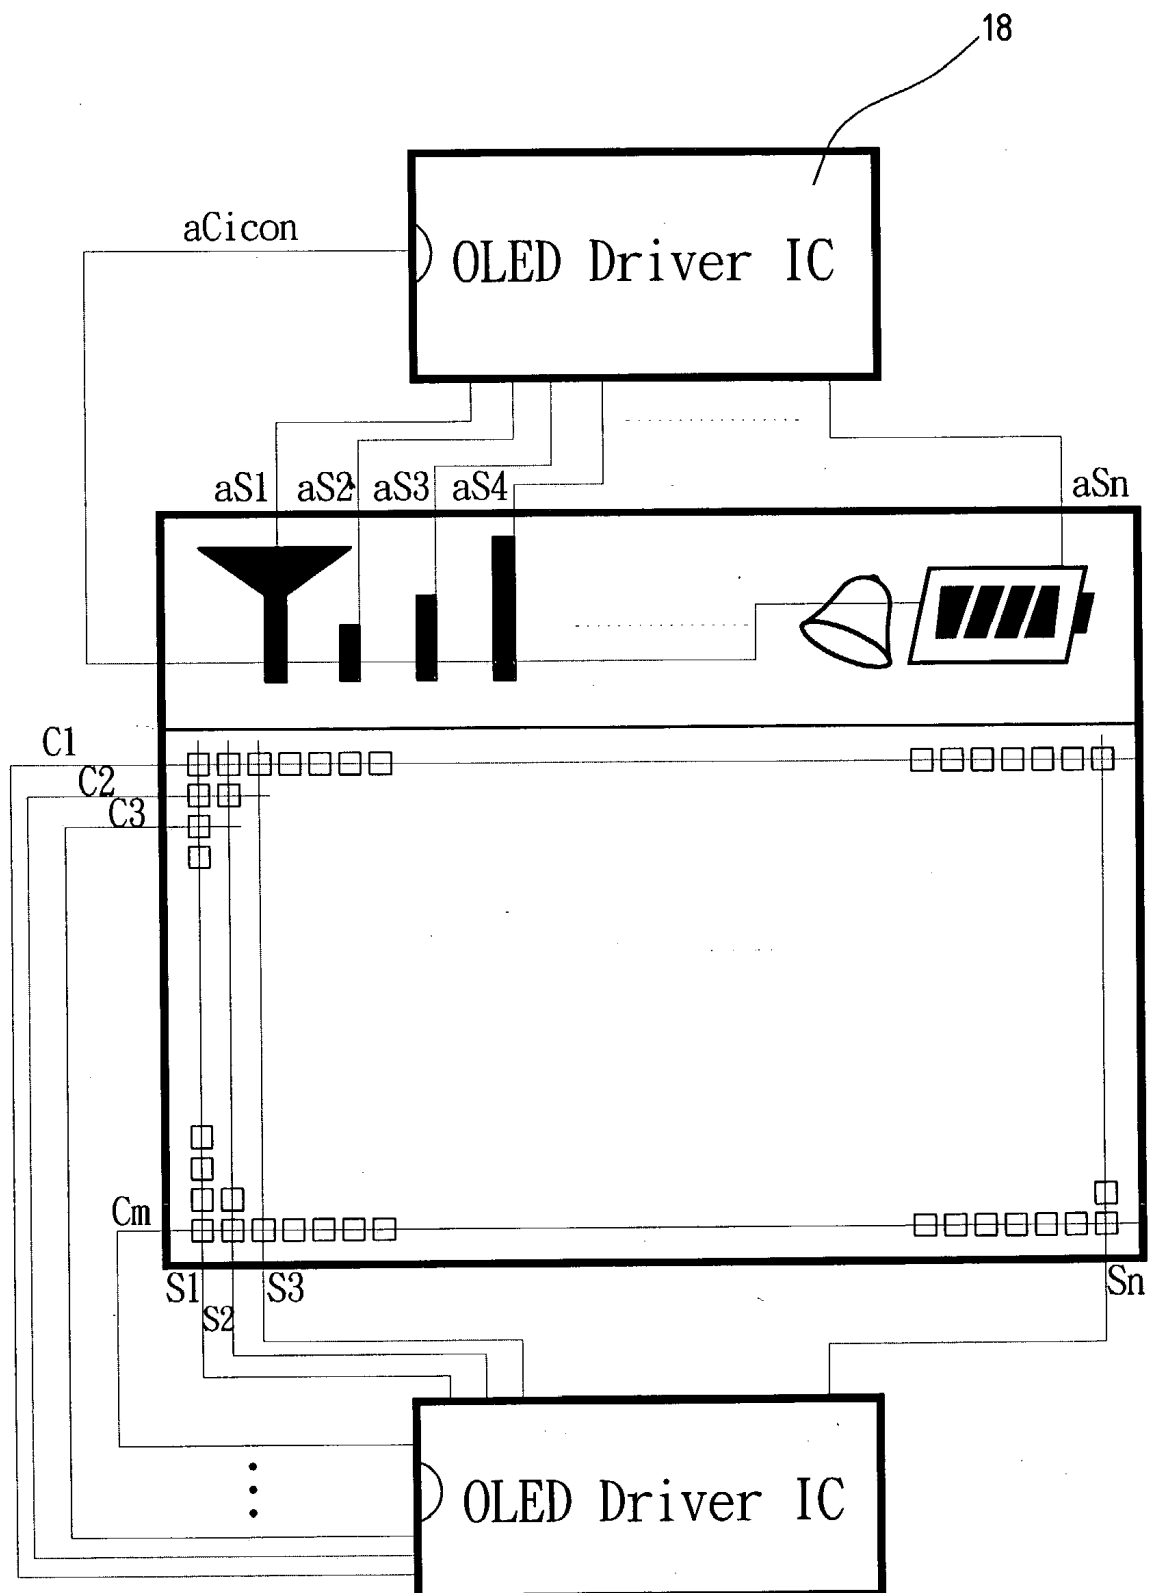


Fig. 1B
Prior Art

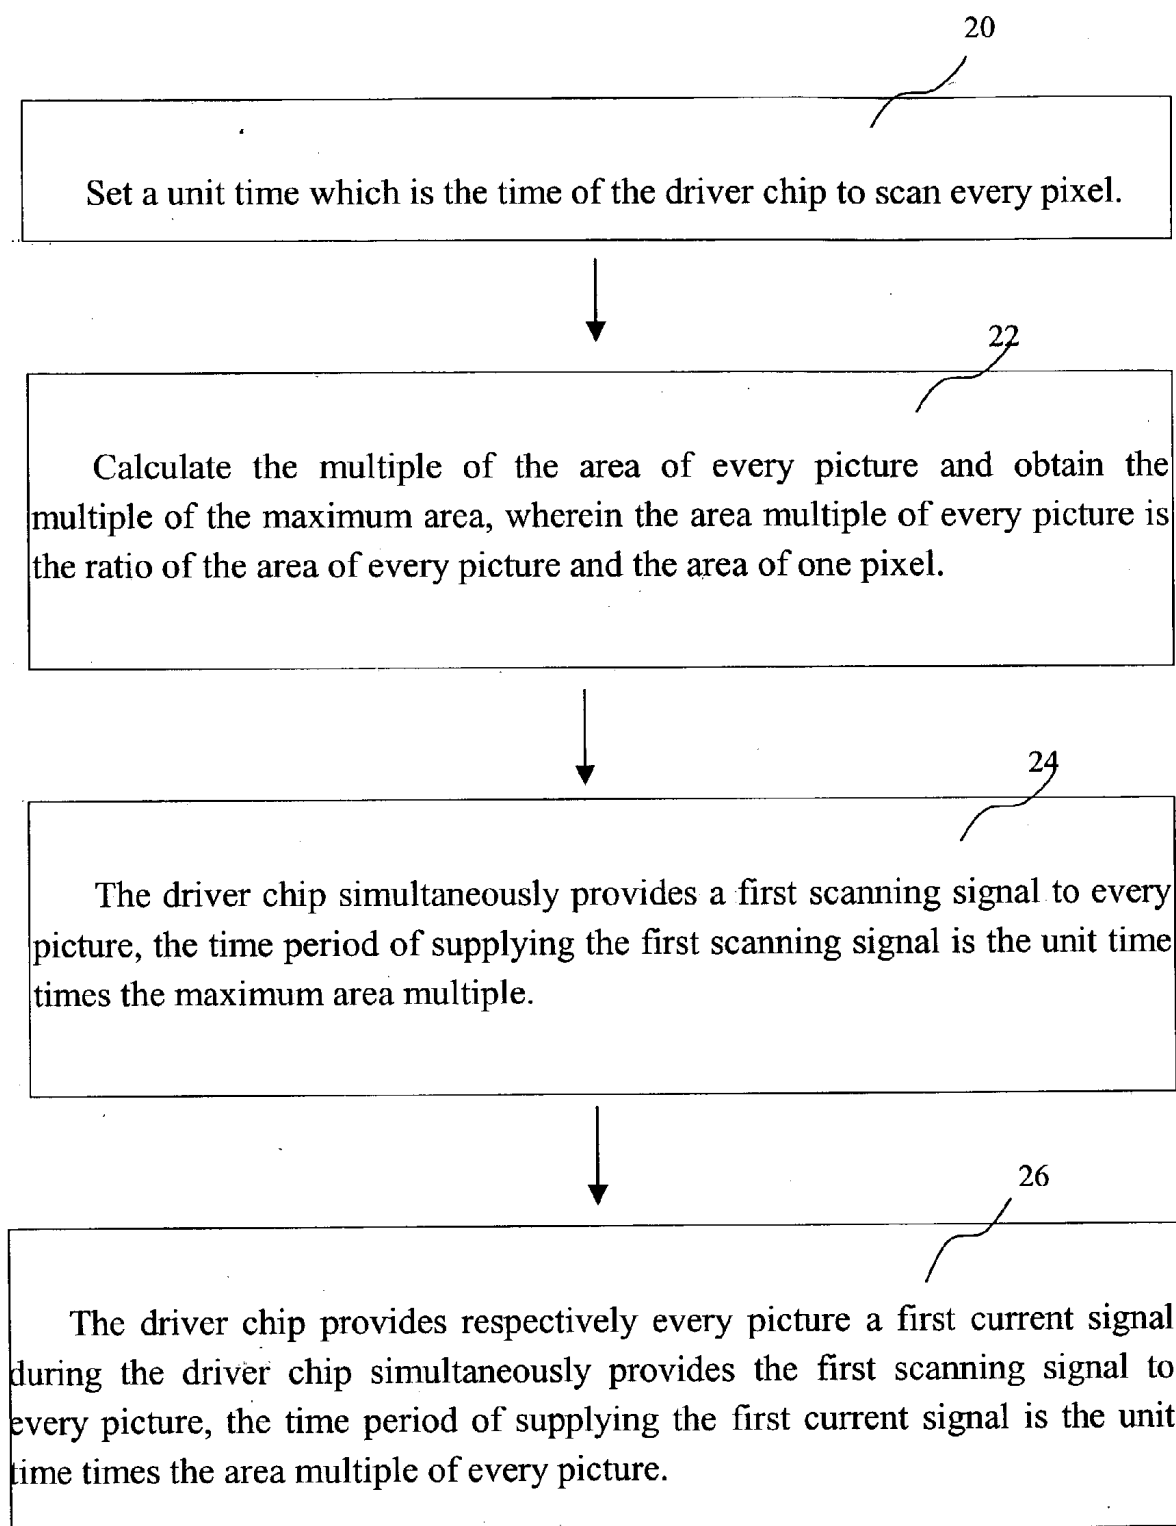


FIG. 2

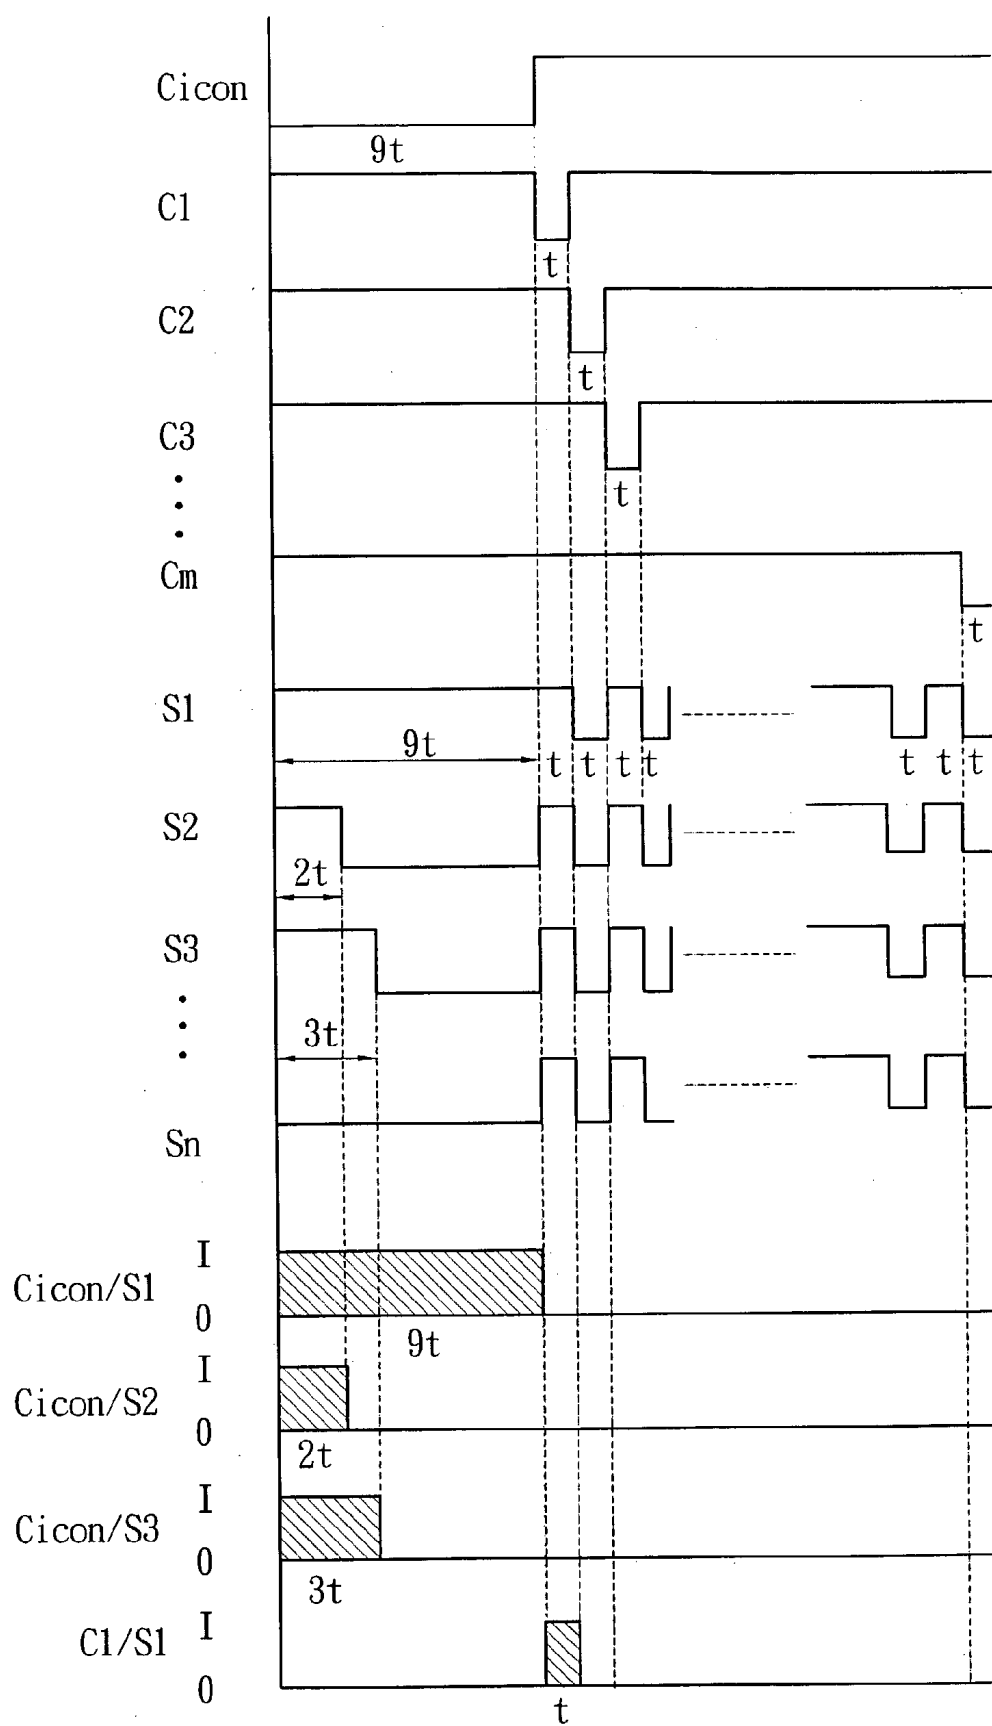


Fig. 3

METHOD FOR GENERATING UNIFORM LUMINOSITY FOR DISPLAYING CONTENTS OF ORGANIC LIGHT EMITTING DIODE

FIELD OF THE INVENTION

[0001] The present invention relates to a displaying technique for organic light emitting diode (OLED) and particularly a method for generating an uniform luminosity for displaying contents on a display device by controlling driving signals of an OLED driver circuit.

BACKGROUND OF THE INVENTION

[0002] At present OLED has been used in many applications such as car display devices, game players, PDAs, mobile phones, and the like. Displaying contents generally include pictures and characters composed of pixels. Refer to **FIG. 1A** for a conventional OLED display device including a driver circuit diagram for a passive and an active OLED. The driver circuit is built in a driver chip **10** to drive a plurality of pictures **12, 13, 14, 15**, and **16** and a plurality of pixels **17** located on a display panel **11**. The driver chip **10** outputs current signals through data lines **100** and scanning signals through scanning lines **101** to provide a constant electric current to drive the pictures and pixels. As the driver circuit shown in **FIG. 1A** supplies a constant electric current, the larger picture will have a dimmer luminosity while the smaller picture will have a stronger luminosity. As a result, the whole display picture has an uneven luminosity. Refer to **FIG. 1B** for the driver circuit diagram of another conventional OLED display device. It is an improved circuit over the one shown in **FIG. 1A**. It has another driver chip **18** to provide a greater electric current to the pictures **12, 13, 14, 15** and **16** to remedy the dimmer luminosity problem occurred to larger display pictures. However, the addition of an extra driver chip increases the cost. Moreover, more signal lines are needed, and more line configuration space is required on the display panel.

SUMMARY OF THE INVENTION

[0003] The primary object of the invention is to resolve the aforesaid problem of uneven luminosity that occurs to the conventional OLED display devices, and to reduce the design cost and line configuration space on the display panel.

[0004] In order to achieve the foregoing objects, the method to achieve uniform luminosity for displaying contents of the OLED display devices of the invention aims at displaying contents that include a plurality of pictures and a plurality of pixels and an OLED display device which has a driver chip to light the pictures and the pixels. The method includes the steps of: (A) setting a unit time which is the time required for the driver chip to scan every pixel; (B) calculating the multiple of the area of every picture and obtaining the maximum area multiple, wherein the area multiple of every picture is the ratio of the area of every picture and the area of one pixel; (C) based on the maximum area multiple obtained at step (B), the driver chip simultaneously provides a first scanning signal to every picture, the time period of supplying the first scanning signal is the unit time times the maximum area multiple; (D) based on the area multiple of every picture obtained at step (B), and during the driver chip simultaneously provides the first scanning signal to every

picture, the driver chip also provides respectively a first current signal to every picture, the time period of supplying the first current signal is the unit time times the area multiple of every picture.

[0005] The method set forth above further includes: the driver chip provides a second scanning signal to every pixel. The time period of supplying the second scanning signal is the unit time at step (A). While the driver chip supplies the second scanning signal to every pixel the driver chip also supplies a second current signal to every picture, the time period of supplying the second current signal is the unit time at step (A).

[0006] The foregoing, as well as additional objects, features and advantages of the invention will be more readily apparent from the following detailed description, which proceeds with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] **FIG. 1A** is a schematic view of a driver circuit of a conventional OLED display device.

[0008] **FIG. 1B** is a schematic view of a driver circuit of another conventional OLED display device.

[0009] **FIG. 2** is the process flow chart of the method of the invention.

[0010] **FIG. 3** is a schematic view of an embodiment of the invention, showing various driving signal wave forms adopted on the driver chip shown in **FIG. 1A**.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0011] The invention, in principle, is to control the scanning line signals and data line signals of a driver chip shown in **FIG. 1A**, and based on the size of the display area to determine the signal supply time. In general, the larger the area size, the longer the signal supply time; and the smaller the area size, the shorter the signal supply time. The rationale is that the larger displaying area requires more power and signals are supplied at a longer period of time, while the smaller displaying area requires less power, thus signals are supplied at a shorter period of time. Finally, every displaying area has even power density and every displaying area has an even luminosity. The display device may be a passive OLED display device or an active OLED display device.

[0012] Refer to **FIG. 2** for the process flow of the invention. Step **20** is setting a unit time which is the time of the driver chip to scan every pixel. Step **22** is calculating the multiple of the area of every picture and obtaining the multiple of the maximum area, wherein the area multiple of every picture is the ratio of the area of every picture and the area of one pixel. Step **24** is that the driver chip simultaneously provides a first scanning signal to every picture based on the maximum area multiple obtained at step **22**, the time period of supplying the first scanning signal is the unit time times the maximum area multiple. Step **26** is that the driver chip provides respectively a first current signal to every picture based on the area multiple-obtained at step **22** during the driver chip simultaneously provides the first scanning signal to every picture, and the time period of supplying the first current signal is the unit time times the area multiple of every picture. The method of the invention

further includes the following steps: the driver chip provides a second scanning signal to every pixel. The time period of supplying the second scanning signal is the unit time at step 20. While the driver chip supplies the second scanning signal to every pixel the drive chip also supplies a second current signal to every picture, and the time period of supplying the second current signal is the unit time at step 20.

[0013] At step 24 set forth above, as a plurality of pictures share one scanning line, the scanning time must use the time of the picture of the largest area to enable the largest picture to obtain power needed to display the complete picture and achieve the uniform luminosity effect.

[0014] Refer to FIG. 3 for various driving signal wave forms of an embodiment of the method of the invention adopted on the driver chip shown in FIG. 1A. FIG. 3 is designed based on FIG. 1, picture 12 has area multiple 9, picture 13 has area multiple 2, picture 14 has area multiple 3, and the driver chip 10 supplies a constant electric current I. As shown in FIG. 3, the unit time is t, i.e. time required for the driver chip 10 to scan every pixel 17 is t. Signal supplying time of the scanning line Cicon is 9t. It means that the scanning time for the largest picture (picture 12) is 9t. The shadow area represents power obtained by each picture and pixel. Thus picture 12 has power ($I \times 9t$), picture 13 has power ($I \times 2t$), and picture 14 has power ($I \times 3t$).

[0015] Trough a simple calculation, it shows that pictures 12, 13 and 14 and the pixel 17 all have power density ($I \times t$). Thus all have the same luminosity and the display contents also have the same luminosity.

[0016] By means of the method set forth above, the invention uses one driver ship to achieve uniform luminosity for the displaying contents and saves the cost of an additional chip that might otherwise require. In addition, the invention requires fewer signal lines and saves the line configuration space on the display panel. Thus the invention enables the OLED display device to be made at a lower cost, less weight and to be more effective in terms of dimension utilization.

[0017] While the preferred embodiment of the invention has been set forth for the purpose of disclosure, modifications of the disclosed embodiment of the invention as well as other embodiments thereof may occur to those skilled in

the art. Accordingly, the appended claims are intended to cover all embodiments which do not depart from the spirit and scope of the invention.

What is claimed is:

1. A method for generating a uniform luminosity for displaying contents on an organic light emitting diode display device that include a plurality of pictures and a plurality of pixels, the organic light emitting diode display device having a driver chip to light the pictures and the pixels, the method comprising steps of:

- A. setting a unit time which is the time of the driver chip to scan every pixel;
 - B. calculating the multiple of the area of every picture and obtaining the multiple of the maximum area, wherein the area multiple of every picture is the ratio of the area of every picture and the area of one pixel;
 - C. providing simultaneously a first scanning signal by the driver chip to every picture based on the maximum area multiple obtained at step B, supplying time of the first scanning signal being the unit time times the maximum area multiple; and
 - D. providing respectively a first current signal to every picture by the driver chip based on the area multiple obtained at step B during the driver chip simultaneously providing the first scanning signal to every picture, supplying time of each first current signal being the unit time times the area multiple of every picture.
2. The method of claim 1 further including providing a second scanning signal to every pixel by the driver chip, supplying time of the second scanning signal being the unit time at step A, the driver chip also supplying a second current signal to every picture while supplying the second scanning signal to every pixel, supplying time of the second current signal being the unit time at step A.
3. The method of claim 1, wherein the organic light emitting diode display device is a passive organic light emitting diode display device.
4. The method of claim 1, wherein the organic light emitting diode display device is an active organic light emitting diode display device.

* * * * *

专利名称(译)	产生均匀发光度以显示有机发光二极管内容物的方法		
公开(公告)号	US20030122751A1	公开(公告)日	2003-07-03
申请号	US10/330294	申请日	2002-12-30
[标]申请(专利权)人(译)	陈演华 简志CHUNG		
申请(专利权)人(译)	陈YEN-HUA 简志CHUNG		
当前申请(专利权)人(译)	陈YEN-HUA 简志CHUNG		
[标]发明人	CHEN YEN HUA CHIEN CHIH CHUNG		
发明人	CHEN, YEN-HUA CHIEN, CHIH-CHUNG		
IPC分类号	H01L51/50 G09G3/14 G09G3/20 G09G3/30 G09G3/32		
CPC分类号	G09G3/14 G09G3/2014 G09G2320/0233 G09G3/3208 G09G3/32		
优先权	090133353 2001-12-31 TW		
其他公开文献	US6937214		
外部链接	Espacenet USPTO		

摘要(译)

用于产生用于在有机发光二极管显示装置上显示内容的均匀亮度的方法包括多个图像和多个像素，在显示装置中具有驱动电路以点亮图像和像素。该方法包括：(A) 设置单位时间，该单位时间是驱动芯片扫描每个像素的时间；(B) 计算每张图片的面积的多数；(C) 获得最大面积的多数；(D) 根据步骤(B) 计算每个图像的面积的多数。

