



(43) **Pub. Date:** **Sep. 15, 2011**

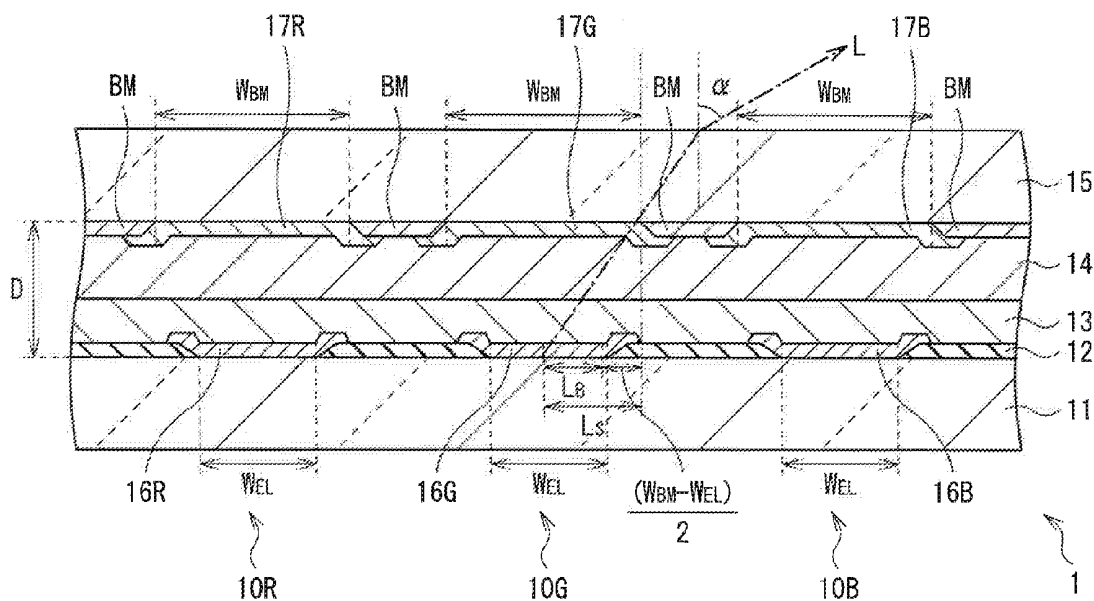

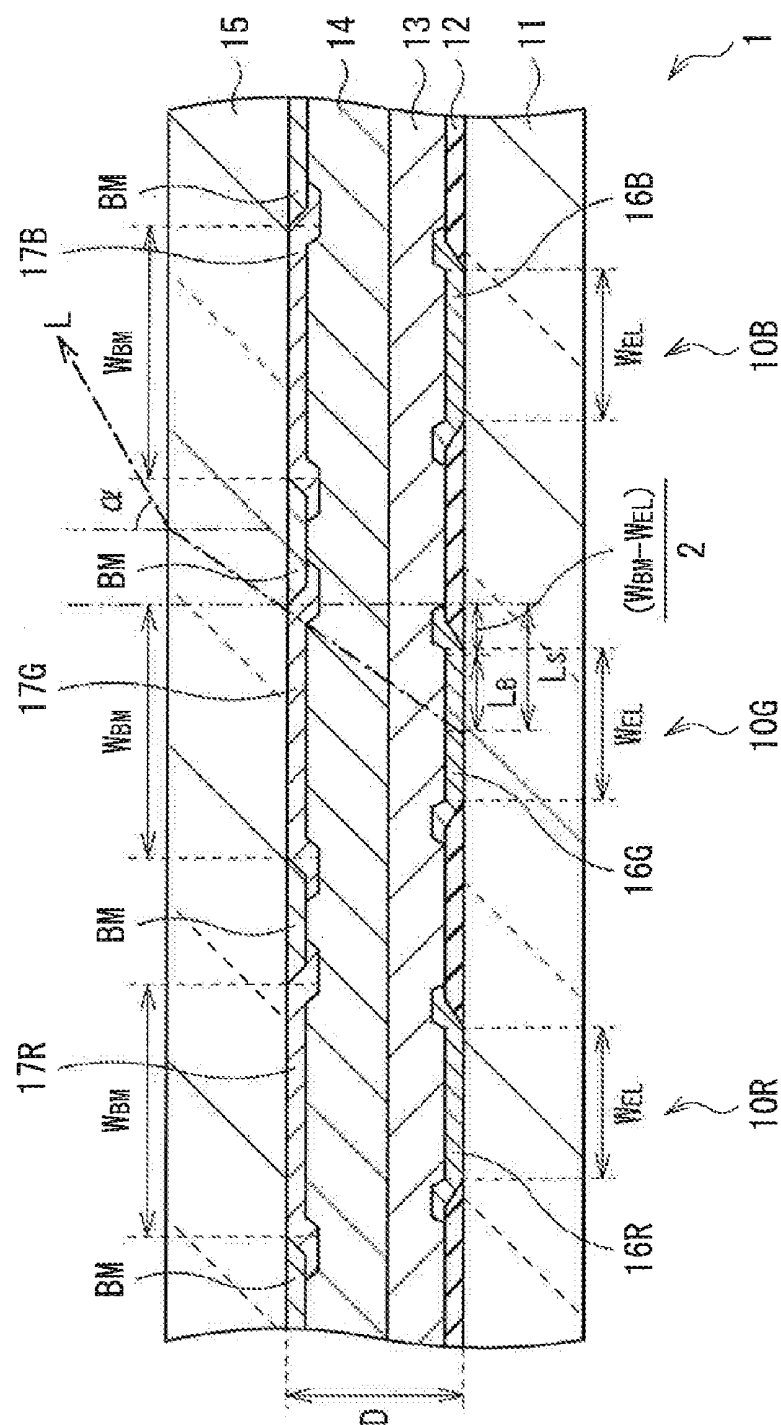

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

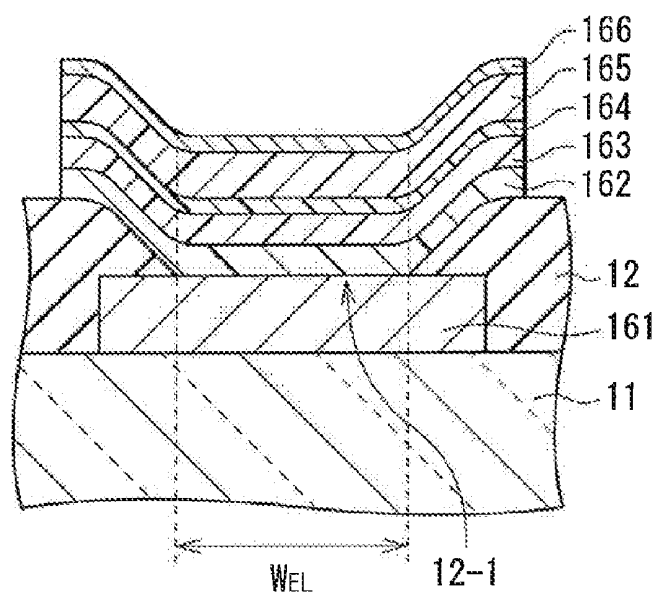


FIG. 2


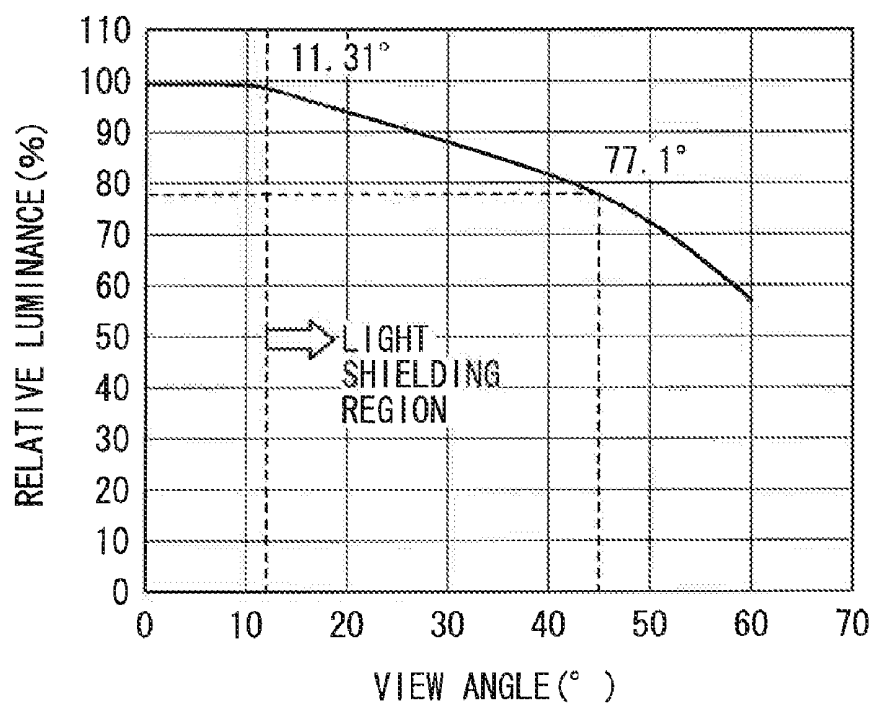


FIG. 3

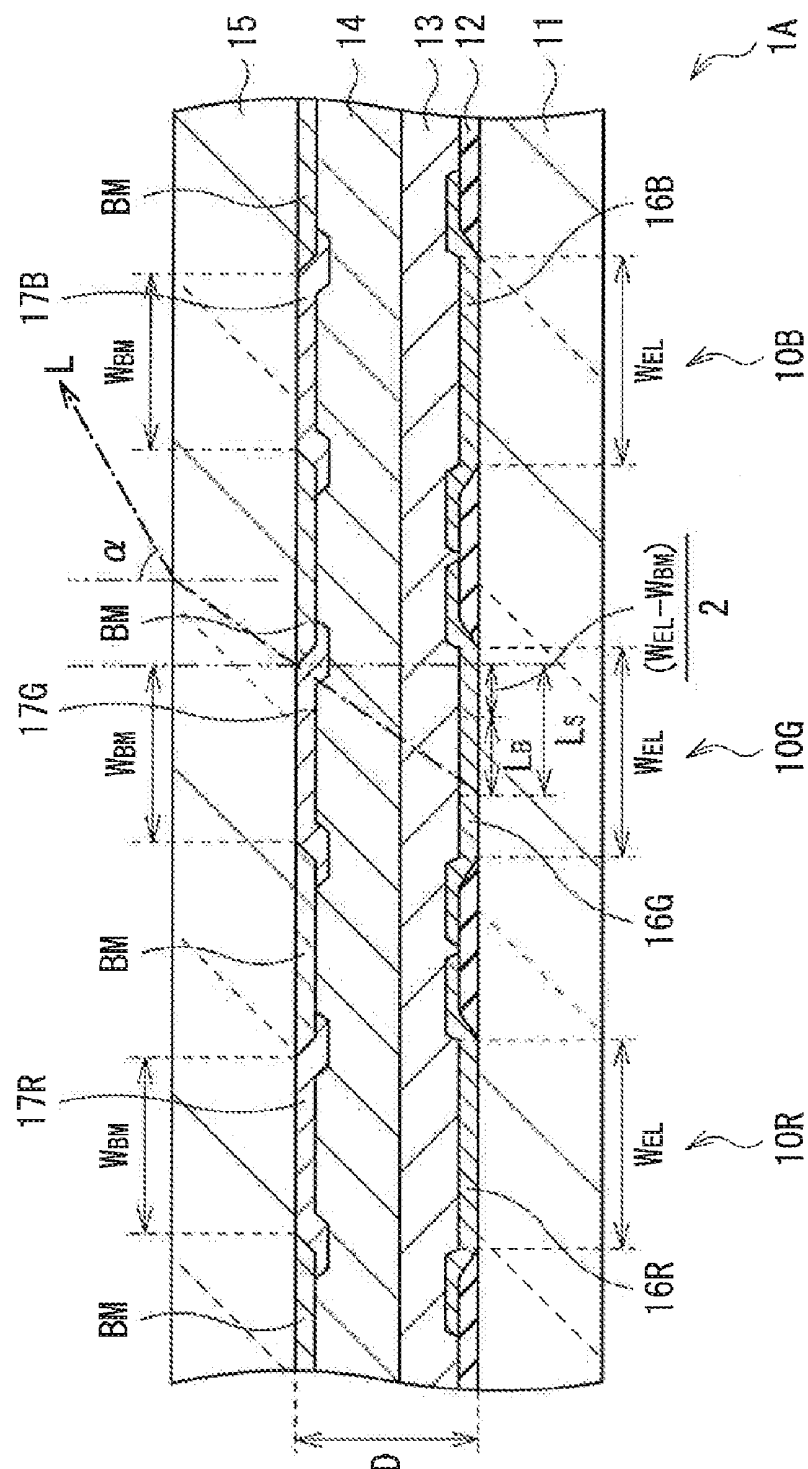

५८

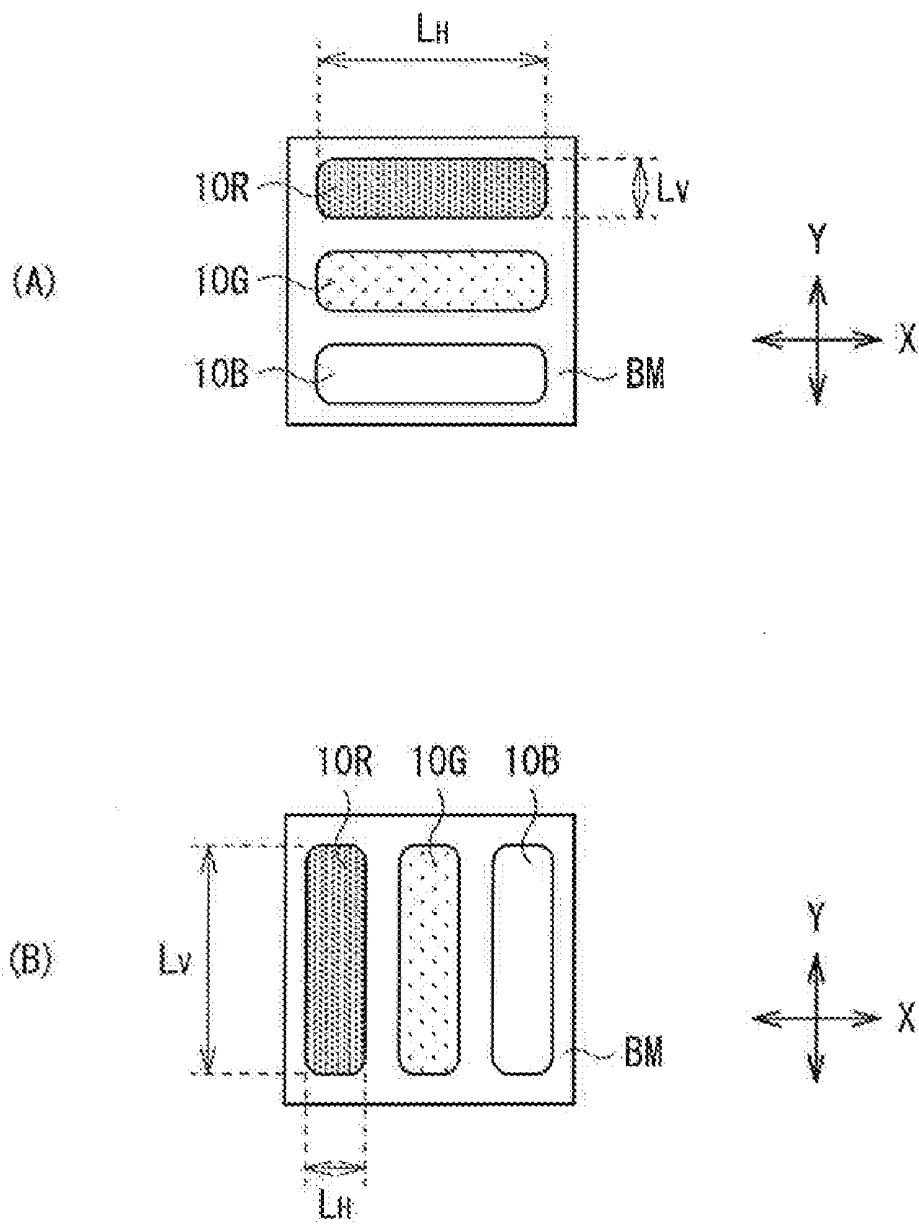


FIG. 5

DISPLAY APPARATUS

TECHNICAL FIELD

[0001] The present invention relates to a display apparatus including a self-luminous type light emitting device such as an organic EL (Electro Luminescence) device.

BACKGROUND ART

[0002] In a display apparatus, view angle characteristics of luminance are a factor significantly affecting the display image quality. In general, in the case where a self-luminous type light emitting device (self-luminous device) such as an organic EL device is used, light emitting itself is perfect diffusion. Further, due to micro cavity effect of the resonator structure and the like, even in the case of using a device structure in which extraction efficiency in the front face direction is improved, the light emitting section is able to be designed as a section similar to a perfect diffusion light source. Thus, it has been regarded that the self-luminous device is advantageous to the view angle characteristics of luminance.

[0003] However, in the case where a display apparatus is structured by using such a self-luminous device, in some case, in order to realize high contrast, a black matrix layer is provided for the purpose of inhibiting reflection from a backplane (one of a pair of substrates that is located on the opposite side of the display face) of outside light. Further, in order to improve color purity in addition to high contrast, in some cases, a black matrix layer structured integrally with a color filter is provided.

[0004] In the self-luminous type light emitting device provided with such a black matrix layer, the black matrix layer is arranged on the substrate arranged opposite to the backplane out of the pair of substrates. In order to form the black matrix layer on the backplane, the light emitting device is required to have heat resistance and reliability. However, in the existing circumstances, a material satisfying the foregoing requirement does not exist. Accordingly, it is almost essential that the black matrix layer is formed on the opposed substrate side.

[0005] Thus, when the backplane and the opposed substrate on which the black matrix layer is formed are aligned and bonded to each other, a distance corresponding to a thickness of an adhesive layer for bonding (sealing layer) and a thickness of a protective layer exists between the light emitting section and the black matrix layer.

[0006] Examples of the self-luminous type display apparatus having such a self-luminous type light emitting layer include an organic EL display apparatus (for example, Patent Document 1).

[0007] Patent Document 1: Japanese Unexamined Patent Application Publication No. 2006-73219

DISCLOSURE OF INVENTION

[0008] In the case of a self-luminous device such as an organic EL device, though light emitting itself is perfect diffusion, the size of the light emitting section is limited to the size equal to or less than a pixel pitch size. Thus, in the case where a light shielding black matrix layer or the like exists, when a pixel is viewed from a diagonal direction, a shadow section created by the black matrix layer is generated. Accordingly, there has been a problem that the shadow section extends to the light emitting section, a light shielding region is thereby generated, and the luminance is lowered

according to the size of the light shielding region (view angle characteristics of luminance are deteriorated). In the case of the light emitting device in which micro cavity effect is used, the foregoing problem is overlapped with light distribution characteristics of the light emitting section, and thereby deterioration of view angle characteristics of the luminance becomes more significant.

[0009] The foregoing light shielding phenomenon is a phenomenon unique to the display apparatus including the self-luminous device having a finite size. Such a light shielding phenomenon is not generated in a liquid crystal display apparatus in which a perfect diffusion light source (backlight light source) is arranged separately from a liquid crystal panel. This is because in the liquid crystal panel with a thin cell gap, the perfect diffusion backlight light source having a larger dimension than that of an aperture region is able to be regarded as a virtual diffusion light source formed directly beneath the black matrix layer. Thus, the view angle characteristics of luminance almost correspond with those of the light source, resulting in almost no problem. In fact, the actual problem as the visual field characteristics in the liquid crystal display apparatus is contrast degradation caused by spectroscopic characteristics of refractive index anisotropy of liquid crystal molecules and color shift caused by the wavelength dependence.

[0010] Further, in the past, no inventions for solving luminance degradation caused by light shielding as view angle characteristics described above have existed. For example, as described in the foregoing Patent Document 1, only a technique in which color mixture generated in the case where light leaked from one pixel to an adjacent pixel enters the interface between air and a glass at an angle equal to or more than a critical angle is avoided has been reported.

[0011] In view of the foregoing problem, it is an object of the invention to provide a display apparatus including a self-luminous type light emitting device with which view angle characteristics of luminance can be improved.

[0012] In a first display apparatus of the present invention, a plurality of pixels are arranged in a state of matrix as a whole; a pair of substrates, a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates, and a black matrix layer formed in a region corresponding to a portion between each pixel on the other substrate of the pair of substrates are included; and the following Formula (1) is satisfied.

$$2\sqrt{3} \leq (W_{BM} - W_{LD})/D \quad (1)$$

In the formula, W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer, respectively.

[0013] In the first display apparatus of the present invention, since the foregoing Formula (1) is satisfied, in the view angle range from 0 degrees to 60 degrees both inclusive, vignetting of display light from the light emitting device caused by light shielding by the black matrix layer is never generated.

[0014] In a second display apparatus of the present invention, a plurality of pixels are arranged in a state of matrix as a whole; a pair of substrates, a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates, and a black matrix layer formed in a region corresponding to a portion between each

pixel on the other substrate of the pair of substrates are included; and the following Formula (2) to Formula (4) are satisfied.

$$2\sqrt{3} > (W_{BM} - W_{LD})/D \quad (2)$$

$$W_{LD} < W_{BM} \quad (3)$$

$$(\sqrt{3}/2) * W_{BM} \geq D \geq (\sqrt{3}/2) * (W_{BM} - W_{LD}) \quad (4)$$

In the formula, W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer.

[0015] In the second display apparatus of the present invention, since the foregoing Formula (2) to Formula (4) are satisfied, in the case where the aperture dimension of the black matrix layer is larger than the light emitting region dimension of the light emitting device, even if vignetting of the display light from the light emitting device caused by light shielding by the black matrix layer is generated in the view angle range from 0 degrees to 60 degrees both inclusive, the vignetting ratio of the display light can be suppressed to a value equal to or less than 50%.

[0016] In a third display apparatus of the present invention, a plurality of pixels are arranged in a state of matrix as a whole; a pair of substrates, a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates, and a black matrix layer formed in a region corresponding to a portion between each pixel on the other substrate of the pair of substrates are included; and the following Formula (5) to Formula (7) are satisfied.

$$2\sqrt{3} > (W_{BM} - W_{LD})/D \quad (5)$$

$$W_{LD} \geq W_{BM} \quad (6)$$

$$(\sqrt{3}/2) * W_{LD} \geq D \geq (\sqrt{3}/2) * (W_{LD} - W_{BM}) \quad (7)$$

In the formula, W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer.

[0017] In the third display apparatus of the present invention, since the foregoing Formula (5) to Formula (7) are satisfied, in the case where the aperture dimension of the black matrix layer is equal to or less than the light emitting region dimension of the light emitting device, even if vignetting of the display light from the light emitting device caused by light shielding by the black matrix layer is generated in the view angle range from 0 degrees to 60 degrees both inclusive, the vignetting ratio of the display light can be suppressed to a value equal to or less than 50%.

[0018] According to the first display apparatus of the present invention, the self-luminous type light emitting device and the black matrix layer are provided, and the foregoing Formula (1) is satisfied. Thus, in the view angle range from 0 deg to 60 deg both inclusive, vignetting of display light from the light emitting device caused by light shielding by the black matrix layer is never generated. Therefore, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance are able to be improved.

[0019] According to the second display apparatus of the present invention, the self-luminous type light emitting device and the black matrix layer are provided, and the foregoing Formula (2) to Formula (4) are satisfied. Thus, in the case where the aperture dimension of the black matrix layer is larger than the light emitting region dimension of the light emitting device, even if vignetting of the display light from the light emitting device caused by light shielding by the black matrix layer is generated in the view angle range from 0 degrees to 60 degrees both inclusive, the vignetting ratio of the display light can be suppressed to a value equal to or less than 50%. Therefore, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance are able to be improved.

[0020] According to the third display apparatus of the present invention, the self-luminous type light emitting device and the black matrix layer are provided, and the foregoing Formula (5) to Formula (7) are satisfied. Thus, if the aperture dimension of the black matrix layer is equal to or less than the light emitting region dimension of the light emitting device, even if vignetting of the display light from the light emitting device caused by light shielding by the black matrix layer is generated in the view angle range from 0 degrees to 60 degrees both inclusive, the vignetting ratio of the display light can be suppressed to a value equal to or less than 50%. Therefore, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance are able to be improved.

BRIEF DESCRIPTION OF DRAWINGS

[0021] FIG. 1 is a cross sectional view illustrating a configuration of a display apparatus according to a first embodiment of the present invention.

[0022] FIG. 2 is a cross sectional view illustrating a detailed structure of the light emitting section illustrated in FIG. 1.

[0023] FIG. 3 is a characteristics diagram illustrating an example of a relation between a view angle and a relative luminance.

[0024] FIG. 4 is a cross sectional view illustrating a configuration of a display apparatus according to a second embodiment.

[0025] FIG. 5 is a plan view for explaining a pixel shape in a display apparatus according to a modified example of the present invention.

BEST MODE(S) FOR CARRYING OUT THE INVENTION

[0026] A description will be hereinafter given in detail of embodiments of the present invention with reference to the drawings.

First Embodiment

[0027] FIG. 1 illustrates a cross sectional configuration of a display apparatus (organic EL display apparatus 1) according to a first embodiment of the present invention. In the organic EL display apparatus 1, for example, an after-mentioned plurality of light emitting sections 16R, 16G, and 16B are respectively arranged in a state of matrix in pixels 10R, 10G, and 10B on a drive substrate 11 made of glass or the like, and a signal line drive circuit and a scanning line drive circuit (not illustrated) that are pixel drive circuits for displaying a video are formed. Specifically, the light emitting sections 16R, 16G, and 16B, an insulating layer 12, a protective layer 13, a

sealing layer 14, color filter layers 17R, 17B, and 17G, and a black matrix layer BM are layered in this order from the drive substrate 11 side between the drive substrate 11 and an opposed substrate 15.

[0028] The light emitting sections 16R, 16G, and 16B are respectively formed in a region corresponding to the pixels 10R, 10G, and 10B, and are composed of self-luminous type light emitting devices (organic EL devices) emitting light in a red wavelength region, a green wavelength region, and a blue wavelength region. FIG. 2 illustrates a cross sectional structure of the organic EL device in detail. The organic EL device has a structure in which a drive transistor of the foregoing pixel drive circuit (not illustrated); a first electrode 161 as an anode; a hole injection layer 162, a hole transport layer 163, a light emitting layer 164, and an electron transport layer 165 as an organic layer; and a second electrode 166 as a cathode are layered in this order from the drive substrate 11 side.

[0029] Such an organic EL device is covered with the protective layer 13 composed of silicon nitride (SiN_x) or the like, and is further sealed by bonding the opposed substrate 15 made of glass or the like to the whole area of the protective layer 13 with the sealing layer 14 in between. The distance between the light emitting sections 16R, 16G, and 16B and the black matrix layer BM is about 30 μm, which includes the thickness of the protective layer 13 and the thickness of the adhesive layer 14. The drive transistor is electrically connected to the first electrode 161 through an aperture 12-1 provided in the insulating film 12.

[0030] The first electrode 161 is made of, for example, ITO (indium tin composite oxide).

[0031] As described above, the organic layer in the light emitting sections 16R, 16G, and 16B has the structure in which the hole injection layer 162, the hole transport layer 163, the light emitting layer 164, and the electron transport layer 165 are layered sequentially from the first electrode 161 side. Of the foregoing, it is enough that layers other than the light emitting layer 164 are provided according to needs. Further, such an organic layer may have different structures according to each light emitting color of the organic EL device. The hole injection layer 161 is intended to improve hole injection efficiency and a buffer layer to prevent leakage. The hole transport layer 163 is intended to improve hole transport efficiency to the light emitting layer 164. The light emitting layer 164 emits light by electron-hole recombination by applying an electric field. As will be described in detail below, the light emitting layer 164 contains a host material having charge transport characteristics and a dopant material (guest material) having light emitting characteristics. The electron transport layer 165 is intended to improve electron transport efficiency to the light emitting layer 164. It is possible that an electron injection layer (not illustrated) that has, for example, a thickness of about 0.3 nm and is composed of LiF and Li₂O or the like is provided between the electron transport layer 165 and the second electrode 166.

[0032] The hole injection layer 162 of the light emitting section 16R has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of 4,4',4"-tris(3-methylphenylphenylamino)triphenyl amine (m-MTDATA) or 4,4',4"-tris(2-naphthylphenylamino)triphenyl amine (2-TNATA). The hole transport layer 163 of the light emitting section 16R has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of bis[(N-naphthyl)-N-phenyl] benzidine (α-NPD). The light emitting layer 164 of the light emitting section 16R has, for example, a thickness from 10

nm to 100 nm both inclusive, and is composed of a material in which 30 wt % of 2,6-bis[4'-(methoxydiphenylamino)styryl]-1,5-dicyanonaphthalene (BSN) as a dopant material is mixed with 9,10-di-(2-naphthyl)anthracene (ADN) (host material) as a host material. The electron transport layer 165 of the light emitting section 16R has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of 8-hydroxyquinoline aluminum (Alq₃).

[0033] The hole injection layer 162 of the light emitting section 16G has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of m-MTDATA or 2-TNATA. The hole transport layer 163 of the light emitting section 16G has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of α-NPD. The light emitting layer 164 of the light emitting section 16G has, for example, a thickness from 10 nm to 100 nm both inclusive, and is composed of a material in which 5 volume % of Coumarin 6 as a dopant material is mixed with ADN as a host material. The electron transport layer 165 of the light emitting section 16G has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of Alq₃.

[0034] The hole injection layer 162 of the light emitting section 16B has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of m-MTDATA or 2-TNATA. The hole transport layer 163 of the light emitting section 16B has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of α-NPD. The light emitting layer 164 of the light emitting section 16B has, for example, a thickness from 10 nm to 100 nm both inclusive, and is composed of a material in which 2.5 wt % of 4,4'-bis[2-{4-(N,N-diphenylamino)phenyl}vinyl]biphenyl (DPAVB₂) as a dopant material is mixed with ADN as a host material. The electron transport layer 165 of the light emitting section 16B has, for example, a thickness from 5 nm to 300 nm both inclusive, and is composed of Alq₃.

[0035] The second electrode 166 has, for example, a thickness from 5 nm to 50 nm both inclusive, and is composed of a simple substance or an alloy of metal elements such as aluminum (Al), magnesium (Mg), calcium (Ca), and sodium (Na). Specially, an alloy of magnesium and silver (MgAg alloy) or an alloy of aluminum (Al) and lithium (Li) (AlLi alloy) is preferable.

[0036] The insulating layer 12 is intended to planarize the surface of the drive substrate 11, and is composed of, for example, an organic material such as polyimide or an inorganic material such as silicon oxide (SiO₂).

[0037] The protective layer 13 is intended to prevent intrusion of moisture or the like into the organic layer in the light emitting sections 16R, 16G, and 16B. The protective layer 13 is made of a material having low water permeable characteristics and low water absorbing characteristics, and has a sufficient thickness. Further, the protective layer 13 is made of a material having high transmissive characteristics to light generated in the light emitting layer 164 such as a material having a transmittance equal to or more than 80%. Such a protective layer 13 has, for example, a thickness about from 2 μm to 3 μm both inclusive, and is made of an inorganic amorphous insulating material. Specifically, the protective layer 13 is preferably composed of amorphous silicon (α-Si), amorphous silicon carbide (α-SiC), amorphous silicon nitride (α-Si_{1-x}N_x), or amorphous carbon (α-C). Such an inorganic amorphous insulating material does not compose grains, and thus has low water permeability characteristics and structures the favor-

able protective layer 13. Further, the protective layer 13 may be made of a transparent conductive material such as ITO.

[0038] The sealing layer 14 is made of, for example, a thermosetting resin or an ultraviolet ray curable resin.

[0039] The opposed substrate 15 is located on the second electrode 166 side of the light emitting sections 16R, 16G, and 16B. The opposed substrate 15 is intended to seal the light emitting sections 16R, 16G, and 16B together with the sealing layer 14, and is made of a material such as glass transparent to light generated in the light emitting sections 16R, 16G, and 16B. The opposed substrate 15 is provided with, for example, the color filter layers 17R, 17G, and 17B, which extract light generated in the light emitting sections 16R, 16G, and 16B and absorb outside light reflected by the light emitting sections 16R, 16G, and 16B and wirings therebetween to improve contrast. The opposed substrate 15 is further provided with the after-mentioned black matrix layer BM.

[0040] The color filter layers are composed of the color filter layer 17R as a red filter, the color filter layer 17G as a green filter, and the color filter layer 17B as a blue filter. The color filter layers are arranged for each pixel correspondingly to the light emitting sections 16R, 16G, and 16B. The color filter layers 17R, 17G, and 17B are respectively, for example, in the shape of a rectangle, and are formed with no space therebetween. These color filter layers 17R, 17G, and 17B are respectively made of a resin mixed with a pigment. By selecting the pigment, adjustment is made so that the light transmission ratio in the targeted red, green, or blue wavelength region is high and the light transmission ratio in the other wavelength regions is low.

[0041] The black matrix layer BM is formed in a region corresponding to a region between the pixels 10R, 10G, and 10B. The black matrix layer BM is intended to segment the display regions of the pixels 10R, 10G, and 10B, and prevent reflection of outside light in a border between each color section and prevent light leakage in a portion between the pixels to improve contrast. The black matrix layer BM is composed of a laminated body of thin film layers composed of a metal, a metal oxide, and a metal nitride. For example, the black matrix layer BM is made of a two-layer chromium black matrix composed of a lamination of CrO_x (x is a given number) and Cr or a three-layer chromium black matrix composed of a lamination of CrO_x , CrN_y , and Cr (x and y are a given number) having a decreased reflectance.

[0042] Next, a description will be given in detail of a structure of a characteristic part of the present invention and action and effect thereby obtained with reference to FIG. 1 and FIG. 3.

[0043] (Case with No Vignetting)

[0044] First, in the organic EL display apparatus 1 of this embodiment, as illustrated in FIG. 1, where an aperture dimension of the black matrix layer BM is W_{BM} ; a light emitting region dimension of the organic EL device in the light emitting sections 16R, 16G, and 16B is W_{EL} (corresponding to a specific example of a light emitting region dimension W_{LD}); and a value obtained by converting a distance in the vertical direction between the light emitting sections 16R, 16G, and 16B (organic EL device) and the black matrix layer BM to an air length is D ($=\sum di/ni$), magnitude relation between the aperture dimension W_{BM} of the black matrix layer BM and the light emitting region dimension W_{EL} of the organic EL device satisfies the following Formula (11) in order to avoid lowering of light usage efficiency due to

hiding the light emitting region. That is, the aperture dimension W_{BM} of the black matrix layer BM is larger than the light emitting region dimension W_{EL} of the organic EL device. The difference value between the aperture dimension W_{BM} of the black matrix layer BM and the light emitting region dimension W_{EL} of the organic EL is desirably twice or more a margin in layering the opposed substrate 15 and the drive substrate 11.

$$W_{BM} - W_{EL} > 0 \quad (11)$$

[0045] As illustrated in FIG. 1, if a display video in the organic EL display apparatus 1 is viewed in the air from the direction with an angle α (view angle α) to the opposed substrate 15, a length L_s of a shadow region formed on the light emitting sections 16R, 16G, and 16B caused by light shielding by the black matrix layer BM is expressed by the following Formula (12) based on Snell's law. Further, a dimension L_B of a region actually light-shielded by the shadow region is expressed by the following Formula (13).

$$L_s = D * \tan \alpha \quad (12)$$

$$L_B = L_s - (1/2) * (W_{BM} - W_{EL}) = D * \tan \alpha - 0.5 * (W_{BM} - W_{EL}) \quad (13)$$

[0046] Thus, where the following Formula (14) is satisfied, the region actually light-shielded caused by light shielding by the black matrix layer BM does not exist. Therefore, in the view angle range from 0 deg to α both inclusive, vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is never generated. Further, when Formula (14) is modified, it results in Formula (15). One of the conditions satisfying Formulas (14) and (15) is a case that the black matrix layer BM is formed directly above the light emitting sections 16R, 16G, and 16B.

$$L_B = D * \tan \alpha - 0.5 * (W_{BM} - W_{EL}) \leq 0 \quad (14)$$

$$\alpha \leq \tan^{-1}((W_{BM} - W_{EL}) / (2 * D)) \quad (15)$$

[0047] Further, in a general display apparatus, even if vignetting is generated at the view angle α equal to or more than 60 deg, it possibly leads to no large practical problem. The reason why $\alpha=60$ deg is adopted is as follows. For example, in the case where the optimal audio view distance is twice the width of a display apparatus and a viewer is located in a direction at 45 deg from the front face of the display screen, the viewer views an angle range of (45 deg $\pm$ 15 deg) as a field angle at once. It is regarded that 60 deg as the maximum angle in this case is not only a mathematical agreement but also is the angle as one index for a person skilled in the art. Thus, where $\alpha=60$ deg is assigned to Formulas (14) and (15), the following Formula (16) is established.

$$2\sqrt{3} \leq (W_{BM} - W_{EL}) / D \quad (16)$$

[0048] In the case where the aperture ratio is small (in the case where value of $(W_{BM} - W_{EL})$ is large), it means that the film thickness of the protective layer 13 and the film thickness of the sealing layer 14 are significantly small. Thus, considering life lowering due to increase of the current density, heat resistance in the process and the like, the aperture ratio is desirably as large as possible (value of $(W_{BM} - W_{EL})$ is desirably as small as possible).

[0049] In the organic EL display apparatus 1 configured as above, by a drive signal supplied from the not-illustrated pixel drive circuit, a drive current is flown between the first electrode 161 and the second electrode 166 in the organic EL device in the respective light emitting sections 16R, 16G, and

16B. Thereby, electron hole recombination is generated, and light emission is initiated in the light emitting layer 164. Light from the light emitting layer 164 is transmitted through the second electrode 166, the protective layer 13, the sealing layer 14, the color filter layers 17R, 17G, and 17B, and the opposed substrate 15. After that, the light is extracted outside of the display apparatus. Thereby, video display based on the drive signal is made.

[0050] In this case, in the case where the foregoing Formula (11) and Formula (16) are satisfied, in the view angle α range from 0 to 60 deg both inclusive, vignetting of the display light L from the light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is never generated.

[0051] (Case with Vignetting on Some Level)

[0052] Next, studies will be made on a case where the region actually light-shielded caused by light shielding by the black matrix layer BM exists in the angle range equal to or less than the view angle α (case where vignetting of the display light L from the light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is generated). Many actual display apparatuses are under such a condition, and thus the studies may provide a solution more corresponding to reality. In this case, considering the foregoing Formula (14) and Formula (15), the following Formula (17) and Formula (18) are established. Further, where $\alpha=60$ deg is assigned to Formulas (17) and (18) in the same manner as that of the foregoing case, the following Formula (19) is established.

$$L_B = D * \tan \alpha - 0.5 * (W_{BM} - W_{EL}) > 0 \quad (17)$$

$$\alpha > \tan^{-1}((W_{BM} - W_{EL}) / (2 * D)) \quad (18)$$

$$2\sqrt{3} > (W_{BM} - W_{EL}) / D \quad (19)$$

[0053] Here, the ratio of vignetting of the display light L caused by light shielding by the black matrix layer BM (light shielding ratio of the display light L) is proportional to the ratio between the dimension L_B of the region actually light-shielded by the portion of the shadow region and the light emitting region dimension W_{EL} of the organic EL device. Thus, the vignetting ratio of the display light L is expressed by the following Formula (20). Therefore, to set the vignetting ratio of the display light L to a value equal to or less than 50%, it is enough that the following Formula (21) is satisfied. Where the following Formula (21) is modified by using Formula (17), the following Formula (22) is established.

$$(\text{vignetting ratio of display light } L) = (L_B - W_{EL}) \quad (20)$$

$$0.5 \geq (L_B - W_{EL}) \geq 0 \quad (21)$$

$$0.5 * W_{BM} \geq D * \tan \alpha \geq 0.5 * (W_{BM} - W_{EL}) \quad (22)$$

[0054] In this case, studies are hereinafter made on an application range of the view angle α in the case where the vignetting of the display light L is generated as described above. In a mobile usage such as a cellular phone, the view angle α may be small to some degree. Meanwhile, in a usage such as a TV, the view angle α should be large to some degree. Considering this point, the application range of the view angle α is appropriately a numeral value range from 30 deg to 60 deg both inclusive. In the case where such a numeral value range is applied to Formula (22), the following formula (23) is established.

$$(\sqrt{3}/2) * W_{BM} \geq D \geq (1/\sqrt{3}) * (W_{BM} - W_{EL}) \quad (23)$$

[0055] In the organic EL display apparatus 1 configured as above, when the foregoing Formula (11), Formula (19), and Formula (23) are satisfied, in the case where the aperture dimension W_{BM} of the black matrix layer BM is larger than the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device), even if vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is generated in the view angle α range from 0 to 60 deg both inclusive, the vignetting ratio of the display light L is suppressed to a value equal to or less than 50%.

[0056] FIG. 3 illustrates an example of a relation between the view angle α and a relative luminance (relative luminance in the case where luminance is 100% where the view angle α is 0 deg) where the pixel pitch of the respective pixels 10R, 10G, and 10B is 100 μm ; the aperture dimension W_{BM} of the black matrix layer BM is 70 μm ; the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device) is 60 μm ; and the air length $D (= \Sigma d_i/n_i)$ between the light emitting sections 16R, 16G, and 16B (organic EL device) and the black matrix layer BM is 30 μm . Where an average refractive index n between the light emitting sections 16R, 16G, and 16B (organic EL device) and the black matrix layer BM is 1.6, the view angle α at which vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM starts to be generated becomes 11.31 deg based on the foregoing Formula (17). Thus, it is found that light shielding (vignetting of the display light L) starts to be generated from a considerably low angle region, and the relative luminance is lowered down to a value equal to or less than 77.1% where α is 45 deg.

[0057] As described above, according to the display apparatus of this embodiment, in the case where the organic EL device (light emitting sections 16R, 16G, and 16B) as a self-luminous type light emitting device and the black matrix layer BM are provided, and the foregoing Formula (11) and Formula (16) are satisfied, in the view angle α range from 0 to 60 deg both inclusive, vignetting of the display light L from the light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is never generated. Thus, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance can be improved.

[0058] Further, in the case where the organic EL device (light emitting sections 16R, 16G, and 16B) as a self-luminous type light emitting device and the black matrix layer BM are provided, and the foregoing Formula (11), Formula (19), and Formula (23) are satisfied, when the aperture dimension W_{BM} of the black matrix layer BM is larger than the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device), even if vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is generated in the view angle α range from 0 to 60 deg both inclusive, the vignetting ratio of the display light L is suppressed to a value equal to or less than 50%. Thus, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance can be improved.

Second Embodiment

[0059] Next, a description will be given of a second embodiment of the present invention. For the same elements as the elements in the first embodiment, the same referential

symbols will be affixed therewith, and descriptions thereof will be omitted as appropriate.

[0060] FIG. 4 illustrates a cross sectional configuration of a display apparatus (organic EL display apparatus 1A) according to this embodiment. In the organic EL display apparatus 1A, the aperture dimension W_{BM} of the black matrix layer BM is formed with a size equal to or less than the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device) (corresponding to a specific example of the light emitting region dimension W_{LD}) in the organic EL display apparatus 1 described in the first embodiment. In addition, the organic EL display apparatus 1A corresponds to an embodiment in a case that problems in the life, the power consumption and the like of the organic EL device are not much generated. That is, in the organic EL display apparatus 1A of this embodiment, first, the following Formula (24) is satisfied.

$$W_{BM} - W_{EL} \leq 0 \quad (24)$$

[0061] An overlap amount as the difference value between the light emitting region dimension W_{EL} of the organic EL device and the aperture dimension W_{BM} of the black matrix layer BM ($W_{EL} - W_{BM}$) is desirably twice or more a margin in layering the opposed substrate 15 and the drive substrate 11. Further, in this embodiment, though light shielding on the front side is generated in the position at the view angle α of 0 degrees as well, the section that has been hidden becomes viewable. Thus, as long as a portion of shadow region by the black matrix layer BM is overlapped with the overlap region of the organic EL device and the black matrix layer BM, actual luminance lowering is not generated.

[0062] (Case with No Vignetting)

[0063] Thus, in the organic EL display apparatus 1A of this embodiment, when the portion of shadow region by the black matrix layer BM is overlapped with the overlap region of the organic EL device and the black matrix layer BM described above, vignetting of the display light L can be perfectly prevented. That is, considering Formula (14) and Formula (15) in the first embodiment, if the following Formula (25) is established, vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is never generated in the view angle range from 0 deg to α both inclusive.

$$\alpha \leq \tan^{-1}((W_{EL} - W_{BM})/(2 * D)) \quad (25)$$

[0064] Further, as described in the first embodiment, in a general display apparatus, even if vignetting is generated at the view angle α equal to or more than 60 deg, it possibly leads to no large practical problem. Further, as described in the first embodiment, the reason why $\alpha=60$ deg is adopted is as follows. That is, it is regarded that 60 deg is not only a mathematical agreement but also is the angle as one index for a person skilled in the art. Thus, where $\alpha=60$ deg is assigned to Formula (25), the following Formula (26) is established. However, in this case, as in the first embodiment, in the case where the aperture ratio is small (in the case where the value of $(W_{EL} - W_{BM})$ is large), it means that the film thickness of the protective layer 13 and the film thickness of the sealing layer 14 are significantly small. Thus, considering life lowering due to increase of the current density, heat resistance in the process and the like, the aperture ratio is desirably as large as possible (the value of $(W_{EL} - W_{BM})$ is desirably as small as possible).

$$2\sqrt{3} \leq (W_{EL} - W_{BM})/D \quad (26)$$

[0065] In the organic EL display apparatus 1A configured as above, in the case where the foregoing Formula (24) and Formula (26) are satisfied, as in the first embodiment, in the view angle α range from 0 to 60 deg both inclusive, vignetting of the display light L from the light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is never generated.

[0066] (Case with Vignetting on Some Level)

[0067] Next, as in the first embodiment, studies will be made on a case where the region actually light-shielded caused by light shielding by the black matrix layer BM exists in the angle range equal to or less than the view angle α (case that vignetting of the display light L from the light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is generated). In this case, considering the foregoing Formula (26), the following Formula (27) is established. Further, where $\alpha=60$ deg is assigned to Formula (27) in the same manner as that of the foregoing case, the following Formula (28) is established.

$$\alpha > \tan^{-1}((W_{EL} - W_{BM})/(2 * D)) \quad (27)$$

$$2\sqrt{3} > (W_{EL} - W_{BM})/D \quad (28)$$

[0068] The ratio of vignetting of the display light L caused by light shielding by the black matrix layer BM (light shielding ratio of the display light L) is proportional to the ratio between the dimension L_B of the region actually light-shielded by the portion of shadow region and the aperture dimension W_{BM} of the black matrix layer BM. Thus, the vignetting ratio of the display light L is expressed by the following Formula (29). Therefore, to set the vignetting ratio of the display light L to a value equal to or less than 50%, it is enough that the following Formula (30) is satisfied. Where the following Formula (30) is modified, the following Formula (31) is established.

$$(\text{vignetting ratio of display light } L) = (L_B / W_{BM}) \quad (29)$$

$$0.5 \geq (L_B / W_{BM}) \geq 0 \quad (30)$$

$$0.5 * W_{EL} \geq D * \tan \alpha \geq 0.5 * (W_{EL} - W_{BM}) \quad (31)$$

[0069] Further, in the Formula (31), where the appropriate numeral value range from 30 deg to 60 deg both inclusive as an application range of the view angle α is applied as in the first embodiment, the following formula (32) is established.

$$(\sqrt{3}/2) * W_{EL} \geq D \geq (\sqrt{3}/2) * (W_{EL} - W_{BM}) \quad (32)$$

[0070] In the organic EL display apparatus 1A configured as above, in the case where the foregoing Formula (24), Formula (28), and Formula (32) are satisfied, when the aperture dimension W_{BM} of the black matrix layer BM is equal to or less than the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device), even if vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is generated in the view angle α range from 0 to 60 deg both inclusive, the vignetting ratio of the display light L is suppressed to a value equal to or less than 50%.

[0071] As described above, according to the display apparatus of this embodiment, in the case where the organic EL device (light emitting sections 16R, 16G, and 16B) as a self-luminous type light emitting device and the black matrix layer BM are provided, and the foregoing Formula (24) and Formula (26) are satisfied, in the view angle α range from 0 to 60 deg both inclusive, vignetting of the display light L from the

light emitting sections 16R, 16G, and 16B (organic EL device) caused by light shielding by the black matrix layer BM is never generated. Thus, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance can be improved.

[0072] Further, in the case where the organic EL device (light emitting sections 16R, 16G, and 16B) as a self-luminous type light emitting device and the black matrix layer BM are provided, and the foregoing Formula (24), Formula (28), and Formula (32) are satisfied, when the aperture dimension W_{BM} of the black matrix layer BM is equal to or less than the light emitting region dimension W_{EL} of the light emitting sections 16R, 16G, and 16B (organic EL device), even if vignetting of the display light L from the organic EL device caused by light shielding by the black matrix layer BM is generated in the view angle α range from 0 to 60 deg both inclusive, the vignetting ratio of the display light L is suppressed to a value equal to or less than 50%. Thus, in the display apparatus including the self-luminous type light emitting device, view angle characteristics of luminance can be improved.

[0073] While the invention has been described with reference to the first and the second embodiments, the invention is not limited to these embodiments, and various modifications are able to be made.

[0074] For example, in the display apparatus of the present invention, for example, as illustrated in FIG. 5(A), in the respective pixels 10R, 10G, and 10B, the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{EL} of the light emitting device (light emitting sections 16R, 16G, and 16B) in the horizontal direction (X direction in the figure) are preferably longer than those in the vertical direction (Y direction in the figure) (a dimension L_H in the horizontal direction of the pixel is preferably longer than a dimension L_V in the vertical direction of the pixel), respectively. That is, the configuration illustrated in FIG. 5(A) is more preferable than a configuration in which in the respective pixels 10R, 10G, and 10B, the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{EL} of the light emitting device (light emitting sections 16R, 16G, and 16B) in the vertical direction are longer than those in the horizontal direction (the dimension L_V in the vertical direction of the pixel is longer than the dimension L_H in the horizontal direction of the pixel) as illustrated in FIG. 5(B), for example. The reason thereof is as follows. In general, regarding audio visual direction, visibility in the horizontal direction is high. Considering such a fact, when a pixel shape is made so that the pixel pitch is increased in the horizontal direction necessitating a large view angle in actual usage, and the pixel pitch is decreased in the vertical direction not necessitating a large view angle in actual usage, it is possible to further improve the view angle characteristics of luminance in the horizontal direction in addition to the effects in the foregoing embodiments.

[0075] Further, in the foregoing embodiments, the description has been given of the organic EL display apparatuses 1 and 1A including the organic EL device in the light emitting sections 16R, 16G, and 16B as an example of a self-luminous type display apparatus including a self-luminous type light emitting device. However, the present invention is applicable to an inorganic EL display apparatus including an inorganic EL device as a self-luminous type light emitting device and other self-luminous type display apparatus such as an FED (Field Emission Display).

1. A display apparatus in which a plurality of pixels are arranged in a state of matrix as a whole, comprising:

- a pair of substrates;
 - a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates; and
 - a black matrix layer formed in a region corresponding to a portion between each pixel on the other substrate of the pair of substrates, and
- satisfying the following Formula (41):

$$2\sqrt{3} \leq (W_{BM} - W_{LD})/D \quad (41)$$

where W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer.

2. The display apparatus according to claim 1, wherein in each pixel, the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the horizontal direction are respectively longer than the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the vertical direction.

3. The display apparatus according to claim 1, wherein the light emitting device is an organic EL device, and the display apparatus is configured as an organic EL display apparatus.

4. A display apparatus in which a plurality of pixels are arranged in a state of matrix as a whole, comprising:

- a pair of substrates;
- a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates; and
- a black matrix layer formed in a region corresponding to a portion between each pixel on the other substrate of the pair of substrates, and satisfying the following Formula (42) to Formula (44):

$$2\sqrt{3} > (W_{BM} - W_{LD})/D \quad (42)$$

$$W_{LD} < W_{BM} \quad (43)$$

$$(\sqrt{3}/2) * W_{BM} \geq D \geq (1/\sqrt{3}) * (W_{BM} - W_{LD}) \quad (44)$$

where W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer.

5. The display apparatus according to claim 4, wherein in each pixel, the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the horizontal direction are respectively longer than the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the vertical direction.

6. The display apparatus according to claim 4, wherein the light emitting device is an organic EL device, and the display apparatus is configured as an organic EL display apparatus.

7. A display apparatus in which a plurality of pixels are arranged in a state of matrix as a whole, comprising

- a pair of substrates;
- a self-luminous type light emitting device formed in a region corresponding to each pixel on one substrate of the pair of substrates; and

a black matrix layer formed in a region corresponding to a portion between each pixel on the other substrate of the pair of substrates, and satisfying the following Formula (45) to Formula (47):

$$2\sqrt{3} > (|W_{BM} - W_{LD}|/D) \quad (45)$$

$$W_{LD} \geq W_{BM} \quad (46)$$

$$(\sqrt{3}/2) * W_{LD} \geq D \geq (\sqrt{3}/2) * (W_{LD} - W_{BM}) \quad (47)$$

where W_{BM} represents an aperture dimension of the black matrix layer; W_{LD} represents a light emitting region dimension of the light emitting device; and D represents an air length between the light emitting device and the black matrix layer.

8. The display apparatus according to claim 7, wherein in each pixel, the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the horizontal direction are respectively longer than the aperture dimension W_{BM} of the black matrix layer and the light emitting region dimension W_{LD} of the light emitting device in the vertical direction.

9. The display apparatus according to claim 7, wherein the light emitting device is an organic EL device, and the display apparatus is configured as an organic EL display apparatus.

* * * * *

专利名称(译)	显示装置		
公开(公告)号	US20110220924A1	公开(公告)日	2011-09-15
申请号	US12/674093	申请日	2008-08-27
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	JOLED INC.		
[标]发明人	FUKUDA TOSHIHIRO		
发明人	FUKUDA, TOSHIHIRO		
IPC分类号	H01L51/50		
CPC分类号	H01L51/5284 H01L27/3211		
优先权	2007224456 2007-08-30 JP		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种显示装置，其包括能够提高亮度的视角特性的自发光型发光装置。提供作为自发光型发光器件的有机EL器件（发光部分16R，16G和16B）和黑色矩阵层BM，并且满足式（11）和式（16）。在视角 α 为 0° 至 60° （包括 0° 和 60° ）的范围内，从不产生由黑色矩阵层BM的光屏蔽引起的来自发光部分16R，16G和16B（有机EL装置）的显示光L的渐晕。同时，在满足公式（11），公式（19）和公式（23）的情况下，即使在由黑色矩阵层BM的遮光引起的来自有机EL装置的显示光L的渐晕中产生视角 α 在 0° 至 60° 的范围内（包括 0° 和 60° ），显示光L的渐晕率被抑制到等于或小于50%的值。

