



US008054255B2

(12) **United States Patent**
Lee

(10) **Patent No.:** **US 8,054,255 B2**
(45) **Date of Patent:** ***Nov. 8, 2011**

(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE AND DRIVING METHOD THEREOF**

(75) Inventor: **Wook Lee, Suwon (KR)**

(73) Assignee: **Samsung Mobile Display Co., Ltd.,
Yongin (KR)**

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 797 days.

This patent is subject to a terminal dis-
claimer.

7,724,247 B2	5/2010	Yamazaki et al.	
7,728,526 B2 *	6/2010	Lee	315/169.3
7,746,317 B2	6/2010	Fu et al.	
7,782,279 B2 *	8/2010	Lee et al.	345/82
7,839,091 B2	11/2010	Kohashikawa et al.	
2002/0011978 A1	1/2002	Yamazaki et al.	
2004/0041928 A1	3/2004	Hirakoso et al.	
2005/0057191 A1 *	3/2005	Jo et al.	315/291
2005/0253835 A1	11/2005	Kawase	

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2000-221944 8/2000

(Continued)

(21) Appl. No.: **11/861,109**

(22) Filed: **Sep. 25, 2007**

(65) **Prior Publication Data**

US 2008/0186260 A1 Aug. 7, 2008

(30) **Foreign Application Priority Data**

Feb. 5, 2007 (KR) 10-2007-0011788

(51) **Int. Cl.**
G09G 3/30 (2006.01)

(52) **U.S. Cl.** **345/77; 345/82; 345/76**

(58) **Field of Classification Search** **345/45-48,**
345/76-77, 80, 82-84, 87, 204, 207-214,
345/692, 697

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,315,694 A	5/1994	Kasano	
5,754,150 A *	5/1998	Matsui	345/89
7,369,183 B2	5/2008	Oka et al.	
7,656,383 B2 *	2/2010	Hedrick	345/102
7,679,602 B2 *	3/2010	Owyeung et al.	345/156

OTHER PUBLICATIONS

Korean Patent Abstracts, Publication No. 1020060078590 A, Pub-
lished on Jul. 5, 2006, in the name of Kwon.

(Continued)

Primary Examiner — Alexander S Beck


Assistant Examiner — Mansour M Said

(74) *Attorney, Agent, or Firm* — Christie, Parker & Hale,
LLP

(57) **ABSTRACT**

An organic light emitting display device including: an optical sensor for generating an optical sensor signal corresponding to brightness of ambient light; a first luminance control unit for generating a pulse width (EW1) of a brightness control signal in accordance with the optical sensor signal; a second luminance control unit for generating a fluctuated value (EW2) for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of the image; and a luminance control signal generation unit for generating a luminance control signal (Vc) for controlling a scan driver in accordance with the pulse width of the brightness control signal and the fluctuated value.

16 Claims, 5 Drawing Sheets

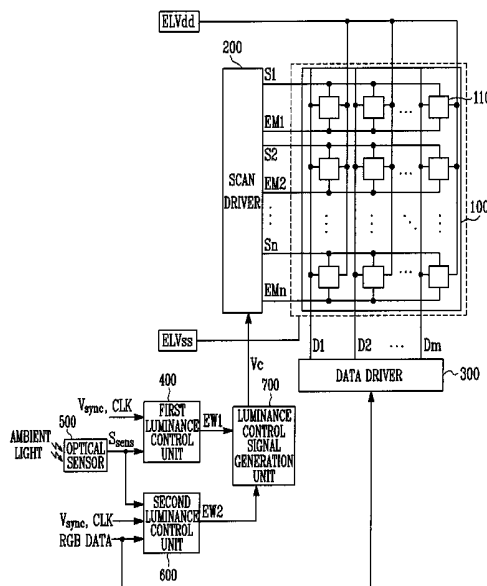

US 8,054,255 B2

Page 2

U.S. PATENT DOCUMENTS

2006/0001624	A1	1/2006	Lee	
2006/0114205	A1	6/2006	Shen et al.	
2006/0244387	A1	11/2006	Park et al.	
2007/0146302	A1	6/2007	Liu et al.	
2008/0186262	A1	8/2008	Lee	
2008/0186263	A1	8/2008	Lee	
2008/0186264	A1	8/2008	Lee	
2008/0204438	A1*	8/2008	Song et al.	345/207
2008/0246699	A1*	10/2008	Oh	345/76
2009/0166510	A1*	7/2009	Park et al.	250/205

FOREIGN PATENT DOCUMENTS

JP	2001-134255	5/2001
JP	2005-308857	11/2005
JP	2007-025317	2/2007
KR	1992-0004293 B1	6/1992
KR	1999-0030441 U	7/1999
KR	10-2000-0033177	6/2000
KR	10-2004-0015910	10/2005
KR	10-2005-0099303	10/2005
KR	10-2006-0010912	2/2006
KR	10-2006-0012738	2/2006
KR	10-2006-0035831	4/2006
KR	10-2006-0078590	7/2006
KR	10-2006-0079573	7/2006
KR	10-0629587 B1	9/2006

KR	10-2006-0112997 A	11/2006
KR	10-2006-0113009	11/2006
KR	10-2006-0120643	11/2006

OTHER PUBLICATIONS

Korean Patent Abstracts, Publication No. 1020060079573 A, Published on Jul. 6, 2006, in the name of Kwon.

Korean Patent Abstracts, Publication No. 10-2006-0112997, dated Nov. 2, 2006, in the name of Young Jong Park et al.

U.S. Office action dated Sep. 1, 2010, for related U.S. Appl. No. 11/861,107.

U.S. Office action dated Sep. 16, 2010, for related U.S. Appl. No. 11/861,128.

U.S. Office action dated Sep. 14, 2010, for related U.S. Appl. No. 11/861,112.

U.S. Office action dated Feb. 24, 2011, for cross-reference U.S. Appl. No. 11/861,128.

U.S. Office action dated Feb. 25, 2011, for cross-reference U.S. Appl. No. 11/861,112.

KIPO Office action dated Mar. 27, 2008, for Korean Patent application 10-2007-0018657, 7 pages.

Korean Patent Abstract for Korean Publication 10-1990-0003762, dated Mar. 27, 1990, corresponding to Korean Patent 1992-0004293 listed above.

U.S. Office action dated Mar. 18, 2011, for cross-reference U.S. Appl. No. 11/902,649, 16 pages.

* cited by examiner

FIG. 1

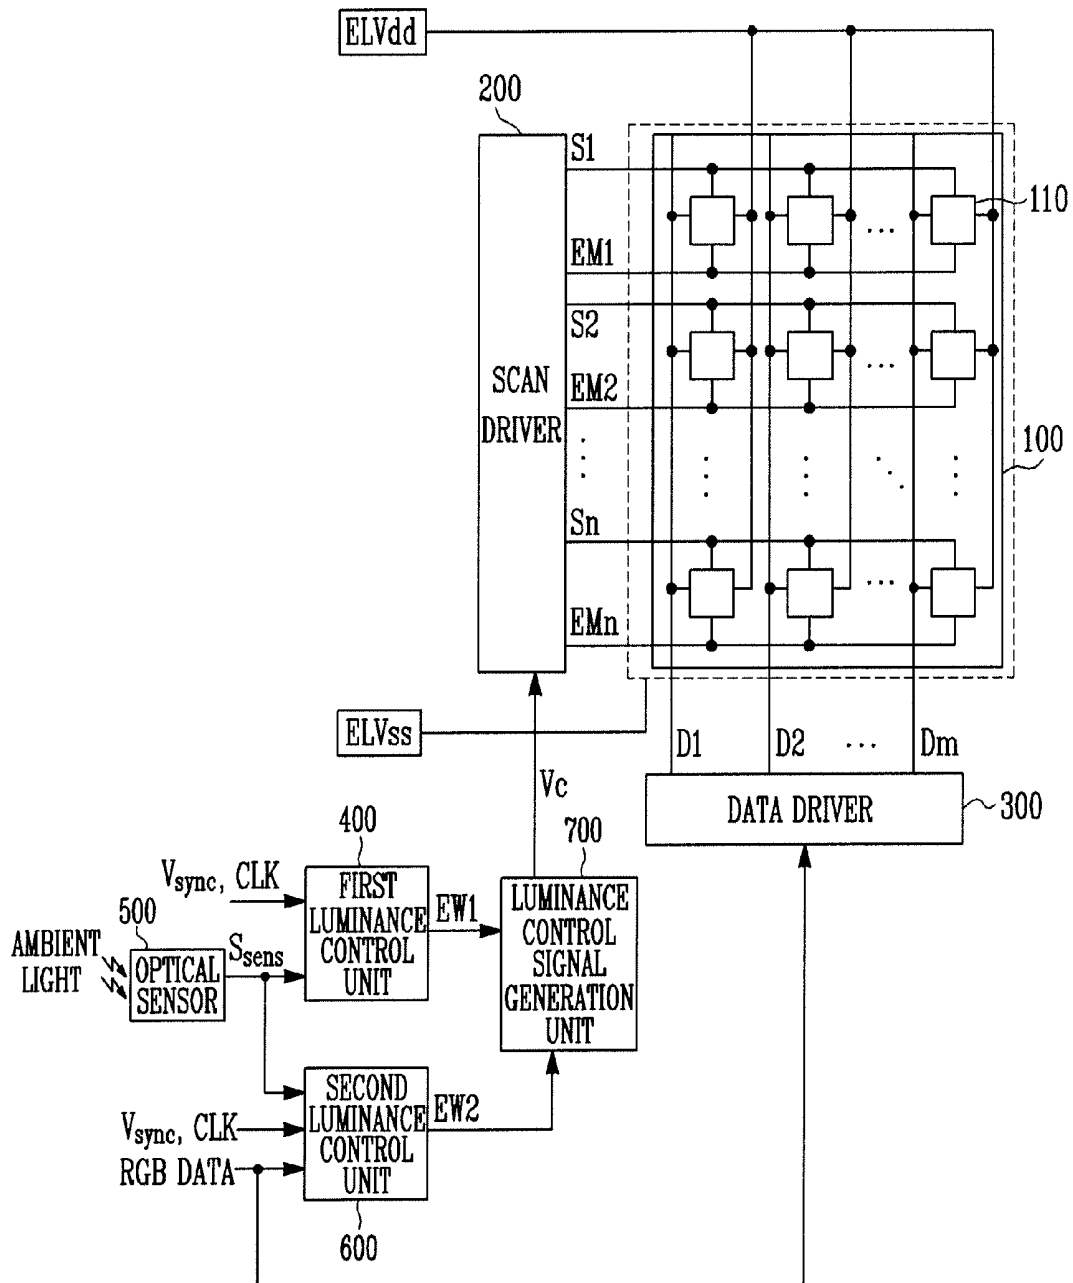


FIG. 2

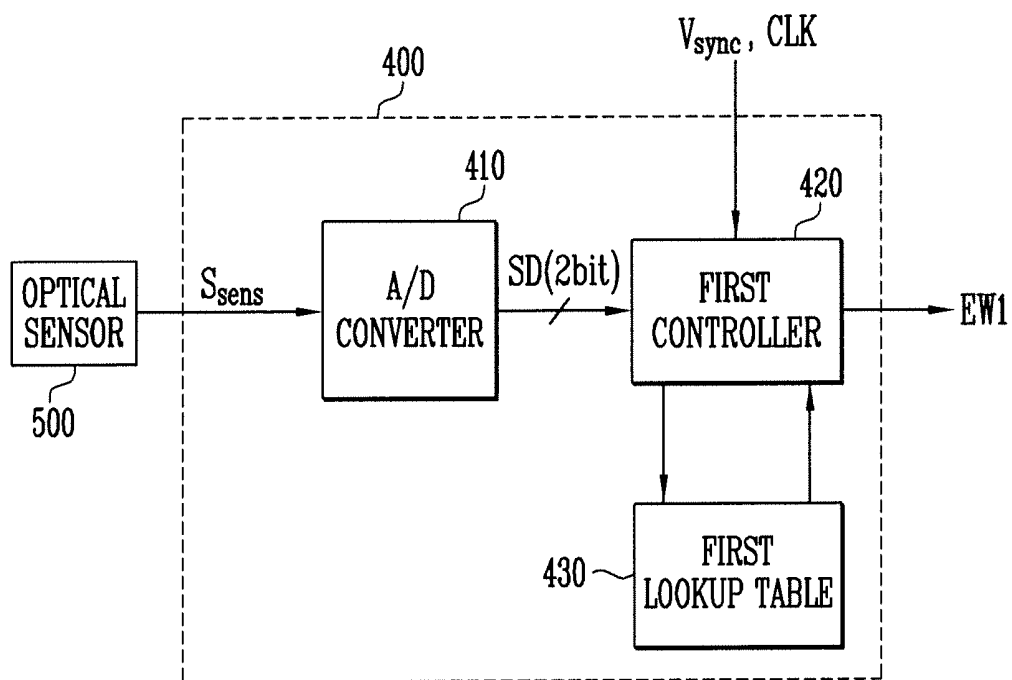


FIG. 3

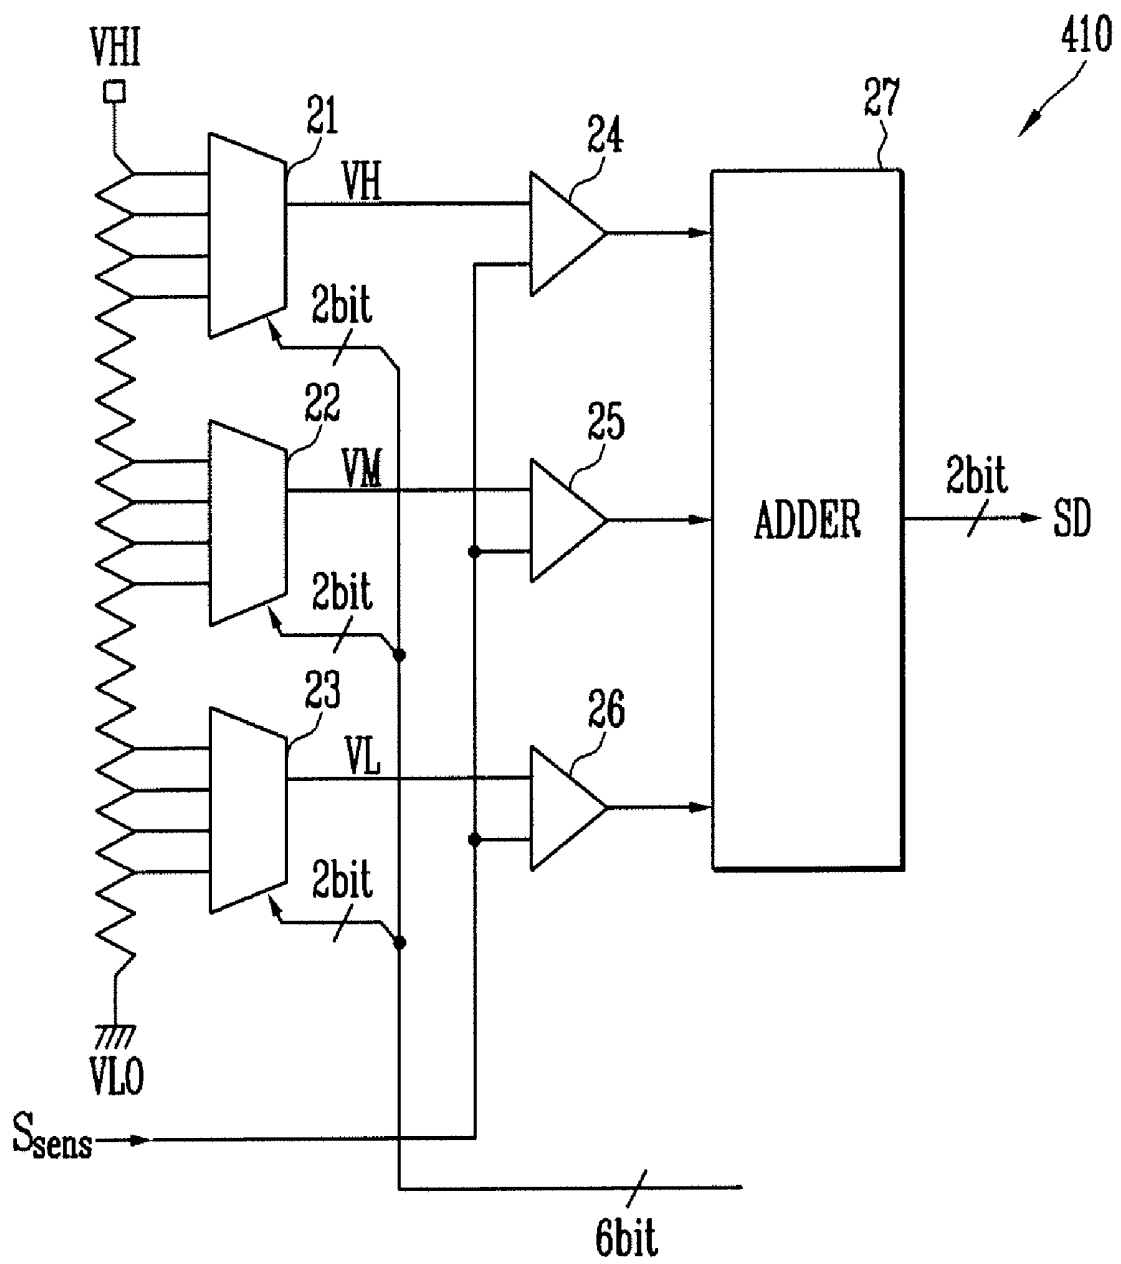


FIG. 4

430

SD	EW1 (HSYNC)
00	109
01	181
10	253
11	325

FIG. 5

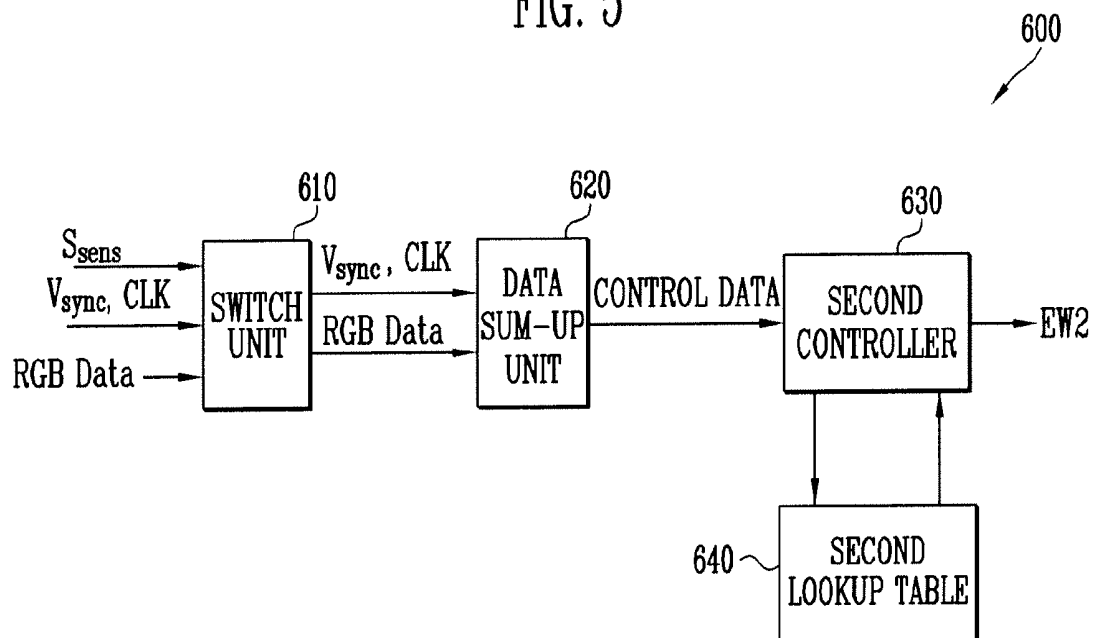


FIG. 6

640

UPPER 5-BIT VALUE (CONTROL DATA)	LIGHT EMITTING RATE	EW2 (HSYNC)
0	0%	0
1	4%	0
2	7%	0
3	11%	0
4	14%	0
5	18%	2
6	22%	4
7	25%	6
8	29%	8
9	33%	10
10	36%	12
11	40%	14
12	43%	16
13	47%	18
14	51%	20
15	54%	22
16	58%	24
17	61%	26
18	65%	28
19	69%	30
20	72%	32
21	76%	34
22	79%	36
23	83%	38
24	87%	40
25	90%	42
26	94%	44
27	98%	46
28	—	—
29	—	—
30	—	—
31	—	—

ORGANIC LIGHT EMITTING DISPLAY DEVICE AND DRIVING METHOD THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority to and the benefit of Korean Patent Application No. 10-2007-0011788, filed on Feb. 5, 2007, in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

BACKGROUND

1. Field of the Invention

The present invention relates to an organic light emitting display device and a driving method thereof.

2. Discussion of Related Art

In recent years, various flat panel displays, which have reduced weight and volume compared to cathode ray tubes, have been developed. In particular, organic light emitting diode display devices have attracted public attention, because the organic light emitting diode display devices have an excellent luminance and color purity since organic compounds are used as light emission material.

Such an organic light emitting display device is expected to be effectively used for portable display devices and the like, since it is thin and lightweight and driven at a low electric power.

However, conventional organic light emitting display devices emit light with a constant luminance regardless of surrounding brightness, and therefore their visibility is varied according to the surrounding brightness even if an image is displayed with the same grey levels. For example, an image, which is displayed when the surrounding brightness is high, has a reduced visibility, compared to an image displayed when the surrounding brightness is low.

Also, in conventional organic light emitting display devices, the amount of electric current that flows to a display area increases as the number of pixels that emit the light during one frame period increases. Further, if there are pixels among the light-emitting pixels, that display high gray levels, a larger amount of electric current flows to the display area, resulting in increased power consumption.

SUMMARY OF THE INVENTION

Aspects of embodiments of the present invention are directed an organic light emitting display device capable of controlling a luminance according to brightness of ambient light and data of one frame, reducing power consumption, and/or preventing an excessive reduction of luminance, and a driving method thereof.

An exemplary embodiment of the present invention provides an organic light emitting display device for displaying an image and having a plurality of scan lines, a plurality of light emission control lines and a plurality of data lines. The organic light emitting display includes: a display area including a plurality of pixels coupled to the scan lines, the light emission control lines and the data lines; a scan driver electrically coupled to the display area through the scan lines and the light emission control lines; a data driver electrically coupled to the display area through the data lines; an optical sensor for generating an optical sensor signal corresponding to brightness of ambient light; a first luminance control unit for generating a pulse width of a brightness control signal in accordance with the optical sensor signal; a second luminance control unit for generating a fluctuated value for the

pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of the image; and a luminance control signal generation unit for generating a luminance control signal for controlling the scan driver in accordance with the pulse width of the brightness control signal and the fluctuated value.

In one embodiment, the second luminance control unit is controlled to be turned on or off according to the optical sensor signal. The second luminance control unit may be turned off when the optical sensor signal has a lower value than a reference value, and may be turned on when the optical sensor signal has a higher value than the reference value.

In one embodiment, the scan driver generates a light emission control signal having a width corresponding to the luminance control signal, and supplies the generated light emission control signal to at least one of the light emission control lines. A light emission time of the pixels may be controlled in accordance with the width of the light emission control signal.

In one embodiment, the first luminance control unit includes: an analog/digital converter for converting the optical sensor signal, which is an analog signal, into a digital sensor signal; a first lookup table for storing information of the pulse width of the brightness control signal corresponding to the digital sensor signal; and a first controller for extracting the information of the pulse width of the brightness control signal corresponding to the digital sensor signal from the first lookup table, and for supplying the information of the pulse width to the luminance control signal generation unit. The pulse width of the brightness control signal may be set so that a luminance of the display area is reduced if the digital sensor signal is a digital sensor signal corresponding to a darkest brightness level of the ambient light.

In one embodiment, the second luminance control unit includes: a data sum-up unit for summing up the data of one frame to generate sum-up data and for generating, as control data, at least two bit values including most significant bits of the sum-up data; a second lookup table for storing information of the fluctuated value corresponding to the control data; and a second controller for extracting the information of the fluctuated value corresponding to the control data from the second lookup table and for supplying the extracted information of the fluctuated value to the luminance control signal generation unit. The fluctuated value may be set so that a luminance of the display area is decreased with an increase in value of the control data. The second luminance control unit may further include a switch unit for transmitting the data of one frame to the data sum-up unit or interrupting transmission of the data to the data sum-up unit according to the optical sensor signal.

In one embodiment, the luminance control signal generation unit processes an operation of the pulse width of the brightness control signal with the fluctuated value, and generates the luminance control signal in accordance with a result of the operation of the pulse width with the fluctuated value. The luminance control signal generation unit may add or subtract the pulse width of the brightness control signal with the fluctuated value, and may generate the luminance control signal having a pulse width information of the light emission control signal in accordance with the pulse width of the brightness control signal and the fluctuated value.

Another exemplary embodiment of the present invention provides a method for driving an organic light emitting display device having a display area comprising a plurality of pixels. The method includes: generating an optical sensor signal corresponding to brightness of ambient light; generating a pulse width of a brightness control signal in accordance

with the optical sensor signal; generating a fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of an image; and controlling a luminance of the display area using the pulse width of the brightness control signal and the fluctuated value.

In one embodiment, the optical sensor signal suppresses the fluctuated value from being generated when the optical sensor signal has a lower value than a reference value.

In one embodiment, the generating the pulse width of the brightness control signal includes: converting the optical sensor signal into a digital sensor signal; and extracting information of the pulse width of the brightness control signal corresponding to the digital sensor signal.

In one embodiment, the generating the fluctuated value includes: adding the data of one frame to generate sum-up data and generating, as control data, at least two bit values including the most significant bits of the sum-up data; and extracting information of the fluctuated value corresponding to the control data.

In one embodiment, the controlling the luminance of the display area includes: generating a luminance control signal corresponding to the pulse width of the brightness control signal and the fluctuated value; generating a light emission control signal having a pulse width corresponding to the luminance control signal; and controlling a light emission time of the pixels included in the display area to correspond to the light emission control signal. The luminance control signal may be generated by adding or subtracting the pulse width of the brightness control signal with the fluctuated value.

Another exemplary embodiment of the present invention provides an organic light emitting display device for displaying an image and having a plurality of scan lines, a plurality of light emission control lines and a plurality of data lines. The organic light emitting display includes: a display area including a plurality of pixels coupled to the scan lines, the light emission control lines and the data lines; a scan driver electrically coupled to the display area through the scan lines and the light emission control lines; a data driver electrically coupled to the display area through the data lines; an optical sensor for generating an optical sensor signal corresponding to brightness of ambient light; a luminance control signal generation unit for generating a luminance control signal for controlling the scan driver in accordance with a pulse width of a brightness control signal and a fluctuated value; a first luminance control unit for providing the pulse width of the brightness control signal in accordance with the optical sensor signal; and a second luminance control unit for providing the fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of the image.

In one embodiment, the second luminance control unit is controlled to be turned on or off according to the optical sensor signal.

BRIEF DESCRIPTION OF THE DRAWINGS

These and/or other aspects and features of the invention will become apparent and more readily appreciated from the following description of the exemplary embodiments, taken in conjunction with the accompanying drawings of which:

FIG. 1 is a block diagram showing a configuration of an organic light emitting display device according to one exemplary embodiment of the present invention.

FIG. 2 is a block diagram showing one exemplary embodiment of a first luminance control unit as shown in FIG. 1.

FIG. 3 is a block diagram showing one exemplary embodiment of an A/D converter shown in FIG. 2.

FIG. 4 is an exemplary embodiment of a table illustrating values of a first lookup table shown in FIG. 2.

FIG. 5 is a block diagram showing one exemplary embodiment of a second luminance control unit shown in FIG. 1.

FIG. 6 is an exemplary embodiment of a table illustrating values of a second lookup table shown in FIG. 5.

DESCRIPTION OF MAJOR PARTS IN THE FIGURES

100: display area	200: scan driver
300: data driver	400: first luminance control unit
500: optical sensor	600: second luminance control unit
700: luminance control signal generation unit	

DETAILED DESCRIPTION OF EMBODIMENTS

Hereinafter, exemplary embodiments according to the present invention will be described with reference to the accompanying drawings. Here, when one element is referred to as being connected to another element, one element may be not only directly connected to the another element but instead may be indirectly connected to the another element via one or more other elements. Further, some of the elements that are not essential to the complete description of the invention have been omitted for clarity. Also, like reference numerals refer to like elements throughout.

Exemplary embodiments according to the present invention provide an organic light emitting display device capable of controlling luminance according to brightness of ambient light and data of one frame. The embodiments of the present invention may result in reduced power consumption.

If the brightness of the ambient light and the luminance corresponding to data of one frame are both employed to reduce or limit a luminance of a display area, then the luminance of the display area may be excessively reduced, resulting in deteriorated visibility. Therefore, in an exemplary embodiment according to the present invention, when the brightness level of the ambient light is below a reference level (e.g., a predetermined or preset brightness level), the data of one frame is not used to further reduce or limit the luminance of the display area.

FIG. 1 is a block diagram showing a configuration of an organic light emitting display device according to one exemplary embodiment of the present invention.

Referring to FIG. 1, the organic light emitting display device according to one embodiment of the present invention includes a display area 100, a scan driver 200, a data driver 300, a first luminance control unit 400, an optical sensor 500, a second luminance control unit 600 and a luminance control signal generation unit 700.

The display area 100 includes a plurality of pixels 110 connected to scan lines (S1 to Sn), light emission control lines (EM1 to EMn) and data lines (D1 to Dm). Here, one pixel 110 has at least one organic light emitting diode and may be composed of at least two subpixels which emit lights having different colors, each subpixel having one organic light emitting diode having a corresponding color.

The display area 100 displays an image in accordance with a first power source (ELVdd) and a second power source (ELVss) supplied from the outside, a scan signal and a light

emission control signal supplied from the scan driver **200**; and a data signal supplied from the data driver **300**.

The scan driver **200** is electrically connected with the display area **100** through the scan lines (S1 to Sn) and the light emission control lines (EM1 to EMn). The scan driver **200** generates the scan signal and the light emission control signal. The scan signal generated in the scan driver **200** is sequentially supplied to each of the scan lines (S1 to Sn), and the light emission control signal is sequentially supplied to each of the light emission control lines (EM1 to EMn).

Here, in one embodiment of the present invention, the scan driver **200** is set so that it can be controlled by using the luminance control signal generation unit **700**. More particularly, in one embodiment, the scan driver **200** generates a light emission control signal having a width (or a pulse width) corresponding to a luminance control signal (Vc) supplied from the luminance control signal generation unit **700** and supplies the generated light emission control signal to the light emission control lines (EM). That is, the width (or the pulse width) of the light emission control signal generated in the scan driver **200** is controlled (or adjusted) by using the luminance control signal (Vc), and a light emission time of the pixels **110** is varied according to the changes in the pulse width of the light emission control signal, resulting in adjustment of the entire brightness of the display area **100**.

The data driver **300** is electrically connected with the display area **100** through the data lines (D1 to Dm). The data driver **300** generates a data signal corresponding to image data (RGB Data) inputted thereto during one frame period. The data signal generated in the data driver **300** is supplied to the data lines (D1 to Dm), and then supplied to each of the pixels **110** in synchronization with the scan signal.

The first luminance control unit **400** generates a pulse width (EW1) of the brightness control signal for controlling a pulse width of the light emission control signal in accordance with an optical sensor signal (Ssens) supplied from the optical sensor **500**, and outputs the generated pulse width (EW1) of the brightness control signal into the luminance control signal generation unit **700**.

More particularly, the first luminance control unit **400** selects a pulse width of the light emission control signal according to control signals supplied from the outside (such as the vertical synchronizing signal (Vsync) and the clock signal (CLK)), and the optical sensor signal (Ssens) supplied from the optical sensor **500**; and outputs the pulse width (EW1) of the brightness control signal corresponding to the pulse width of the light emission control signal.

The first luminance control unit **400** outputs the pulse width (EW1) of the brightness control signal for controlling the display area **100** so that a luminance of the display area **100** can be decreased (that is, a light emission time of the pixels can be decreased) as the optical sensor signal corresponding to a relatively dark brightness level among the previously set levels of the brightness of the ambient light is supplied to the display area **100**. For example, the first luminance control unit **400** outputs the pulse width (EW1) of the brightness control signal that maximally limits the light emission time of the pixels **110** when the optical sensor signal (Ssens) corresponding to the darkest brightness level among the previously set levels of the brightness of the ambient light is supplied to the display area **100**.

The optical sensor **500** has an optical sensor element, such as a transistor or photodiode, to sense brightness of external light, namely the ambient light, and generates the optical sensor signal (Ssens) to correspond to the brightness of the ambient light. The optical sensor signal (Ssens) generated in

the optical sensor **500** is supplied to the first luminance control unit **400** and the second luminance control unit **600**.

The second luminance control unit **600** generates a fluctuated value (EW2) for a pulse width (EW1) of the brightness control signal in accordance with the optical sensor signal (Ssens) supplied from the optical sensor **500**, and the data (RGB Data) of one frame, and outputs the generated fluctuated value (EW2) into the luminance control signal generation unit **700**.

In one exemplary embodiment, the second luminance control unit **600** is controlled to be turned on or off in accordance with the optical sensor signal (Ssens). For example, the second luminance control unit **600** may be controlled to be turned off if the optical sensor signal (Ssens) having a value less than a reference value (e.g., a previously set value or a predetermined value) is supplied to the second luminance control unit **600**, and controlled to be turned on if the optical sensor signal (Ssens) having a value greater than the reference value (e.g., the previously set value or the predetermined value) is supplied. In other words, it is determined whether or not an operation of the second luminance control unit **600** is carried out according to the optical sensor signal (Ssens), and therefore it is determined whether or not the fluctuated value is generated.

While this embodiment is described in detail, assuming that an analog optical sensor signal (Ssens) is supplied from the optical sensor **500** to the second luminance control unit **600**, the present invention is not limited thereto. For example, in one embodiment, an analog/digital converter (not shown) is provided inside the optical sensor **500**, and therefore it may convert an analog optical sensor signal (Ssens) into a digital signal, for example, a 1-bit digital signal having a value of '0' or '1' and provide the 1-bit digital signal to the second luminance control unit **600**. In this case, the second luminance control unit **600** may be set so that it can be turned on/off in accordance with the digital signal supplied to the second luminance control unit **600**.

If the optical sensor signal (Ssens) that turns on the second luminance control unit **600** is supplied, the second luminance control unit **600** selects the fluctuated value (EW2) for the pulse width (EW1) of the brightness control signal to correspond to the sum-up value of the data (RGB Data) supplied to the second luminance control unit **600** during one frame period, a synchronizing signal (Vsync), a clock signal (CLK) and the like. The fluctuated value (EW2) selected by (or in) the second luminance control unit **600** is supplied to the luminance control signal generation unit **700**.

The luminance control signal generation unit **700** generates a luminance control signal (Vc) by using the pulse width (EW1) of the brightness control signal supplied from the first luminance control unit **400** and the fluctuated value (EW2) supplied from the second luminance control unit **600**, and supplies the generated luminance control signal (Vc) to the scan driver **200** to control a pulse width of the light emission control signal generated in the scan driver **200**.

In one embodiment, the luminance control signal generation unit **700** carries out (or processes) an operation of the pulse width (EW1) of the brightness control signal with the fluctuated value (EW2), and generates a luminance control signal (Vc) corresponding to a result of the operation of the pulse width with the fluctuated value.

For example, the luminance control signal generation unit **700** may add or subtract the pulse width (EW1) of the brightness control signal with the fluctuated value (EW2), and generate a luminance control signal (Vc) having a pulse width information of the light emission control signal corresponding to the resultant pulse width and fluctuated value. In one

embodiment, if a luminance of the display area **100** is set so that it can be increased with the increase in the pulse width of the light emission control signal, then the luminance control signal generation unit **700** limits the luminance of the display area **100** by subtracting the pulse width (EW1) of the brightness control signal and the fluctuated value (EW2) to reduce a pulse width of the light emission control signal so that the luminance of the display area **100** is limited by using all of the two values. In another embodiment, if the case is reversed, that is, a luminance of the display area **100** is set so that it can be decreased with the increase in the pulse width of the light emission control signal, then the luminance control signal generation unit **700** limits the luminance of the display area **100** by adding the pulse width (EW1) of the brightness control signal with the fluctuated value (EW2) to increase a pulse width of the light emission control signal. Also, if the second luminance control unit **600** is turned off by the optical sensor **500**, then the second luminance control unit **600** is controlled so that a light emission control signal corresponding to the pulse width (EW1) of the brightness control signal can be generated in the scan driver **200**, by generating a luminance control signal (Vc) corresponding to the pulse width (EW1) of the brightness control signal set by the first luminance control unit **400**.

According to the above-mentioned organic light emitting display device, the luminance of the display area **100** may be controlled in accordance with the brightness of the ambient light and the data of one frame.

More particularly, the problem that visibility is varied according to the surrounding brightness can be solved by controlling the luminance of the display area **100** to correspond to the brightness of the ambient light, and also a power consumption can be reduced by preventing the luminance of the display area **100** from being set to an excessively bright level when the ambient light is dark.

Also, when the brightness of the ambient light has a value greater than reference value (e.g., the predetermined value) and there are many more pixels displaying high gray levels during one frame period, an excessive electric current may be prevented from flowing to the display area **100** and a power consumption of the organic light emitting display device may be reduced, by controlling the luminance of the display area **100** corresponding to the data of one frame through limiting the pulse width of the light emission control signal to control an amount of electric current flowing to the display area **100**.

Also, the excessive reduction of luminance may be prevented by setting the luminance of the display area **100** so that the optical sensor **500** can turn off the second luminance control unit **600** if the brightness of the ambient light has a lower value than the reference value (e.g., the predetermined value), for example, if the luminance of the display area **100** is maximally limited by the first luminance control unit **400**. For example, in the darkest brightness level in the brightness of the ambient light, if the amount of electric current (namely, an amount of electric current according to the light emission time of the pixels **110**) flowing to the display area **100** is maximally limited by using the pulse width (EW1) information of the brightness control signal generated in the first luminance control unit **400**, then the excessive reduction in luminance may be prevented by turning off the second luminance control unit **600**. In this case, it is possible to prevent unnecessary power consumption and the reduction to the safety margin for memory operation, caused by the operation of the second luminance control unit **600**.

FIG. 2 is a block diagram showing one embodiment of the first luminance control unit **400** shown in FIG. 1.

Referring to FIG. 2, the first luminance control unit **400** in one embodiment includes an analog/digital converter **410**, a first controller **420** and a first lookup table **430**.

The analog/digital converter (hereinafter, referred to as an A/D converter) **410** compares an analog optical sensor signal (Ssens) outputted from the optical sensor **500** to a reference voltage (e.g., a predetermined reference voltage), converts the analog optical sensor signal (Ssens) into a digital sensor signal (SD) corresponding to the reference voltage, and then outputs the converted analog optical sensor signal (Ssens).

For example, in one embodiment, when the A/D converter **410** divides a surrounding brightness into four levels and outputs a 2-bit digital sensor signal (SD) according to the surrounding brightness, the A/D converter **410** may output a digital sensor signal (SD) of "11" in the brightest surrounding brightness level, and output a digital sensor signal (SD) of "10" in a relatively bright surrounding brightness level. Also, the A/D converter **410** may output a digital sensor signal (SD) of "01" in a relatively dark surrounding brightness level, and output a digital sensor signal (SD) of "00" in the darkest surrounding brightness level. The digital sensor signal (SD) outputted in the A/D converter **410** is inputted into the first controller **420**.

The first lookup table **430** stores a pulse width (EW1) information of the brightness control signal corresponding to each of the digital sensor signals (SD). Here, the pulse width (EW1) of the brightness control signal is a data value having an information about a width of the light emission control signal for controlling a light emission time of the pixels **110**. The pulse width (EW1) of the brightness control signal is set so that the luminance of the display area **100** can be reduced by decreasing the light emission time of the pixels **110** when the brightness of the ambient light gets darker, that is, if the brightness of the ambient light is converted into a digital sensor signal (SD) corresponding to a relatively dark brightness level.

The first controller **420** is driven by control signals, such as the synchronizing signal (Vsync) and the clock signal (CLK), supplied therein to extract the pulse width (EW1) information of the brightness control signal, corresponding to digital sensor signals (SD) supplied from the A/D converter **410**, from the first lookup table **430**. The pulse width (EW1) information of the brightness control signal extracted by the first controller **420** is supplied to the luminance control signal generation unit **700**.

FIG. 3 is a diagram showing one exemplary embodiment of the A/D converter **410** shown in FIG. 2.

Referring to FIG. 3, the A/D converter **410** includes first, second and third selectors **21**, **22**, **23**; first, second, and third comparators **24**, **25**, **26** and an adder **27**.

The first to third selectors **21**, **22**, **23** receive a plurality of gray level voltages distributed through a plurality of resistance arrays for generating a plurality of gray level voltages (VHI to VHO), and outputs the gray level voltages corresponding to differently set 2-bit values, which is referred to as reference voltages (VH, VM and VL).

The first comparator **24** compares the analog optical sensor signal (Ssens) with a first reference voltage (VH) and outputs the resultant value. For example, the first comparator **24** may output "1" if an analog optical sensor signal (Ssens) is higher than a first reference voltage (VH), and "0" if an analog optical sensor signal (Ssens) is lower than a first reference voltage (VH).

In the same manner, the second comparator **25** outputs a value obtained by comparing the analog optical sensor signal (Ssens) with a second reference voltage (VM), and the third

comparator **26** outputs a value obtained by comparing the analog optical sensor signal (Ssens) with a third reference voltage (VL).

Also, an area of the analog optical sensor signal (Ssens) corresponding to the same digital sensor signal (SD) may be changed by varying the first to third reference voltages (VH to VL).

The adder **27** adds up all of the resultant values outputted from the first to third comparators **24**, **25**, **26** and outputs the values as a 2-bit digital sensor signal (SD).

Hereinafter, an operation of the A/D converter **410** shown in FIG. **3** will be described in detail, assuming that the first reference voltage (VH) is set to 3V, the second reference voltage (VM) is set to 2V, the third reference voltage (VL) is set to 1V, and a voltage value of the analog optical sensor signal (Ssens) is increased as the ambient light becomes brighter.

If the analog optical sensor signal (Ssens) has a lower voltage than 1V, then all of the first to third comparators **24**, **25**, **26** output '0', and therefore the adder **27** outputs a digital sensor signal (SD) of '00'.

Also, if the analog optical sensor signal (Ssens) has a voltage between 1V and 2V, then the first to third comparators **24**, **25**, **26** output '0', '0', '1', respectively, and therefore the adder **27** outputs a digital sensor signal (SD) of '01'.

In the same manner, if the analog optical sensor signal (Ssens) has a voltage between 2V and 3V, then the adder **27** outputs a digital sensor signal (SD) of '10', and if the analog optical sensor signal (Ssens) has a higher voltage than 3V or more, then the adder **27** outputs a digital sensor signal (SD) of '11'.

The A/D converter **410** divides a brightness of the ambient light into four brightness levels while being driven in the above-mentioned manner, and then outputs '00' in the darkest brightness level, outputs '01' in a relatively dark brightness level, outputs '10' in a relatively bright brightness level, and outputs '11' in the brightest brightness level.

FIG. **4** is a diagram showing one example of a first lookup table shown in FIG. **2**. In one exemplary embodiment, the first lookup table as shown in FIG. **4** is based on an assumption that an amount of time that an electric current flows to the pixel **110** increases as the pulse width (EW1) of the brightness control signal becomes wider, and is provided for the purpose of illustrations only, and is not intended to limit the scope of the invention. That is, the content stored in the first lookup table may be varied by experiments, depending on the configuration of the pixel circuits, the resolution and size of the display area **100**, etc.

Referring to FIG. **4**, a pulse width (EW1) information of the brightness control signal corresponding to the digital sensor signal (SD) is stored in the first lookup table **430**.

The pulse width (EW1) of the brightness control signal is set so that it can become narrower as the brightness of the ambient light becomes darker.

For example, the pulse width (EW1) of the brightness control signal, corresponding to the digital sensor signal (SD) of '00' outputted when the brightness of the ambient light is in the darkest brightness level, is set to the narrowest width, which corresponds to 109 cycles of a horizontal synchronizing signal (Hsync). As a result, a light emission time of the pixels **110** is reduced, resulting in reduction in the luminance of the display area **100** and the power consumption.

Also, the pixels **110** are controlled to emit the light for a sufficient amount of time by setting a pulse width (EW1) of the first light emission signal to an increasing pulse width with the increase in the brightness of the ambient light, and setting the pulse width (EW1) of the first light emission

signal, corresponding to the digital sensor signal (SD) of '11' outputted when the brightness of the ambient light is in the brightest brightness level, which corresponds to 325 cycles of a horizontal synchronizing signal (Hsync). As a result, by controlling the luminance of the display area **100** according to the brightness of the ambient light, the reduction in the power consumption may be achieved and/or the deterioration of visibility of the display area **100** may be prevented.

FIG. **5** is a block diagram showing one exemplary embodiment of the second luminance control unit **600** shown in FIG. **1**.

Referring to FIG. **5**, the second luminance control unit **600** includes a switch unit **610**, a data sum-up unit **620**, a second controller **630** and a second lookup table **640**.

The switch unit **610** transmits the control signals, such as a synchronizing signal (Vsync) and a clock signal (CLK), and data (RGB Data) of one frame to the data sum-up unit **620**, or interrupts their transmission to the data sum-up unit **620** to correspond to the optical sensor signal (Ssens) supplied from the optical sensor **500**.

For example, the switch unit **610** supplies the control signals such as the synchronizing signal (Vsync) and the clock signal (CLK), and the data (RGB Data) of one frame to the data sum-up unit **620** to correspond to the selection signal (Ssel) if the optical sensor signal (Ssens) having a value greater than a reference value (e.g., a predetermined value) that directs ON of the second luminance control unit **600** is inputted. Further, the switch unit **610** interrupts the supply of the control signals such as the synchronizing signal (Vsync) and the clock signal (CLK), and the data (RGB Data) of one frame to the data sum-up unit **620** in the other case, that is, if the optical sensor signal (Ssens) having a value greater than a reference value (e.g., a predetermined value) that directs OFF of the second luminance control unit **600** is inputted.

The data sum-up unit **620** generates sum-up data obtained by adding up image data (RGB Data) inputted during one frame period to correspond to the control signals, such as the synchronizing signal (Vsync) and the clock signal (CLK), and generates, as control data having at least two bit values including the uppermost bits (i.e., the most significant bits) of the sum-up data. Hereinafter, it is assumed that an upper (i.e., the most significant bits) 5-bit value of the sum-up data is set to the control data for convenience sake. Here, a high value of the sum-up data means that the data sum-up unit **620** includes a large amount of data having a high luminance more than a reference luminance (e.g., a predetermined luminance), and a low value of the sum-up data means that the data sum-up unit **620** includes a small amount of data having a high luminance more than the reference luminance (e.g., the predetermined luminance). The control data generated in the data sum-up unit **620** is transmitted to the second controller **630**.

The second lookup table **640** stores a fluctuated value (EW2) information corresponding to the control data (for example, control data from 0 to 31 if the control data is set to a 5-bit value). Here, the fluctuated value (EW2) is a value obtained by carrying out an operation with the pulse width (EW1) of the brightness control signal by using the luminance control signal generation unit **700** to change the pulse width (EW1) of the brightness control signal, and the fluctuated value (EW2) is set so that the luminance of the display area **100** can be reduced with an increasing value of the control data. That is, the fluctuated value (EW2) is set to a higher value to limit the pulse width (EW1) of the brightness control signal to a wider extent as the value of the control data increases.

The second controller **630** extracts from the second lookup table **640** the fluctuated value (EW2) information, corre-

sponding to the control data supplied from the data sum-up unit **620**, and transmits the extracted fluctuated value (EW2) information to the luminance control signal generation unit **700**.

FIG. 6 is a diagram showing one exemplary embodiment of a second lookup table **640** shown in FIG. 5. The second lookup table **640** shown in FIG. 6 is based on an assumption that the amount of time that an electric current flows to the pixel **110** for a shorter amount of time by reducing a pulse width (EW1) of the brightness control signal to be narrower in width as the fluctuated value (EW2) increases, but the description proposed herein is not intended to limit the scope of the invention. In practice, the content stored in the first lookup table may be varied, depending on the configuration of the pixel circuits, the resolution and size of the display area **100**, etc.

Referring to FIG. 6, the fluctuated value (EW2) corresponding to an upper 5-bit value (namely, the control data) of the sum-up data is stored in the second lookup table **640**. Here, the fluctuated value (EW2) is set so that it can be increased with an increasing value of the control data so as to limit a power consumption within a constant range (in other words, to limit the luminance). Here, if the control data has at least one value including the minimum value, then the fluctuated value (EW2) is sustained at a constant value.

By way of example, if the control data is set to a value of '4' or less, the fluctuated value (EW2) is set to a value of '0' in order not to limit the luminance any more. If the control data has at least one value including the minimum value, and the fluctuated value (EW2) is set to a value of '0' in order not to limit the pulse width (EW1) of the brightness control signal any more, then a contrast ratio may be improved when a dark image is displayed, and therefore an image having an improved contrast may be displayed.

If the control data is set to a value of '5' or more, then the fluctuated value (EW2) is slowly increased with an increasing value of the control data. As described above, if the control data has a higher value than at least one value including the minimum value, then the luminance is lowered since the pulse width (EW1) of the brightness control signal controlled by the first luminance control unit **400** is further limited as the fluctuated value (EW2) increases, and therefore the power consumption may be sustained within a constant range. Also, eye fatigue may be alleviated due to the limited luminance of the display area **100** even if one watches images for a long time. Actually, a ratio for limiting the luminance is increased since the increased number of pixels displaying high gray levels increases the value of the control data.

In order to prevent the excessive reduction of the luminance, the luminance is set to a maximally limited extent. For example, a fluctuated value (EW2) corresponding to the control data having a value of '27' or more may be set in the same manner (or substantially the same manner) as in a fluctuated value (EW2) corresponding to the control data having a value of '27'.

As described above, the organic light emitting display device according to exemplary embodiments of the present invention may be useful to control the luminance of the display area to correspond to the luminance of the ambient light and the data of one frame. In other words, the problem that visibility is varied according to the surrounding brightness can be solved by controlling the luminance of the display area to correspond to the brightness of the ambient light, and also a power consumption can be reduced by preventing the luminance of the display area from being set to an excessively bright level when the ambient light is dark. Also, an excessive electric current may be prevented from flowing to the display area and a power consumption may be reduced by controlling the luminance of the display area to correspond to the data of one frame if the brightness of the ambient light has a value greater than the reference value (e.g., the predetermined

value), and limiting the pulse width of the light emission control signal to control an amount of electric current flowing to the display area if there are many pixels displaying high gray levels during one frame period.

Also, if the brightness of the ambient light has a lower value than the reference value (e.g., the predetermined value), for example, if the luminance of the display area is maximally limited by using the first luminance control unit, the excessive reduction in luminance may be prevented by turning off the second luminance control unit. In this case, it is possible to prevent unnecessary power consumption and the reduction to the safety margin for memory operation, caused by the operation of the second luminance control unit **600**.

The description provided herein is just exemplary embodiments for the purpose of illustrations only, and not intended to limit the scope of the invention, so it should be understood that other equivalents and modifications could be made thereto without departing from the spirit and scope of the invention as those skilled in the art would appreciate. Therefore, it should be understood that the present invention has a scope that is defined in the claims and their equivalents.

What is claimed is:

1. An organic light emitting display device for displaying an image and having a plurality of scan lines, a plurality of light emission control lines and a plurality of data lines, the organic light emitting display comprising:

a display area including a plurality of pixels coupled to the scan lines, the light emission control lines and the data lines;

a scan driver electrically coupled to the display area through the scan lines and the light emission control lines;

a data driver electrically coupled to the display area through the data lines;

an optical sensor for generating an optical sensor signal corresponding to brightness of ambient light;

a first luminance control unit for generating a pulse width of a brightness control signal in accordance with the optical sensor signal;

a second luminance control unit for generating a fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of the image; and

a luminance control signal generation unit for generating a luminance control signal for controlling the scan driver in accordance with the pulse width of the brightness control signal and the fluctuated value.

2. The organic light emitting display device according to claim 1, wherein the second luminance control unit is controlled to be turned on or off according to the optical sensor signal.

3. The organic light emitting display device according to claim 2, wherein the second luminance control unit is turned off when the optical sensor signal has a lower value than a reference value, and is turned on when the optical sensor signal has a higher value than the reference value.

4. The organic light emitting display device according to claim 1, wherein the scan driver generates a light emission control signal having a width corresponding to the luminance control signal, and supplies the generated light emission control signal to at least one of the light emission control lines.

5. The organic light emitting display device according to claim 4, wherein a light emission time of the pixels is controlled in accordance with the width of the light emission control signal.

6. The organic light emitting display device according to claim 1, wherein the first luminance control unit comprises: an analog/digital converter for converting the optical sensor signal, which is an analog signal, into a digital sensor signal;

13

a first lookup table for storing information of the pulse width of the brightness control signal corresponding to the digital sensor signal; and

a first controller for extracting the information of the pulse width of the brightness control signal corresponding to the digital sensor signal from the first lookup table, and for supplying the information of the pulse width to the luminance control signal generation unit.

7. The organic light emitting display device according to claim 6, wherein the pulse width of the brightness control signal is set so that a luminance of the display area is reduced if the digital sensor signal is a digital sensor signal corresponding to a darkest brightness level of the ambient light.

8. The organic light emitting display device according to claim 1, wherein the second luminance control unit comprises:

a data sum-up unit for summing up the data of one frame to generate sum-up data and for generating, as control data, at least two bit values including most significant bits of the sum-up data;

a second lookup table for storing information of the fluctuated value corresponding to the control data; and
a second controller for extracting the information of the fluctuated value corresponding to the control data from the second lookup table and for supplying the extracted information of the fluctuated value to the luminance control signal generation unit.

9. The organic light emitting display device according to claim 8, wherein the fluctuated value is set so that a luminance of the display area is decreased with an increase in value of the control data.

10. The organic light emitting display device according to claim 8, wherein the second luminance control unit further comprises a switch unit for transmitting the data of one frame to the data sum-up unit or interrupting transmission of the data to the data sum-up unit according to the optical sensor signal.

11. The organic light emitting display device according to claim 1, wherein the luminance control signal generation unit processes an operation of the pulse width of the brightness control signal with the fluctuated value, and generates the luminance control signal in accordance with a result of the operation of the pulse width with the fluctuated value.

12. The organic light emitting display device according to claim 11, wherein the luminance control signal generation unit adds or subtracts the pulse width of the brightness control signal with the fluctuated value, and generates the luminance control signal having a pulse width information of a light emission control signal in accordance with the pulse width of the brightness control signal and the fluctuated value.

13. A method for driving an organic light emitting display device having a display area comprising a plurality of pixels, the method comprising:

generating an optical sensor signal corresponding to brightness of ambient light;

generating a pulse width of a brightness control signal in accordance with the optical sensor signal;

generating a fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of an image; and

controlling a luminance of the display area using the pulse width of the brightness control signal and the fluctuated value,

14

wherein the generating the fluctuated value comprises:

adding the data of one frame to generate sum-up data and generating, as control data, at least two bit values including the most significant bits of the sum-up data; and

extracting information of the fluctuated value corresponding to the control data.

14. A method for driving an organic light emitting display device having a display area comprising a plurality of pixels the method comprising:

generating an optical sensor signal corresponding to brightness of ambient light;

generating a pulse width of a brightness control signal in accordance with the optical sensor signal;

generating a fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of an image; and
controlling a luminance of the display area using the pulse width of the brightness control signal and the fluctuated value,

wherein the controlling the luminance of the display area comprises:

generating a luminance control signal corresponding to the pulse width of the brightness control signal and the fluctuated value;

generating a light emission control signal having a pulse width corresponding to the luminance control signal; and

controlling a light emission time of the pixels included in the display area to correspond to the light emission control signal, and

wherein the luminance control signal is generated by adding or subtracting the pulse width of the brightness control signal with the fluctuated value.

15. An organic light emitting display device for displaying an image and having a plurality of scan lines, a plurality of light emission control lines and a plurality of data lines, the organic light emitting display comprising:

a display area including a plurality of pixels coupled to the scan lines, the light emission control lines and the data lines;

a scan driver electrically coupled to the display area through the scan lines and the light emission control lines;

a data driver electrically coupled to the display area through the data lines;

an optical sensor for generating an optical sensor signal corresponding to brightness of ambient light;

a luminance control signal generation unit for generating a luminance control signal for controlling the scan driver in accordance with a pulse width of a brightness control signal and a fluctuated value;

a first luminance control unit for providing the pulse width of the brightness control signal in accordance with the optical sensor signal; and

a second luminance control unit for providing the fluctuated value for the pulse width of the brightness control signal in accordance with the optical sensor signal and data of one frame of the image.

16. The organic light emitting display device according to claim 15, wherein the second luminance control unit is controlled to be turned on or off according to the optical sensor signal.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,054,255 B2
APPLICATION NO. : 11/861109
DATED : November 8, 2011
INVENTOR(S) : Wook Lee

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

Item (56) References Cited,	Delete "10/2005"
page 2, left column,	Insert -- 2/2004 --
Foreign Patent Documents, line 7	

In the Claims

Column 14, Claim 14, line 9	Delete "pixels"
	Insert -- pixels, --
Column 14, Claim 14, line 25	Delete "value:"
	Insert -- value; --

Signed and Sealed this
Tenth Day of September, 2013



Teresa Stanek Rea
Acting Director of the United States Patent and Trademark Office

专利名称(译)	有机发光显示装置及其驱动方法		
公开(公告)号	US8054255	公开(公告)日	2011-11-08
申请号	US11/861109	申请日	2007-09-25
[标]申请(专利权)人(译)	李旭		
申请(专利权)人(译)	李旭		
当前申请(专利权)人(译)	三星移动显示器有限公司.		
[标]发明人	LEE WOOK		
发明人	LEE, WOOK		
IPC分类号	G09G3/30		
CPC分类号	G09G3/3225 G09G3/3266 G09G2300/0861 G09G2320/064 G09G2320/0646 G09G2360/144 G09G2360/16		
优先权	1020070011788 2007-02-05 KR		
其他公开文献	US20080186260A1		
外部链接	Espacenet USPTO		

摘要(译)

一种有机发光显示装置，包括：光学传感器，用于产生与环境光的亮度对应的光学传感器信号;第一亮度控制单元，用于根据光学传感器信号产生亮度控制信号的脉冲宽度 (EW1);第二亮度控制单元，用于根据光学传感器信号和一幅图像的数据产生亮度控制信号的脉冲宽度的波动值 (EW2);亮度控制信号发生单元，用于根据亮度控制信号的脉冲宽度和波动值产生用于控制扫描驱动器的亮度控制信号 (Vc)。

