



US 20050225232A1

(19) **United States**(12) **Patent Application Publication** (10) Pub. No.: **US 2005/0225232 A1**
(43) Pub. Date: **Oct. 13, 2005****Boroson et al.**(54) **COLOR OLED WITH ADDED COLOR
GAMUT PIXELS**(22) Filed: **Apr. 7, 2004****Publication Classification**(75) Inventors: **Michael L. Boroson**, Rochester, NY
(US); **Dustin L. Winters**, Webster, NY
(US); **Yuan-Sheng Tyan**, Webster, NY
(US)(51) Int. Cl.⁷ **H05B 33/00**(52) U.S. Cl. **313/504**

Correspondence Address:

Pamela R. Crocker**Patent Legal Staff****Eastman Kodak Company****343 State Street****Rochester, NY 14650-2201 (US)**(57) **ABSTRACT**

An OLED device includes an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least three pixels produce colors which define a color gamut and at least one pixel produces light within the color gamut, and wherein the at least one pixel within the color gamut includes a reflector and a semitransparent reflector which function to form a microcavity.

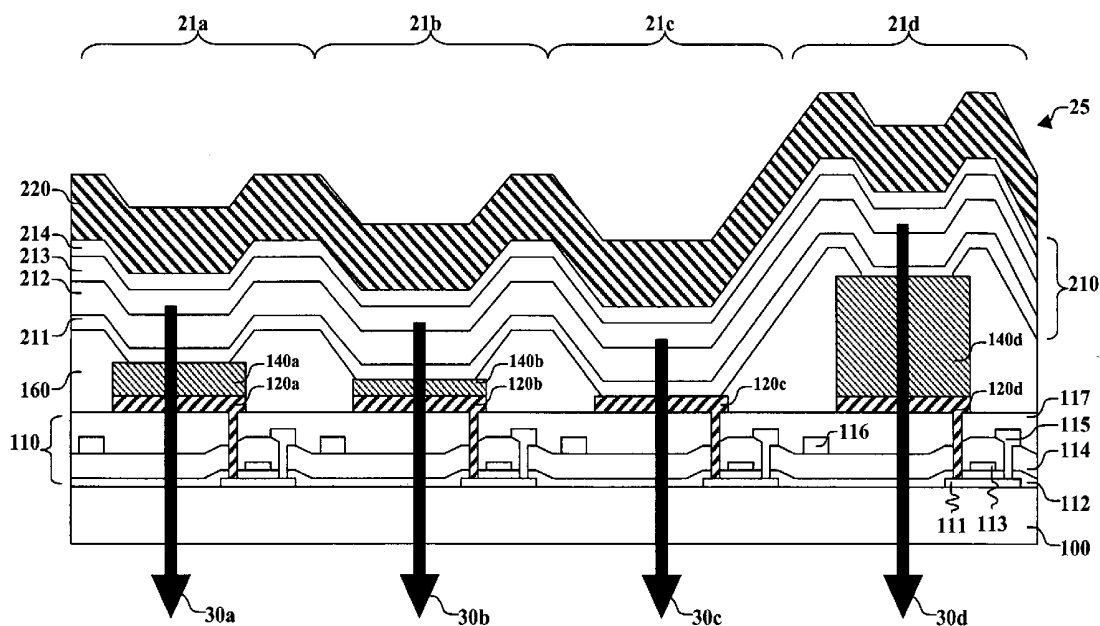
(73) Assignee: **Eastman Kodak Company**(21) Appl. No.: **10/819,697**

FIG. 1A

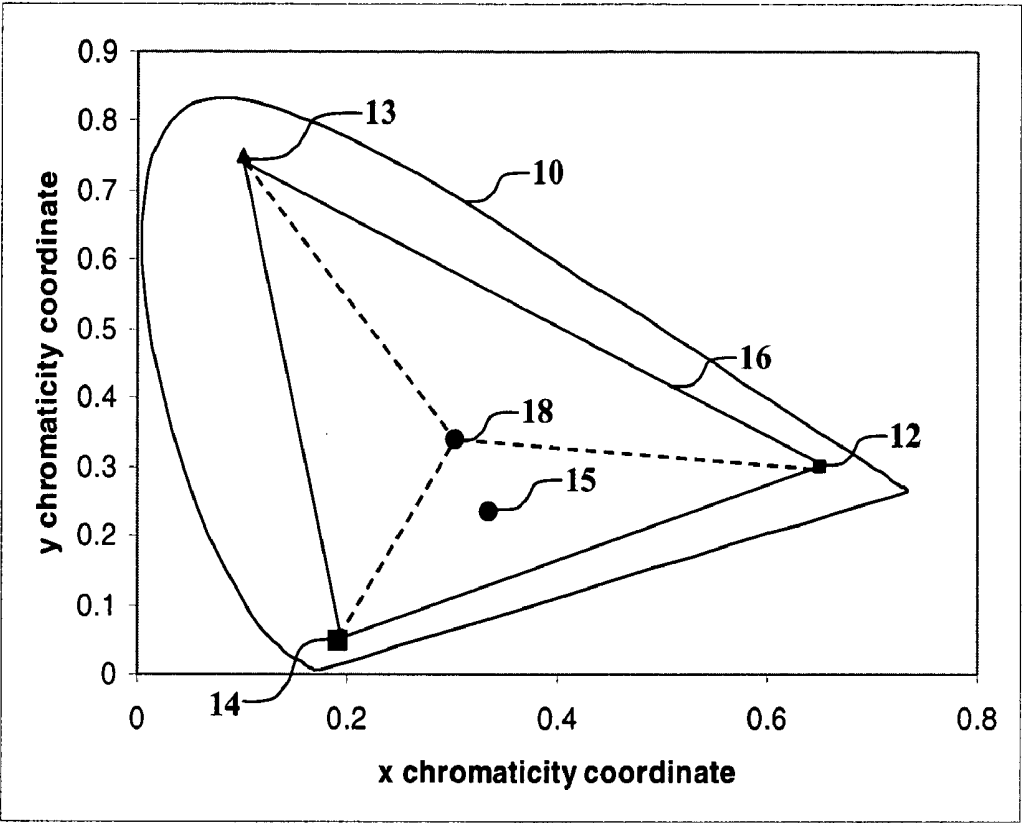


FIG. 1B

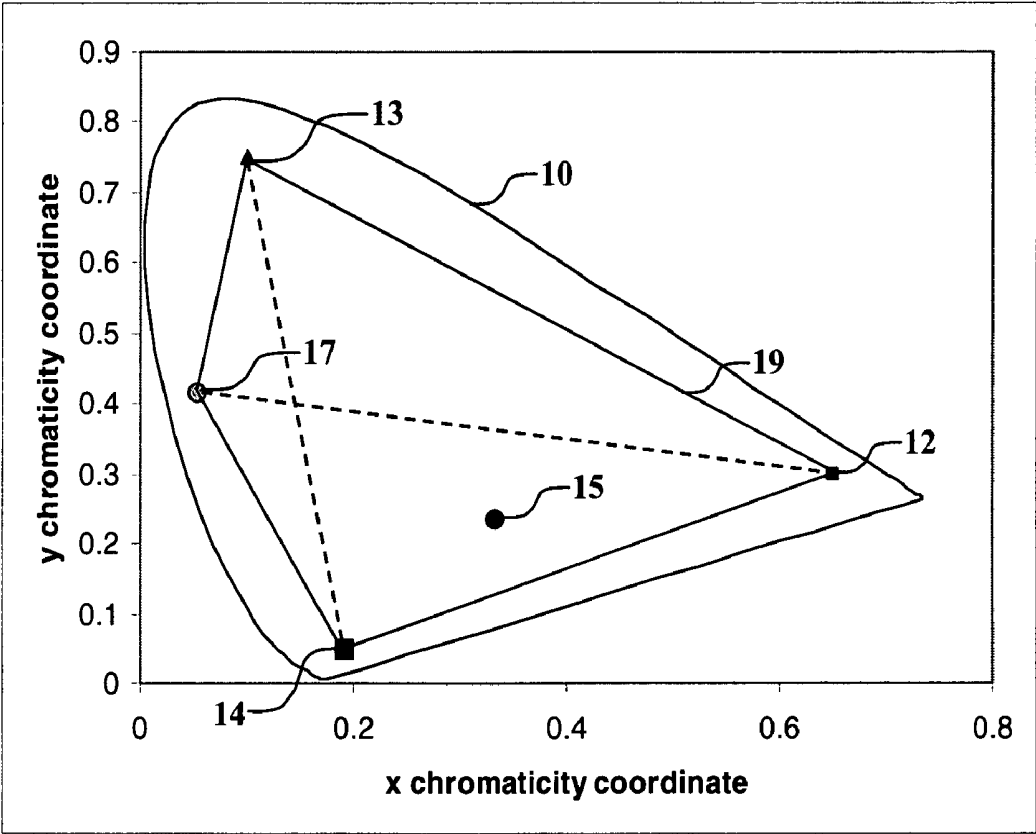


FIG. 2

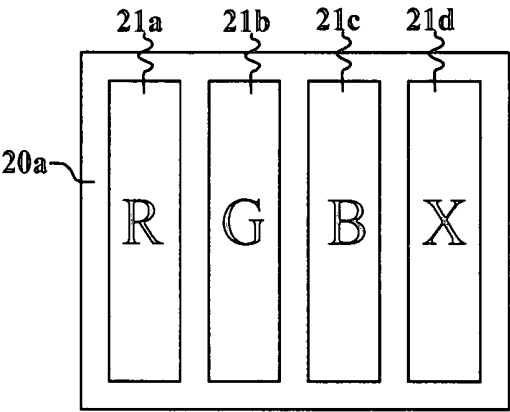


FIG. 2A

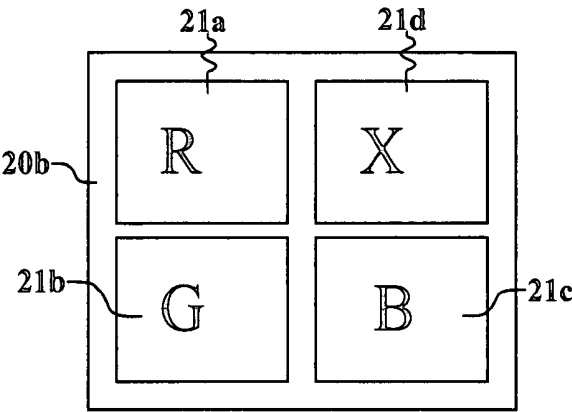


FIG. 2B

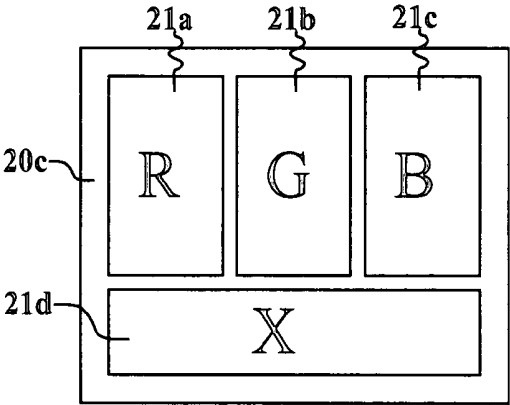


FIG. 2C

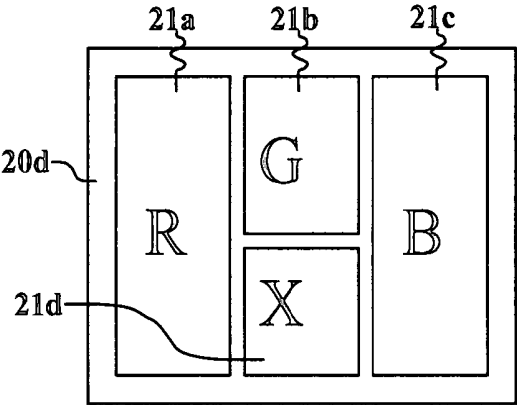


FIG. 2D

FIG. 3

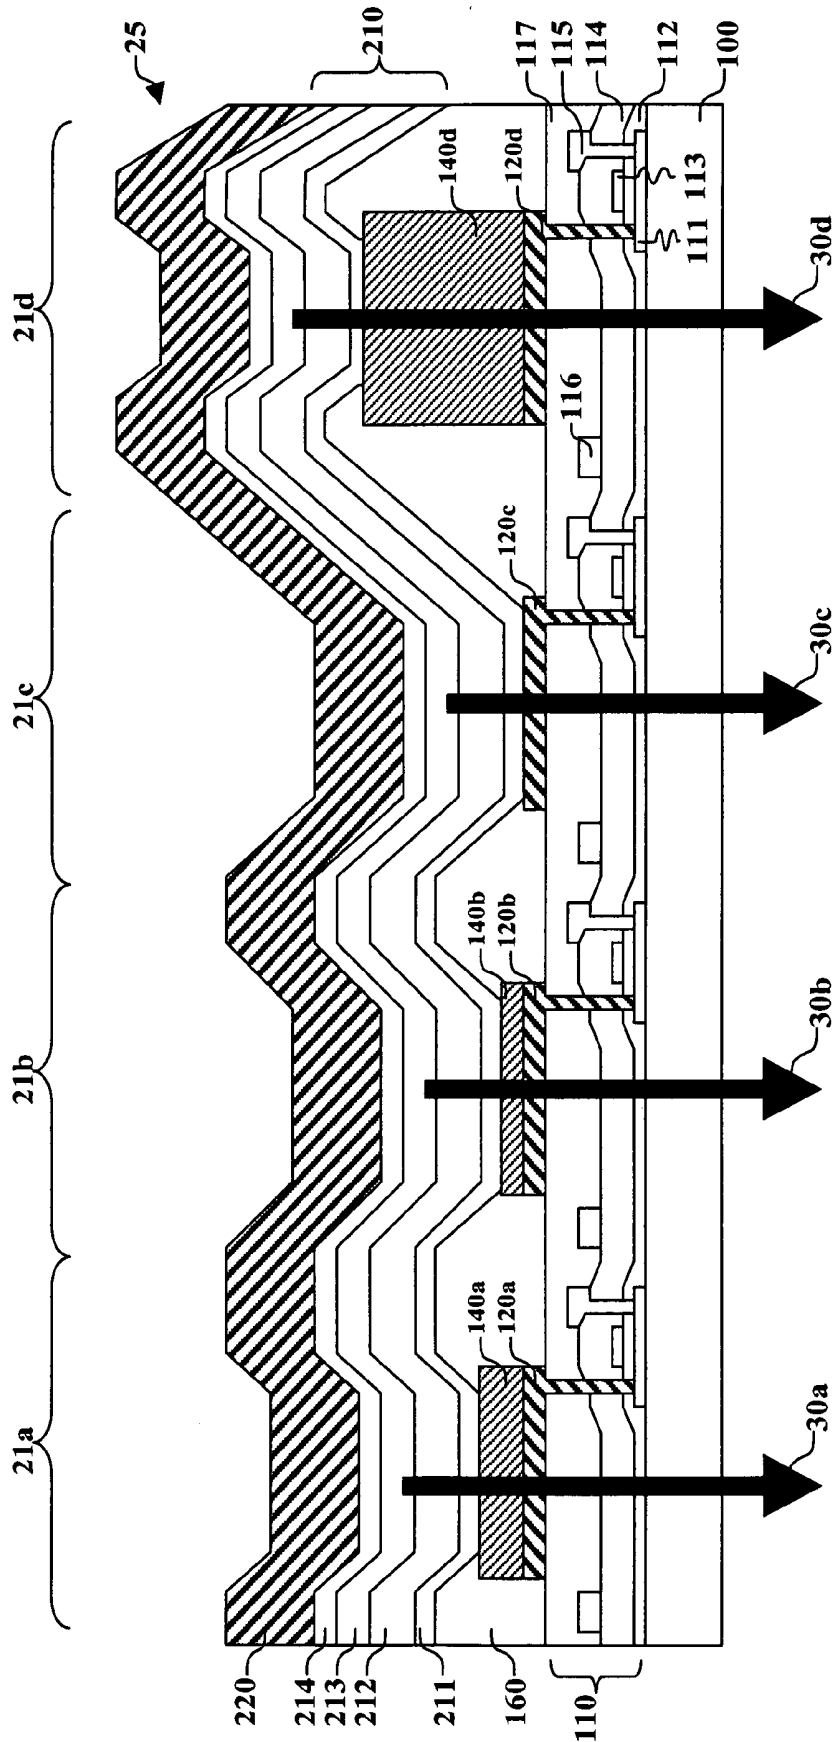


FIG. 4

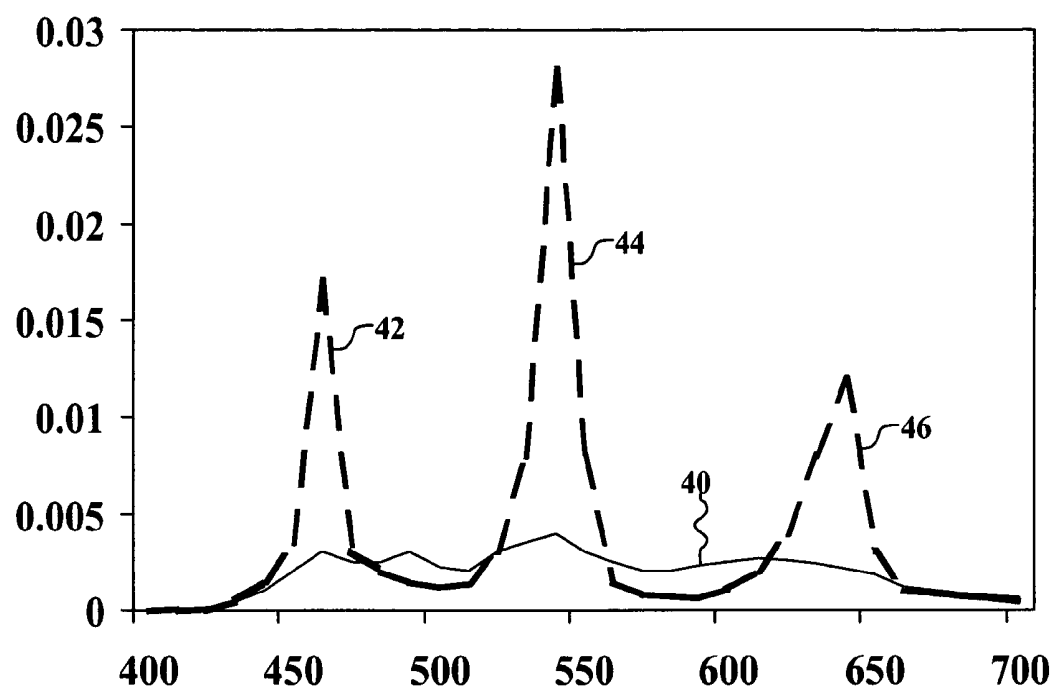


FIG. 5

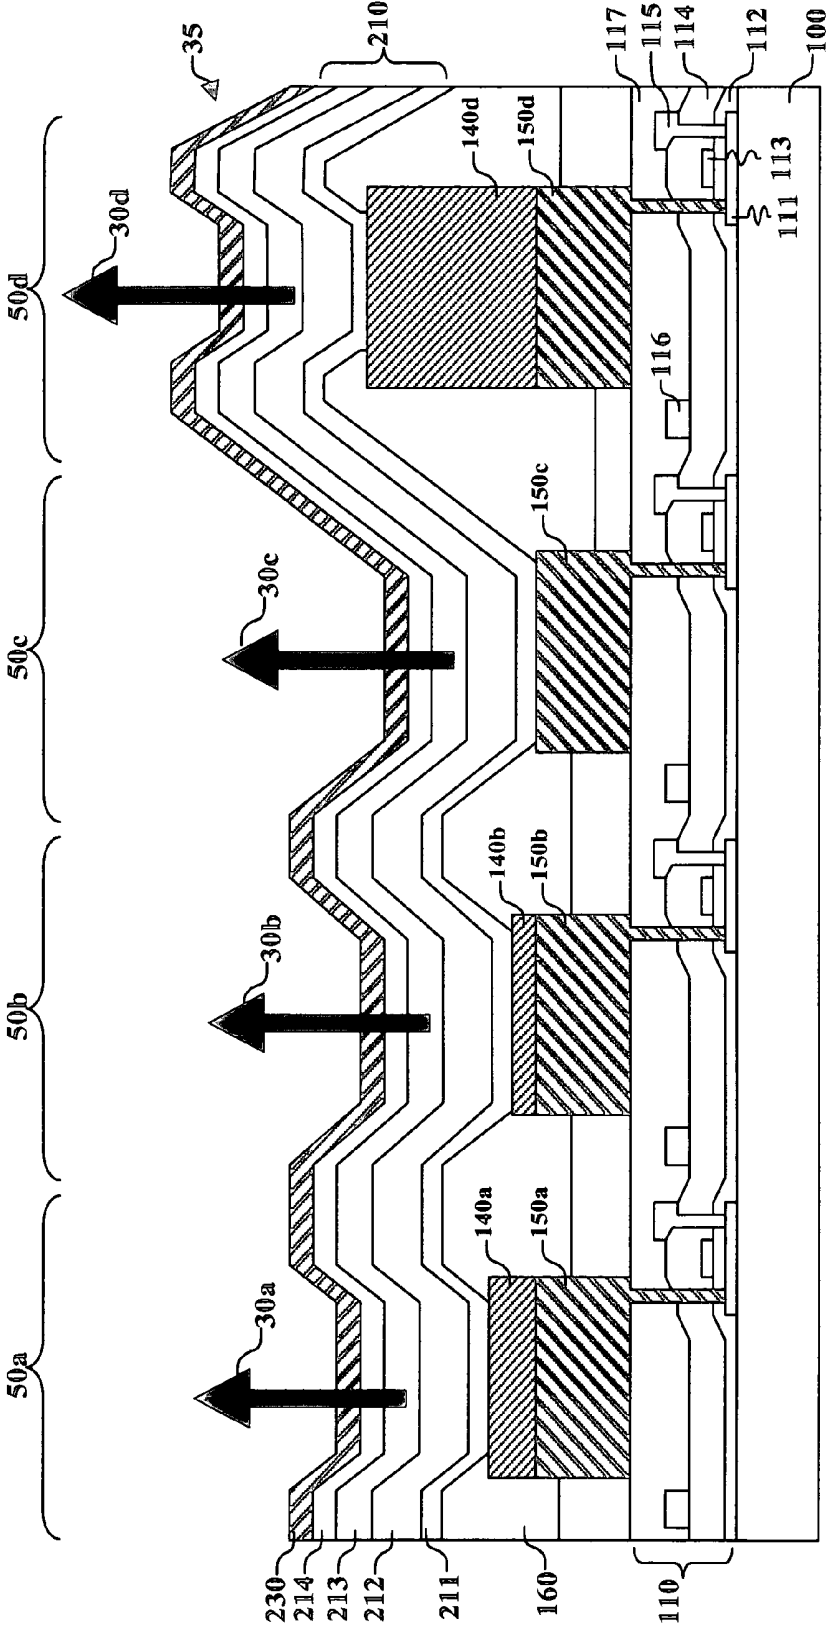


FIG. 6

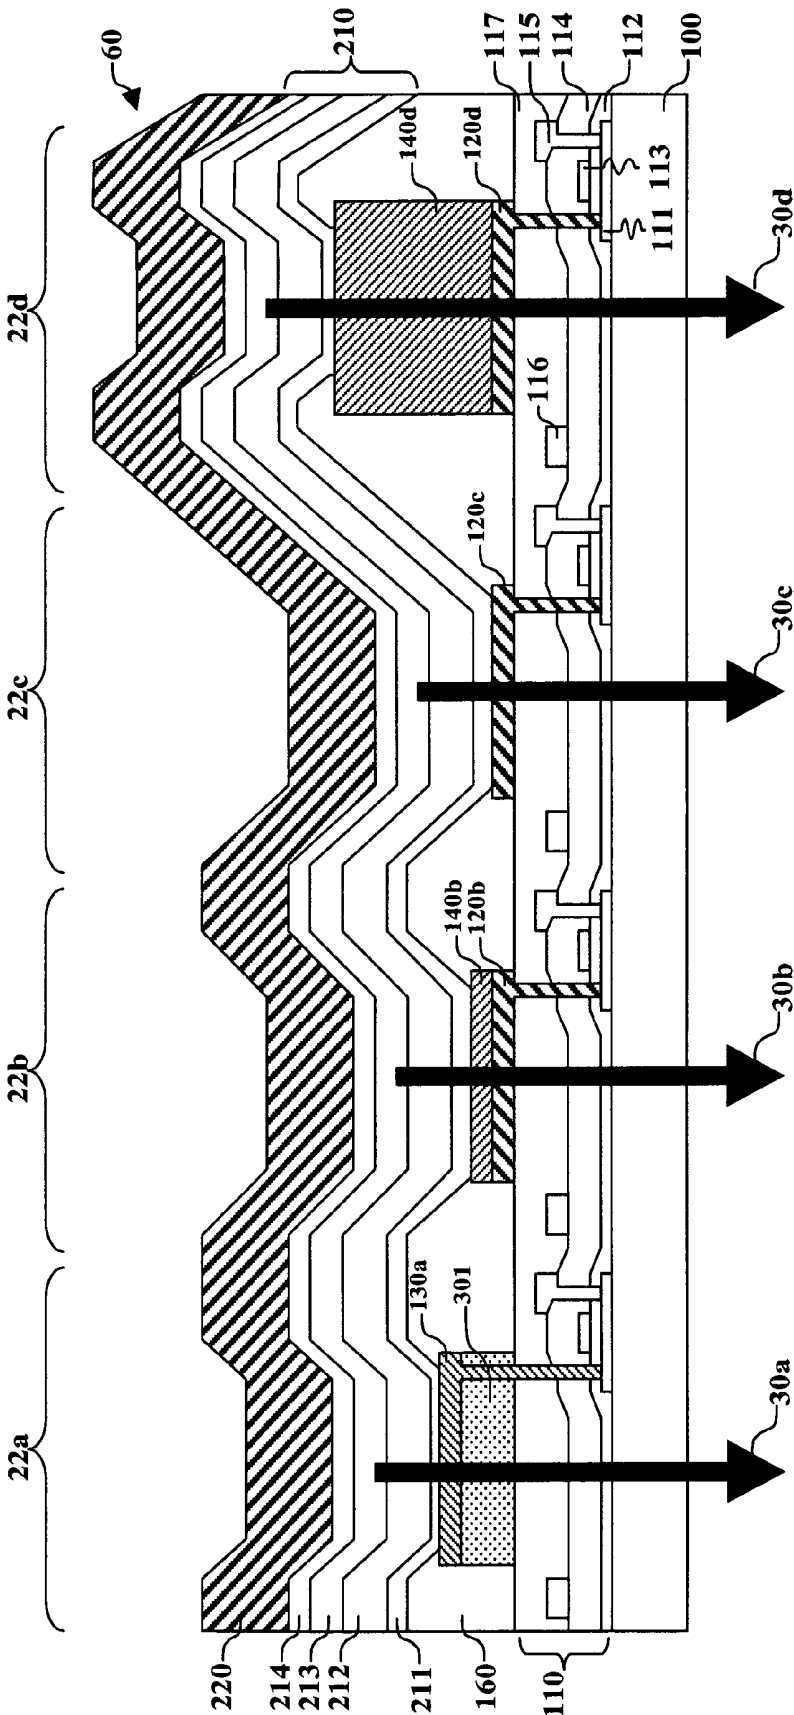


FIG. 7


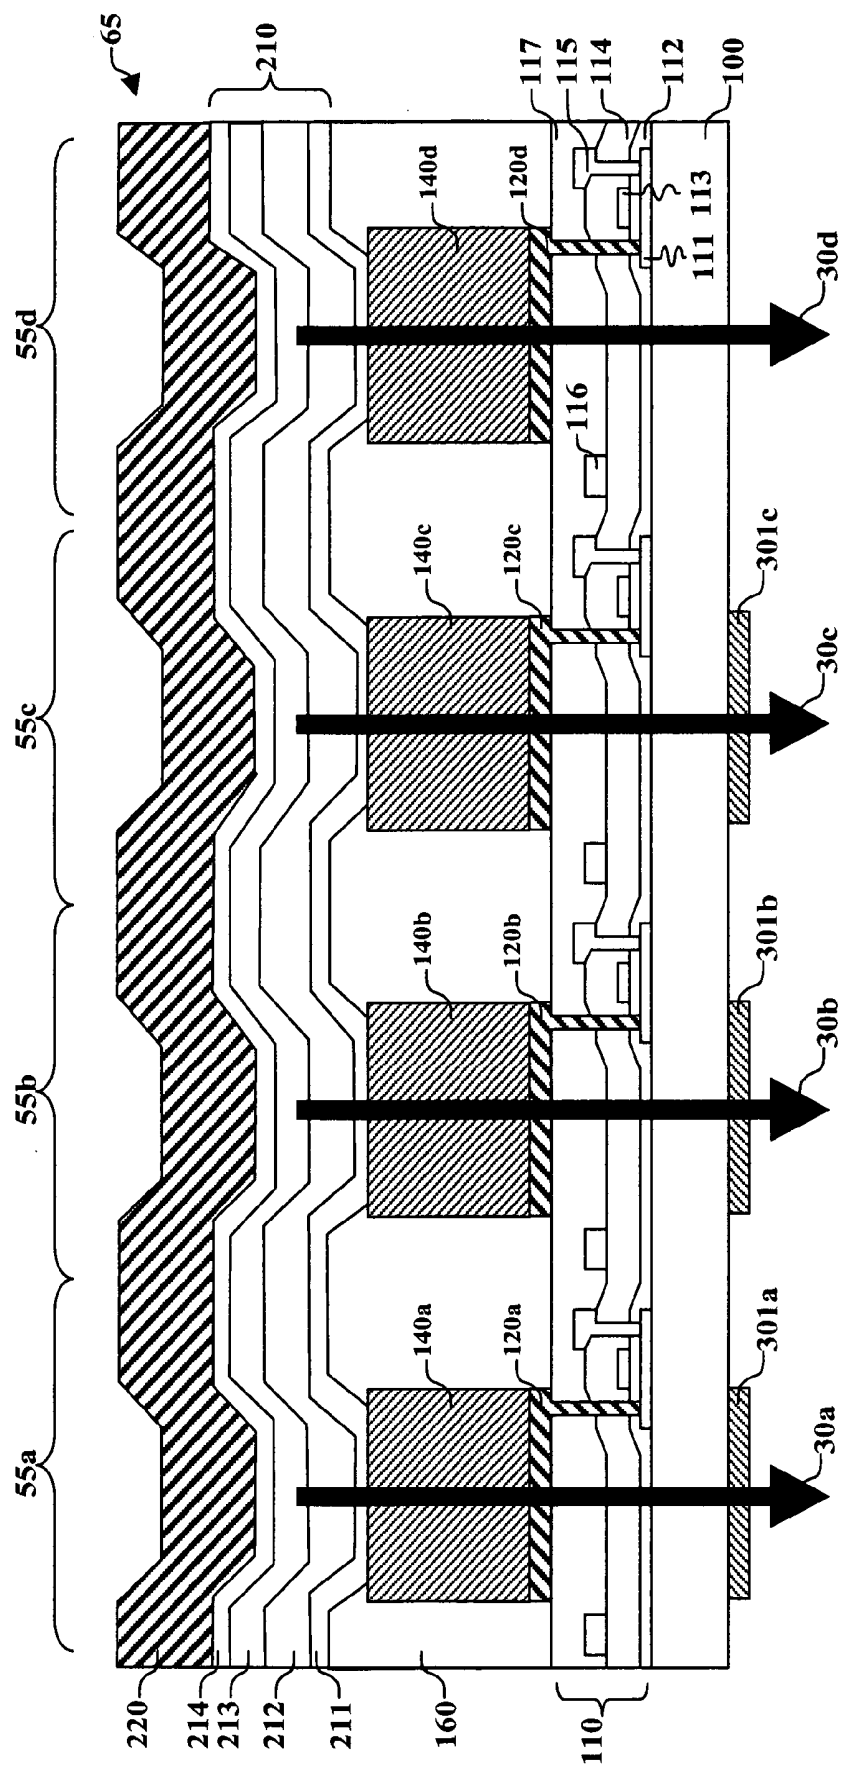


FIG. 8

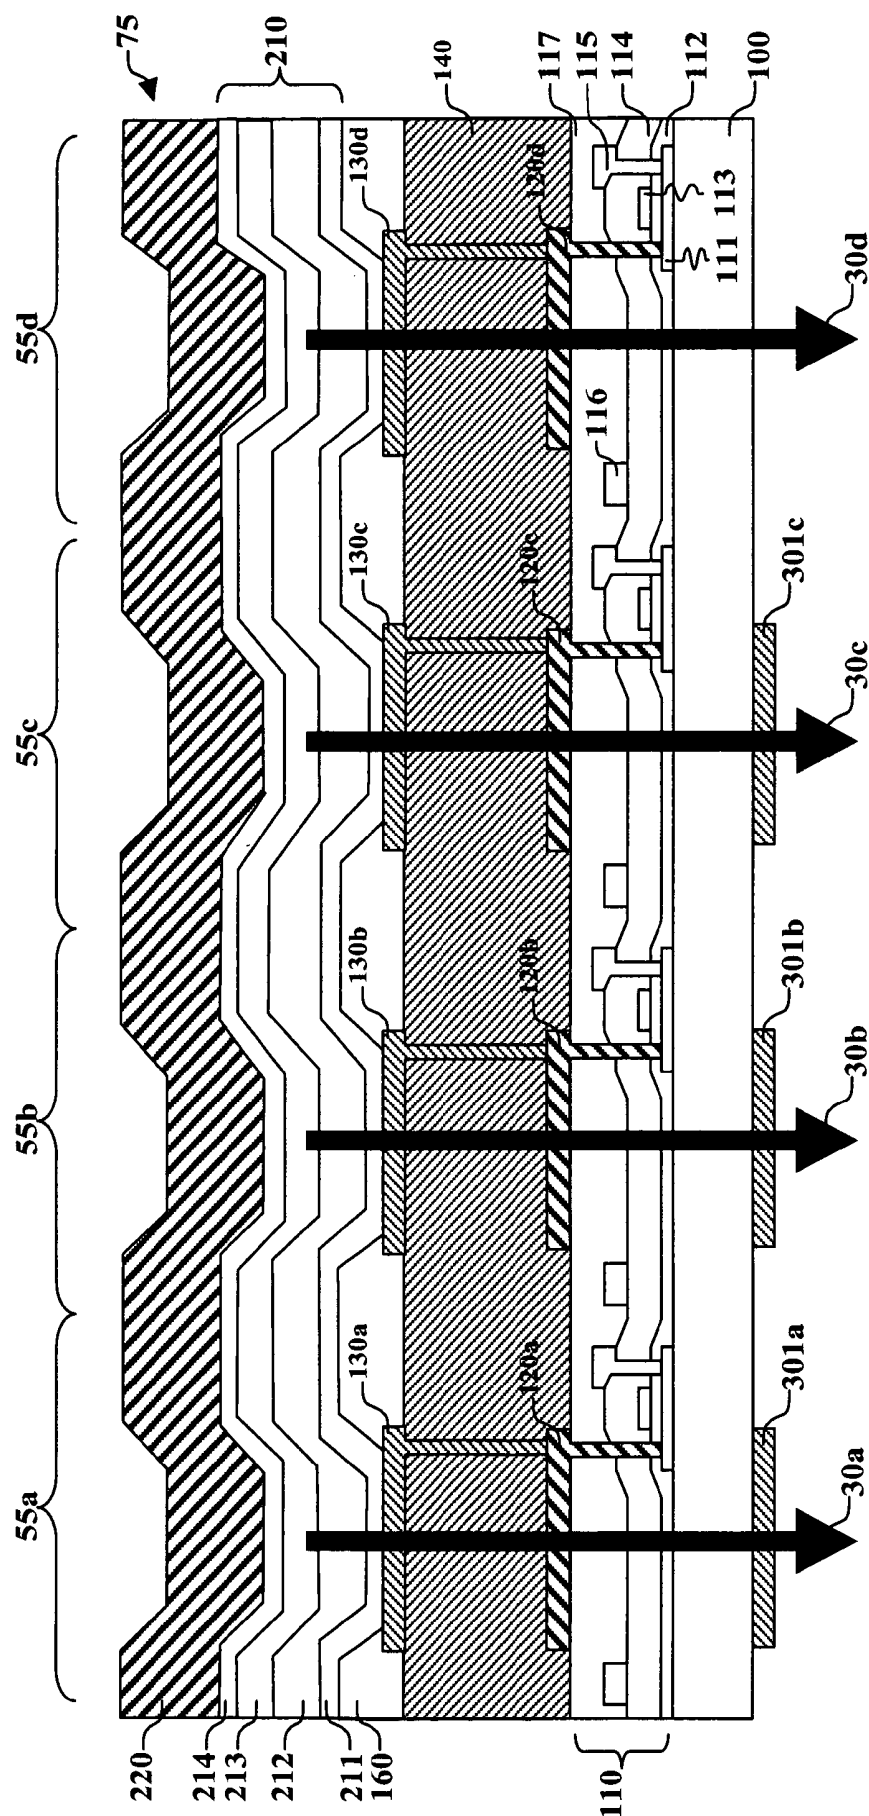

COLOR OLED WITH ADDED COLOR GAMUT PIXELS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Reference is made to commonly assigned U.S. patent application Ser. No. _____ filed concurrently herewith by Michael L. Boroson et al., entitled "OLED With Color Change Media", the disclosure of which is herein incorporated by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to organic electroluminescent (EL) devices. More specifically, this invention relates to a multicolor emitting EL device with improved stability, efficiency, and color purity.

BACKGROUND OF THE INVENTION

[0003] Full color organic electroluminescent (EL), also known as organic light-emitting devices (OLED), have been demonstrated recently as a new type of flat panel display. OLED devices are attractive because of their low driving voltage, high luminance, wide-angle viewing, and capability for full color flat emission displays. In simplest form, an organic EL device is comprised of an anode for hole injection, a cathode for electron injection, and an organic EL medium sandwiched between these electrodes to support charge recombination that yields emission of light. An example of an organic EL device is described in commonly assigned U.S. Pat. No. 4,356,429. Other examples have been described by Tang, et al. in U.S. Pat. Nos. 4,769,292 and 4,885,211. In order to construct a pixilated display device that is useful, for example as a television, computer monitor, cell phone display or digital camera display, individual organic EL elements can be arranged as an array of pixels in a matrix pattern. This matrix of pixels can be electrically driven using either a simple passive matrix or an active matrix driving scheme. In a passive matrix, the organic EL layers are sandwiched between two sets of orthogonal electrodes arranged in rows and columns. An example of a passive-matrix-driven organic EL device is disclosed in commonly assigned U.S. Pat. No. 5,276,380. In an active matrix configuration, each pixel is driven by multiple circuit elements such as transistors, capacitors, and signal lines. Examples of such active matrix organic EL devices are provided in U.S. Pat. No. 5,550,066 (commonly assigned); U.S. Pat. Nos. 6,281,634; and 6,456,013.

[0004] Full color OLED devices are also known in the art. Typical full color OLED devices are constructed of three different color pixels that are red, green, and blue in color. Such an arrangement is known as an RGB design. An example of an RGB design is disclosed in U.S. Pat. No. 6,281,634. Full color organic electroluminescent (EL) devices have also recently been described that are constructed of four different color pixels that are red, green, blue, and white. Such an arrangement is known as an RGBW design. An example of an RGBW device is disclosed in commonly assigned U.S. patent application Publication 2002/0186214 A1. In an RGBW device, high efficiency white-emitting pixels are used to display a portion of the digital image content. This results in improved power consumption relative to an RGB constructed of similar OLED materials.

[0005] A white-emitting electroluminescent (EL) layer can be used to form a multicolor device. Each pixel is coupled with a color filter element as part of a color filter array (CFA) to achieve a pixilated multicolor display. The organic EL layer is common to all pixels and the final color as perceived by the viewer is dictated by that pixel's corresponding color filter element. Therefore, a multicolor or RGB device can be produced without requiring any patterning of the organic EL layers. An example of a white CFA top-emitting device is shown in U.S. Pat. No. 6,392,340. Other examples of white-light-emitting OLED devices are disclosed in U.S. Pat. No. 5,683,823, JP 07-142169, and U.S. Pat. No. 5,405,709.

[0006] Numerous OLEDs with alternative layer structures, including polymeric materials, have been disclosed, and device performance has been improved. For the commercial success of OLEDs, further improvement in devices is needed. Among the key areas that need further improvement are the efficiency and operating stability of the devices. It is also desirable to improve the color gamut obtainable from such devices.

SUMMARY OF THE INVENTION

[0007] It is therefore an object of the present invention to provide an OLED device with improved efficiency and longer lifetime.

[0008] It is a further object of the present invention to provide an OLED device with an improved color gamut.

[0009] This object is achieved by an OLED device comprising:

[0010] a) an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least three pixels produce colors which define a color gamut and at least one pixel produces light within the color gamut; and

[0011] b) wherein the at least one pixel within the color gamut includes a reflector and a semitransparent reflector which function to form a microcavity.

Advantages

[0012] It is an advantage of the present invention that it provides improved device efficiency with lower power consumption and longer lifetime. It is a further advantage for some embodiments of the present invention that such a device can be constructed using common OLED organic layers for all pixels which does not require precision patterning of organic materials to form the pixels. Any device patterning necessary can be done as part of the formation of the active matrix components or passive matrix components by photolithographic methods, which are more precise methods than those commonly used to deposit organic layers. It is a further advantage for some embodiments of the present invention that such a device can be constructed without the need for color filter elements, which thereby lowers cost. It is a further advantage for some embodiments of the present invention that an improved or extended color gamut is provided. This configuration permits for an RGBW (red, green, blue, and white) or RGBX (red, green, blue, and at least one additional color) configuration to be used in a top-emitting device with a highly conductive cathode that does not require patterning.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] **FIG. 1A** shows a 1931 CIE (Commission Internationale d'Éclairage) x,y-chromaticity diagram of a light-emitting device with three color-gamut-defining pixels and one within-gamut pixel;

[0014] **FIG. 1B** shows a 1931 CIE x,y-chromaticity diagram of a light-emitting device with four color-gamut-defining pixels;

[0015] **FIGS. 2A through 2D** depict some pixel configurations that can be used in accordance with the present invention;

[0016] **FIG. 3** depicts a cross-sectional view of an array of light-emitting pixels according to an embodiment of the present invention;

[0017] **FIG. 4** shows a spectrum of emission after multi-mode microcavity enhancement vs. a non-enhanced white-emitting OLED device;

[0018] **FIG. 5** depicts a cross-sectional view of an array of light-emitting pixels according to another embodiment of the present invention;

[0019] **FIG. 6** depicts a cross-sectional view of an array of light-emitting pixels according to another embodiment of the present invention;

[0020] **FIG. 7** depicts a cross-sectional view of an array of light-emitting pixels according to another embodiment of the present invention; and

[0021] **FIG. 8** depicts a cross-sectional view of an array of light-emitting pixels according to another embodiment of the present invention.

[0022] Since device feature dimensions such as layer thicknesses are frequently in sub-micrometer ranges, the drawings are scaled for ease of visualization rather than dimensional accuracy.

DETAILED DESCRIPTION OF THE INVENTION

[0023] The term "OLED device" or "organic light-emitting display" is used in its art-recognized meaning of a display device comprising organic light-emitting diodes as pixels. A color OLED device emits light of at least one color. The term "multicolor" is employed to describe a display panel that is capable of emitting light of a different hue in different areas. In particular, it is employed to describe a display panel that is capable of displaying images of different colors. These areas are not necessarily contiguous. The term "full color" is employed to describe multicolor display panels that are capable of emitting in several regions of the visible spectrum and therefore displaying images in a large combination of hues. The red, green, and blue colors constitute the three primary colors from which all other colors can be produced by appropriate mixing. However, for this invention, full color can include additional different color pixels whose purpose will become clear. The term "hue" refers to the intensity profile of light emission within the visible spectrum, with different hues exhibiting visually discernible differences in color. The term "pixel" is employed in its art-recognized usage to designate an area of a display panel that can be stimulated to emit light independently of other areas. However, it is recognized that in full

color systems, several pixels of different colors will be used together to produce a broad range of colors, and a viewer can term such a group a single pixel. For the purposes of this invention, such a logical grouping will be termed a group of pixels or a pixel group. For example, in a three-color RGB full color display, a group of pixels generally comprises three primary-color pixels, namely red, green, and blue (RGB), which are color-gamut-defining pixels.

[0024] It is sometimes useful to form displays comprising pixels of more than three different colors. The added color pixels can emit a color within the gamut defined by the other pixels, or can emit a color outside the gamut defined by the other pixels. RGBW displays are one example of a type of display that utilizes within-gamut emission to improve power consumption. **FIG. 1A** shows a 1931 CIE (Commission Internationale d'Éclairage) x,y-chromaticity diagram of a light-emitting device with three color-gamut-defining pixels and one within-gamut pixel. At least three pixels emit different colors, e.g. red emitter **12**, green emitter **13**, and blue emitter **14**, which define the color gamut **16** of the display in CIE color space **10**. By illuminating two or more of the color-gamut-defining pixels to varying intensities, other colors can be produced. These new colors are within-gamut colors. Such a display device also has at least one additional pixel that emits a within-gamut color light, e.g. white emitter **18**. The term white is used in the present invention to indicate any light emission which is perceived as approximately white to a viewer. The within-gamut pixel, however can be any color within the gamut of the color-gamut-defining pixels, and the term RGBW is used herein to describe any display having at least three color-gamut-defining pixels and at least one within-gamut pixel. This type of display is more efficient than conventional OLED displays because the within-gamut pixels tend to have higher efficiency than at least one of the color-gamut-defining pixels. Typically, the within-gamut pixel is more efficient than all of the color-gamut-defining pixels. Each pixel can be fabricated using a separate OLED material designed to emit a different color light. However, a frequently-used configuration uses a common broadband or white-emitting OLED material common to all pixels. The use of a broadband or white-emitting OLED material limits the need to pattern the OLED materials for each pixel. In this case, color filters can be used for some of the pixels to convert a broadband or white emission to individual colors. For example, red, green, and blue color filters can be used in the color-gamut-defining pixels of RGBW devices to form red, green, and blue colors. The within-gamut pixel is left unfiltered to emit white light, and therefore is more efficient than the color-gamut-defining pixels.

[0025] In this configuration, the added emitter produces a series of sub-gamuts (shown by the dashed lines in **FIG. 1A**) comprising white emitter **18** and two of the other three emitters. The sub-gamuts together form color gamut **16**. Thus, while one can produce a desired color **15** from an appropriate combination of red emitter **12**, green emitter **13**, and blue emitter **14**, it can be more efficient to produce it by an appropriate combination of red emitter **12**, blue emitter **14**, and white emitter **18**.

[0026] **FIG. 1B** shows a 1931 CIE x,y-chromaticity diagram of a light-emitting device with four color-gamut-defining pixels. This is an example of a display with added color-gamut-defining pixels in what can be called an RGBC

device. Besides red emitter **12**, green emitter **13**, and blue emitter **14**, such a device includes cyan emitter **17**, which emits outside the color gamut defined by the other three pixels. Such a device has the advantage that it can define an extended color gamut **19**.

[0027] In this configuration, the added emitter produces a series of sub-gamuts (shown by the dashed lines of **FIG. 1B**) comprising three of the four emitters. Each sub-gamut overlaps with others. Thus, one can produce a desired color **15** from an appropriate combination of red emitter **12**, green emitter **13**, and blue emitter **14**; or an appropriate combination of red emitter **12**, cyan emitter **17**, and blue emitter **14**; or an appropriate combination of all four emitters.

[0028] For the purposes of this invention, devices such as those above will generally be referred to as RGBX devices, where X refers to a fourth color pixel that can be within the color gamut defined by the other pixels, or can itself be color-gamut-defining. Patterns of more than four pixels can also be included, and can include both within-gamut pixels and added color-gamut-defining pixels. Furthermore, although red, green, and blue pixels are commonly used in OLED devices, it will be understood that any combination of three color-gamut-defining pixels can be used to provide desirable properties in a given device.

[0029] **FIG. 2** illustrates example pixel configurations that can be used for an OLED device according to this invention. **FIG. 2A** shows a stripe pattern configuration of a device with group of pixels **20a**. Group of pixels **20a** includes color-gamut-defining pixels **21a**, **21b**, and **21c** as well as extra pixel **21d**, which can be a within-gamut pixel or can be a color-gamut-defining pixel. **FIG. 2B** shows a quad pattern configuration of a device with group of pixels **20b**. **FIG. 2C** shows another pattern configuration of a device with group of pixels **20c**. **FIG. 2D** shows another pattern configuration of a device with group of pixels **20d**. Other patterns can also be applied to the present invention, including patterns with more than 4 pixels. While in the above-mentioned examples, the pixels are shown to be arranged in a certain order, the pixels can be arranged in other embodiments having different orders, and other embodiments can have pixels with differing sizes and shapes.

[0030] **FIG. 3** shows a cross-sectional view of an array of light-emitting pixels of an OLED device **25** according to the present invention having, for example, a stripe pattern with three pixels **21a**, **21b**, and **21c** that produce colors which define a color gamut, and at least one additional pixel **21d** which can produce light within the color gamut or can produce a fourth color which further defines a color gamut. The pixels have organic layers **210**, including at least one emissive layer **213** that produces light, and spaced electrodes whose nature will become evident. These pixels emit light **30a**, **30b**, **30c**, and **30d**, respectively. OLED device **25** shown in **FIG. 3** is an active matrix device with active matrix circuitry **110**. Alternate embodiments wherein OLED device **25** is a passive matrix device and does not have active matrix circuitry can be applied to the present invention. **FIG. 3** also shows a configuration that is bottom-emitting, that is, where light (**30a**, **30b**, **30c**, and **30d**) is emitted from OLED device **25** in the direction of substrate **100**.

[0031] OLED device **25** includes reflector **220**, which is a material that is highly reflective at the wavelengths at which OLED device **25** emits light. Preferred materials for reflector

220 that are highly reflective include Ag, Al, Au, or alloys composed of one or more of these materials. Pixel **21d** also includes semitransparent reflector **120d**, which is partially reflective and partially transmissive. Preferred materials for semitransparent reflector **120d** include Ag, Au, or alloys composed of one or both of these materials, in a thickness selected to cause them to be semitransparent, that is, partially transmitting and partially reflective. This thickness can be in the range of, for example, between 5 nm and 50 nm, and is more preferably between 15 nm and 30 nm. An alternate semitransparent reflector structure composed of a quarter wave stack (QWS) of transparent materials with alternating high and low refractive indexes is also known and can be applied to the present invention by someone skilled in the art. In a bottom-emitting device, such as shown, where the light is viewed through substrate **100**, semitransparent reflector **120d** is located between organic layers **210** and substrate **100**, and reflector **220** is located above substrate **100**, semitransparent reflector **120d**, and organic layers **210**. Alternately, in a top-emitting device, that is where the light is viewed in the direction opposite substrate **100**, reflector **220** is located between the organic layers **210** and substrate **100**, and semitransparent reflector **120d** is located above substrate **100**, reflector **220**, and organic layers **210**.

[0032] Reflector **220** and semitransparent reflector **120d** function, with the layers between them, to form a microcavity, which can be adjusted in thickness and refractive index to resonate at a desired wavelength. Examples of microcavity structures are shown in U.S. Pat. No. 6,406,801; U.S. patent application Publication 5,780,174 A1; and JP 11288786.

[0033] OLED device **25** includes spaced electrodes for each of the pixels. If conductive material is used to form reflector **220** or semitransparent reflector **120d**, then reflector **220**, semitransparent reflector **120d**, or both, can also function as an electrode, either the anode or the cathode, for the organic EL medium. In OLED device **25**, semitransparent reflector **120d** functions as the bottom electrode for pixel **21d**, and reflector **220** functions as the top electrode for all the pixels. Other configurations are possible wherein the semitransparent reflector is a common electrode for all pixels and there is a separate reflector for each pixel. Still other configurations are possible wherein the electrodes and the reflectors are separate entities. The bottom electrode, i.e. the one closest to substrate **100**, is commonly the anode, but this invention is not limited to devices of that configuration.

[0034] Pixel **21d** functions as a microcavity because light emitted by emissive layer **213** is reflected by reflector **220** and a portion of light is reflected by semitransparent reflector **120d**. Typically the portion of light reflected is between 25% and 75%, and depends upon the thickness of the semitransparent reflector and the wavelength of the light. This leads to an enhancement of light **30d** emitted by pixel **21d** through semitransparent reflector **120d** wherein certain wavelengths of light **30d** will be enhanced. As is well known in the art, the distance between reflector **220** and semitransparent reflector **120d** is an integral multiple of half the wavelength of enhanced light **30d** corrected for phase shifts at the reflector surfaces. The thickness of organic layers **210** optimized for emission is not necessarily of the proper dimensions to provide the desired wavelength of light **30d**, and it can be desirable to include transparent cavity-spacer

layer **140d** to obtain the desired dimensions. Transparent cavity-spacer layer **140d** is formed above semitransparent reflector **120d**. Transparent cavity-spacer layer **140d** can be constructed of a metal oxide such as, but not limited to, indium-tin oxide (ITO), zinc-tin oxide (ZTO), tin oxide (SnOx), indium oxide (InOx), molybdenum oxide (MoOx), tellurium oxide (TeOx), antimony oxide (SbOx), indium zinc oxide (IZO), and zinc oxide (ZnOx). The thickness of transparent cavity-spacer layer **140d**, refractive index of transparent cavity-spacer layer **140d**, or both, are adjusted in conjunction with the thickness and index of refraction of organic layers **210** in order to tune the microcavity to resonate at the wavelength for the desired color of light for pixel **21d**. Tuning thickness and refractive index to achieve the desired microcavity emission is well known in the art.

[0035] In this case, transparent cavity-spacer layer **140d** also serves as an electrode for the organic layers **210** so that transparent cavity-spacer layer **140d** must be electrically connected down to the active matrix components. This can be achieved directly if transparent cavity-spacer layer **140d** is of a transparent conducting material such as a number of the metal oxides above. If transparent cavity-spacer layer **140d** is not conductive, a transparent electrode, transparent cavity-spacer layer **140d**, and semitransparent reflector **120d** can be formed of three (or more) different layers in a way in which the transparent electrode would be in electrical contact with the active matrix circuitry and transparent cavity-spacer layer **140d** would be between the transparent electrode and semitransparent reflector **120d**. The transparent electrode can be constructed of a metal oxide such as, but not limited to, indium-tin oxide (ITO), zinc-tin oxide (ZTO), tin oxide (SnOx), indium oxide (InOx), molybdenum oxide (MoOx), tellurium oxide (TeOx), antimony oxide (SbOx), and zinc oxide (ZnOx).

[0036] While transparent cavity-spacer layer **140d** is shown here as being between semitransparent reflector **120d** and organic layers **210**, in alternate embodiments transparent cavity-spacer layer **140d** can be formed between organic layers **210** and reflector **220**.

[0037] In another alternate embodiment, where one or more of organic layers **210** are not common to all pixels but are instead individually patterned for each pixel, then the transparent cavity-spacer layers can be limited, and the microcavity for the color-gamut-defining pixels can be tuned by separately tuning the thickness, refractive index, or both, of one or more of organic layers **210** for each color-gamut-defining pixel. If organic layers **210** are designed to emit broadband (e.g. white) light, it can be preferable to use the same thickness for one or more of the organic layers **210** for the within-gamut pixels and one or more of the color-gamut-defining pixels to reduce the number of deposition steps.

[0038] Pixel **21d** can be a within-gamut pixel, e.g. emitter **18** in FIG. 1A. In such a case, it is desirable that the microcavity formed by reflector **220**, semitransparent reflector **120d**, and the intervening layers be a multimode microcavity. By multimode microcavity, it is meant that the thickness and index of refraction of the layers of pixel **21d** are such that more than one wavelength of light is selectively enhanced. Multimode microcavities occur when two or more wavelengths are simultaneously enhanced by a microcavity. The optical thickness of the microcavity is tuned to resonate at approximately an integer multiple of half wave-

lengths of a first wavelength and a different integer multiple of half wavelengths of a second wavelength, etc. For example, Xu, et al. in U.S. Pat. No. 6,133,692 show a system in which a microcavity with an effective optical length of 1590 nm will selectively enhance broad-spectrum light to produce peaks at 454 nm (blue), 530 nm (green), and 636 nm (red), which can collectively be used to form white. Multimode microcavities are also described in U.S. Pat. Nos. 5,478,658 and 5,674,636. When pixel **21d** is a within-gamut pixel, a useful combination is achieved wherein the colors produced by color-gamut-defining pixels **21a**, **21b**, and **21c** are red, green, and blue, and the color produced by within-gamut pixel **21d** is white. Although not shown, one or more of color-gamut-defining pixels **21a**, **21b**, and **21c** can include a color filter element to further improve the colors of the color-gamut-defining pixels.

[0039] Although it has been found useful that pixel **21d** be a microcavity, it can be desirable that one or more of the color-gamut-defining pixels **21a**, **21b**, and **21c** further comprise a reflector and a semitransparent reflector which function to form a microcavity. This can be achieved with reflector **220** and one or more semitransparent reflectors **120a**, **120b**, and **120c**. Color-gamut-defining pixel **21a** is constructed using transparent cavity-spacer layer **140a** above semitransparent reflector **120a**. The thickness and index of refraction of transparent cavity-spacer layer **140a** is optimized in conjunction with the thickness and index of refraction of the organic layers **210** in order to tune the microcavity to resonate at a different wavelength for the desired color of light for pixel **21a**, for example, red. A similar construction is used for pixel **21b** with transparent cavity-spacer layer **140b** to produce the desired color of that pixel, for example, green. When more than one pixel includes a microcavity and transparent cavity-spacer layer, the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel. Such a construction permits OLED device **25** to be formed using organic layers **210** that produce broadband emission (e.g. white light) and are common to all pixels, thus limiting the need to pattern organic layers **210**.

[0040] Color-gamut-defining pixel **21c** is shown here as not having a transparent cavity-spacer layer, that is, where all but one of the pixels having a reflector and semitransparent reflector further include a transparent cavity-spacer layer. In this case, only the thickness and index of refraction of organic layers **210** are optimized in order to tune the cavity to resonate at a different wavelength for the desired color of light for pixel **21c**, for example, blue. If organic layers **210** produce broadband emission (e.g. white) and are common to all pixels, as shown, then organic layers **210** are optimized only for color-gamut-defining pixel **21c**, and the other color-gamut-defining pixels are separately tuned using their respective transparent cavity-spacer layers. This configuration reduces the number of different transparent cavity-spacer layers which need to be deposited and patterned. In an alternate embodiment, all pixels having a reflector and semitransparent reflector, including pixel **21c**, can further include a transparent cavity-spacer layer with each separately adjusted to tune the respective microcavities to the desired colors. Use of a transparent cavity-spacer layer in at least some pixels is preferred to permit the organic layers **210** to be deposited without patterning for each pixel. In another alternate embodiment, one or more of organic layers

210 can be separately patterned and adjusted in thickness or refractive index for one or more of the pixels to tune the microcavity of each of the color-gamut-defining pixels. In this configuration, a transparent cavity-spacer layer can be used or limited. However, this requires precision patterning of at least one of the organic layers. In another embodiment, one or more of the color-gamut-defining pixels **21a**, **21b**, or **21c** can include a color filter element, which will be further described below.

[0041] Pixel **21d** can be a color-gamut-defining pixel, e.g. emitter **17** in **FIG. 1B**. That is, the array of light-emitting pixels includes at least four pixels that produce colors which define a color gamut. A useful combination can be achieved wherein pixels **21a**, **21b**, and **21c** are red, green, and blue, and where pixel **21d** can be chosen from a color to extend the color gamut, e.g. yellow, cyan, or magenta. At least one of pixels **21a**, **21b**, **21c**, or **21d** comprises a reflector and a semitransparent reflector which function to form a microcavity. In one embodiment, pixel **21d** can have an effective thickness to enhance a single wavelength of light, such as a blue-green (cyan) wavelength. This can be emitter **17** in **FIG. 1A**, which would extend the color gamut and would be more efficient than a non-microcavity pixel. In another embodiment, pixel **21d** can have an effective thickness to be a multimode microcavity, which can selectively enhance two wavelengths of light. If these wavelengths are chosen to be different from the wavelengths emitted by pixels **21a**, **21b**, and **21c**, it is possible to produce an emission that extends the color gamut. In another embodiment, one or more of pixels **21a**, **21b**, **21c**, or **21d** include a color filter element which will be further described below.

[0042] The OLED device of this invention and the pixels therein are typically disposed as shown over a supporting substrate **100**. Substrate **100** can either be light transmissive or opaque, depending on the intended direction of light emission. The light transmissive property is desirable for viewing the EL emission through substrate **100**. Transparent glass or plastic is commonly employed in such cases. For applications where the EL emission is viewed through the top electrode, the transmissive characteristic of substrate **100** is immaterial, and therefore can be light transmissive, light absorbing, or light reflective. Substrates for use in this case include, but are not limited to, glass, plastic, semiconductor materials, silicon, ceramics, and circuit board materials.

[0043] The active matrix circuitry **110** is formed over substrate **100**. Active matrix circuitry **110** includes a first thin film transistor (TFT) comprised of a semiconductor active layer **111**, a gate dielectric **112**, a gate conductor **113**, a first insulating layer **114**, and a second insulating layer **117**. Active matrix circuitry **110** further includes one signal line **116** that carries the luminance signal and one power line **115** to supply power to the transistor. Methods of fabricating the TFT circuitry are well known in the art. While only a single transistor, signal line, and power line are shown for each pixel, typically, each pixel also has a second transistor (not shown) as well as a capacitor (not shown) and additional select lines (not shown). Many types of circuits having different numbers and configurations of circuit components are known in the art and it is understood that a wide variety of these circuits will work with this invention. Examples of active matrix configurations include U.S. Pat. Nos. 5,550,066; 6,281,634; and 6,501,466. While the TFTs shown are

fabricated with a thin film semiconductor active layer **111**, it is understood that with semiconducting substrates, substrate **100** can actually serve this function. **FIG. 3** shows a top gate structure, that is, where the gate conductor **113** and the gate dielectric **112** are above the semiconductor active layer **111**. However, it is also known in the art that TFTs with an inverse structure known as bottom gate can be used to drive organic EL devices.

[0044] An interpixel dielectric layer **160**, as described in U.S. Pat. No. 6,246,179, can be used to cover the edges of the transparent or semitransparent electrodes (e.g. semitransparent reflector **120d**) to prevent shorts or strong electric fields in this area. The interpixel dielectric layer **160** can also cover the transparent cavity-spacer layer (e.g. **140d**) as shown if the transparent cavity-spacer layer is conductive or forms part of the electrode. While use of the interpixel dielectric layer **160** is preferred, it is not required for successful implementation of the present invention.

[0045] OLED device **25** further includes organic layers **210**. There are numerous configurations of the organic layers **210** known in the art wherein the present invention can be successfully practiced. For example, organic layers **210** can include e.g. hole-injecting layer **211**, hole-transporting layer **212**, emissive layer **213**, and electron-transporting layer **214**.

[0046] While not always necessary, it is often useful to provide a hole-injecting layer **211**. Hole-injecting layer **211** can serve to improve the film formation property of subsequent organic layers and to facilitate hole injection into hole-transporting layer **212**. Suitable materials for use in hole-injecting layer **211** include, but are not limited to, porphyrinic compounds as described in U.S. Pat. No. 4,720,432, plasma-deposited fluorocarbon polymers as described in U.S. Pat. Nos. 6,127,004, 6,208,075 and 6,208,077, and some aromatic amines, for example, m-MTDATA (4,4',4"-tris[(3-methylphenyl)phenylamino]triphenyl-amine). Alternative hole-injecting materials for organic EL devices are described in EP 0 891 121 A1 and EP 1 029 909 A1.

[0047] Hole-transporting layer **212** contains at least one hole-transporting compound such as an aromatic tertiary amine, where the latter is understood to be a compound containing at least one trivalent nitrogen atom that is bonded only to carbon atoms, at least one of which is a member of an aromatic ring. In one form the aromatic tertiary amine can be an arylamine, such as a monoarylamine, diarylamine, triarylamine, or a polymeric arylamine. Exemplary monomeric triarylaminines are illustrated by Klupfel, et al. U.S. Pat. No. 3,180,730. Other suitable triarylaminines substituted with one or more vinyl radicals and/or comprising at least one active-hydrogen-containing group are disclosed by Brantley, et al. U.S. Pat. Nos. 3,567,450 and 3,658,520.

[0048] A more preferred class of aromatic tertiary amines are those which include at least two aromatic tertiary amine moieties as described in U.S. Pat. Nos. 4,720,432 and 5,061,569. Hole-transporting layer **212** can be formed of a single or a mixture of aromatic tertiary amine compounds. Illustrative of useful aromatic tertiary amines are the following:

[0049] 1,1-Bis(4-di-p-tolylaminophenyl)cyclohexane;

[0050] 1,1-Bis(4-di-p-tolylaminophenyl)-4-phenylcyclohexane;

- [0051] N,N,N',N'-tetraphenyl-4,4'''-diamino-1,1':4',1'':4'',1'''-quaterphenyl;
- [0052] Bis(4-dimethylamino-2-methylphenyl)phenylmethane;
- [0053] 1,4-bis[2-[4-[N,N-di(p-tolyl)amino]phenyl]vinyl]benzene (BDTAPVB);
- [0054] N,N,N',N'-Tetra-p-tolyl-4,4'-diaminobiphenyl;
- [0055] N,N,N',N'-Tetraphenyl-4,4'-diaminobiphenyl;
- [0056] N,N,N',N'-tetra-1-naphthyl-4,4'-diaminobiphenyl;
- [0057] N,N,N',N'-tetra-2-naphthyl-4,4'-diaminobiphenyl;
- [0058] N-Phenylcarbazole;
- [0059] 4,4'-Bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPB);
- [0060] 4,4'-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]biphenyl (TNB);
- [0061] 4,4'-Bis[N-(1-naphthyl)-N-phenylamino]p-terphenyl;
- [0062] 4,4'-Bis[N-(2-naphthyl)-N-phenylamino]biphenyl;
- [0063] 4,4'-Bis[N-(3-acenaphthenyl)-N-phenylamino]biphenyl;
- [0064] 1,5-Bis[N-(1-naphthyl)-N-phenylamino]naphthalene;
- [0065] 4,4'-Bis[N-(9-anthryl)-N-phenylamino]biphenyl;
- [0066] 4,4'-Bis[N-(1-anthryl)-N-phenylamino]-p-terphenyl;
- [0067] 4,4'-Bis[N-(2-phenanthryl)-N-phenylamino]biphenyl;
- [0068] 4,4'-Bis[N-(8-fluoranthryl)-N-phenylamino]biphenyl;
- [0069] 4,4'-Bis[N-(2-pyrenyl)-N-phenylamino]biphenyl;
- [0070] 4,4'-Bis[N-(2-naphthacenyl)-N-phenylamino]biphenyl;
- [0071] 4,4'-Bis[N-(2-perylenyl)-N-phenylamino]biphenyl;
- [0072] 4,4'-Bis[N-(1-coronenyl)-N-phenylamino]biphenyl;
- [0073] 2,6-Bis(di-p-tolylamino)naphthalene;
- [0074] 2,6-Bis[di-(1-naphthyl)amino]naphthalene;
- [0075] 2,6-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]naphthalene;
- [0076] N,N,N',N'-Tetra(2-naphthyl)-4,4''-diamino-p-terphenyl;
- [0077] 4,4'-Bis[N-phenyl-N-[4-(1-naphthyl)-phenyl]amino]biphenyl;
- [0078] 2,6-Bis[N,N-di(2-naphthyl)amino]fluorene;

[0079] 4,4',4''-tris[(3-methylphenyl)phenylamino]triphenylamine (MTDATA); and

[0080] 4,4'-Bis[N-(3-methylphenyl)-N-phenylamino]biphenyl (TPD).

[0081] Another class of useful hole-transporting materials includes polycyclic aromatic compounds as described in EP 1 009 041. Tertiary aromatic amines with more than two amine groups can be used including oligomeric materials. In addition, polymeric hole-transporting materials can be used such as poly(N-vinylcarbazole) (PVK), polythiophenes, polypyrrole, polyaniline, and copolymers such as poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) also called PEDOT/PSS.

[0082] As more fully described in U.S. Pat. Nos. 4,769,292 and 5,935,721, emissive layer 213 includes a luminescent or fluorescent material where electroluminescence is produced as a result of electron-hole pair recombination in this region, producing light. Emissive layer 213 can be comprised of a single material, but more commonly includes a host material doped with a guest compound or compounds where light emission comes primarily from the dopant and can be of any color. The host materials in emissive layer 213 can be an electron-transporting material, as defined below, a hole-transporting material, as defined above, or another material or combination of materials that support hole-electron recombination. The dopant is usually chosen from highly fluorescent dyes, but phosphorescent compounds, e.g., transition metal complexes as described in WO 98/55561, WO 00/18851, WO 00/57676, and WO 00/70655 are also useful. Dopants are typically coated as 0.01 to 10% by weight into the host material. Polymeric materials such as polyfluorenes and polyvinylarylenes (e.g., poly(p-phenylenevinylene), PPV) can also be used as the host material. In this case, small molecule dopants can be molecularly dispersed into the polymeric host, or the dopant can be added by copolymerizing a minor constituent into the host polymer.

[0083] An important relationship for choosing a dye as a dopant is a comparison of the bandgap potential, which is defined as the energy difference between the highest occupied molecular orbital and the lowest unoccupied molecular orbital of the molecule. For efficient energy transfer from the host to the dopant molecule, a necessary condition is that the bandgap of the dopant is smaller than that of the host material. For phosphorescent emitters it is also important that the host triplet energy level be high enough to enable energy transfer from host to dopant.

[0084] Host and emitting molecules known to be of use include, but are not limited to, those disclosed in U.S. Pat. Nos. 4,768,292; 5,141,671; 5,150,006; 5,151,629; 5,405,709; 5,484,922; 5,593,788; 5,645,948; 5,683,823; 5,755,999; 5,928,802; 5,935,720; 5,935,721; and 6,020,078.

[0085] Metal complexes of 8-hydroxyquinoline (oxine) and similar derivatives constitute one class of useful host compounds capable of supporting electroluminescence. Illustrative of useful chelated oxinoid compounds are the following:

[0086] CO-1: Aluminum trisoxine[alias, tris(8-quinolinolato)aluminum(III)];

[0087] CO-2: Magnesium bisoxine[alias, bis(8-quinolinolato)magnesium(II)];

- [0088] CO-3: Bis[benzo{ft}-8-quinolinolato]zinc (II);
- [0089] CO-4: Bis(2-methyl-8-quinolinolato)aluminum(III)- μ -oxo-bis(2-methyl-8-quinolinolato)aluminum(III);
- [0090] CO-5: Indium trisoxine[alias, tris(8-quinolinolato)indium];
- [0091] CO-6: Aluminum tris(5-methyloxine)[alias, tris(5-methyl-8-quinolinolato)aluminum(III)];
- [0092] CO-7: Lithium oxine[alias, (8-quinolinolato)lithium(I)];
- [0093] CO-8: Gallium oxine[alias, tris(8-quinolinolato)gallium(III)]; and
- [0094] CO-9: Zirconium oxine[alias, tetra(8-quinolinolato)zirconium(IV)].
- [0095] Other classes of useful host materials include, but are not limited to, derivatives of anthracene, such as 9,10-di-(2-naphthyl)anthracene and derivatives thereof as described in U.S. Pat. No. 5,935,721, distyrylarylene derivatives as described in U.S. Pat. No. 5,121,029, and benzazole derivatives, for example, 2,2',2''-(1,3,5-phenylene)tris[1-phenyl-1H-benzimidazole]. Carbazole derivatives are particularly useful hosts for phosphorescent emitters.
- [0096] Useful fluorescent dopants include, but are not limited to, derivatives of anthracene, tetracene, xanthene, perylene, rubrene, coumarin, rhodamine, quinacridone, dicyanomethylenepyran compounds, thiopyran compounds, polymethine compounds, pyrilium and thiapyrilium compounds, fluorene derivatives, perfluoranthene derivatives, indenoperylene derivatives, bis(aziny)amine boron compounds, bis(aziny)methane compounds, and carbostyryl compounds.
- [0097] Preferred thin film-forming materials for use in forming electron-transporting layer 214 of the organic layers 210 of this invention are metal chelated oxinoid compounds, including chelates of oxine itself (also commonly referred to as 8-quinolinol or 8-hydroxyquinoline). Such compounds help to inject and transport electrons, exhibit high levels of performance, and are readily fabricated in the form of thin films. Exemplary oxinoid compounds were listed previously.
- [0098] Other electron-transporting materials include various butadiene derivatives as disclosed in U.S. Pat. No. 4,356,429 and various heterocyclic optical brighteners as described in U.S. Pat. No. 4,539,507. Benzazoles and triazines are also useful electron-transporting materials.
- [0099] In some instances, emissive layer 213 and electron-transporting layer 214 can optionally be replaced by a single layer that serves the function of supporting both light emission and electron transportation. It is also known in the art that emitting dopants can be added to the hole-transporting layer 212, which can serve as a host. Multiple dopants can be added to one or more layers in order to produce a white-emitting OLED, for example, by combining blue- and yellow-emitting materials, cyan- and red-emitting materials, or red-, green-, and blue-emitting materials. White-emitting devices are described, for example, in EP 1 187 235; U.S. patent application Publication 2002/0025419 A1; EP 1 182 244; and U.S. Pat. Nos. 5,683,823; 5,503,910; 5,405,709;

and 5,283,182. As shown in commonly assigned EP 1187235 A2, a white-emitting organic EL media can be achieved by the inclusion of the following layers: a hole-injecting layer 211; a hole-transporting layer 212 that is disposed over hole-injecting layer 211 and is doped with a rubrene compound for emitting light in the yellow region of the spectrum; an emissive layer 213 doped with a blue-light-emitting compound disposed over hole-transporting layer 212; and an electron-transporting layer 214 disposed over emissive layer 213. Alternate embodiments where one or more different materials are used in organic layers 210 for different pixels can also be applied to the present invention.

[0100] Additional layers such as electron- or hole-blocking layers as taught in the art can be employed in devices of this invention. Hole-blocking layers are commonly used to improve efficiency of phosphorescent emitter devices, for example, as in U.S. patent application Publication 2002/0015859 A1.

[0101] The organic materials above are suitably deposited through a vapor-phase method such as sublimation, but can be deposited from a fluid, for example, from a solvent with an optional binder to improve film formation. If the material is a polymer, solvent deposition is useful but other methods can be used, such as sputtering or thermal transfer from a donor sheet. The material to be deposited by sublimation can be vaporized from a sublimator "boat" often comprised of a tantalum material, e.g., as described in U.S. Pat. No. 6,237,529, or can be first coated onto a donor sheet and then sublimed in closer proximity to the substrate. Layers with a mixture of materials can utilize separate sublimator boats or the materials can be pre-mixed and coated from a single boat or donor sheet. Patterned deposition can be achieved using shadow masks, integral shadow masks (U.S. Pat. No. 5,294,870), spatially-defined thermal dye transfer from a donor sheet (U.S. Pat. Nos. 5,688,551; 5,851,709; and 6,066,357), and inkjet method (U.S. Pat. No. 6,066,357).

[0102] Most OLED devices are sensitive to moisture or oxygen, or both, so they are commonly sealed in an inert atmosphere such as nitrogen or argon, along with a desiccant such as alumina, bauxite, calcium sulfate, clays, silica gel, zeolites, alkaline metal oxides, alkaline earth metal oxides, sulfates, or metal halides and perchlorates. Methods for encapsulation and desiccation include, but are not limited to, those described in U.S. Pat. No. 6,226,890. In addition, barrier layers such as SiO_x, Teflon, and alternating inorganic/polymeric layers are known in the art for encapsulation.

[0103] OLED devices of this invention can employ various well known optical effects in order to enhance its properties if desired. This includes, but is not limited to, optimizing layer thicknesses to yield maximum light transmission, providing dielectric mirror structures, replacing reflective electrodes with light-absorbing electrodes, providing anti-glare or anti-reflection coatings over the display, providing a polarizing medium over the display, or providing colored, neutral density, or color conversion filters over the display.

[0104] Turning now to FIG. 4, there is shown a spectrum of emission after multimode microcavity enhancement vs. a non-enhanced white-light-emitting OLED device. Spectrum 40 is an emission spectrum for a white-light-emitting OLED device without microcavity enhancement. While a specific

curve is shown, it will be recognized that any spectrum that includes red, green, and blue components can be utilized. The use of a multimode microcavity such as that in pixel **21d** will enhance certain wavelengths of the spectrum to form e.g., multiple resonant peaks **42**, **44**, and **46**.

[0105] FIG. 5 shows a cross-sectional view of an array of light-emitting pixels according to another embodiment of the present invention. OLED device **35** is top-emitting, that is, light (**30a**, **30b**, **30c**, and **30d**) is emitted in the direction away from substrate **100**. OLED device **35** is similar to OLED device **25**, except that the positions of reflector and semitransparent reflector are reversed. Each pixel includes a reflector over substrate **100** (e.g. reflectors **150a** in pixel **50a**, **150b** in pixel **50b**, **150c** in pixel **50c**, and **150d** in pixel **50d**), which functions to form the bottom of a microcavity. Semitransparent reflector **230** forms the top of the microcavity for all pixels. This permits a portion of light to be emitted from the top of OLED device **35**. Reflector **150d** and semitransparent reflector **230** also function as electrodes, and it is an advantage of this invention that a highly conductive top electrode can be used in a top-emitting device without the need to pattern that electrode. However, other embodiments can be envisioned wherein the reflectors and the electrodes are separate entities. In other aspects, OLED device **35** functions as OLED device **25** described above.

[0106] The embodiments described above illustrate examples where the efficiency and lifetime of all the color-gamut-defining pixels have been improved by using microcavities. Other embodiments are possible whereby only some of the color-gamut-defining pixels are improved by using a microcavity structure. That is, some of the color-gamut-defining pixels are not constructed as to form a microcavity. FIG. 6 shows an example of such a configuration wherein OLED device **60** has two microcavity color-gamut-defining pixels **22b** and **22c**, one non-microcavity color-gamut-defining pixel **22a**, and a fourth pixel **22d**, which can be color-gamut-defining or within-gamut as defined above. In this case, non-microcavity color-gamut-defining pixel **22a** is formed using a reflector **220** and a transparent electrode **130a**. If organic layers **210** are white- or broadband-emitting, then a color filter **301** can be used to achieve the desired gamut color for these pixels. By color filter, it is meant any material that is capable of converting light of one wavelength range into light of a different wavelength range. These can include traditional color filters, which only pass a narrow range of wavelengths, and therefore can convert broadband or white light into a specific color, e.g. green. For the purposes of this invention, color filters also include color change materials (also known as color change modules) such as fluorescent absorber/re-emitters, which absorb light of a relatively narrow range of wavelengths (e.g. blue light) and re-emit it as light of a different range of wavelengths (e.g. green light). Such materials are well known in the art. As long as any within-gamut pixels are constructed as a microcavity in the case that includes at least one within-gamut pixel, or any one of the pixels is constructed as a microcavity in the case wherein all of the pixels are color-gamut-defining, then some improvement in lifetime and efficiency of the OLED device will be realized according to the present invention. There can be advantages in forming one or more pixels without a microcavity. Microcavities tend to have narrow viewing angles, and it can be desirable to have a portion of an OLED device with a wider viewing angle.

[0107] As described above, in order to reduce the number of deposition steps and patterning steps, one of the color-gamut-defining pixels (e.g. **22a**) can be formed without a transparent cavity-spacer layer. Another method to reduce the number of deposition and patterning steps is to use the same material, thickness, and refractive index to form one of the transparent cavity-spacer layers, for example, transparent cavity-spacer layer **140b**, and the transparent electrodes of the non-microcavity pixels, for example transparent electrode **130a**.

[0108] Turning now to FIG. 7, there is shown a cross-sectional view of another embodiment of an array of light-emitting pixels according to this invention. OLED device **65** includes organic layers **210**, including at least one emissive layer **213** that produces light, spaced electrodes, and an array of at least four pixels **55a**, **55b**, **55c**, and **55d**, which produce light of different colors. OLED device **65** can be an active matrix device (as shown) or a passive matrix device, and can be bottom-emitting as shown, or top-emitting. Pixels **55a**, **55b**, and **55c** are color-gamut-defining pixels, as defined above. Pixel **55d** can be a within-gamut pixel, or it can be a color-gamut-defining pixel. Color-gamut-defining pixels **55a**, **55b**, and **55c** have a different color filter **301a**, **301b**, and **301c**, respectively, associated with each. Each color filter is a different color, e.g. red, green, and blue. Pixel **55d** can optionally have a color filter (not shown) as well, so that each pixel can have a different color filter. While the color filters are shown below substrate **100**, it will be understood that they can be located elsewhere, e.g. between the semitransparent reflectors **120** (such as **120a**) and substrate **100**.

[0109] Each of the pixels in this embodiment includes a reflector **220** and a semitransparent reflector, e.g. semitransparent reflector **120a** for pixel **55a**, and is a multimode microcavity. The reflector and semitransparent reflector function in this embodiment as electrodes, but other embodiments can be envisioned wherein the reflectors and electrodes are separate entities. If necessary, a transparent cavity-spacer layer (e.g. **140a** for pixel **55a**) is included.

[0110] Each microcavity enhances certain wavelengths of light as described above. The color filter selects the desired color of emitted light for that pixel. For example, if color filter **301a** is a red filter, it will permit resonant peak **46** of FIG. 4 to pass, but will block resonant peaks **42** and **44**. Similarly, if color filter **301b** is a green color filter and color filter **301c** is a blue color filter, then pixels **55a**, **55b**, and **55c** will define a color gamut as shown in FIG. 1.

[0111] In this embodiment, it is most effective that organic layers **210** produce broadband emission (e.g. white) and are common to all the pixels. This limits the need to pattern organic layers **210** and permits the microcavity structure and the color filters to select the desired wavelength of light for a given pixel.

[0112] If pixel **55d** is a within-gamut pixel, it can be constructed with or without a color filter. The most common use of a within-gamut pixel **55d** will be for making an RGBW device, that is, wherein the colors produced by color-gamut-producing pixels **55a**, **55b**, and **55c** will be red, green, and blue, and the color produced by within-gamut pixel **55d** will be white. Pixel **55d** can be left unfiltered so as to emit the combination of enhanced red, green, and blue light, thereby providing a white-light-emitting pixel. However, those skilled in the art will realize that such an

enhancement by a multimode microcavity will not always provide an ideally-balanced white, and therefore an optional color filter can be used to improve the color balance of pixel **55d**.

[0113] If pixel **55d** is a color-gamut-defining pixel, it can be constructed with or without a color filter, but the use of a color filter can be advantageous. If the multimode microcavity produces more than three resonant peaks, a color filter associated with pixel **55d** can permit certain desired wavelengths to pass, producing a colored pixel which extends the color gamut, as shown by emitter **17** in **FIG. 1B**.

[0114] Although all of the transparent cavity-spacer layers **140a** through **140d** are shown the same size, this invention is not limited to that. The thickness of each transparent cavity-spacer layer, or the refractive index of each transparent cavity-spacer layer, or both, can be separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to desired colors. For example, pixels **55a**, **55b**, and **55c** can have a multimode cavity of a proper thickness and refraction index to enhance red, green, and blue light. Color filters **301a**, **301b**, and **301c** then select the desired color for emission. Pixel **55d** can have a multimode microcavity of a proper thickness and refraction index to enhance different wavelengths, one of which can be e.g., yellow. A color filter (not shown) associated with pixel **55d** can select yellow emission, providing a fourth color-gamut-defining pixel, which can extend the normal color gamut of an OLED device. This technique can be used with one or more of pixels **55a** to **55d**. In an alternate embodiment, all but one of the pixels can include a transparent cavity-spacer layer wherein the thickness of each transparent cavity-spacer layer, or the refractive index of each transparent cavity-spacer layer, or both, can be separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to desired colors. The remaining pixel can be tuned to the desired color by selecting the thickness and refractive index of organic layers **210**.

[0115] Although this invention has been shown to be effective in the case of broadband-emitting organic layers **210** that are common to all pixels, it can also be used in the structure wherein one or more of the organic layers **210** are separately patterned for one or more of the color-gamut-defining pixels. That is, the pixel that one desires to be red-emitting will be patterned with a red-emitting organic layer, the pixel that one desires to be green-emitting will be patterned with a green-emitting organic layer, etc. Such structures are well known in the art. In such a case, a relatively broad emission in e.g. the red region of the spectrum can be enhanced by a microcavity to be a much narrower emission. This improved color purity can be more effective in forming combinations of colors in a full color display.

[0116] Turning now to **FIG. 8**, there is shown a cross-sectional view of another embodiment of an array of light-emitting pixels according to this invention. OLED device **75** includes many of the features of OLED device **65**. However, since the transparent cavity-spacer layers in OLED device **65** are the same thickness, OLED device **75** uses a transparent cavity-spacer layer **140** that is common to several pixels, and can be common to all pixels. Such an arrange-

ment requires that the transparent cavity-spacer layer **140** comprises a transparent non-conducting material, such as silicon oxides (SiOx), silicon nitrides (Si_xN_y), silicon oxynitrides (Si_xO_yN_z), or transparent polymer materials. OLED device **75** must also include a way of conducting current across the non-conducting transparent cavity-spacer layer **140**. Transparent electrodes **130a**, **130b**, **130c**, and **130d**, connected through the corresponding semitransparent reflector can do this.

[0117] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

Parts List

[0118]	CIE color space
[0119]	12 red emitter
[0120]	13 green emitter
[0121]	14 blue emitter
[0122]	15 desired color
[0123]	16 color gamut
[0124]	17 cyan emitter
[0125]	18 white emitter
[0126]	19 color gamut
[0127]	20a group of pixels
[0128]	20b group of pixels
[0129]	20c group of pixels
[0130]	20d group of pixels
[0131]	21a pixel
[0132]	21b pixel
[0133]	21d pixel
[0134]	22a pixel
[0135]	22b pixel
[0136]	22c pixel
[0137]	22d pixel
[0138]	22d pixel
[0139]	25 OLED device
[0140]	30a light
[0141]	30b light
[0142]	30c light
[0143]	30d light
[0144]	35 OLED device
[0145]	40 spectrum
[0146]	42 resonant peak
[0147]	44 resonant peak
[0148]	46 resonant peak
[0149]	50a pixel

[0150] 50b pixel
 [0151] 50c pixel
 [0152] 50d pixel
 [0153] 55a pixel
 [0154] 55b pixel
 [0155] 55c pixel
 [0156] 55d pixel
 [0157] 60 OLED device
 [0158] 65 OLED device
 [0159] 75 OLED device
 [0160] 100 substrate
 [0161] 110 active matrix circuitry
 [0162] 111 semiconductor active layer
 [0163] 112 gate dielectric
 [0164] 113 gate conductor
 [0165] 114 first insulating layer
 [0166] 115 power line
 [0167] 116 signal line
 [0168] 117 second insulating layer
 [0169] 120a semitransparent reflector
 [0170] 120b semitransparent reflector
 [0171] 102c semitransparent reflector
 [0172] 120d semitransparent reflector
 [0173] 130a transparent electrode
 [0174] 130b transparent electrode
 [0175] 130c transparent electrode
 [0176] 130d transparent electrode
 [0177] 140 transparent cavity-spacer layer
 [0178] 140a transparent cavity-spacer layer
 [0179] 140b transparent cavity-spacer layer
 [0180] 140d transparent cavity-spacer layer
 [0181] 150a reflector
 [0182] 150b reflector
 [0183] 150c reflector
 [0184] 150d reflector
 [0185] 160 interpixel dielectric layer
 [0186] 210 organic layers
 [0187] 211 hole-injecting layer
 [0188] 213 hole-transporting layer
 [0189] 213 emissive layer
 [0190] 214 electron-transporting layer
 [0191] 220 reflector
 [0192] 230 semitransparent reflector

[0193] 301 color filter
 [0194] 301a color filter
 [0195] 301b color filter
 [0196] 301c color filter

1. An OLED device comprising:

a) an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least three pixels produce colors which define a color gamut and at least one pixel produces light within the color gamut; and

b) wherein the at least one pixel within the color gamut includes a reflector and a semitransparent reflector which function to form a microcavity.

2. The OLED device of claim 1 wherein the microcavity of the at least one within-gamut pixel is a multimode microcavity.

3. The OLED device of claim 1 wherein one or more of the color-gamut-defining pixels further comprise a reflector and a semitransparent reflector which function to form a microcavity.

4. The OLED device of claim 3 wherein the colors produced by the color-gamut-defining pixels are red, green and blue, and the color produced by the within-gamut pixel is white.

5. The OLED device of claim 3 wherein the reflector also functions as an electrode for at least one of the pixels.

6. The device of claim 3 wherein the semitransparent reflector also functions as an electrode for one or more of the pixels.

7. The OLED device of claim 1 wherein the organic layers produce broadband emission and are common to all the pixels.

8. The OLED device of claim 1 wherein at least one of the color-gamut-defining pixels further comprises a color filter element.

9. The OLED device of claim 1 wherein the device is a passive matrix device.

10. The OLED device of claim 1 wherein the device is an active matrix device.

11. The OLED device of claim 1 wherein the at least one within-gamut pixel further includes a transparent cavity-spacer layer.

12. The OLED device of claim 3 wherein the pixels having a reflector and semitransparent reflector further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

13. The OLED device of claim 3 wherein all but one of the pixels having a reflector and semitransparent reflector further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

14. The OLED device of claim 1 wherein one or more of the organic layers are separately patterned for one or more of the pixels.

15. The OLED device of claim 1 wherein the device is bottom-emitting.

16. The OLED device of claim 1 wherein the device is top-emitting.

17. An OLED device comprising:

a) an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least four pixels produce colors which define a color gamut; and

b) wherein at least one pixel further comprises a reflector and a semitransparent reflector which function to form a microcavity.

18. The OLED device of claim 17 wherein at least one of the pixels having a reflector and a semitransparent reflector is a multimode micro cavity.

19. The OLED device of claim 17 wherein the reflector also functions as an electrode for at least one of the pixels.

20. The device of claim 17 wherein the semitransparent reflector also functions as an electrode for one or more of the pixels.

21. The OLED device of claim 17 wherein the organic layers produce broadband emission and are common to all the pixels.

22. The OLED device of claim 17 wherein at least one of the pixels further comprises a color filter element.

23. The OLED device of claim 17 wherein the device is a passive matrix device.

24. The OLED device of claim 17 wherein the device is an active matrix device.

25. The OLED device of claim 17 wherein the pixels having a reflector and semitransparent reflector further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

26. The OLED device of claim 17 wherein all but one of the pixels having a reflector and semitransparent reflector further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

27. The OLED device of claim 17 wherein one or more of the organic layers are separately patterned for one or more of the pixels.

28. The OLED device of claim 17 wherein the device is bottom-emitting.

29. The OLED device of claim 17 wherein the device is top-emitting.

30. An OLED device comprising:

a) an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least three pixels produce colors which define a color gamut and at least one pixel produces light within the color gamut;

b) a different color filter associated with each of the color-gamut-defining pixels; and

c) wherein each pixel is a multimode microcavity and includes a reflector and a semitransparent reflector.

31. The OLED device of claim 30 wherein all of the pixels have different color filters.

32. The OLED device of claim 30 wherein the colors produced by the color-gamut-defining pixels are red, green, and blue, and the color produced by the within-gamut pixel is white.

33. The OLED device of claim 30 wherein the reflector also functions as an electrode for at least one of the pixels.

34. The device of claim 30 wherein the semitransparent reflector also functions as an electrode for one or more of the pixels.

35. The OLED device of claim 30 wherein the organic layers produce broadband emission and are common to all the pixels.

36. The OLED device of claim 30 wherein the device is a passive matrix device.

37. The OLED device of claim 30 wherein the device is an active matrix device.

38. The OLED device of claim 30 wherein the at least one within-gamut pixel further includes a transparent cavity-spacer layer.

39. The OLED device of claim 30 wherein the pixels further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

40. The OLED device of claim 30 wherein one or more of the organic layers are separately patterned for one or more of the pixels.

41. The OLED device of claim 30 wherein the device is bottom-emitting.

42. The OLED device of claim 30 wherein the device is top-emitting.

43. An OLED device comprising:

a) an array of light-emitting pixels having organic layers, including at least one emissive layer that produces light and spaced electrodes, and wherein at least four pixels produce colors which define a color gamut;

b) a different color filter associated with at least three of the color-gamut defining pixels; and

c) wherein each of the pixels is a multimode microcavity and includes a reflector and a semitransparent reflector.

44. The OLED device of claim 43 wherein the reflector also functions as an electrode for at least one of the pixels.

45. The device of claim 43 wherein the semitransparent reflector also functions as an electrode for one or more of the pixels.

46. The OLED device of claim 43 wherein the organic layers produce broadband emission and are common to all the pixels.

47. The OLED device of claim 43 wherein the device is a passive matrix device.

48. The OLED device of claim 43 wherein the device is an active matrix device.

49. The OLED device of claim 43 wherein the pixels further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

50. The OLED device of claim 43 wherein all but one of the pixels further include a transparent cavity-spacer layer, wherein the thickness of the transparent cavity-spacer layer, refractive index of the transparent cavity-spacer layer, or both, are separately adjusted for each differently colored pixel in conjunction with the thickness and refractive index of the organic layers to tune the microcavities to the desired colors.

51. The OLED device of claim 43 wherein one or more of the organic layers are separately patterned for one or more of the pixels.

52. The OLED device of claim 43 wherein the device is bottom-emitting.

53. The OLED device of claim 43 wherein the device is top-emitting.

* * * * *

专利名称(译)	彩色OLED，增加了色域像素		
公开(公告)号	US20050225232A1	公开(公告)日	2005-10-13
申请号	US10/819697	申请日	2004-04-07
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	BOROSON MICHAEL L WINTERS DUSTIN L TYAN YUAN SHENG		
发明人	BOROSON, MICHAEL L. WINTERS, DUSTIN L. TYAN, YUAN-SHENG		
IPC分类号	H05B33/00		
CPC分类号	H01L27/3213 H01L51/5265		
其他公开文献	US7129634		
外部链接	Espacenet USPTO		

摘要(译)

OLED器件包括具有有机层的发光像素阵列，包括产生光和间隔电极的至少一个发光层，并且其中至少三个像素产生限定色域的颜色，并且至少一个像素产生光。色域，并且其中色域内的至少一个像素包括反射器和半透明反射器，其用于形成微腔。

