

(43) **Pub. Date:** **May 8, 2008**

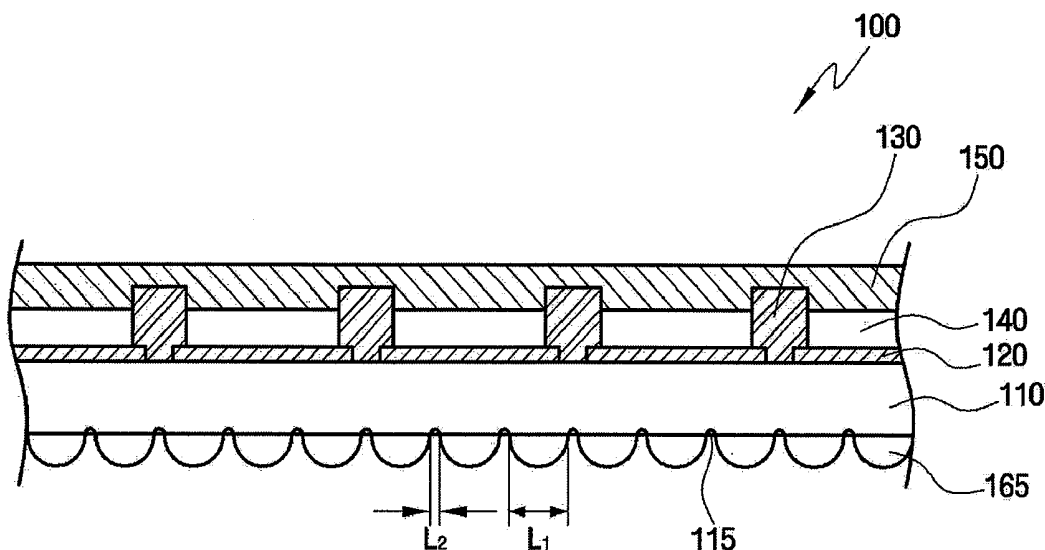


FIG. 1

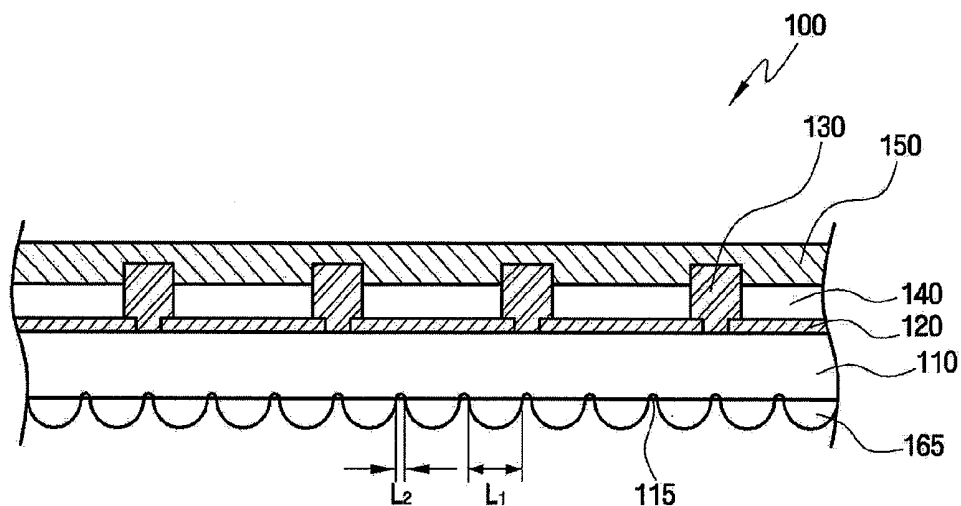


FIG. 2

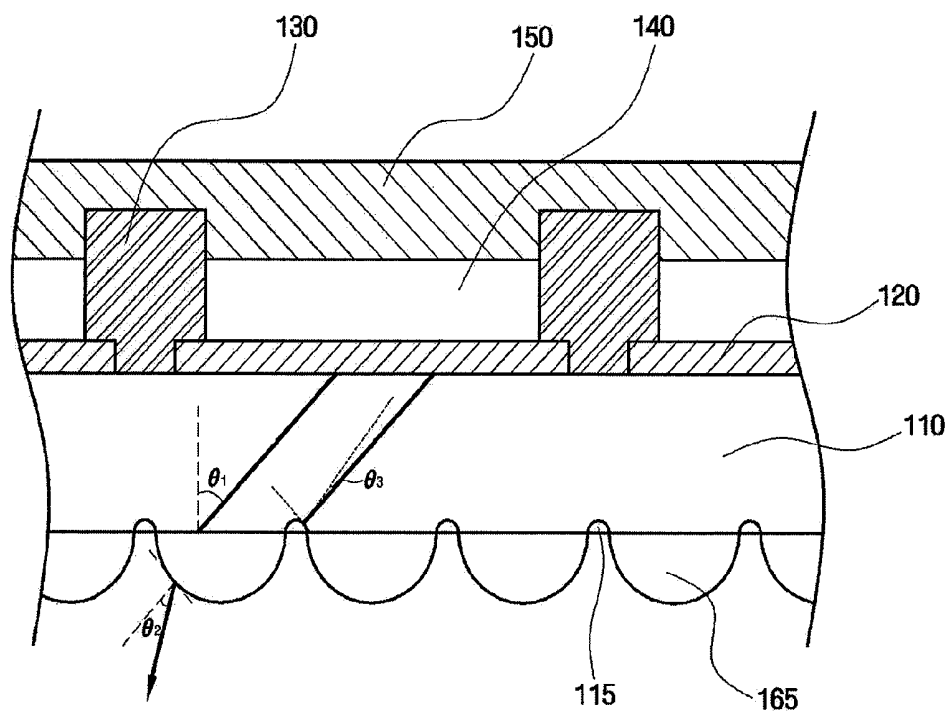


FIG. 3

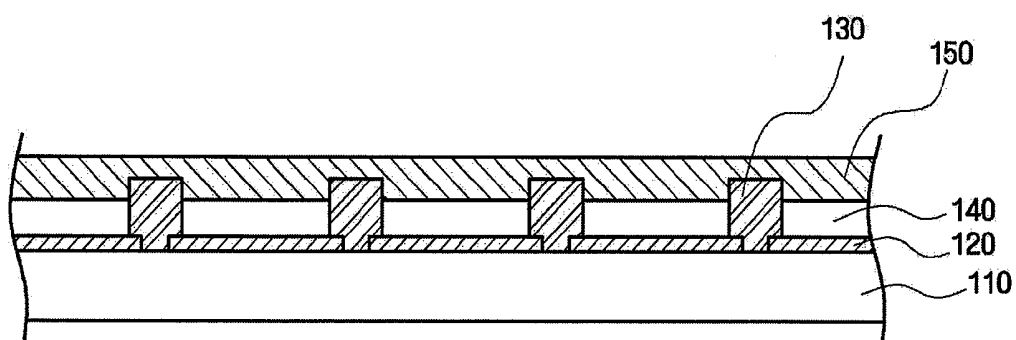


FIG. 4

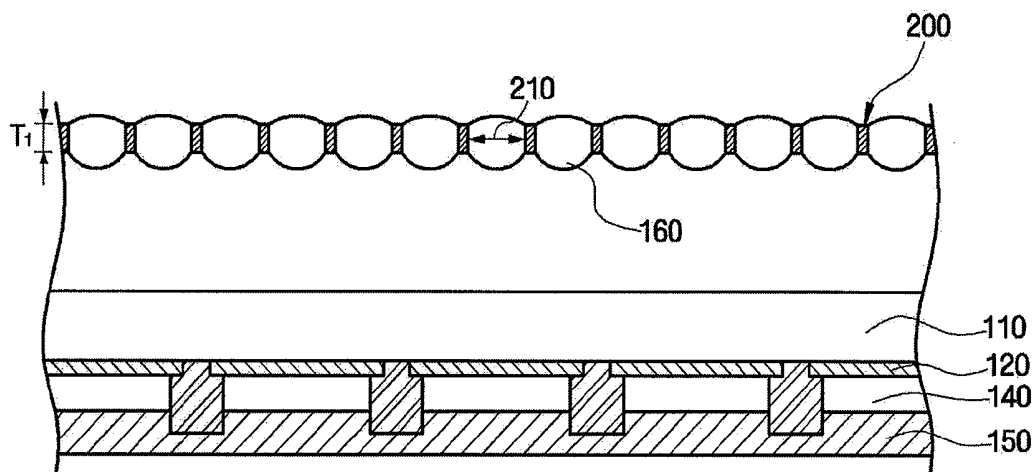


FIG. 5

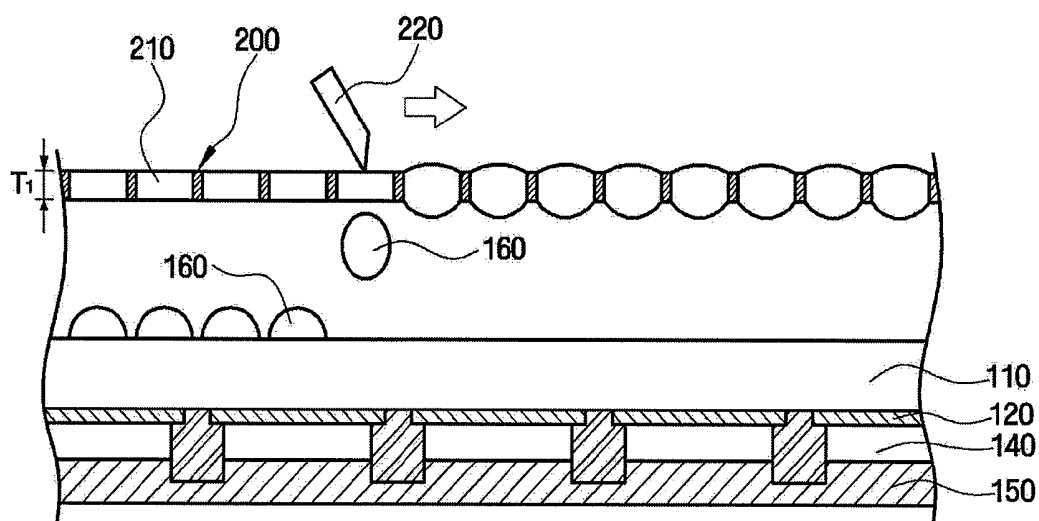


FIG. 6

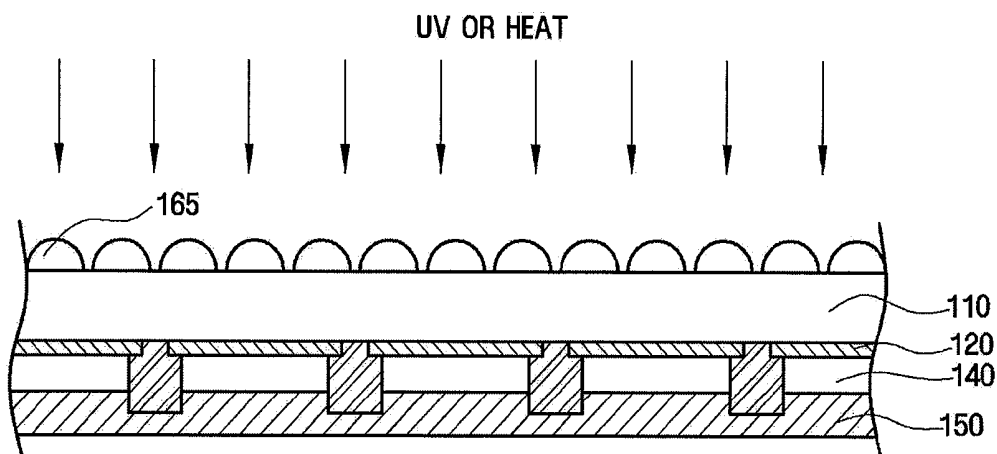


FIG. 7

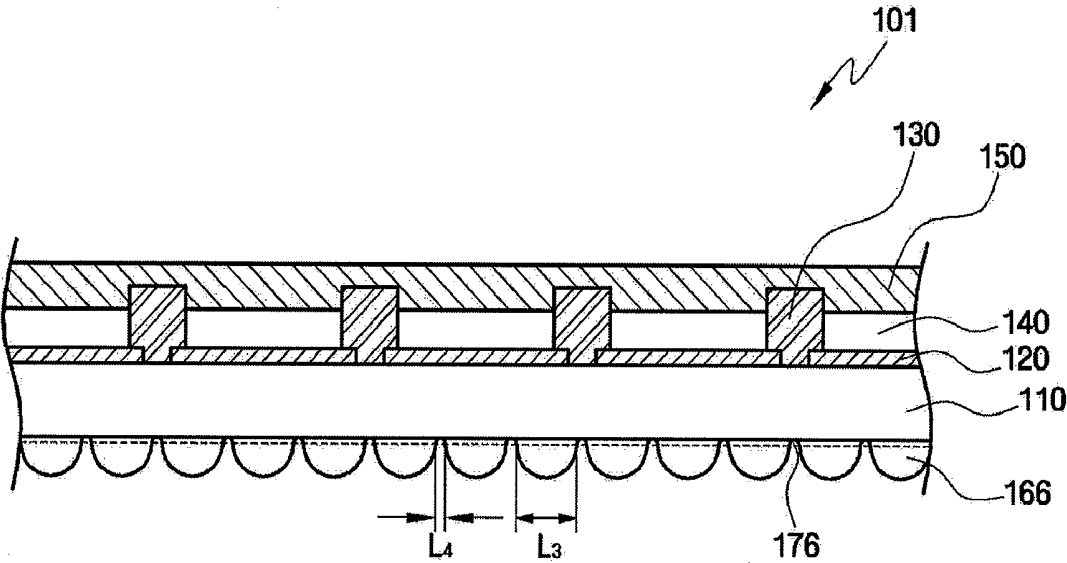


FIG. 8

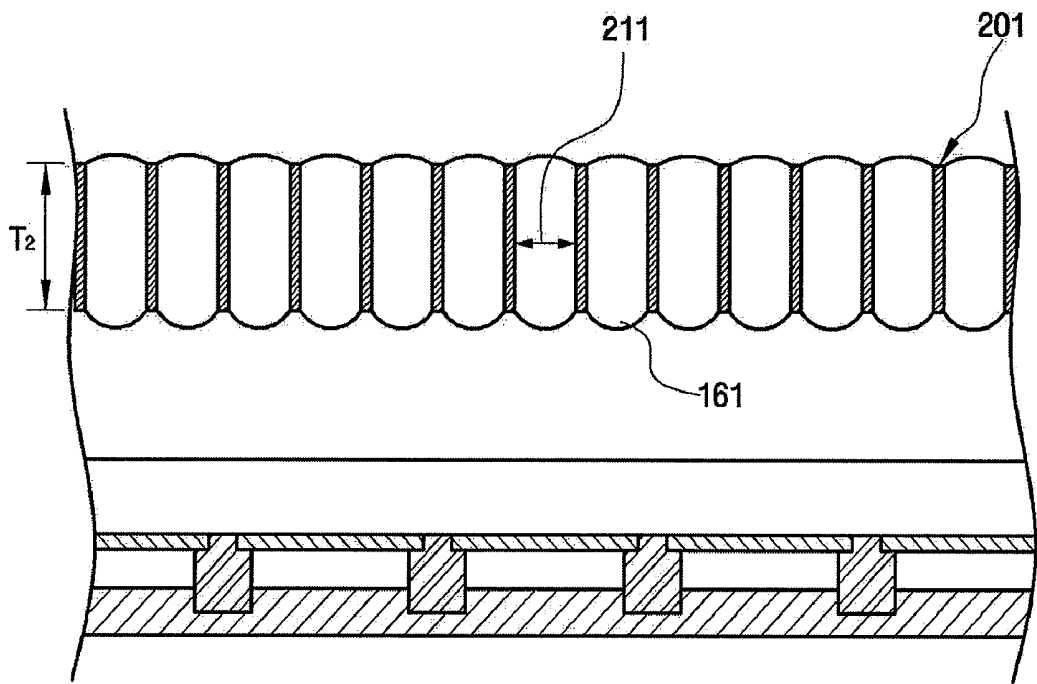


FIG. 9


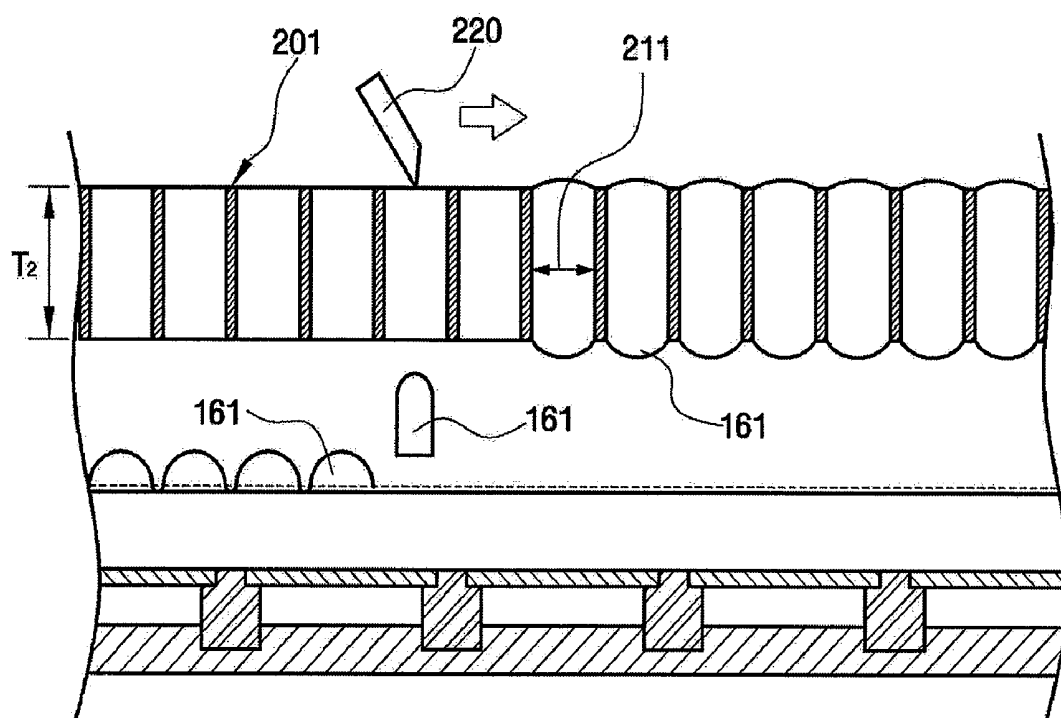


FIG. 10

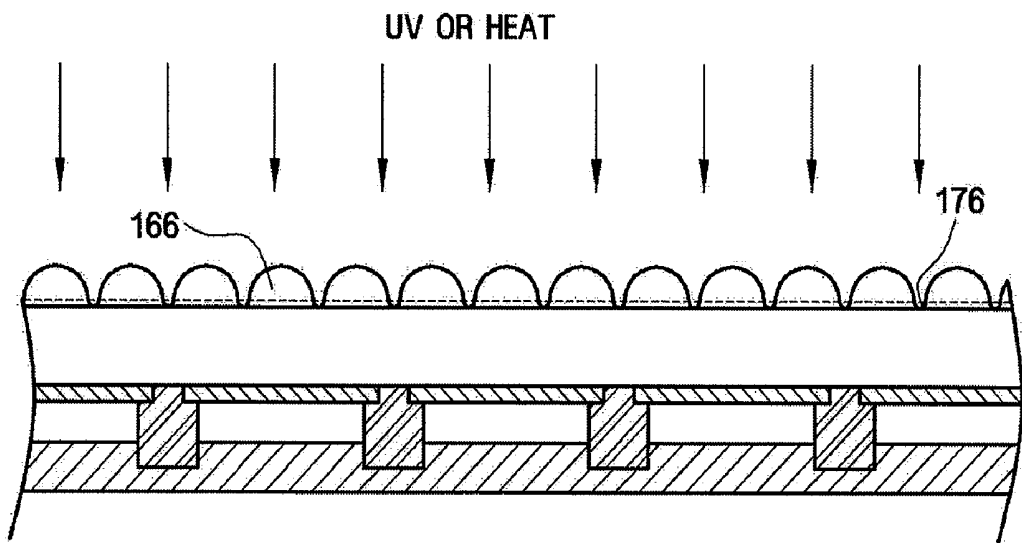

ORGANIC ELECTROLUMINESCENT DISPLAY AND METHOD OF MANUFACTURE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from Korean Patent Application No. 10-2006-0109530 filed on Nov. 7, 2006 in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to an organic electroluminescent (EL) display and a method of manufacturing the same, and more particularly, to an organic EL display having better photoluminescence efficiency and a method of manufacturing the same.

[0004] 2. Description of the Related Art

[0005] Organic electroluminescent (EL) displays are devices that emit light using energy generated by the recombination of electrons and holes which are injected into and transported in an organic light-emitting layer interposed between an anode, which is a hole injecting electrode, and a cathode, which is an electron injecting electrode. Organic EL displays are self-emitting devices, and include no auxiliary lamps, unlike liquid crystal displays. Thus, research to achieve higher brightness and energy efficiency of organic EL displays continues. The energy efficiency of organic EL displays can be classified into internal quantum efficiency and external quantum efficiency.

[0006] A satisfactory level of internal quantum efficiency can be achieved by selecting appropriate materials for the anode, a cathode, and the organic light-emitting layer. However, the level of external quantum efficiency is still unsatisfactory. That is, glass or the like used as an insulating substrate has a refractive index significantly different from that of ambient air so that light that is not emitted outside of the display device trapped inside the display device because of total internal reflection. In this regard, in order to decrease total internal reflectivity, attempts have been made to attach a microlens array to an outer surface of an insulating substrate. Unfortunately, attaching the microlens array not only makes the manufacturing process complicated but is not suitable to applications for a large-sized substrate, which makes the microlens technology impractical.

SUMMARY OF THE INVENTION

[0007] Embodiments of present invention provide an organic electroluminescent (EL) display having better photoluminescence efficiency together with a method of manufacturing the organic EL display.

[0008] According to an aspect of the present invention, an organic EL display includes an insulating substrate, a first electrode, an organic light-emitting layer, and a second electrode which are sequentially disposed on a first surface of the insulating substrate. A plurality of convex patterns are disposed on a second surface of the insulating substrate opposite to the first surface, spaced apart from each other are formed of a transparent sealant having a viscosity of 5,000

to 150,000 cp and comprising an epoxy- or acrylate-based resin. A plurality of concave patterns are interposed between the convex patterns.

[0009] According to another aspect of the present invention, a method of manufacturing an organic EL display comprises sequentially forming a first electrode, an organic light-emitting layer, and a second electrode on a first surface of an insulating substrate, and forming a plurality of convex patterns and concave patterns on a second surface of the insulating substrate opposite to the first surface, wherein the convex patterns are spaced apart from each other and formed of a transparent sealant having a viscosity of 5,000 to 150,000 cp and are comprised of an epoxy- or acrylate-based resin, the concave patterns being interposed between the convex patterns.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The above and other features and advantages of the present invention will become more apparent by describing in detail preferred embodiments thereof with reference to the attached drawings, in which:

[0011] FIG. 1 is a sectional view illustrating an organic electroluminescent (EL) display according to a first embodiment of the present invention;

[0012] FIG. 2 is a sectional view illustrating the photoluminescence efficiency of the organic EL display according to the first embodiment of the present invention;

[0013] FIGS. 3 through 6 are schematic views illustrating a method of manufacturing the organic EL display according to the first embodiment of the present invention;

[0014] FIG. 7 is a sectional view illustrating an organic EL display according to a second embodiment of the present invention; and

[0015] FIGS. 8 through 10 are schematic views illustrating a method of manufacturing the organic EL display according to the second embodiment of the present invention.

DETAILED DESCRIPTION

[0016] In the following description, it will be understood that when an element or a layer is referred to as being "on" another element or layer, it can be directly on the other element or layer, or intervening layers or elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present. The terms "and/or" should be taken to mean any and all combinations of one or more of the associated listed items.

[0017] Spatially relative terms, such as "beneath", "below", "lower", "above", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. Like reference numerals refer to like elements throughout the specification.

[0018] Hereinafter, an organic electroluminescent (EL) display according to a first embodiment of the present invention will be described with reference to FIG. 1. FIG. 1 is a sectional view illustrating the organic EL display according to the first embodiment of the present invention.

[0019] Referring to FIG. 1, a base substrate of an organic EL display 100 may be an insulating substrate 110 such as

transparent glass or plastic. A first electrode **120**, an organic light-emitting layer **140**, and a second electrode **150** are sequentially disposed on a surface of the insulating substrate **110**.

[0020] The first electrode **120** may be formed of metal or metal oxide with a high work function, so that it can be used as an anode of the organic EL display **100**. For example, the first electrode **120** may be formed of ITO, IZO, or the like. In addition to the advantage of a high work function, ITO and IZO can be efficiently used in a rear emission type organic EL display that emits light toward the insulating substrate **110**.

[0021] The first electrode **120** is electrically separated into individual units, which correspond to pixels. The individual units of the first electrode **120** are independently driven by at least one switching device (not shown), e.g., a thin film transistor.

[0022] The organic light-emitting layer **140** is disposed on the first electrode **120** to overlap with the first electrode **120**. For example, as illustrated in FIG. 1, the organic light-emitting layer **140** may be formed to completely overlap the first electrode **120**. The organic light-emitting layer **140** is partitioned by barrier ribs **130** on a pixel-by-pixel basis.

[0023] The second electrode **150** is disposed on the organic light-emitting layer **140**. The second electrode **150** may be formed of a material with a low work function to be used as a cathode of the organic EL display **100**. For example, the second electrode **150** may be formed of a highly reflective material such as MgAg or CaAl. A constant voltage may be applied to all pixels in the second electrode **150**, unlike the first electrode **120**.

[0024] A hole transport layer (not shown) may be further interposed between the first electrode **120** and the organic light-emitting layer **140**. When needed, a hole injection layer (not shown) may be further interposed between the first electrode **120** and the hole transport layer. Similarly, an electron transport layer (not shown) may be further interposed between the second electrode **150** and the organic light-emitting layer **140**. When needed, an electron injection layer (not shown) may be further interposed between the second electrode **150** and the electron transport layer.

[0025] Convex patterns **165** are formed on an opposite surface of the insulating substrate **110** to the organic light-emitting layer **140**. Hereinafter, the surface of substrate **110** opposite to the organic light emitting layer **140** will simply be referred to as "the opposite surface of substrate **110**". The convex patterns **165** are formed of a transparent sealant. For example, the transparent sealant may include an epoxy-based resin or an acrylate-based resin. Moreover, in addition to the resin, the sealant may further include a filler in order to decrease the penetration of moisture and oxygen, and at the same time, to adjust the viscosity of the sealant. For example, the filler may be micaceous or spherical talc. In addition, when needed, the sealant may further include a photo initiator which is associated with the curing of the sealant, and/or a coupling agent which confers an adhesion force to the sealant.

[0026] The sealant may have a viscosity of 5,000 to 150,000 cp. A sealant viscosity of 5,000 cp or more is advantageous to form convex patterns. Taking into consideration the process conditions and the shapes of the convex patterns **165**, the viscosity of the sealant may be 150,000 cp or less.

[0027] The sealant can be chosen from products used for adhesion, etc. in the display field, and thus, is easily available and advantageous in terms of cost competitiveness. Moreover, as will be described later, a screen printing process can be applied to the formation of the convex patterns **165** using the sealant, thereby ensuring process simplicity.

[0028] The convex patterns **165** may be in the shape of a longitudinally cut cylinder or a longitudinally cut cylindroid so as to achieve substantially uniform brightness regardless of the incidence direction of light. Thus, the convex patterns **165** may have a semicircular or semi-ellipsoidal section profile. Preferably, the convex patterns **165** may have the shape of the smaller of two three-dimensional shapes produced by longitudinally cutting a cylinder or cylindroid. The convex patterns **165** become thinner the farther they are from the opposite surface of the insulating substrate **110**.

[0029] The diameter L_1 of the convex patterns **165** on the opposite surface of the insulating substrate **110** may be 900 μm or less in order to achieve good photoluminescence efficiency as will be described later. However, the diameter L_1 of the convex patterns **165** is required to be greater than a predetermined value to guarantee that the shape of a pattern can be reliably formed. In this regard, the diameter L_1 of the convex patterns **165** may be 10 μm or more.

[0030] The convex patterns **165** are separated from each other by a predetermined distance due to the characteristics of the sealant material of which the convex patterns **165** are made. Concave patterns **115** are formed between the convex patterns **165** so as not to expose the opposite surface of the insulating substrate **110** to the outside.

[0031] If only the convex patterns **165** are present, the opposite surface of the insulating substrate **110** might be exposed to the outside between the convex patterns **165** thereby allowing light incident at the exposed surface of the insulating substrate **110** to be totally reflected thereby preventing emission of light from the organic EL display **100**. Accordingly, the concave patterns **115** are formed between the convex patterns **165** to decrease the angle of light incident between the convex patterns **165** and eliminate total reflection.

[0032] In the present embodiment, the concave patterns **115** are formed by etching the surface of an insulating substrate **110** made of glass, or the like, which is opposite to the organic light-emitting layer **140**. The surface of the insulating substrate **110** between the convex patterns **165** can be wet- or dry-etched. For example, the concave patterns **115** may be formed by etching the insulating substrate **110** using an etching gas, e.g., CF_4 , Ar, or O_2 . The concave patterns **115** may be in the shape of a longitudinally cut cylinder or a longitudinally cut cylindroid, like the convex patterns **165**. Thus, the convex patterns **165** and the concave patterns **115** are continuously connected to form a single closed curve at the opposite surface of the insulating substrate **110** to the organic light-emitting layer **140**.

[0033] The diameter ratio (L_1/L_2) of the convex patterns **165** to the concave patterns **115** may be 1:10 to 10:1, taking into consideration the distance between two adjacent ones of the convex patterns **165** made of a sealant, and the time required to etch the insulating substrate **110**.

[0034] When a voltage is applied to the first electrode **120** and the second electrode **150** of the organic EL display **100** having the above-described structure, holes from the first electrode **120** and electrons from the second electrode **150**

are transported into the organic light-emitting layer **140**. The transported holes and the electrons recombine in the organic light-emitting layer **140**, thereby emitting light corresponding to the predetermined energy difference. Light generated in the organic light-emitting layer **140** is emitted in all directions. Light incident on the first electrode **120** is transmitted through the first electrode **120** and emitted from the organic EL display **100**. Light incident on the second electrode **150** is reflected from the highly reflective second electrode **150** and transmitted through the first electrode **120**. Light transmitted through the first electrode **120** is emitted from the organic EL display **100** via the insulating substrate **110** and the convex patterns **165**, to be visualized as images.

[0035] The convex patterns **165** reduce the total reflectivity of incident light, thereby increasing the photoluminescence efficiency of light generated by the organic light-emitting layer **140**.

[0036] Hereinafter, the principle of increasing photoluminescence efficiency using convex patterns will be described in more detail with reference to FIG. 2. FIG. 2 is a sectional view for illustrating the photoluminescence efficiency of the organic EL display according to the first embodiment of the present invention.

[0037] Referring to FIG. 2, light from an organic light-emitting layer **140** is incident on a first electrode **120**, passes through an insulating substrate **110**, and then reaches convex patterns **165** or concave patterns **115** formed at the opposite surface of the insulating substrate **110**. With respect to the pathway of light incident at an angle of θ_1 with respect to the normal line of the opposite surface of the insulating substrate **110**. Where the opposite surface of the insulating layer **110** directly contacts an air layer, light is refracted at the interface between the insulating substrate **110** and the air layer due to the refractive index difference between the insulating substrate **110** and the air layer. Light advances from the insulating substrate **110**, which is a more densely concentrated medium, to the air layer, which is a sparsely concentrated medium. Thus, total internal reflection may occur at an incidence angle θ_1 greater than the critical angle, thereby resulting in no emission of light to the outside.

[0038] On the other hand, where the opposite surface of the insulating layer **110** contacts the convex patterns **165**, light is refracted at the interface between the insulating substrate **110** and the convex patterns **165** due to the refractive index difference between the insulating substrate **110** and the convex patterns **165**. Here, the refractive index of the convex patterns **165** may be substantially the same as, greater than, or smaller than that of the insulating substrate **110**, depending on a sealant constituting the convex patterns **165**. Even when the refractive index of the convex patterns **165** is smaller than that of the insulating substrate **110**, it is greater than that of an air layer. Thus, the refractive index difference between the insulating substrate **110** and the convex patterns **165** is much smaller than that between the insulating substrate **110** and the air layer.

[0039] For example, when the refractive index of the convex patterns **165** is greater than or substantially the same as that of the insulating substrate **110**, light advances from a sparsely concentrated medium to a more densely concentrated medium or from one to the other of two media having substantially the same refractive index, and thus, total internal reflection does not occur. Even when the refractive index of the convex patterns **165** is smaller than that of the

insulating substrate **110**, the refractive index difference between the convex patterns **165** and the insulating substrate **110** is much smaller than that between the insulating substrate **110** and an air layer as described above. Thus, the critical angle of total internal reflection is increased, thereby significantly reducing the quantity of totally reflected light.

[0040] Light transmitted through the convex patterns **165** is again refracted at the interface between the convex patterns **165** and an external air layer. Here, the interface between the convex patterns **165** and the air layer is convex, i.e., curves outward, and thus, the incidence angle θ_2 is much smaller than the incidence angle θ_1 . Thus, light is not totally reflected but is refracted and emitted to the outside.

[0041] Where the opposite surface of the insulating layer **110** contacts the concave patterns **115**, the refractive index difference between the concave patterns **115** and the opposite surface of the insulating layer **110** is almost the same as that of the opposite surface of the insulating substrate **110** since the concave patterns **115** are formed by etching the insulating substrate **110**. However, the angle θ_3 of light incident on the concave patterns **115** is much smaller than the angle θ_1 of light incident on the opposite surface of the insulating substrate **110**. Thus, even when the concave patterns **115** directly contact the air layer and have a refractive index that is significantly different from the refractive index of the air layer, the incident light is not totally reflected but is emitted to the outside.

[0042] Hereinafter, a method of manufacturing the organic EL display according to the first embodiment of the present invention will be described with reference to FIGS. 3 through 6 and FIG. 1. FIGS. 3 through 6 are schematic views illustrating a method of manufacturing the organic EL display according to the first embodiment of the present invention.

[0043] Referring to FIG. 3, a transparent insulating substrate **110** is provided. Then, a first electrode **120**, an organic light-emitting layer **140**, and a second electrode **150** are sequentially deposited on the surface of the insulating substrate **110**. The deposited structure can be manufactured as follows. That is, the first electrode **120** made of ITO or IZO is formed on the insulating substrate **110** made of transparent glass or plastic, and a barrier rib **130** is then formed. Then, the organic light-emitting layer **140** is formed in a space defined by the barrier rib **130**. Then, the second electrode **150** made of MgAg or CaAl is formed on the organic light-emitting layer **140**. Each process is well known to those of ordinary skill in the art, and thus, a detailed description thereof will be omitted.

[0044] Next, referring to FIG. 4, together with FIG. 3, the insulating substrate **110** is turned upside down so that the opposite surface of the insulating substrate **110** faces upward. Then, a screen printing mask **200** is disposed above and close to the insulating substrate **110**. The length T_1 of the screen printing mask **200** may be 0.1 to 9.9 μm considering the viscosity of a sealant **160** and the shape of convex patterns sought to be formed. A plurality of openings **210** are formed in the screen printing mask **200**. The openings **210** respectively correspond to desired convex patterns. The openings **210** are filled with transparent sealant **160**. The sealant **160** may include an epoxy-based resin or an acrylate-based resin. In addition to the resin, the sealant **160** may further include a filler to decrease the penetration of moisture and oxygen and to adjust the viscosity of the sealant **160**. Of course, the sealant **160** may further include other

additives. Due to these additives, the sealant 160 may have UV or thermal curing properties.

[0045] Referring to FIG. 5, the sealant 160 filled into the openings 210 is pressed by moving a blade 220 on an upper surface of the screen printing mask 200. The sealant 160 pressed by the blade 220 drops onto the opposite surface of the insulating substrate 111. When the viscosity of the sealant 160 is 150,000 cp or less, the dropping of the sealant 160 can be easily performed. When dropping the sealant 160, liquid-phase sealant droplets 160 have a surface tension depending on the length T_1 of the screen printing mask 200 and the viscosity of the sealant 160, and thus, have a convex shape.

[0046] The length T_1 of the screen printing mask 200 can be 0.1 to 9.9 μm so that the section profile of the sealant droplets 160 dropped onto the insulating substrate 110 is close to a semicircular or semi-ellipsoidal shape. Thus, the sealant droplets 160 dropped onto the insulating substrate 110 may be convex-shaped and spaced apart from each other. Here, in order for the sealant droplets 160 to have a reliable convex shape on the opposite surface of the insulating substrate 110, e.g., a three-dimensional structure produced by longitudinally cutting a cylinder or a cylindroid, the sealant 160 may have a viscosity of 5,000 cp or more. The above-described screen printing process is simple and can be easily applied to a large-sized insulating substrate.

[0047] Next, referring to FIG. 6, together with FIGS. 5, the sealant droplets 160 dropped onto the insulating substrate 110 are cured with UV light or heat to complete convex patterns 165.

[0048] Next, referring to FIG. 1, the insulating substrate 110 with the convex patterns 165 is placed in, e.g., a reactive ion etching (RIE) apparatus, and an exposed surface of the insulating substrate 110 between the convex patterns 165 is etched using an etching gas, e.g., CF_4 , Ar, or O_2 , to complete concave patterns 115. As a result, the convex patterns 165 and the concave patterns 115 are continuously connected to form a single closed curve at the opposite surface of the insulating substrate 110.

[0049] Hereinafter, an organic EL display according to a second embodiment of the present invention will be described with reference to FIG. 7. FIG. 7 is a sectional view illustrating an organic EL display according to a second embodiment of the present invention. For convenience of illustration, the same components as those of the previous embodiment are represented by the same reference numerals, and thus, the description thereof will be omitted or simplified. As illustrated in FIG. 7, an organic EL display 101 according to the second embodiment of the present invention has substantially the same structure as the organic EL display (100 of FIG. 1) of the previous embodiment except as described below. That is, the organic EL display 101 of the second embodiment of the present invention includes concave patterns 176 and convex patterns 166 which are formed of the same material.

[0050] Referring to FIG. 7, a first electrode 120, an organic light-emitting layer 140, and a second electrode 150 are sequentially deposited on a surface of an insulating substrate 110, as in the previous embodiment.

[0051] On the other hand, the convex patterns 166 are formed on the opposite surface of the insulating substrate 110, like in the previous embodiment. However, the convex patterns 166 of the present embodiment may be made of a transparent sealant with a viscosity of 25,000 to 150,000 cp,

unlike in the previous embodiment. That is, the convex patterns 166 of the present embodiment may be formed of an epoxy resin or an acrylate resin, as in the previous embodiment, but the resin used in the present embodiment has a greater viscosity than that used in the previous embodiment. Thus, the convex patterns 166 with a semicircular or semi-ellipsoidal section profile are not separated from each other but are connected to each other via concave patterns 176 with a semicircular or semi-ellipsoidal section profile.

[0052] The concave patterns 176 are formed simultaneously with the convex patterns 166 using the same material, and thus, the ends of the convex patterns 166 are connected to each other via the concave patterns 176. The top surface of the semicircular or semi-ellipsoidal section of the concave patterns 176 may contact the opposite surface of the insulating substrate 110. The size of the concave patterns 176 may vary according to the viscosity of the sealant used in formation of the concave patterns 176. The diameter L_3 of the convex patterns 166 and the diameter L_4 of the concave patterns 176 may vary according to the viscosity of a sealant, and the diameter ratio (L_3/L_4) of the convex patterns 166 to the concave patterns 176 may be the same as that of the previous embodiment.

[0053] To sum up, the convex patterns 166 and the concave patterns 176 made of a sealant are continuously formed at the surface of the insulating substrate 110 contacting an air layer. Thus, light advancing toward the air layer from the insulating substrate 110 is not totally reflected but can be efficiently emitted toward the air layer.

[0054] Hereinafter, a method of manufacturing the organic EL display according to the second embodiment of the present invention will be described with reference to FIGS. 8 through 10 and FIGS. 3 and 7. Description of structure and process that is the same as in the first embodiment of the present invention will be omitted or simplified. The method of manufacturing the organic EL display according to the second embodiment of the present invention will be described in terms of differences between it and the method of manufacturing the organic EL display according to the first embodiment of the present invention. FIGS. 8 through 10 are schematic views illustrating the method of manufacturing the organic EL display according to the second embodiment of the present invention.

[0055] First, as described above with reference to FIG. 3, an insulating substrate 110 having on a surface thereof a first electrode 120, an organic light-emitting layer 140, and a second electrode 150 is provided.

[0056] Next, referring to FIG. 8 and FIG. 3, the insulating substrate 110 is turned upside down so that the opposite surface of the insulating substrate 110 faces upward, and a screen printing mask 201 is then disposed above and close to the insulating substrate 110. The length T_2 of the screen printing mask 201 may be 10 to 100 μm considering the viscosity of a sealant 161 and the shape of convex patterns sought to be formed. In the present embodiment, the sealant 161 may be an epoxy or acrylate resin with a viscosity of 25,000 to 150,000 cp. By increasing the length T_2 of the screen printing mask 201, convex patterns (see 166 of FIG. 7) and concave patterns (see 176 of FIG. 7) can be formed at the same time.

[0057] Next, referring to FIG. 9, the sealant 161 filled in openings 211, is pressed by moving a blade 220 on an upper surface of the screen printing mask 201. The sealant 161 pressed by the blade 220 is dropped onto the opposite

surface of the insulating substrate **110**. In the present embodiment, the length T_2 of the screen printing mask **201** is as long as 10 to 100 μm and the viscosity of the sealant **161** is as high as 25,000 to 150,000 cp, and thus, the sealant **160** is dropped as sealant droplets **161** having an elongated ellipsoidal section profile. The sealant droplets **161** have a high viscosity, and thus, convex forms are connected to each other via concave forms at the opposite surface of the insulating substrate **110**.

[0058] Next, referring to FIG. **10**, the sealant droplets **161** dropped onto the insulating substrate **110** are cured with UV light or heat to complete convex patterns **166** and concave patterns **176**. The resultant organic EL display **201** thus completed is illustrated in FIG. **7**. The functions of the convex patterns **166** and the concave patterns **176** which are continuously connected are as described above.

[0059] As apparent from the above description, organic EL displays according to embodiments of the present invention include convex patterns and concave patterns, and thus, have high photoluminescence efficiency. Moreover, convex patterns or both convex and concave patterns are formed of an easily available sealant, and thus, organic EL displays according to embodiments of the present invention are advantageous in terms of cost competitiveness. In addition, organic EL displays according to embodiments of the present invention can be easily manufactured using a screen printing process alone or in combination with an etching process, thereby ensuring better manufacturing efficiency.

[0060] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims. It is therefore desired that the present embodiments be considered in all respects as illustrative and not restrictive, reference being made to the appended claims rather than the foregoing description to indicate the scope of the invention.

What is claimed is:

1. An organic electroluminescent display comprising:
 - an insulating substrate;
 - a first electrode, an organic light-emitting layer, and a second electrode which are sequentially disposed on a first surface of the insulating substrate; and
 - a plurality of convex patterns disposed on a second surface of the insulating substrate opposite to the first surface and spaced apart from each other, the patterns being formed of a transparent sealant having a viscosity of 5,000 to 150,000 cp and comprised of an epoxy- or acrylate-based resin, and
 - a plurality of concave patterns interposed between the convex patterns.
2. The organic electroluminescent display of claim 1, wherein the convex patterns have a diameter of 10 to 900 μm .
3. The organic electroluminescent display of claim 2, wherein the diameter ratio of the convex patterns to the concave patterns is 1:10 to 10:1.
4. The organic electroluminescent display of claim 1, wherein the concave patterns are formed by etching an exposed portion of the second surface of the insulating substrate between the convex patterns.

5. The organic electroluminescent display of claim 1, wherein the convex patterns are formed of a transparent sealant having a viscosity of 25,000 to 150,000 cp, and the concave patterns are formed of the same material.

6. The organic electroluminescent display of claim 5, wherein the convex patterns and the concave patterns are semicircular or semi-ellipsoidal in section profile, and the top surfaces of the concave patterns contact the second surface of the insulating substrate.

7. A method of manufacturing an organic electroluminescent display, the method comprising:

sequentially forming a first electrode, an organic light-emitting layer, and a second electrode on a first surface of an insulating substrate; and

forming a plurality of convex patterns and concave patterns at a second surface of the insulating substrate opposite to the first surface,

wherein the convex patterns are spaced apart from each other and formed of a transparent sealant having a viscosity of 5,000 to 150,000 cp comprised of an epoxy- or acrylate-based resin, the concave patterns being interposed between the convex patterns.

8. The method of claim 7, wherein the convex patterns have a diameter of 10 to 900 μm .

9. The method of claim 8, wherein the diameter ratio of the convex patterns to the concave patterns is 1:10 to 10:1.

10. The method of claim 7, wherein the formation of the convex patterns and the concave patterns comprises:

forming the convex patterns on the second surface of the insulating substrate by screen-printing the sealant; and forming the concave patterns between the convex patterns by etching an exposed portion of the second surface of the insulating substrate between the convex patterns.

11. The method of claim 10, wherein the resin is a heat-curable or UV-curable resin, and wherein the formation of the convex patterns comprises:

printing the sealant on the second surface of the insulating substrate using a screen printing mask; and curing the sealant.

12. The method of claim 11, wherein the screen printing mask has a length of 0.1 to 9.9 μm .

13. The method of claim 7, wherein in the convex patterns and the concave patterns are formed at the same time on the second surface of the insulating substrate by screen-printing a transparent sealant having a viscosity of 25,000 to 150,000 cp, the sealant being selected from one of an epoxy- and acrylate-based resins.

14. The method of claim 13, wherein the resin is a heat-curable or UV-curable resin, and wherein the formation of the convex patterns and the concave patterns comprises: printing the sealant on the second surface of the insulating substrate using a screen printing mask; and curing the sealant.

15. The method of claim 14, wherein the screen printing mask has a length of 10 to 100 μm .

16. The method of claim 13, wherein the convex patterns and the concave patterns are semicircular or semi-ellipsoidal in section profile, and the top surfaces of the concave patterns contact the second surface of the insulating substrate.

* * * * *

专利名称(译)	有机电致发光显示器及其制造方法		
公开(公告)号	US20080106192A1	公开(公告)日	2008-05-08
申请号	US11/936021	申请日	2007-11-06
[标]申请(专利权)人(译)	KOO WON HOE 金勋 钟金KOO 崔贞MI		
申请(专利权)人(译)	KOO WON-HOE 金勋 钟金辜 崔贞-MI		
当前申请(专利权)人(译)	KOO WON-HOE 金勋 钟金辜 崔贞-MI		
[标]发明人	KOO WON HOE KIM HOON CHUNG JIN KOO CHOI JUNG MI		
发明人	KOO, WON-HOE KIM, HOON CHUNG, JIN-KOO CHOI, JUNG-MI		
IPC分类号	H01L51/54 H01L51/56		
CPC分类号	G02B3/0012 H01L51/5275 H01L27/3281 G02B3/005		
优先权	1020060109530 2006-11-07 KR		
其他公开文献	US7915805		
外部链接	Espacenet USPTO		

摘要(译)

具有更好光致发光效率的有机电致发光显示器包括依次设置在绝缘基板的第一表面上的第一电极, 有机发光层和第二电极, 以及设置在绝缘基板的第二表面上的多个凸起图案与第一表面相对并且彼此间隔开, 并且由透明密封剂形成, 所述透明密封剂具有5,000至150,000cp的粘度并且由环氧树脂或丙烯酸酯基树脂构成, 并且在所述第一表面之间插入多个凹入图案。凸模式。

