

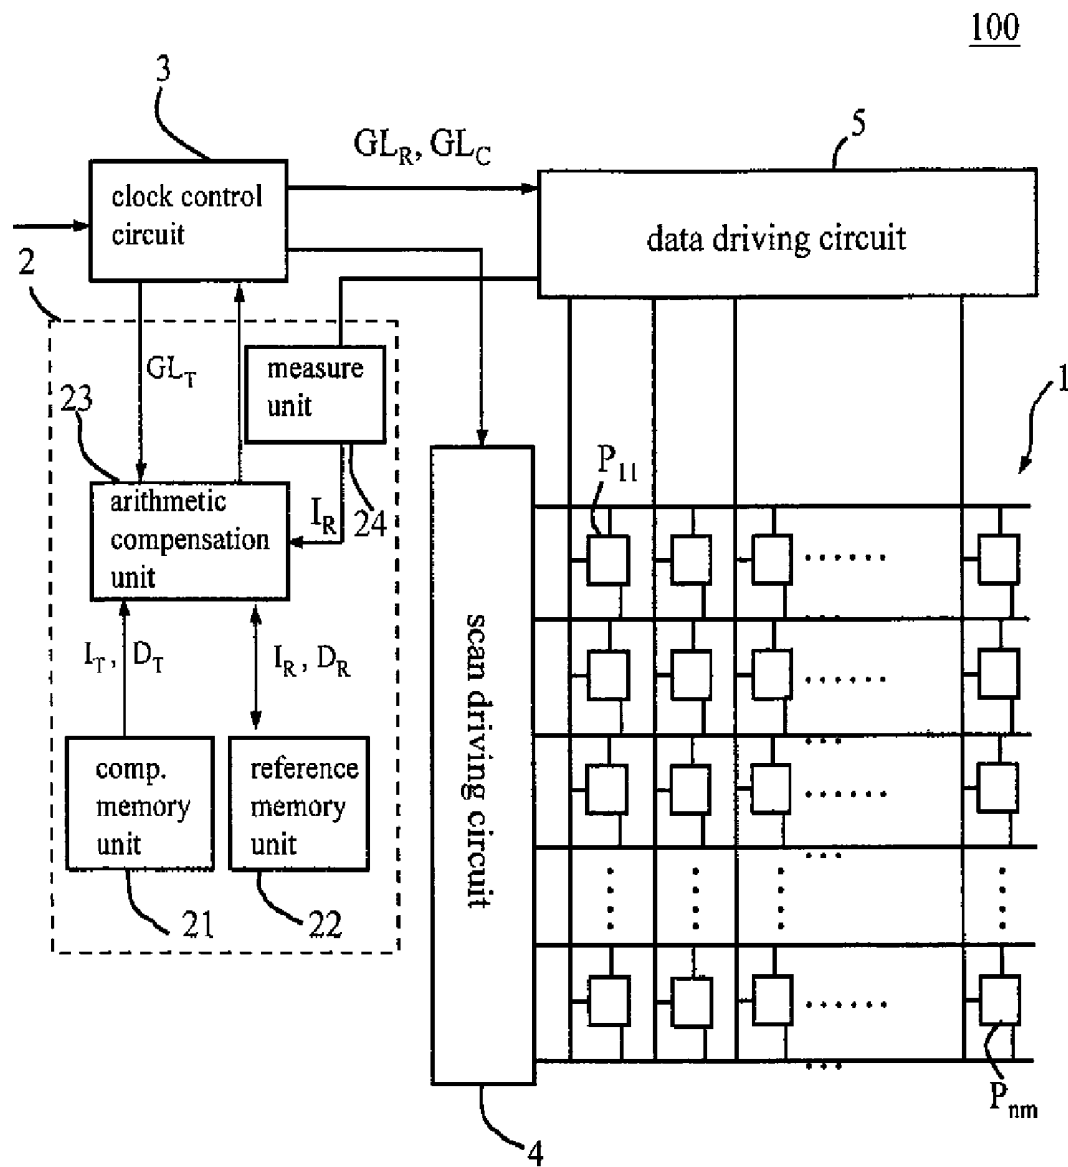
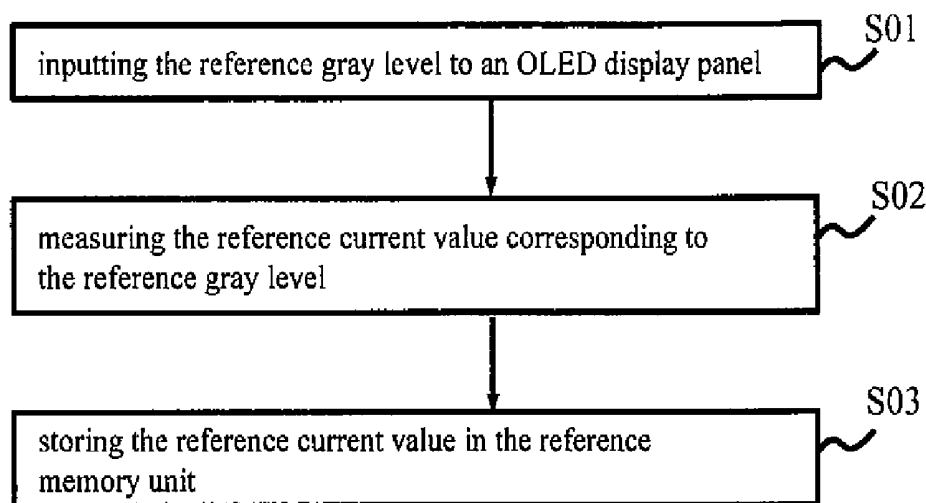
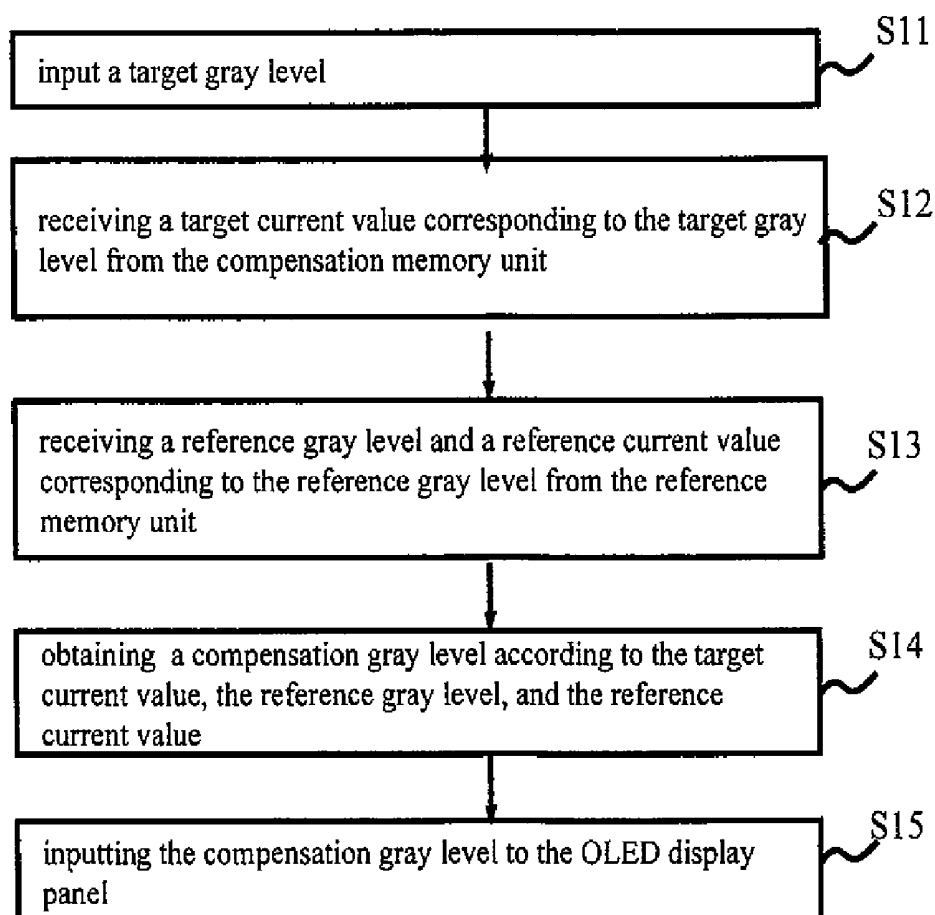
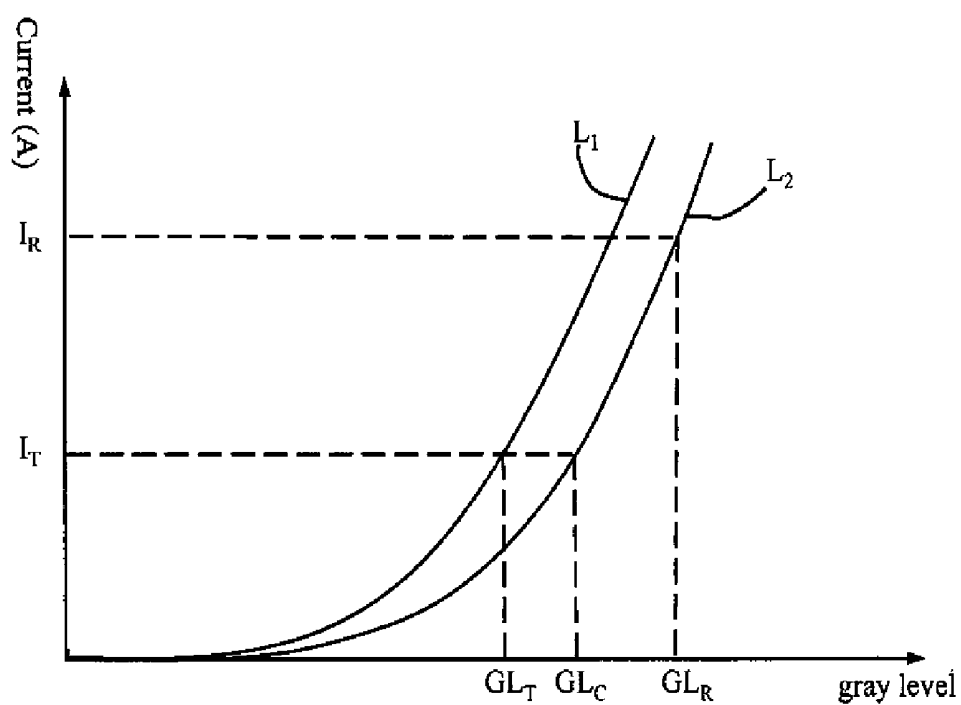


FIG. 1

**FIG. 2A****FIG. 2B**

**FIG. 3**

1

IMAGE COMPENSATION METHODS, SYSTEMS, AND APPARATUSES FOR ORGANIC LIGHT EMITTING DIODE DISPLAY PANEL

CROSS-REFERENCE TO RELATED APPLICATION

Pursuant to 35 U.S.C. §119, this application claims priority to Taiwan Application Serial No. 97143962, filed Nov. 13, 2008, the subject matter of which is incorporated herein by reference.

BACKGROUND

Organic light emitting diodes (OLEDs) have advantages such as self-light emission, high brightness and contrast, light weight, low power consumption, and rapid reaction time. OLED-related components in image display systems may be driven using passive or active matrix techniques. Active matrix OLED displays may include, for example, amorphous silicon (a-Si) thin film transistors (TFTs) or low temperature poly silicon (LTPS) TFTs.

a-Si TFTs have advantages but may also have inconsistent performance properties such as floating state issues that adversely affect threshold voltage and element mobility over time. These issues may result in mura phenomena problems including non-uniform display appearances such as dark spots or poorly contrasted areas. LTPS TFTs also have advantages such as a small size that allows for an increased pixel aperture ratio. They can also be manufactured on a glass substrate at the same time as a pixel driving circuit located on a display panel periphery, thereby reducing the number of wires needed in the display. This manufacturing technique may enhance reliability and decrease manufacturing costs for OLED display panels. However, LTPS TFTs also have inconsistent performance properties that can result in mura phenomena difficulties.

To address mura phenomena issues, one may store threshold voltage and pixel mobility values collected when displaying each gray level in each pixel during, for example, the manufacturing process. The threshold voltage and mobility values are then input with pixel data for each pixel to provide voltage compensation that counters mura phenomenon issues and allows each pixel to display precise desired colors. However, storing such large amounts of data requires large memory capacity.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are included to provide a further understanding of various embodiments of the invention and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

FIG. 1 is a schematic diagram of a display device according to an embodiment of the invention;

FIGS. 2a-b are flow diagrams for techniques of operating a display device in an embodiment of the invention; and

FIG. 3 is a graph used to provide voltage compensation in one embodiment of the present invention.

DETAILED DESCRIPTION

The following description refers to the accompanying drawings. Among the various drawings the same reference

2

numbers may be used to identify the same or similar elements. While the following description provides a thorough understanding of various aspects of the claimed invention by setting forth specific details such as particular structures, architectures, interfaces, and techniques, such details are provided for purposes of explanation and should not be viewed as limiting. Moreover, those of skill in the art will, in light of the present disclosure, appreciate that various aspects of the invention claimed may be practiced in other examples or implementations that depart from these specific details. At certain junctures in the following disclosure descriptions, well known devices, circuits, and techniques have been omitted to avoid clouding the description of various embodiments of the invention with unnecessary detail. References to “one embodiment”, “an embodiment”, “example embodiment”, “various embodiments”, etc. indicate that the embodiment(s) of the invention so described may include particular features, structures, or characteristics, but not every embodiment necessarily includes the particular features, structures, or characteristics. Further, some embodiments may have some, all, or none of the features described for other embodiments. Also, unless otherwise specified the use of “first”, “second”, “third”, etc., to describe a common object merely indicate that different instances of like objects are being referred to and are not intended to imply that the objects so described must be in a given sequence, either temporally, spatially, in ranking, or in any other manner.

One embodiment of the invention includes an image compensation module, an OLED display panel, and an OLED display apparatus or device. A target current value corresponding to a target gray level is stored in a compensation memory portion. A reference gray level and a reference current value corresponding to the reference gray level are stored in a reference memory portion. A compensation gray level can be obtained by an arithmetic compensation unit according to the target current value, reference gray level, reference current value, and gamma parameter. This may reduce the memory space needed for the compensation and reference memory portions, and compensate the images of the display apparatus and panel so that precise colors can be displayed with a high image quality.

FIG. 1 depicts one embodiment of display device 100, which includes OLED display panel 1 having pixels P_{11} to P_{nm} , each including a LIPS TFT. Device 100 may couple (e.g., directly or indirectly electrically connect) together panel 1, image compensation module 2, clock control circuit 3, scan driving circuit 4, and data driving circuit 5. Image compensation module 2 may include or couple to compensation memory portion 21, reference memory portion 22, arithmetic compensation unit 23, and measuring unit 24. In one embodiment compensation memory portion 21 and reference memory portion 22 are in separate memory devices but in other embodiments they are included in the same memory device (e.g., single flash memory device).

For purposes of clarity, the following embodiment of a technique is described in relation to its application to a single pixel (e.g., P_{11}), but it should be understood the technique is applicable to multiple pixels. FIGS. 2A and 2B respectively concern measure and display phases of an image compensation technique in one embodiment of the invention. The measure phase in FIG. 2A may be performed, for example, while manufacturing panel 1, when panel 1 is turned on at some time after manufacturing is complete, or at a time determined by a user. The measuring phase allows device 100 to store information needed for image compensation. In block S01 reference gray level GL_R is input to panel 1. For example, clock control circuit 3 may input reference gray level GL_R to

data driving circuit 5 and a corresponding voltage or current may be output from circuit 5 to drive pixel P₁₁. The value of reference gray level GL_R is not necessarily limited (e.g., reference gray level GL_R may range from 0 to 255 in an 8-bit embodiment).

In block S02 reference current value I_R, corresponding to reference gray level GL_R in pixel P₁₁, is measured using measuring unit 24 in an embodiment. Measuring unit 24 may be included in image compensation module 2, data driving circuit 5, or elsewhere. Again, focus is placed on P₁₁ for clarity. However, other reference current values can be determined for other reference gray levels within pixel P₁₁ and reference current values can also be determined for other pixels in display 1.

In block S03 reference current value I_R is stored in reference memory portion 22. In an embodiment, reference current value I_R is input to arithmetic compensation unit 23 and then stored in reference memory portion 22. I_R, which may be in analog form, may be converted to digital form for storage in reference memory portion 22 using an analog-to-digital converter (ADC) included in arithmetic compensation unit 23, measuring unit 24, or elsewhere.

FIG. 2B concerns the display phase. In block S11 clock control circuit 3 may input target gray level GL_T, as it relates to pixel P₁₁, to arithmetic compensation unit 23. Target gray level GL_T is the gray level value device 100 would expect for P₁₁ absent any offsetting effects due to irregularities of OLED P₁₁. GL_T may be unlimited (e.g., GL_T may range from 0 to 255 in an 8-bit embodiment).

In block S12 target current value I_T, corresponding to target gray level GL_T, may be received from compensation memory portion 21. An embodiment of a gamma equation is shown below:

$$I_T = I_{255} * (GL_T / 255)^\Gamma \quad (1)$$

In an embodiment, gamma parameter Γ may be 2.0, 2.1, or 2.2. Gamma parameter Γ may be, for example, 2.2. Current I₂₅₅ is the corresponding current value when target gray level GL_T is equal to gray level 255. Current I₂₅₅ may be calculated by arithmetic compensation unit 23 according to equation (1).

FIG. 3 uses curve L₁ to plot the results of equation 1. Curve L₁ is a characteristic curve for pixel P₁₁ reflecting brightness, material, and aperture ratio properties of the pixel and its components (e.g., a LTPS TFT). Curve L₁ may be determined during panel manufacturing, when device 100 is turned on, or at other times. Gamma equation (1) shows the relationship for pixel P₁₁ between target gray level GL_T and target current value I_T. After current I₂₅₅ is calculated, different current values I_T corresponding to different gray levels GL_T may be calculated according to equation (1) to obtain curve L₁. Therefore, compensation memory portion 21 may only need to store target current value I_T, corresponding to gray level GL_T, thereby lowering memory requirements and increasing read speed for compensation memory portion 21. Target gray level GL_T, target current value I_T, and curve L₁ form standards based on brightness, material property, and aperture ratio of P₁₁. These standards will serve as bases to compensate OLED pixel P₁₁, as described further below.

In block S13, for pixel P₁₁ reference gray level GL_R is received and the corresponding reference current value I_R is

received from reference memory portion 22. A gamma equation is shown below:

$$I_R = I'_{255} * (GL_R / 255)^\Gamma \quad (2)$$

Gamma parameter Γ is 2.2 in an embodiment. After the current value measured by the gray level 255, or by another gray level, is input to panel 1, current I'₂₅₅ can be calculated by arithmetic compensation unit 23 according to the current value, inputted gray level value, and equation (2).

FIG. 3 uses curve L₂ to plot the results of equation 2. Curve L₂ is a characteristic curve where gray levels correspond to current values under the condition of gamma parameter Γ . Thus, gamma equation (2) shows the relationship for pixel P₁₁ between GL_R and I_R. After current I'₂₅₅ is calculated, different I_R current values corresponding to different reference gray levels GL_R can be calculated according to equation (2) to obtain curve L₂. Therefore, reference memory portion 22 may only store reference current value I_R, corresponding to reference gray level GL_R. This may lower memory requirements and increase read speed for compensation memory portion 21.

In block S14 compensation gray level GL_C is determined based on target current value I_T, reference gray level GL_R, and reference current value I_R. FIG. 3 indicates that, because LTPS TFTs have non-uniform characteristics, curve L₂ may be offset from the standard data of curve L₁ for pixel P₁₁. However, target current value I_T of curve L₁ may be mapped to curve L₂ to obtain compensation gray level GL_C for pixel P₁₁. The following equation can be acquired by dividing the equation (1) by the equation (2):

$$GL_C = GL_R * (I_T / I_R)^{1/\Gamma} \quad (3)$$

Compensation gray level GL_C may be calculated by arithmetic compensation unit 23.

In block S15 compensation gray level GL_C is input. In an embodiment, compensation gray level GL_C is input to data driving circuit 5 by arithmetic compensation unit 23, and then a compensated corresponding voltage or current is output by data driving circuit 5 to drive pixel P₁₁ and compensate the images of the display device and panel so that precise colors can be displayed with a high image quality.

Since each of pixels P₁₁ to P_{nm} may differ from each other due to various irregularities (e.g., irregularities associated with LTPS TFTs), image compensation module 2 may need to individually compensate pixels P₁₁ to P_{nm}. Thus, while the above examples addressed only P₁₁ for purposes of clarity, other pixels are now addressed.

Compensation memory portion 21 may store target current data D_T, which may include a plurality of target current values corresponding to a plurality of target gray levels in a single pixel. For example, the plurality of current values I_{T0} to I_{T255} may correspond to gray levels 0 to 255 for pixel P₁₁. Similar data may be stored for other pixels. Thus, the arithmetic compensation unit 23 workload may be reduced because I_T values, calculated according to equation (1), may already be stored for each individual pixel. In some embodiments D_T may include target current values from different pixels that all relate to a single target gray level. In other words, D_T may include target current data as it relates to one or many pixels and/or one or many target gray levels.

Also, reference memory portion 22 may store reference current data D_R that may include a plurality of reference current values I_{R11} to I_{Rnm} corresponding to m*n target gray levels GL_T. Thus, the arithmetic compensation unit 23 work-

5

load may be reduced because I_R values, calculated according to equation (2), may already be stored for each pixel. Of course, in some embodiments D_R may include reference current values from different pixels that all relate to a single reference gray level. In other words, D_R may include reference current data as it relates to one or many pixels and/or one or many reference gray levels.

Arithmetic compensation unit **23** may couple to compensation memory portion **21** and reference memory portion **22** and may obtain compensation gray level GL_C according to equation (3) using target current data D_T , reference gray level GL_R , and reference current data D_R . This may reduce the memory space needed for the compensation and reference memory portions, and compensate the images of the display device and panel so that precise colors can be displayed with a high image quality.

In an embodiment, to have different display effects panel **1** can be divided into a plurality of display zones (not shown), each being compensated in accordance with embodiments of compensation techniques and different conditions of gamma parameters described herein. For example, pixels in different zones may have different parameters meaning the different zones have different characteristics. Thus, for each specific target gray level the target current value might differ for pixels in different display zones and thus, each zone may need to be compensated differently. Hence, in an embodiment target current data D_T may include a plurality of target current values corresponding to target gray levels for different pixels or different display zones.

Embodiments may be implemented in code and may be stored on a storage medium having stored thereon instructions, which can be used to program a system to perform the instructions, data, information, values, etc. The storage medium (e.g., units **21**, **22**) may include or couple to, without limitation, any type of disk including floppy disks, optical disks, optical disks, solid state drives (SSDs), compact disk read-only memories (CD-ROMs), compact disk rewritables (CD-RWs), and magneto-optical disks, semiconductor devices such as read-only memories (ROMs), random access memories (RAMs) such as dynamic random access memories (DRAMs), static random access memories (SRAMs), erasable programmable read-only memories (EPROMs), flash memories, electrically erasable programmable read-only memories (EEPROMs), magnetic or optical cards, or any other type of media suitable for storing electronic instructions.

Device **100** may include, for example, a processor, a memory unit, a storage unit, a clock, and other suitable hardware components and/or software components. In some embodiments, some or all of the components of device **100** may be enclosed in a common housing or packaging, and may be interconnected or operably associated. In other embodiments, components of device **100** may be distributed among multiple or separate sub-units, devices or locations.

Units and components (e.g. units and circuits **3**, **4**, **5**, **23**, **24**) of device **100** may include, be included in, or couple to a processor, a central processing unit (CPU), a digital signal processor (DSP), a microprocessor, a host processor, a controller, a plurality of processors or controllers, a chip, a microchip, one or more circuits, circuitry, a logic unit, an integrated circuit (IC), an application-specific IC (ASIC), a CMOS chip, or any other suitable multi-purpose or specific processor, controller, or circuit.

Thus, device **100** may include units, such as compensation unit **23**, which include and/or use hardware, software, and combinations thereof to accomplish their described functions.

6

While the present invention has been described with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of this present invention.

What is claimed is:

1. An image compensation method comprising:
 - obtaining a target gray level and a reference gray level;
 - obtaining a target current value, corresponding to the target gray level, from a compensation memory portion;
 - obtaining a reference current value, corresponding to the reference gray level, from a reference memory portion;
 - obtaining a compensation gray level based on the target current value, the reference gray level, and the reference current value;
 - driving a display panel based on the compensation gray level; and
 - storing the target current value and additional target current values corresponding to additional target gray levels in the compensation memory portion, wherein the target current value and additional target current values correspond to a single pixel included in the display panel.
2. The method of claim 1 including obtaining the compensation gray level based on

$$GL_C = GL_R \times (I_T / I_R)^{1/\Gamma_1},$$

wherein GL_C is the compensation gray level, GL_R is the reference gray level, I_T is the target current value, I_R is the reference current value, and Γ_1 is a gamma parameter.

3. The method of claim 1 including:
 - inputting the reference gray level to the display panel, the panel including organic light emitting diodes (OLEDs);
 - measuring the reference current value corresponding to the inputted reference gray level; and
 - storing the reference current value in the reference memory portion.
4. The method of claim 1 including storing the reference current value and additional reference current values corresponding to additional reference gray levels in the reference memory portion, wherein the reference current value and additional reference current values correspond to the single pixel.
5. The method of claim 1 including:
 - comparing the target gray level with a previously stored target gray level, wherein the target current value corresponds to the previously stored target gray level; and
 - driving the display panel further based on the comparison between the target gray level with the previously stored target gray level.
6. The method of claim 1 including obtaining the compensation gray level without storing threshold voltage data or mobility value data for the display panel.
7. An image compensation module, comprising:
 - a first memory portion to store a target current value corresponding to a target gray level and electrically couple to a compensation unit; and
 - a second memory portion to store a reference current value corresponding to a reference gray level and electrically couple to the compensation unit;
 wherein the compensation unit is to obtain a compensation gray level, based on the target current value, the reference gray level, and the reference current value, the

7

compensation gray level is to drive an organic light emitting diode (OLED) display panel, and the first memory portion is to store the target current value and additional target current values corresponding to additional target gray levels, the target current value and additional target current values to correspond to a single pixel included in the display panel.

8. The module of claim 7, wherein the compensation gray level is to be obtained based on

$$GL_C = GL_R \times (I_T / I_R)^{1/\Gamma_1},$$

GL_C is the compensation gray level, GL_R is the reference gray level, I_T is the target current value, I_R is the reference current value, and Γ_1 is a gamma parameter.

9. The module of claim 7 including a measuring unit to measure the reference current value before the reference current value is stored in the second memory portion.

10. The module of claim 7, wherein the module is configured to determine the target current value before storing the target current value in the first memory portion.

11. The module of claim 7, wherein:
the second memory portion is to store the reference current value and additional reference current values corresponding to additional reference gray levels, the reference current value and additional reference current values to correspond to the single pixel.

12. An organic light emitting diode (OLED) display apparatus comprising:

a plurality of OLED pixels; and

an image compensation module including:

a first memory portion to store a target current value corresponding to a target gray level and electrically couple to a compensation unit; and

a second memory portion to store a reference current value corresponding to a reference gray level and electrically couple to the compensation unit;

8

wherein the compensation unit is to obtain a compensation gray level, based on the target current value, the reference gray level, and the reference current value, and the compensation gray level is to drive a pixel included in the plurality of OLED pixels, and the first memory portion is to store the target current value and additional target current values corresponding to additional target gray levels, the target current value and additional target current values to correspond to the pixel.

13. The apparatus of claim 12, wherein the compensation gray level is to be obtained based on

$$GL_C = GL_R \times (I_T / I_R)^{1/\Gamma_1},$$

GL_C is the compensation gray level, GL_R is the reference gray level, I_T is the target current value, I_R is the reference current value, and Γ_1 is a gamma parameter.

14. The apparatus of claim 12, wherein the module includes a measuring unit to measure the reference current value before the reference current value is stored in the second memory portion.

15. The apparatus of claim 12, wherein the module is to determine the target current value before storing the target current value in the first memory portion.

16. The apparatus of claim 12, wherein the second memory portion is to store the reference current value and additional reference current values corresponding to additional reference gray levels, the reference current value and additional reference current values to correspond to the pixel.

17. The apparatus of claim 12, wherein the compensation unit is to obtain the target current value by solving a gamma equation.

18. The apparatus of claim 12, wherein the compensation unit is to obtain the compensation gray level without the apparatus storing threshold voltage data or mobility value data for the pixel.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 8,390,638 B2
APPLICATION NO. : 12/616284
DATED : March 5, 2013
INVENTOR(S) : Yu-Wen Chiou et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page, Item (73) Assignee should be --Chi Mei El Corporation and Chimei Innolux Corporation--

Signed and Sealed this
Fifteenth Day of October, 2013



Teresa Stanek Rea
Deputy Director of the United States Patent and Trademark Office

专利名称(译)	用于有机发光二极管显示面板的图像补偿方法，系统和设备		
公开(公告)号	US8390638	公开(公告)日	2013-03-05
申请号	US12/616284	申请日	2009-11-11
[标]申请(专利权)人(译)	CHIOU郁文 曾明俊 郭宏RU 陈春雨		
申请(专利权)人(译)	CHIOU YU-WEN 曾明俊 郭宏-RU 陈春雨		
当前申请(专利权)人(译)	群创光电		
[标]发明人	CHIOU YU WEN TSENG MING CHUN GUO HONG RU CHEN CHUN YU		
发明人	CHIOU, YU-WEN TSENG, MING CHUN GUO, HONG-RU CHEN, CHUN-YU		
IPC分类号	G09G3/30 G09G3/36 G06K9/40 G06K9/00 G06K15/00 H04N1/46 H04N1/40 H04N5/14 H04N5/202 G09G5/10 G09G5/00		
CPC分类号	G09G3/3233 G09G2300/0417 G09G2320/0285 G09G2320/029 G09G2320/0295 G09G2320/043 G09G2320/0693		
优先权	097143962 2008-11-13 TW		
其他公开文献	US20100141667A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明的一个实施例包括图像补偿模块，OLED显示面板和OLED显示装置。对应于目标灰度级的目标电流值存储在补偿存储器部分中。对应于参考灰度级的参考灰度级和参考电流值存储在参考存储器部分中。可以通过算术补偿单元根据目标电流值，参考灰度级，参考电流值和伽马参数来获得补偿灰度级。这可以减少补偿和参考存储器部分所需的存储空间，并且补偿显示装置和面板的图像，从而可以以高图像质量显示精确的颜色。

