




US 20050110396A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0110396 A1**
Cok (43) **Pub. Date: May 26, 2005**(54) **OLED DISPLAY HAVING THERMALLY CONDUCTIVE LAYER**(52) **U.S. Cl. 313/503; 313/504; 313/506**(75) **Inventor: Ronald S. Cok, Rochester, NY (US)**(57) **ABSTRACT**

Correspondence Address:

Paul A. Leipold**Patent Legal Staff****Eastman Kodak Company****343 State Street****Rochester, NY 14650-2201 (US)**(73) **Assignee: Eastman Kodak Company**(21) **Appl. No.: 10/722,243**(22) **Filed: Nov. 25, 2003****Publication Classification**(51) **Int. Cl.⁷ H05B 33/00; H05B 33/26**

An OLED display is described comprising: a) a substrate; b) one or more OLED light emitting elements including a first electrode formed on the substrate, one or more OLED light emissive layers located over the first electrode, and a second electrode located over the OLED light emissive layers; and c) an encapsulating cover located over the second electrode and affixed to the substrate; wherein the substrate or cover comprises a composite of a non-metallic layer and a metal layer, where the metal layer has a thickness between 1 micron and 1,000 microns and is thinner than the non-metallic layer. The invention enables OLED displays with improved lifetime, while minimizing need for increased substrate and/or cover layer thickness.

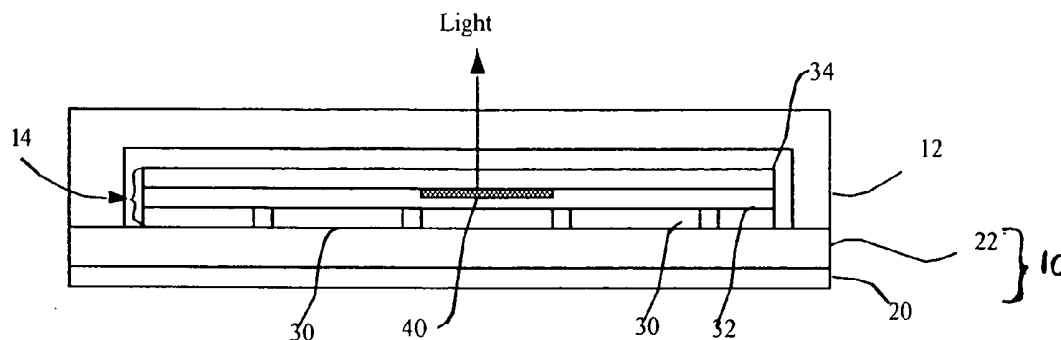

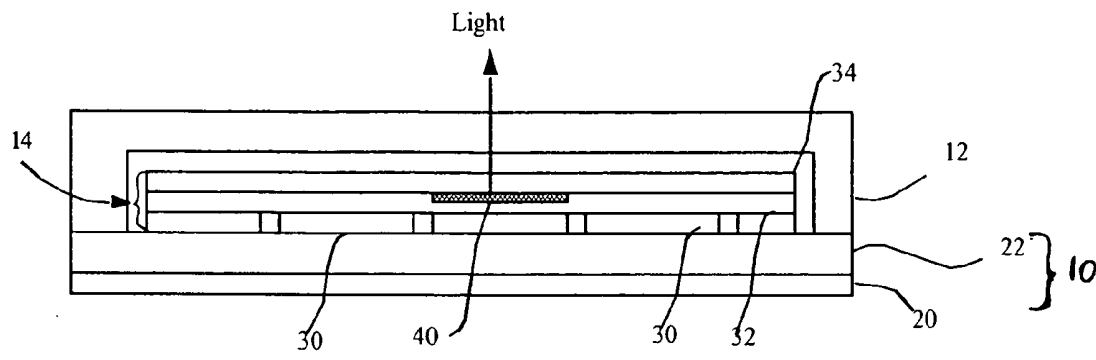


Fig. 1

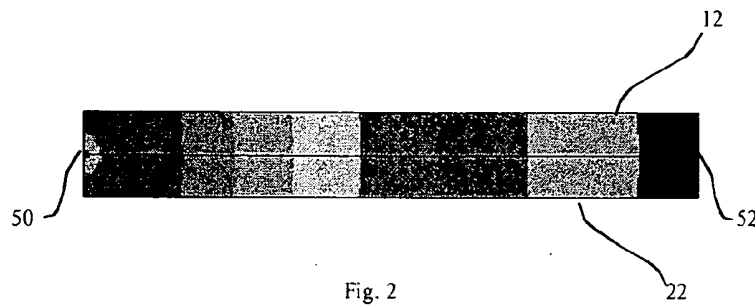


Fig. 2

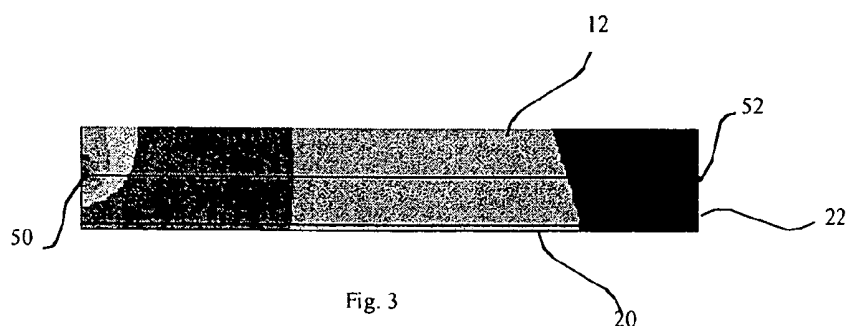


Fig. 3

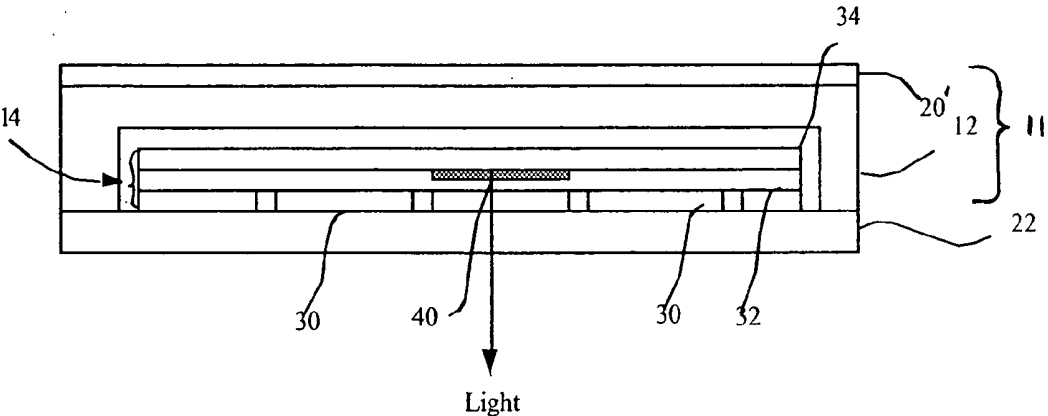


Fig. 4

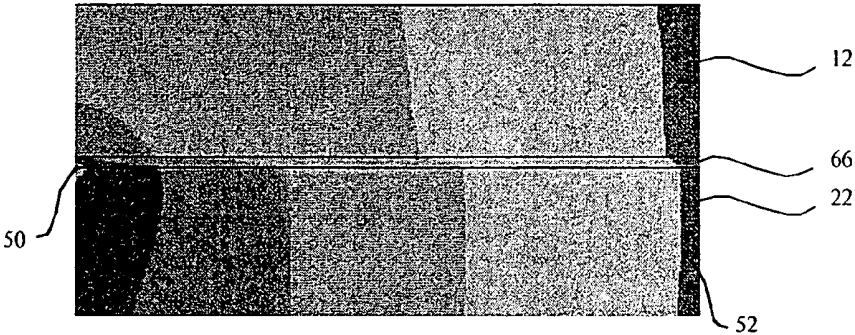


Fig. 5

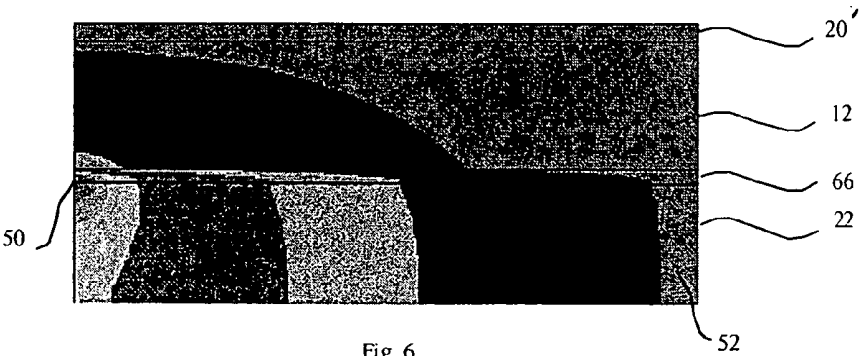


Fig. 6

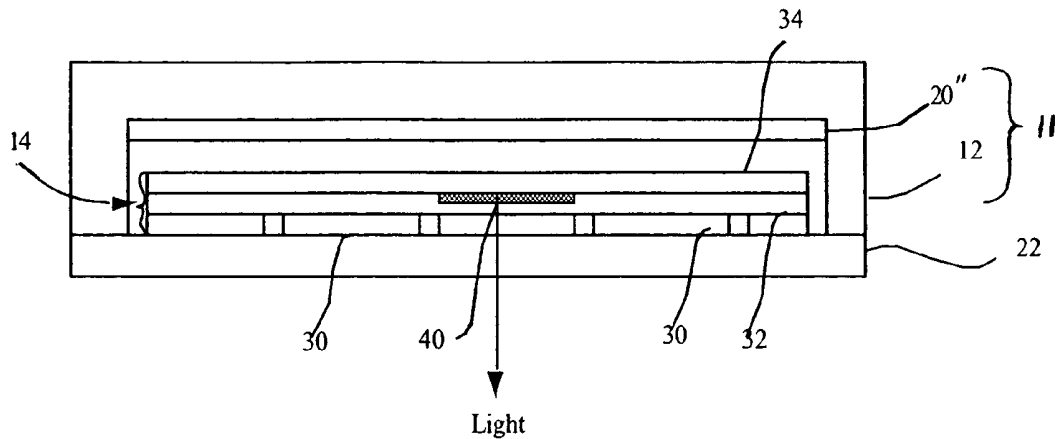


Fig. 7

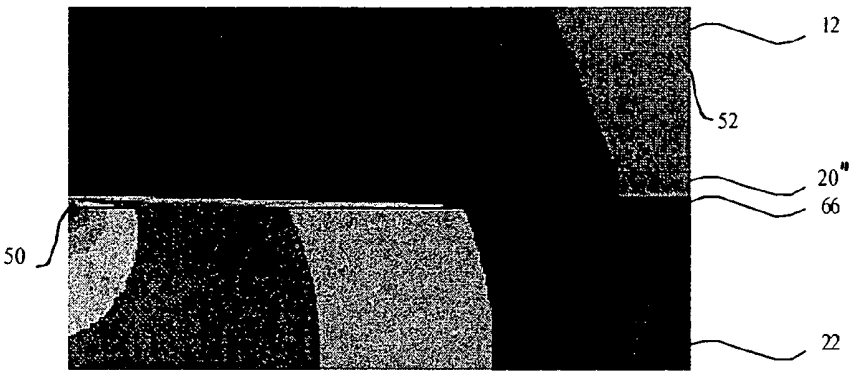


Fig. 8

OLED DISPLAY HAVING THERMALLY CONDUCTIVE LAYER

FIELD OF THE INVENTION

[0001] The present invention relates to organic light-emitting display devices. In particular, the present invention relates to reducing localized aging due to heating within an organic light-emitting display device.

BACKGROUND OF THE INVENTION

[0002] Organic light-emitting diode (OLED) display devices typically include a substrate having one or more OLED light-emitting elements including a first electrode formed thereon, one or more OLED light-emitting layers located over the first electrode, and a second electrode located over the OLED light-emitting layers, and an encapsulating cover located over the second electrode and affixed to the substrate. Such devices may be top-emitting, where the light-emitting elements are intended to be viewed through the cover, and/or bottom-emitting, where the light-emitting elements are intended to be viewed through the substrate. Accordingly, in the case of a bottom-emitting OLED device, the substrate must be largely transparent, and in the case of a top-emitting OLED device, the cover must be largely transparent.

[0003] A variety of materials may be used to construct suitable substrates and encapsulating covers for OLED devices. The desirable material properties and/or characteristics of an OLED substrate include low cost, very flat, low coefficient of thermal expansion (CTE), high strength and stability under a variety of environmental stresses, and electrically non-conductive (or able to be coated with electrically non-conductive material on the substrate surface contacting the OLED). It is important that the material forming the substrate on which electrical circuitry is deposited is electrically non-conductive so that any electrical circuitry formed thereon is not shorted. The material used most often for such substrates is glass, typically borosilicate glass, because it is transparent, very stable, can be made at low-cost, and has a very smooth surface suitable for the deposition and processing of semiconductor and organic materials. Other substrate materials have been described in the art, for example ceramics, plastics, and metals such as stainless steel (see U.S. Pat. No. 6,641,933 B1 to Yamazaki et al entitled "Light-emitting EL display device"). However, metals are conductive and so their use typically requires additional electrically non-conductive insulating layers. Metal supports typically also have a relatively high CTE, which may cause stresses in any devices deposited on the substrate. Metal and glass materials are also used in OLED encapsulating covers, for example in products demonstrated and sold by the Eastman Kodak Company.

[0004] Organic light-emitting diodes can generate efficient, high-brightness displays. However, heat generated during the operation of the display in high-brightness modes can limit the lifetime of the display, since the light-emitting materials within an OLED display degrade more rapidly when used at higher temperatures. While it is important to maintain the overall brightness of an OLED display, it is even more important to avoid localized degradation within a display. The human visual system is acutely sensitive to differences in brightness in a display. Hence, differences in

uniformity are readily noticed by a user. Such localized differences in uniformity in an OLED display may occur as a consequence of displaying static patterns on the display, for example, graphic user interfaces often display bright icons in a static location. Such local patterns will not only cause local aging in an OLED display, but will also create local hot spots in the display, further degrading the light-emitting elements in the local pattern. Glass and plastic supports, the use of which is advantageous in view of their relative electrical non-conductivity, may not be sufficiently thermally conductive to provide a uniform temperature across the substrate when the display is in operation. Hence, improved thermal management techniques may significantly improve the life expectancy of an organic display device.

[0005] One method of removing heat from an organic light emitting display device is described in U.S. Pat. No. 6,265,820, entitled, "Heat removal system for use in organic light emitting diode displays having high brightness." The '820 patent describes a heat removal system for use in organic light emitting diode displays. The heat removal assembly includes a heat dissipating assembly for dissipating heat from the organic light emitting device, a heat transfer assembly for transferring heat from the top organic light emitting device to the heat dissipating assembly and a cooling assembly for cooling the organic light emitting display device. While the system of the '820 patent provides a means for heat removal in an OLED application, its efficiency is limited by the presence of a glass substrate having poor thermal conductivity characteristics through which heat generated by the OLED devices must transfer for removal. Moreover, the structure described in the '820 patent is complex, requiring multiple layers and specific, heat transfer materials in contact with delicate OLED layers.

[0006] U.S. Pat. No. 6,480,389 to Shie et al entitled "Heat dissipation structure for solid-state light emitting device package" describes a heat dissipation structure for cooling inorganic LEDs and characterized by having a heat dissipating fluidic coolant filled in a hermetically sealed housing where at least one LED chip mounted on a metallic substrate within a metallic wall erected from the metallic substrate. Such an arrangement is complex, requires fluids, and is not suitable for area emitters such as OLEDs.

[0007] Heat sinks are also well known in the integrated circuit industry and are applied to cooling large integrated circuits. Such sinks typically are thick and are unsuitable for displays in which limiting the thickness of the display is an important goal.

[0008] It is therefore an object of the invention to provide a more uniform distribution of heat within an OLED display and to optimize the removal of heat from an OLED display device to improve the lifetime of the display.

SUMMARY OF THE INVENTION

[0009] In accordance with one embodiment of the invention, an OLED display is described comprising: a) a substrate; b) one or more OLED light emitting elements including a first electrode formed on the substrate, one or more OLED light emissive layers located over the first electrode, and a second electrode located over the OLED light emissive layers; and c) an encapsulating cover located over the second electrode and affixed to the substrate; wherein the substrate or cover comprises a composite of a non-metallic

layer and a metal layer, where the metal layer has a thickness between 1 micron and 1,000 microns and is thinner than the non-metallic layer. The invention enables OLED displays with improved lifetime, while minimizing need for increased substrate and/or cover layer thickness.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] **FIG. 1** is a schematic diagram of a top-emitting OLED display according to one embodiment of the present invention;

[0011] **FIG. 2** is a diagram illustrating the heat flow of an OLED as known in the prior art;

[0012] **FIG. 3** is a diagram illustrating the heat flow of a top-emitting OLED display as shown in **FIG. 1**;

[0013] **FIG. 4** is a schematic diagram of a bottom-emitting OLED display according to one embodiment of the present invention;

[0014] **FIG. 5** is a diagram illustrating the heat flow of a bottom-emitting OLED as known in the prior art; and

[0015] **FIG. 6** is a diagram illustrating the heat flow of an OLED display as shown in **FIG. 4**.

[0016] **FIG. 7** is a schematic diagram of a bottom-emitting OLED display according to another embodiment of the present invention; and

[0017] **FIG. 8** is a diagram illustrating the heat flow of an OLED display as shown in **FIG. 7**.

DETAILED DESCRIPTION OF THE INVENTION

[0018] **FIG. 1** illustrates a side view of a top-emitting OLED display in accordance with one embodiment of the present invention. The OLED display includes a composite substrate **10** having a non-metallic layer **22** on a first side and a metal layer **20** on a second side. The metal layer **20** has a thickness between 1 micron and 1,000 microns, preferably between 5 and 500 microns, and more preferably between 10 and 200 microns, and is thinner than the non-metallic layer **22** of the composite substrate **10**. Suitable metals include, e.g., Al, Cu, Ag, Fe, Cr and Mg and alloys thereof. Preferred materials for the non-metallic substrate layer **22** include glass and plastics, with glass, and particularly borosilicate glass, being preferred for its electrical resistance, transparency, stability, low-cost, and smooth surface.

[0019] Formed upon the non-metallic layer **22** of the composite substrate **10** is one or more OLED light-emitting elements **14** including a first electrode **30** formed on the non-metallic layer **22**, one or more OLED light-emitting layers **32** located over the first electrode **30**, and a second electrode **34** located over the OLED light-emissive layers **32**; and an encapsulating transparent cover **12** located over the second electrode **34** and affixed to the composite substrate **10**. The OLED light-emitting element **14** may be formed using well-known basic OLED cell structures including stacks of thin organic layers sandwiched between the first and second electrodes **30** and **34**. The organic layers typically comprise a hole-injection layer, a hole-transport layer, an emissive layer, and an electron-transport layer. When current is applied to any OLED light-emitting element **14**, through the electrodes **30** and **34**, the injected positive

and negative charges recombine in the emissive layer to produce light (electroluminescence).

[0020] Light emitting OLED elements **14** may be separated by a plurality of non-emitting regions including circuitry utilizing thin film transistors (TFT) conductors, and other electrical components including, for example, capacitors. The OLED elements **14** may be controlled using passive-matrix or active-matrix techniques, as are known in the art.

[0021] Top-emitting OLED displays are encapsulated via the encapsulating cover **12** formed of a transparent material, such as glass, thereby allowing the emission light generated by OLED elements **14** to exit the device. Encapsulating cover **12** protects the top-emitting OLED display from moisture or contaminants in the environment. Space between the OLED elements and the encapsulating cover may be filled, e.g., with air, an inert gas, or a polymeric buffer layer. Bottom-emitting OLED displays are likewise encapsulated but, because the light is emitted through the substrate, the substrate must be transparent and the cover may be opaque.

[0022] In operation, the heat generated by the light emission of OLED elements (for example, at light emitting area **40** in **FIG. 1**) is conducted into the composite substrate **10**. Furthermore, some heat is generated by the circuitry (not shown) within non-emitting regions but to a lesser degree compared with the heat generated by OLED elements. If the OLED light emitting elements **14** are differentially powered, localized hot spots will be formed within the display. These localized hot spots could contribute to differential degradation of the OLED materials in light emitting layer **32**, reducing the lifetime of the display. The use of a composite substrate comprising a relatively thicker non-metallic layer and a relatively thin metal layer in accordance with the embodiment of **FIG. 1** enables desired substrate properties associated with use of non-metallic materials such as glass, while also providing improved thermal management as further explained below.

[0023] Applicant has developed a variety of models for analyzing the heat flow within OLED displays and within various embodiments of the present invention. Referring to **FIG. 2**, a thermal model of a prior-art top-emitting OLED device is illustrated. The model is symmetric about the left edge and only one half of the structure is shown here and in the subsequent figures. In this structure, a glass substrate **22** (700 microns thick) is encapsulated by a glass cover **12** (also 700 microns thick). Energy is applied to a point **50** between the cover **12** and the substrate **22**. The applied energy raises the temperature of the point **50** to 60° C. The similarly shaded areas in **FIG. 2** represent areas with a band of the same approximate temperature. At the opposite end of the substrate **22** and cover **12**, a temperature band **52** has a temperature of 29° C.

[0024] Referring to **FIG. 3**, a thermal model of a top-emitting OLED according to one embodiment of the present invention is illustrated. In this structure, a composite substrate with a glass layer **22** (700 microns thick) and a relatively thinner metal (Al) layer **20** (100 microns thick) is encapsulated by an encapsulating glass cover **12** (also 700 microns thick). The same amount of energy as was applied in the model of **FIG. 2** is applied to a point **50** between the cover **12** and the glass layer **22** of the substrate. The applied

energy raises the temperature of point **50** to only 38° C. As in **FIG. 2**, similarly shaded areas in **FIG. 3** represent areas within a band of the same approximate temperature. At the opposite end of the substrate **22** and cover **12**, temperature band **52** has a temperature of 27° C. As can be seen from a comparison of **FIGS. 2 and 3**, the use of a composite substrate having glass and metal layers according to one embodiment of the present invention has significantly lowered the temperature of the OLED device at point **50**.

[0025] Referring to **FIGS. 4 and 7**, in alternative embodiments of the present invention, a bottom-emitting OLED display comprises a transparent substrate **22**; one or more OLED light emitting elements including a first electrode **30** formed on the substrate **22**, one or more OLED light emissive layers **32** located over the first electrode **30**, and a second electrode **34** located over the OLED light emissive layers **32**; and an encapsulating composite cover **11** having a non-metallic layer **12** on a first side and a metal layer **20'** (**FIG. 4**) or **20"** (**FIG. 7**) on a second side. Similarly as with metal layer **20** in the above described top-emitting embodiment, the metal layer **20'** or **20"** has a thickness between 1 micron and 1,000 microns, preferably between 5 and 500 microns, and more preferably between 10 and 200 microns, and is thinner than the non-metallic layer **12** of the composite cover **11**. Similar materials as previously described for use in a composite substrate may also be used for the metal and non-metallic layers of composite cover **11**.

[0026] The bottom emitting OLED device operates similarly to the top-emitting version with the difference that light passes through the substrate rather than through the cover. Accordingly, in the case of the bottom-emitting OLED display, the substrate **22** must be transparent while the composite cover **11** may be opaque. The cover non-metallic layer **12** may be located between the cover metal layer **20'** and the second electrode **34** (i.e., the metal layer may be on the outside of the OLED display as shown in **FIG. 4**). Alternatively, the metal cover layer **20"** may be located between the cover non-metallic layer **12** and the second electrode **34** (i.e., the metal layer may be on the inside of the OLED display as shown in **FIG. 7**).

[0027] Referring to **FIG. 5**, a thermal model of a prior-art bottom-emitting OLED is illustrated. In this structure, a transparent glass substrate **22** (700 microns thick) is encapsulated by a glass cover **12** (also 700 microns thick). A 50-micron air gap **66** is provided to simulate the gap which may be present in OLED devices between the second electrode and the encapsulating cover **12** to accommodate the organic layers **32** and electrodes **30** and **34**. Energy is applied to a single point **50** on the transparent substrate **22**. The applied energy raises the temperature of the point to 60° C. Similarly shaded areas in **FIG. 5** represent areas within a band of the same approximate temperature. At the opposite end of the substrate and cover, a temperature band **52** has a temperature of 37° C.

[0028] Referring to **FIG. 6**, a thermal model of a bottom-emitting OLED according to one embodiment of the present invention is illustrated. In this structure, a transparent glass substrate **22** (700 microns thick) is encapsulated by a cover having a glass layer **12** (also 700 microns thick) and having a relatively thinner metal (Al) layer **20'** (100 microns thick) on the outside of the OLED device. The substrate **22** and the glass layer **12** of the cover are separated by a 50-micron air

gap **66** as in **FIG. 5**. The same amount of energy as was applied in the model of **FIG. 5** is applied to a single point **50** on the substrate. The applied energy raises the temperature of the point to 45° C. As in **FIG. 5**, the similarly shaded areas represent areas within a band of the same approximate temperature. At the opposite end of the substrate **22** and cover **12**, temperature band **52** has a temperature of 26° C. As can be seen from a comparison of the models of **FIGS. 5 and 6**, the use of a composite cover comprising a glass layer and a thinner metal layer according to one embodiment of the present invention has significantly lowered the temperature of the OLED device at point **50**.

[0029] Referring to **FIG. 8**, a thermal model of a bottom-emitting OLED according to another embodiment of the present invention is illustrated. In this structure, a glass substrate **22** (700 microns thick) is encapsulated by a cover having a glass layer **12** (also 700 microns thick) and having a relatively thinner metal (Al) layer **20"** (100 microns thick) located on the inside of the OLED device next to the air gap **66**. The same amount of energy as was applied in the model of **FIG. 5** is applied to a single point **50** on the substrate. The applied energy raises the temperature of the point to 44° C. As in **FIG. 5**, similarly shaded areas represent areas within a band of the same approximate temperature. At the opposite end of the substrate and cover, a temperature band **52** has a temperature of 26° C. As can be seen from a comparison of **FIGS. 5 and 8**, the use of a composite cover has again significantly lowered the temperature of the OLED device at point **50**.

[0030] In all three cases (**FIGS. 3, 6, and 8**), the use of a composite substrate or cover as described in the present invention significantly reduces the local heating of the substrate and cover, and the light-emitting materials deposited in close thermal contact with them. This reduction in heat has the beneficial effect of reducing the aging of the light emitting materials. Applicants have done experiments and modeling demonstrating the improvement in display lifetime due to the reduction in local heating. The modeling work is performed using conventional, commercially available modeling tools.

[0031] A variety of metals and thickness of layers may be used in the present invention, for example aluminum, copper, silver, iron, chromium, and magnesium and other thermally conductive metals. Alloys of these metals may also be suitable. Suitable metals or metal alloys are thermally conductive and readily deposited on the non-metallic component of the substrate or cover. Deposition may be done by sputtering, evaporation or by laminating thin layers of metals onto a relatively thicker glass layer with thermally conductive adhesives. Alternatively, glass may be deposited onto a pre-existing metal layer as long as the non-metallic glass layer serves as the primary component of the composite. An OLED display may be completed before the metal layer is applied to the non-metallic layer of either the cover or the substrate (for a bottom- or top-emitting OLED display respectively). This process maximizes the use of existing OLED display manufacturing equipment.

[0032] Depending on the size of the substrate or cover, the thickness of the metal layer, the coefficient of thermal expansion (CTE) of the metal, and the characteristics of the non-metallic layer, problems with a mis-match in heat-related expansion between the two materials may be encountered.

tered. Because the metal is not used as a conductor or primarily for rigidity of the substrate, the metal component of the composite substrate may be deposited or attached in separate, smaller pieces (i.e. non-contiguous) so that, over the extent of the smaller pieces, any differences in the CTE of the two components are negligible. The pieces may, or may not be contiguous. Metal pieces that are not physically touching may reduce the distribution of the heat to a smaller extent. Moreover, where the components of the substrate are laminated with an adhesive, suitable adhesives may be employed to control the relative expansion of the components.

[0033] According to the present invention, the substrate or cover may be either rigid or flexible. Suitably thin layers of either metals or glasses may be used. In particular, flexible plastics may be employed. Since flexible plastic materials do not effectively seal an OLED display from environmental gases or liquids, the metal layer may provide additional protection to the OLED display from the environment.

[0034] Heat additionally may be removed from the OLED display of the present invention by using conventional heat-sinks in thermal contact with the metal layer, for example at the edge of the display. When used within an appliance, the appliance may be placed in thermal contact with the metal layer to provide an external heat sink.

[0035] The metal layer **20**, **20'**, **20''** of the composite cover **11** or substrate **10** may also be employed to reduce electromagnetic radiation from or into the OLED display. By supplying a ground connection to the metal layer, electromagnetic interference from the display or from electrical components near the display may be reduced.

[0036] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention. Accordingly, the preferred embodiments of the invention as described in reference to **FIGS. 1, 4, and 7** are intended to be illustrative, not limiting.

Parts List

- [0037] **10** composite substrate
- [0038] **11** composite cover
- [0039] **12** non-metallic cover layer
- [0040] **14** OLED light emitting element
- [0041] **20** metal layer
- [0042] **20'** metal layer
- [0043] **20''** metal layer
- [0044] **22** non-metallic substrate layer
- [0045] **30** first electrode
- [0046] **32** OLED light emitting layer
- [0047] **34** second electrode
- [0048] **40** light emitting area
- [0049] **50** energy application point
- [0050] **52** temperature band
- [0051] **66** gap

What is claimed is:

1. An OLED display comprising:

- a) a substrate;
- b) one or more OLED light emitting elements including a first electrode formed on the substrate, one or more OLED light emissive layers located over the first electrode, and a second electrode located over the OLED light emissive layers; and
- c) an encapsulating cover located over the second electrode and affixed to the substrate;

wherein the substrate or cover comprises a composite of a non-metallic layer and a metal layer, where the metal layer has a thickness between 1 micron and 1,000 microns and is thinner than the non-metallic layer.

2. The OLED display claimed in claim 1 wherein the non-metallic layer comprises a glass or plastic layer.

3. The OLED display claimed in claim 1 wherein the metal layer comprises aluminum, silver, copper, iron, chromium, or magnesium, or an alloy including at least one of aluminum, silver, copper, iron, chromium, and magnesium.

4. The OLED display claimed in claim 1 wherein a heat sink is affixed to the edge of the cover or substrate and in thermal contact with the metal layer.

5. The OLED display claimed in claim 1 wherein the OLED display is incorporated within an appliance and the metal layer is in thermal contact with the appliance.

6. The OLED display claimed in claim 1 wherein the composite substrate or cover is formed by first forming a glass or plastic layer and depositing a metal layer upon the glass or plastic.

7. The OLED display claimed in claim 1 wherein the composite substrate or cover is formed by first forming a metal layer and coating glass or plastic upon the metal layer.

8. The OLED display claimed in claim 1 wherein the composite substrate or cover is formed by first forming a glass or plastic layer and a metal layer and affixing the metal layer to the glass or plastic layer with a thermally conductive adhesive.

9. The OLED display claimed in claim 1 wherein the first electrode, the OLED layer(s), and the second electrode are first formed upon a first side of a glass or plastic layer and the metal layer is subsequently formed upon the second side of the glass or plastic layer.

10. The OLED display claimed in claim 1 wherein the metal layer is non-contiguous.

11. The OLED display claimed in claim 1 wherein the metal layer is part of a flexible composite substrate.

12. The OLED display claimed in claim 1 wherein the metal layer is part of a flexible composite cover.

13. The OLED display claimed in claim 1 wherein the metal layer is located between a glass or plastic cover layer and the second electrode.

14. The OLED display claimed in claim 1 wherein a glass or plastic cover layer is located between the metal layer and the second electrode.

15. The OLED display claimed in claim 1 wherein the non-metallic layer comprises a glass layer.

16. The OLED display claimed in claim 15 wherein the glass is a borosilicate glass.

17. The OLED display claimed in claim 16 wherein the metal layer comprises aluminum.

18. The OLED display claimed in claim 1 wherein the non-metallic layer comprises a plastic layer and the metal layer acts as a barrier layer to prevent the passage of gas or liquids through the substrate or cover.

19. The OLED display claimed in claim 1 wherein the metal layer reduces electromagnetic interference.

20. The OLED display claimed in claim 1 wherein the metal layer has a thickness between 5 micron and 500 microns.

* * * * *

专利名称(译)	OLED显示器具有导热层		
公开(公告)号	US20050110396A1	公开(公告)日	2005-05-26
申请号	US10/722243	申请日	2003-11-25
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	COK RONALD S		
发明人	COK, RONALD S.		
IPC分类号	H01L51/52 H05B33/00 H05B33/26		
CPC分类号	H01L51/5237 H01L2251/5315 H01L51/529 H01L51/5243		
其他公开文献	US7049745		
外部链接	Espacenet USPTO		

摘要(译)

描述了一种OLED显示器，包括：a) 基板；b) 一个或多个OLED发光元件，包括形成在基板上的第一电极，位于第一电极上方的一个或多个OLED发光层，以及位于OLED发光层上方的第二电极；c) 封装盖，位于第二电极上并固定在基板上；其中基板或盖子包括非金属层和金属层的复合物，其中金属层的厚度在1微米和1000微米之间，并且比非金属层薄。本发明使OLED显示器具有改善的寿命，同时最小化对增加的基板和/或覆盖层厚度的需求。

