



US 20110057864A1

(19) **United States**(12) **Patent Application Publication**
Chung(10) **Pub. No.: US 2011/0057864 A1**(43) **Pub. Date: Mar. 10, 2011**(54) **EMISSION CONTROL DRIVER AND
ORGANIC LIGHT EMITTING DISPLAY
USING THE SAME**(52) **U.S. Cl. 345/76; 315/160**(76) **Inventor: Kyung-Hoon Chung, Yongin-City
(KR)**(21) **Appl. No.: 12/805,704**(22) **Filed: Aug. 16, 2010**(30) **Foreign Application Priority Data**

Sep. 8, 2009 (KR) 10-2009-0084411

Publication Classification(51) **Int. Cl.**
G09G 3/30 (2006.01)
H05B 37/00 (2006.01)(57) **ABSTRACT**

An emission control driver including a plurality of stages, each including a first unit adapted to generate a first output signal at a first node thereof based on an input signal, a clock signal, a inverted input signal, first and second power source voltages, a second unit adapted to output an emission control signal based on the first output signal and the input signal, a third unit adapted to transmit the first or second power source to the first unit based on the emission control signal, a inverted clock signal and an inverted emission control signal when a first path between the first power source and the first node and a second path between the second power source and the first node are blocked by the clock signal, and a fourth unit adapted to output a inverted emission control signal based on the emission control signal and the first output signal.

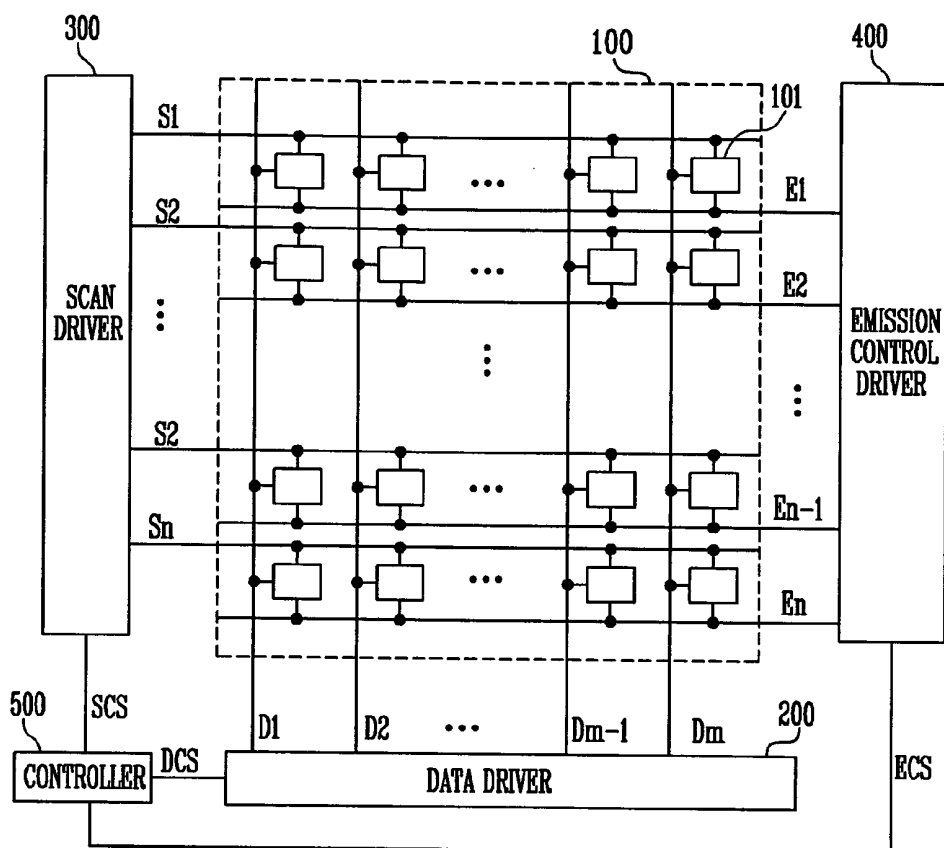


FIG. 1

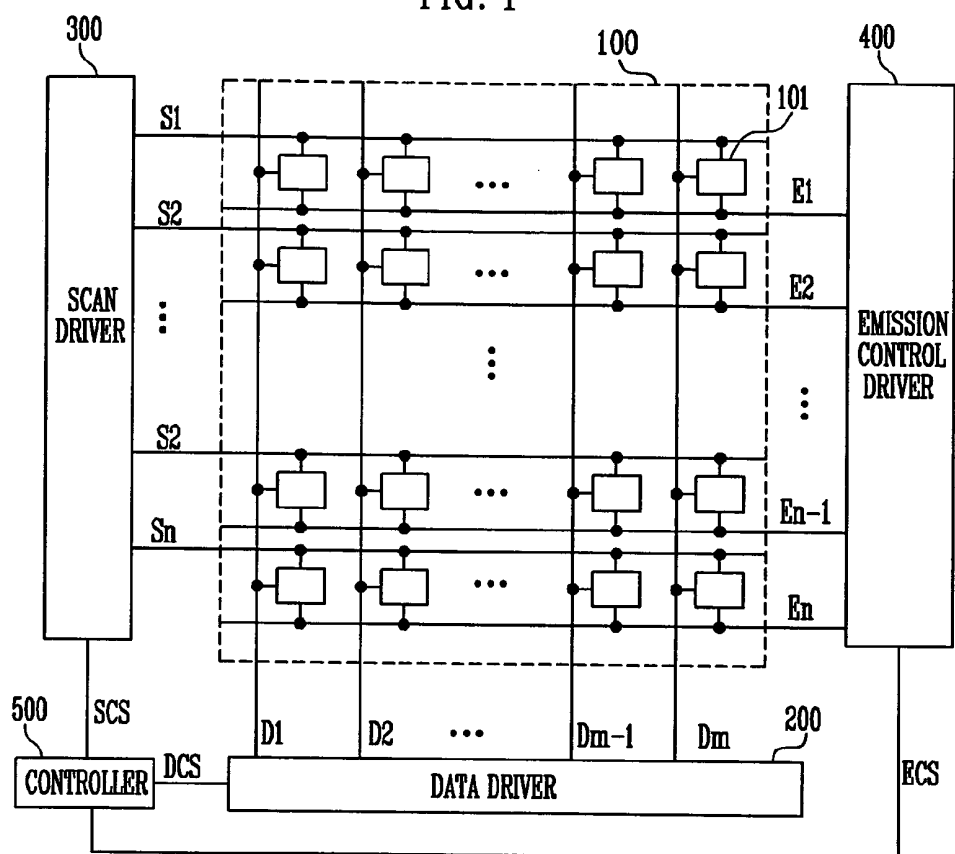


FIG. 2

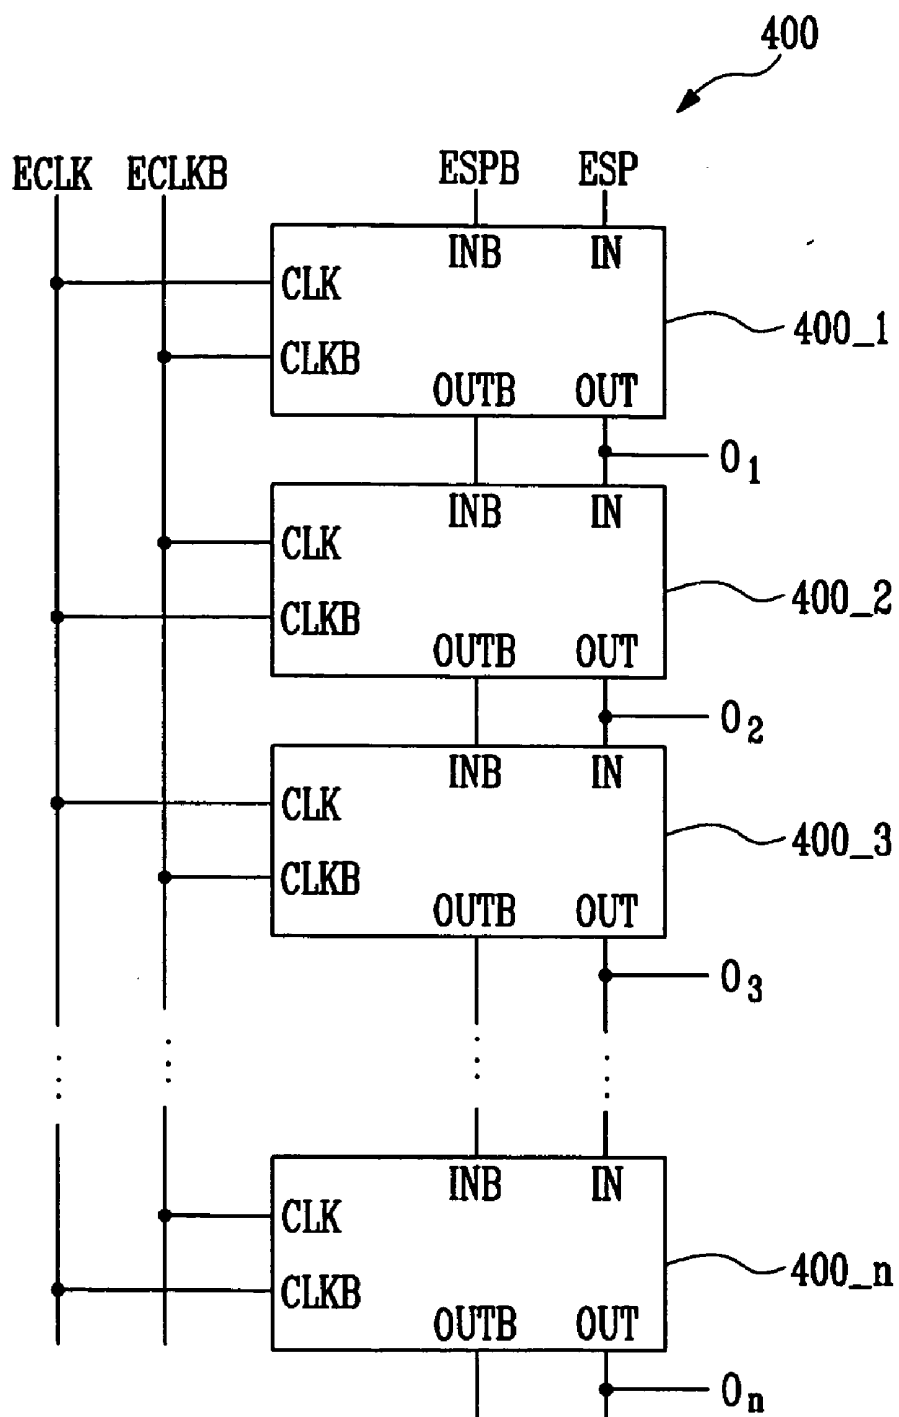


FIG. 3

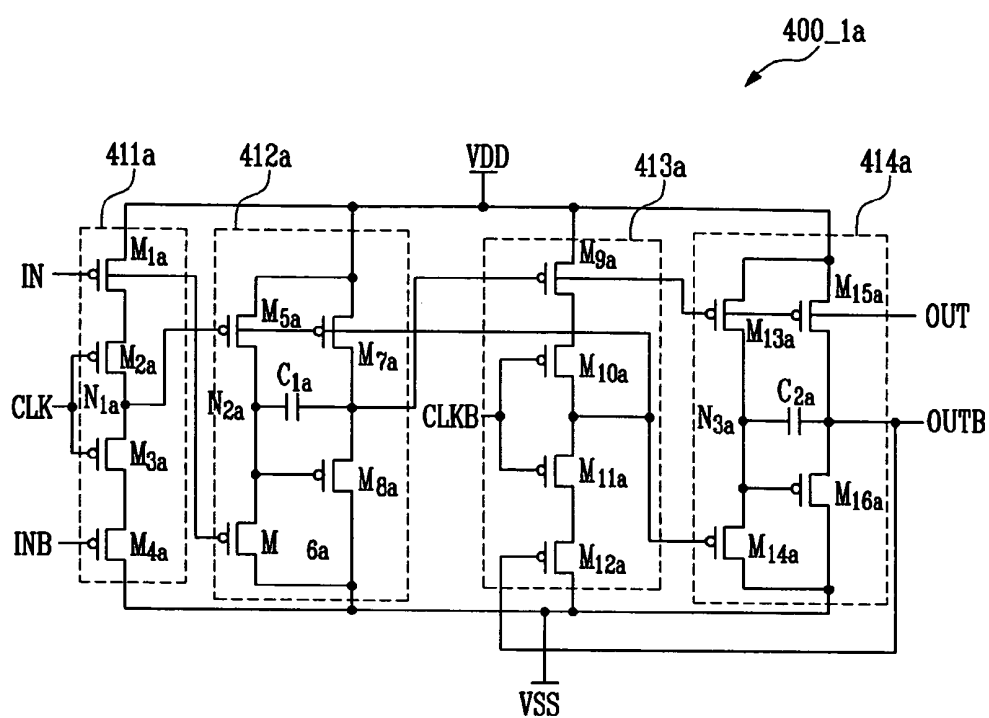


FIG. 4A

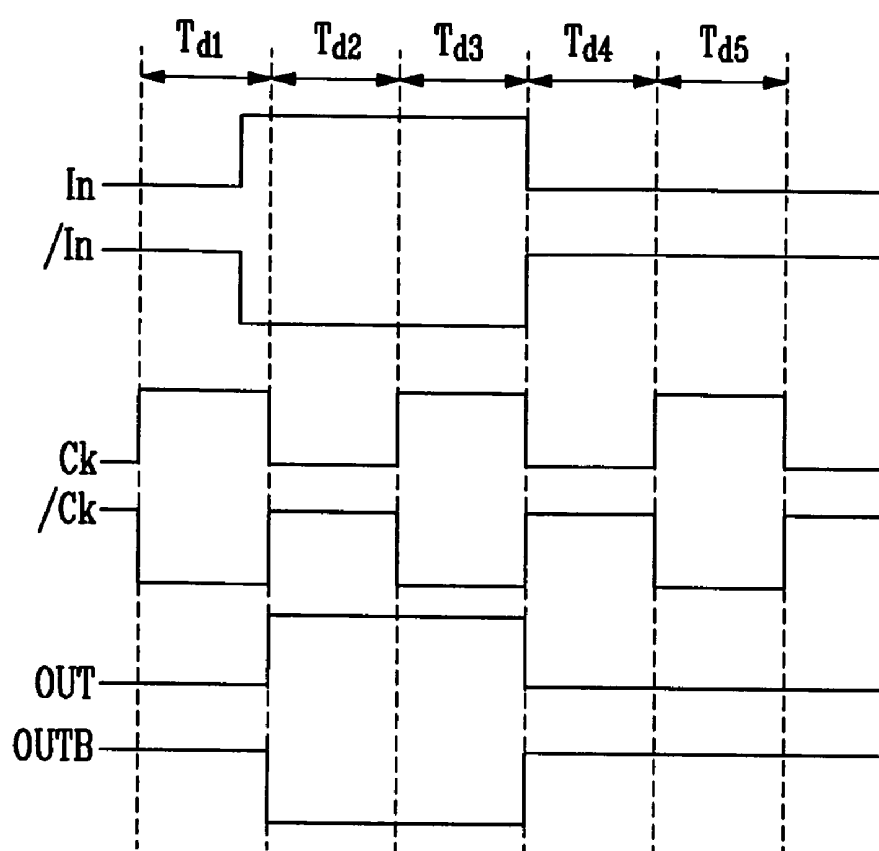


FIG. 4B

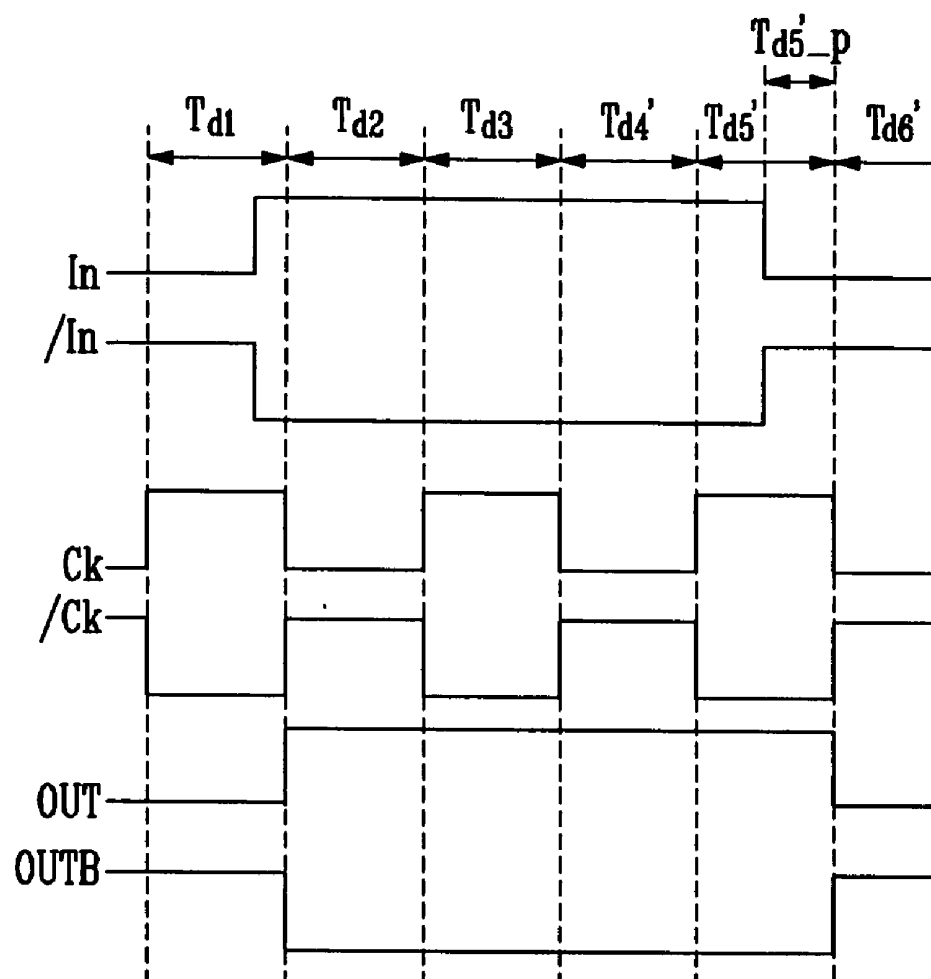


FIG. 5

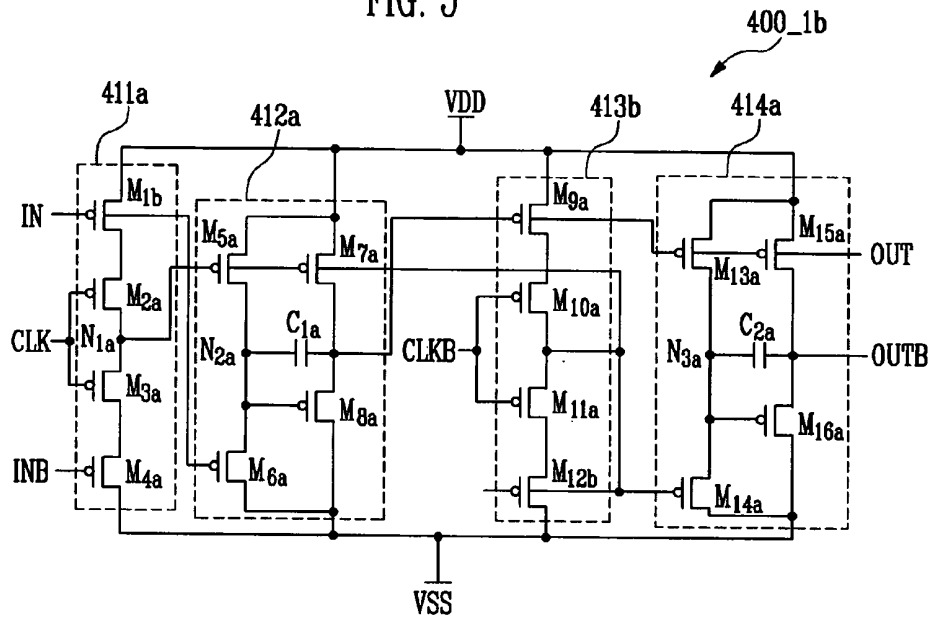


FIG. 6


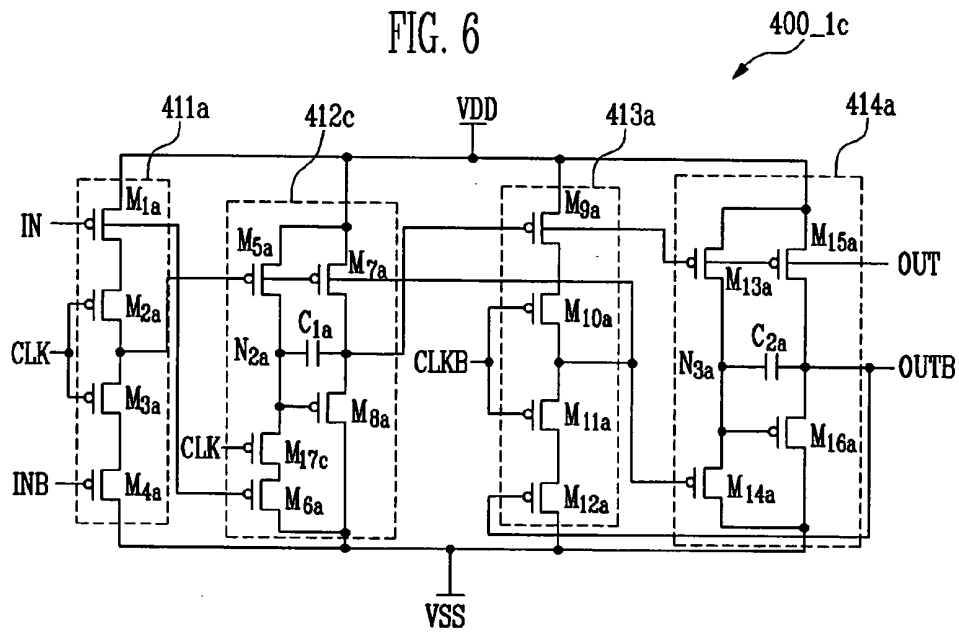


FIG. 7

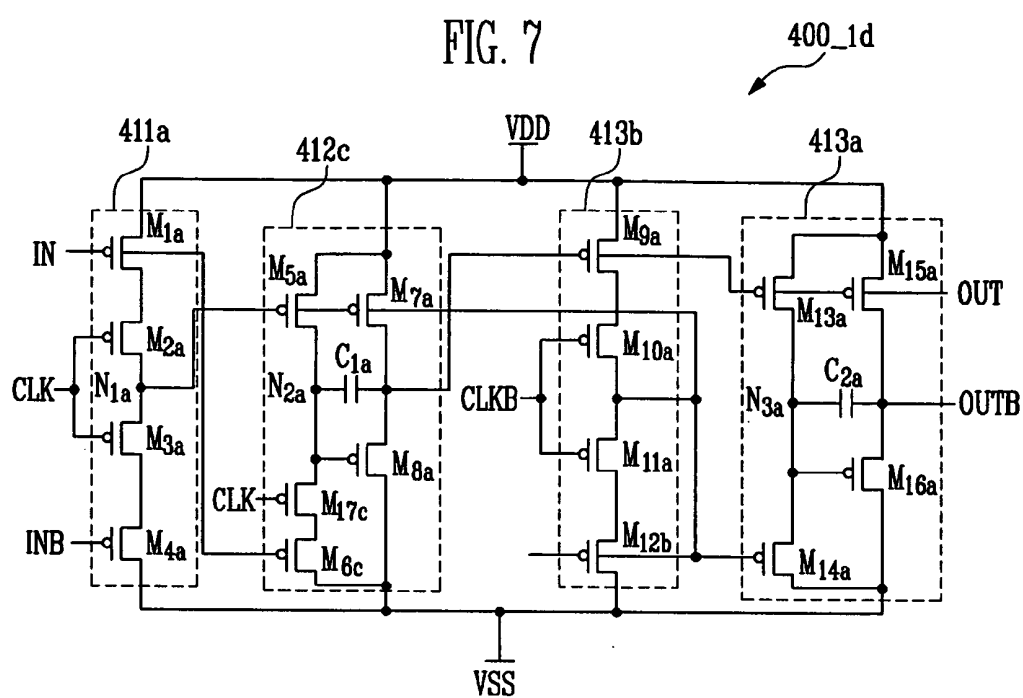

EMISSION CONTROL DRIVER AND ORGANIC LIGHT EMITTING DISPLAY USING THE SAME

BACKGROUND

[0001] 1. Field

[0002] Embodiments relate to an emission control driver and an organic light emitting display using the same. More particularly, embodiments relate to an emission control driver adapted to control pulse width of emission control signals and a number of pulses, and an organic light emitting display using the same.

[0003] 2. Description of the Related Art

[0004] In a flat panel display (FPD), a plurality of pixels may be arranged on a substrate. The pixels may be arranged in a matrix pattern and may define a display region. Scan lines and data lines may be coupled to pixels so that data signals may be selectively applied to the pixels to display an image.

[0005] A FPD may be a passive matrix type light emitting display or an active matrix type light emitting display based on a method of driving the respective pixels thereof. Active matrix type FPDs are generally advantageous with regard to resolution, contrast, and operation speed, and may be more commonly used to selectively illuminate the pixels of a display.

[0006] FPDs may be used as displays of portable information terminals such as personal computers, mobile telephones, and personal digital assistants (PDAs) or monitors of various information apparatus. A liquid crystal display (LCD) using a liquid crystal panel, an organic light emitting display using an organic light emitting diode (OLED), and a plasma display panel (PDP) using a plasma panel are known as the FPDs.

[0007] Recently, various light emitting displays that are lighter in weight and smaller in volume as compared to cathode ray tubes (CRTs) have been developed. In general, organic light emitting displays provide advantages such as relatively high emission efficiency and brightness, a relatively large viewing angle, and relatively fast response speed.

[0008] While many advances have been made, improved organic light emitting displays and/or improved drivers for such organic light emitting displays are desired. For example, improved organic light emitting displays that consume relatively less power and/or may be adapted to, e.g., better control a pulse width and/or a number of pulses of emission control signals are desired.

SUMMARY

[0009] Embodiments are therefore directed to emission control drivers and organic light emitting displays, which substantially overcome one or more of the problems due to the limitations and disadvantages of the related art.

[0010] It is therefore a feature of an embodiment to provide an emission control driver capable of simply controlling a pulse width and a number of pulses of emission control signals.

[0011] It is therefore a separate feature of an embodiment to provide an organic light emitting display employing an emission control driver capable of simply controlling a pulse width and a number of pulses of emission control signals.

[0012] It is therefore a separate feature of an embodiment to provide an emission control driver adapted to control a pulse width and a number of pulses of emission control signals, and

an organic light emitting display including such an emission control driver such that when current does not flow through an OLED of pixels being driven by the emission control signals, it corresponds to an input of a black signal so that a latent image can be reduced.

[0013] At least one of the above and other features and advantages may be realized by providing an emission control driver including a plurality of stages adapted to receive voltages from a first power source and a second power source and to generate emission control signals, wherein each of the stages includes a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, an inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit, a second signal processing unit adapted to output an emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an inverse of the first output signal, a third signal processing unit adapted to transmit a voltage of the first power source or the second power source to the first signal processing unit based on the emission control signal, an inverted clock signal, and an inverted emission control signal when a first path, between the first power source and the first node, and a second path, between the second power source and the first node, are blocked by the clock signal, the inverted emission control signal corresponding to an inverse of the emission control signal, and a fourth signal processing unit adapted to output an inverted emission control signal based on the emission control signal and the first output signal.

[0014] The first signal processing unit may include first, second, third, and fourth transistors, wherein a source of the first transistor may be coupled to the first power source, a drain of the first transistor may be coupled to a source of the second transistor, and a gate of the first transistor may be coupled to an input signal terminal to which the input signal is input, wherein a drain of the second transistor may be coupled to the first node, and a gate of the second transistor may be coupled to a clock terminal to which the clock signal is input, wherein a source of the third transistor may be coupled to the first node, a drain of the third transistor may be coupled to a source of the fourth transistor, and a gate of the third transistor may be coupled to the clock terminal, and wherein a drain of the fourth transistor may be coupled to the second power source, and a gate of the fourth transistor may be coupled to an inverted input signal terminal to which the inverted input signal is input.

[0015] The second signal processing unit may include fifth, sixth, seventh, and eighth transistors and a first capacitor, wherein a source of the fifth transistor may be coupled to the first power source, a drain of the fifth transistor may be coupled to a second node, and a gate of the fifth transistor may be coupled to the first node, a source of the sixth transistor may be coupled to the second node, a drain of the sixth transistor may be coupled to the second power source, and a gate of the sixth transistor may be coupled to an input signal terminal to which the input signal is transmitted, wherein a source of the seventh transistor may be coupled to the first power source, a drain of the seventh transistor may be coupled to an output terminal from which the emission control signal is output by inverting the first output signal, and a gate of the seventh transistor may be coupled to the first node, a source of the eighth transistor may be coupled to the output terminal, a drain of the eighth transistor may be coupled to the second

power source, and a gate of the eighth transistor may be coupled to the second node, and wherein a first electrode of the first capacitor may be coupled to the second node and a second electrode of the first capacitor may be coupled to the output terminal.

[0016] The second signal processing unit may further include a seventeenth transistor, wherein a source of the seventeenth transistor is coupled to the second node, a drain of the seventeenth transistor is coupled to the source of the sixth transistor, and a gate of the seventeenth transistor is coupled to the clock terminal.

[0017] The third signal processing unit may include ninth, tenth, eleventh, and twelfth transistors, wherein a source of the ninth transistor may be coupled to the first power source, a drain of the ninth transistor may be coupled to a source of the tenth transistor, and a gate of the ninth transistor may be coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor is coupled to a source of the eleventh transistor, and a gate of the tenth transistor is coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor may be coupled to a source of the twelfth transistor, and a gate of the eleventh transistor may be coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor may be coupled to the second power source, and a gate of the twelfth transistor may be adapted to receive the first output signal.

[0018] The third signal processing unit may include ninth, tenth, eleventh, and twelfth transistors, wherein a source of the ninth transistor may be coupled to the first power source, a drain of the ninth transistor may be coupled to a source of the tenth transistor, and a gate of the ninth transistor may be coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor may be coupled to a source of the eleventh transistor, and a gate of the tenth transistor may be coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor may be coupled to a source of the twelfth transistor, and a gate of the eleventh transistor may be coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor may be coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the inverted emission control signal.

[0019] A ratio of width/length of a channel region of the fifth transistor may be larger than a ratio of width/length of a channel region of the sixth transistor.

[0020] The third signal processing unit may include ninth, tenth, eleventh, and twelfth transistors, wherein a source of the ninth transistor may be coupled to the first power source, a drain of the ninth transistor is coupled to a source of the tenth transistor, and a gate of the ninth transistor may be coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor may be coupled to a source of the eleventh transistor, and a gate of the tenth transistor may be coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor may be coupled to a source of the twelfth transistor, and a gate of the eleventh transistor may be coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor may be coupled to the second power source, and a gate of the twelfth transistor may be adapted to receive the inverted emission control signal.

[0021] The third signal processing unit may include ninth, tenth, eleventh, and twelfth transistors, wherein a source of

the ninth transistor may be coupled to the first power source, a drain of the ninth transistor may be coupled to a source of the tenth transistor, and a gate of the ninth transistor may be coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor may be coupled to a source of the eleventh transistor, and a gate of the tenth transistor may be coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor may be coupled to a source of the twelfth transistor, and a gate of the eleventh transistor may be coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor may be coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the first output signal.

[0022] The fourth signal processing unit may include thirteenth, fourteenth, fifteenth, and sixteenth transistors, and a second capacitor, wherein a source of the thirteenth transistor may be coupled to the first power source, a drain of the thirteenth transistor is coupled to a third node, and a gate of the thirteenth transistor is coupled to an output terminal from which the emission control signal is output, wherein a source of the fourteenth transistor may be coupled to the third node, a drain of the fourteenth transistor is coupled to the second power source, and a gate of the fourteenth transistor may be adapted to receive the first output signal, wherein a source of the fifteenth transistor may be coupled to the first power source, a drain of the fifteenth transistor is coupled to an inverted output terminal from which the inverted emission control signal is output, and a gate of the fifteenth transistor may be coupled to the output terminal, wherein a source of the sixteenth transistor may be coupled to the inverted output terminal, a drain of the sixteenth transistor may be coupled to the second power source, and a gate of the sixteenth transistor may be coupled to the third node, and wherein the second capacitor may be coupled between the third node and the inverted output terminal.

[0023] The plurality of stages may include n stages, and for each of the second through n -th stages, the emission control signal output by the n -1th stage may be input as the input signal for the respective stage, and the inverted emission control signal output by the n -1th stage may be input as the inverted input signal for the respective stage.

[0024] A pulse width of the emission control signal may correspond to a same number of clock cycles as a pulse width of the input signal.

[0025] At least one of the above and other features and advantages may be separately realized by providing an organic light emitting display, including a pixel unit including a plurality of pixels arranged in a region defined by scan lines, emission control lines, and data lines, a scan driver adapted to transmit scan signals to the scan lines, an emission control driver adapted to transmit emission control signals to the emission control lines, a data driver adapted to transmit data signals to the data lines, and a controller adapted to generate control signals for controlling the scan driver, the emission control driver, and the data driver, wherein each of the stages, includes a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, an inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit, a second signal processing unit adapted to output the corresponding emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an

inverse of the first output signal, a third signal processing unit adapted to selectively transmit the first power source or the second power source to the first signal processing unit based on the emission control signal, an inverted clock signal, and an inverted emission control signal when a first path, between the first power source and the first node, and a second path, between the second power source and the first node, are blocked by the clock signal, the inverted emission control signal corresponding to an inverse of the emission control signal, and a fourth signal processing unit adapted to output an inverted emission control signal based on the corresponding emission control signal and the first output signal.

[0026] Each of the emission control signals may be transmitted to two of the emission control lines.

[0027] Each of the emission control signals may be transmitted to one of the emission control lines.

[0028] The controller may be adapted generate the input signal, the inverted input signal, the clock signal, and the inverted clock signal to control pulse widths of the input signal and the inverted input signal.

[0029] The pulse width of the input signal may correspond to a same number of clock periods as a pulse width of the corresponding emission control signal.

[0030] At least one of the above and other features and advantages may be separately realized by providing an emission control driver including a plurality of stages receiving a first power source and a second power source and driving the first power source and the second power source to generate emission control signals, wherein each of the stages includes a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, an inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit, a second signal processing unit adapted to output an emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an inverse of the first output signal, a third signal processing unit adapted to selectively control a voltage at the first node of the first signal processing unit to correspond to a voltage transmitted from the first power source or the second power source, the third signal processing unit selectively controlling the voltage at the first node based on the emission control signal, an inverted clock signal, and an inverted emission control signal, the inverted emission control signal corresponding to an inverse of the emission control signal, and a fourth signal processing unit adapted to output an inverted emission control signal based on the emission control signal and the first output signal.

[0031] The first signal processing unit may include a plurality of transistors adapted to transmit the a voltage of the first power source or a voltage of the second power source to the first node based on the input signal, the clock signal and the inverted input signal, and the third signal processing unit is adapted to selectively control the voltage at the first node when the input signal, the inverted input signal and/or the clock signal prevent the transmission of the voltage of the first power source or the voltage of the second power source to the first node.

[0032] The first output signal may correspond to the inverted emission control signal, and the inverted emission control signal may be an inverse of the emission control signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] The above and other features and advantages will become more apparent to those of ordinary skill in the art by

describing in detail exemplary embodiments with reference to the attached drawings, in which:

[0034] FIG. 1 illustrates a block diagram of a first exemplary embodiment of an organic light emitting display;

[0035] FIG. 2 illustrates a block diagram of an exemplary structure of an emission control driver employable by the organic light emitting display of FIG. 1;

[0036] FIG. 3 illustrates a schematic diagram of a first exemplary embodiment of a stage of the emission control driver of FIG. 2;

[0037] FIG. 4A illustrates an exemplary timing diagram of signals employable for operating the exemplary stage of FIG. 3;

[0038] FIG. 4B illustrates another exemplary timing diagram of signals employable for operating the exemplary stage of FIG. 3;

[0039] FIG. 5 illustrates a schematic diagram of a second exemplary embodiment of a stage of the emission control driver of FIG. 2;

[0040] FIG. 6 illustrates a schematic diagram of a third exemplary embodiment of a stage of the emission control driver of FIG. 2; and

[0041] FIG. 7 illustrates a schematic diagram of a fourth exemplary embodiment of a stage of the emission control driver of FIG. 2.

DETAILED DESCRIPTION

[0042] Korean Patent Application No. 10-2009-0084411, filed on Sep. 8, 2009, in the Korean Intellectual Property Office, and entitled: "Emission Driver and Organic Light Emitting Display Device Using the Same" is incorporated by reference herein in its entirety.

[0043] Exemplary embodiments will now be described more fully hereinafter with reference to the accompanying drawings; however, they may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0044] It will be understood that when an element is referred to as being "between" two elements, it may be the only element between the two elements, or one or more intervening elements may also be present. It will also be understood that when a first element is described as being coupled to a second element, the first element may not only be directly coupled to the second element but may also be indirectly coupled to the second element via one or more other elements. Further, some of the elements that are not essential to the complete understanding of the invention are omitted for clarity. Like reference numerals refer to like elements throughout the specification.

[0045] FIG. 1 illustrates a block diagram of a first exemplary embodiment of an organic light emitting display. Referring to FIG. 1, the organic light emitting display may include a pixel unit 100, a data driver 200, a scan driver 300, an emission control driver 400, and a controller 500.

[0046] The pixel unit 100 may include m data lines D1, D2, . . . , Dm-1, and Dm, n scan lines S1, S2, . . . , Sn-1, and Sn, and n emission control lines E1, E2, En-1, and En, and a plurality of pixels 101. The pixels 101 may be formed in a region defined by the m data lines D1, D2, . . . , Dm-1, and Dm, the n scan lines S1, S2, . . . , Sn-1, and Sn, and the n emission control lines E1, E2, En-1, and En. It should be understood that, although not shown, each of the pixels 101

may include a pixel circuit and an organic light emitting diode (OLED). For each of the pixels **101**, the pixel circuit thereof may generate a pixel current that flows through the pixel based on data signals transmitted through the plurality of data lines **D1**, **D2**, . . . , **Dm-1**, and **Dm** and scan signals transmitted through the plurality of scan lines **S1**, **S2**, . . . , **Sn-1**, and **Sn**, and may control the pixel current flowing to the OLED based on emission control signals transmitted through the *n* emission control lines **E1**, **E2**, . . . , **En-1**, and **En**.

[0047] The data driver **200** may be coupled to the *m* data lines **D1**, **D2**, . . . , **Dm-1**, and **Dm**. The data driver **200** may generate the data signals to sequentially transmit the data signals for each column to the *m* data lines **D1**, **D2**, . . . , **Dm-1**, and **Dm**, respectively.

[0048] The scan driver **300** may be coupled to the *n* scan lines **S1**, **S2**, . . . , **Sn-1**, and **Sn**. The scan driver **300** may generate the scan signals to transmit the respective scan signals to the *n* scan lines **S1**, **S2**, . . . , **Sn-1**, and **Sn**. The scan signals may select a respective row of the pixels **101**, and the data driver **200** may supply respective data signals to the pixels **101** positioned along the selected row. As a result, current corresponding to the data signals may be generated by the pixels, respectively.

[0049] The emission control driver **400** may be coupled to the *n* emission control lines **E1**, **E2**, . . . , **En-1**, and **En**. The emission control driver **400** may generate the emission control signals and may transmit the emission control signals to the *n* emission control lines **E1**, **E2**, . . . , **En-1**, and **En**, respectively. The emission control driver **400** may control a pulse width and a number of pulses of the emission control signals, respectively. The pixels **101** coupled to the emission control lines **E1**, **E2**, . . . , **En-1**, and **En** may receive the respective emission control signals. When a respective one of the *n* emission control lines **E1** to **En**, current generated by each of the pixels **101** coupled to the respective emission control line **E1** to **En** may flow to the corresponding OLEDs, respectively. A time period when the current generated by the respective pixel **101** may flow to the OLED thereof may be based on the respective emission control signal.

[0050] The controller **500** may transmit data driving control signals DCS to the data driver **200**, may transmit scan driving control signals SCS to the scan driver **300**, and may transmit emission control driving signals ECS to the emission control driver **400** for driving the data driver **200**, the scan driver **300**, and the emission control driver **400**, respectively.

[0051] By controlling characteristics of the emission control driving signals ECS, the controller **500** may control a pulse width and a number of pulses of the emission control signals output from the emission control driver **400**. More particularly, in embodiments, the controller **500** may control a pulse width and/or a number of pulses of a start pulse associated with the emission control driving signals ECS supplied to the emission control driver **400** such that a pulse width and a number of pulses of the emission control signals may be controlled.

[0052] FIG. 2 illustrates a block diagram of an exemplary embodiment of the emission control driver **400** employable by the organic light emitting display of FIG. 1.

[0053] Referring to FIG. 2, the emission control driver **400** may include a plurality of stages **400_1**, **400_2**, **400_3**, and **400_n**. The stages **400_1**, **400_2**, **400_3**, and **400_n** may receive signals through an input signal terminal IN, an inverted input signal terminal INB, a clock terminal CLK, and a

inverted clock terminal CLKB, and may output signals through an output signal terminal OUT, and an inverted output signal OUTB. More particularly, the stages **400_1** to **400_n** may sequentially generate the emission control signals based on signals received at the input terminal IN, the inverted input signal terminal INB, the clock terminal CLK, and/or the inverted clock terminal CLKB. For example, e.g., in the first state **400_1**, a start pulse ESP and an inverted start pulse ESPB may be transmitted to the input signal terminal IN and the inverted input signal terminal INB, respectively. The second stage **400_2** through the *n*-th stage **400_n**, may receive the output signal and the inverted output signal of a previous stage at the input signal terminal IN and the inverted input signal terminal INB, respectively, thereof. For example, for the third stage **400_3**, an output signal at an output signal terminal OUT and an inverted output signal at an inverted output signal terminal OUTB of the second stage **400_2** may be transmitted to the input signal terminal IN and the inverted input signal terminal INB of the third stage **400_3**.

[0054] In some embodiments, each the respective emission control lines **E1** to **En** of the display may be coupled to a respective output terminal **O1**, **O2**, **O3**, . . . , **On** of the corresponding stage **400_1** to **400_n** of the emission control driver **400**. However, embodiments are not limited thereto. For example, while *n* stages **400_1** to **400_n** may be illustrated in the exemplary embodiment of the emission control driver **400** of FIG. 2, in some embodiments, an emission control driver may include, e.g., less than *n* stages and a plurality, e.g., two, of the emission control lines **E1** to **En** of the display may be coupled to each respective output terminal **O** of such an emission control driver. More particularly, by reducing a number of stages of the emission control driver, a size of the emission control driver may be reduced.

[0055] FIG. 3 illustrates a schematic diagram of a first exemplary embodiment of a first stage **400_1a** of the emission control driver of FIG. 2.

[0056] Referring to FIG. 3, the first stage **400_1a** may include a plurality of signal processing units, e.g., first, second, third and fourth signal processing units **411a**, **412a**, **413a**, **414a**.

[0057] The first signal processing unit **411a** may include first, second, third, and fourth transistors **M1a**, **M2a**, **M3a**, and **M4a**. A source of the first transistor **M1a** may be coupled to a first power source VDD, a drain of the first transistor **M1a** may be coupled to a source of the second transistor **M2a**, and a gate of the first transistor **M1a** may be coupled to the input signal terminal IN. The source of the second transistor **M2a** may be coupled to the drain of the first transistor **M1a**, a drain of the second transistor **M2a** may be coupled to a first node **N1a**, and a gate of the second transistor **M2a** may be coupled to the clock terminal CLK. A source of the third transistor **M3a** may be coupled to the first node **N1a**, a drain of the third transistor **M3a** may be coupled to a source of the fourth transistor **M4a**, and a gate of the third transistor **M3a** may be coupled to the clock terminal CLK. The source of the fourth transistor **M4a** may be coupled to the drain of the third transistor **M3a**, a drain of the fourth transistor **M4a** may be coupled to a second power source VSS, and a gate of the fourth transistor **M4a** may be coupled to the inverted input signal terminal INB.

[0058] The second signal processing unit **412a** may include fifth, sixth, seventh, and eighth transistors **M5a**, **M6a**, **M7a**, **M8a** and a first capacitor **C1a**. A source of the fifth transistor **M5a** may be coupled to the first power source VDD, a drain of

the fifth transistor **M5a** may be coupled to a second node **N2a**, and a gate of the fifth transistor **M5a** may be coupled to the first node **N1a**. A source of the sixth transistor **M6a** may be coupled to the second node **N2a**, a drain of the sixth transistor **M6a** may be coupled to the second power source **VSS**, and a gate of the sixth transistor **M6a** may be coupled to the input signal terminal **IN**. A source of the seventh transistor **M7a** may be coupled to the first power source **VDD**, a drain of the seventh transistor **M7a** may be coupled to the output terminal **OUT**, and a gate of the seventh transistor **M7a** may be coupled to a first node **N1**. A source of the eighth transistor **M8a** may be coupled to the drain of the seventh transistor **M7a** and the output terminal **OUT**, a drain of the eighth transistor **M8a** may be coupled to the second power source **VSS**, and a gate of the eighth transistor **M8a** may be coupled to the second node **N2a**. A first electrode of the first capacitor **C1a** may be coupled to the second node **N2** and a second electrode of the first capacitor **C1a** may be coupled to the output terminal **OUT**.

[0059] The third signal processing unit **413a** may include ninth, tenth, eleventh, and twelfth transistors **M9a**, **M10a**, **M11a**, **M12a**. A source of the ninth transistor **M9a** may be coupled to the first power source **VDD**, a drain of the ninth transistor **M9a** may be coupled to a source of the tenth transistor **M10a**, and a gate of the ninth transistor **M9a** may be coupled to the output terminal **OUT**. The source of the tenth transistor **M10a** may be coupled to the drain of the ninth transistor **M9a**, a drain of the tenth transistor **M10a** may be coupled to the first node **N1a**, and a gate of the tenth transistor **M10a** may be coupled to the inverted clock terminal **CLKB**. A source of the eleventh transistor **M11a** may be coupled to the first node **N1a**, a drain of the eleventh transistor **M11a** may be coupled to a source of the twelfth transistor **M12a**, and a gate of the eleventh transistor **M11a** may be coupled to the inverted clock terminal **CLKB**. The source of the twelfth transistor **M12a** may be coupled to the drain of the eleventh transistor **M11a**, a drain of the twelfth transistor **M12a** may be coupled to the second power source **VSS**, and a gate of the twelfth transistor **M12a** may be coupled to the inverted output terminal **OUTB**.

[0060] The fourth signal processing unit **414a** may include thirteenth, fourteenth, fifteenth, and sixteenth transistors **M13a**, **M14a**, **M15a**, **M16a** and a second capacitor **C2a**. A source of the thirteenth transistor **M13a** may be coupled to the first power source **VDD**, a drain of the thirteenth transistor **M13a** may be coupled to a third node **N3a**, and a gate of the thirteenth transistor **M13a** may be coupled to the output terminal **OUT**. A source of the fourteenth transistor **M14a** may be coupled to the third node **N3a**, a drain of the fourteenth transistor **M14a** may be coupled to the second power source **VSS**, and a gate of the fourteenth transistor **M14a** may be coupled to the first node **N1a**. A source of the fifteenth transistor **M15a** may be coupled to the first power source **VDD**, a drain of the fifteenth transistor **M15a** may be coupled to the inverted output terminal **OUTB**, and a gate of the fifteenth transistor **M15a** may be coupled to the output terminal **OUT**. A source of the sixteenth transistor **M16a** may be coupled to the inverted output terminal **OUTB**, a drain of the sixteenth transistor **M16a** may be coupled to the second power source **VSS**, and a gate of the sixteenth transistor **M16a** may be coupled to the third node **N3a**. A first electrode of the second capacitor **C2a** may be coupled to the third node **N3a** and a second electrode of the second capacitor **C2a** may be coupled to the inverted output terminal **OUTB**.

[0061] FIGS. 4A and 4B illustrate exemplary timing diagrams of signals employable for operating the exemplary first stage **400_1a** of FIG. 3. It should be understood that while the following description refers to the first stage **400_1a** of FIG. 3, embodiments are not limited thereto, and the features described below may be applied to other stages. More particularly, in the exemplary timing diagram of FIG. 4A, a pulse width of input signals is smaller than a pulse width of input signals in the exemplary embodiment of FIG. 4B. The input signals may correspond to the emission start pulse **ESP** and the inverted emission start pulse **ESPB** for the first stage **400_1a**, and, for the second through *n*th stages **400_2** to **400_n**, may correspond to the respective output signals output from the output terminal **OUT** and the inverted output terminal **OUTB** of a previous stage. Also, as a result of a system setup and hold time requirements, an input signal **In** and an inverted input signal **/In** may rise or fall prior to a clock signal **Ck** and an inverted clock signal **/Ck**.

[0062] First, referring to FIG. 4A, the stage **400_1a** may receive the input signal **In**, the inverted input signal **/In**, the clock signal **Ck**, and the inverted clock signal **/Ck** to operate. The stage **400_1a** may receive the first power source **VDD** having a high level and the second power source **VSS** having a low level as driving voltages.

[0063] During a first period **Td1**, the input signal **In** and the inverted clock signal **/Ck** at low levels and the inverted input signal **/In** and the clock signal **Ck** are at high levels. Referring to FIGS. 3 and 4A, during the first period **Td1**, with the input signal **In** and the inverted clock signal **/Ck** at low levels, and the inverted input signal **/In** and the clock signal **Ck** at high levels, the first transistor **M1a** and the sixth transistor **M6a** are turned on by the input signal **In**, the fourth transistor **M4a** is turned off by the inverted input signal **/In**, and the second transistor **M2a** and the third transistor **M3a** are turned off by the clock signal **Ck**.

[0064] When the sixth transistor **M6a** is turned on, current flows from the second node **N2a** to the second power source **VSS** and the second node **N2a** may be at a low level and the eighth transistor **M8a** may be turned on. More particularly, as the first power source **VDD** has a high level, for the second node **N2a** to be at a low level, the fifth transistor **M5a** and the seventh transistor **M7a** may be turned off, i.e., the first node **N1a** may be at a high level, to prevent a supply of a high voltage of the first power source to the second node **N2a** and the output terminal **OUT**. With the first node **N1a** at the high level, the fourteenth transistor **M14a** may also be turned off. Therefore, in the exemplary embodiment of FIGS. 3 and 4A, under such conditions during the first period **Td1**, the second node **N2a** and the output terminal **OUT** are at low levels.

[0065] If the voltage of the second node **N2a** equals the voltage of the output terminal **OUT**, the eighth transistor **M8a** may be turned off and the voltage of the output terminal **OUT** may not be further reduced, e.g., may not be sufficiently reduced. Thus, the first capacitor **C1a** may be coupled between the second node **N2a** and the output terminal **OUT** such that the voltage of the second node **N2a** may be reduced as much as the voltage of the output terminal **OUT** is reduced, and the voltage of the second node **N2a** may be less than the voltage of the output terminal **OUT**. For example, the voltage of the output terminal **OUT** may be reduced to the voltage of the second power source **VSS**.

[0066] Referring still to FIGS. 3 and 4A, during the first period **Td1**, with the output terminal **OUT** at a low level, the ninth transistor **M9a**, the thirteenth transistor **M13a**, and the

fifteenth transistor **M15a** are turned on. During the first period **Td1**, with the inverted clock signal /Ck at a low level, the tenth transistor **M10a** and the eleventh transistor **M11a** are turned on. Therefore, a voltage of the first power source **VDD** may be transmitted to the first node **N1a** through the ninth transistor **M9a** and the tenth transistor **M10a**, and the first node **N1a** is at a high level. Referring to FIG. 3, with the voltage of the first node **N1a** being transmitted to the gate of the fourteenth transistor **M14a**, the fourteenth transistor **M14a** is turned off. When the thirteenth transistor **M13a** and the fifteenth transistor **M15a** are turned on, the first power source **VDD** is transmitted to the third node **N3a** and the inverted output terminal **OUTB** so that the third node **N3a** and the inverted output terminal **OUTB** are at high levels. When the third node **N3a** is at a high level, the sixteenth transistor **M16a** is turned off. Under such conditions, the inverted output terminal **OUTB** is at a high level. When the inverted output terminal **OUTB** is at a high level, the twelfth transistor **M12a** is turned off. By turning off the twelfth transistor **M12a**, the eleventh transistor **M11a** may be prevented from being coupled to the second power source **VSS**.

[0067] Referring to FIG. 4A, during a second period **Td2**, the inverted input signal /In and the clock signal **Ck** are at low levels and the input signal **In** and the inverted clock signal /Ck are at high levels. With the input signal **In** at a high level, the first transistor **M1a** and the sixth transistor **M6a** are turned off. With the inverted input signal /In and the clock signal **Ck** at low levels, the second, third and fourth transistors **M2a**, **M3a**, **M4a** are turned on.

[0068] When the second, third and fourth transistors **M2a**, **M3a**, **M4a** are turned on, current may flow from the first node **N1a** to the second power source **VSS** so that the first node **N1a** may be at a low level. When the first node **N1a** is at a low level, the fifth transistor **M5a** and seventh transistor **M7a** are turned on so that a voltage of the first power source **VDD** is transmitted to the second node **N2a** and the output terminal **OUT**. As discussed below, with the first node **N1a** at a low level, the fourteenth transistor **M14a** is also turned on. With the input signal **In** at the high level during the second period **Td2**, the sixth transistor **M6a** is turned off and current flow from the second node **N2a** to the second power source **VSS** is blocked. With the high level at the second node **N2a**, the eighth transistor **M8a** is also turned off.

[0069] When the output terminal **OUT** is at a high level, the ninth transistor **M9a**, the thirteenth transistor **M13a**, and the fifteenth transistor **M15a** are turned off. During the second period **Td2**, with the inverted clock signal /Ck at a high level, the tenth transistor **M10a** and the eleventh transistor **M11a** are turned off. Referring to FIG. 3, the twelfth transistor **M12a** is coupled to the inverted output terminal **OUTB** and, as discussed above, with the inverted output terminal **OUTB** at a high level during the first period **Td1**, the twelfth transistor **M12a** is turned off. With the first node **N1a** at a low level, the fourteenth transistor **M14a** is turned on. When the fourteenth transistor **M14a** is turned on, current flows from the third node **N3a** to the second power source **VSS**, and the sixteenth transistor **M16a** may also be turned on. Thus, during the second period **Td2**, a voltage of the second power source **VSS** is transmitted to the inverted output terminal **OUTB**, and the inverted output terminal **OUTB** is at a low level. More particularly, a voltage between the third node **N3a** and the inverted output terminal **OUTB** is maintained by the second capacitor **C2a** coupled between the third node **N3a** and the

inverted output terminal **OUTB** so that the sixteenth transistor **M16a** is turned on during the second period.

[0070] Referring to FIG. 4A, during a third period **Td3**, the input signal **In** and the clock signal **Ck** are at high levels and the inverted input signal /In and the inverted clock signal /Ck are at low levels. With the input signal **In** at a high level, the first transistor **M1a** and the sixth transistor **M6a** are turned off. With the clock signal **Ck** at a high level, the first, second and third transistors **M1a**, **M2a**, **M3a** are turned off. With the inverted input signal /In at a low level, the fourth transistor **M4a** is turned on.

[0071] With the inverted clock signal /Ck at a low level, the tenth transistor **M10a** and the eleventh transistor **M11a** are turned on. During the third period **Td3**, with the inverted output terminal **OUTB** at a low level, the twelfth transistor **M12a** is turned on. More particularly, current may flow from the first node **N1a** coupled between the tenth transistor **M10a** and the eleventh transistor **M11a** to the second power source **VSS** through the twelfth transistor **M12a** so that the first node **N1a** is at a low level during the third period **Td3**.

[0072] When the first node **N1a** is at a low level, the fifth transistor **M5a** and the seventh transistor **M7a** are turned on. Thus, a voltage of the first power source **VDD** is transmitted to the second node **N2a** and the output terminal **OUT**, and the second node **N2a** and the output terminal **OUT** are at high levels. With the sixth transistor **M6a** turned off with the input signal **In** at a high level, current flow from the second node **N2a** to the second power source **VSS** is blocked and the second node **N2a** is at a high level. When the second node **N2a** is at a high level, the eighth transistor **M8a** is turned off so that the voltage of the output terminal **OUT** is at a high level.

[0073] With the output terminal **OUT** at a high level, the ninth transistor **M9a**, the thirteenth transistor **M13a**, and the fifteenth transistor **M15a** are turned off so that the first power source **VDD** is not transmitted to the inverted output terminal **OUTB**. Since the first node **N1a** is at a low level, the fourteenth transistor **M14a** is turned on. Therefore, the second power source **VSS** is transmitted to the third node **N3a** and the inverted output terminal **OUTB** and current may flow from the third node **N3a** to the second power source **VSS** through the fourteenth transistor **M14a**. Under such conditions, the third node **N3a** is at a low level. With the third node **N3a** at a low level, the sixteenth transistor **M16a** is turned on so that current may flow from the inverted output terminal **OUTB** to the second power source **VSS**. Under such conditions, the inverted output terminal **OUTB** is at a low level. The sixteenth transistor **M16a** may be turned off when the voltage of the inverted output terminal **OUTB** is equal to the voltage of the third node **N3a**, and the flow of current from the inverted output terminal **OUTB** to the second power source **VSS** may be blocked. As a result, the voltage of the inverted output terminal **OUTB** may not be sufficiently low. Thus, the second capacitor **C2a** may be coupled between the third node **N3a** and the inverted output terminal **OUTB**. The second capacitor **C2a** maintains a voltage between the inverted output terminal **OUTB** and the third node **N3a** so that, when the voltage of the inverted output terminal **OUTB** is reduced, a voltage at the third node **N3a** is further reduced. Under such conditions, a voltage across the gate and the source terminals of the sixteenth transistor **M16a** may be maintained such that the sixteenth transistor **M16a** is not turned off and a voltage at the inverted output terminal **OUTB** may be sufficiently reduced.

[0074] During a fourth period Td4, the input signal In and the clock signal Ck are at low levels and the inverted input signal /In and the inverted clock signal /Ck are at high levels. With the input signal In at a low level, the first and sixth transistors M1a, M6a are turned on. With the clock signal Ck at a low level, the second and third transistors M2a, M3a are turned on. With the inverted input signal /In at a high level, the fourth transistor M4 is turned off. When the first, second and third transistors M1a, M2a, M3a are turned on, a voltage of the first power source VDD is transmitted to the first node N1a so that the first node N1a is at a high level.

[0075] With the first node N1a at a high level, the fifth transistor M5a and the seventh transistor M7a are turned off. Therefore, a voltage of the first power source VDD is not transmitted to the second node N2a and the output terminal OUT. With the sixth transistor M6a turned on by the input signal In at a low level, current flows from the second node N2a to the second power source VSS so that the second node N2a is at a low level. With the second node N2a at a low level, the eighth transistor M8a is turned on so that current flows from the output terminal OUT to the second power source VSS and that the output terminal OUT is at a low level. The eighth transistor M8a may be maintained on by the first capacitor C1a.

[0076] With the output terminal OUT is at a low level, the ninth transistor M9a, the thirteenth transistor M13a, and the fifteenth transistor M15a are turned on. With the inverted clock signal /Ck at a high level, the tenth transistor M10a and the eleventh transistor M11a are turned off and the first node N1a at a high level. With the first node N1a at a high level, the fourteenth transistor M14a is turned off. In addition, the thirteenth transistor M13a and the fifteenth transistor M15a are turned on as the output terminal OUT is at a low level. With the thirteenth transistor M13a and the fifteenth transistor M15a turned on, the first power source VDD is transmitted to the third node N3a and the inverted output terminal OUTB. Therefore, the third node N3a and the inverted output terminal OUTB are at high levels. With the fourteenth transistor M14a turned off, and the third node N3a at a high level, the sixteenth transistor M16 is turned off and current flow from the third node N3 and the inverted output terminal OUTB to the second power source VSS is blocked so that the third node N3a and the inverted output terminal OUTB are at high levels.

[0077] During a fifth period Td5, the input signal In and the inverted clock signal /Ck are at low levels and the inverted input signal /In and the clock signal Ck are at high levels. With the input signal In at a low level, the first transistor M1a and the sixth transistor M6a are turned on. With the clock signal Ck at a high level, the second transistor M2a and the third transistor M3a are turned off. With the inverted input signal /In at a high level, the fourth transistor M4a is turned off. With the inverted clock signal /Ck at a low level, the tenth transistor M10a and the eleventh transistor M11a are turned on. As a result of the inverted output terminal OUTB being at a high level during the fourth period Td4, the twelfth transistor M12a is turned off. Thus, the first node N1a is floated. Therefore, the second node N2a and the output terminal OUT maintain their voltage from a previous period, e.g., the fourth period Td4. That is, the second node N2a and the output terminal OUT are at low levels. Since the second node N2a and the output terminal OUT maintain their voltage from the previous, e.g., the fourth period Td4, the inverted output terminal OUTB also maintains its voltage from the previous period, e.g., the fourth period Td4.

[0078] Referring now to FIG. 4B, another exemplary embodiment of exemplary signals that may be employed to operate the exemplary stage 400_1a of FIG. 3 will be described below. In the exemplary embodiment of FIG. 4B, the exemplary driving method includes the first period, Td1, the second period Td2, the third period Td3, a fourth period Td4', a fifth period Td5', and a sixth period Td6'. In general, only differences between the exemplary embodiment of FIG. 4A and the exemplary embodiment of FIG. 4B will be described below, e.g., a description of the first, second and third periods Td1, Td2, Td3, which correspond to the first, second and third periods Td1, Td2, Td3 illustrated in FIG. 4A will not be repeated again below.

[0079] Referring to FIG. 4B, according to the exemplary embodiment illustrated therein, during the fourth period Td4', the input signal In and the inverted clock signal /Ck are at high levels and the inverted input signal /In and the clock signal Ck are at low levels. With the input signal In at a high level, the first transistor M1a and the sixth transistor M6a are turned off. With the clock signal Ck and the inverted input signal /In at a low level, the second transistor M2a, the third transistor M3a, and the fourth transistor M4a are turned on. Therefore, current may flow from the first node N1a to the second power source VSS, and the first node N1a is at a low level. With the inverted clock signal /Ck at a high level, the tenth transistor M10a and the eleventh transistor M11a are turned off.

[0080] With the first node N1a at a low level during the fourth period Td4', the fifth transistor M5a and the seventh transistor M7a are turned on. Therefore, a voltage of the first power source VDD is transmitted to the second node N2a and the output terminal OUT. With the input signal In is at the high level during the second period Td2, the sixth transistor M6a is turned off and current flow from the second node N2a to the second power source VSS is blocked. With the high level at the second node N2a, the eighth transistor M8a is also turned off. Therefore, the output terminal OUT is in a high level.

[0081] When the output terminal OUT is at a high level, the ninth transistor M9a, the thirteenth transistor M13a, and the fifteenth transistor M15a are turned off. During the second period Td2, with the inverted clock signal /Ck at a high level, the tenth transistor M10a and the eleventh transistor M11a are turned off. Therefore, the first node N1a is in a low level. Referring to FIG. 3, the twelfth transistor M12a is coupled to the inverted output terminal OUTB and, as discussed above, with the inverted output terminal OUTB at a low level during the third period Td3, the twelfth transistor M12a is turned on. As discussed above, with the first node N1 at a low level during the fourth period Td4', the fourteenth transistor M14a is turned on. When the fourteenth transistor M14a is turned on, current flows from the third node N3a to the second power source VSS, and the sixteenth transistor M16a may also be turned on. Thus, during the fourth period Td4', a voltage of the second power source VSS is transmitted to the inverted output terminal OUTB, and the inverted output terminal OUTB is at a low level. More particularly, a voltage between the third node N3a and the inverted output terminal OUTB is maintained by the second capacitor C2a coupled between the third node N3a and the inverted output terminal OUTB so that the sixteenth transistor M16 is turned on during the fourth period Td4'.

[0082] During the fifth period Td5', the input signal In and the clock signal Ck are at high levels and the inverted input signal /In and the inverted clock signal /Ck are at low levels. With the input signal In and the clock signal Ck are at high

levels, the first, second, third and sixth transistors M1a, M2a, M3a, M6a are turned off. With the inverted input signal /In is at a low level, the fourth transistor M4a is turned on.

[0083] With the inverted clock signal /Ck at a low level, the tenth transistor M10a and the eleventh transistor M11a are turned on. With the inverted output terminal OUTB at a low level during the fourth period Td4', the twelfth transistor M12a is turned on. Therefore, current may flow from the first node N1a coupled between the tenth transistor M10a and the eleventh transistor M11a to the second power source VSS through the twelfth transistor M12a so that the first node N1a is at a low level.

[0084] When the first node N1a is at a low level, the fifth transistor M5a and the seventh transistor M7a are turned on. Therefore, a voltage of the first power source VDD is transmitted to the second node N2a and the output terminal OUT so that the second node N2a and the output terminal OUT are at high levels. At this time, since the sixth transistor M6a is turned off as a result of a high level of the input signal In, current flow from the second node N2a to the second power source VSS is blocked and the second node N2a is at a high level. When the second node N2a is at a high level, the eighth transistor M8a is turned off and a voltage of the output terminal OUT is at a high level.

[0085] With the output terminal OUT at a high level, the ninth transistor M9a, the thirteenth transistor M13a, and the fifteenth transistor M15a are turned off so that the first power source VDD is not transmitted to the inverted output terminal OUTB. With the first node N1a at a low level during the fifth period Td5', the fourteenth transistor M14a is turned on. Therefore, a voltage of the second power source VSS is transmitted to the third node N3a and the inverted output terminal OUTB so that current flows from the third node N3a to the second power source VSS through the fourteenth transistor M14a and that the third node N3a is at a low level. With the third node N3a at a low level, the sixteenth transistor M16a is turned on so that current flows from the inverted output terminal OUTB to the second power source VSS. Therefore, the inverted output terminal OUTB is at a low level during the fifth period Td5'. The sixteenth transistor M16a may be turned off when the voltage of the inverted output terminal OUTB is equal to the voltage of the third node N3a, and the flow of current from the inverted output terminal OUTB to the second power source VSS may be blocked. As a result, the voltage of the inverted output terminal OUTB may not be sufficiently low. Thus, the second capacitor C2a may be coupled between the third node N3a and the inverted output terminal OUTB. The second capacitor C2a maintains a voltage between the inverted output terminal OUTB and the third node N3a so that, when the voltage of the inverted output terminal OUTB is reduced, a voltage at the third node N3 is further reduced. Under such conditions, a voltage across the gate and the source terminals of the sixteenth transistor M16 may be maintained such that the sixteenth transistor M16a is not turned off and a voltage at the inverted output terminal OUTB may be sufficiently reduced.

[0086] During the sixth period Td6', the input signal In and the clock signal Ck are at low levels and the inverted input signal /In and the inverted clock signal /Ck are at high levels. With the input signal In at a low level, the first transistor M1a and the sixth transistor M6a are turned on. With the clock signal Ck at a low level, the second transistor M2a and the third transistor M3a are turned on. With the inverted clock signal /Ck at a high level, the tenth transistor M10a and the

eleventh transistor M11a are turned off. With the first, second and third transistors M1a, M2a, M3a turned on, the first node N1a is at a high level. Thus, the fifth, seventh, and fourteenth transistors M5a, M7a, M14a are turned off. With the sixth transistor M6a turned on, the second node N2a and the output terminal OUT are at a low level and the eighth transistor M8a is turned on. With the output terminal out at a low level, a voltage of the first power source VDD at a high level is supplied to the third node N3a and to the second terminal of the capacitor C2a via the thirteenth and fifteenth transistors M13a, M15a, respectively. Thus, the inverted output terminal OUTB is at a high level.

[0087] In embodiments, as a result of signal characteristics, timing delays, setup and hold times, etc., it is understood that other combinations of, e.g., the input signal In, the inverted input signal /In, the clock signal Ck, the inverted clock signal /Ck, the output signal at the output terminal OUT, and the inverted output signal at the inverted output terminal OUTB may result. More particularly, referring to FIG. 4B, e.g., during a portion Td5' p of the fifth period Td5', the input signal In and the inverted clock signal /Ck are at low levels, and the inverted input signal /In and the clock signal Ck are at high levels. With the input signal In at a low level, the first and sixth transistor M1a, M6a are turned on. With the clock signal Ck at a high level, the second and third transistors M2a, M3a are turned off. With the inverted clock signal /Ck at low level, the tenths and eleventh transistors M10a, M11a are turned on.

[0088] With the inverted output terminal OUTB being at a low level before the portion Td5' p, the twelfth transistor M12a may be turned on. With the tenth, eleventh and twelfth transistors M10a, M11a, M12a turned on, the first node N1a is at a low level. With the first node N1a at a low level, the fifth and seventh transistors M5a, M7a are turned on. With the fifth and seventh transistors M5a, M7a turned on, a high level voltage of the first power source VDD may be supplied to the second terminal of the capacitor C1a. More particularly, under such conditions, the fifth, sixth and seventh transistors M5a, M6a, M7a are turned on, and a path may exist between the first power source VDD and the second power source VSS. That is, when the fifth transistor M5a and the sixth transistor M6a are simultaneously turned on, the first power source VDD and the second power source VSS are coupled and current may flow.

[0089] To reduce and/or eliminate an effect of such an occurrence, although the fifth transistor M5a and the sixth transistor M6a may be simultaneously turned on, the fifth and sixth transistors M5a, M6a may be set such that a width/length ratio of the fifth transistor M5a is larger than a width/length ratio of the sixth transistor M6a. Accordingly, even if the fifth transistor M5a and the sixth transistor M6a are simultaneously turned on, the second node N2a may be at a high level. With the second node N2a at a high level, the eighth transistor M8a is turned off, and the output terminal OUT is at a high level.

[0090] Further, under such conditions, with the output terminal OUT at a high level, the thirteenth transistor M13a and the fifteenth transistor M15a are turned off. With the first node N1a at a low level, the fourteenth transistor M14a is turned on. Therefore, current flows from the third node N3a to the second power source VSS through the fourteenth transistor M14a and the third node N3a is at a low level. With the third node N3a at a low level, the sixteenth transistor M16a is turned on so that current flows from the inverted output ter-

minal OUTB to the second power source VSS through the sixteenth transistor M16a and that the inverted output terminal OUTB is at a low level.

[0091] Referring to FIGS. 4A and 4B, embodiments may enable the input signal In and the output signal at the output terminal OUT to have the same and/or substantially same waveform. More particularly, e.g., in embodiments, a pulse width of an output signal supplied to an output terminal may be obtained by multiplying a number of times when a pulse width of a corresponding input signal reaches a falling edge of a clock signal by a period of the clock signal. Thus, embodiments of an emission control driver employing one or more features described above may supply output signals including a same number of pulses as a number of pulses of a corresponding input signal. Embodiments may enable a pulse width of an output signal to be controlled based on a pulse width and a number of pulses of a corresponding input signal.

[0092] More particularly, e.g., in the exemplary embodiment of FIG. 4A, the illustrated input signal In and the corresponding output signal at the output terminal OUT correspond to a single period of the illustrated clock signal Ck. In the exemplary embodiment of FIG. 4B, the illustrated input signal In and the corresponding output signal at the output terminal OUT correspond to two periods of the illustrated clock signal Ck.

[0093] FIG. 5 illustrates a schematic diagram of a second exemplary embodiment of a first stage 400_{1b} employable by the emission control driver 400 of FIG. 2. In general, only differences between the exemplary stage 400_{1b} of FIG. 5 and the exemplary stage 400_{1a} of FIG. 3 will be described below.

[0094] Referring to FIG. 5, the stage 400_{1b} may include the first signal processing unit 411a, the second signal processing unit 412a, a third signal processing unit 413b, and the fourth signal processing unit 414a.

[0095] More particularly, the third signal processing unit 413b may substantially correspond to the third signal processing unit 413a, except with regard to a twelfth transistor M12b thereof. That is, the third signal processing unit 413b may include the ninth, tenth and eleventh transistors M9a, M10a, M11a, as described above with regard to FIG. 3, as well as the twelfth transistor M12b instead of the twelfth transistor M12a. More particularly, a source of the twelfth transistor M12b may be coupled to drain of the eleventh transistor M11a, a drain of the twelfth transistor M12b may be coupled to the second power source VSS, and a gate of the twelfth transistor M12b may be coupled to the first node N1a.

[0096] In the stage 400_{1b} having the structure illustrated in FIG. 5, the voltage of the first node N1a is equal to the voltage of the inverted output terminal OUTB. That is, e.g., when the first node N1a is at a low level, the inverted output terminal OUTB is at a low level. When the first node N1a is at a high level, the inverted output terminal OUTB is at a high level. Therefore, in operation, the exemplary stage 400_{1a} of FIG. 3 and the exemplary stage 400_{1b} of FIG. 5 may be equivalent. More particularly, while the gate of the twelfth transistor M12a of FIG. 3 is coupled to the inverted output terminal OUTB and the gate of the twelfth transistor M12b of FIG. 5 is coupled to the first node N1a, because the voltage of the inverted output terminal OUTB is equal to the voltage of the first node N1a, operations of the twelfth transistors M12a, M12b may be equivalent. That is, e.g., the above description of FIGS. 4A and 4B may also be applied to the exemplary stage 400_{1b} of FIG. 5.

[0097] FIG. 6 illustrates a schematic diagram of a third exemplary embodiment of a first stage 400_{1c} employable by the emission control driver 400 of FIG. 2. In general, only differences between the exemplary stage 400_{1c} of FIG. 6 and the exemplary stage 400_{1a} of FIG. 3 will be described below.

[0098] Referring to FIG. 6, the stage 400_{1c} may include the first signal processing unit 411a, a second signal processing unit 412c, the third signal processing unit 413a, and the fourth signal processing unit 414a.

[0099] The second signal processing unit 412c may include the fifth transistor M5a, the sixth transistor M6a, the seventh transistor M7a, the eighth transistor M8a, the first capacitor C1a, and a seventh transistor M17c. That is, relative to the exemplary stage 400_{1a} of FIG. 3, the exemplary stage 400_{1c} of FIG. 6 includes an additional transistor, e.g., M17c. Referring to FIG. 6, the gate of the eighth transistor M8a and the source of the sixth transistor M6a may be coupled via the seventeenth transistor M17c. More particularly, the seventeenth transistor M17c may be coupled between the gate of the eighth transistor M8a and the source of the sixth transistor M6a. That is, a gate of the seventeenth transistor may be coupled to the clock terminal CLK, a source of the seventeenth transistor may be coupled to the gate of the eighth transistor M8a and the second node N2a, and a drain of the seventeenth transistor M17c may be coupled to the source of the sixth transistor M6a.

[0100] As discussed above, during, e.g., the portion Td5'_p of the fifth period Td5' of FIG. 4B, the fifth transistor M5a and the sixth transistor M6a may be simultaneously turned on. Referring to FIGS. 4B and 6, by providing the seventeenth transistor M17a as in the exemplary stage 400_{1c}, the seventeenth transistor M17a receiving the clock signal Ck at a high level is turned off during the portion Td5'_p of the fifth period Td5'. Therefore, by providing the seventeenth transistor M17a, when the fifth transistor M5a, the seventh transistor M7a and the sixth transistor M6a are turned on, current cannot flow from the second node N2a to the second power source VSS, and the voltages of the second node N2a and the output terminal OUT are at high levels. Therefore, the stage 400_{1c} is not affected by a ratio of the length to width of the channels of the fifth transistor M5c and the sixth transistor M6c.

[0101] FIG. 7 illustrates a schematic diagram of a fourth exemplary embodiment of a first stage of the emission control driver 400_{1d} employable by the emission control driver 400 of FIG. 2. In general, only differences between the exemplary stage 400_{1d} of FIG. 7 and the exemplary stages 400_{1a}, 400_{1b}, and 400_{1c} of FIGS. 3, 5 and 6 will be described below.

[0102] Referring to FIG. 7, the stage 400_{1d} may include the first signal processing unit 411a of FIG. 3, the second signal processing unit 412c of FIG. 5, the third signal processing unit 413b of FIG. 6, and the fourth signal processing unit 414a of FIG. 3. A description of each of the exemplary signal processing units 411a, 412c, 413b and 414a is set forth above, and will not be repeated.

[0103] While the present invention has been described in connection with certain exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims, and equivalents thereof. For example, while all of the transistors

illustrated in the accompanying Figures are illustrated as p-type transistors, persons of ordinary skill in the art appreciate that other transistors may be employed, e.g., n-type, a combination of p-type and n-type.

[0104] Exemplary embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. Accordingly, it will be understood by those of ordinary skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims.

What is claimed is:

1. An emission control driver including a plurality of stages adapted to receive voltages from a first power source and a second power source and to generate emission control signals,

wherein each of the stages comprises:

- a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, a inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit;
- a second signal processing unit adapted to output an emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an inverse of the first output signal;
- a third signal processing unit adapted to transmit a voltage of the first power source or the second power source to the first signal processing unit based on the emission control signal, a inverted clock signal, and an inverted emission control signal when a first path, between the first power source and the first node, and a second path, between the second power source and the first node, are blocked by the clock signal, the inverted emission control signal corresponding to an inverse of the emission control signal; and
- a fourth signal processing unit adapted to output a inverted emission control signal based on the emission control signal and the first output signal.

2. The emission control driver as claimed in claim 1,

wherein the first signal processing unit includes first, second, third, and fourth transistors,

wherein a source of the first transistor is coupled to the first power source, a drain of the first transistor is coupled to a source of the second transistor, and a gate of the first transistor is coupled to an input signal terminal to which the input signal is input,

wherein a drain of the second transistor is coupled to the first node, and a gate of the second transistor is coupled to a clock terminal to which the clock signal is input,

wherein a source of the third transistor is coupled to the first node, a drain of the third transistor is coupled to a source of the fourth transistor, and a gate of the third transistor is coupled to the clock terminal, and

wherein a drain of the fourth transistor is coupled to the second power source, and a gate of the fourth transistor is coupled to a inverted input signal terminal to which the inverted input signal is input.

3. The emission control driver as claimed in claim 1,

wherein the second signal processing unit includes fifth, sixth, seventh, and eighth transistors and a first capacitor,

wherein a source of the fifth transistor is coupled to the first power source, a drain of the fifth transistor is coupled to a second node, and a gate of the fifth transistor is coupled to the first node,

wherein a source of the sixth transistor is coupled to the second node, a drain of the sixth transistor is coupled to the second power source, and a gate of the sixth transistor is coupled to an input signal terminal to which the input signal is transmitted,

wherein a source of the seventh transistor is coupled to the first power source, a drain of the seventh transistor is coupled to an output terminal from which the emission control signal is output by inverting the first output signal, and a gate of the seventh transistor is coupled to the first node,

a source of the eighth transistor is coupled to the output terminal, a drain of the eighth transistor is coupled to the second power source, and a gate of the eighth transistor is coupled to the second node, and

wherein a first electrode of the first capacitor is coupled to the second node and a second electrode of the first capacitor is coupled to the output terminal.

4. The emission control driver as claimed in claim 3, wherein the second signal processing unit further comprises a seventeenth transistor, wherein a source of the seventeenth transistor is coupled to the second node, a drain of the seventeenth transistor is coupled to the source of the sixth transistor, and a gate of the seventeenth transistor is coupled to the clock terminal.

5. The emission control driver as claimed in claim 4,

wherein the third signal processing unit includes ninth, tenth, eleventh, and twelfth transistors,

wherein a source of the ninth transistor is coupled to the first power source, a drain of the ninth transistor is coupled to a source of the tenth transistor, and a gate of the ninth transistor is coupled to an output terminal from which the emission control signal is output,

wherein a drain of the tenth transistor is coupled to a source of the eleventh transistor, and a gate of the tenth transistor is coupled to a inverted clock terminal from which the inverted clock signal is output,

wherein a drain of the eleventh transistor is coupled to a source of the twelfth transistor, and a gate of the eleventh transistor is coupled to the inverted clock terminal, and

wherein a drain of the twelfth transistor is coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the first output signal.

6. The emission control driver as claimed in claim 4,

wherein the third signal processing unit includes ninth, tenth, eleventh, and twelfth transistors,

wherein a source of the ninth transistor is coupled to the first power source, a drain of the ninth transistor is coupled to a source of the tenth transistor, and a gate of the ninth transistor is coupled to an output terminal from which the emission control signal is output,

wherein a drain of the tenth transistor is coupled to a source of the eleventh transistor, and a gate of the tenth transistor is coupled to a inverted clock terminal from which the inverted clock signal is output,

wherein a drain of the eleventh transistor is coupled to a source of the twelfth transistor, and a gate of the eleventh transistor is coupled to the inverted clock terminal, and

wherein a drain of the twelfth transistor is coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the inverted emission control signal.

7. The emission control driver as claimed in claim 3, wherein a ratio of width/length of a channel region of the fifth transistor is larger than a ratio of width/length of a channel region of the sixth transistor.

8. The emission control driver as claimed in claim 1, wherein the third signal processing unit includes ninth, tenth, eleventh, and twelfth transistors, wherein a source of the ninth transistor is coupled to the first power source, a drain of the ninth transistor is coupled to a source of the tenth transistor, and a gate of the ninth transistor is coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor is coupled to a source of the eleventh transistor, and a gate of the tenth transistor is coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor is coupled to a source of the twelfth transistor, and a gate of the eleventh transistor is coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor is coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the inverted emission control signal.

9. The emission control driver as claimed in claim 1, wherein the third signal processing unit includes ninth, tenth, eleventh, and twelfth transistors, wherein a source of the ninth transistor is coupled to the first power source, a drain of the ninth transistor is coupled to a source of the tenth transistor, and a gate of the ninth transistor is coupled to an output terminal from which the emission control signal is output, wherein a drain of the tenth transistor is coupled to a source of the eleventh transistor, and a gate of the tenth transistor is coupled to an inverted clock terminal from which the inverted clock signal is output, wherein a drain of the eleventh transistor is coupled to a source of the twelfth transistor, and a gate of the eleventh transistor is coupled to the inverted clock terminal, and wherein a drain of the twelfth transistor is coupled to the second power source, and a gate of the twelfth transistor is adapted to receive the first output signal.

10. The emission control driver as claimed in claim 1, wherein the fourth signal processing unit includes thirteenth, fourteenth, fifteenth, and sixteenth transistors, and a second capacitor, wherein a source of the thirteenth transistor is coupled to the first power source, a drain of the thirteenth transistor is coupled to a third node, and a gate of the thirteenth transistor is coupled to an output terminal from which the emission control signal is output, wherein a source of the fourteenth transistor is coupled to the third node, a drain of the fourteenth transistor is coupled to the second power source, and a gate of the fourteenth transistor is adapted to receive the first output signal, wherein a source of the fifteenth transistor is coupled to the first power source, a drain of the fifteenth transistor is coupled to an inverted output terminal from which the inverted emission control signal is output, and a gate of the fifteenth transistor is coupled to the output terminal,

wherein a source of the sixteenth transistor is coupled to the inverted output terminal, a drain of the sixteenth transistor is coupled to the second power source, and a gate of the sixteenth transistor is coupled to the third node, and wherein the second capacitor is coupled between the third node and the inverted output terminal.

11. The emission control driver as claimed in claim 1, wherein the plurality of stages include n stages, and for each of the second through n-th stages, the emission control signal output by the n-1th stage is input as the input signal for the respective stage, and the inverted emission control signal output by the n-1th stage is input as the inverted input signal for the respective stage.

12. The emission control driver as claimed in claim 1, wherein a pulse width of the emission control signal corresponds to a same number of clock cycles as a pulse width of the input signal.

13. An organic light emitting display, comprising:

- a pixel unit including a plurality of pixels arranged in a region defined by scan lines, emission control lines, and data lines;
- a scan driver adapted to transmit scan signals to the scan lines;
- an emission control driver adapted to transmit emission control signals to the emission control lines;
- a data driver adapted to transmit data signals to the data lines; and
- a controller adapted to generate control signals for controlling the scan driver, the emission control driver, and the data driver,

wherein each of the stages, includes:

- a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, an inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit;
- a second signal processing unit adapted to output the corresponding emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an inverse of the first output signal;
- a third signal processing unit adapted to selectively transmit the first power source or the second power source to the first signal processing unit based on the emission control signal, an inverted clock signal, and an inverted emission control signal when a first path, between the first power source and the first node, and a second path, between the second power source and the first node, are blocked by the clock signal, the inverted emission control signal corresponding to an inverse of the emission control signal; and
- a fourth signal processing unit adapted to output an inverted emission control signal based on the corresponding emission control signal and the first output signal.

14. The organic light emitting display as claimed in claim 13, wherein each of the emission control signals is transmitted to two of the emission control lines.

15. The organic light emitting display as claimed in claim 13, wherein each of the emission control signals is transmitted to one of the emission control lines.

16. The organic light emitting display as claimed in claim 13, wherein the controller is adapted generate the input sig-

nal, the inverted input signal, the clock signal, and the inverted clock signal to control pulse widths of the input signal and the inverted input signal.

17. The organic light emitting display as claimed in claim **13**, wherein the pulse width of the input signal corresponds to a same number of clock periods as a pulse width of the corresponding emission control signal.

18. An emission control driver including a plurality of stages receiving a first power source and a second power source and driving the first power source and the second power source to generate emission control signals,

wherein each of the stages comprises:

a first signal processing unit adapted to generate a first output signal based on an input signal, a clock signal, a inverted input signal, the first power source, and the second power source, the first output signal being supplied at a first node of the first signal processing unit;

a second signal processing unit adapted to output an emission control signal based on the first output signal and the input signal, the emission control signal corresponding to an inverse of the first output signal;

a third signal processing unit adapted to selectively control a voltage at the first node of the first signal processing unit to correspond to a voltage transmitted from the first power source or the second power source, the third sig-

nal processing unit selectively controlling the voltage at the first node based on the emission control signal, a inverted clock signal, and an inverted emission control signal, the inverted emission control signal corresponding to an inverse of the emission control signal; and

a fourth signal processing unit adapted to output a inverted emission control signal based on the emission control signal and the first output signal.

19. The emission control driver as claimed in claim **18**, wherein the first signal processing unit includes a plurality of transistors adapted to transmit the a voltage of the first power source or a voltage of the second power source to the first node based on the input signal, the clock signal and the inverted input signal, and the third signal processing unit is adapted to selectively control the voltage at the first node when the input signal, the inverted input signal and/or the clock signal prevent the transmission of the voltage of the first power source of the voltage of the second power source to the first node.

20. The emission control driver as claimed in claim **18**, wherein the first output signal corresponds to the inverted emission control signal, and the inverted emission control signal is an inverse of the emission control signal.

* * * * *

专利名称(译)	发射控制驱动器和使用其的有机发光显示器		
公开(公告)号	US20110057864A1	公开(公告)日	2011-03-10
申请号	US12/805704	申请日	2010-08-16
[标]申请(专利权)人(译)	CHUNG KYUNG HOON		
申请(专利权)人(译)	CHUNG京勋		
当前申请(专利权)人(译)	CHUNG京勋		
[标]发明人	CHUNG KYUNG HOON		
发明人	CHUNG, KYUNG-HOON		
IPC分类号	G09G3/30 H05B37/00		
CPC分类号	G09G3/2018 G09G2300/0814 G09G3/3266		
优先权	1020090084411 2009-09-08 KR		
其他公开文献	US8629816		
外部链接	Espacenet USPTO		

摘要(译)

一种发射控制驱动器，包括多个级，每个级包括适于基于输入信号在其第一节点处产生第一输出信号的第一单元，时钟信号，反相输入信号，第一和第二电源电压，a第二单元，适于基于第一输出信号和输入信号输出发射控制信号;第三单元，适于基于发射控制信号，反相时钟信号和反相将第一或第二电源发送到第一单元当第一电源和第一节点之间的第一路径和第二电源与第一节点之间的第二路径被时钟信号阻挡时的发射控制信号，以及第四单元适于基于输出反相的发射控制信号输出发射控制信号和第一输出信号。

