



US 20030209721A1

(19) **United States**(12) **Patent Application Publication**(10) **Pub. No.: US 2003/0209721 A1****Inoue**(43) **Pub. Date:****Nov. 13, 2003**

(54) **SEMICONDUCTOR DRIVER CIRCUIT,
DISPLAY DEVICE AND METHOD OF
ADJUSTING BRIGHTNESS BALANCE FOR
DISPLAY DEVICE**

(30) **Foreign Application Priority Data**

May 7, 2002 (JP) 2002-132033

Publication Classification(51) **Int. Cl.⁷** **H01L 33/00**(52) **U.S. Cl.** **257/98**(76) **Inventor:** Toshiki Inoue, Kariya-shi (JP)

Correspondence Address:

MORGAN & FINNEGAN, L.L.P.**345 Park Avenue****New York, NY 10154 (US)**(21) **Appl. No.:** 10/423,408(22) **Filed:** Apr. 25, 2003(57) **ABSTRACT**

A semiconductor driver circuit has a plurality of output bumps that are connected to respective electrodes for energizing electroluminescent devices by electric current supplied through the electrodes. The output bumps are arranged in a plurality of output bump rows. Each of the output bump rows includes a plurality of the output bumps.

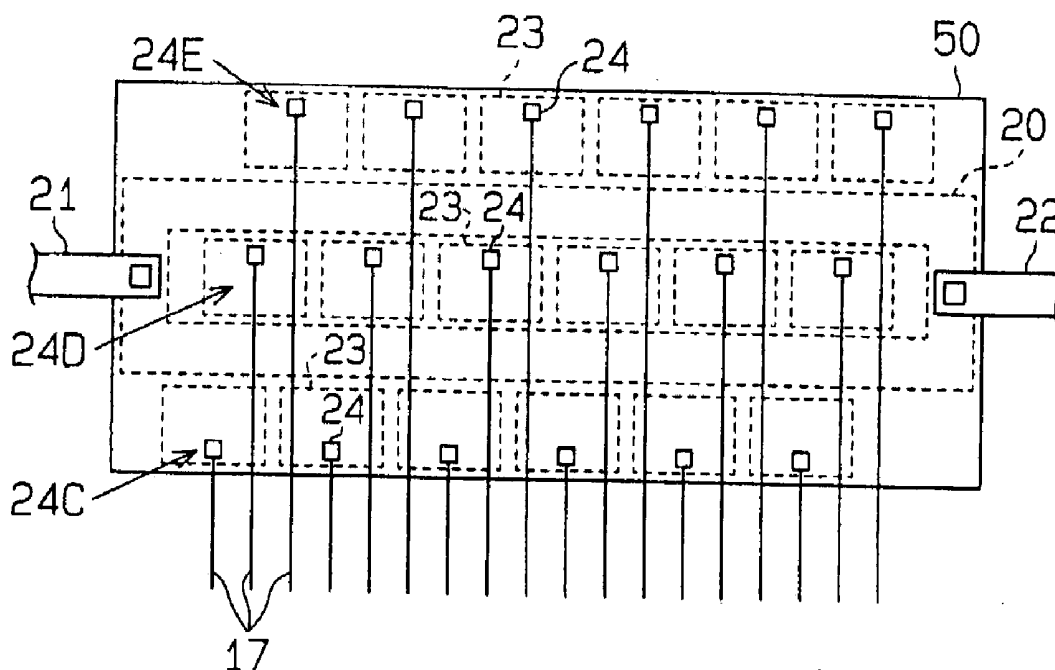


FIG. 2

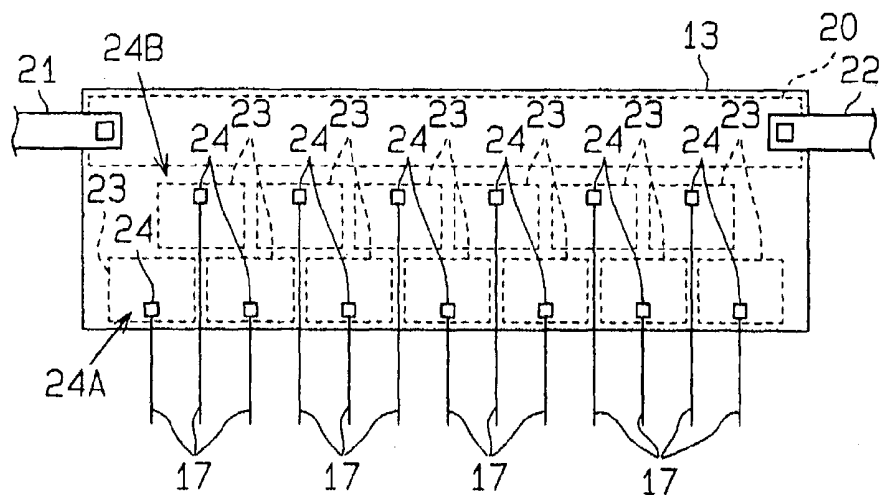


FIG. 3A

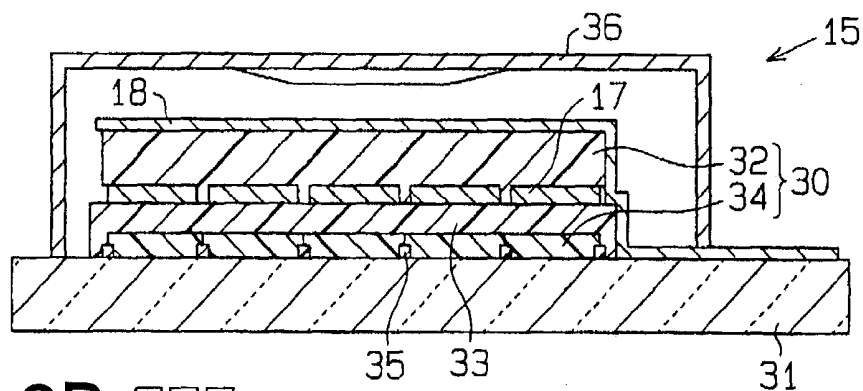


FIG. 3B




FIG. 4

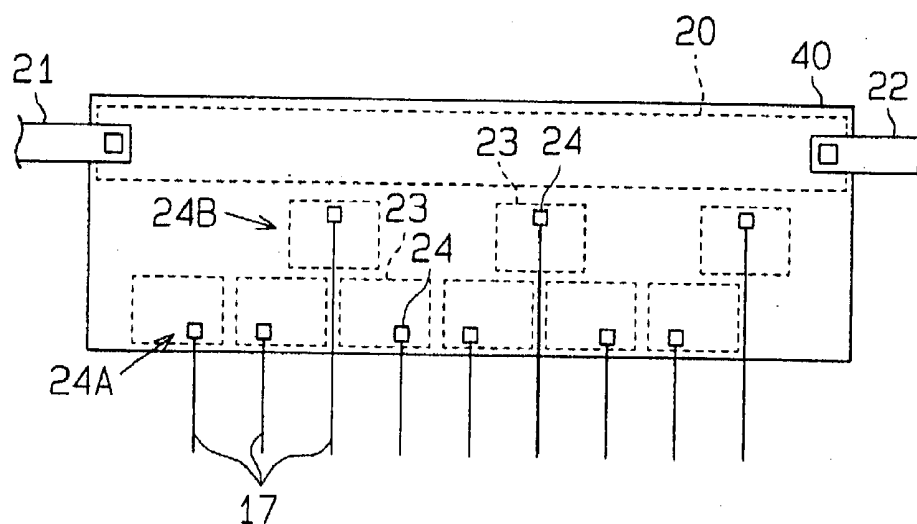


FIG. 5


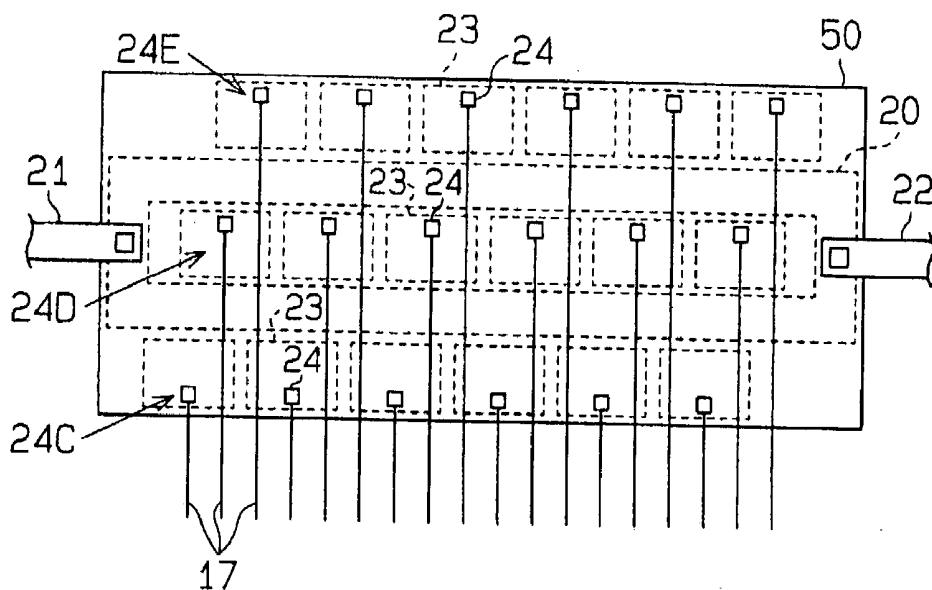


FIG. 6 (PRIOR ART)

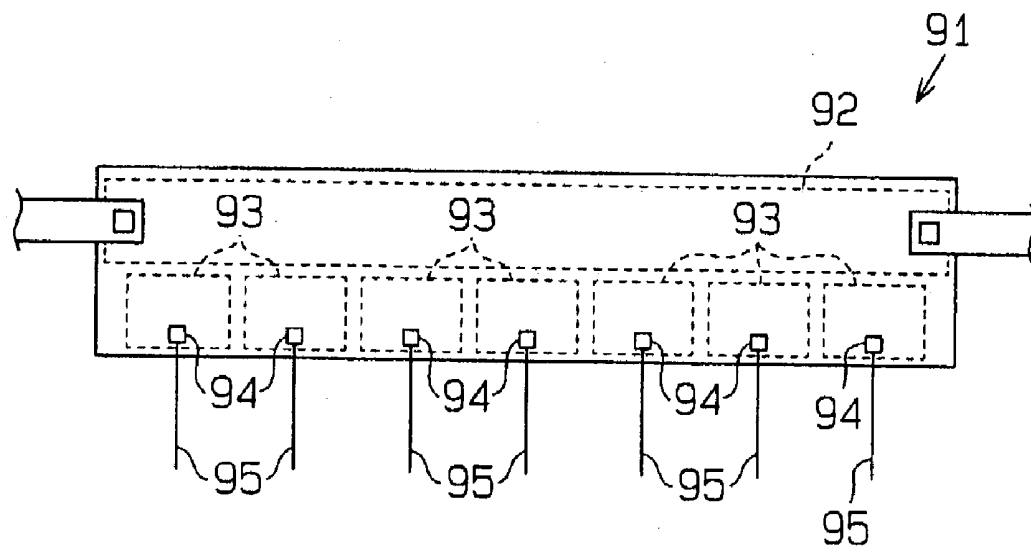

SEMICONDUCTOR DRIVER CIRCUIT, DISPLAY DEVICE AND METHOD OF ADJUSTING BRIGHTNESS BALANCE FOR DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a semiconductor driver circuit for driving an electroluminescent device through an electrode and to a display device with the semiconductor driver circuit and further to a method for adjusting brightness balance of a display element in the display device.

[0002] A display device with a display element that includes pixels made of electroluminescent devices generally has data electrodes and scanning electrodes. The word of "EL" means "electroluminescent" in the following description. The data electrodes and the scanning electrodes intersect with each other, and the EL device is connected to both the data electrodes and the scanning electrodes at each intersection. For example, the data electrodes are connected to output bumps of a semiconductor data driver circuit.

[0003] Now referring to **FIG. 6**, the diagram illustrates one of a conventional semiconductor data driver circuit **91**. The semiconductor data driver **91** includes an input circuit **92**. A plurality of constant-current driver circuits **93** is connected to the input circuit **92** through electric wirings, which are not shown in the drawing. Data electrodes **95** are made of transparent material and are located on the visible side of the EL device. The output bumps **94** are arranged in a row near the display element in the semiconductor data driver circuit **91**.

[0004] An unwanted feature is that, if an image needs to be displayed in high resolution by the display device, the number of pixels in the display element needs to be increased. As the number of pixels increases, the number of data electrodes **95** for driving the pixels also increases. Accordingly, the size of a chip is enlarged so that the cost may rise. To avoid enlarging the size of the chip, a distance between the coadjacent data electrodes **95**, that is, a distance between the coadjacent output bumps **94** needs to be shortened. However, when the output bumps **94** are arranged in a single row, the distance between the output bumps **94** cannot be shorter than the width of the constant-current driver circuit **93**. The width of the constant-current driver circuit **93** cannot be smaller due to a structure of the circuit **93**. This prevents the image from being displayed in high resolution. Therefore, there is a need for a semiconductor driver circuit and a display device that allow a distance between the electrodes to be shortened and also allow the area of a chip to be easily reduced, and in addition there is a need for adjusting brightness balance of a display element in a display device.

SUMMARY OF THE INVENTION

[0005] In accordance with the present invention, a semiconductor driver circuit has a plurality of output bumps that are connected to respective electrodes and energizes electroluminescent devices through the electrodes. The output bumps are arranged in a plurality of output bump rows. Each of the output bump rows includes a plurality of output bumps.

[0006] The present invention also provides a method for adjusting brightness balance on a display element of a

display device. The display element includes electroluminescent devices that are energized by electric current from semiconductor driver circuits through electrodes for displaying a color image. The semiconductor driver circuits include a semiconductor data driver circuit and a semiconductor scanning driver circuit. The electroluminescent devices include a luminous layer and color filters. The semiconductor driver circuits include output bumps that are connected to the respective electrodes. The method includes arranging the output bumps in a plurality of rows on at least one of the semiconductor driver circuits, and adjusting at least one of the conditions for forming the luminous layer and for forming the color filters.

[0007] Other aspects and advantages of the invention will become apparent from the following description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The features of the present invention that are believed to be novel are set forth with particularity in the appended claims. The invention together with objects and advantages thereof, may best be understood by reference to the following description of the presently preferred embodiments together with the accompanying drawings in which:

[0009] **FIG. 1** is a schematic block diagram of an organic EL color display device according to a first preferred embodiment of the present invention;

[0010] **FIG. 2** is a schematic block diagram of a data driver circuit according to the first preferred embodiment of the present invention;

[0011] **FIG. 3A** is a schematic cross-sectional view of an organic EL panel according to the first preferred embodiment of the present invention;

[0012] **FIG. 3B** is a schematic view of a pixel according to the first preferred embodiment of the present invention;

[0013] **FIG. 4** is a schematic block diagram of a data driver circuit according to a second preferred embodiment of the present invention;

[0014] **FIG. 5** is a schematic block diagram of a data driver circuit according to a third preferred embodiment of the present invention; and

[0015] **FIG. 6** is a schematic block diagram of a semiconductor data driver circuit according to a prior art.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] A first preferred embodiment of the present invention will now be described in reference to **FIGS. 1 through 3**. The present invention is applied to an organic EL display device that employs a passive matrix drive system in the first preferred embodiment.

[0017] Now referring to **FIG. 1**, the diagram illustrates a schematic block diagram of an organic EL color display device **11** according to the first preferred embodiment of the present invention. The organic EL display device **11** includes a controller **12**, a data driver circuit or a semiconductor data

driver circuit 13, a scanning driver circuit or a semiconductor device for driving scanning 14 and an organic EL panel or a display element 15.

[0018] The controller 12 of the organic EL color display device 11 is connected to an external device. Additionally, the controller 12 is connected to the data driver circuit 13 and the scanning driver circuit 14. The controller 12 outputs a display signal for displaying an image to the data driver circuit 13 and the scanning driver circuit 14 based on image data and a control signal from the external device. First electrodes or data electrodes 17 are formed on the organic EL panel 15. Second electrodes or scanning electrodes 18 are formed on the organic EL panel 15. The data driver circuit 13 is connected to the first electrodes 17. The scanning driver circuit 14 is connected to the second electrodes 18.

[0019] Now referring to FIG. 2, the diagram illustrates a schematic block diagram of the data driver circuit 13 according to the first preferred embodiment of the present invention. An input circuit 20 is provided in the data driver circuit 13. The input circuit 20 is connected to a power supply terminal 21 and a ground terminal 22. The power supply terminal 21 is connected to a power source side, which is not shown in the drawing. The ground terminal 22 is conducted to a ground side. A signal, such as image data, is sent to the input circuit 20 through input bumps and electric wirings, which are not shown in the drawing. Incidentally, these electric wirings are made of material like copper such that the resistance of the electric wirings is little affected by the length of the wirings.

[0020] A plurality of constant-current driver circuits 23 is connected to the input circuit 20 through electric wirings, which are not shown in the drawing. All of the constant-current driver circuits 23 have the same shape and the same size. Each of the constant-current driver circuits 23 includes a single output bump 24 that is connected to the first electrode 17. Namely, each of the constant-current driver circuits 23 is connected to the single electrode 17 through the respective output bump 24. The constant-current driver circuits 23 are arranged in the data driver circuit 13 in two rows. In other words, a plurality of the constant-current driver circuits 23 is arranged in each row in the lateral direction of the drawing, and the row of the constant-current driver circuits 23 is formed on the upper side and the lower side in the drawing, respectively. The constant-current driver circuits 23 in each row are positioned at regular intervals in the lateral direction of the drawing.

[0021] In the data driver circuit 13, as is the case of the constant-current driver circuit 23, a plurality of the output bumps 24 is arranged in each row in the lateral direction of the drawing, and the row of the output bumps 24 is formed on the upper side and the lower side in the drawing, respectively. In other words, the data driver circuit 13 includes a row of output bumps 24 or an output bump row 24A and a row of output bumps 24 or an output bump row 24B. The output bump row 24A is located near the organic EL panel 15. The output bump row 24B is located on the upper side relative to the output bump row 24A in the drawing. The output bump rows 24A, 24B are arranged parallel with each other. In each of the output bump rows 24A, 24B, the output bumps 24 are positioned at regular intervals in the lateral direction of the drawing. Each output

bump 24 in the output bump row 24B is located on the upper side relative to the output bumps 24 in the output bump row 24A and is positioned in the middle of the coadjacent output bumps 24 in the output bump row 24A. Therefore, the first electrodes 17 are positioned at a constant pitch in the lateral direction of the drawing and are alternately connected to the output bumps 24 in the output bump row 24A and in the output bump row 24B. Namely, the first electrode 17 next to the first electrode 17 which is connected to the output bump 24 in the output bump row 24A is connected to the output bump 24 in the output bump row 24B. The pitch of the output bumps 24 is half as large as the pitch of the constant-current driver circuits 23.

[0022] Now referring to FIG. 3A, the diagram illustrates a schematic cross-sectional view of the organic EL panel 15 according to the first preferred embodiment of the present invention. The organic EL panel 15 includes organic electroluminescent devices or organic EL devices 30 that constitute pixels of the organic EL panel 15. As described in FIG. 1, the data driver circuit 13 switches power supply to the organic EL devices 30 for emitting light. The data driver circuit 13 supplies the organic EL devices 30 with electric current that corresponds to the display signal from the constant-current driver circuits 23 through the first electrodes 17. The scanning driver circuit 14 connects the second electrodes 18 with a lower power source, such as a ground. The second electrodes 18 correspond to a display signal or a scanning signal. Thus, the organic EL devices 30 are supplied with electric current corresponding to the display signal.

[0023] Still referring to FIG. 3A, the organic EL panel 15 will now be described. The organic EL panel 15 includes a substrate 31 that is made of transparent glass. A plurality of color filters 34 is covered with an overcoat 33. A black mask 35 is interposed between the coadjacent color filters 34. The first electrodes 17, a luminous layer 32 and the second electrodes 18 are layered on the overcoat 33 in this order. The luminous layer 32 and the color filters 34 constitute the organic EL devices 30. An encapsulation cover or an encapsulation can 36 is bonded to the substrate 31 for blocking the luminous layer 32 from being exposed to air.

[0024] A plurality of the second electrodes 18 made of metal, such as aluminum, is formed on the luminous layer 32 and forms parallel striped in shape. The second electrodes 18 extend in the lateral direction of the drawing, FIG. 3A. The first electrodes 17 are provided on the lower side of the luminous layer 32 and extend in the direction perpendicular to the second electrodes 18. The first electrodes 17 are made of transparent material, such as indium tin oxide or ITO, to permit the emission of the luminous layer 32 to penetrate the first electrodes 17. The luminous layer 32 is made of organic compound and emits white light.

[0025] Now referring to FIG. 3B, the diagram illustrates a schematic view of a pixel 37 according to the first preferred embodiment of the present invention. Each of the pixels 37 includes three sub pixels 37A. The first and second electrodes 17, 18 of FIG. 3A intersect with each other, as described before, and each intersection is formed to correspond with each of the sub pixels 37A. Namely, each organic EL device 30 at the intersection corresponds to each of the sub pixels 37A. Each of the sub pixels 37A corresponds to R (red), G (green), and B (blue) in the color filters 34 of FIG.

3A. In the first preferred embodiment, the sub pixel **37A** on the left side corresponds to the R, the sub pixel **37A** on the middle corresponds to the G and the sub pixel **37A** on the right side corresponds to the B in the drawing.

[0026] Referring back to **FIG. 2**, the output bump rows **24A**, **24B** of the data driver circuit **13** are arranged parallel with the second electrodes **18**. Namely, the distance between the output bump row **24B** and the second electrodes **18** is longer than the distance between the output bump row **24A** and the second electrodes **18** at a certain distance difference. The distance difference is the distance between the output bump row **24A** and the output bump row **24B** in the upper and lower direction of **FIG. 3**. Since ITO that has a relatively high electric resistance is used for the first electrode **17** and since the organic EL devices **30** are connected to the different output bump rows **24A**, **24B**, the distance difference causes imbalanced brightness between the organic EL devices **30**.

[0027] In the organic EL color display device **11** according to the first preferred embodiment, to correct the imbalanced brightness, the outputs of the constant-current driver circuits **23** are adjusted to maintain an appropriate balance of the magnitude of electrical charge between the organic EL devices **30** connected to the output bump row **24A** and the organic EL devices **30** connected to the output bump row **24B**. The above correction is controlled by the controller **12**. In other words, the controller **12** controls the same image data in such a manner that the magnitude of voltage of the display signal sent to the constant-current driver circuit **23** on the side of the output bump row **24B** exceeds that on the side of the output bump row **24A**. The controller **12** includes means for correcting brightness balance.

[0028] The operation of the organic EL color display device **11** will now be described. Referring to **FIGS. 1 through 3B**, the controller **12** outputs the display signal to the data driver circuit **13** and the scanning driver circuit **14** based on the image data and the control signal from the external device. As the constant-current driver circuit **23** supplies the first electrode **17** with electric current based on the display signal from the controller **12**, the luminous layer **32** corresponding to the energized sub pixel **37A** emits white light at certain brightness corresponding to an electric potential difference between the first and second electrodes **17**, **18**. Then, the white light from the luminous layer **32** penetrates the color filter **34** and goes out from the side of the substrate **31**. After the white light penetrates one of the predetermined R, G or B color in the color filter **34**, the light has a corresponding color. The combination of these colors R, G, B makes a desired color or an image.

[0029] At the same time the controller or the means for correcting the brightness balance **12** corrects the imbalanced brightness among the organic EL devices **30** due to the difference of the output bump row (**24A** or **24B**) to which the organic EL devices **30** are connected. As a result, the image is satisfactory displayed.

[0030] According to the first preferred embodiment, the following advantageous effects are obtained.

[0031] (1) In the data driver circuit **13**, the output bumps **24** are arranged in a plurality of the output bump rows **24A**, **24B**. In comparison to a data driver circuit that provides a single row of output bumps, a distance between the elec-

trodes that are connected to the output bumps is reduced so that the image is displayed in high resolution by the organic EL devices in the first preferred embodiment.

[0032] (2) The means for correcting the brightness balance is provided for correcting the imbalanced brightness among the organic EL devices **30** due to the difference of the output bump row (**24A** or **24B**) to which the organic EL devices **30** are connected. Accordingly, the imbalanced brightness among the organic EL devices **30** of the organic EL panel **15** is corrected even if a plurality of the output bump rows **24A**, **24B** is formed.

[0033] (3) A plurality of the output bump rows **24A**, **24B** each includes a plurality of the output bumps **24** that are positioned in line. In addition, the output bump rows **24A**, **24B** are arranged parallel with each other. Accordingly, both the output bump rows **24A**, **24B** are arranged parallel with the second electrodes **18** so that the distances between the output bump rows **24A**, **24B** and the second electrodes **18** are respectively constant along a direction in which the second electrodes **18** extend. Namely, the distance difference between the output bump row **24A** and the output bump row **24B** is constant along the direction in which the second electrodes **18** extend. As a result, the controller or the means for correcting the brightness balance **12** easily corrects the imbalanced brightness between the organic EL devices **30** due to the distance difference between the output bump rows **24A**, **24B**.

[0034] (4) The two output bump rows **24A**, **24B** are arranged parallel with each other. For example, in a data driver circuit that provides a plurality of data bump rows, the size of the data driver circuit is reduced in the direction in which the output bump rows are arranged.

[0035] (b 5) The first electrodes **17** are made of transparent material, such as ITO. Since the transparent material, such as ITO, has a property of relatively high electric resistance, the imbalanced brightness among the organic EL devices **30** due to the difference of the output bump row (**24A** or **24B**) to which the organic EL devices **30** are connected. Namely, the present invention is applied to the organic EL color display device **11** that includes the first electrodes **17** made of transparent material, such as ITO, so that it is appropriate for displaying the satisfactory image.

[0036] A second preferred embodiment of the present invention will now be described in reference to **FIG. 4**. The structure of the means for correcting the brightness balance in the first preferred embodiment is modified in the second preferred embodiment. The other components are substantially identical to those in the first preferred embodiment. The same reference numerals denote the substantially identical components to those in the first preferred embodiment, and the description is omitted.

[0037] Now referring to **FIG. 4**, the diagram illustrates a schematic block diagram of a data driver circuit **40** according to the second preferred embodiment of the present invention. The data driver circuit **13** in the first preferred embodiment is replaced by the data driver circuit **40**. The data driver circuit **40** includes the input circuit **20**, the power supply terminal **21** and the ground terminal **22**.

[0038] The constant-current driver circuits **23** are connected to the input circuit **20** through the electric wirings, which are not shown in the drawing. The constant-current

driver circuits **23** are arranged in two rows. Meanwhile, the color filters **34** include the R, G and B as described in FIG. **3A**. One of the rows includes a plurality of the constant-current driver circuits **23** that correspond to one of the R or G in the color filters **34**, and the other includes a plurality of the constant-current driver circuits **23** that correspond to the B in the color filters **34**. Namely, the output bumps **24** are arranged to form the output bump row **24A** and the output bump row **24B**. The output bump row **24A** includes a plurality of the output bumps **24** corresponding to the R or G. The output bump row **24B** includes a plurality of the output bumps **24** corresponding to the B. Accordingly, in the second preferred embodiment, the output bumps **24** corresponding to the B are located farther from the second electrode **18** than the output bumps **24** corresponding to the R or G. Incidentally, the first electrodes **17** connected to the output bumps **24** periodically correspond to the R, G, B in this order from the left side to the right side of the drawing.

[0039] In the second preferred embodiment, the controller **12** does not correct the imbalanced brightness, which is different from the controller **12** in the first preferred embodiment. Since the output bumps **24** corresponding to the B are located farther from the second electrodes **18** than the output bumps **24** corresponding to the R or G, the portion of luminous layer **32** corresponding to the B is lower in brightness than that corresponding to the R and G. Then, in the second preferred embodiment, the imbalanced brightness among the organic EL devices **30** is corrected by adjusting the color depth of the color filter **34**. In other words, the color depth of the B in the color filter **34** is lighter than that of the R and G. Incidentally, instead of adjusting the color depth of the color filter **34** itself, the color filters **34** corresponding to the B may be formed relatively thin, or the color filters **34** may include different materials for adjusting light transmittance. In the second preferred embodiment, the color filters **34** function as the means for correcting the brightness balance.

[0040] According to the second preferred embodiment, in addition to the advantageous effects mentioned in the paragraphs (1) through (5) in the first preferred embodiment, the following advantageous effects are obtained.

[0041] (6) The output bumps **24** corresponding to the respective colors of R, G, B in the organic EL devices **30** are respectively arranged in the same output bump rows **24A** and **24B**. That is, the output bumps **24** corresponding to the colors of R and G are arranged in the output bump row **24A**, and the output bumps **24** corresponding to the color of B are arranged in the output bump row **24B**. Accordingly, a distance between the output bumps **24** and the second electrodes **18** becomes constant for every color. Namely, the imbalanced brightness among the organic EL devices **30** in the organic EL panel **15** is optionally corrected by independently correcting the brightness of each color. Therefore, the structure of the means for correcting the brightness balance may be simple.

[0042] (7) The imbalanced brightness among the organic EL devices **30** is corrected by adjusting the conditions for forming the color filter **34**, that is, the color depth of the color filter **34** itself, the thickness of the color filter **34** or changing the light transmittance by using different materials. Accordingly, for example, in comparison to a structure that corrects the brightness balance by adjusting electric current

supplied to the organic EL devices **30**, a control circuit for adjusting the supplied current is not required so that complicated control is not required in the second preferred embodiment.

[0043] A third preferred embodiment of the present invention will now be described in reference to FIG. **5**. The structure of the data driver circuit and the like in the second preferred embodiment are modified in the third preferred embodiment. The other components are substantially identical to those in the second preferred embodiment. The same reference numerals denote the substantially identical components to those in the second preferred embodiment, and the description is omitted.

[0044] Now referring to FIG. **5**, the diagram illustrates a schematic block diagram of a data driver circuit **50** according to the third preferred embodiment of the present invention. The data driver circuit **40** in the second preferred embodiment is replaced by the data driver circuit **50** in the third preferred embodiment. The data driver circuit **50** includes the input circuit **20**, the power supply terminal **21** and the ground terminal **22**, as well as the data driver circuit **40**.

[0045] In the third preferred embodiment, the constant-current driver circuits **23** are connected to the input circuit **20** through the electric wiring, which is not shown in the drawing. The constant-current driver circuits **23** form three rows of a plurality of the constant-current driver circuits **23**, and each of the rows corresponds to the color of R, G or B of the color filter **34**. Namely, the output bumps **24** are arranged in the three rows, that is, an output bump row **24C**, an output bump row **24D** and an output bump row **24E**. The output bump row **24C** includes a plurality of the output bumps **24** corresponding to the R. The output bump row **24D** includes a plurality of the output bumps corresponding to the G. The output bump row **24E** includes a plurality of the output bumps corresponding to the B.

[0046] In the data driver circuit **50**, the output bump rows **24C**, **24D**, **24E** are arranged in this order from the side of the organic EL panel **15** toward the upper side of the drawing. Each of the output bump rows **24C**, **24D**, **24E** is arranged parallel with the second electrodes **18** of FIG. **1**. Accordingly, in the third preferred embodiment, the output bumps **24** corresponding to the G is located farther from the second electrode **18** than the output bumps **24** corresponding to the R. The output bumps **24** corresponding to the B are located much farther from the second electrode **18** than the output bumps **24** corresponding to the G. Incidentally, the first electrodes **17** connected to the respective output bumps **24** periodically correspond to the R, G, B from the left side to the right side of the drawing.

[0047] In the third preferred embodiment, as well as the second preferred embodiment, the imbalanced brightness among the organic EL devices **30** is corrected by adjusting the color depth of the color filter **34**. In other words, the depth of the color of the G is lighter than that of the R in the color filter **34**. The color depth of the B is much lighter than that of the G in the color filter **34**. Incidentally, as well as the second preferred embodiment, other than adjusting the color depth of the color filter **34** itself, the thickness of color filter **34** may be determined for every color or the color filters **34** may include different materials for adjusting light transmittance.

[0048] According to the third preferred embodiment, in addition to the paragraphs (1) through (3) and (5) through (7) mentioned in the above first and second preferred embodiments, the following advantageous effect is obtained.

[0049] (8) The output bump rows **24C**, **24D**, **24E** are arranged in three rows. Accordingly, for example, in comparison to a data driver circuit that includes two output bump rows, the distance between the two coadjacent first electrodes **17** is further shortened.

[0050] The present invention is not limited to the embodiments described above but may be modified into the following alternative embodiments.

[0051] In alternative embodiments to the above second and third preferred embodiments, instead of correcting the imbalanced brightness by adjusting the conditions for forming the color filter **34**, the imbalanced brightness is corrected by adjusting the conditions for forming the luminous layer **32**. In this state, as for the adjustment for forming the luminous layer **32**, for example, the amount of dopant in the luminous layer **32** is adjusted for relatively increasing the color B (blue) component in the emitted light in the second preferred embodiment. In addition, for example, the amount of dopant in the luminous layer **32** is adjusted for relatively increasing the color G (green) component and the color B (blue) component in the emitted light in the third preferred embodiment.

[0052] In alternative embodiments to the above first preferred embodiment, instead of correcting the imbalanced brightness in such a manner that the controller **12** controls the constant-current driver circuit **23**, the imbalanced brightness is corrected by adjusting the conditions for forming the color filter **34** or the luminous layer **32**.

[0053] In alternative embodiments to the above second and third preferred embodiments, instead of correcting the imbalanced brightness by adjusting the conditions for forming the color filter **34**, the imbalanced brightness is corrected in such a manner that the controller **12** controls the constant-current driver circuit **23**.

[0054] In alternative embodiments to the above preferred embodiments, the control by the controller **12** includes pulse width modulation (PWM) control and PHM control.

[0055] In alternative embodiments to the above preferred embodiments, the constant-current driver circuit **23** is replaced by a constant-voltage drive circuit.

[0056] In alternative embodiments to the above preferred embodiments, the imbalanced brightness is not corrected. Also, the means for correcting the brightness balance is omitted.

[0057] In alternative embodiments to the above preferred embodiments, instead of the color filters **34** that are constituted of the color R, G, B or three primary colors of light, the color filters **34** are constituted of three colors other than the above three primary colors.

[0058] In alternative embodiments to the above preferred embodiments, the color filters **34** are not limited to be constituted of three colors. For example, the color filter **34** may be constituted of two colors or four colors.

[0059] In alternative embodiments to the above preferred embodiments, the organic EL panel **15** is used for monochrome display.

[0060] In alternative embodiments to the above preferred embodiments, the luminous layer **32** is not limited to a white luminous layer. A luminous layer having a single emission spectrum, such as a blue luminous layer, is applicable. In this state, a color conversion filter or a color filter is employed for converting the wavelength of the emission spectrum of the luminous layer **32** to that of the spectrum of red or green.

[0061] In alternative embodiments to the above preferred embodiments, the luminous layer **32** is a multi-color luminous layer for optionally changing display color without any color filter. In this state, for example, the portions of luminous layer **32** corresponding to the sub pixels **37A** respectively emit the light of R (red), G (green), B (blue). Incidentally, luminescent colors corresponding to the sub pixels **37A** of luminous layer **32** are not limited to the R, G and B and are not limited to three colors. Namely, the number of sub pixels **37A** constituting the pixel **37** is not limited to three.

[0062] In alternative embodiments to the above preferred embodiments, an inorganic EL device is used instead of the organic EL device.

[0063] In alternative embodiments to the above preferred embodiments, the second electrode **18** is not limited to be made of transparent material.

[0064] In alternative embodiments to the above preferred embodiments, instead of the organic EL panel **15** that emits light from the side of the substrate **31**, an organic EL panel that emits light from the side of an encapsulation cover. In this state, the organic EL panel includes a transparent encapsulation cover and a color filter that is interposed between the encapsulation cover and a luminous layer. Additionally, an electrode between the encapsulation cover and the luminous layer is transparent.

[0065] In alternative embodiments to the above preferred embodiments, the output bump rows **24A**, **24B**, **24C**, **24D**, **24E** are not limited to be arranged parallel with each other.

[0066] In alternative embodiments to the above preferred embodiments, in each of the output bump rows **24A**, **24B**, **24C**, **24D**, **24E**, the output bumps **24** are not limited to be positioned in-line.

[0067] In alternative embodiments to the above preferred embodiments, the data driver circuit includes four or above number of output bump rows.

[0068] In alternative embodiments to the above preferred embodiments, the output bumps **24** corresponding to the respective colors, such as the R, G, B, of the organic EL device are not limited to be arranged in the same output bump rows **24A**, **24B**, **24C**, **24D**, **24E**.

[0069] In alternative embodiments to the above preferred embodiments, instead of the driving semiconductor device that is embodied as the data driver circuit **13** connected to the first electrode **17**, the driving semiconductor device is embodied as the scanning driver circuit **14** connected to the second electrode **18**.

[0070] Therefore, the present examples and embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein but may be modified within the scope of the appended claims.

What is claimed is:

1. A semiconductor driver circuit for energizing an electroluminescent device through electrodes, comprising:

a plurality of output bumps connected to the respective electrodes, the output bumps being arranged in a plurality of output bump rows, each of the output bump rows including a plurality of the output bumps.

2. The semiconductor driver circuit according to claim 1, wherein the output bumps are positioned in line in the respective output bump rows, a plurality of the output bump rows being arranged parallel with each other.

3. The semiconductor driver circuit according to claim 2, wherein the electroluminescent device is used for a color display, the output bumps corresponding to respective colors of the electroluminescent device being arranged in the same output bump row.

4. The semiconductor driver circuit according to claim 1, wherein the number of output bump rows is two.

5. The semiconductor driver circuit according to claim 1, wherein the number of output bump rows is three.

6. The semiconductor driver circuit according to claim 1, wherein the output bumps are positioned at regular intervals.

7. The semiconductor driver circuit according to claim 1, wherein the electroluminescent device is an organic electroluminescent device.

8. A display device comprising:

a semiconductor data driver circuit including output bumps;

a semiconductor scanning driver circuit including output bumps, the output bumps forming a plurality of output bump rows in at least one of the semiconductor driver circuits, each of the output bump rows including a plurality of the output bumps that are positioned in line;

a data electrode connected to the output bump of the semiconductor data driver circuit;

a scanning electrode connected to the output bump of the semiconductor scanning driver circuit, the scanning electrode intersecting with the data electrode; and

a display element including electroluminescent devices that have a luminous layer, the electroluminescent devices being connected at a portion where the data and scanning electrodes intersect with each other.

9. The display device according to claim 8, wherein the display element is used for a color display, the output bumps corresponding to the respective colors of the electroluminescent devices being arranged in the same output bump row in one of the semiconductor driver circuits that includes a plurality of the output bump rows, the output bump rows being arranged parallel with one of the data and scanning electrodes that is connected to the other of the semiconductor driver circuits.

10. The display device according to claim 8, further comprising:

means for correcting brightness balance, the means correcting imbalanced brightness among the electroluminescent devices that are connected to the different output bump rows.

11. The display device according to claim 10, wherein the data electrode is made of transparent material.

12. The display device according to claim 11, wherein the transparent material includes indium tin oxide.

13. The display device according to claim 8, further comprising:

a controller connected to at least one of the semiconductor driver circuits that includes a plurality of the output bump rows for correcting imbalanced brightness among the electroluminescent devices that are connected to the different output bump rows.

14. The display device according to claim 8, wherein the electroluminescent device further includes a color filter, the color filter correcting imbalanced brightness among the electroluminescent devices that are connected to the different output bump rows.

15. A method for adjusting brightness balance on a display element of a display device, the display element including electroluminescent devices that are energized by electric current supplied from semiconductor driver circuits through electrodes for displaying a color image, the semiconductor driver circuits including a semiconductor data driver circuit and a semiconductor scanning driver circuit, the electroluminescent devices including a luminous layer and color filters, the semiconductor driver circuits including output bumps that are connected to the respective electrodes, the method comprising the steps of:

arranging the output bumps in a plurality of rows on at least one of the semiconductor driver circuits; and

adjusting at least one of the conditions for forming the luminous layer and for forming the color filters.

16. The method for adjusting the brightness balance according to claim 15, wherein the adjusting step includes adjusting the color depth of the color filters.

17. The method for adjusting the brightness balance according to claim 15, wherein the adjusting step includes adjusting the thickness of the color filters.

18. The method for adjusting the brightness balance according to claim 15, wherein the adjusting step includes adjusting the amount of dopant in the luminous layer.

19. The method for adjusting the brightness balance according to claim 15, wherein the arranging step includes arranging the output bumps corresponding to the same color of the color filters in the same row.

* * * * *

专利名称(译)	半导体驱动电路，显示装置和调整显示装置的亮度平衡的方法		
公开(公告)号	US20030209721A1	公开(公告)日	2003-11-13
申请号	US10/423408	申请日	2003-04-25
[标]申请(专利权)人(译)	井上俊树		
申请(专利权)人(译)	井上俊树		
当前申请(专利权)人(译)	井上俊树		
[标]发明人	INOUE TOSHIKI		
发明人	INOUE, TOSHIKI		
IPC分类号	H05B33/12 G09F9/00 G09F9/30 G09G3/20 G09G3/30 G09G3/32 H01L27/32 H01L51/50 H01L33/00		
CPC分类号	G09G3/3266 G09G3/3275 G09G2320/0242 G09G2320/0233 G09G2300/0426		
优先权	2002132033 2002-05-07 JP		
其他公开文献	US7187008		
外部链接	Espacenet USPTO		

摘要(译)

半导体驱动电路具有多个输出凸块，这些输出凸块连接到相应的电极，用于通过电极提供的电流激励电致发光器件。输出凸块布置在多个输出凸块行中。每个输出凸块行包括多个输出凸块。

