



US 20040217697A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0217697 A1****Lee et al.**(43) **Pub. Date:****Nov. 4, 2004**(54) **HIGH EFFICIENCY ORGANIC
ELECTROLUMINESCENT DISPLAY AND
METHOD FOR FABRICATING THE SAME****Publication Classification**(51) **Int. Cl.⁷** **H05B 33/00; H05B 33/10**(52) **U.S. Cl.** **313/504; 313/506; 445/24**(76) **Inventors:** **Kwan-Hee Lee**, Seoul (KR);
Seung-Yoon Ryu, Seoul (KR);
Hun-Jung Lee, Anyang-si (KR);
Sang-Il Park, Seoul (KR); **Jae-Bon**
Koo, Yongin-si (KR)(57) **ABSTRACT**

An organic electroluminescent display comprises: anode electrodes of R, G and B unit pixels formed separate from each other on a substrate; organic thin-film layers of the R, G and B unit pixels formed on the anode electrodes; and a cathode electrode formed over an entire surface of the substrate. The anode electrode of at least one unit pixel, among the R, G and B unit pixels, has a thickness different from anode electrodes of the other unit pixels. The anode electrode of each of the unit pixels comprises a first film having a high reflectivity and a second film for adjusting a work function. The second film of at least one unit pixel, among the unit pixels, has a thickness different from the second films of the other unit pixels. The second film of the R unit pixel is thicker than the second films of the other unit pixels.

Correspondence Address:

Robert E. Bushnell**Suite 300****1522 K Street, N.W.****Washington, DC 20005-1202 (US)**(21) **Appl. No.:** **10/771,091**(22) **Filed:** **Feb. 4, 2004**(30) **Foreign Application Priority Data**

May 1, 2003 (KR) 10-2003-28076

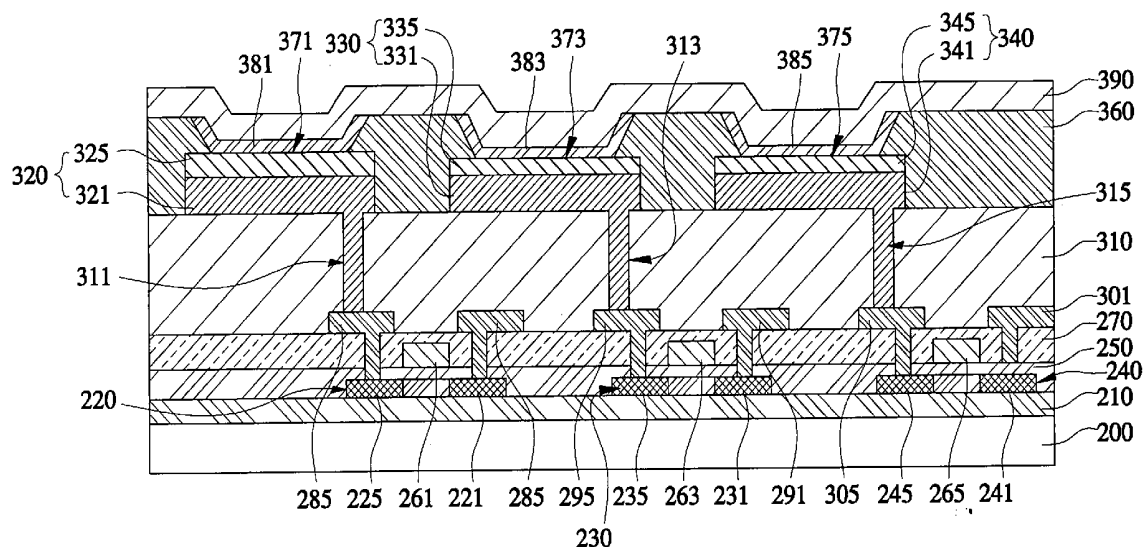


FIG. 1
(PRIOR ART)

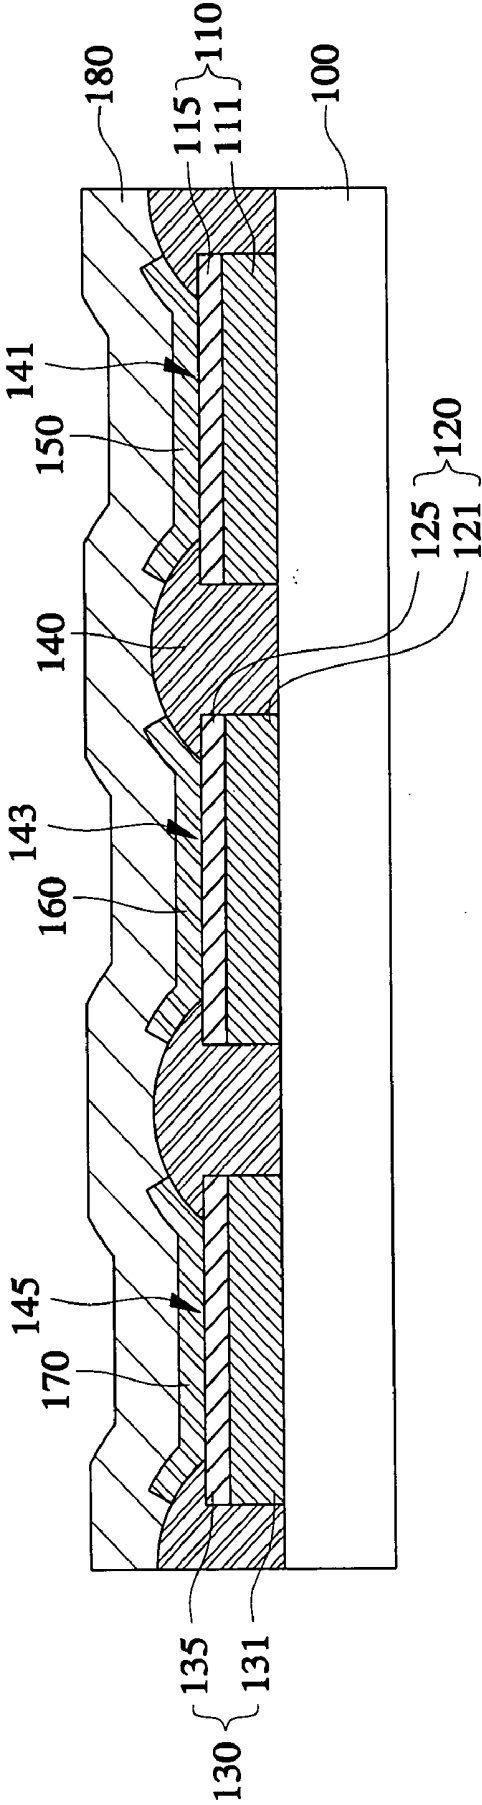


FIG. 2

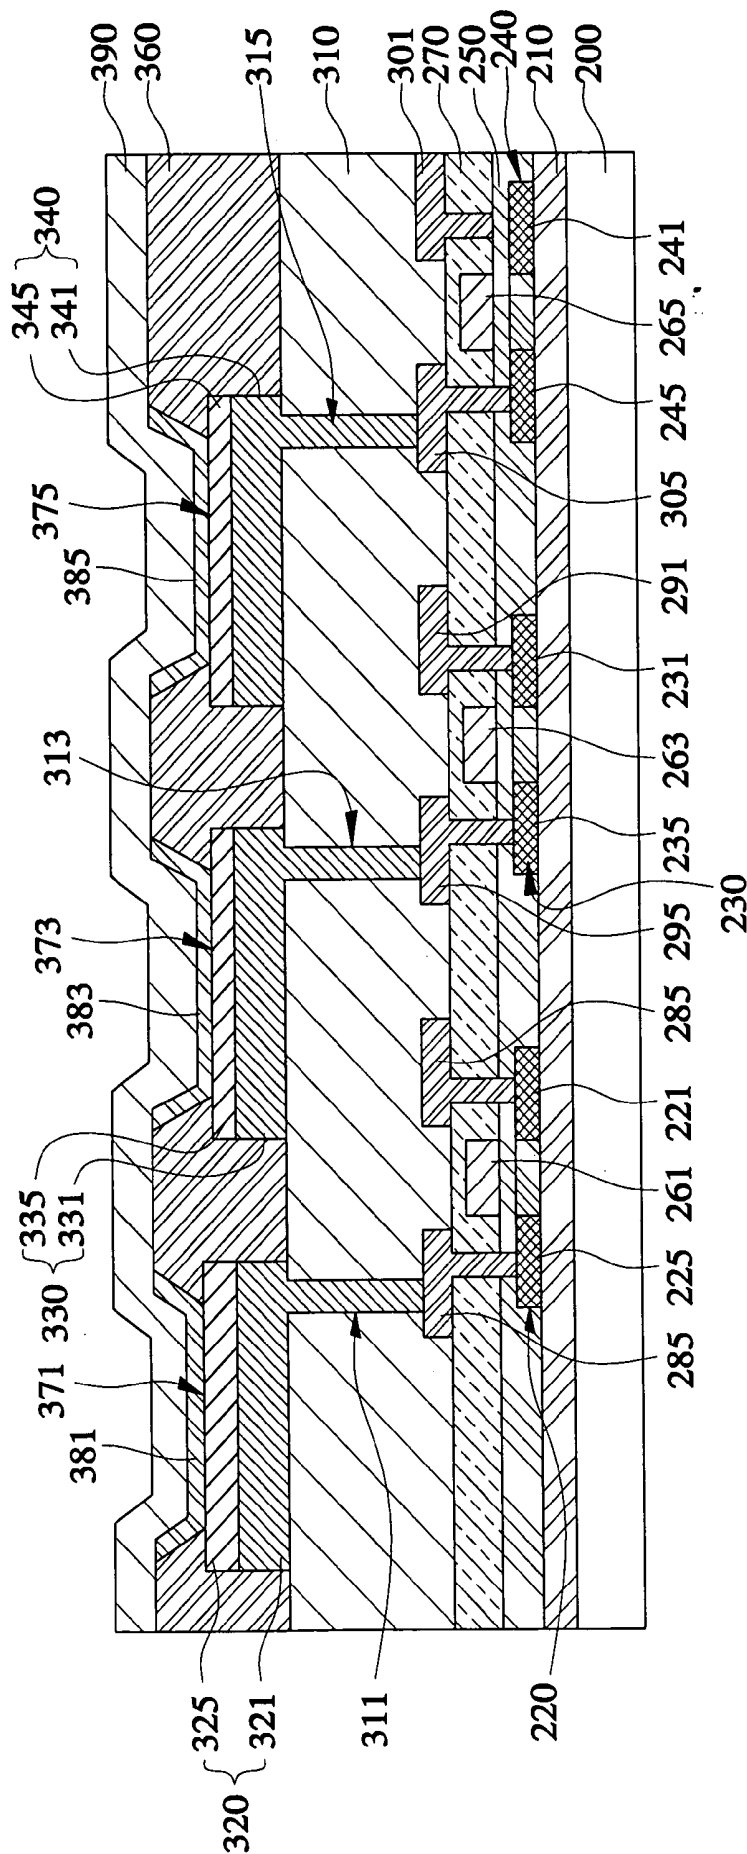


FIG. 3A

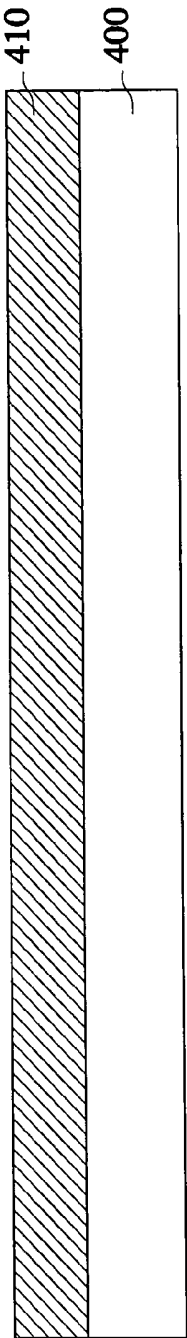


FIG. 3B

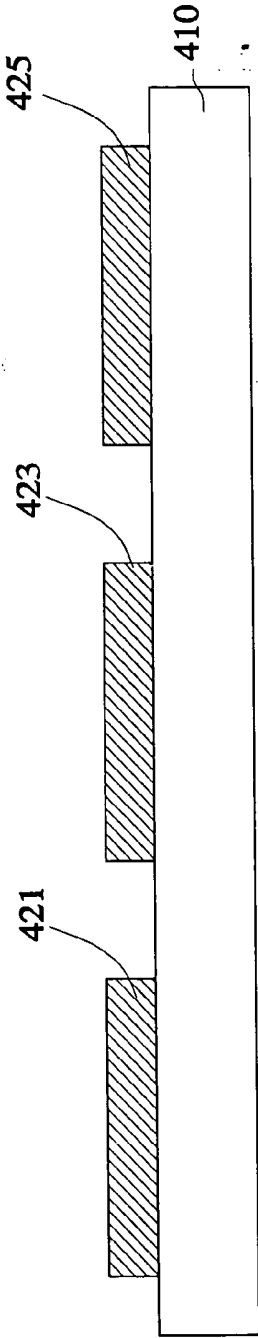


FIG. 3C

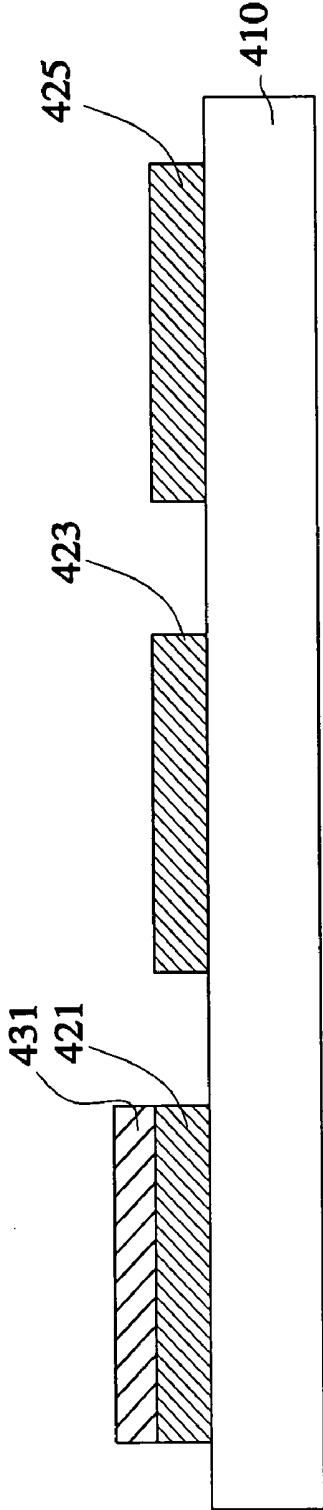


FIG. 3D

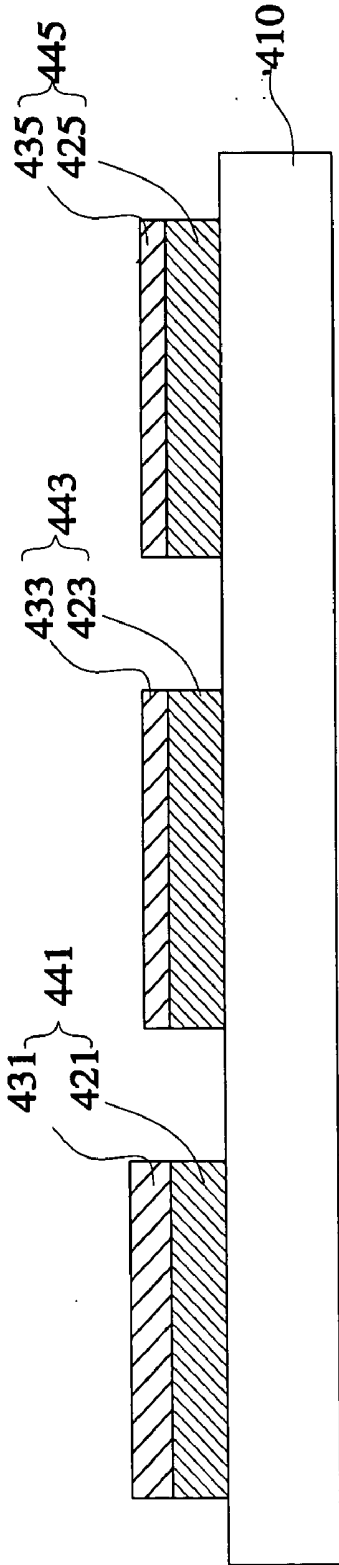


FIG. 3E

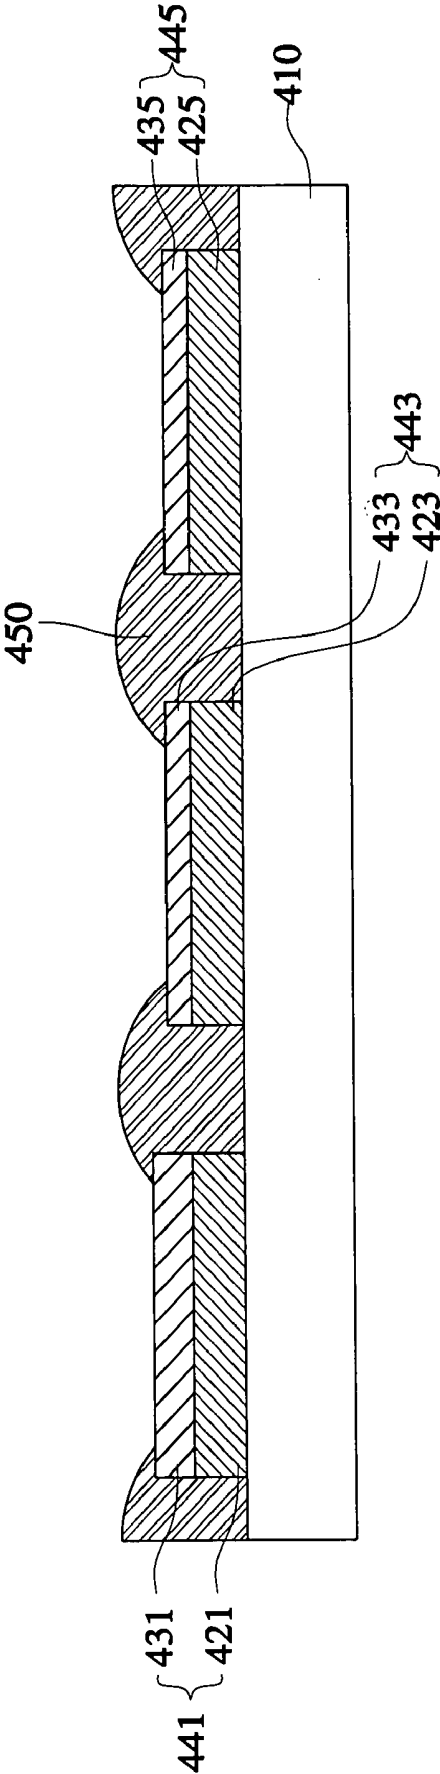


FIG. 4A

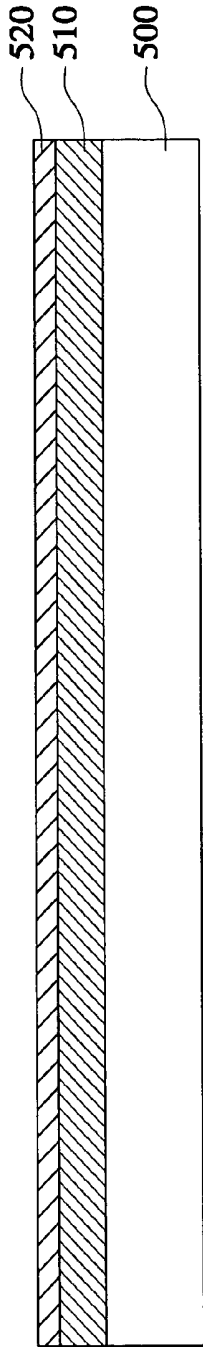


FIG. 4B

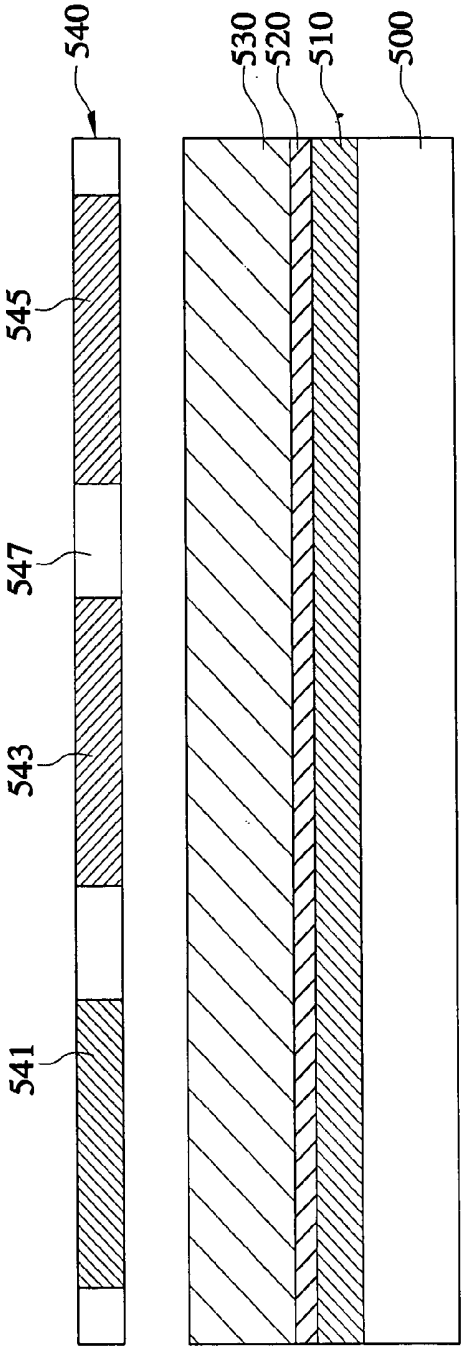


FIG. 4C

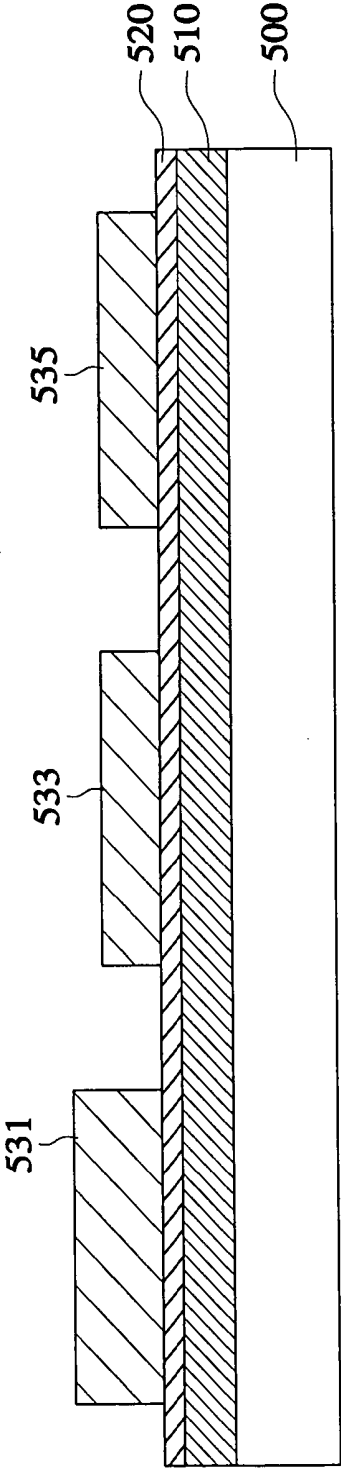


FIG. 4D

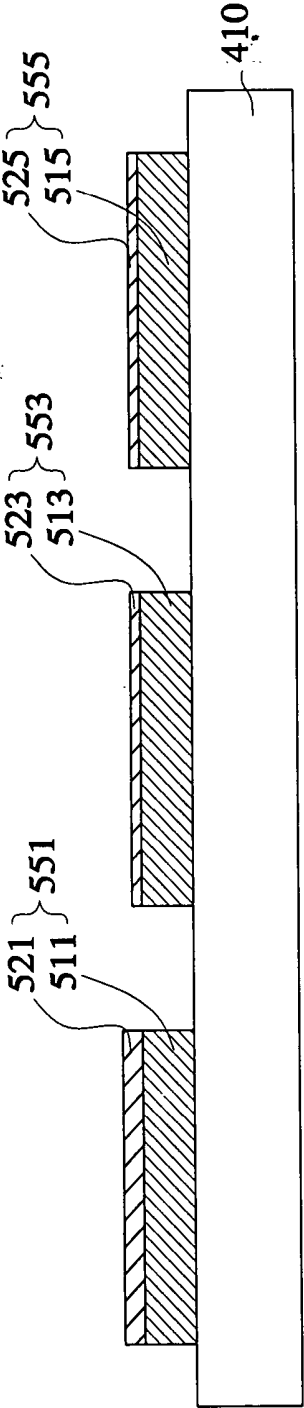


FIG. 5A

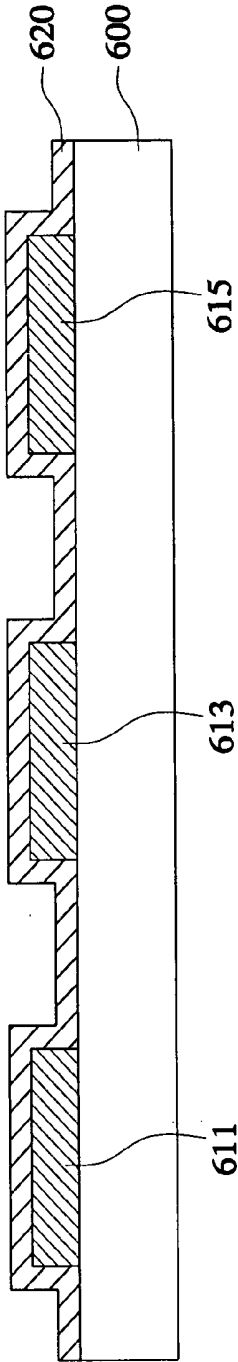


FIG. 5B

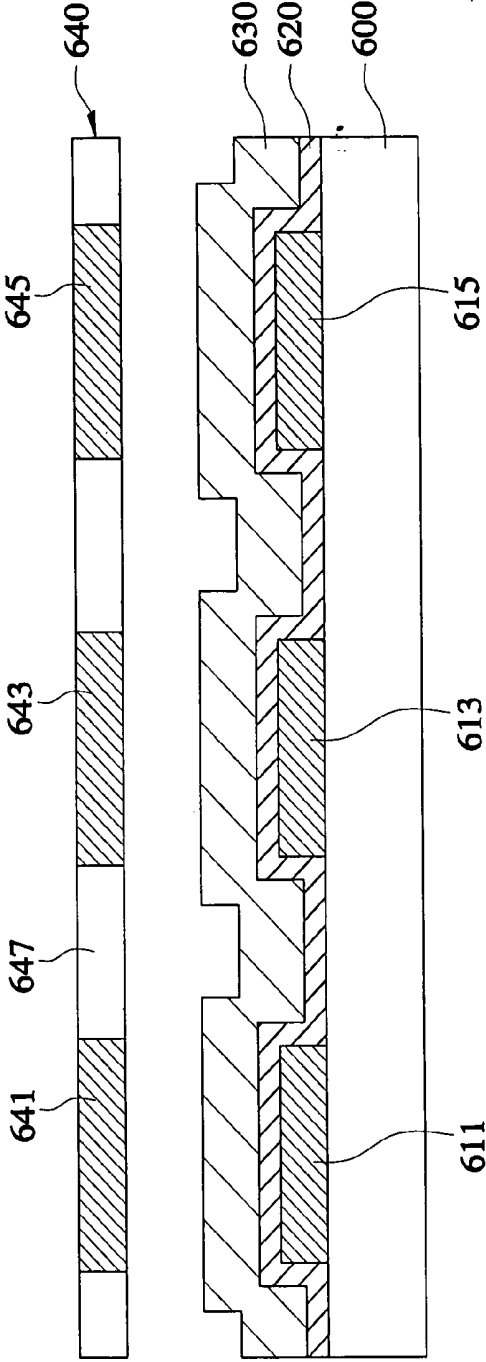


FIG. 5C

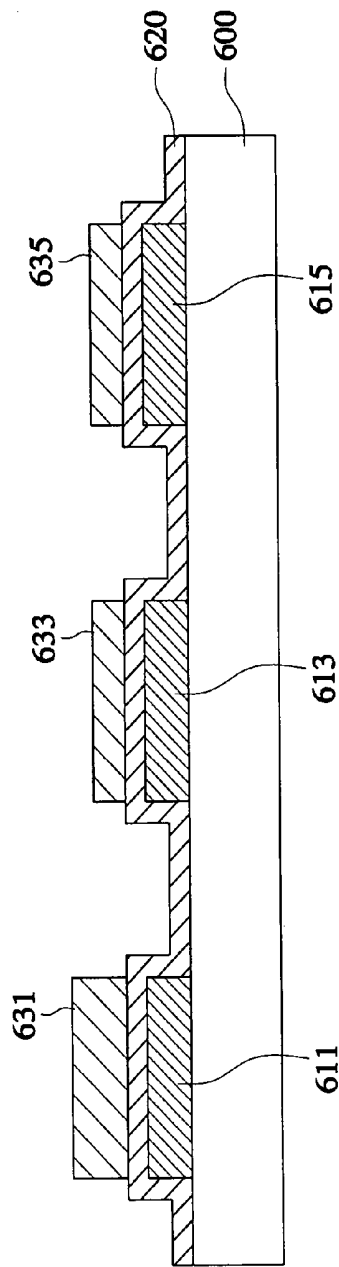


FIG. 5D

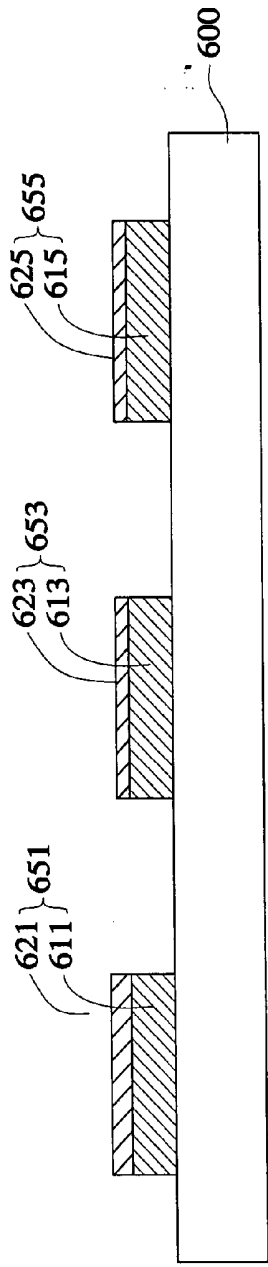


FIG. 6A

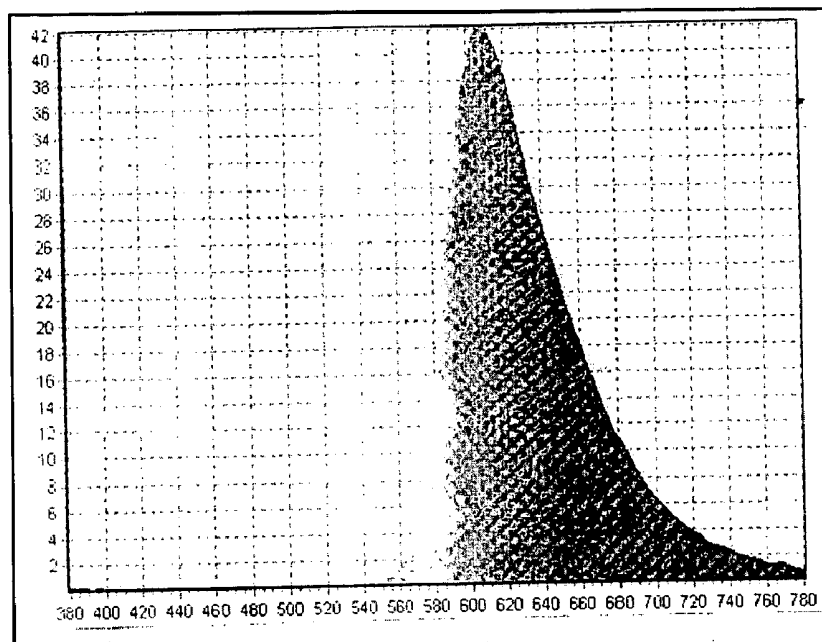


FIG. 6B


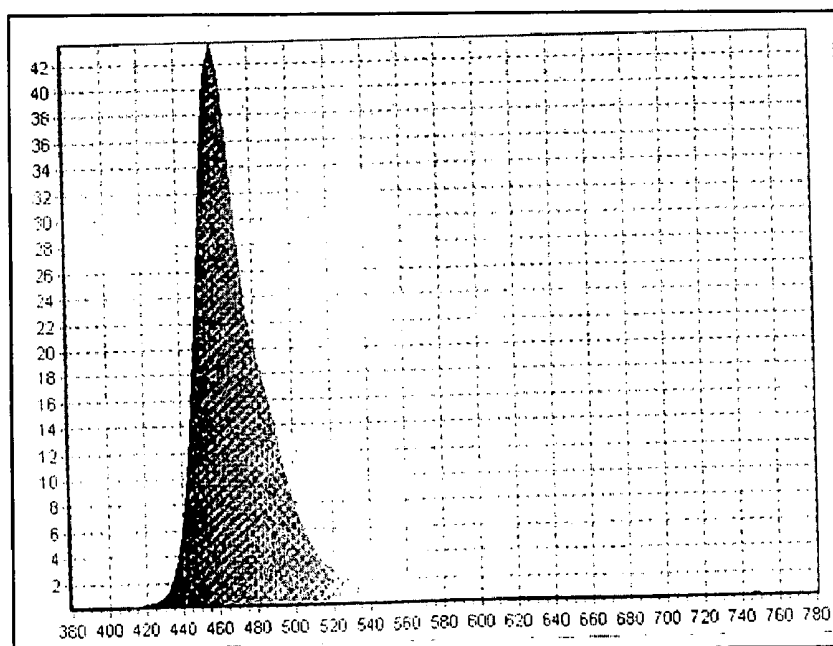


FIG. 6C

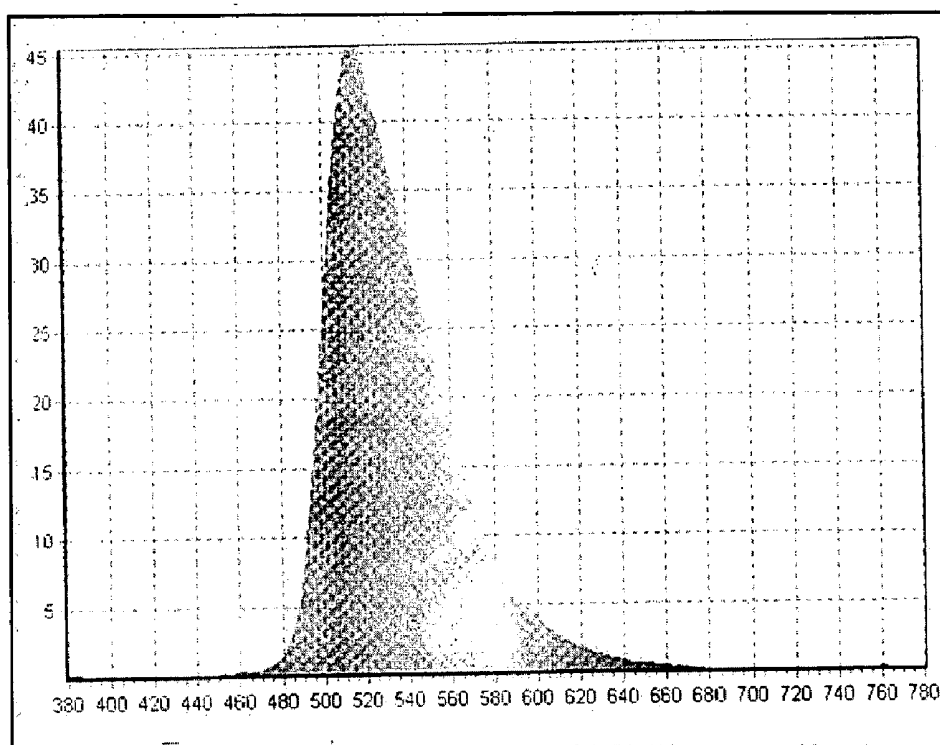

**HIGH EFFICIENCY ORGANIC
ELECTROLUMINESCENT DISPLAY AND
METHOD FOR FABRICATING THE SAME**

CLAIM OF PRIORITY

[0001] This application makes reference to, incorporates the same herein, and claims all benefits accruing under 35 U.S.C. §119 from my application HIGHEFFICIENCY OELD AND METHOD FOR FABRICATING THE SAME filed with the Korean Industrial Property Office on 1 May 2003 and there duly assigned Serial No. 10-2003-0028076.

BACKGROUND OF THE INVENTION

[0002] 1. Technical Field

[0003] The present invention relates to a flat panel display and, more particularly, to an organic electroluminescent display and a method for fabricating the same, capable of improving luminous efficiency and color reproduction by differentiating thicknesses of anode electrodes of respective R, G and B unit pixels.

[0004] 2. Prior Art

[0005] Generally, an organic electroluminescent display (OELD) is classified into a front surface emitting display and a rear surface emitting display depending upon the surface of luminescence of light. On the basis of a substrate, in case of the rear surface emitting OELD, a light from an electroluminescent layer is emitted and passes through the substrate, while in the case of the front surface emitting OELD, light from the electroluminescent layer is emitted without passing through the substrate.

[0006] The efficiency of the rear surface emitting structure is determined depending upon optical characteristics of a reflection film and a transmissive anode electrode, and electrical characteristics of an organic thin-film layer including an electroluminescent layer. A hole transporting layer is formed so as to be thicker than an electron transporting layer since maximum constructive interference in optical characteristics is generated at a thickness of $\frac{1}{4}$ wavelength of light emitted. The mobility of the hole transporting layer is faster than that of the electron transporting layer in terms of the electrical characteristics. Therefore, the thickness of the electroluminescent layer presenting the maximum efficiency is determined when a full color OELD of the rear surface emitting structure is manufactured.

[0007] On the other hand, the thicknesses of the hole transporting layer, the electroluminescent layer and the electron transporting layer located between a reflective anode electrode and a transmissive cathode electrode for measuring the optical thickness, and the electrical thickness in the front surface emitting OELD, are determined differently from the rear surface emitting OELD.

[0008] There have been prior attempts to obtain the maximum efficiency and the highest color purity by controlling the thicknesses of a hole injecting and transporting layer, an electroluminescent layer and an electron transporting layer making up the organic thin-film layer interposed between the anode electrode and the cathode electrode. Japanese Patent Registration No. 2846571 has disclosed technology in the area of the rear surface emitting organic electroluminescent display capable of obtaining a high color purity and

efficiency by setting an optical film thickness of the anode electrode, the cathode electrode and the organic thin-film layers between the anode and cathode electrodes to achieve a peak in the strength of light emitted from the electroluminescent layer. Further, Japanese Laid-open Patent Publication No. 2000-323277 has disclosed technology in the area of the rear surface emitting organic electroluminescent display capable of obtaining a high efficiency and color purity by differently forming the thickness of thin-film layers, except for the electroluminescent layer, among the organic thin-film layers interposed between the anode electrode and the cathode electrode, depending upon the R, G and B unit pixels.

[0009] However, the front surface emitting organic electroluminescent display has a problem in that, although the thickness of the thin-film layers is set to $\frac{1}{4}$ wavelength of a desired light, it is difficult to obtain a desired efficiency and color purity since the electroluminescent layer is located between reflection sections of the reflective anode electrode and the semitransmissive cathode electrode.

[0010] On the other hand, in the front surface emitting electroluminescent display, U.S. Patent Application assigned Ser. No. 10/385,453 entitled "Organic Electroluminescent Device Employing Multi-Layered Anode", by Kwanhee Le, filed in the United States Patent & Trademark Office on the 12th day of March 2003, has disclosed technology capable of improving luminescence characteristics by forming an anode electrode of a multi-layered structure.

[0011] Anode electrodes of the respective R, G and B unit pixels are formed on an insulating substrate. The anode electrodes include a first anode and a second anode. A pixel defining layer is formed to expose portions of the anode electrodes, thereby forming apertures of the respective R, G and B unit pixels. Organic thin film layers of the R, G, and B unit pixels, including R, G, B electroluminescent layers, are formed on the anode electrodes of the R, G and B unit pixels, respectively, in the apertures. A semitransmissive cathode electrode is formed on the entire surface of the substrate.

[0012] The front surface emitting organic electroluminescent display has formed thereon anode electrodes with a 2-layered structure, employing a first anode electrode as a metal film having a high reflectivity, and a second anode electrode as a metal film capable of conforming with a work function, thereby improving luminous efficiency by increasing reflectivity and a hole injecting characteristic.

[0013] However, in the front surface emitting organic electroluminescent display, all of the second anode electrodes of the respective R, G and B unit pixels have the same thickness. Therefore, it is impossible to obtain desired color reproduction and efficiency, since the first anode electrode with a good reflectivity and the semitransmissive cathode electrode have respective lengths of optical constructive interference which are different from each other.

SUMMARY OF THE INVENTION

[0014] Therefore, to solve the problem described hereinabove, an object of the present invention is to provide an organic electroluminescent display, and a method for fabricating the same, capable of obtaining maximum color reproduction and highest efficiency.

[0015] Another object of the present invention is to provide an organic electroluminescent display, and a method for fabricating the same, capable of obtaining a desired color reproduction and illuminous efficiency by differently forming the thicknesses of anode electrodes of respective R, G and B unit pixels.

[0016] Still another object of the present invention is to provide an organic electroluminescent display, and a method for fabricating the same, capable of improving color reproduction and luminous efficiency by using a simple process of differently forming the thicknesses of anode electrodes of respective R, G and B unit pixels without an additional mask process.

[0017] To accomplish the above-mentioned objects, the present invention provides an organic electroluminescent display, comprising: anode electrodes of R, G and B unit pixels formed so as to be separated from each other on a substrate; organic thin-film layers of the R, G and B unit pixels formed on the anode electrodes; and a cathode electrode formed on an entire surface of the substrate; wherein an anode electrode of at least one unit pixel of the R, G and B unit pixels has a thickness different from anode electrodes of the other unit pixels.

[0018] In an embodiment of the invention, each of the anode electrodes of the unit pixels comprises a first film having a high reflectivity and a second film for adjusting a work function, and the second film of at least one unit pixel has a thickness different from the second films of the other unit pixels. The second film of the R unit pixel is thicker than the second films of the other unit pixels.

[0019] In a preferred embodiment of the invention, the thickness of the second film of the R unit pixel is in a range from 250 to 450 Å or from 700 to 750 Å, and the thicknesses of the second films of the G and B unit pixels are in a range from 50 to 150 Å. The thickness of the second film of the R unit pixel is in a range from 250 to 450 Å or from 700 to 750 Å, the thickness of the second film of the G unit pixel is in a range from 200 to 300 Å, and the thickness of the second film of the B unit pixel is in a range from 50 to 150 Å.

[0020] In a further embodiment of the invention, in order to obtain maximum efficiency, in the R, G and B unit pixels, the thickness of the second film of the R unit pixel is 375 Å, the thickness of the second film of the G unit pixel is 250 Å, and the thickness of the second film of the B unit pixel is 125 Å. Moreover, in order to obtain maximum color reproduction, the thickness of the second film of the R unit pixel is 750 Å, the thickness of the second film of the G unit pixel is 250 Å, and the thickness of the second film of the B unit pixel is 125 Å.

[0021] The first film of each of the unit pixels is composed of Al, Ag or an alloy film thereof, and the second films are composed of ITO or IZO.

[0022] Further, the present invention provides an organic electroluminescent display comprising a number of pixels, each including at least an anode electrode, wherein the anode electrodes of adjacent pixels among the number of pixels have different thicknesses with respect to each other.

[0023] In an embodiment of the invention, the anode electrode of each of the pixels comprises a first film having a high reflectivity and a second film for adjusting a work

function, the second films of the anode electrodes of adjacent pixels having a thickness different from each other.

[0024] In addition, the present invention provides a method for fabricating an organic electroluminescent display, comprising the steps of: forming first anodes of R, G and B unit pixels on a substrate; forming an anode electrode of the R unit pixel by forming a second anode of the R unit pixel on the first anode of the R unit pixel; forming anode electrodes of the G and B unit pixels by forming second anodes of the G and B unit pixels on the first anodes of the G and B unit pixels; forming organic thin-film layers on the anode electrodes of the R, G and B unit pixels, respectively; and forming a cathode electrode on an entire surface of the substrate; wherein a second anode of at least one unit pixel, among the R, G and B unit pixels, has a thickness different from the thicknesses of the second anodes of the other unit pixels.

[0025] Further, the present invention includes a method for fabricating an organic electroluminescent display, comprising the steps of: forming sequentially a first anode electrode material and a second anode electrode material of the R, G and B unit pixels on a substrate; forming anode electrodes of the R, G and B unit pixels, each including a first anode and a second anode, by etching the first and the second anode electrode materials; forming organic thin-film layers on the anode electrodes of the R, G and B unit pixels, respectively; and forming a cathode electrode on an entire surface of the substrate; wherein a second anode of at least one unit pixel, among the R, G and B unit pixels, has a thickness different from the thicknesses of second anodes of the other unit pixels.

[0026] Further, the present invention includes a method for fabricating an organic electroluminescent display, comprising the steps of: forming first anodes of R, G and B unit pixels on a substrate; forming a second anode electrode material on an entire surface of the substrate; etching the second anode electrode material to form second anodes on the first anodes of the R, G and B unit pixels, respectively, and to form anode electrodes of the R, G and B unit pixels; forming organic thin-film layers on the anode electrodes of the R, G and B unit pixels, respectively; and forming a cathode electrode on an entire surface of the substrate; wherein a second anode of at least one unit pixel, among the R, G and B unit pixels, has a thickness different from the thicknesses of second anodes of the other unit pixels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] A more complete appreciation of the invention, and many of the attendant advantages thereof, will be readily apparent as the same becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or similar components, wherein:

[0028] FIG. 1 is a cross-sectional view of a prior art organic electroluminescent display;

[0029] FIG. 2 is a cross-sectional view of an organic electroluminescent display in accordance with an embodiment of the present invention;

[0030] FIGS. 3A thru 3E are cross-sectional views of processes for fabricating an organic electroluminescent display in accordance with a first embodiment of the present invention;

[0031] FIGS. 4A thru 4D are cross-sectional views of processes for fabricating an organic electroluminescent display in accordance with a second embodiment of the present invention;

[0032] FIGS. 5A thru 5D are cross-sectional views of processes for fabricating an organic electroluminescent display in accordance with a third embodiment of the present invention; and

[0033] FIGS. 6A thru 6C are spectrums of R, G and B colors, respectively, in an organic electroluminescent display in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0034] Hereinafter, a detailed description of preferred embodiments of the present invention will be apparent in connection with the accompanying drawings.

[0035] FIG. 1 is a cross-sectional view of a prior art organic electroluminescent display. As shown in FIG. 1, anode electrodes 110, 120 and 130 of the respective R, G and B unit pixels are formed on an insulating substrate 100. The anode electrodes 110, 120 and 130 include first anodes 111, 123, 125 and second anodes 121, 123 and 125, respectively. A pixel defining layer 140 is formed to expose portions of the anode electrodes 110, 120 and 130, thereby forming apertures 141, 143 and 145 of the respective R, G and B unit pixels. Organic thin film layers 150, 160 and 170 of the R, G, and B unit pixels, including R, G, B electroluminescent layers, are formed on the anode electrodes 110, 120 and 130 of the R, G and B unit pixels in the apertures 141, 143 and 145, respectively. A semitransmissive cathode electrode 180 is formed on an entire surface of the substrate.

[0036] The front surface emitting organic electroluminescent display has anode electrodes with a 2-layered structure, employing a first anode electrode as a metal film having a high reflectivity, and a second anode electrode as a metal film capable of conforming with a work function, thereby improving luminous efficiency by increasing reflectivity and a hole injecting characteristic.

[0037] However, in the front surface emitting organic electroluminescent display, all of the second anode electrodes of respective R, G and B unit pixels have the same thickness. Therefore, it is impossible to obtain desired color reproduction and efficiency, since the first anode electrode with a good reflectivity and the semitransmissive cathode electrode have a different lengths of optical constructive interference with respect to each other

[0038] FIG. 2 is a cross-sectional view of an organic electroluminescent display in accordance with an embodiment of the present invention.

[0039] Referring to FIG. 2, a buffer layer 210 is formed on a transparent insulation substrate 200, and semiconductor layers 220, 230 and 240 of R, G and B unit pixels provided with source/drain regions 221 and 225, 231 and 235, and 241 and 245 are formed on the buffer layer 210, respectively. Gates 261, 263 and 265 of the respective unit pixels are formed on a gate insulating film 250, and source/drain electrodes 281 and 285, 291 and 295, and 301 and 305 of the respective unit pixels connected to the source/drain regions 221 and 225, 231 and 235, and 241 and 245 of the respective

unit pixels through contact holes (not shown) are formed on an inter-layer insulating film 270.

[0040] Further, anode electrodes 320, 330 and 340 of the R, G and B unit pixels are formed on a planarization film 310 so as to be connected to one of the source/drain electrodes of thin-film transistors of the unit pixels, for example, drain electrodes 285, 295 and 305 through via-holes 311, 313 and 315, respectively. At this time, each of the anode electrodes 320, 330 and 340 of the R, G and B unit pixels includes a first anode 321, 331 and 341 having a high reflectivity and a second anode 325, 335 and 345 for adjusting a work function, and the second anode of at least one unit pixel among the R, G and B unit pixels, is formed to have a thickness different from the thicknesses of the second anodes of the other unit pixels.

[0041] In an embodiment of the present invention, the second anode 325 of the R unit pixel is formed so as to be thicker than the second anodes 335 and 345 of the G and B unit pixels, and the thicknesses of the second anodes 335 and 345 of the G and B unit pixels are formed with the same thickness. Otherwise, the second anode 325 of the R unit pixel is formed so as to be thicker than the second anodes 335 and 345 of the G and B unit pixels, and the second anode 335 of the G unit pixel is formed so as to be thicker than the second anode 345 of the B unit pixel.

[0042] On the planarization film 310, a pixel defining layer 360 for separating the anode electrodes 320, 330 and 340 of the respective unit pixels is formed. The pixel defining layer 360 is provided with apertures 371, 373 and 375 for exposing portions of the anode electrodes 320, 330 and 340, respectively. The pixel defining layer 360 may employ a conventional thermosetting resin or a photosensitive resin. Organic thin-film layers 381, 383 and 385 of the respective unit pixels are formed on the anode electrodes 320, 330 and 340 of the respective unit pixels in the apertures 371, 373 and 375, and a cathode electrode 390 is formed on an entire surface of the substrate. The organic thin-film layers 381, 383 and 385 of the respective unit pixels comprise an electroluminescent layer of the respective unit pixels, including at least one of a hole injecting layer, a hole transporting layer, a hole blocking layer, an electron injecting layer and an electron transporting layer.

[0043] The organic electroluminescent display in accordance with the present invention is capable of obtaining the highest luminous efficiency by forming the thicknesses of the second anodes 325, 335 and 345 of the anode electrodes 320, 330 and 340, respectively, of the R, G and B unit pixels, respectively, so as to be different from each other depending upon the unit pixels.

[0044] Hereinafter, a detailed description of a method for fabricating an organic electroluminescent display provided with anode electrodes having a thickness different from each other, depending upon the R, G and B unit pixels, in accordance with the present invention, will be provided. In the method for fabricating the organic electroluminescent display in accordance with the present invention, since the process prior to formation of the anode electrode is similar to a conventional method, hereinafter, only the process of forming the anode electrodes having thicknesses different from each other, depending upon the R, G and B unit pixels, and the following processes, will be described.

[0045] A description of the method for fabricating the organic electroluminescent display in accordance with a first

embodiment of the present invention will be given with reference to FIGS. 3A to 3E.

[0046] Referring to FIG. 3A, a first anode electrode material 410 is formed to have a thickness of 2000 Å; with a metal film such as Al, Ag or an alloy thereof having a high reflectivity, on a transparent insulating substrate 400, such as a glass substrate, by using a DC sputter. Referring to FIG. 3B, the first anode electrode material 410 is patterned to form first anodes 421, 423 and 425 with all of the R, G and B unit pixels having the same thickness.

[0047] Referring to FIG. 3C, a second anode electrode material is deposited with a predetermined thickness on the entire surface of the substrate with a material having a suitable work function, for example, ITO or IZO, and is patterned to form a second anode 431 of the R unit pixel on the first anode 421 of the R unit pixel only. The second anode 431 of the R unit pixel is formed with a thickness of 250~450 Å or 700~750 Å, preferably 375 Å.

[0048] Referring to FIG. 3D, material the same as the second anode electrode material of the R unit pixel (for example, ITO or IZO) is deposited with a thickness of 50~150 Å on the entire surface of the substrate, and is patterned to form second anodes 433 and 435 of the G and B unit pixels on the first anodes 423 and 425, respectively. Therefore, the anode electrodes 441, 443 and 445 of the R, G and B unit pixels, including the first anodes 421, 423 and 435 having a high reflectivity and the second anodes having suitable work functions 431, 433 and 435, are formed.

[0049] On the other hand, by adding a mask process instead of equally forming the thicknesses of the second anodes of the G and B unit pixels, the second anode 433 of the G unit pixel is formed with a thickness of 200~300 Å, preferably 250 Å, and the second anode 435 of the B unit pixel is formed with a thickness of 50~150 Å, preferably 125 Å, thereby forming the second anodes 431, 433 and 435 of the R, G and B unit pixels, respectively, with different thicknesses from each other.

[0050] Referring to FIG. 3E, after the organic insulating film composed of a thermosetting resin or a photosensitive resin is deposited on the entire surface of the substrate, it is patterned by a conventional method to form a pixel defining layer 450 for separating the anode electrodes 441, 443 and 445 of the respective unit pixels. After the completion of forming the pixel defining layer 450, the layer 450 is sequentially cleansed by using water, isopropyl alcohol and acetone. Then, it is cleansed by using a UV/O₃ cleanser. At this time, luminescence sections of the anode electrodes of the respective unit pixels are opened, depending upon the forming of the pixel defining layer 450, and have a pattern dimension of 2 mm×2 mm.

[0051] Subsequently, while not shown, in the process of forming the organic thin-film layer on the anode electrodes 441, 443 and 445, corresponding organic films from among the hole injecting layer, the hole transporting layer, the electroluminescent layer, the hole blocking layer, and the electron transporting layer of the R, G and B unit pixels are sequentially formed. The hole injecting layer is formed with a thickness of 250 Å by using an IDE 406 of Idemitsu Co. with vacuum deposition, and the hole transporting layer is formed with a thickness of 100 Å by vacuum deposition with a speed of 0.1 nm/sec by using NBP{N,N'-di(naphthalene-1-yl)-N,N'-diphenyl-benzidine}.

[0052] Continuously, CBP {4,4'-bis(carazol-9-yl)-biphenyl} and phosphorescence red are heat deposited with a 100:12 mixing weight ratio to form the electroluminescent layer of the R unit pixel with a thickness of 300 Å. The CBP and IrPPy{tris(phenylpyridine)Iridium} are heat deposited with a 100:5 mixing weight ratio to form the electroluminescent layer of the G unit pixel with a thickness of 250 Å. A blue host and a blue dopant are heat deposited with a 100:4 mixing weight ratio to form the electroluminescent layer of the B unit pixel with a thickness of 150 Å.

[0053] Next, BAQ is deposited with a thickness of 50 Å to form a hole barrier layer, and Alq₃ {tri(8-quinolinolate)-aluminum} is vacuum deposited to form the electron transporting layer with a thickness 250 Å. Magnesium (Mg) and silver (Ag) are heat deposited with 10:1 to 30:1 mixing weight ratio to form a semitransmissive cathode having a thickness of 50~150 Å, preferably 100 Å. Then, IZO is deposited using sputter, under a vacuum condition, of a speed of 0.2 nm/sec and a pressure of 1×10^{-5} Pa to form a transmissive cathode electrode.

[0054] Finally, a passivation layer is formed to prevent oxygen and moisture from penetrating to the exterior, and to protect the inner organic thin-film layer. An encapsulation substrate is attached and encapsulated by using a UV adhesive under a nitrogen gas atmosphere and an anhydrous condition. Then, the front surface emitting organic electroluminescent display is manufactured by thermosetting for 1 hour at a temperature of about 70° C.

[0055] A description of the method for fabricating the organic electroluminescent display in accordance with a second embodiment of the present invention will be provided with reference to FIGS. 4A to 4D. The fabricating method in accordance with the second embodiment of the present invention is accomplished with the same condition as the first embodiment, except that the mask process is reduced than the first embodiment by using a half-tone mask.

[0056] Referring to FIG. 4A, a first anode material 510 and a second anode material 520 are sequentially deposited on an insulating substrate 500. Referring to FIG. 4B, a photosensitive film 530 is coated on the second anode electrode material. Then, a photo process is performed by using the half-tone mask 540. The half-tone mask 540 includes: a light blocking section 541 for blocking light entirely, corresponding to a portion forming the anode electrode of the R unit pixel; halftransmitting sections 543 and 545 for transmitting a portion of light, corresponding to portions forming the anode electrodes of the G and B unit pixels; and a transmitting section 547 for transmitting light entirely.

[0057] Referring to FIG. 4C, photosensitive film patterns 531, 533 and 535 having thicknesses different from each other, depending upon the R, G and B unit pixels, are formed by a photo process using the half-tone mask 540. The photosensitive film pattern 531 of the R unit pixel is formed so as to be thicker than the photosensitive film patterns 533 and 535 of the G and B unit pixels, and the photosensitive film patterns 533 and 535 of the G and B unit pixels have the same thickness.

[0058] Referring to FIGS. 4C and 4D, the first and the second anode electrode materials 510 and 520 are patterned

by using the photosensitive film patterns **531**, **533** and **535** to form the anode electrodes **551**, **553** and **555** having thicknesses different from each other, depending upon the R, G and B unit pixels. At this time, the first anodes **511**, **513** and **515** from among the anode electrodes **551**, **553** and **555** of the R, G and B unit pixels have the same thickness, and the second anodes **521**, **523** and **525** have thicknesses different from each other, depending upon the thickness difference of the photosensitive film patterns **531**, **533** and **535**.

[0059] That is to say, the second anode **521** of the R unit pixel is formed so as to be thicker than the second anodes **523** and **525** of the G and B unit pixels, and the second anodes **523** and **525** of the G and B unit pixels are formed so as to have the same thickness. In the second embodiment, the second anodes **523** and **525** of the G and B unit pixels may be formed so as to have different thicknesses by making the thicknesses of the half transmitting patterns **543** and **545** of the half-tone mask **540** different when the photosensitive film **530** is patterned using the half-tone mask shown in FIG. 4B.

[0060] A description of the method for fabricating the organic electroluminescent display in accordance with a third embodiment of the present invention will be provided with reference to FIGS. 5A to 5D. The fabricating method in accordance with the third embodiment of the present invention is accomplished with the same condition as the first embodiment, except that the mask process is reduced relative to the first embodiment by using a half-tone mask.

[0061] Referring to FIG. 5A, a first anode electrode material is deposited and patterned on an insulating substrate **600** to form the first anodes **611**, **613** and **615** of the R, G and B unit pixels having the same thickness. Subsequently, the second anode electrode material **620** is deposited on the substrate **600** including the first anodes **611**, **613** and **615**.

[0062] Referring to FIG. 5B, a photosensitive film **630** is coated on the second anode electrode material. Then, a photo process is performed by using the half-tone mask **640**. The half-tone mask **640** includes: a light blocking section **641** for blocking light entirely, corresponding to a first anode **611** of the R unit pixel; half transmitting sections **643** and **645** for transmitting a portion of light, corresponding to second anodes **613** and **615** of the G and B unit pixels; and a transmitting section **647** for transmitting light entirely.

[0063] Referring to FIG. 5C, photosensitive film patterns **631**, **633** and **635** having thicknesses different from each other, depending upon the R, G and B unit pixels, are formed by a photo process using the half-tone mask **640**. The photosensitive film pattern **631** of the R unit pixel is formed so as to be thicker than the photosensitive film patterns **633** and **635** of the G and B unit pixels, and the photosensitive film patterns **633** and **635** of the G and B unit pixels have the same thickness.

[0064] Referring to FIGS. 5C and 5D, the second anode electrode material **620** is patterned by using the photosensitive film patterns **631**, **633** and **635** to form the second anodes **621**, **623** and **625**, respectively, having thicknesses different from each other depending upon the R, G and B unit pixels. That is to say, the second anode **621** of the R unit pixel is formed so as to be thicker than the second anodes **623** and **625** of the G and B unit pixels, and the second

anodes **623** and **625** of the G and B unit pixels are formed so as to have the same thickness.

[0065] Therefore, the anode electrodes **651**, **653** and **655** of the R, G and B unit pixels, respectively, are composed of the first anodes **611**, **613** and **615**, respectively, having the same thickness, and the second anodes **621**, **623** and **625**, respectively, having thicknesses different from each other, thereby having thicknesses different from each other depending upon the R, G and B unit pixels. In the third embodiment, the second anodes **623** and **625** of the G and B unit pixels, respectively, may be formed to have different thicknesses by making the thicknesses of the half transmitting patterns **643** and **645** different from each other when the photosensitive film **630** is patterned using the half-tone mask shown in FIG. 5B.

[0066] Table 1, Table 2 and Table 3 represent efficiency, brightness and chromaticity coordinates of the R, G and B unit pixels depending upon the thicknesses of the second anodes in accordance with the present invention.

TABLE 1

R unit pixel			
thickness (Å)	efficiency (Cd/A)	brightness (Lm/W)	chromaticity coordinates (CIE_x, CIE_y)
125	5.92	3.60	0.62, 0.38
375	12.03	7.76	0.64, 0.35
500	0.44	0.19	0.68, 0.31
750	5.59	3.43	0.67, 0.33

[0067]

TABLE 2

G unit pixel			
thickness (Å)	efficiency (Cd/A)	brightness (Lm/W)	chromaticity coordinates (CIE_x, CIE_y)
125	32.33	17.26	0.23, 0.68
375	10.85	4.85	0.45, 0.53
500	0.23	0.06	0.32, 0.40
750	3.20	1.37	0.52, 0.47

[0068]

TABLE 3

B unit pixel			
thickness (Å)	efficiency (Cd/A)	brightness (Lm/W)	chromaticity coordinates (CIE_x, CIE_y)
125	4.24	2.81	0.13, 0.14
375	3.28	1.95	0.21, 0.49
500	0.17	0.07	0.18, 0.08
750	1.46	0.73	0.33, 0.53

[0069] From Table 1, the R unit pixel has the highest efficiency and brightness when the thickness is 375 Å, and the chromaticity coordinates has the highest value when the thickness is 750 Å. Therefore, considering all of the efficiency, brightness and chromaticity coordinates, it is preferable that the second anode of the anode electrode in the R unit pixel be formed with a thickness of 375 Å.

[0070] From Table 2, since the G unit pixel has the highest efficiency and brightness when the thickness is 125 Å, and the chromaticity coordinates are also stable, it is preferable that the second anode of the anode electrode in the G unit pixel be formed with a thickness of 125 Å.

[0071] From Table 3, since the B unit pixel has the highest efficiency and brightness when the thickness is 125 Å, and the chromaticity coordinates are also stable, it is preferable that the second anode of the anode electrode in the B unit pixel be formed with a thickness of 125 Å.

[0072] FIGS. 6A to 6C are spectrums of R, G and B, respectively, in an organic electroluminescent display in accordance with the present invention.

[0073] In accordance with the embodiment of the present invention, as the thicknesses of the electrodes for conforming the work function among the anode electrodes of the multi-layered structure are formed differently from each other depending upon the R, G and B unit pixels, the respective unit pixels are capable of obtaining the highest efficiency. Further, the R and B unit pixels are capable of obtaining both the highest efficiency and the maximum color purity when a full color device is embodied.

[0074] In addition, when the anode electrodes having different thicknesses are formed, since an additional process is excluded by adopting the half-tone mask, effects of a process simplification and yield improvement are produced.

[0075] While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiment, but on the contrary, it is intended to cover various modification within the spirit and the scope of the appended claims.

What is claimed is:

1. An organic electroluminescent display, comprising:

anode electrodes of R, G and B unit pixels disposed on a substrate and separated from each other;

organic thin-film layers of the R, G and B unit pixels disposed on the anode electrodes; and

a cathode electrode disposed over an entire surface of the substrate,

wherein an anode electrode of at least one unit pixel of the R, G and B unit pixels has a thickness different from thicknesses of anode electrodes of other unit pixels of the R, G and B unit pixels.

2. The organic electroluminescent display according to claim 1, wherein the anode electrode of the R unit pixel is thicker than the anode electrodes of the other unit pixels.

3. The organic electroluminescent display according to claim 1, wherein the anode electrode of each of the unit pixels includes a first film having a high reflectivity and a second film for adjusting a work function, and wherein the second film of said at least one unit pixel of the R, G and B unit pixels has a thickness different from thicknesses of the second films of the other unit pixels of the R, G and B unit pixel.

4. The organic electroluminescent display according to claim 3, wherein the second film of the R unit pixel is thicker than the second films of the other unit pixels.

5. The organic electroluminescent display according to claim 3, wherein a thickness of the second film of the R unit pixel is in a range of one of 250 to 450 Å and 700 to 750 Å, and thicknesses of the second films of the G and B unit pixels are in a range of 50 to 150 Å.

6. The organic electroluminescent display according to claim 3, wherein a thickness of the second film of the R unit pixel is in a range of one of 250 to 450 Å and 700 to 750 Å, a thickness of the second film of the G unit pixel is in a range of 200 to 300 Å, and a thickness of the second film of the B unit pixel is in a range of 50 to 150 Å.

7. The organic electroluminescent display according to claim 3, wherein a thickness of the second film of the R unit pixel is substantially 375 Å, a thickness of the second film of the G unit pixel is substantially 250 Å, and a thickness of the second film of the B unit pixel is substantially 125 Å, whereby maximum efficiency is obtained in the R, G and B unit pixels.

8. The organic electroluminescent display according to claim 3, wherein a thickness of the second film of the R unit pixel is substantially 750 Å, a thickness of the second film of the G unit pixel is substantially 250 Å, and a thickness of the second film of the B unit pixel is substantially 125 Å, whereby maximum color reproduction is obtained in the R, G and B unit pixels.

9. The organic electroluminescent display according to claim 3, wherein the first film of each of the unit pixels comprises one of Al, Ag and an alloy film thereof, and the second film comprises one of ITO and IZO.

10. An organic electroluminescent display comprising:

a plurality of pixels, each including at least an anode electrode;

wherein anode electrodes of adjacent pixels have different thicknesses relative to each other.

11. The organic electroluminescent display according to claim 10, wherein the anode electrode of each of the pixels includes a first film having a high reflectivity and a second film for adjusting a work function, and wherein the second films of the anode electrodes of adjacent pixels have different thicknesses relative to each other.

12. A method for fabricating an organic electroluminescent display, comprising the steps of:

disposing first anodes of R, G and B unit pixels on a substrate;

forming an anode electrode of the R unit pixel by disposing a second anode of the R unit pixel on the first anode of the R unit pixel;

forming anode electrodes of the G and B unit pixels by disposing second anodes of the G and B unit pixels on the first anodes of the G and B unit pixels, respectively;

disposing respective organic thin-film layers on the anode electrodes of the R, G and B unit pixels; and

disposing a cathode electrode over an entire surface of the substrate,

wherein the second anode of at least one unit pixel of the R, G and B unit pixels has a thickness different from thicknesses of the second anodes of other unit pixels of the R, G and B unit pixels.

13. The method according to claim 12, wherein the second film of the R unit pixel is thicker than the second films of the other unit pixels of the R, G and B unit pixels.

14. The method according to claim 12, wherein a thickness of the second film of the R unit pixel is in a range of one of 250 to 450 Å and 700 to 750 Å, a thickness of the second film of the G unit pixel is in a range of one of 50 to 150 Å and 200 to 300 Å, and a thickness of the second film of the B unit pixel is in a range of 50 to 150 Å.

15. A method for fabricating an organic electroluminescent display, comprising the steps of:

disposing sequentially a first anode electrode material and a second anode electrode material of R, G and B unit pixels on a substrate;

etching the first and second anode electrode materials to form anode electrodes of the R, G and B unit pixels, each including a first anode and a second anode;

disposing respective organic thin-film layers on the anode electrodes of the R, G and B unit pixels; and

disposing a cathode electrode over an entire surface of the substrate,

wherein a second anode of at least one unit pixel of the R, G and B unit pixels has a thickness different from thicknesses of second anodes of the other unit pixels of the R, G and B unit pixels.

16. The method according to claim 15, wherein the second film of the R unit pixel is thicker than the second films of the other unit pixels.

17. The method according to claim 15, wherein a thickness of the second film of the R unit pixel is in a range of one of 250 to 450 Å and 700 to 750 Å, a thickness of the second film of the G unit-pixel is in a range of one of 50 to

150 Å and **200** to 300 Å, and a thickness of the second film of the B unit pixel is in a range of 50 to 150 Å.

18. A method for fabricating an organic electroluminescent display, comprising the steps of:

disposing first anodes of R, G and B unit pixels on a substrate;

disposing a second anode electrode material over an entire surface of the substrate;

etching the second anode electrode material to form respective second anodes on the first anodes of the R, G and B unit pixels, thereby forming respective anode electrodes of the R, G and B unit pixels;

disposing organic thin-film layers on the respective anode electrodes of the R, G and B unit pixels; and

disposing a cathode electrode over an entire surface of the substrate;

wherein a second anode of at least one unit pixel of the R, G and B unit pixels has a thickness different from thicknesses of second anodes of the other unit pixels of the R, G and B unit pixels.

19. The method according to claim 18, wherein the second film of the R unit pixel is thicker than the second films of the other unit pixels.

20. The method according to claim 18, wherein a thickness of the second film of the R unit pixel is in a range of one of 250 to 450 Å and 700 to 750 Å, a thickness of the second film of the G unit pixel is in a range of one of 50 to 150 Å and **200** to 300 Å, and a thickness of the second film of the B unit pixel is in a range of 50 to 150 Å.

* * * * *

专利名称(译)	高效有机电致发光显示器及其制造方法		
公开(公告)号	US20040217697A1	公开(公告)日	2004-11-04
申请号	US10/771091	申请日	2004-02-04
[标]申请(专利权)人(译)	李宽HEE RYU SEOUNG YOON 李宪JUNG 朴相IL KOO JAE BON		
申请(专利权)人(译)	李宽熙 RYU SEOUNG-YOON 李宪JUNG 朴相IL KOO JAE-BON		
当前申请(专利权)人(译)	李宽熙 RYU SEOUNG-YOON 李宪JUNG 朴相IL KOO JAE-BON		
[标]发明人	LEE KWAN HEE RYU SEOUNG YOON LEE HUN JUNG PARK SANG IL KOO JAE BON		
发明人	LEE, KWAN-HEE RYU, SEOUNG-YOON LEE, HUN-JUNG PARK, SANG-IL KOO, JAE-BON		
IPC分类号	H05B33/26 H01L27/32 H01L51/50 H01L51/52 H05B33/00 H05B33/10		
CPC分类号	H01L27/3211 H01L27/3244 H01L27/3295 H01L51/5016 H01L51/5206 H01L2251/5315 H01L2251/558 H01L51/5218 H01L51/5265 Y10S428/917		
优先权	1020030028076 2003-05-01 KR		
其他公开文献	US7431626		
外部链接	Espacenet USPTO		

摘要(译)

一种有机电致发光显示器，包括：在基板上彼此分开形成的R，G和B单元像素的阳极电极；形成在阳极电极上的R，G和B单元像素的有机薄膜层；阴极电极形成在基板的整个表面上。R，G和B单位像素中的至少一个单位像素的阳极具有与其他单位像素的阳极不同的厚度。每个单位像素的阳极包括具有高反射率的第一膜和用于调节功函数的第二膜。单位像素中的至少一个单位像素的第二膜具有与其他单位像素的第二膜不同的厚度。R单位像素的第二膜比其他单位像素的第二膜厚。

