



US 20050107140A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0107140 A1**
Kim (43) **Pub. Date: May 19, 2005**(54) **FOLDER TYPE MOBILE TERMINAL USING
ORGANIC ELECTROLUMINESCENT PANEL
AND DISPLAY METHOD THEREOF**(57) **ABSTRACT**(76) Inventor: **Hak Su Kim**, Seoul (KR)Correspondence Address:
FLESHNER & KIM, LLP
P.O. BOX 221200
CHANTILLY, VA 20153 (US)(21) Appl. No.: **10/950,673**(22) Filed: **Sep. 28, 2004**(30) **Foreign Application Priority Data**

Sep. 9, 2003 (KR) 10-2003-0067506

Publication Classification(51) **Int. Cl.⁷** **H01J 1/62**(52) **U.S. Cl.** **455/575.3**

The present invention provides a dual folder type mobile terminal and display method, by which images can be displayed using one organic EL panel enabling to bi-directionally transmit light through upper and lower substrates. The present invention includes an RF unit modulating a voice signal inputted from a user into a radio signal, the RF unit demodulating to output an antenna-received radio signal, an organic EL panel displaying an image, the organic EL panel including a lower substrate, an upper substrate on the lower substrate, and an organic luminescent layer between the lower and upper substrates to emit light bi-directionally transmitted through the lower and upper substrates,

a sensor detecting an open or closed state of a folder of the mobile terminal to output a sensed signal, a control unit outputting a drive control signal for driving the organic EL panel according to the sensed signal received from the sensor, a drive unit receiving the drive control signal from the control unit to drive the organic EL panel, and a key input unit having a plurality of number keys for dialing and a plurality of function keys for performing specific functions respectively.

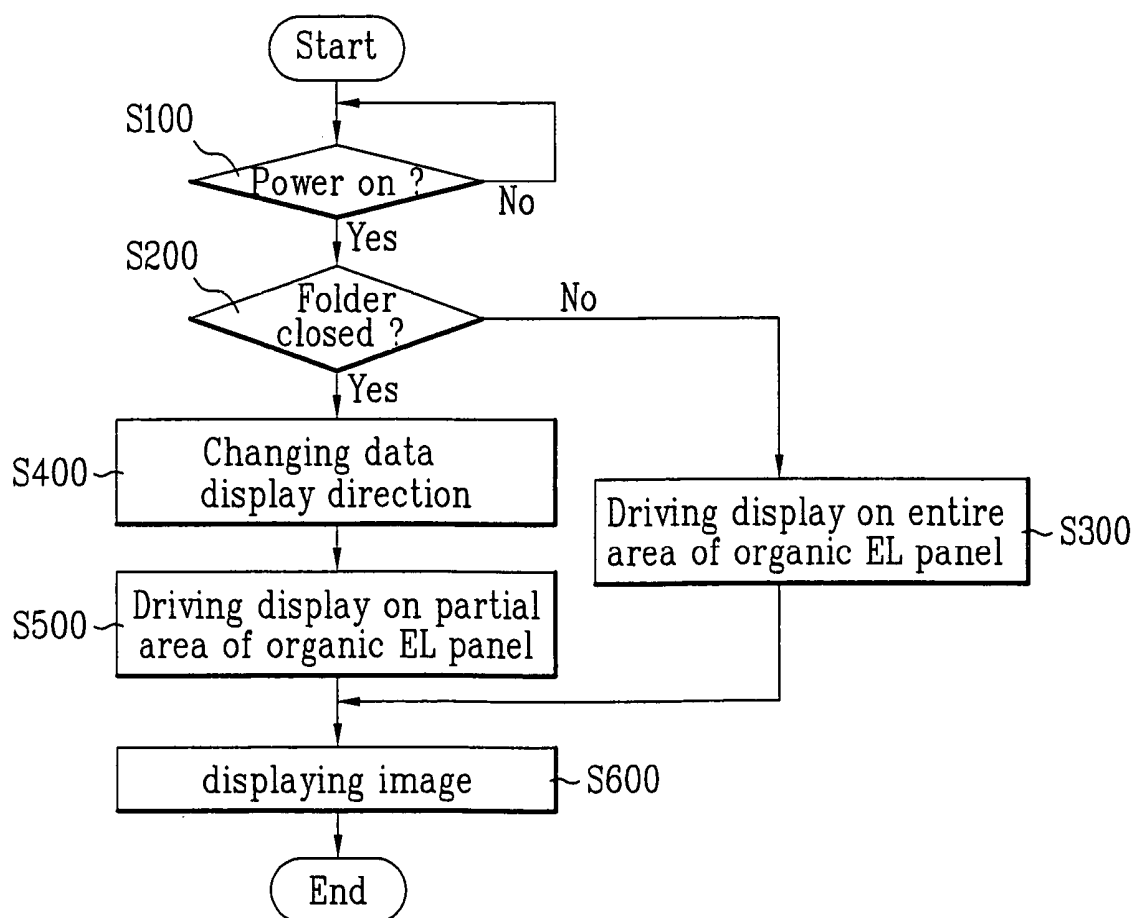


FIG. 1
Related Art

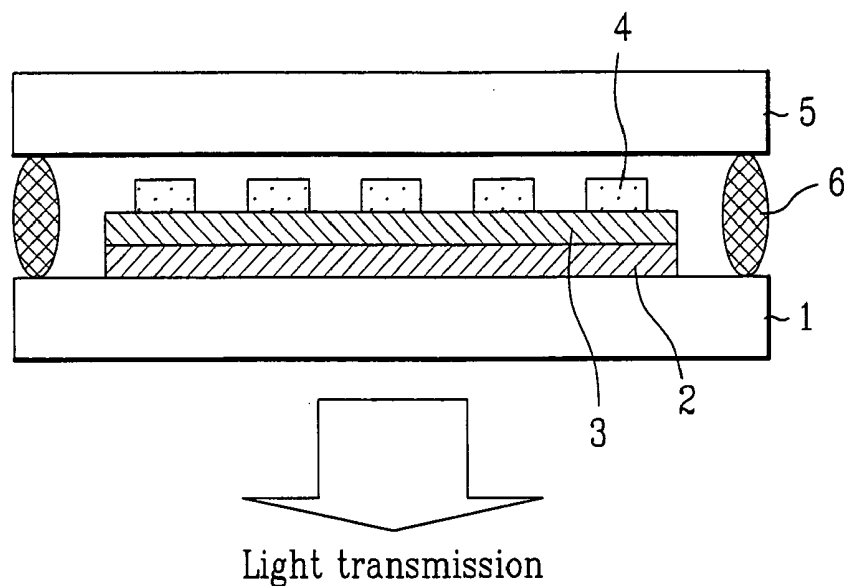


FIG. 2

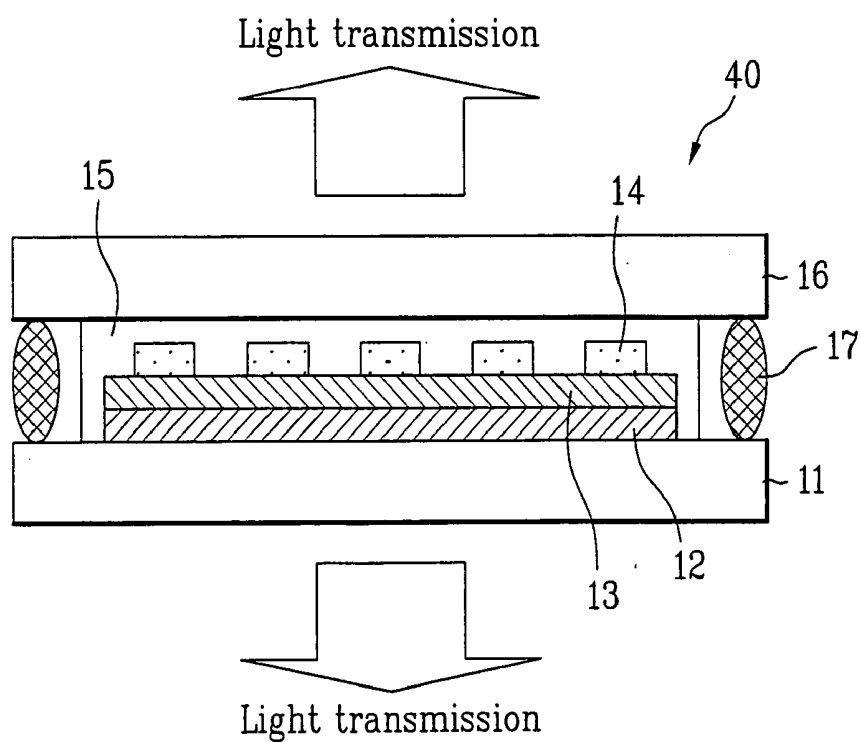


FIG. 3

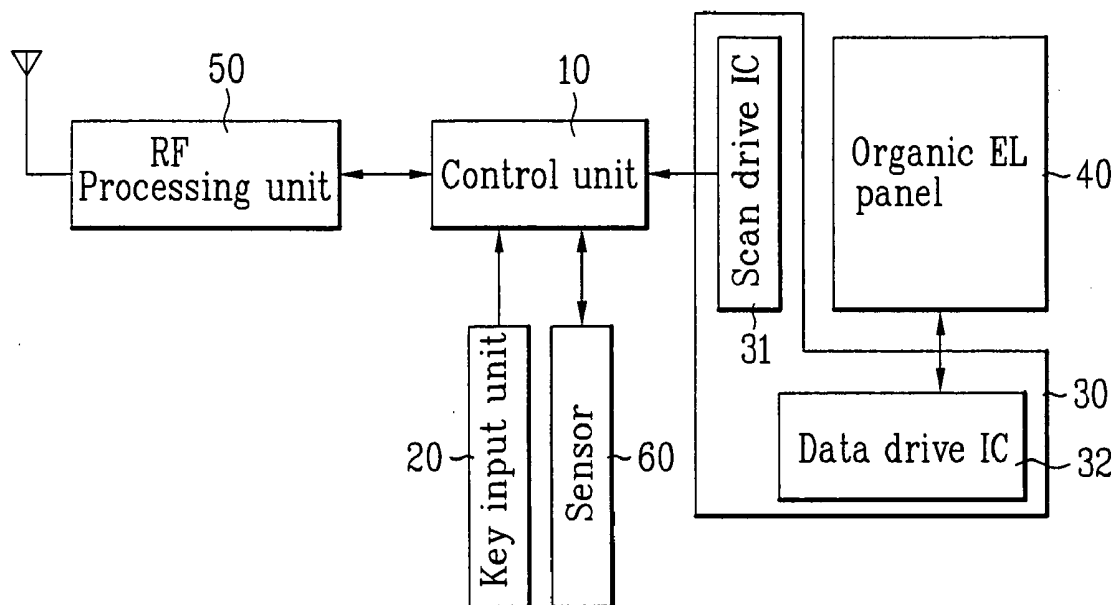


FIG. 4

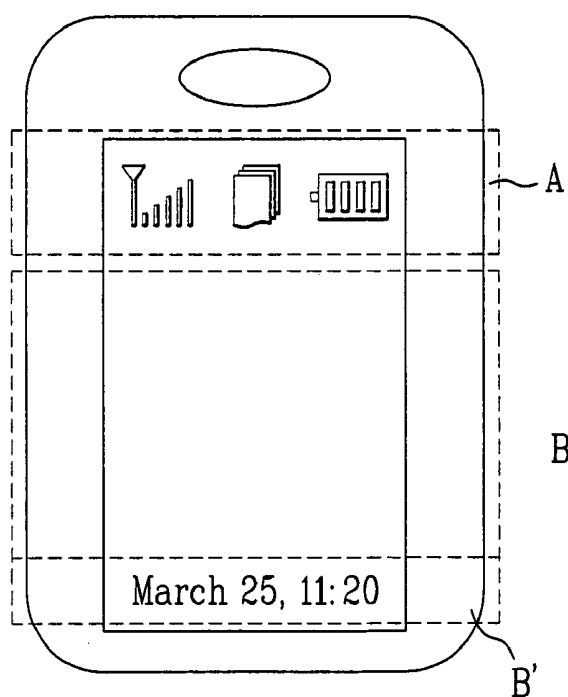


FIG. 5


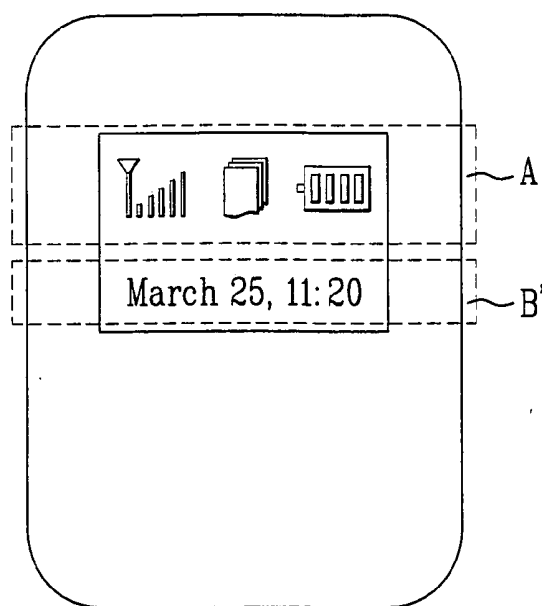


FIG. 6

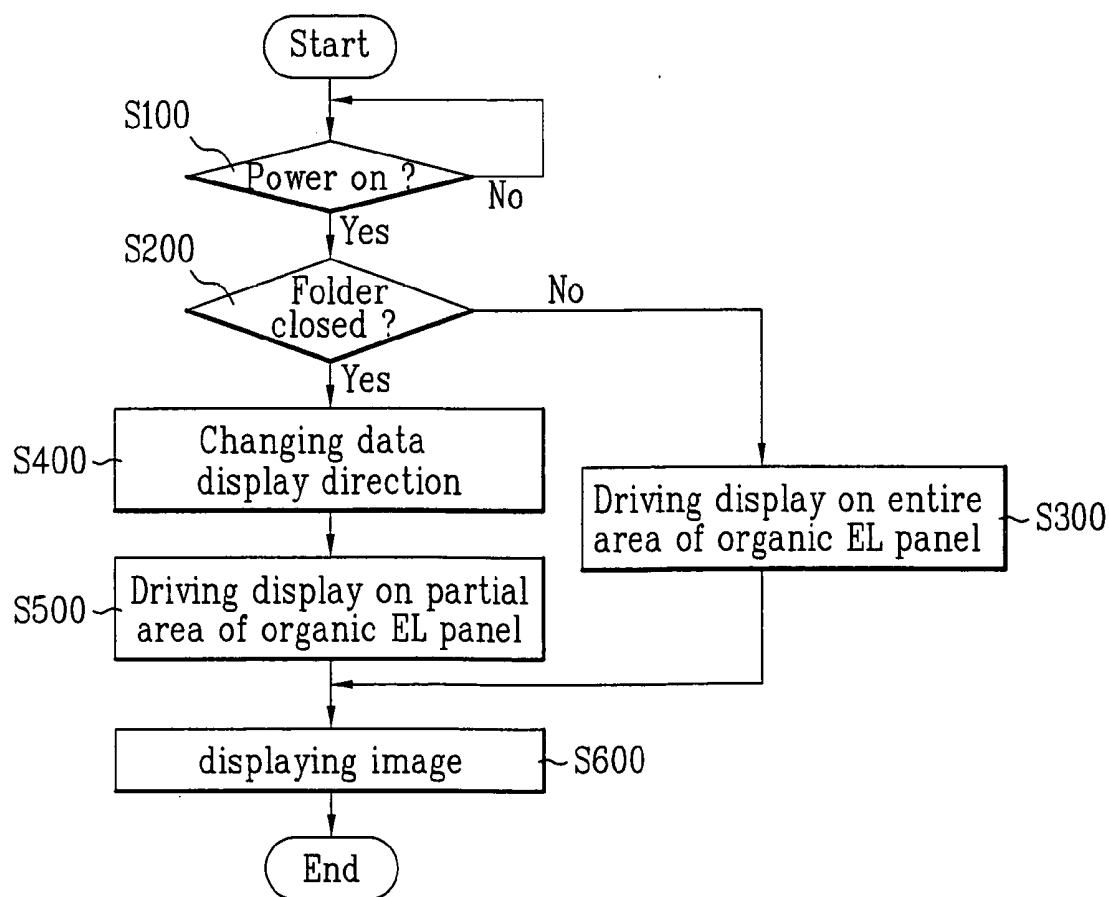

FOLDER TYPE MOBILE TERMINAL USING ORGANIC ELECTROLUMINESCENT PANEL AND DISPLAY METHOD THEREOF

[0001] This application claims the benefit of the Korean Application No. P2003-67506 filed on Sep. 29, 2004, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a mobile terminal and display method thereof, and more particularly, to a folder type mobile terminal using an organic electroluminescent panel and display method thereof, by which lights are emitted in both directions of upper and lower substrates of the organic electroluminescent panel.

[0004] 2. Discussion of the Related Art

[0005] Recently, various kinds of folder type mobile phones are marketed. In the folder type mobile phones, liquid crystal displays differing in size are mostly assembled to an inside and outside of a display panel, respectively.

[0006] Namely, when the liquid crystal displays are used for the general folder type mobile phone, a size of one LCD panel provided to the inside of the folder is greater than that of the other LCD panel provided to the outside of the folder.

[0007] Moreover, the LCD panel can be replaced by an organic EL (electroluminescent) panel as the display panel.

[0008] An organic EL device emits light in a following manner. First of all, electrons and holes are injected into a light-emitting layer from an electron injection electrode (cathode) and a hole injection electrode (anode), respectively so that the electrons and holes are coupled to each other to produce excitons. The excitons then fall down to a base state from an excited state to emit the light.

[0009] The organic EL device is more advantageous than the passive light-emitting device needing a separate light source such as LCD in that its response speed is as fast as that of a cathode ray tube (CRT).

[0010] And, the organic EL device has a low DC drive voltage and can be implemented into an ultra-slim size, thereby being applicable to a portable device.

[0011] FIG. 1 is a cross-sectional diagram of an organic EL panel according to a related art.

[0012] Referring to FIG. 1, a first electrode 2 is formed on a transparent substrate 1 by patterning a transparent material of ITO (indium tin oxide) by etching.

[0013] An organic luminescent layer 3 is formed on the first electrode 2. And, a second electrode 4 is formed of metal on the organic luminescent layer 3.

[0014] After substrate 5 formed of metal has been deposited over the above-explained structure, the substrates 5 and 1 are sealed using a sealant 6. In the configuration of the organic EL device according to the related art, light is emitted from the organic luminescent layer through the transparent substrate 1 only.

[0015] Since the related art folder type mobile terminal using the LCD or organic EL panel needs two kinds of display panels differing in size, the display panels should be separately controlled.

[0016] However, the number of parts for controlling the two kinds of the display panels increases twice, thereby degrading the competitiveness of the mobile phone in product cost.

SUMMARY OF THE INVENTION

[0017] Accordingly, the present invention is directed to a folder type mobile terminal and display method thereof that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0018] An object of the present invention is to provide a dual folder type mobile terminal and display method, by which images can be displayed using one organic EL panel enabling to bi-directionally transmit light through upper and lower substrates.

[0019] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0020] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a folder type mobile terminal according to the present invention includes an RF unit modulating a voice signal inputted from a user into a radio signal, the RF unit demodulating to output an antenna-received radio signal, an organic EL panel displaying an image, the organic EL panel including a lower substrate, an upper substrate on the lower substrate, and an organic luminescent layer between the lower and upper substrates to emit light bi-directionally transmitted through the lower and upper substrates, a sensor detecting an open or closed state of a folder of the mobile terminal to output a sensed signal, a control unit outputting a drive control signal for driving the organic EL panel according to the sensed signal received from the sensor, a drive unit receiving the drive control signal from the control unit to drive the organic EL panel, and a key input unit having a plurality of number keys for dialing and a plurality of function keys for performing specific functions respectively.

[0021] Preferably, the upper and lower substrates are transparent.

[0022] Preferably, the organic EL panel further includes a first electrode formed of ITO (indium tin oxide).

[0023] Preferably, the organic EL panel further includes a second electrode formed of a transparent metal-based material.

[0024] Preferably, if the folder is in the open state, the drive unit drives an entire area of the organic EL panel by scanning the entire area of the organic EL panel and then applying data to scanned pixels, and if the folder is in the closed state, the drive unit drives a partial area of the organic EL panel by scanning the partial area of the organic EL panel and then applying data to partially scanned pixels.

[0025] More preferably, if the folder is in the closed state, the drive unit applies a portion of the data displayed in case of the open state of the folder to the partially scanned pixels.

[0026] More preferably, the drive unit drives an alignment direction of the data displayed in case of the closed state of the folder to be reverse to a display direction of the data displayed in case of the open state of the folder.

[0027] In another aspect of the present invention, in a mobile terminal having an RF unit modulating a voice signal inputted from a user into a radio signal, the RF unit demodulating to output an antenna-received radio signal, a display method of a folder type mobile terminal includes the steps of outputting a sensed signal by deciding an open or closed state of a folder of the folder type mobile terminal, outputting a drive control signal for driving an organic EL panel displaying an image by emitting light bi-directionally through upper and lower substrates according to the sensed signal, driving the organic EL panel according to the drive control signal, and displaying the image on the organic EL panel according to the drive control signal.

[0028] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0030] FIG. 1 is a cross-sectional diagram of an organic EL panel according to a related art;

[0031] FIG. 2 is a cross-sectional diagram of an organic EL panel of a folder type mobile terminal according to the present invention;

[0032] FIG. 3 is a block diagram of a folder type mobile terminal using an organic EL panel according to the present invention;

[0033] FIG. 4 is a layout of an open folder of a folder type mobile terminal according to the present invention;

[0034] FIG. 5 is a layout of a closed folder of a folder type mobile terminal according to the present invention; and

[0035] FIG. 6 is a flowchart of a display method of a folder type mobile terminal using an organic EL panel according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0036] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0037] FIG. 2 is a cross-sectional diagram of an organic EL panel of a folder type mobile terminal according to the present invention.

[0038] Referring to FIG. 2, an organic EL panel 40 includes a first electrode 12 formed on a lower transparent

substrate 11 by patterning a transparent material of ITO (indium tin oxide) by etching, a second electrode 14 formed of metal patterned to cross with the first electrode 12, an organic luminescent layer 13 deposited on a pixel area defined on an intersection between the first and second electrodes 12 and 14 to emit light by a voltage applied between the first and second electrodes 12 and 14, an inorganic layer 15 formed to protect both of the organic luminescent layer 13 and the second electrode 14, an upper transparent substrate 16 formed on the inorganic layer 15, and a sealant 17 attaching the upper and lower transparent substrates 16 and 11 to each other.

[0039] The first and second electrode 12 and 14 inject holes and electrons into the organic luminescent layer 13, respectively.

[0040] As the upper and lower substrates 16 and 11 and the second electrode 14 are transparent, light can be bi-directionally transmitted through the upper and lower transparent substrates 16 and 11 of the organic EL panel 40.

[0041] FIG. 3 is a block diagram of a folder type mobile terminal using the organic EL panel 40 according to the present invention.

[0042] Referring to FIG. 3, a folder type mobile terminal includes a control unit 10, a key input unit 20, a drive unit 30, an organic EL panel 40, an RF processing unit 50, and a sensor 60.

[0043] The RF unit 50 modulates a voice signal inputted from a user into a radio signal to output to an antenna and demodulates to output a radio signal received via the antenna.

[0044] The organic EL panel 40, as explained in FIG. 2, includes the transparent upper and lower substrates 16 and 11 and the second electrode 14 formed of the transparent metal. Hence, light can be emitted from the organic luminescent layer 13 formed on the pixel area to be bi-directionally transmitted through both of the upper and lower substrates 16 and 11.

[0045] After having decided an open or closed state of a folder of the mobile terminal, the sensor 60 outputs a sensed signal to the control unit 10.

[0046] The control unit 10 controls an overall operation of the mobile terminal. The control unit 10 receives the sensed signal from the sensor 60 and then outputs a control signal for driving a display of the organic EL panel 40.

[0047] The drive unit 30 receives the control signal for driving the organic EL panel 40 from the control unit 10 and then drives the organic EL panel 40 to display data of an operational status of the mobile terminal, dialing, and the like appropriately thereon.

[0048] The drive unit 30 includes a scan drive IC 31 applying a scan signal for turning on each pixel of the organic EL panel 40 and a data drive IC 32 applying data to the corresponding pixel turned on by the scan drive IC 31.

[0049] And, the key input unit 20 includes a plurality of number keys for dialing or input and a plurality of function keys for performing specific functions.

[0050] Meanwhile, an operation of the folder type mobile terminal is explained in detail as follows.

[0051] First of all, after having decided an open or closed state of the folder, the sensor 60 outputs the corresponding sensed signal to the control unit 10.

[0052] After having received the sensed signal, the control unit 10 displays data using the organic EL panel 40 entirely if the folder is in the open state or sends the control signal to the drive unit 30 to display the data using the organic EL panel 40 in part if the folder is in the closed state.

[0053] Namely, once receiving the control signal indicating that the folder is in the open state, the drive unit 30 drives the entire portions of the organic panel 40 by having the scan drive IC 31 scan the entire portions of the organic EL panel 40 in a forward direction and by having the data drive IC 32 apply data to the scanned pixels.

[0054] On the other hand, once receiving the control signal indicating that the folder is in the closed state, the drive unit 30 partially drives the organic panel 40 by having the scan drive IC 31 scan some portions of the organic EL panel 40 and by having the data drive IC 32 apply data to the scanned pixels.

[0055] In doing so, when the folder is closed, the drive unit 30 applies a portion of the data displayed on the organic EL panel with the open folder to the partially scanned pixels.

[0056] And, by the drive unit 30, an alignment direction of the data displayed on an outside folder is made reverse to a display direction of the data appearing on an inside folder when the folder is open.

[0057] Thus, the folder type mobile terminal according to the present invention enables to display data on both sides of one organic EL panel 40 without using separate display devices on the inside and outside of the folder.

[0058] In doing so, data is displayed by entirely utilizing the organic EL panel 40 for the inside of the folder or by partially utilizing the organic EL panel 40 for the outside of the folder, whereby overall power consumption of the organic EL panel 40 can be minimized.

[0059] FIG. 4 is a layout of an open folder of a folder type mobile terminal according to the present invention.

[0060] Referring to FIG. 4, a display area appearing on the organic EL panel 40 can be divided into an icon part 'A' and a data part 'B' for convenience of description.

[0061] FIG. 5 is a layout of a closed folder of a folder type mobile terminal according to the present invention.

[0062] Referring to FIG. 5, if the folder is in the closed state, the drive unit 30 scans a portion of the organic EL panel 40 corresponding to a specific row to be displayed and changes a direction of the displayed data to display a specific image.

[0063] Once receiving the sensed signal indicating that the folder is in the closed state, the control unit 10 sends a drive control signal to enable the drive unit 30 to display the data on a partial area of the organic EL panel 40.

[0064] Namely, the scan drive IC 31 of the drive unit 30 scans the partial area of the organic EL panel 40 to display the data thereon. The data drive IC 32 changes the alignment direction of a portion of the data that will be displayed in case of the open state of the folder and then applies the data to the partially scanned pixels.

[0065] Thus, the icon part A and a portion B' of the data part B, as shown in the drawing, of the image displayed in case of the open state of the folder are displayed.

[0066] FIG. 6 is a flowchart of a display method of a folder type mobile terminal using an organic EL panel according to the present invention.

[0067] Referring to FIG. 6, the sensor 60 decides whether the power of the mobile terminal is turned on or off (S100).

[0068] If the power is turned on, the sensor 60 senses the open or closed state of the folder of the mobile terminal and then sends a corresponding signal to the control unit 10 (S200).

[0069] If the folder is open, the control unit 10 controls the drive unit 30 so that an image can be displayed on an entire area of the organic EL panel 40.

[0070] Namely, once receiving the control signal indicating that the folder is in the open state from the control unit 10, the drive unit 30 drives the entire parts of the organic EL panel 40 by having the scan drive IC 31 scan the entire parts of the organic EL panel 40 in a forward direction and by having the data drive IC 32 apply the data to the scanned pixels (S300).

[0071] On the other hand, if the folder is closed, the control unit 10 controls the drive unit 30 so that the image can be displayed on the partial area of the organic EL panel 40.

[0072] Namely, once receiving the control signal indicating that the folder is in the closed state, the drive unit 30 changes the display direction of the data into a direction reverse to the data display direction of the inside of the folder (S400).

[0073] And, the partial area of the organic EL panel 40 is driven by having the scan drive IC 31 scan the partial area of the organic EL panel 40 and by having the data drive IC 32 apply the data to the scanned pixels (S500).

[0074] Then, the organic EL panel 40 enables to display the corresponding image according to the drive signal of the drive unit 30.

[0075] Accordingly, the folder type mobile terminal according to the present invention brings about the following effects or advantages.

[0076] First of all, the first and second electrodes of the organic EL panel are formed of transparent metal as well as the sealed upper and lower substrates are formed of the transparent material. Hence, the present invention enables bilateral image displays through both sides of one organic EL panel, thereby reducing the product cost of the mobile terminal.

[0077] Secondly, the image can be displayed on the entire area of the organic EL panel in case of the open state of the folder or on the partial area of the organic EL panel in case of the closed state of the folder, whereby the present invention enables to reduce the power consumption thereof.

[0078] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this

invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A folder type mobile terminal comprising:

an RF unit modulating a voice signal inputted from a user into a radio signal, the RF unit demodulating to output an antenna-received radio signal;

an organic EL panel displaying an image, the organic EL panel comprising:

a lower substrate;

an upper substrate on the lower substrate; and

an organic luminescent layer between the lower and upper substrates to emit light bi-directionally transmitted through the lower and upper substrates;

a sensor detecting an open or closed state of a folder of the mobile terminal to output a sensed signal;

a control unit outputting a drive control signal for driving the organic EL panel according to the sensed signal received from the sensor;

a drive unit receiving the drive control signal from the control unit to drive the organic EL panel; and

a key input unit having a plurality of number keys for dialing and a plurality of function keys for performing specific functions respectively.

2. The folder type mobile terminal of claim 1, wherein the upper and lower substrates are transparent.

3. The folder type mobile terminal of claim 1, wherein the organic EL panel further comprises a first electrode formed of ITO (indium tin oxide).

4. The folder type mobile terminal of claim 1, wherein the organic EL panel further comprises a second electrode formed of a transparent metal-based material.

5. The folder type mobile terminal of claim 1, wherein if the folder is in the open state, the drive unit drives an entire area of the organic EL panel by scanning the entire area of the organic EL panel and then applying data to scanned pixels and wherein if the folder is in the closed state, the drive unit drives a partial area of the organic EL panel by scanning the partial area of the organic EL panel and then applying data to partially scanned pixels.

6. The folder type mobile terminal of claim 5, wherein if the folder is in the closed state, the drive unit applies a portion of the data displayed in case of the open state of the folder to the partially scanned pixels.

7. The folder type mobile terminal of claim 6, wherein the drive unit drives an alignment direction of the data displayed in case of the closed state of the folder to be reverse to a display direction of the data displayed in case of the open state of the folder.

8. In a mobile terminal having an RF unit modulating a voice signal inputted from a user into a radio signal, the RF unit demodulating to output an antenna-received radio signal, a display method of a folder type mobile terminal, comprising the steps of:

outputting a sensed signal by deciding an open or closed state of a folder of the folder type mobile terminal;

outputting a drive control signal for driving an organic EL panel displaying an image by emitting light bi-directionally through upper and lower substrates according to the sensed signal;

driving the organic EL panel according to the drive control signal; and

displaying the image on the organic EL panel according to the drive control signal.

9. The display method of claim 8, wherein the upper and lower substrates are formed of a transparent material.

10. The display method of claim 8, wherein the organic EL panel comprises a first electrode formed of ITO (indium tin oxide).

11. The display method of claim 8, wherein the organic EL panel comprises a second electrode formed of a transparent metal-based material.

12. The display method of claim 8, wherein if the folder is in the open state, the drive unit drives an entire area of the organic EL panel by scanning the entire area of the organic EL panel and then applying data to scanned pixels and wherein if the folder is in the closed state, the drive unit drives a partial area of the organic EL panel by scanning the partial area of the organic EL panel and then applying data to partially scanned pixels.

13. The display method of claim 12, wherein if the folder is in the closed state, the drive unit applies a portion of the data displayed in case of the open state of the folder to the partially scanned pixels.

14. The display method of claim 13, wherein the drive unit drives an alignment direction of the data displayed in case of the closed state of the folder to be reverse to a display direction of the data displayed in case of the open state of the folder.

* * * * *

专利名称(译)	使用有机电致发光面板的折叠型移动终端及其显示方法		
公开(公告)号	US20050107140A1	公开(公告)日	2005-05-19
申请号	US10/950673	申请日	2004-09-28
[标]申请(专利权)人(译)	金鹤SU		
申请(专利权)人(译)	金鹤SU		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM HAK SU		
发明人	KIM, HAK SU		
IPC分类号	H05B33/12 G09F9/30 G09F9/40 G09G3/20 G09G3/30 G09G3/32 H01L27/32 H01L51/50 H04M1/02 H04M1/73 H05B33/28 H01J1/62		
CPC分类号	G09G3/20 G09G3/3208 G09G2310/04 H04M2250/16 H04M1/0214 H04M1/0245 H04M2250/12 G09G2340/0492		
优先权	1020030067506 2003-09-09 KR		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种双折叠型移动终端和显示方法，通过该方法可以使用一个有机EL面板显示图像，该有机EL面板能够通过上基板和下基板双向传输光。本发明包括RF单元，用于将从用户输入的语音信号调制成无线电信号，RF单元解调以输出天线接收的无线电信号，显示图像的有机EL面板，包括下基板的有机EL面板，下基板上的上基板，以及下基板和上基板之间的有机发光层，以发射通过下基板和上基板双向传输的光，传感器检测移动终端的折叠器的打开或关闭状态以输出感测信号，控制单元输出用于根据从传感器接收的感测信号驱动有机EL面板的驱动控制信号，驱动单元从控制单元接收驱动控制信号以驱动有机EL面板，以及密钥输入单元具有多个用于拨号的数字键和多个用于分别执行特定功能的功能键。

