

Lee et al.

(10) **Pub. No.: US 2007/0126357 A1**

(43) **Pub. Date:** **Jun. 7, 2007**

(54) **ELECTROLUMINESCENT DISPLAY APPARATUS**

Publication Classification

(76) Inventors: **Ho Seok Lee**, Suwon-si (KR);
Jong-Woo Lee, Suwon-si (KR)

(51) **Int. Cl.**
H05B 33/04 (2006.01)
H01L 51/50 (2006.01)

Correspondence Address:
LEE & MORSE, P.C.
3141 FAIRVIEW PARK DRIVE
SUITE 500
FALLS CHURCH, VA 22042 (US)

(52) **U.S. Cl.** **313/512**; 313/503; 313/502;
313/504

(57) **ABSTRACT**

(21) Appl. No.: 11/634,219

(22) Filed: **Dec. 6, 2006**

(30) **Foreign Application Priority Data**

Dec. 7, 2005 (KR) 10-2005-0118837

An electroluminescent display apparatus, including a substrate having a scale pattern, a display unit, a sealing substrate affixed to the substrate to enclose the display unit therebetween, and a sealant disposed on the scale pattern between the substrate and the sealing substrate.

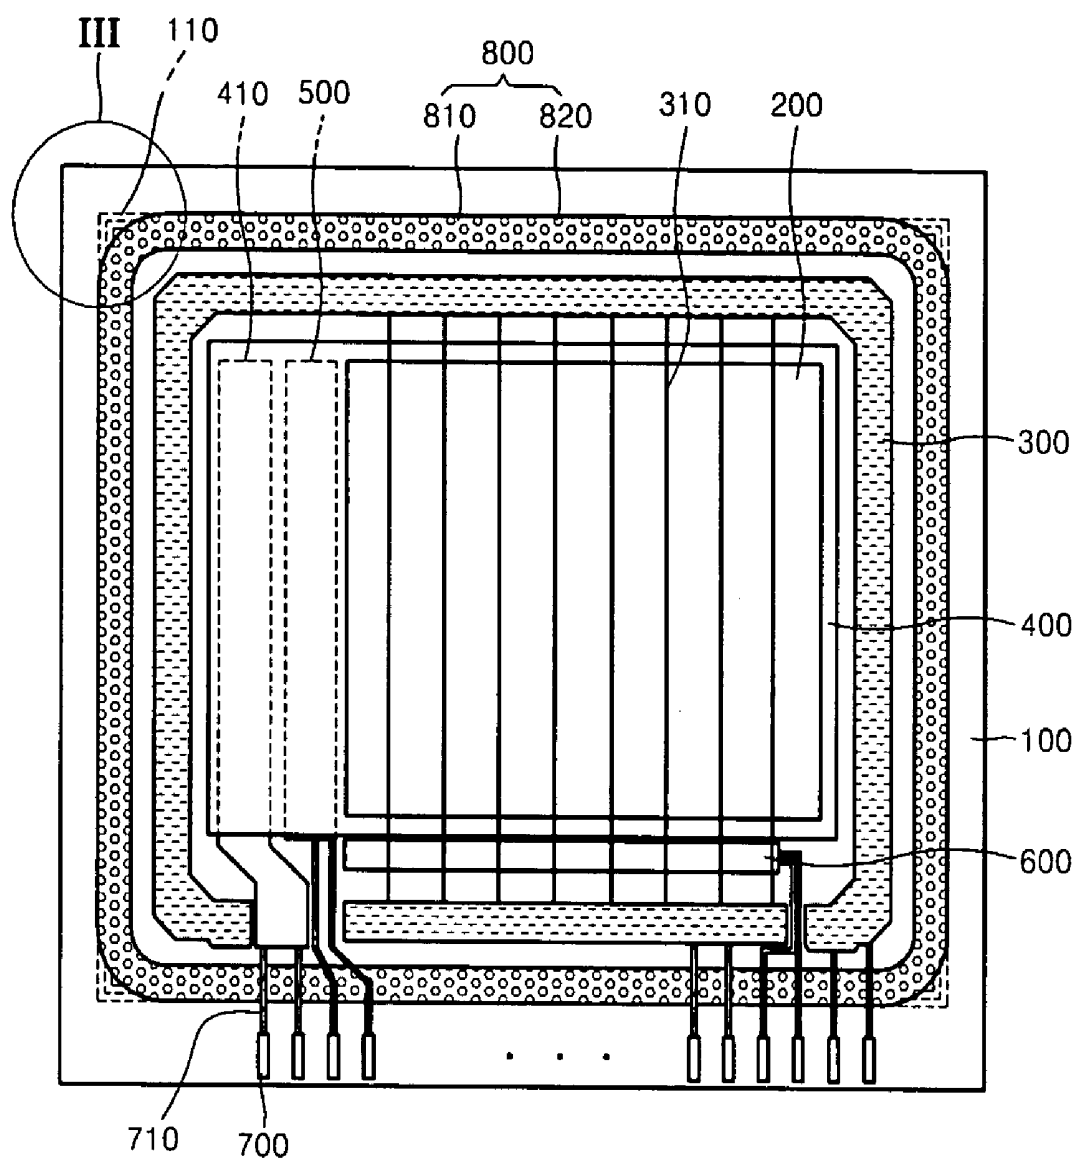


FIG. 1 (RELATED ART)

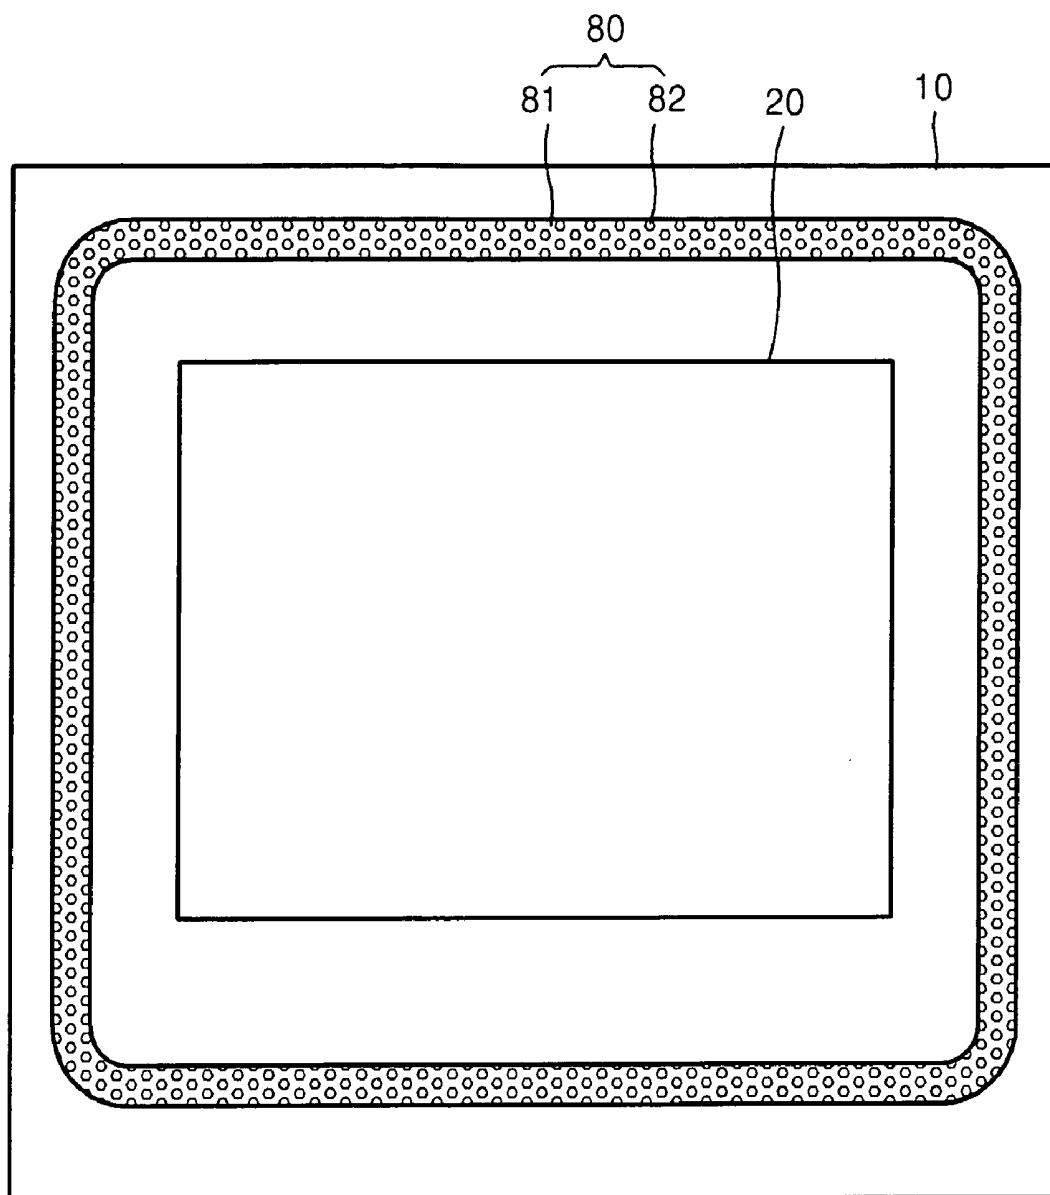


FIG. 2


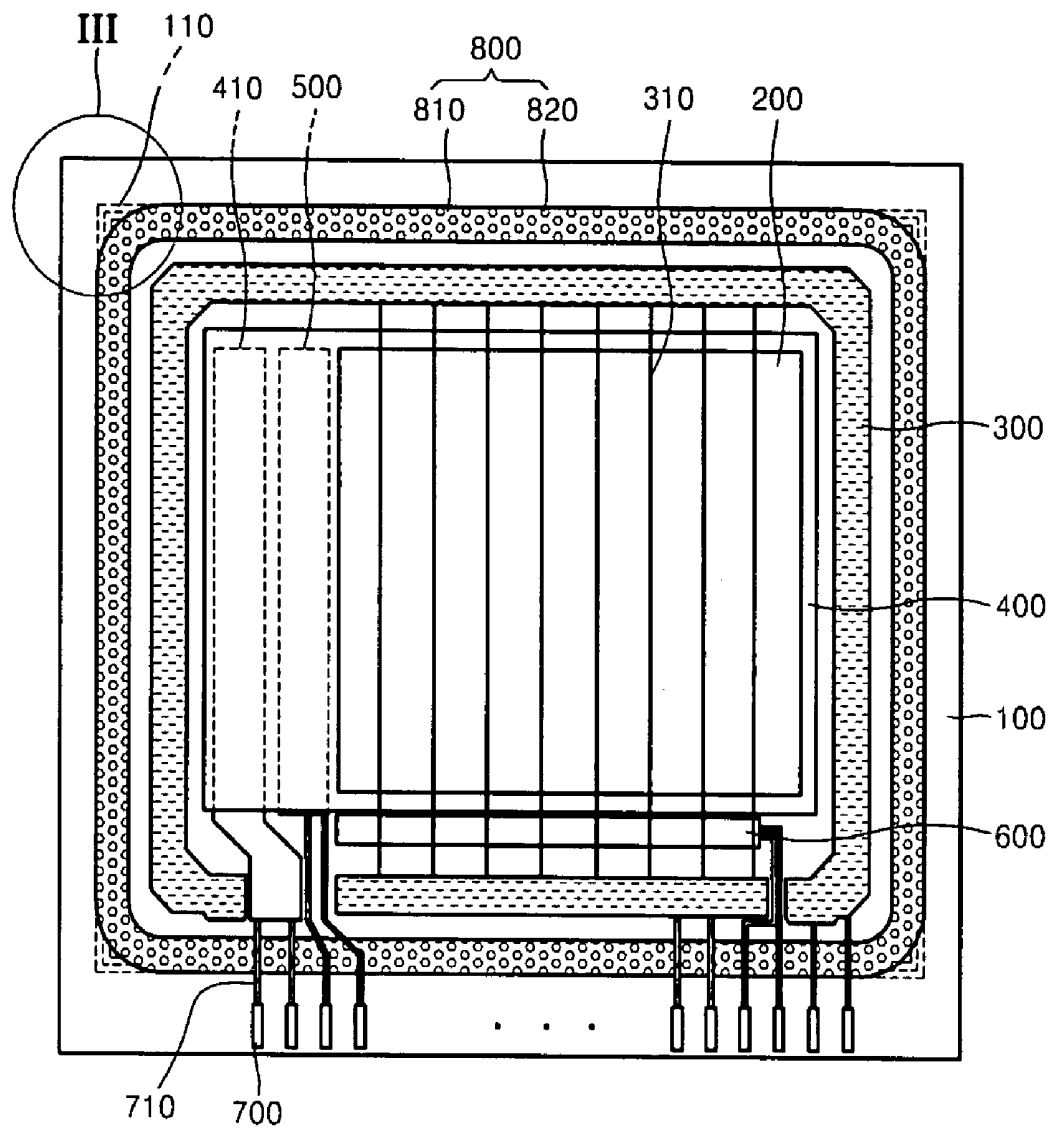


FIG. 3

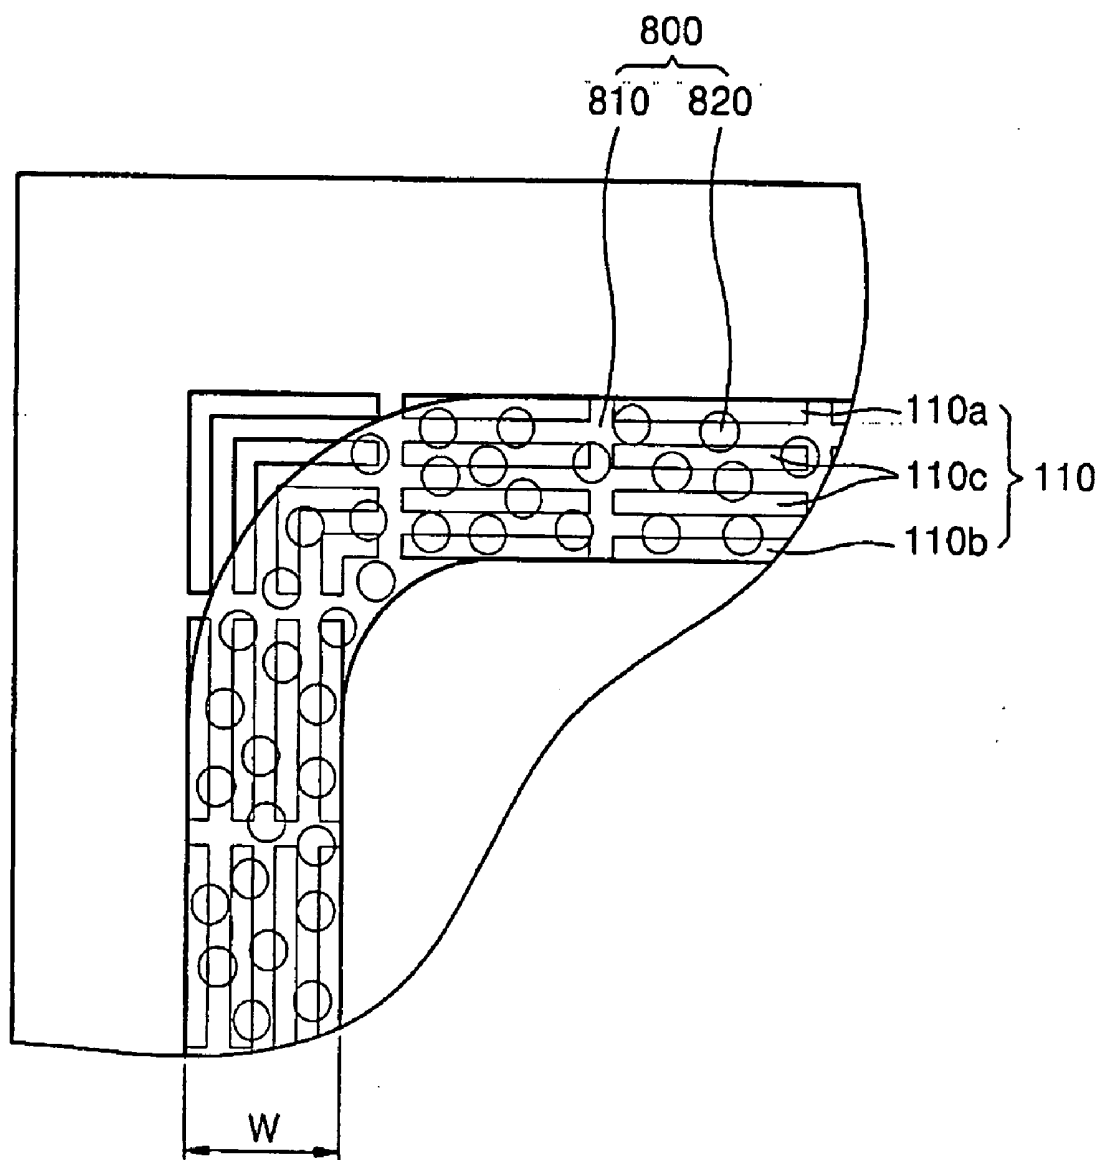

ELECTROLUMINESCENT DISPLAY APPARATUS**BACKGROUND OF THE INVENTION****[0001] 1. Field of the Invention**

[0002] The present invention relates to an electroluminescent display apparatus. In particular, the present invention relates to an electroluminescent display apparatus having a substrate structure capable of facilitating measurement of a width of a sealant employed thereon.

[0003] 2. Description of the Related Art

[0004] In general, an electroluminescent display apparatus may refer to a thin, light display device, such as an organic light emitting display device. The conventional electroluminescent display apparatus may include a display unit with a plurality of light emitting diodes positioned on a substrate.

[0005] Additionally, the conventional electroluminescent display apparatus may include a sealing substrate to protect the light emitting diodes from degradation caused by an oxidation, i.e., an interaction with oxygen from indium-tin-oxide (ITO) used in electrodes, a reaction between interfaces of light emitting layers, or by external impurities, e.g., moisture, oxygen, ultraviolet rays, manufacturing conditions, and so forth. The sealing substrate may be attached to the substrate by a sealant to enclose the display unit therebetween. The conventional sealant **80**, as illustrated in FIG. 1, may include spacers **82** to minimize compression of the display unit **20** and maintain a predetermined distance between the substrate **10** and the sealing substrate (not shown).

[0006] Application of the sealant **80** to the electroluminescent display apparatus may involve consideration of a width thereof. More specifically, the sealant **80** should be sufficiently wide to prevent penetration of external impurities therethrough. On the other hand, an excessive width of the sealant **80** may trigger sealant penetration into the display unit and cause a malfunction thereof. Accordingly, the width of the sealant **80** may be evaluated to provide proper operation of the electroluminescent display apparatus.

[0007] However, the width of the conventional sealant **80** employed in the conventional electroluminescent display apparatus is often evaluated by the naked eye upon attaching the substrate **10** with the sealing substrate. More importantly, the conventional sealant **80** may be transparent, thereby triggering measuring errors regarding the width thereof. Consequently, the width of the conventional sealant **80** in the conventional electroluminescent display apparatus may not be correctly measured and applied, thereby generating potential malfunctioning of the display unit.

[0008] Accordingly, there exists a need to provide an electroluminescent display apparatus having a structure capable of facilitating measurement of the sealant width employed therein.

SUMMARY OF THE INVENTION

[0009] The present invention is therefore directed to an electroluminescent display apparatus, which substantially overcomes one or more of the disadvantages of the related art.

[0010] It is therefore a feature of an embodiment of the present invention to provide an electroluminescent display apparatus having a substrate structure capable of facilitating measurement of a width of a sealant employed thereon.

[0011] At least one of the above and other features and advantages of the present invention may be realized by providing an electroluminescent display apparatus, including a substrate having a scale pattern, a display unit, a sealing substrate affixed to the substrate to enclose the display unit therebetween, and a sealant disposed on the scale pattern between the substrate and the sealing substrate.

[0012] The scale pattern may be formed along a perimeter of the substrate. The scale pattern may be discontinuous. Additionally, the scale pattern may include grooves in a surface of the substrate. Alternatively, the scale pattern may include protrusions on a surface of the substrate, wherein the protrusion may be formed of metal.

[0013] The scale pattern may include an outer pattern and an inner pattern spaced apart by a predetermined distance, wherein the predetermined distance may be about equal to a desired width of the sealant. The scale pattern may further include at least one intermediate pattern between the outer pattern and the inner pattern. The at least one intermediate pattern may be disposed between the outer pattern and the inner pattern and in parallel thereto. Further, the intermediate pattern may be positioned at equal distances between the outer and inner patterns. The scale pattern may include a plurality of intermediate patterns at equal intervals between the outer and inner patterns.

[0014] The sealant of the electroluminescent display apparatus may be disposed around the display unit. Additionally, the sealant may include an epoxy material.

[0015] The electroluminescent display apparatus may be an organic light-emitting display apparatus. Additionally, either the substrate or the sealing substrate of the electroluminescent display apparatus may be transparent.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The above and other features and advantages of the present invention will become more apparent to those of ordinary skill in the art by describing in detail exemplary embodiments thereof with reference to the attached drawings, in which:

[0017] FIG. 1 illustrates a schematic plan view of a conventional electroluminescent display apparatus;

[0018] FIG. 2 illustrates a plan view of an electroluminescent display apparatus according to an embodiment of the present invention; and

[0019] FIG. 3 illustrates an enlarged view of region "III" illustrated in FIG. 2.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Korean Patent Application No. 10-2005-0118837, filed on Dec. 7, 2005, in the Korean Intellectual Property Office, and entitled: "Organic Light Emitting Display Apparatus," is incorporated by reference herein in its entirety.

[0021] The present invention will now be described more fully hereinafter with reference to the accompanying draw-

ings, in which exemplary embodiments of the invention are shown. The invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0022] In the figures, the dimensions of elements and regions may be exaggerated for clarity of illustration. It will also be understood that when an element is referred to as being "on" another element or substrate, it can be directly on the other element or substrate, or intervening elements may also be present. Further, it will be understood that when an element is referred to as being "under" another element, it can be directly under, or one or more intervening elements may also be present. In addition, it will also be understood that when an element is referred to as being "between" two elements, it can be the only element between the two elements, or one or more intervening elements may also be present. Like reference numerals refer to like elements throughout.

[0023] An exemplary embodiment of an electroluminescent display apparatus according to the present invention is more fully described below with reference to FIG. 2.

[0024] As illustrated in FIG. 2, an electroluminescent display apparatus according to an embodiment of the present invention may include a display unit 200, a substrate 100 made of glass, metal, or plastic, and a sealing substrate (not shown). Additionally, the electroluminescent display apparatus according to an embodiment of the present invention may include a sealant 800 to attach the sealing substrate to the substrate 100 having the display unit 200 therebetween.

[0025] The electroluminescent display apparatus according to an embodiment of the present invention may also include a vertical circuit unit 500, a horizontal circuit unit 600, and a driving power wire unit 300. The vertical and horizontal circuit units 500 and 600 may be positioned outside the display unit 200 and electrically connected to a terminal 700 via a wire 710 in order to transmit signals to a plurality of thin film transistors in the display unit 200. The driving power wire unit 300 may be positioned outside the display unit 200 and electrically connected to the terminal 700 via a plurality of driving lines 310 included in the display unit 200 in order to supply driving power thereto.

[0026] The display unit 200 of the electroluminescent display device according to an embodiment of the present invention may be an electroluminescent display unit, e.g., an organic light emitting display unit, having a plurality of light emitting diodes, e.g., organic light emitting diodes, positioned on the substrate 100 and forming a plurality of pixels. Each light emitting diode may include a pixel electrode (not shown), a facing electrode 400, and an intermediate layer therebetween (not shown) having at least one light-emitting layer.

[0027] The pixel electrode of the display unit 200 may be a transparent electrode or a reflective electrode. If the pixel electrode is a transparent electrode, it may be formed of any one of indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), or indium oxide (In_2O_3). If the pixel electrode is a reflective electrode, it may be formed of any one of indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide

(ZnO), or indium oxide (In_2O_3) deposited on a reflection film made of silver (Ag), magnesium (Mg), aluminum (Al), platinum (Pt), palladium (Pd), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), chromium (Cr), lithium (Li), calcium (Ca), any other like metal, or a combination thereof.

[0028] The facing electrode 400 of the display unit 200 may also be either a transparent electrode or a reflective electrode. Accordingly, if the facing electrode 400 is a transparent electrode, it may be formed of an auxiliary electrode layer or a bus electrode line deposited onto a metal material having a low work function. For example, the auxiliary electrode layer or the bus electrode line may be formed of any one of indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), or indium oxide (In_2O_3), and the metal material having a low work function may be any one of lithium (Li), calcium (Ca), lithium-fluoride-calcium (LiF/Ca), lithium-fluoride-aluminum (LiF/Al), silver (Ag), magnesium (Mg), aluminum (Al), a like metal, or a combination thereof. If the facing electrode 400 is a reflective electrode, it may be formed of a layer of lithium (Li), calcium (Ca), lithium-fluoride-calcium (LiF/Ca), lithium-fluoride-aluminum (LiF/Al), silver (Ag), magnesium (Mg), aluminum (Al), or a like metal material. However, it should be noted that other materials for forming the pixel electrode and facing electrode 400 are not excluded from the scope of the present invention. For example, the pixel electrode and the facing electrode 400 may be formed of an organic material, e.g., a conductive polymer.

[0029] The facing electrode 400 of the light emitting diode according to an embodiment of the present invention may be connected to the terminal 700 through an electrode wire unit 410 and the wire 710 positioned outside the display unit 200.

[0030] The intermediate layer of the display unit 200 may include at least one phosphorescent layer made of any known type of organic or inorganic light-emitting material known in the art, e.g., low-molecular weight organic material, polymeric organic material, and so forth, to emit light through a combination of holes and electrons supplied from the pixel electrode and facing electrode 400. If the intermediate layer is made of a low-molecular weight organic material, it may be formed of any one of copper phthalocyanine (CuPc), N,N'-di(naphthalene-1-yl)-N, N'-diphenylbenzidine (NPB), tris-8-hydroxyquinoline aluminum (Alq_3), or a like material by any method known in the art, such as an evaporation method. The intermediate layer may be formed to have a single or a composite structure having at least one of a hole injection layer (HIL), a hole transport layer (HTL), an emission layer (EML), an electron transport layer (ETL), and an electron injection layer (EIL). If the intermediate layer is formed of a polymeric organic material, it may be formed to have a structure including an HTL and an EML by way of screen printing or ink jet printing. The HTL may be formed of poly-(2,4)-ethylene-dihydroxythiophene (PEDOT), and the EML may be formed of Poly-Phenylenevinylene (PPV) or Polyfluorene polymer organic material. However, it should be noted that other structures of the intermediate layer are not excluded from the scope of the present invention.

[0031] The sealant 800 of the electroluminescent display apparatus according to an embodiment of the present invention may include an adhesive component 810 and a plurality of spacers 820, as illustrated in FIGS. 1-2. The adhesive

component **810** may be any adhesive, e.g., epoxy material, known in the art that may be employed to attach the substrate **100** and the sealing substrate. The plurality of spacers **820** may be of any convenient material and shape as determined by one of ordinary skill in the art.

[0032] The sealant **800** may be formed around the display unit **200**, as illustrated in FIG. 2. More specifically, the sealant **800** may be applied to peripheral areas, i.e., along a perimeter, of the substrate **100**, such that the sealing substrate may be applied thereto to form an enclosed space therebetween for the display unit **200**. Without intending to be bound by theory, it is believed that the adhesive component **810** and the geometric shape, i.e., a configuration surrounding the display unit **200**, of the sealant **800** may minimize penetration of external impurities therethrough into the display unit **200**. Additionally, it is believed that the use of the sealant **800** may prevent compression of the display unit **200** by the sealing substrate upon attachment of the sealing substrate to the substrate **100** and maintain a constant distance therebetween.

[0033] The substrate **100** of the electroluminescent display apparatus according to an embodiment of the present invention may include a scale pattern **110**. The scale pattern **110** may include a series of continuous or discontinuous markings, e.g., bars, formed on the peripheral areas of the substrate **100**, i.e., along a perimeter thereof, to correspond to the sealant **800** applied thereto. In other words, the sealant **800** may be applied to the peripheral areas of the substrate **100** that include the scale pattern **110**, as illustrated in FIG. 3. Without intending to be bound by theory, it is believed that the scale pattern **110** may provide gradations of a ruler to facilitate measurement of a width of the sealant **800**.

[0034] In this respect, it should be noted that “continuous” markings refer to uninterrupted markings formed along the entire perimeter of the substrate **100**. “Discontinuous” markings refer to repetitive markings that are formed sequentially with intervals therebetween along the perimeter of the substrate **100**. Further, a “width” of the sealant **800** refers to a distance as measured from one edge of the sealant **800** to a parallel edge of the sealant **800** along a direction parallel to a plane of the substrate **100**, as illustrated in FIG. 3.

[0035] The scale pattern **110** may include an outer pattern **110a** positioned along an outer perimeter of the scale pattern **110** and an inner pattern **110b** positioned along an inner perimeter of the scale pattern **110** to have a predetermined distance therebetween. Each of the outer and inner patterns **110a** and **110b** may be either continuous or discontinuous. Additionally, each of the outer and inner patterns **110a** and **110b** may be parallel to an edge of the substrate **100**.

[0036] In this respect, it should be noted that the “predetermined distance” refers to a constant distance between the outer and inner patterns **110a** and **110b** as measured in a direction parallel to the width of the sealant. More specifically, the predetermined distance may refer to a desirable width *W* of the sealant **800**. It should further be noted that the “desirable distance *W*” refers to a width of the sealant **800** as determined by one of ordinary skill in the art to be sufficiently large to attach the substrate **100** to the sealing substrate and to prevent penetration of external impurities through it, while being sufficiently small to avoid excess penetration into the display unit. Without intending to be bound by theory, it is believed that forming the predeter-

mined distance between the inner and outer patterns **110a** and **110b** to correspond to the desirable width *W* of the sealant **800** may be advantageous for determining an excessive or deficient amount of sealant **800** applied to the substrate **100**.

[0037] The scale pattern **110** may further include an intermediate pattern **110c** positioned at equal intervals between the inner and outer patterns **110a** and **110b**, as illustrated in FIG. 3. The intermediate pattern **110c** may include any number of markings between the inner and outer patterns **110a** and **110b** as determined by one of ordinary skill in the art and should not be limited to the embodiment illustrated in FIG. 3. For example, the intermediate pattern **110c** may include two or three parallel patterns between the inner and outer patterns **110a** and **110b**. A plurality of markings positioned between the inner and outer patterns **110a** and **110b** may facilitate determination of a deficient amount of sealant **800**.

[0038] The scale pattern **110** may be formed at corner portions of the substrate **100** at any convenient shape, e.g., angular, curved, and so forth, that may correspond to a shape of the substrate **100** and the sealant **800** applied thereon. For example, as illustrated in FIG. 3, the scale pattern **110** may have an angular shape that may correspond to the shape of the substrate **100** and be extended beyond the sealant **800** to facilitate measurement thereof.

[0039] The scale pattern **110** may be formed as protrusions or grooves on a surface of the substrate **100**. For example, the scale pattern **110** may be formed as metal protrusions by the same process employed for forming a thin film transistor of the display unit **200**.

[0040] Without intending to be bound by theory, it is believed that employing the scale pattern **110** in the substrate **100** of the electroluminescent display apparatus in accordance with the present invention, may facilitate the measurement of the width *W* of the sealant **800** upon application thereof between the substrate **100** and the sealing substrate. In particular, the scale pattern **110** may provide an advantageous way for determining by the naked eye, i.e., visual detection without optical aides, the width of the sealant **800** and the deficient/excessive amount thereof. In this respect, it should be noted that observation of the sealant **800** may be facilitated if either the substrate **100** or the sealing substrate is transparent.

[0041] Exemplary embodiments of the present invention have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. Accordingly, it will be understood by those of ordinary skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims. For example, even though the exemplary embodiment described herein refers to an electroluminescent display apparatus, it should be noted that other flat panel display apparatuses, e.g., liquid crystal display devices, are not excluded from the scope of the present invention.

What is claimed is:

1. An electroluminescent display apparatus, comprising:
a substrate having a scale pattern;
a display unit;
a sealing substrate affixed to the substrate to enclose the display unit therebetween; and
a sealant disposed on the scale pattern between the substrate and the sealing substrate.
2. The electroluminescent display apparatus as claimed in claim 1, wherein the scale pattern is formed along a perimeter of the substrate.
3. The electroluminescent display apparatus as claimed in claim 1, wherein the scale pattern includes grooves in a surface of the substrate.
4. The electroluminescent display apparatus as claimed in claim 1, wherein the scale pattern includes protrusions on a surface of the substrate.
5. The electroluminescent display apparatus as claimed in claim 4, wherein the scale pattern is formed of metal.
6. The electroluminescent display apparatus as claimed in claim 1, wherein the scale pattern comprises an outer pattern and an inner pattern having a predetermined distance therebetween.
7. The electroluminescent display apparatus as claimed in claim 6, wherein the scale pattern is discontinuous.

8. The electroluminescent display apparatus as claimed in claim 6, wherein the predetermined distance is about equal to a desired width of the sealant.

9. The electroluminescent display apparatus as claimed in claim 6, wherein the scale pattern further comprises at least one intermediate pattern disposed between the outer pattern and the inner pattern and in parallel thereto.

10. The electroluminescent display apparatus as claimed in claim 9, wherein the at least one intermediate pattern is positioned at equal distances between the outer and inner patterns.

11. The electroluminescent display apparatus as claimed in claim 6, wherein the scale pattern comprises a plurality of intermediate patterns at equal intervals between the outer and inner patterns.

12. The electroluminescent display apparatus as claimed in claim 1, wherein either the substrate or the sealing substrate is transparent.

13. The electroluminescent display apparatus as claimed in claim 1, wherein the sealant is disposed around the display unit.

14. The electroluminescent display apparatus as claimed in claim 1, wherein the sealant includes an epoxy material.

15. The electroluminescent display apparatus as claimed in claim 1, wherein the electroluminescent display apparatus is an organic light-emitting display apparatus.

* * * * *

专利名称(译)	电致发光显示装置		
公开(公告)号	US20070126357A1	公开(公告)日	2007-06-07
申请号	US11/634219	申请日	2006-12-06
[标]申请(专利权)人(译)	李浩小号 李钟WOO		
申请(专利权)人(译)	李浩小号 李钟WOO		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE HO SEOK LEE JONG WOO		
发明人	LEE, HO SEOK LEE, JONG-WOO		
IPC分类号	H05B33/04 H01L51/50		
CPC分类号	H01L27/3244 H01L51/5237 H01L51/5246		
优先权	1020050118837 2005-12-07 KR		
其他公开文献	US7608995		
外部链接	Espacenet USPTO		

摘要(译)

一种电致发光显示装置，包括具有刻度图案的基板，显示单元，固定到基板以将显示单元封闭在其间的密封基板，以及设置在基板和密封基板之间的刻度图案上的密封剂。

