


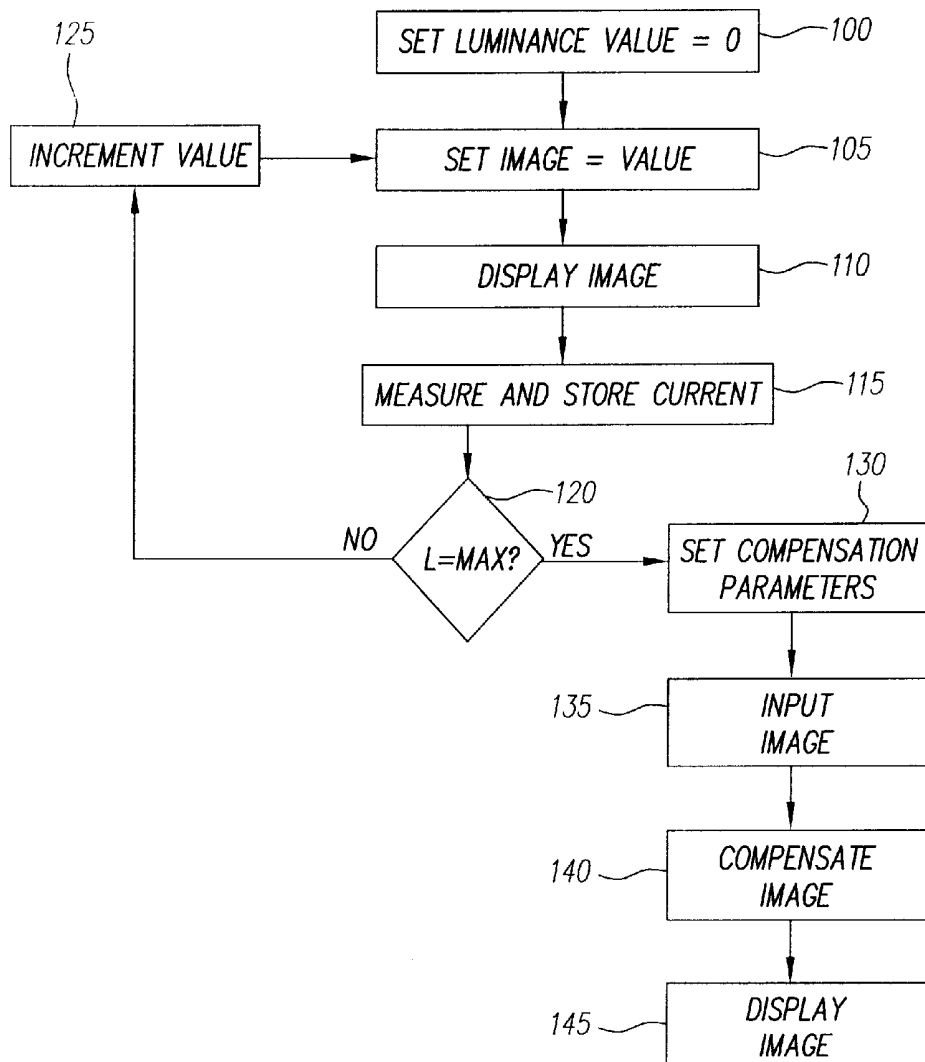


US 20070290947A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0290947 A1**
(43) **Pub. Date: Dec. 20, 2007**(54) **METHOD AND APPARATUS FOR
COMPENSATING AGING OF AN
ELECTROLUMINESCENT DISPLAY****Publication Classification**(51) **Int. Cl.**
G09G 3/12 (2006.01)(52) **U.S. Cl.** **345/45**(57) **ABSTRACT**

A method of compensating an electroluminescent display device having light-emitting elements that change with use, comprising the steps of: a) using the device to display images; b) sequentially displaying an ordered series of calibration images, wherein each of the calibration images have one or more corresponding flat fields, at least one of the corresponding flat fields of each calibration image of the ordered series has a different luminance value, and the calibration images are arranged in the ordered series so as to reduce perceived luminance discontinuities; c) measuring and recording current used by the display for each sequentially displayed calibration image; d) calculating compensation parameters based on the measured currents; e) compensating an input image using the compensation parameters; and f) displaying the compensated input image.

(76) **Inventor:** **Ronald S. Cok, Rochester, NY**
(US)**Correspondence Address:****David Novais****Patent Legal Staff****Eastman Kodak Company, 343 State Street**
Rochester, NY 14650-2201(21) **Appl. No.:** **11/765,795**(22) **Filed:** **Jun. 20, 2007****Related U.S. Application Data**(63) Continuation-in-part of application No. 11/424,568,
filed on Jun. 16, 2006.

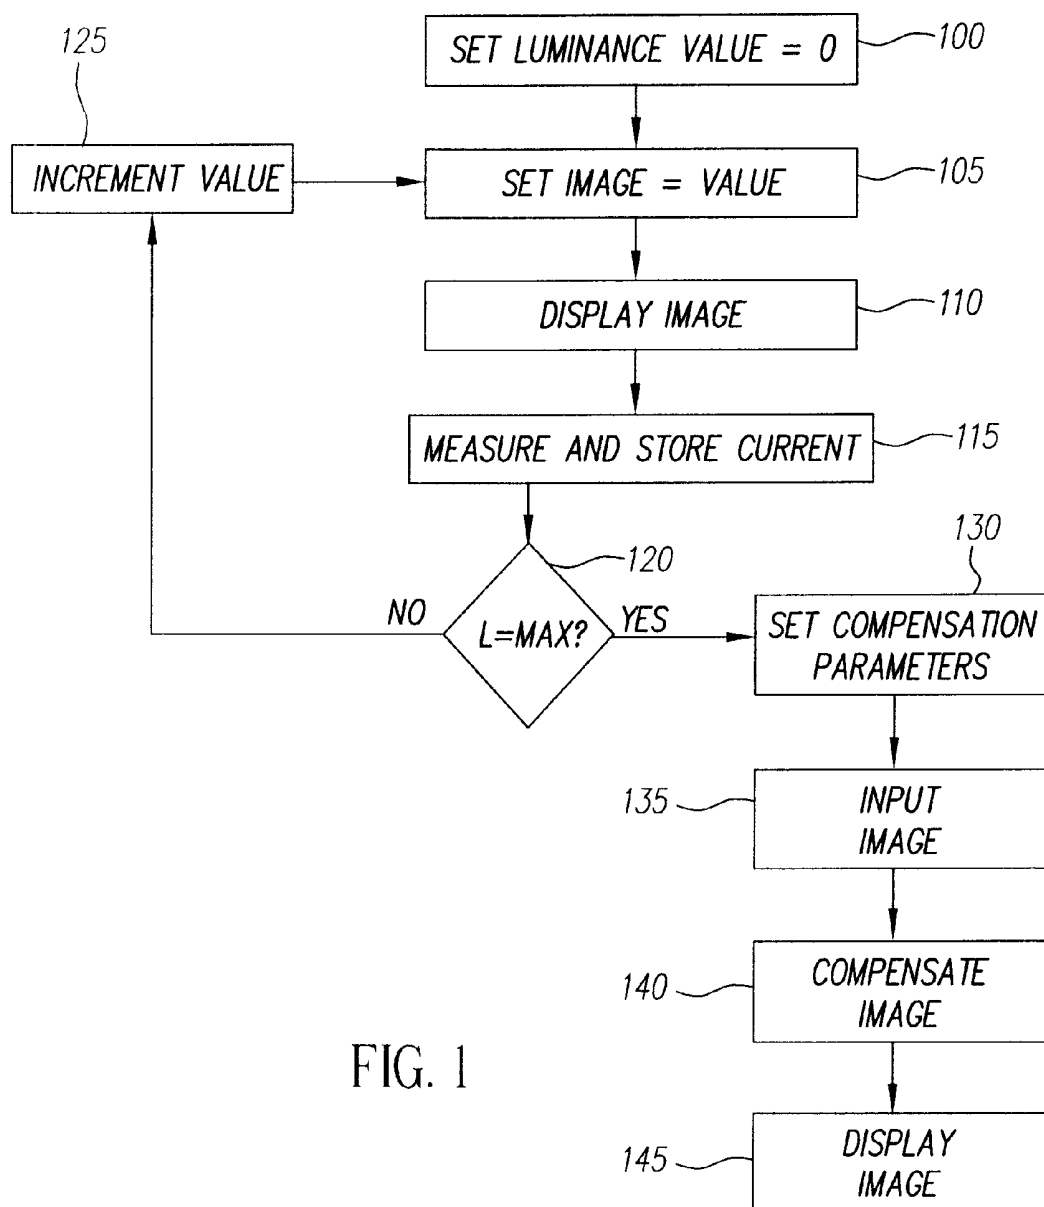

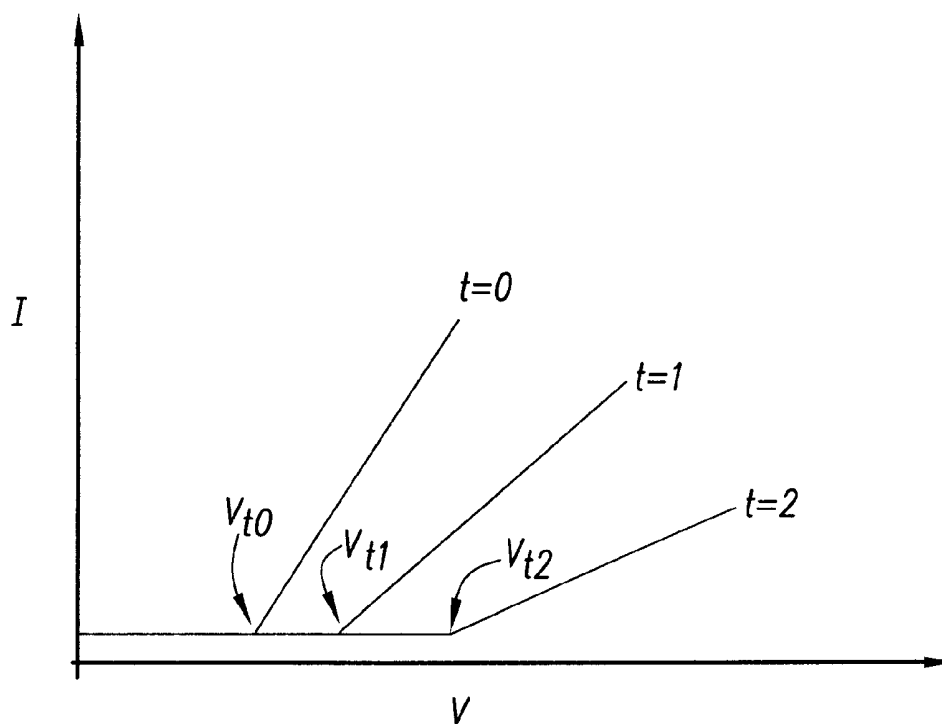


FIG. 2

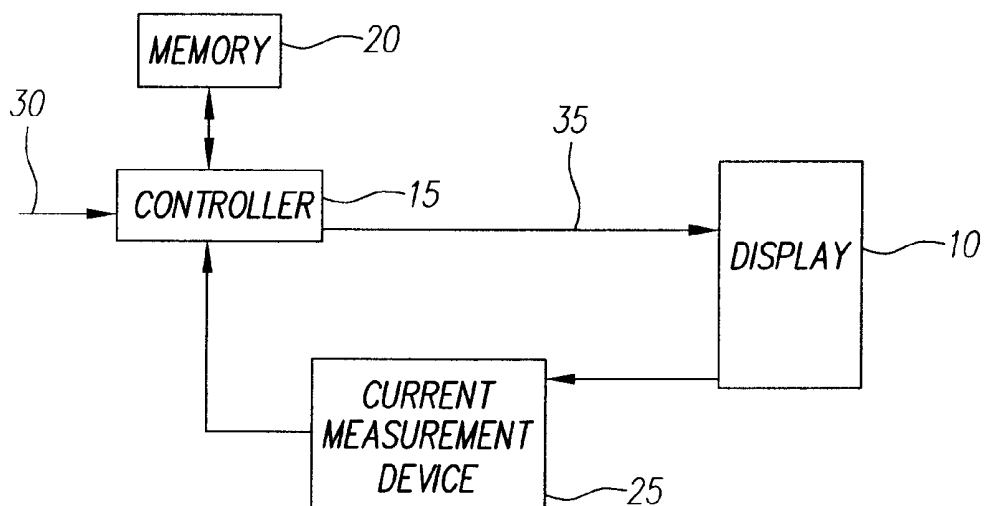


FIG. 3

METHOD AND APPARATUS FOR COMPENSATING AGING OF AN ELECTROLUMINESCENT DISPLAY

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This is a continuation-in-part of application Ser. No. 11/424,568, filed 16 Jun. 2006, entitled "METHOD AND APPARATUS FOR COMPENSATING AGING OF AN OLED DISPLAY" by Ronald S. Cok.

FIELD OF THE INVENTION

[0002] The present invention relates to electroluminescent (EL) display devices having light-emitting elements that change with use and, more particularly, compensating for changes in the EL device during customer use.

BACKGROUND OF THE INVENTION

[0003] Flat-panel display devices, for example plasma, liquid crystal and electroluminescent (EL) displays have been known for some years and are widely used in electronic devices to display information and images. EL display devices rely upon thin-film layers of materials coated upon a substrate, and include organic, inorganic and hybrid inorganic-organic light-emitting diodes (LEDs). The thin-film layers of materials can include, for example, organic materials, inorganic materials such as quantum dots, fused inorganic nano-particles; and electrodes, conductors, zinc oxide, and silicon electronic components as are known and taught in the LED art. Such devices employ both active-matrix and passive-matrix control schemes and can employ a plurality of light-emitting elements. The light-emitting elements are typically arranged in two-dimensional arrays with a row and a column address for each light-emitting element and having a data value associated with each light-emitting element to emit light at a brightness corresponding to the associated data value.

[0004] Active-matrix electroluminescent devices typically employ thin-film electronic components formed on the same substrate as the light-emitting elements thereof to control light emission from individual light-emitting elements thereof. Such thin-film electronic components are subject to manufacturing process variabilities that may cause such components to have variable performance. In particular, the voltage at which thin-film transistors turn on ("threshold voltage") may vary. Low-temperature polysilicon (LTPS) devices have a short-range variability due to the variability in the silicon annealing process used to form such devices. Amorphous silicon devices typically have a long-range variability due to variabilities in the silicon-deposition processes. Further, threshold voltage properties of such thin-film devices may change significantly with use over time, particularly for amorphous silicon devices. Typical large-format displays, e.g., employ hydrogenated amorphous silicon thin-film transistors (aSi-TFTs) to drive the pixels in such large-format displays. However, as described in "Threshold voltage instability of amorphous silicon thin-film transistors under constant current stress" by Jahinuazzaman et al. in Applied Physics Letters 87, 023502 (2005), the aSi-TFTs exhibit a metastable shift in threshold voltage when subjected to prolonged gate bias. This shift is not significant in traditional display devices such as LCDs because the current required to switch the liquid crystals in

LCD display is relatively small. However, for LED applications, much larger currents must be switched by the aSi-TFT circuits to drive the electroluminescent materials to emit light. Thus, electroluminescent displays employing aSi-TFT circuits are expected to exhibit a significant voltage threshold shift as they are used. This voltage shift may result in decreased dynamic range and image artifacts. Moreover, the organic materials in OLED and hybrid EL devices also deteriorate in relation to the integrated current density passed through them over time so that their efficiency drops while their resistance to current increases.

[0005] One approach to avoiding the problem of voltage threshold shift in aSi-TFT circuits is to employ circuit designs whose performance is relatively constant in the presence of such voltage shifts. For example, US2005/0269959 entitled "Pixel circuit, active matrix apparatus and display apparatus" describes a pixel circuit having a function of compensating for characteristic variation of an electro-optical element and threshold voltage variation of a transistor. The pixel circuit includes an electro-optical element, a holding capacitor, and five N-channel thin-film transistors including a sampling transistor, a drive transistor, a switching transistor, and first and second detection transistors. Alternative circuit designs employ current-mirror driving circuits or voltage to current conversion circuits, which reduce susceptibility to transistor performance, e.g., US2005/0180083, US2005/0024352 and WO2006/012028. Other methods, such as taught in US2004/0032382, WO2005/015530, and WO2006/046196, employ photo-sensors in pixel-driving circuits and employ feedback control so that pixels emit a desired amount of light regardless of organic material or transistor performance. However, such designs typically require complex, larger and/or slower circuits than the two-transistor, single capacitor circuits otherwise employed in simpler designs, thereby increasing costs and reducing the area on a display available for emitting light and decreasing the display lifetime.

[0006] Other compensation methods are described in the prior art to mitigate the effects of changing organic material properties and changing thin-film transistor properties. One group of compensation methods attempts to prevent the problem from occurring, for example by employing reverse-biasing to undo thin-film circuit changes. For example, US2004/0001037 entitled, "Organic light-emitting diode display" describes a technique to reduce the rate of increase in threshold voltage, i.e. degradation, of an amorphous silicon TFT driving an OLED. A first supply voltage is supplied to a drain of the TFT when a first control voltage is applied to a gate of the TFT to activate the TFT and drive the OLED. However, a second, lower supply voltage is supplied to the drain of the TFT when a second control voltage is applied to the gate of the TFT to deactivate the TFT and turn off the OLED, whereby a voltage differential between the drain and the source when the second control voltage is applied to the gate is substantially lower said first supply voltage. This reduces degradation of the TFT. However, such schemes typically require complex additional circuitry and timing signals, thereby reducing the area on a display available for emitting light and decreasing the display lifetime and cost. Alternatively, by increasing the size of organic light-emitting elements or placing a maximum on the current that passes through the organic elements, deg-

radiation may be decreased. However, these methods have limited utility in that the degradation problem is not solved but rather reduced.

[0007] Other techniques employ external compensation to mitigate the effects of changes in the display device. For example, U.S. Pat. No. 6,995,519 describes an organic light emitting diode (OLED) display comprising an array of OLED display light-emitting elements, each OLED display light-emitting element having two terminals; a voltage-sensing circuit for each OLED display light-emitting element in the display array including a transistor in each circuit connected to one of the terminals of a corresponding OLED display light-emitting element for sensing the voltage across the OLED display light-emitting element to produce feedback signals representing the voltage across the OLED display light-emitting elements in the display array; and a controller responsive to the feedback signals for calculating a correction signal for each OLED display light-emitting element and applying the correction signal to data used to drive each OLED display light-emitting element to compensate for the changes in the output of each OLED display light-emitting element. However, this design also suffers from the need for additional circuitry in each active-matrix pixel.

[0008] It is known in the prior art to measure the performance of each pixel in a display and then to correct for the performance of the pixel to provide a more uniform output across the display. U.S. Pat. No. 6,081,073 entitled "Matrix Display with Matched Solid-State Pixels" by Salam granted Jun. 27, 2000 describes a display matrix with a process and control means for reducing brightness variations in the pixels. This patent describes the use of a linear scaling method for each pixel based on a ratio between the brightness of the weakest pixel in the display and the brightness of each pixel. However, this approach will lead to an overall reduction in the dynamic range and brightness of the display and a reduction and variation in the bit depth at which the pixels can be operated.

[0009] U.S. Pat. No. 6,473,065 entitled "Methods of improving display uniformity of organic light-emitting displays by calibrating individual pixel" by Fan issued Oct. 29, 2002, describes methods of improving the display uniformity of an OLED. In order to improve the display uniformity of an OLED, the display characteristics of all organic-light-emitting-elements are measured, and calibration parameters for each organic-light-emitting-element are obtained from the measured display characteristics of the corresponding organic-light-emitting-element. The calibration parameters of each organic-light-emitting-element are stored in a calibration memory. The technique uses a combination of lookup tables and calculation circuitry to implement uniformity correction. However, the described approaches require either a lookup table providing a complete characterization for each pixel, or extensive computational circuitry within a device controller. This is likely to be expensive and impractical in most applications.

[0010] Co-pending, commonly assigned US Publication 2006/0221326 describes a method for the correction of average brightness or brightness uniformity variations in EL displays wherein the brightness of each light-emitting element is measured at two or more, but fewer than all possible, different input signal values. While brightness or luminance measurements may be practical in a manufacturing environment, and thus appropriate for initial display calibration,

they may be problematic after the display is subsequently put into use and thus less practical for performance of aging compensation.

[0011] US2006/0007249 discloses a method for operating and individually controlling the luminance of each pixel in an emissive active-matrix display device including storing transformation between digital image gray level value and display drive signal that generates luminance from pixel corresponding to digital gray level value; identifying target gray level value for particular pixel; generating display drive signal corresponding to identified target gray level based on stored transformation and driving particular pixel with drive signal during first display frame; measuring parameter representative of actual measured luminance of particular pixel at a second time after the first time; determining difference between identified target luminance and actual measured luminance; modifying stored transformation for particular pixel based on determined difference; and storing and using modified transformation for generating display drive signal for particular pixel during frame time following first frame time.

[0012] WO 2005/057544 describes a video data signal correction system for video data signals addressing active matrix electroluminescent display devices wherein an updated electrical characteristic parameter X is calculated for each drive transistor by measuring actual current through a power line in comparison to expected current determined using a model and a previously stored parameter value, where subsequent video data signals are corrected in accordance with the calculated parameter X. Calculation of characteristic parameters based on assumed pre-determined performance relationships, however, may require consideration of many parameters having complex interactive relationships, and further may not accurately reflect actual device performance.

[0013] US 2004/0150590 describes an OLED display comprising a plurality of light emitting elements divided into two or more groups, the light emitting elements having an output that changes with time or use; a current measuring device for sensing the total current used by the display to produce a current signal; and a controller for simultaneously activating all of the light emitting elements in a group and responsive to the current signal for calculating a correction signal for the light emitting elements in the group and applying the correction signal to input image signals to produce corrected input image signals that compensate for the changes in the output of the light emitting elements of the group. While this technique is useful and effective, the problem of measuring the currents while the display is in use without causing the user to perceive luminance discontinuities, or other objectionable display artifacts necessary for performing the measurements remains.

[0014] There is a need, therefore, for an improved method of measuring and compensating for changes in the performance of light-emitting elements in an EL display device.

SUMMARY OF THE INVENTION

[0015] In accordance with one embodiment, the present invention is directed towards a method of compensating an electroluminescent (EL) display device having light-emitting elements that change with use, comprising the steps of: a) using the device to display images; b) sequentially displaying an ordered series of calibration images, wherein each of the calibration images have one or more correspond-

ing flat fields, at least one of the corresponding flat fields of each calibration image of the ordered series has a different luminance value, and the calibration images are arranged in the ordered series so as to reduce perceived luminance discontinuities; c) measuring and recording current used by the display for each sequentially displayed calibration image; d) calculating compensation parameters based on the measured currents; e) compensating an input image using the compensation parameters; and f) displaying the compensated input image.

ADVANTAGES

[0016] In accordance with various embodiments, the present invention may provide the advantage of improved uniformity and quality in a display and reduced costs, without causing a user to perceive objectionable luminance discontinuities when making performance measurements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 is a flow diagram according to one embodiment of the present invention;

[0018] FIG. 2 is a graph illustrating the current-voltage relationship of an aSi-TFT OLED circuit over time; and

[0019] FIG. 3 is a diagram illustrating an OLED system according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Referring to FIG. 1, according to one specific embodiment of the present invention, a luminance value is set **100** to zero and every pixel of a flat-field calibration image set **105** to the luminance value. The calibration image is displayed **110** and the current required to drive the display measured and stored **115**. The luminance value is tested **120** to determine whether it is equal to a pre-determined maximum value. If it is not equal to the maximum luminance value, the image value is incremented **125**, the image is set **105** to the image value, the calibration image is displayed **110**, and the current measured **115** at the new image value. The process repeats until the luminance value is equal to the pre-determined maximum value. The stored current measurement values are then employed to set **130** compensation parameters and the calibration process is complete. An image is then input **135**, compensated **140**, and displayed **145**. The series of calibration images may include flat fields having minimum and maximum display luminance values. Techniques for measuring current and developing compensation parameters are described in US 2004/0150590 referenced above, the disclosure of which is hereby incorporated by reference herein.

[0021] The iterative cycle of setting the calibration image to a monotonically increasing sequence of values essentially creates a temporal gray scale of calibration images from dark to light that are displayed and whose currents are measured. In this case, a viewer of the display will perceive the display going from a dark image to a bright image, thus reducing perceived luminance discontinuities during display of the calibration images. For example, an ordered series of calibration images may first display a calibration image having a flat field with a code value of 0, then a calibration image having a flat field with a code value of 1, then 2, and so forth until a calibration image having a flat field with a code value of 255 (for an 8-bit input signal) is displayed. In

this case, the calibration images are arranged in the ordered series such that the corresponding flat fields of each calibration image sequentially increase in luminance value from smallest to largest, and the ordered series is preferably displayed at display power-up. In an alternative embodiment, the values may be monotonically iterated from the pre-determined maximum value and decremented to a minimum value, for example zero. In this second case, a viewer of the display will perceive the display going from a bright image to a dark calibration image. For example, an ordered series of calibration images may first display a calibration image having a flat field with a code value of 255 (for an 8-bit input signal), then a calibration image having a flat field with a code value of 254, then 253, and so forth until a calibration image having a flat field with a code value of 0 is displayed. In this alternative case, the calibration images are arranged in the ordered series such that the corresponding flat fields of each calibration image sequentially decrease in luminance value from largest to smallest, and the ordered series is preferably displayed at display power-down. In either case, the measurements are made without any intervening input signal values.

[0022] Because the display of the calibration images is visible to a user as its current performance is measured, it is helpful to perform the measurements at display start-up or shutdown to avoid obtrusion. In particular, it may be expected and acceptable by a viewer to view a screen going from dark to light after a display is first turned on and from light to dark after a display is turned off. Hence, it may be preferred to perform the calibration process from dark to light (as shown in FIG. 1) just after a display is turned on and before it is put into use. Moreover, at that time the display will likely be at ambient temperature, possibly reducing inaccuracies in measurement. Alternatively, it may be preferred to perform the calibration process from light to dark just after a display is turned off and before after it has been in use. At that time a user likely has no further interest in viewing the display and will not be forced to wait while the calibration process completes. Moreover, the device temperature may have stabilized at an operating temperature.

[0023] In an alternative embodiment of the present invention, calibration images may be arranged in pairs with a combined average luminance value. The combined average luminance values may then have a constant combined average luminance value. Alternatively, the combined average luminance values of the pairs may sequentially increase or sequentially decrease. For example, for a display device employing an 8-bit input signal, a calibration image having a flat field with a luminance code value of 0 is displayed, then a calibration image having a flat field with a luminance code value of 255, then a calibration image having a flat field with a luminance code value of 1, then a calibration image having a flat field with a luminance code value of 254, and so on until a calibration image having a flat field with a code value of 128 is displayed. Note that the pairs of calibration images (e.g. having a flat field having a luminance code value of 0 and a flat field having a luminance code value of 255) all have an average luminance code value of 128. Hence, if the calibration images are presented at a fast enough temporal rate, a viewer will perceive a constant gray luminance code value of 128. This approach corresponds to the first alternative. In a second example, for a display device employing an 8-bit input signal, a calibration image having a flat field with a luminance code value of 0 is

displayed, then a calibration image having a flat field with a luminance code value of 128, then a calibration image having a flat field with a luminance code value of 1, then a calibration image having a flat field with a luminance code value of 129, and so on until a calibration image having a flat field with a code value of 127 followed by a flat field with a luminance code value of 255 is displayed. In this case, note that the average luminance code value of the pairs of calibration images increase from approximately 64 to 191. Hence, if the calibration images are presented at a fast enough temporal rate, a viewer will perceive a sequentially increasing gray luminance code value. In a third example, for a display device employing an 8-bit input signal, a calibration image having a flat field with a luminance code value of 127 is displayed, then a calibration image having a flat field with a luminance code value of 255, then a calibration image having a flat field with a luminance code value of 126, then a calibration image having a flat field with a luminance code value of 254, and so on until a calibration image having a flat field with a code value of 0 followed by a flat field with a luminance code value of 128 is displayed. In this case, note that the average luminance code value of the pairs of calibration images decreases from approximately 191 to 64. Hence, if the calibration images are presented at a fast enough temporal rate, a viewer will perceive a sequentially decreasing gray luminance code value. In general, calibration images with flat fields having alternating luminance code values may be grouped, and if displayed at a sufficiently high temporal rate, may provide a preferred order that has any desired changes in apparent luminance. Such methods are useful because they may reduce the total range of the displayed temporal gray scales, thereby decreasing their perceived luminance discontinuities by a user.

[0024] In a further embodiment of the present invention, the electroluminescent devices are color devices having full-color pixels, each pixel having a plurality of differently-colored light-emitting elements, for example red, green, and blue or red, green, blue, and white. Because it is possible that the current characteristics of each of the colors may be different (because different organic materials may be employed to generate the differently colored light), it may be useful to measure the current employed by groups of light-emitting elements of a common color, i.e. it may be useful to measure the current employed by a red flat field, a green flat field, a blue flat field, and a white flat field (if a four-color system is employed). In this case, light-emitting elements comprise differently colored light-emitting elements, and ordered series of calibration images may be displayed for each of the different colors of light-emitting elements. In one embodiment of the present invention, a temporal "gray" scale of calibration images having colored flat fields may be first displayed in red, then in green, then in blue, and so on. However, the use of a series of increasing or decreasing color images is likely to be more objectionable than a single series of gray images. Hence, according to a further embodiment of the present invention, the ordered series of calibration images displayed for the different colors of light-emitting elements are arranged to sequentially display flat-fields of each color alternately at common luminance values. For example, a calibration image having a red flat field with a luminance value of 0 may be followed by a calibration image having a green flat field with a luminance value of 0 followed by a calibration image having a blue flat field with

a luminance value of 0. Then a red flat field with a luminance value of 1 may be followed by a calibration image having a green flat field with a luminance value of 1 followed by a calibration image having a blue flat field with a luminance value of 1, and so forth. As noted above in the embodiment of alternating small and large luminance code values, if the calibration images having color flat fields with a common luminance value are displayed at a high enough temporal rate, a viewer will perceive a pleasing gray color.

[0025] In order to achieve a fast current measurement and to reduce flicker for alternating magnitude or color flat fields, in an alternative embodiment of the present invention, it may be useful to display images at a first frequency, and the calibration images are displayed at a second frequency different from the first frequency. For example, standard broadcast images may have a frequency of 30 frames per second. Since the calibration images are internally generated and displayed, they may be displayed at a much higher rate, for example 120 frames per second. The higher rates will reduce any flicker and will also have the virtue of reducing the calibration measurement time. Display controllers are well known in the art and circuitry capable of providing higher-rate frame displays may be constructed using known controller technology. If, on the other hand, the current measurement apparatus is relatively slow (for example to improve accuracy or to reduce costs), the calibration images may be displayed at a temporal frame rate slower than a conventional video signal, for example 15 frames per second. In any case, the method of the present invention will reduce the perceived luminance discontinuities of the display device when viewed by a user.

[0026] In a simple case, the calibration images employ a single flat field, that is, every light-emitting element of a common color in the flat field is the same. Such an approach allows a current measurement and detection of changes in the entire display. However, in an alternative embodiment, more than one image field may be employed in each calibration image. A first flat field may represent an area of particular interest and employ calibration images of the ordered series, each calibration image having a different luminance value in the flat field, and at least one other corresponding image area of each calibration image comprising a constant image that does not change from one calibration image to the next. The unchanging portion of the images will employ a constant current in the display and may thus be subtracted from the changing portion to obtain a measurement corresponding to the first flat field area only. This can be useful when the area corresponds to display locations having especially bright or unchanging signals resulting in differential burn-in of the display. Hence, in one embodiment of the present invention, every pixel in the electroluminescent display device is driven at a series of different common values and the current used by all of the pixels together is measured.

[0027] In alternative embodiments, pixel sub-sets representing particular portions of the display may be assigned to the series of different common values and the remainder of the image to a second common value, for example zero. The corresponding flat field of each calibration image of the ordered series may be assigned, e.g., to particular portions or a group of light-emitting elements of the display defined by expected usage of the display. The particular portions may be chosen, e.g., to represent areas of a display device expected to be subject to different usage, for example

portions corresponding to the various signal formats (such as high-definition or standard-definition) as described, e.g., in US2006/0087588. In the extreme case, single pixels may be tested independently. By employing specific portions of interest, the behavior of the display may be effectively measured. The remainder of the pixels not in a portion may be driven at a signal of zero so that no current contribution is made by these pixels to the current measurement. Alternatively, the remainder of the pixels in the portion may be driven at a common level chosen to optimize the accuracy of the current measurement and then discounted in the calculation of compensation parameters. For example, a current measurement apparatus may have improved accuracy at some current levels than at others.

[0028] In any of these embodiments, the series of calibration images may include a separate calibration image displaying a flat field having a luminance value corresponding to each of the display luminance values. In this case, a separate calibration image is provided for each possible display luminance output. Such an approach will provide a measurement, and calculated correction value, for every possible input signal. This thorough approach has the advantage of completeness and accuracy, but the drawback of requiring a longer time to perform. In an alternative embodiment of the present invention, the series of calibration images include fewer separate calibration images displaying flat field images having different luminance values than possible display luminance values. In this case, the compensation parameters corresponding to the missing display luminance values may be interpolated from the measured values. Methods for interpolating values are well known in the mathematical arts.

[0029] According to one embodiment of the present invention, the current used by the display may be measured at every level for which it is designed to operate, for example 256 for an 8-bit display, 1024 for a 10-bit display, or 4096 for a 12-bit display. Alternatively, the current used by the display may be measured at only a few levels for which it is designed to operate, for example 8, 16, 32, or 64 levels. These may, or may not, be regularly distributed over the range of acceptable input value. For example, a greater number of values may be employed near the expected threshold voltage so as to more accurately measure the threshold voltage. Moreover, only a few measurements, perhaps one or two, may be necessary to measure the current-voltage relationships for input voltages exceeding the threshold voltage. By reducing the number of input voltage levels measured, the time required to calibrate the display may be reduced. Moreover, fewer or more than 8 bits may be employed by a display, for example 10 or 12 bits. Furthermore, it is not essential to measure the current used by every brightness level at one time. For example, the display may have a number of different luminance values and the ordered series may include a first set of calibration images displayed at display power-up, and a second distinct set of calibration images displayed at display power-down, wherein each of the first and second sets of calibration images comprise corresponding flat fields having luminance values corresponding to less than all of the different display luminance values. Alternatively, one set of measurements may be made after or before the display is used and another set made after or before the display is used at another time. In either case, the first and second sets of calibration images may in combination comprise corresponding flat fields hav-

ing luminance values corresponding to each of the different display luminance values. Hence, by employing such stratagems, the measurement of current used by the display can be made in a way that the user may find acceptable or imperceptible and perceived luminance discontinuities minimized.

[0030] Referring to FIG. 2, a simplified version of the current-voltage relationship of an LED pixel over time is illustrated. At a first time t_0 , each TFT will have a specific threshold voltage V_{t0} specified by the silicon materials and manufacturing process. As the TFT is used, over time the threshold voltage will shift to a second point V_{t1} at time t_1 . Later, the threshold voltage may shift again to a third point V_{t2} at time t_2 . Moreover, if the EL device contains organic materials the current flow through the organic materials will cause them to age and become more resistive, and the slope of the current-voltage relationship will change so that at voltages exceeding the threshold voltage at a given time the current response to a given voltage will decrease. By measuring the current flows through a portion of the LED display in response to a series of different common values, the threshold voltage of the aSi-TFTs and resistance of the LED may be determined. For example, the voltage whose value exceeds the voltage value whose current measurement exceeds the corresponding current measurements by a significant amount may be the threshold voltage. A significant amount may be an amount greater than the average noise level of the measurement or some absolute value, for example 1%, 5%, or 10%. Likewise the slope of the curve corresponding to the current measurements between the threshold voltage and higher input voltages represents the relative resistance of the LED and its age at a specific time. By using more current measurements at a greater number of input signal levels, a more accurate measurement may be made. The input values of an image signal may then be mapped, for example with a lookup table memory or with an addition and multiplication corresponding to an offset and gain, to the portion of the curve between the threshold voltage and the maximum voltage. For example, if the threshold voltage corresponds to an input signal of 50 and the maximum signal value is 250, then an input signal of zero may be mapped to a signal of 50, an intermediate input signal of 125 may be mapped to 150, while the maximum value of 250 is mapped to the same value. In alternative embodiments of the present invention, the transformation curve may not be linear, for example it may have a logarithmic relationship. Moreover, in cases where the light-emitting efficiency of the LED materials at a given current decreases over time, a greater driving value may be employed to compensate for this decrease. For example, the maximum input signal value of 250 may be mapped to a compensated signal value of 255.

[0031] In one embodiment of the present invention, all of the sub-pixel elements making up a full-color electroluminescent display may be part of the portion. In other embodiments, all of the sub-pixels having a common color may be measured together so that separate measurements for each color can be employed to correct each of the color channels in the display separately. In a further embodiment, an EL display may employ redundant sub-pixels of varying efficiency, for example a display having a red, green, blue, and white (RGBW) configuration. In this arrangement, the three colors may be measured together and the white separately or, as noted above, each sub-pixel may be measured separately.

Moreover, as noted above with respect to measuring input signals that alternate rapidly between high and low values to provide the appearance of a fixed gray signal over time, different color signals may be alternately measured to provide an appearance of a gray screen, for example by first measuring a red portion, then a green portion, then a blue portion, then a white portion at a first common level, then repeating the sequence of color measurements at a second common level, and so forth. If the common values also alternate between high and low values, the appearance of a fixed gray level may be provided. If the values change from a maximum to a minimum in sequence, or vice versa, the effect of a temporal gray scale may be obtained.

[0032] The present invention may be employed in display devices and systems. For example, referring to FIG. 3 and according to the present invention, an electroluminescent display system, may comprise an LED device **10** comprising a plurality of light-emitting elements that change with use; a controller **15** for sequentially displaying an ordered series of calibration images, wherein each of the calibration images have one or more corresponding flat fields, at least one of the corresponding flat fields of each calibration image of the ordered series has a different luminance value, and the calibration images are arranged in the ordered series so as to reduce perceived luminance discontinuities; for measuring and recording current used by the display for each sequentially displayed calibration image; for calculating compensation parameters based on the measured currents; for compensating an input image using the compensation parameters; and for displaying the compensated input image. The controller **15** may include a memory **20** and current measurement apparatus **25**. The controller **10** receives input image signals **30**, compensates them with data obtained from the current measurement apparatus **25** and stored in memory **20** to produce a compensated signal **35** that is applied to the display device **10**.

[0033] The present invention may be employed in devices using amorphous silicon thin-film transistors circuits as well as circuits employing low-temperature polysilicon, high-temperature polysilicon, and micro-crystalline silicon. The present invention provides means to characterize the combination of thin-film transistor characteristics and LED material characteristics over time to provide compensation for such characteristics.

[0034] In a preferred embodiment, the present invention is employed in a flat-panel OLED device composed of small molecule or polymeric OLEDs as disclosed in but not limited to U.S. Pat. No. 4,769,292, issued Sep. 6, 1988 to Tang et al., and U.S. Pat. No. 5,061,569, issued Oct. 29, 1991 to VanSlyke et al. In another preferred embodiment, the present invention is employed in a flat panel inorganic LED device containing quantum dots as disclosed in, but not limited to U.S. Patent Application Publication No. 2007/0057263 entitled "Quantum dot light emitting layer" and pending U.S. application Ser. No. 11/683,479, by Kahan, which are both hereby incorporated by reference in their entirety. Many combinations and variations of organic, inorganic and hybrid light-emitting displays can be used to fabricate such a device, including active-matrix LED displays having either a top- or bottom-emitter architecture.

[0035] The invention has been described in detail with particular reference to certain preferred embodiments

thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

PARTS LIST

[0036]	10	display
[0037]	15	controller
[0038]	20	memory
[0039]	25	current measurement device
[0040]	30	input image
[0041]	35	compensated image
[0042]	100	set luminance value step
[0043]	105	set image step
[0044]	110	display image step
[0045]	115	measure current step
[0046]	120	test value step
[0047]	125	increment value step
[0048]	130	set compensation parameters step
[0049]	135	input image step
[0050]	140	compensate image step
[0051]	145	display image step

What is claimed is:

1. A method of compensating an electroluminescent (EL) display device having light-emitting elements that change with use, comprising the steps of:

- a) using the device to display images;
- b) sequentially displaying an ordered series of calibration images, wherein each of the calibration images have one or more corresponding flat fields, at least one of the corresponding flat fields of each calibration image of the ordered series has a different luminance value, and the calibration images are arranged in the ordered series so as to reduce perceived luminance discontinuities;
- c) measuring and recording current used by the display for each sequentially displayed calibration image;
- d) calculating compensation parameters based on the measured currents;
- e) compensating an input image using the compensation parameters; and
- f) displaying the compensated input image.

2. The method of claim 1, wherein a corresponding flat field of one calibration image in the ordered series has a minimum display luminance value and a corresponding flat field of another calibration image in the ordered series has a maximum display luminance value.

3. The method of claim 1, wherein the display has a number of different luminance values and the ordered series includes calibration images with corresponding flat fields having luminance values corresponding to each of the different display luminance values.

4. The method of claim 1, wherein the display has a number of different luminance values and the ordered series includes calibration images with corresponding flat fields having luminance values corresponding to less than all of the different display luminance values.

5. The method of claim 1, wherein the display has a number of different luminance values and the ordered series includes a first set of calibration images displayed at display power-up, and a second distinct set of calibration images displayed at display power-down, wherein each of the first and second sets of calibration images comprise corresponding flat fields having luminance values corresponding to less than all of the different display luminance values.

6. The method of claim 5, wherein the first and second sets of calibration images in combination comprise corresponding flat fields having luminance values corresponding to each of the different display luminance values.

7. The method of claim 1 wherein the calibration images are arranged in the ordered series such that the corresponding flat fields of each calibration image sequentially increase in luminance value from smallest to largest, and the ordered series is displayed at display power-up.

8. The method of claim 1 wherein the calibration images are arranged in the ordered series such that the corresponding flat fields of each calibration image sequentially decrease in luminance value from largest to smallest, and the ordered series is displayed at display power-down.

9. The method of claim 1 wherein the calibration images are arranged in the ordered series in pairs of calibration images such that corresponding flat fields of sequentially displayed pairs of calibration images have combined average luminance values that sequentially increase or decrease.

10. The method of claim 1 wherein the calibration images are arranged in the ordered series in pairs of calibration images such that corresponding flat fields of sequentially displayed pairs of calibration images have a substantially constant combined average luminance value.

11. The method of claim 1 wherein the light-emitting elements comprise differently colored light-emitting elements, and ordered series of calibration images are displayed for each of the different colors of light-emitting elements.

12. The method of claim 11 wherein the ordered series of calibration images displayed for the different colors of light-emitting elements are arranged to sequentially display flat-fields of each color alternately at common luminance values.

13. The method of claim 1 wherein the device is used to display images at a first frequency, and the calibration images are displayed at a second frequency different from the first frequency.

14. The method of claim 13 wherein the second frequency is greater than the first frequency.

15. The method of claim 13 wherein the second frequency is less than the first frequency.

16. The method of claim 1 wherein the display of the calibration images is visible to a user.

17. The method of claim 1, wherein each of the calibration images comprise only a single corresponding flat field.

18. The method of claim 1, wherein each of the calibration images comprise at least two image areas, at least one image area of each calibration image comprising the corresponding flat field of each calibration image of the ordered series having a different luminance value, and at least one other corresponding image area of each calibration image comprising a constant image.

19. The method of claim 1 wherein the corresponding flat field of each calibration image of the ordered series is assigned to a group of light-emitting elements of the display defined by expected usage of the display.

20. An electroluminescent (EL) display system, comprising:

- a) an EL device comprising a plurality of light-emitting elements that change with use;
- b) a controller for sequentially displaying an ordered series of calibration images, wherein each of the calibration images have one or more corresponding flat fields, at least one of the corresponding flat fields of each calibration image of the ordered series has a different luminance value, and the calibration images are arranged in the ordered series so as to reduce perceived luminance discontinuities; for measuring and recording current used by the display for each sequentially displayed calibration image; for calculating compensation parameters based on the measured currents; for compensating an input image using the compensation parameters; and for displaying the compensated input image.

* * * * *

专利名称(译)	用于补偿电致发光显示器的老化的方法和设备		
公开(公告)号	US20070290947A1	公开(公告)日	2007-12-20
申请号	US11/765795	申请日	2007-06-20
[标]申请(专利权)人(译)	库克群岛RONALD小号		
申请(专利权)人(译)	库克群岛RONALD小号		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	COK RONALD S		
发明人	COK, RONALD S.		
IPC分类号	G09G3/12		
CPC分类号	G09G3/3225 G09G2320/0233 G09G2320/08 G09G2320/029 G09G2320/0693 G09G2320/0285		
外部链接	Espacenet USPTO		

摘要(译)

一种补偿具有随使用而改变的发光元件的电致发光显示装置的方法，包括步骤：a) 使用该装置显示图像；b) 顺序显示有序系列的校准图像，其中每个校准图像具有一个或多个相应的平场，有序序列的每个校准图像的相应平场中的至少一个具有不同的亮度值，并且校准图像按有序系列排列，以减少感知的亮度不连续性；c) 测量和记录显示器用于每个顺序显示的校准图像的电流；d) 根据测得的电流计算补偿参数；e) 使用补偿参数补偿输入图像；f) 显示补偿后的输入图像。

