



US 2004/0131883A1


(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0131883 A1**
(43) **Pub. Date: Jul. 8, 2004**

(54) **FURAN-CONTAINING HOLE
TRANSPORTING MATERIALS**(52) **U.S. Cl.** **428/690**; 428/917; 313/504;
313/506; 549/472; 549/505;
549/507(76) **Inventors:** **Tien-yau Luh**, Taipei (TW); **Lingzhi
Zhang**, Guangzhou (CN); **Chin-Fa Lee**,
Jinning Shiang (TW); **Chung-Chih Wu**,
Taipei (TW); **Chieh-Wei Chen**,
Feng-Yuan (TW)(57) **ABSTRACT**

A furan-containing compound of formula (I):

Correspondence Address:
FISH & RICHARDSON PC
225 FRANKLIN ST
BOSTON, MA 02110 (US)

(I)

(21) **Appl. No.:** **10/643,041**(22) **Filed:** **Aug. 18, 2003****Related U.S. Application Data**(60) Provisional application No. 60/404,090, filed on Aug.
16, 2002.**Publication Classification**(51) **Int. Cl.⁷** **H05B 33/12**; C07D 307/02

Ar is aryl, heteroaryl, or oligoaryl; A is furyl; B is aryl or heteroaryl; R₁ is hydrogen, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, heterocyclyl, or oligoaryl; and R₂ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, or heterocyclyl. The compound is useful as a hole transporting material in an organic light emitting diode device.

FURAN-CONTAINING HOLE TRANSPORTING MATERIALS

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to U.S. Provisional Application Serial No. 60/404,090, filed on Aug. 16, 2002, the contents of which are incorporated herein by reference.


BACKGROUND

[0002] Organic light emitting diodes (OLEDs) can be used in a wide range of lightings, as well as high and low resolution display applications. The simplest OLED device contains an organic emission layer sandwiched between two electrodes that inject electrons and holes. The electrons and holes meet in the organic emission layer and produce light. Insertion of electron or hole transporting layers between the two electrodes renders the light production more efficient. See, e.g., Tang et al. (1987) *Applied Physics Letters* 51: 913-915; Burroughs et al. (1990) *Nature* 347: 539; Adachi et al. (1988) *Japanese Journal of Applied Physics* 27: L269-L271, and Mitschke and Bäuerle (2000) *J. Mater. Chem.* 10: 1471-1507.

SUMMARY

[0003] This invention relates to compounds useful as a hole transporting material in an OLED device.

[0004] In one aspect, this invention features a furan-containing compound of formula (I):

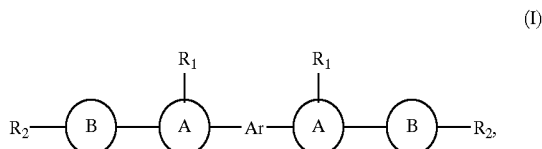

[0005] Ar is aryl, heteroaryl, or oligoaryl; A is a furyl ring; B is an aryl or heteroaryl ring; R₁ is hydrogen, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, heterocyclyl, or oligoaryl; and R₂ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, or heterocyclyl. Note that the two A groups, as well as the two B groups, the two R₁ groups, and the two R₂ groups can be the same or different. Further, each R₁ and each R₂ are bonded to any suitable positions on rings A or B.

[0006] A subset of the compounds encompassed by the above formula is featured by that A is furyl substituted at positions 2 and 5. Another subset is featured by that B is aryl (e.g., phenyl). In these compounds, R₂ can be hydrogen. A further subset is featured by that Ar is aryl (e.g., phenyl) or oligoaryl (e.g., biphenyl). In these compounds, A can be furyl substituted at positions 2 and 5, B can be aryl (e.g., phenyl), R₁ can be phenyl, optionally substituted at position 3 of furyl, and R₂ can be hydrogen.

[0007] Alkyl, alkenyl, aryl, heteroaryl, oligoaryl, cyclyl, or heterocyclyl mentioned above refers to both substituted and unsubstituted moieties. The term "substituted," in turn, refers to one or more substituents (which may be the same or different), each replacing a hydrogen atom. Examples of

substituents include halogen, amino, alkylamino, arylamino, dialkylamino, alkyl-aryl amino, diarylamino, hydroxyl, mercapto, cyano, nitro, trialkyl silyl, C₁-C₆ alkyl, C₁-C₆ alkenyl, C₁-C₆ alkoxy, aryl, heteroaryl, cyclyl, or heterocyclyl, wherein alkyl, alkenyl, alkoxy, aryl, heteroaryl, cyclyl, and heterocyclyl are optionally substituted with C₁-C₆ alkyl, halogen, amino, alkylamino, arylamino, dialkylamino, diarylamino, hydroxyl, mercapto, cyano, or nitro.


[0008] In some embodiments, the substituents are halogen, cyano, dialkylamino, alkyl-aryl amino, diarylamino, alkyl, fluoroalkyl, trialkyl silyl, aryl, alkenyl, alkoxy, or a combination thereof.

[0009] As used herein, alkyl includes both linear and branched alkyl groups containing 1 to 6 carbon atoms. The term "alkenyl" refers to linear or branched alkenyl groups containing 2 to 6 carbon atoms. The term "aryl" refers to a hydrocarbon ring system having at least one aromatic ring. Examples of aryl moieties include, but are not limited to, phenyl, naphthyl, and pyrenyl. The term "heteroaryl" refers to a hydrocarbon ring system having at least one aromatic ring which contains at least one heteroatom such as O, N, or S. Examples of heteroaryl moieties include, but are not limited to, pyridinyl, carbazolyl, and indolyl. The term "oligoaryl" refers to a moiety containing 2 to 5 aryl or heteroaryl groups bridged by covalent bonds. Examples of oligoaryl include, but are not limited to, biphenyl. The terms "cyclyl" and "heterocyclyl" refer to partially and fully saturated mono-, bi-, or tri-cyclic rings having from 4 to 14 ring atoms. A heterocyclyl ring contains one or more heteroatoms (e.g., O, N, or S). Exemplary cyclyl and heterocyclyl rings include cyclohexane, piperidine, piperazine, morpholine, thiomorpholine, and 1,4-oxazepane.


[0010] In another aspect, this invention features an electro-luminescence device that includes an anode layer, a hole transporting layer, an electron transporting layer, and a cathode layer. In this device, the anode layer, the hole transporting layer, the electron transporting layer, and the cathode layer are disposed in the above order. The hole transporting layer includes a furan-containing compound of formula (I), in which Ar is aryl, heteroaryl, or oligoaryl; A is furyl; B is aryl or heteroaryl; R₁ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, heterocyclyl, or oligoaryl; and R₂ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, or heterocyclyl.

[0011] Shown below are exemplary compounds that can be used in the electro-luminescence device described above:


Compound 1

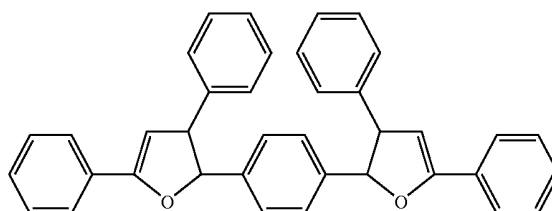

-continued

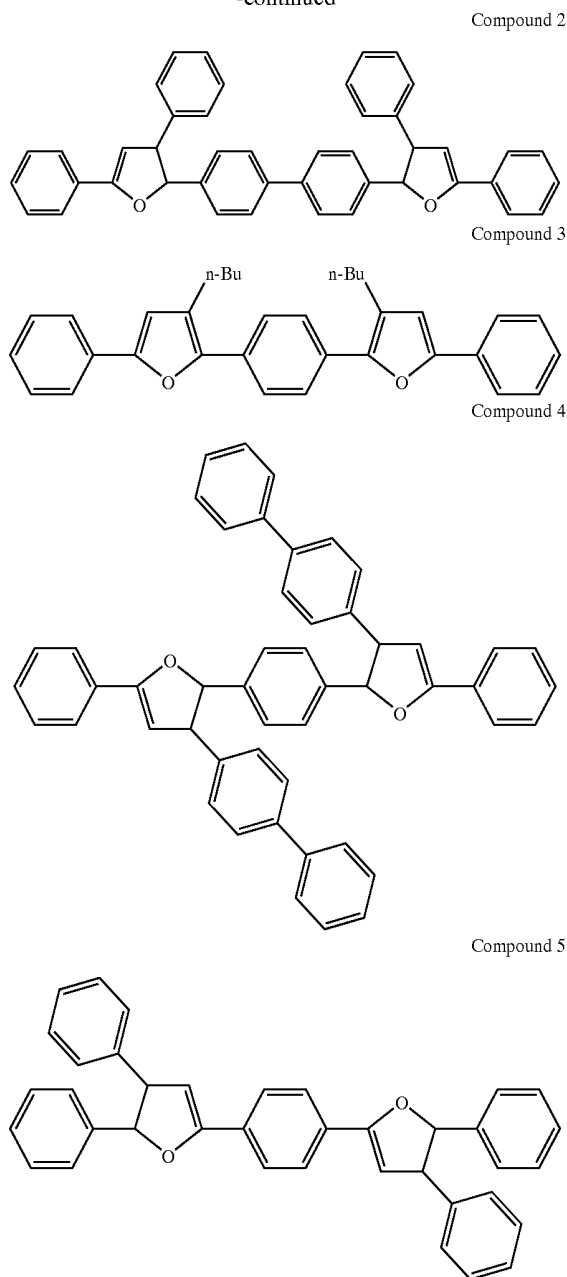

86: 795; Hou et al. (1998) *Tetrahedron* 54: 1955; and Lee et al. (2000) *J. Am. Chem. Soc.* 122: 4992-4993. For example, shown below is a scheme that depicts a synthetic route. In this scheme, Ar, R₁, and R₂ are as defined in Summary.

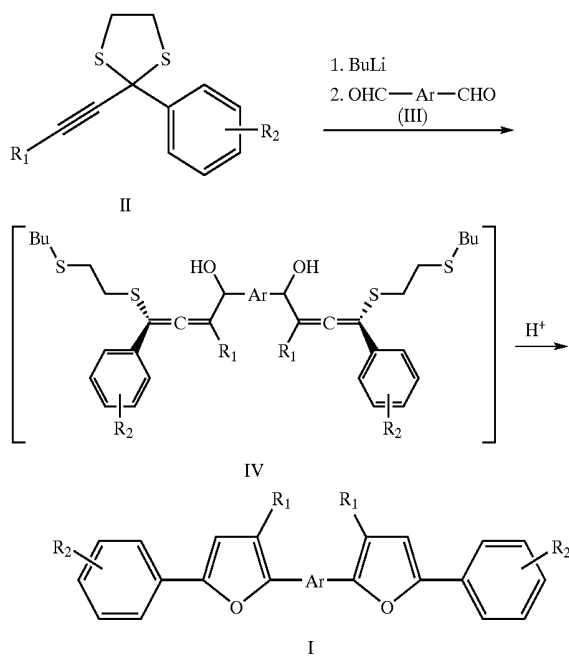

[0015] As shown in the above scheme, a furan-containing compound (I) is prepared with a propargylic dithiolacetal compound (II) as a starting material (for synthesis, see, e.g., Lee et al. *supra*). More specifically, the starting material is reacted with BuLi, followed by addition of an aromatic aldehyde (III) to afford an allenyl carbinol intermediate (IV). The intermediate is then converted to compound (I) by acid treatment (e.g., trifluoroacetic acid).

[0016] An asymmetrical furan-containing compound, e.g., having two different R₂ groups, can be prepared by partial hydrolysis of an ester group, followed by selective functional group transformations.

[0017] The chemicals used in the above-described synthetic routes may include, for example, solvents, reagents, catalysts, protecting group and deprotecting group reagents. The methods described above may also additionally include steps, either before or after the steps described specifically herein, to add or remove suitable protecting groups in order to ultimately allow synthesis of the furan-containing compound described above. In addition, various synthetic steps may be performed in an alternate sequence or order to give a desired compound. Synthetic chemistry transformations and protecting group methodologies (protection and deprotection) useful in synthesizing applicable the claimed compounds are known in the art and include, for example, those described in R. Larock, *Comprehensive Organic Transformations*, VCH Publishers (1989); T. W. Greene and P. G. M. Wuts, *Protective Groups in Organic Synthesis*, 2d. Ed., John Wiley and Sons (1991); L. Fieser and M. Fieser, *Fieser and Fieser's Reagents for Organic Synthesis*, John Wiley and Sons (1994); and L. Paquette, ed., *Encyclopedia of Reagents for Organic Synthesis*, John Wiley and Sons (1995) and subsequent editions thereof.

[0012] Other features, objects, and advantages of the invention will be apparent from the description and from the claims.

DETAILED DESCRIPTION

[0013] This invention relates to furan-containing compounds and their use as a hole transporting material in an electro-luminescence device.

[0014] The furan-containing compounds described in Summary can be prepared by methods well known to a skilled person in the art. See, e.g., Pelter et al. (1997) *Tetrahedron* 53: 10357; Pelter et al. (1987) *Tetrahedron Lett.* 28: 5213; Grisp (1989) *Synth. Commun.* 19: 307; Yassar et al. (1994) *Adv. Mater.* 6: 660; Lipshutz (1986) *Chem. Rev.*

[0018] A furan-containing compound thus synthesized can be further purified by a method such as column chromatography, high pressure liquid chromatography, recrystallization, or sublimation.

[0019] One or more furan-containing compounds can be used as a hole transporting material in an electro-luminescence device.

[0020] Typically, an electro-luminescence device is either a two- or a three-layer structured device. A two-layer structured device can include a hole transporting layer and an electron transporting layer, sandwiched between two layers of electrodes. Either the hole transporting layer or the electron transporting layer can function as a luminescent layer, which emits lights (Tang et al. (1989) *J. Appl. Phys.* 65: 3610). Generally, an anode layer, a hole transporting layer, an electron transport layer, and a cathode layer are deposited sequentially in the above order. The anode layer can be formed on a substrate, such as a glass. A three-layer structured device can include a hole transporting layer, a luminescent layer (i.e., light emitting layer), and an electron transporting layer, sandwiched between two layers of electrodes. An anode layer, a hole transporting layer, a luminescent layer, an electron transport layer, and a cathode layer are deposited sequentially in the above order. The luminescent layer can be another hole transporting or another electron transporting layer. Optionally, the electro-luminescence device can include a dopant-containing layer, which can be an electron transporting layer or a luminescent layer.

[0021] Each of the above mentioned layers can be made of various materials, as described in, for example, U.S. Pat. No. 5,698,740, Shirota (2000) *Mater. Chem.* 10: 1; Elschner et al. (2000) *Synth. Met.* 111-112: 139; and Groenendaal et al. (2000) *Adv. Mater.* 12: 481. More specifically, a substrate can be made of glass; an anode layer can be a film of a transparent electroconductive material, e.g., indium tin oxide (ITO); an optional hole injecting layer can be made of poly(ethylenedioxy)thiophene and polystyrene sulfonate (PEDT-PSS); a hole transporting layer can be made of 4,4'-bis[N-(1-naphthyl)-N-phenylamino]-biphenyl (NPD); an electron transporting layer can be made of tris(8-oxoquinoline)aluminum (Alq), or dopant (e.g., N,N-dimethylquinacridone DMQA)-containing Alq; and a cathode layer can be made of a metal film, e.g., an alloy of magnesium and silver.

[0022] The fabrication of an electro-luminescence device has been described in, for example, Tang & VanSlyke (1987) *Appl. Phys. Lett.* 51: 913; Tang et al. (1989) *J. Appl. Phys.* 65: 3610, or Kido & Lizumi (1997) *Chem. Lett.* 963. More specifically, each layer may be formed by any film forming method such as vacuum deposition. See U.S. Pat. No. 5,698,740.

[0023] This invention features a device containing a hole transporting layer that is made of one of the furan-containing compounds described above. Unexpectedly, the furan-containing compound is capable to transport holes at least as efficiently as NPD.

[0024] The specific examples below are to be construed as merely illustrative, and not limitative of the remainder of the disclosure in any way whatsoever. Without further elaboration, it is believed that one skilled in the art can, based on the description herein, utilize the present invention to its fullest

extent. All publications, including patents, cited herein are hereby incorporated by reference in their entirety.

EXAMPLES

[0025] ^1H and ^{13}C NMR spectra were recorded on a Varian 400-MHz spectrometer. UV-Vis absorption spectra were measured on a Shimadzu UV-1601PC UV-Visible spectrophotometer. Emission spectra were taken on an Aminco-Bowman Series 2 Luminescence spectrometer, and the quantum efficiencies were obtained by standard method using Coumarin 1 ($\Phi_f=0.99$ in ethyl acetate) as reference. FTIR spectra were measured on a Nicolet Magna-IR (series II) spectrophotometer. Cyclic voltammetry experiments were performed with a BAS CV-27 electrochemical analyzer. All measurements were carried out at room temperature with a conventional three-electrode configuration consisting of a platinum working electrode, an auxiliary platinum electrode, and a nonaqueous Ag/AgNO_3 (0.01 M in CH_3CN) reference electrode. Dichloromethane (CH_2Cl_2) was used as the solvent, and the supporting electrolyte was 0.1 M $\text{Bu}_4\text{N}^+\text{PF}_6^-$ in all experiments. $E_{1/2}$ values were determined as $(E_p^a + E_p^c)/2$, where E_p^a and E_p^c are the anodic and cathodic peak potentials, respectively. All potentials are reported with reference to Fc^+/Fc external standard. Differential scanning calorimetry (DSC) measurements were obtained on a TA Instrument 2920 thermal analyzer at a heating rate of 10°C./min . TGA measurements were performed on a TA Instrument 2950 TGA thermal analyzer. Elemental analyses were performed on a Perkin-Elmer CHN-2400 II analyzer.

[0026] Tetrahydrofuran (THF) was distilled from benzophenone ketyl. CH_2Cl_2 for reaction and electrochemical measurements was distilled from calcium hydride under nitrogen atmosphere. 1,4-Bisformylbiphenyl (see Colon & Kelsey (1986) *J. Org. Chem.* 51: 2627) and 2-phenyl-2-(2-phenylethynyl)dithiolane (see Lee et al. (2000) *J. Am. Chem. Soc.* 122: 4992) were synthesized according to the literature procedures. NPD, Alq, and DMQA were received from commercial sources and sublimed before use.

Example 1

Synthesis of Furan-Containing Compounds

[0027] Synthesis of Compound 1

[0028] Under nitrogen atmosphere, to a solution of 2-phenyl-2-(2-phenylethynyl)dithiolane (11.3 g, 40.0 mmol) in THF (200 mL) cooled to -78°C . was added dropwise BuLi (16 mL, 2.5 M in hexane, 150 mmol). The mixture was stirred at -78°C . for 1 h, to which a solution of terephthalaldehyde (2.68 g, 20.0 mmol) in THF (100 mL) was introduced. The mixture was gradually warmed to room temperature. After stirred for an additional 1.5 h, trifluoroacetic acid (3 mL, 39.0 mmol) was added and the mixture was stirred at room temperature for 10 h. It was then quenched with saturated NH_4Cl solution, washed with 10% NaHCO_3 solution, water, brine, and dried over MgSO_4 . The mixture was concentrated in vacuo to give Compound 1 (6.0 g, 58%): mp $291\text{--}292^\circ \text{C}$.; ^1H NMR (400 MHz, CDCl_3) δ 6.81 (s, 2H), 7.55 (s, 4H), 7.29 (tt, $J=7.2$, 1.2 Hz, 2H), 7.35 (tt, $J=7.2$, 1.2 Hz, 2H), 7.40 (br.t, $J=7.2$, 4H), 7.41 (br.t, $J=7.2$ Hz, 4H), 7.48 (dt, $J=7.2$, 1.2 Hz, 4H), 7.55 (s, 4H); 7.75 (dt, $J=7.2$, 1.2 Hz, 4H); ^{13}C NMR (100 MHz, CDCl_3)

δ 109.7, 123.8, 125.0, 125.8, 127.4, 127.6, 128.71, 128.74, 129.9, 130.4, 134.3, 147.5, 152.6; IR (KBr) 1596, 1513, 1490, 1451, 1151, 954, 759, 692; Anal. Calcd. for $C_{38}H_{26}O_2$: C, 88.69; H, 5.09. Found: C, 88.63; H, 5.41.

[0029] Synthesis of Compound 2

[0030] In a manner similar to that described above, 1,4-bisformylbiphenyl (1.05 g, 5.0 mmol) was allowed to react with the allenyl anion generated from the reaction of 2-phenyl-2-(1-phenylethynyl)-dithiolane (2.82 g, 10 mmol) in

[0033] The photophysical properties as well as thermochemistry data are summarized in Table 1. As revealed by thermogravimetric analysis (TGA) experiments, Compounds 1, 2, and 3 were thermally stable, neither decomposition nor vaporization being observed at 300° C. No spectroscopic changes (NMR, UV-Vis, and fluorescence) were observed when the compounds were treated under nitrogen atmosphere at 200° C. for 24 h. Glass transition temperatures (T_g) of Compounds 1, 2, and 3 were 88, 96, and 23° C., respectively.

TABLE 1

Physical Properties of Compounds 1, 2, and 3, NPD, and Alq									
Compound	T_g^a (° C.)	T_c^a (° C.)	T_d^b (° C.)	λ_{max} (nm)	λ_{cm} (nm)	Φ_f^c	$E_{ox}^{1/2}$ vs. Fe ^d	HOMO (eV)	LUMO (eV)
Compound 1	88	98	308	245, 383(253, 395)	439, 457(461, 480)	0.91	548	5.35	2.45
Compound 2	96	na ^e	434	244, 374(245, 375)	436, 459(450, 478)	0.92	645	5.45	2.51
Compound 3	23	73	339	240, 368(238, 371)	424, 448(440, 464)	0.95	550	5.35	2.34
NPD	102	179	382	273, 342(345)	430(465)	0.16	297	5.10	2.02
Alq	na	na	na	262, 388(262, 395)	503(507)	na	na	5.86	3.05

^aObtained from differential scanning calorimetry (DSC) measurements;

^bDecomposition temperature at 5% weight loss measured by TGA under N₂ atmosphere;

^cQuantum yield measured in CHCl₃ relative to Coumarin 1;

^dMeasured in CH₂Cl₂, all oxidation potentials are relative to ferrocene/ferrocenium half cell.

^ena: not available.

THF (100 mL) with BuLi (4 mL, 2.5 M in hexane, 10 mmol). The reaction mixture was then treated with CF₃CO₂H (1.5 mL, 19.5 mmol), followed by usual workup to give Compound 2 (2.5 g, 60%) mp 232-234° C.; ¹H NMR (400 MHz, CDCl₃) δ 6.82 (s, 2H), 7.28 (tt, J=7.2, 1.2 Hz, 2H), 7.33 (tt, J=7.2, 2.4 Hz, 2H), 7.40 (br.t, J=7.2, 4H), 7.41 (br.t, J=7.2, 4H), 7.49 (dt, J=7.2, 1.2 Hz, 4H), 7.54 (dt, J=8.8, 1.6 Hz, 4H), 7.66 (dt, J=8.8, 1.6 Hz, 4H), 7.76 (dt, J=7.2, 1.6 Hz, 4H); ¹³C NMR (400 MHz, CDCl₃) δ 109.7, 123.9, 124.9, 126.4, 126.8, 127.4, 127.6, 128.7, 128.8, 130.1, 130.5, 134.3, 139.3, 147.6, 152.7; IR (KBr) 1596, 1505, 1490, 1451, 1151, 823, 758, 701; Anal. Calcd. for $C_{38}H_{26}O_2$: C, 89.46; H, 5.12. Found: C, 89.41; H, 4.95.

[0031] Synthesis of Compound 3

[0032] In a manner similar to that described above, the reaction of 2-(hex-1-yn-1-yl)-2-phenyldithiolane (520 mg, 2.0 mmol) in THF (10 mL) with n-BuLi (0.8 mL, 2.5 M in hexane, 2 mmol) afforded the corresponding allenyl anion. The reaction mixture was then treated sequentially with 1,4-bisformylbiphenyl (210 mg, 1.0 mmol) and with CF₃CO₂H (0.4 mL, 5.2 mmol), followed by usual workup to afford Compound 3 (187 mg, 34%): mp 152-153° C.; ¹H NMR (400 MHz, CDCl₃) δ 0.99 (t, J=7.3 Hz, 6H), 1.48 (sext, J=7.3, 4H), 1.72 (tt, J=7.6, 7.3 Hz, 4H), 2.75 (t, J=7.6, 4H), 6.69 (s, 2H), 7.27 (t, J=7.9, 2H), 7.41 (t, J=7.9, 4H), 7.73 (d, J=8.6, 2H), 7.75 (t, J=7.9, 4H), 7.80 (d, J=8.6, 4H); ¹³C NMR (100 MHz, CDCl₃) δ 14.0, 22.7, 25.9, 32.1, 109.4, 123.7, 124.5, 125.8, 126.9, 127.2, 128.7, 130.76, 130.78, 138.7, 147.6, 152; IR (neat): 3034, 2960, 2931, 2873, 2858, 1613, 1594, 1577, 1534, 1493, 1474, 1374, 1276, 1191, 1115, 1073, 1003, 931, 910, 824, 798, 761, 722, 691, 667, 490 cm⁻¹; Anal. Calcd. for $C_{40}H_{38}O_2$: C, 87.24; H, 6.95. Found: C, 87.16; H, 7.27.

[0034] As shown in Table 1, Compounds 1, 2, and 3 exhibited blue emission with quantum yields in the range of 0.91-0.95. They also showed reversible redox waves as examined by cyclic voltammetry. The highest occupied molecular orbital (HOMO) energy levels of these compound were calculated based on the value of -4.8 eV for ferrocene with respect to zero vacuum level. See, e.g., Thelakkat & Schmidt (1998) *Adv. Mater.* 10: 219. The lowest unoccupied molecular orbital (LUMO) energy levels were thus obtained by subtracting the corresponding energy gap estimated from the absorption onset wavelength. See, e.g., Miyame et al. (1995) *J. Chem. Phys.* 103: 2738. The HOMO and LUMO levels for NPD are also listed for comparison. It is noteworthy that the HOMO and LUMO energy levels for Compounds, 1, 2, and 3 were slightly higher than that of NPD and fit very well with the frontier orbital energy for Alq.

EXAMPLE 2

Fabrication of Devices

[0035] Nine devices were fabricated as follows:

[0036] A device on the glass substrate had the typical structure of multiple organic layers sandwiched between ITO anode and Mg:Ag(80 nm)/Ag(150 nm) or LiF(0.5 nm)/Al(150 nm) bilayer cathode. The device also included a hole injecting layer made of PEDT:PSS (Bayer Corp.), a hole transporting layer made of NPD or furan compounds, and an electron transporting layer/light emitting layer made of Alq. The PEDT:PSS layer was prepared by spin coating. All the other organic materials were deposited at a rate of 0.2-0.3 nm/s by thermal evaporation at ~10⁻⁶ Torr. Unless otherwise specified, the thicknesses of the hole injecting layer, the hole transporting layer, and the electron transporting layer were 30, 40, and 60 nm, respectively. DMQA was

used as a dopant in the electron transporting layer. The current-voltage-brightness (I-V-L) characterization of each device was carried out by an Agilent 4155B semiconductor parameter analyzer and calibrated with silicon photodetectors.

[0037] The fabricated devices were tested. The results were outlined in Table 2.

20 mA/cm² was 6.8 V. The external quantum efficiency of device 6 was 1.48% and the maximum brightness for both devices 6 and 7 was about 3×10⁴ cd/m².

[0042] DMQA can serve as an effective emissive dopant for Alq. See, e.g., Shi & Tang (1997) *App. Phys. Lett.* 70: 1665. To obtain a device with the optimized configuration, multilayer devices ITO/PEDT:PSS/hole transporting layer

TABLE 2

Device Configuration ^a	λ_{EL} ^b	V_{on} ^c	V_{20} ^d	B_{20} ^e	V_{max} ^f	B_{max} ^g	η_{max} ^h	Lum Eff ⁱ	
								20 mA/cm ²	Peak
1 ITO/PEDT:PSS/Compound 1/Mg:Ag/Ag ^j	476	4.3	8.3	7	11.5	260	0.23	0.1	0.3
2 ITO/PEDT:PSS/Compound 1/Alq/Mg:Ag/Ag	530	2.5	8.3	770	12.0	18,600	1.32	1.5	1.6
3 ITO/PEDT:PSS/NPD/Alq/Mg:Ag/Ag	532	2.5	9.0	736	13.0	16,650	1.35	1.3	1.4
4 ITO/PEDT:PSS/Compound 2/Alq/Mg:Ag/Ag	540	2.5	11.5	747	16.0	16,100	1.33	1.0	1.1
5 ITO/PEDT:PSS/Compound 3/Alq/Mg:Ag/Ag	538	2.5	9.6	1,050	12.5	9,000	1.75	2.1	2.2
6 ITO/PEDT:PSS/Compound 1/Alq/LiF/Al	535	2.0	6.8	869	11.5	30,400	1.48	2.6	3.6
7 ITO/PEDT:PSS/NPD/Alq/LiF/Al	537	2.0	6.8	711	12.0	30,800	1.29	2.1	2.7
8 ITO/PEDT:PSS/Compound 1/Alq:DMQA (0.5%)/Alq/LiF/Al ^k	542, 578	2.0	7.9	2,050	18.0	182,800	2.78	6.9	10.1
9 ITO/PEDT:PSS/NPD/Alq:DMQA (0.5%)/Alq/LiF/Al ^k	542, 578	2.0	8.4	1,970	19.5	180,400	2.67	6.2	9.3

^aThickness: PEDT:PSS (30 nm), hole transporting layer (40 nm), Alq (60 nm), unless otherwise specified.

^bEL maximum (nm);

^cTurn-on voltage (V) at which emission starts to be detectable;

^dVoltage (V) taken at a current density of 20 mA/cm²;

^eBrightness (cd/m²) taken at a current density of 20 mA/cm²;

^fVoltage (V) at the maximum brightness;

^gMaximum brightness (cd/m²);

^hMaximum external quantum efficiency;

ⁱLuminous efficiency (lm/W) taken at 20 mA/cm²;

^jThe thickness of the layer containing Compound 1 is 120 nm;

^kAlq:DMQA (20 nm), Alq (40 nm).

[0038] Device 1, containing ITO/PEDT:PSS/Compound 1 (120 nm)/Mg:Ag (800 nm)/Ag (150 nm), exhibited a blue emission at 476 nm and tolerated very high current density of 2500 mA/cm² at 12.5 V. The external quantum efficiency of 0.23% and the brightness of 260 cd/m² for this device were obtained.

[0039] In device 2, the double layer device with the configuration of ITO/PEDT:PSS/Compound 1 (40 nm)/Alq (60 nm)/Mg:Ag (800 nm)/Ag (150 nm) was fabricated.

[0040] Device 3 had similar configuration using NPD as the hole transporting material. Both devices produced the typical emission of Alq at 530 nm. The two devices had similar turn-on voltage and external quantum efficiency, but unexpectedly, device 2 has a higher maximal brightness (18,600 cd/m²) than that of device 3 (16,650 cd/m²). When Compound 2 (device 4) and Compound 3 (device 5) were employed as the hole transporting materials, the maximal brightness reached 16,000 and 9,000 cd/m², respectively.

[0041] LiF/Al has been used as a cathode in an OLED device. See, e.g., Huang et al. (1997) *Appl. Phys. Lett.* 70: 152; and Jabbour et al. (1997) *Appl. Phys. Lett.* 71: 1762. Two devices were fabricated with the configuration of ITO/PEDT:PSS/hole transporting layer (40 nm)/Alq (60 nm)/LiF (0.5 nm)/Al (150 nm), wherein the hole transporting layer was made of either Compound 1 (device 6) or NPD (device 7). Both devices had a turn-on voltage (including the control device) of 2.0 V. In addition, the operating voltage at

(40 nm)/Alq:DMQA (20 nm)/Alq (40 nm)/LiF (0.5 nm)/Al (150 nm) were fabricated, wherein the hole transporting layer was made of Compound 1 (device 8) or NPD (device 9). Various DMQA concentrations were used and the emissive maximum was 542 nm, with a shoulder at 578 nm. The optimal DMQA concentration in Alq was found to be 0.5%, providing an external quantum efficiency of 2.78% and a maximum luminance of 182,800 cd/m² at 18 V for device 8. The external quantum efficiency and the maximal luminance for device 9 were 2.67% and 180,200 cd/m² at 19.5 V, respectively.


OTHER EMBODIMENTS

[0043] All of the features disclosed in this specification may be combined in any combination. Each feature disclosed in this specification may be replaced by an alternative feature serving the same, equivalent, or similar purpose. Thus, unless expressly stated otherwise, each feature disclosed is only an example of a generic series of equivalent or similar features.

[0044] From the above description, one skilled in the art can easily ascertain the essential characteristics of the present invention, and without departing from the spirit and scope thereof, can make various changes and modifications of the invention to adapt it to various usages and conditions. Accordingly, other embodiments are also within the scope of the following claims.

What is claimed is:


1. A compound of formula (I):



wherein

- Ar is aryl, heteroaryl, or oligoaryl;
 - A is furyl;
 - B is aryl or heteroaryl;
 - R₁ is hydrogen, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, heterocyclyl, or oligoaryl; and
 - R₂ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, or heterocyclyl.
2. The compound of claim 1, wherein A is furyl substituted at positions 2 and 5.
 3. The compound of claim 1, wherein B is aryl.
 4. The compound of claim 3, wherein B is phenyl.
 5. The compound of claim 4, wherein R₂ is hydrogen.
 6. The compound of claim 1, wherein Ar is aryl.
 7. The compound of claim 6, wherein Ar is phenyl.
 8. The compound of claim 7, wherein A is furyl substituted at positions 2 and 5.
 9. The compound of claim 8, wherein B is aryl.
 10. The compound of claim 9, wherein B is phenyl.
 11. The compound of claim 10, wherein R₂ is hydrogen.
 12. The compound of claim 11, wherein R₁ is phenyl, and substituted at position 3 of furyl.
 13. The compound of claim 1, wherein Ar is oligoaryl.
 14. The compound of claim 13, wherein Ar is biphenyl.
 15. The compound of claim 14, wherein A is furyl substituted at positions 2 and 5.
 16. The compound of claim 15, wherein B is aryl.
 17. The compound of claim 16, wherein B is phenyl.
 18. The compound of claim 17, wherein R₂ is hydrogen.
 19. The compound of claim 18, wherein R₁ is phenyl, and substituted at position 3 of furyl.
 20. An electro-luminescence device, comprising:
 - an anode layer,
 - a hole transporting layer,
 - an electron transporting layer, and
 - a cathode layer,

wherein the anode layer, the hole transporting layer, the electron transporting layer, and the cathode layer are disposed in the above order; and the hole transporting layer includes a compound of formula (I):

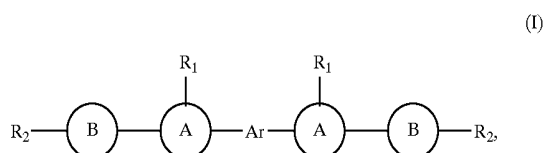

in which

- Ar is aryl, heteroaryl, or oligoaryl;
 - A is furyl;
 - B is aryl or heteroaryl;
 - R₁ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, heterocyclyl, or oligoaryl; and
 - R₂ is hydrogen, alkyl, alkenyl, alkynyl, aryl, heteroaryl, cyclyl, or heterocyclyl.
21. The device of claim 20, wherein A is furyl substituted at positions 2 and 5.
 22. The device of claim 20, wherein B is aryl.
 23. The device of claim 22, wherein B is phenyl.
 24. The device of claim 23, wherein R₂ is hydrogen.
 25. The device of claim 20, wherein Ar is aryl.
 26. The device of claim 25, wherein Ar is phenyl.
 27. The device of claim 26, wherein A is furyl substituted at positions 2 and 5.
 28. The device of claim 27, wherein B is aryl.
 29. The device of claim 28, wherein B is phenyl.
 30. The device of claim 29, wherein R₂ is hydrogen.
 31. The device of claim 30, wherein R₁ is phenyl, and substituted at position 3 of furyl.
 32. The device of claim 30, wherein R₁ is n-butyl, and substituted at position 3 of furyl.
 33. The device of claim 20, wherein Ar is oligoaryl.
 34. The device of claim 33, wherein Ar is biphenyl.
 35. The device of claim 34, wherein A is furyl substituted at positions 2 and 5.
 36. The device of claim 35, wherein B is aryl.
 37. The device of claim 36, wherein B is phenyl.
 38. The device of claim 37, wherein R₂ is hydrogen.
 39. The device of claim 38, wherein R₁ is phenyl, and substituted at position 3 of furyl.

* * * * *

专利名称(译)	含呋喃的空穴传输材料		
公开(公告)号	US20040131883A1	公开(公告)日	2004-07-08
申请号	US10/643041	申请日	2003-08-18
[标]申请(专利权)人(译)	LUH田YAU 张凌志 李勤发 吴忠帜 陈介韦		
申请(专利权)人(译)	LUH添YAU 张灵芝 李金-FA 胡忠-CHIH 陈界韦		
当前申请(专利权)人(译)	LUH添YAU 张灵芝 李金-FA 胡忠-CHIH 陈界韦		
[标]发明人	LUH TIEN YAU ZHANG LINGZHI LEE CHIN FA WU CHUNG CHIH CHEN CHIEH WEI		
发明人	LUH, TIEN-YAU ZHANG, LINGZHI LEE, CHIN-FA WU, CHUNG-CHIH CHEN, CHIEH-WEI		
IPC分类号	H01L51/50 C07D307/36 C07D307/40 C07D307/42 H05B33/14 H05B33/22 H05B33/12 C07D307/02		
CPC分类号	C07D307/36 C07D307/42 H01L51/0037 Y10S428/917 H01L51/0081 H01L51/5048 H01L2251/308 H01L51/0065		
优先权	60/404090 2002-08-16 US		
其他公开文献	US7128983		
外部链接	Espacenet USPTO		

摘要(译)

含呋喃的式 (I) 化合物：Ar是芳基，杂芳基或低聚芳基；A是furyl；B是芳基或杂芳基；R1是氢，链烯基，炔基，芳基，杂芳基，环基，杂环基或低聚芳基；R2是氢，烷基，烯基，炔基，芳基，杂芳基，环基或杂环基。该化合物可用作有机发光二极管器件中的空穴传输材料。

(I)

