

FIG. 1

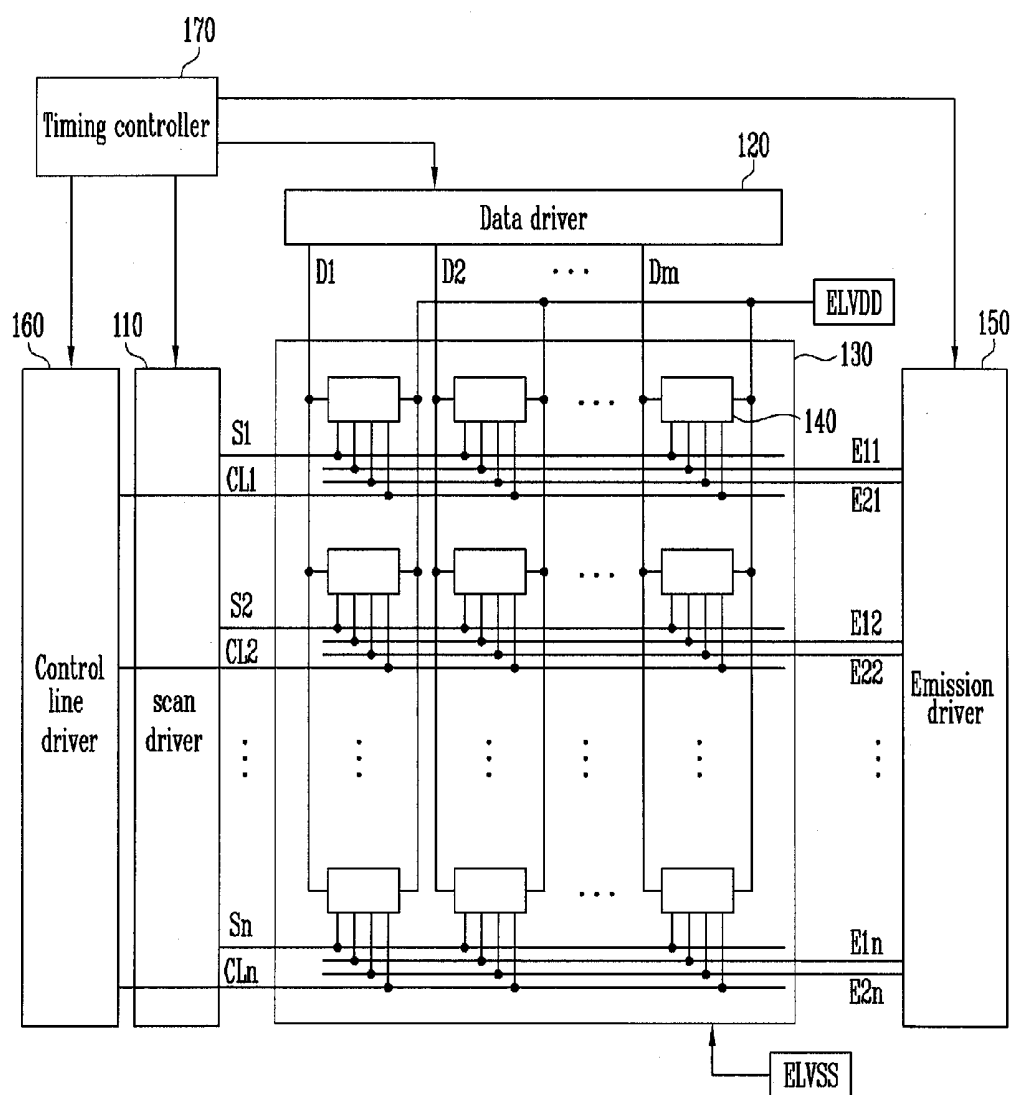


FIG. 2

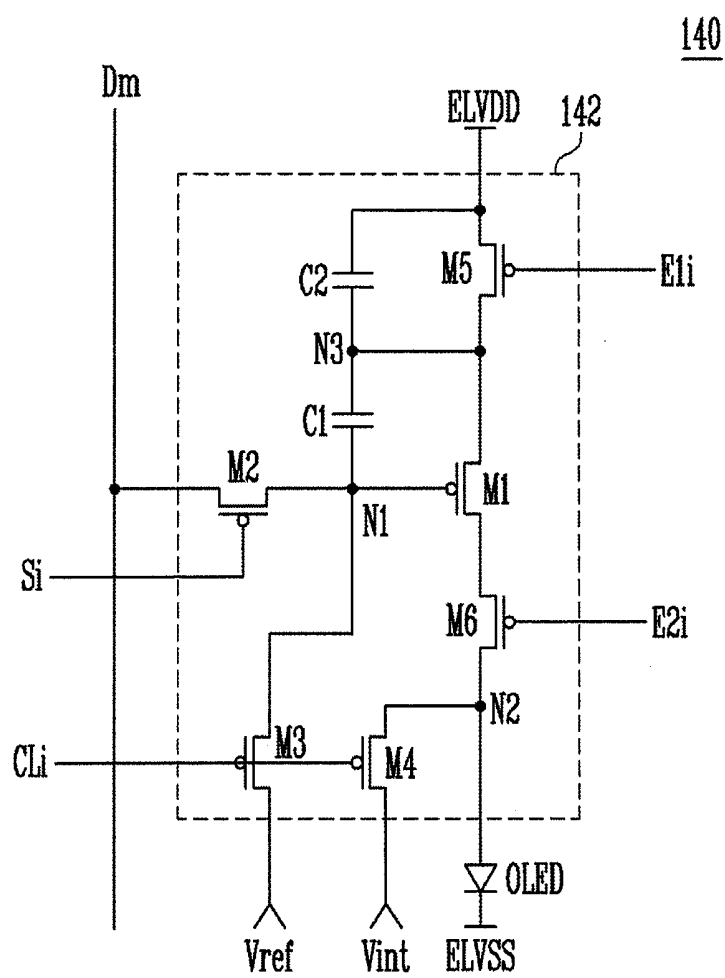


FIG. 3

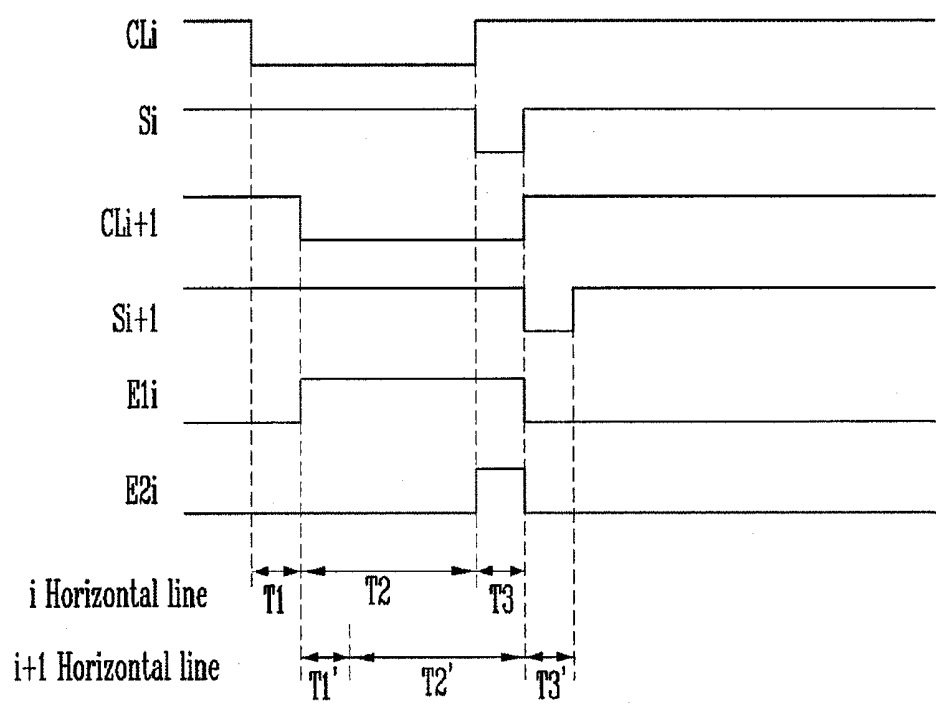


FIG. 4


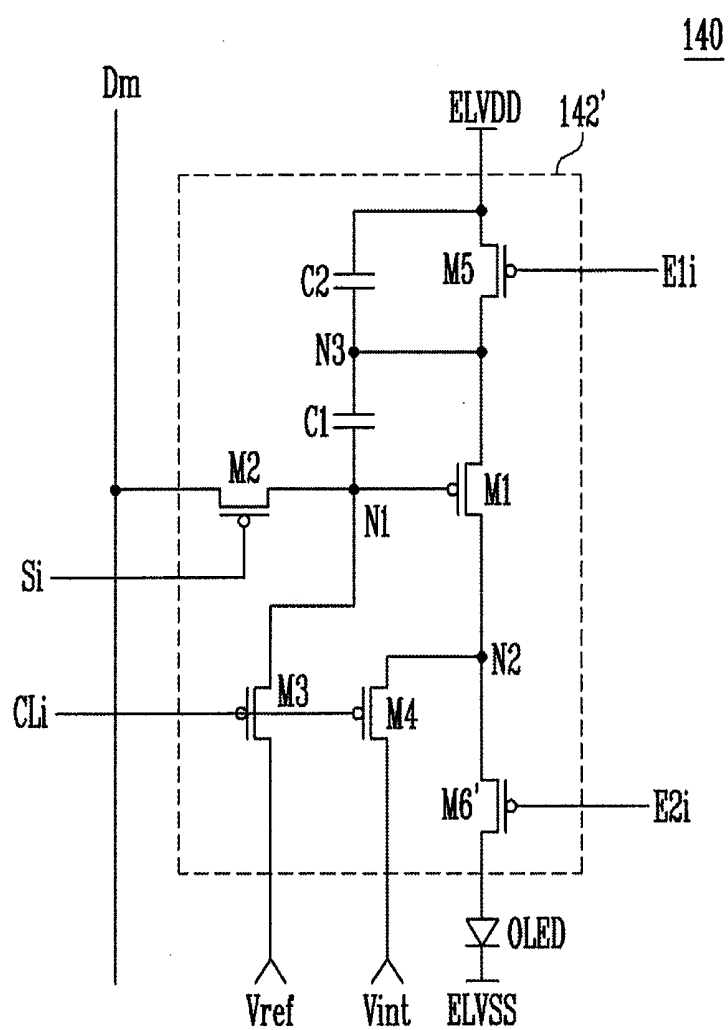


FIG. 5

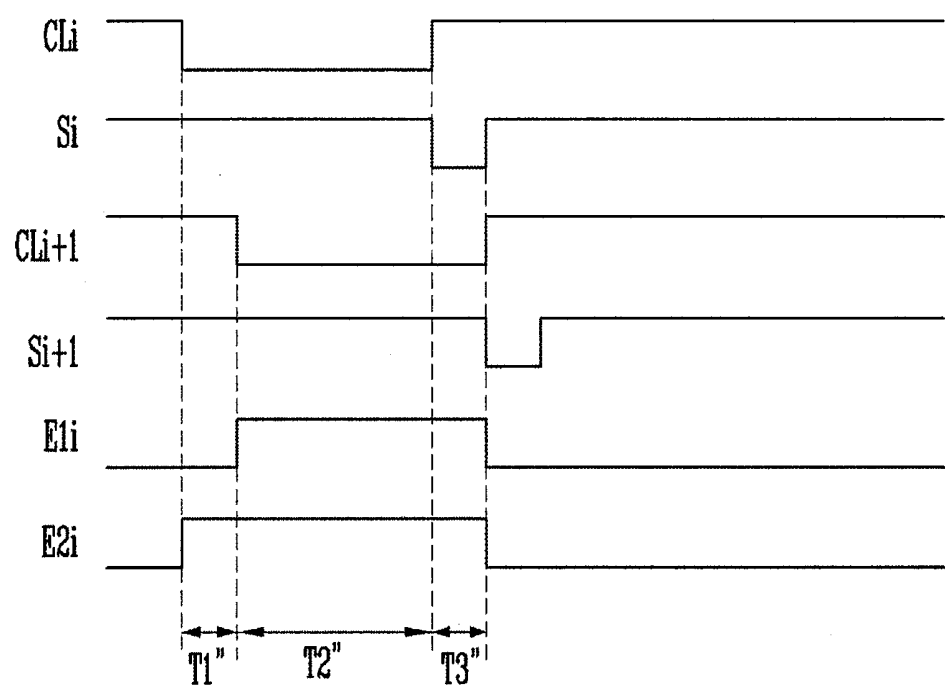

PIXEL, ORGANIC LIGHT EMITTING DISPLAY DEVICE, AND DRIVING METHOD THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to, and the benefit of, Korean Patent Application No. 10-2015-0092527, filed on Jun. 29, 2015, in the Korean Intellectual Property Office, the entire contents of which are incorporated herein by reference in their entirety.

BACKGROUND

[0002] 1. Field

[0003] Exemplary embodiments of the present invention relate to a pixel, an organic light emitting display device including the pixel, and a driving method thereof. More particularly, the embodiments of the present invention relate to a pixel that can improve image quality, an organic light emitting display device including the pixel, and the driving method thereof.

[0004] 2. Description of the Related Art

[0005] With the development of information technology, the importance of a display device, which is a connection medium between a user and information, has increased. Accordingly, the use of a flat panel display, such as a liquid crystal display, an organic light emitting display device, and a plasma display panel, has increased.

[0006] The organic light emitting display device uses organic light emitting diodes that generate light through reunion of electrons and holes, and has features of fast response speed and low power consumption.

[0007] The organic light emitting display device includes a plurality of pixels that are disposed at regions that are defined by data lines and scan lines. The pixels consist of at least two transistors and at least one capacitor, and generally include an organic light emitting diode and a driving transistor.

[0008] The organic light emitting display device has a feature that power consumption is lower, but an amount of current that flows to the organic light emitting diode may be varied depending on a threshold voltage variation of the driving transistor that is included in the pixel, which may cause a non-uniform display. That is, the characteristics of the driving transistor may be changed depending on the manufacturing process of the driving transistor in the pixels. Further, it may be difficult or impossible to make all transistors of the organic light emitting display device have equal characteristics, and a threshold voltage deviation of the driving transistor is generated thereby.

[0009] A method that adds a compensation circuit consisting of a plurality of transistors and capacitors at each pixel has been introduced to overcome this problem. The compensation circuit included in each pixel charges a voltage corresponding to a threshold voltage of the driving transistor for a first horizontal period, and compensates the deviation of the driving transistor accordingly.

[0010] However, as the panel is larger and has high resolution, the time that is allocated for the first horizontal period is reduced, and the threshold voltage of the driving transistor is not sufficiently compensated.

[0011] The above information disclosed in this Background section is only for enhancement of understanding of

the background of the invention and therefore it may contain information that does not form prior art.

SUMMARY

[0012] Embodiments of the present invention may provide a pixel, an organic light emitting display device including the pixel, and a driving method thereof having features of improved display quality.

[0013] A pixel according to an exemplary embodiment of the present invention may include an organic light emitting diode, a first transistor configured to control an amount of current that passes through the organic light emitting diode to flow to a second power from a first power that is connected to a first electrode of the first transistor corresponding to a voltage of a first node, a second transistor between a data line and the first node, a third transistor between the first node and a reference power, a fourth transistor between a second node and an initialization power, the second node being connected to an anode electrode of the organic light emitting diode, a first capacitor, and a second capacitor connected in series to the first capacitor, the first and second capacitors being between the first node and the first power, wherein a third node that is a common node of the first capacitor and second capacitor is electrically connected to the first electrode of the first transistor.

[0014] The reference power have a voltage at which the first transistor is turned on.

[0015] The initialization power have a voltage at which the organic light emitting diode is turned off.

[0016] The third transistor and the fourth transistor may be concurrently turned on and turned off and their turned-on period does not overlap a turned-on period of the second transistor.

[0017] The third transistor and the fourth transistor may be turned on before the second transistor is turned on.

[0018] The pixel may include a fifth transistor between the third node and the first power, and a sixth transistor between the second node and the first transistor.

[0019] The turned-on period of the fifth transistor may not overlap that of the second transistor, and the fifth transistor may be turned off after the third transistor is turned on.

[0020] The sixth transistor may be turned off when the second transistor is turned on.

[0021] The pixel may include a fifth transistor between the third node and the first power, and a sixth transistor between the second node and the organic light emitting diode.

[0022] The turned-on period of the fifth transistor may not overlap that of the second transistor, and the fifth transistor may be turned off after the third transistor is turned on.

[0023] The turned-on period of the sixth transistor may not overlap that of the second transistor and the third transistor.

[0024] An organic light emitting display device according to an exemplary embodiment of the present invention may include pixels disposed in regions that are defined by scan lines, data lines, control lines, first light emitting control lines, and second light emitting control lines, a scan driver configured to supply scan signals to the scan lines, a data driver configured to supply data signals to the data lines, and a control line driver configured to supply control signals to the control lines, wherein each pixel at an i-th horizontal line (i is natural number) includes an organic light emitting diode, a first transistor configured to control an amount of current that passes through the organic light emitting diode to flow to a second power from a first power that is

connected to a first electrode of the first transistor corresponding to a voltage of a first node, a second transistor between a data line of the data lines and the first node and configured to be turned on when a scan signal of the scan lines is supplied to an i-th scan line, a third transistor between the first node and a reference power and configured to be turned on when a control signal of the control signals is supplied to an i-th control line, a fourth transistor between a second node and an initialization power and configured to be turned on when the control signal of the control signals is supplied to the i-th control line, the second node being connected to an anode electrode of the organic light emitting diode, a first capacitor, a second capacitor connected in series to the first capacitor, the first and second capacitors being between the first node and the first power, and a third node that is a common node of the first capacitor and second capacitor and that is electrically connected to the first electrode of the first transistor.

[0025] The reference power may have a voltage at which the first transistor is turned on.

[0026] The initialization power may have a voltage at which the organic light emitting diode is turned off.

[0027] The scan driver may sequentially supply the scan lines with scan signals, and, the control line driver may supply the i-th control line with the control signal having a wider width than that of the scan signal, the control signal being supplied before the scan signal is supplied to the i-th scan line.

[0028] Each pixel at the i-th horizontal line (i is natural number) may include a fifth transistor between the third node and the first power and configured to be turned off when a first light emitting control signal is supplied to an i-th first light emitting control line of the first light emitting control lines and to be turned on for other periods, and a sixth transistor between the second node and the first transistor and configured to be turned off when a second light emitting control signal is supplied to an i-th second light emitting control line of the second light emitting control lines and to be turned on for other periods.

[0029] The organic light emitting display device according to an exemplary embodiment may include an emission driver that supplies the first light emitting control signal to the i-th light emitting control line such that a part thereof overlaps the control signal supplied to the i-th control line and another part thereof overlaps the scan signal supplied to the i-th scan line and supplies the second light emitting signal to the i-th second light emitting control line such that a part thereof overlaps the scan signal supplied to the i-th scan line.

[0030] Each pixel at an i-th horizontal line (i is natural number) may include a fifth transistor between the third node and the first power and configured to be turned off when a first light emitting control signal is supplied to an i-th first light emitting control line of the first light emitting control lines and to be turned on for other periods, and a sixth transistor between the second node and the anode electrode of the organic light emitting diode and configured to be turned off when a second light emitting control signal is supplied to an i-th second light emitting control line of the second light emitting control lines and to be turned on for other periods.

[0031] The organic light emitting display device may include an emission driver that supplies supply the first light emitting control signal to the i-th light emitting control line

such that a part thereof overlaps the control signal of the control signals supplied to the i-th control line and another part thereof overlaps the scan signal of the scan signals supplied to the i-th scan line and supplies the second light emitting control signal to the i-th second light emitting control line such that a part thereof overlaps the control signal of the control signals supplied to the i-th control line and the scan signal of the scan signals supplied to the i-th scan line.

[0032] A method of driving an organic light emitting display device including pixels at horizontal lines, the method including initializing a driving transistor in a pixel of the pixels to an ON-bias condition, compensating for a threshold voltage of the driving transistor, and charging at least one capacitor connected to the driving transistor with a voltage corresponding to a data signal, wherein at least one part of the initializing and the compensating of the pixels that are at an i+1-th horizontal line (i is natural number) overlaps the compensating of the pixels that are at an i-th horizontal line.

[0033] A pixel, an organic light emitting display device using this, and the driving method thereof according to an exemplary embodiment of the present invention compensates a threshold voltage of a driving transistor regardless of a period that a data signal is supplied. That is, a threshold voltage of a driving transistor is compensated for sufficient time before a data signal is supplied, and a display quality can be improved accordingly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] Example embodiments will be described more fully hereinafter with reference to the accompanying drawings; however, they may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the example embodiments to those skilled in the art. In the drawing figures, dimensions may be exaggerated for clarity of illustration. Like reference numerals refer to like elements (or components) throughout.

[0035] FIG. 1 is a block diagram showing an organic light emitting display device according to an exemplary embodiment of the present invention.

[0036] FIG. 2 is a circuit diagram showing a pixel according to an exemplary embodiment of the present invention.

[0037] FIG. 3 is a waveform diagram showing an exemplary embodiment of a driving method of the pixel shown in FIG. 2.

[0038] FIG. 4 is a circuit diagram showing a pixel according to another exemplary embodiment of the present invention.

[0039] FIG. 5 is a waveform diagram showing an exemplary embodiment of a driving method of the pixel shown in FIG. 4.

DETAILED DESCRIPTION

[0040] Hereinafter, one or more embodiments of the present invention will be described, with reference to the accompanying drawings, to enable those skilled in the art to implement the invention. However, as those skilled in the art would realize, the described embodiment may be modified in various suitable ways, all without departing from the spirit or scope of the present invention.

[0041] That is, the present invention is not limited by the hereafter-disclosed exemplary embodiments, and may be modified in various suitable ways.

[0042] It will be understood that, although the terms “first”, “second”, “third”, etc., may be used herein to describe various elements, components, regions, layers, and/or sections, these elements, components, regions, layers, and/or sections should not be limited by these terms. These terms are used to distinguish one element, component, region, layer or section from another element, component, region, layer or section. Thus, a first element, component, region, layer, or section discussed below could be termed a second element, component, region, layer, or section, without departing from the spirit and scope of the present invention.

[0043] Further, it will also be understood that when one element, component, region, layer and/or section is referred to as being “between” two elements, components, regions, layers, and/or sections, it can be the only element, component, region, layer and/or section between the two elements, components, regions, layers, and/or sections, or one or more intervening elements, components, regions, layers, and/or sections may also be present.

[0044] The terminology used herein is for the purpose of describing particular embodiments and is not intended to be limiting of the present invention. As used herein, the singular forms “a” and “an” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprise,” “comprises,” “comprising,” “includes,” “including,” and “include,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0045] As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. Expressions such as “at least one of,” when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list. Further, the use of “may” when describing embodiments of the present invention refers to “one or more embodiments of the present invention.” Also, the term “exemplary” is intended to refer to an example or illustration.

[0046] It will be understood that when an element or layer is referred to as being “on,” “connected to,” “coupled to,” “connected with,” “coupled with,” or “adjacent to” another element or layer, it can be “directly on,” “directly connected to,” “directly coupled to,” “directly connected with,” “directly coupled with,” or “directly adjacent to” the other element or layer, or one or more intervening elements or layers may be present. Further “connection,” “connected,” etc. may also refer to “electrical connection,” “electrically connect,” etc. depending on the context in which they are used as those skilled in the art would appreciate. When an element or layer is referred to as being “directly on,” “directly connected to,” “directly coupled to,” “directly connected with,” “directly coupled with,” or “immediately adjacent to” another element or layer, there are no intervening elements or layers present.

[0047] As used herein, the term “substantially,” “about,” and similar terms are used as terms of approximation and not as terms of degree, and are intended to account for the

inherent deviations in measured or calculated values that would be recognized by those of ordinary skill in the art.

[0048] As used herein, the terms “use,” “using,” and “used” may be considered synonymous with the terms “utilize,” “utilizing,” and “utilized,” respectively.

[0049] FIG. 1 is a block diagram showing an organic light emitting display device according to an exemplary embodiment of the present invention.

[0050] Referring to FIG. 1, an organic light emitting display device according to an exemplary embodiment of the present invention is provided with a pixel portion **130** including a plurality of pixels **140**, a scan driver **110** for driving scan lines (S1 to Sn), a data driver **120** for driving data lines (D1 to Dm), an emission driver **150** for driving first light emitting control lines (E11 to E1n) and second light emitting control lines (E21 to E2n), a control line driver **160** for driving control lines (CL1 to CLn), and a timing controller **170** for controlling drivers **110**, **120**, **150**, and **160**.

[0051] A pixel portion **130** denotes a display region of an organic light emitting display device. A pixel portion **130** is provided with pixels **140** that are at respective regions that are defined by scan lines (S1 to Sn), data lines (D1 to Dm), control lines (CL1 to CLn), first light emitting control lines (E11 to E1n), and second light emitting control lines (E21 to E2n).

[0052] Each pixel **140** includes a driving transistor. Driving transistors are separately driven by an ON-bias step, a threshold voltage compensating step, a data signal storage step, and a light emitting step. Here, a part of a threshold voltage compensating step of pixels **140** that are disposed at an i-th horizontal line (i is natural number) overlaps the ON-bias step and a threshold voltage compensation step of pixels **140** that are at an i+1-th horizontal line. In this regard, hereinafter, the detailed description will be provided.

[0053] The scan driver **110** supplies scan lines (S1 to Sn) with scan signals. For example, the scan driver **110** can sequentially supply scan lines (S1 to Sn) with scan signals. When a scan signal is supplied to scan lines (S1 to Sn), groups of the pixels **140** are selected as a horizontal unit. Additionally, the scan driver **110** supplies an i+1-th scan line Si+1 with a scan signal such that the scan signal does not overlap a scan signal provided to an i-th scan line Si. Here, the scan signal is set to a gate-on voltage such that a transistor included in the pixels **140** can be turned on.

[0054] The control line driver **160** supplies control lines (CL1 to CLn) with a control signal. For example, the control line driver **160** sequentially supplies control lines (CL1 to CLn) with a control signal.

[0055] The control line driver **160** supplies an i-th control line CLi with a control signal that overlaps a scan signal of the i-th scan line Si, and has a wider width than the scan signal of the i-th scan line Si. For example, the control line driver **160** can supply the i-th control line CLi with the control signal before a scan signal is supplied to the i-th scan line Si. Additionally, because the control signal is set to be wider than a scan signal, the control signal that is supplied to an i+1-th control line CLi overlaps a part of the control signal that is supplied to the i-th control line CLi. The control signal is set to a gate-on voltage such that a transistor included in the pixels **140** can be turned on.

[0056] The emission driver **150** supplies first light emitting control lines (E11 to E1n) with a first light emitting control signal, and supplies second light emitting control lines (E21 to E2n) with a second light emitting control

signal. For example, the emission driver **150** sequentially supplies first light emitting control lines (E11 to E1n) with first light emitting control signals, and can sequentially supply the second light emitting control lines (E21 to E2n) with second light emitting control signals.

[0057] Also, the emission driver **150** supplies an i-th first light emitting control line E1i with a first light emitting control signal that overlaps a part of the control signal supplied to the i-th control line CLi, and that overlaps a scan signal supplied to the i-th scan line Si. Also, the emission driver **150** supplies an i-th second light emitting control line E2i with a second control signal such that this overlaps a scan signal supplied to the i-th scan line Si. Here, a first light emitting control signal and a second light emitting control signal are set to a gate-off voltage such that a transistor included in pixels **140** can be turned off.

[0058] The data driver **120** supplies data lines (D1 to Dm) with data signals to be synchronized with the scan signals. Data signals supplied to data lines (D1 to Dm) are supplied to pixels **140** selected by the scan signal. Pixels **140** receiving the data signals generate light with luminance corresponding to the data signals.

[0059] A timing controller **170** controls the scan driver **110**, the data driver **120**, the emission driver **150**, and the control line driver **160**.

[0060] FIG. 2 is a circuit diagram showing a pixel according to an exemplary embodiment of the present invention. A pixel that is connected to an m-th data line Dm and the i-th scan line Si is shown in FIG. 2, for ease of description.

[0061] Referring to FIG. 2, the pixel **140** according to an exemplary embodiment of the present invention is provided with a pixel circuit **142** for controlling an amount of current that is supplied to an organic light emitting diode (OLED).

[0062] An anode electrode of the organic light emitting diode (OLED) is connected to the pixel circuit **142**, and a cathode electrode is connected to a second power ELVSS. This organic light emitting diode (OLED) generates a luminance of light corresponding to the amount of current supplied from the pixel circuit **142**. Meanwhile, the second power ELVSS can be set to a voltage lower than a first power ELVDD.

[0063] The pixel circuit **142** controls the amount of current supplied to organic light emitting diode (OLED) in accordance with a data signal. For this purpose, the pixel circuit **142** is provided with a first transistor M1 to a sixth transistor M6, a first capacitor C1, and a second capacitor C2.

[0064] A first electrode of the first transistor M1 (i.e., a driving transistor) is connected to the first power ELVDD through the fifth transistor M5, and a second electrode of the first transistor M1 is connected to the anode electrode of the organic light emitting diode (OLED) through the sixth transistor M6. A gate electrode of the first transistor M1 is connected to a first node N1. The first transistor M1 controls the amount of current flowing to the second power ELVSS through the organic light emitting diode (OLED) from the first power ELVDD.

[0065] A first electrode of the second transistor M2 is connected to the data line Dm, and a second electrode of the second transistor M2 is connected to the first node N1. A gate electrode of the second transistor M2 is connected to the scan line Si. This second transistor M2 connects the data line Dm with the first node N1 when the scan signal is supplied to the scan line Si.

[0066] A first electrode of the third transistor M3 is connected to the first node N1, and a second electrode of the third transistor M3 is connected to a reference power Vref. A gate electrode of the third transistor M3 is connected to the control line CLi. This third transistor M3 is turned on to supply the first node N1 with a voltage of the reference power Vref when the control signal is supplied to the control line CLi. Here, the reference power Vref is set to a voltage that is lower than the first power ELVDD, for example, the reference power Vref can be set to a voltage that causes the first transistor M1 to be turned on. As an example, the reference power Vref can be set to a specific value in a voltage range of the data signal.

[0067] A first electrode of the fourth transistor M4 is connected to a second node N2, and a second electrode of the fourth transistor M4 is connected to an initialization power Vint. A gate electrode of the fourth transistor M4 is connected to the control line CLi. The fourth transistor M4 is turned on to provide a voltage of the initialization power Vint to the second node N2 when the control signal is supplied to the control line CLi. Here, the second node N2 denotes a node that is electrically connected to the anode electrode of the organic light emitting diode (OLED). And, the initialization power Vint is set to a voltage that causes the organic light emitting diode (OLED) to be turned off.

[0068] A first electrode of the fifth transistor M5 is connected to the first power ELVDD, and a second electrode of the fifth transistor M5 is connected to a third node N3. A gate electrode of the fifth transistor M5 is connected to the first light emitting control line E1i. This fifth transistor M5 is turned off when the light emitting control signal is supplied to the first light emitting control line E1i, and is turned on otherwise. Meanwhile, the third node N3 is electrically connected to the first electrode of the first transistor M1.

[0069] A first electrode of the sixth transistor M6 is connected to the second electrode of the first transistor M1, and a second electrode of the sixth transistor M6 is connected to the second node N2. A gate electrode of the sixth transistor M6 is connected to the second light emitting control line E2i. The sixth transistor M6 is turned off when the second light emitting control signal is supplied to the second light emitting control line E2i, and is turned on otherwise.

[0070] The first capacitor C1 and the second capacitor C2 are connected in series between the first node N1 and the first power ELVDD. And, a common terminal of the first capacitor C1 and the second capacitor C2 is electrically connected to the third node N3. The first capacitor C1 and the second capacitor C2 store a voltage corresponding to the threshold voltage of the first transistor M1 and the data signal.

[0071] FIG. 3 is a waveform diagram showing an exemplary embodiment of a driving method of the pixel shown in FIG. 2.

[0072] Referring to FIG. 3, a control signal is supplied to the i-th control line CLi for a first period T1. When the control signal is supplied to the i-th control line CLi, the third transistor M3 and the fourth transistor M4 are turned on.

[0073] When the fourth transistor M4 is turned on, a voltage of the initialization power Vint is supplied to the anode electrode of the organic light emitting diode (OLED),

a parasitic capacitance of the organic light emitting diode (OLED) is discharged, and the organic light emitting diode (OLED) is initialized.

[0074] When the third transistor M3 is turned on, a voltage of the reference power Vref is supplied to the first node N1. When the voltage of the reference power Vref is supplied to the first node N1, the first transistor M1 is turned on. A current from the first power ELVDD passes through the fifth transistor M5, the first transistor M1, the sixth transistor M6, and the fourth transistor M4 to flow to the initialization power Vint.

[0075] That is, the first transistor M1 is set to an ON-bias condition for the first period T1, and a uniform luminance of an image can be displayed accordingly. More specifically, a voltage characteristic of the first transistor M1 included in the pixel 140 is set to be non-uniform corresponding to a data signal of a previous period, and thus luminance becomes non uniform. Accordingly, the voltage of the reference power Vref is supplied to the gate electrode of the driving transistor/first transistor M1 for the first period T1 to initialize the first transistor M1 to an ON-bias condition in the present embodiment, and thus uniform luminance of the image can be displayed. Additionally, because current is supplied to the initialization power Vint through the first transistor M1 for the first period T1, the organic light emitting diode (OLED) is set to a non-emitting condition.

[0076] The first light emitting control signal is supplied to the i-th first light emitting control line E1i for a second period T2. When the first light emitting control signal is supplied to the i-th first light emitting control line E1i, the fifth transistor M5 is turned off. When the fifth transistor M5 is turned off, the first power ELVDD and the third node N3 are electrically decoupled.

[0077] In this case, because the first node N1 sustains the voltage of the reference power Vref, a current from the third node N3 passes through the first transistor M1, the sixth transistor M6, and the fourth transistor M4 to flow to the initialization power Vint. The voltage of the third node N3 is dropped from the voltage of the first power ELVDD to a voltage that is the threshold voltage of the first transistor M1 added to the reference power Vref. When the voltage of the third node N3 is set to the voltage that is the threshold voltage of the first transistor M1 added to the reference power Vref, the first transistor M1 is turned off. A voltage corresponding to the threshold voltage of the first transistor M1 is charged to the first capacitor C1.

[0078] As described above, the first period T1 of the present embodiment is a period during which the ON-bias voltage is supplied to the first transistor M1, and the second period T2 is a period during which the threshold voltage of the first transistor M1 is compensated. Here, because the first period T1 and the second period T2 are not related to charging a capacitor with the data signal, the period thereof can be set to be wider. That is, the first period T1 and the second period T2 can be set long enough to be wider than a horizontal line unit, and thus the threshold voltage of the first transistor M1, included in pixels 142, can be suitably compensated for. For this purpose, the control signal supplied to the i-th control line CLi is wider than the scan signal that is supplied to the i-th scan line Si.

[0079] The scan signal is supplied to the i-th scan line Si and the control signal is not supplied to the i-th control line CLi during the third period T3. The second light emitting

control signal is supplied to the i-th second light emitting control line E2i during the third period T3.

[0080] When the supply of the control signal to the i-th control line CLi is stopped, the third transistor M3 and the fourth transistor M4 are turned off. When the second light emitting control signal is supplied to the i-th second light emitting control line E2i, the sixth transistor M6 is turned off. When the sixth transistor M6 is turned off, the first transistor M1 and the organic light emitting diode (OLED) are electrically decoupled. Accordingly, the organic light emitting diode (OLED) is turned off during the third period T3.

[0081] When the scan signal is supplied to the i-th scan line Si, the second transistor M2 is turned on. When the second transistor M2 is turned on, the data signal is supplied to the first node N1 from the data line Dm. When the data signal is supplied to the first node N1, the voltage of the first node N1 is changed from the voltage of the reference voltage Vref to the voltage of the data signal. In this case, the voltage of the third node N3 is changed to correspond to the voltage change amount of the first node N1. For example, the voltage of the third node N3 is changed to the voltage corresponding to a capacitor ratio of the first capacitor C1 and the second capacitor C2. Thus, the voltage corresponding to the threshold voltage of the first transistor M1 and the data signal is charged to the first capacitor C1.

[0082] Meanwhile, the voltage corresponding to the data signal is supplied to the third node N3 through the coupling of capacitors C1 and C2 for the third period T3. When the data signal is stored corresponding to this coupling, the data signal supply time can be reduced.

[0083] After the third period, the supply of the scan signal to the i-th scan line Si is stopped, and the supply of the first light emitting control signal to the i-th first light emitting control line E1i is stopped. Further, after the third period the supply of the second light emitting control signal to the i-th second light emitting control line E2i is stopped.

[0084] When the scan signal is not supplied to the i-th scan line Si, the second transistor M2 is turned off. When the second transistor M2 is turned off, the first node N1 is set to a floating condition.

[0085] When the supply of the first light emitting control signal to the i-th first light emitting control line E1i is stopped, the fifth transistor M5 is turned on and the voltage of the first power ELVDD is supplied to the third node N3. In this case, because the first node N1 is set to the floating condition, the first capacitor C1 suitably sustains the voltage that is charged during the previous period. That is, the voltage that is charged in the first capacitor C1 sustains its level regardless of the voltage of the first power ELVDD, and a desirable luminance of the image can be realized regardless of the voltage drop of the first power ELVDD.

[0086] When the supply of the second light emitting control signal to the i-th second light emitting control line E2i is stopped, the first transistor M1 and the organic light emitting diode (OLED) are electrically connected. The first transistor M1 controls the amount of current supplied to the organic light emitting diode (OLED) corresponding to the voltage of the first node N1.

[0087] Further, pixels 140 of the present embodiment may repeat the above processes to display the image corresponding to the data signal.

[0088] Additionally, a part of the control signal supplied to the i-th control line CLi overlaps the control signal supplied

to an $i+1$ -th control line CL_{i+1} . In this case, at least a part of the second period $T2$ of the i -th horizontal line overlaps a first period $T1'$ and a second period $T2'$ of an $i+1$ -th horizontal line. That is, a compensation period of a previous horizontal line and a present horizontal line overlap such that the present embodiment allocates enough compensation time. Additionally, the scan signal supplied to the i -th scan line Si does not overlap a scan signal supplied to an $i+1$ -th scan line $Si+1$, and thus a correct data signal is charged to each pixel.

[0089] FIG. 4 is a circuit diagram showing a pixel according to another exemplary embodiment of the present invention. The same constituent elements (or components) as shown in FIG. 2 are described by using the same reference numerals when FIG. 4 is described, and the repeated detailed description thereof is omitted.

[0090] Referring to FIG. 4, a pixel 140 according to another exemplary embodiment of the present invention is provided with a pixel circuit 142' for controlling an amount of current that is supplied to the organic light emitting diode (OLED).

[0091] The pixel circuit 142' includes a sixth transistor $M6'$ that is connected between a second node $N2$ and the anode electrode of the organic light emitting diode (OLED), and a gate electrode of the sixth transistor $M6'$ is connected to an i -th second light emitting control line $E2i$. This sixth transistor $M6'$ is turned off when a second light emitting control signal is supplied to the i -th second light emitting control line $E2i$, and is turned on otherwise.

[0092] Because the sixth transistor $M6'$ is connected between the second node $N2$ and the organic light emitting diode (OLED), a voltage of an initialization power V_{int} can be flexibly set. In other words, the voltage of the initialization power V_{int} can be set regardless of a turn-off of voltage of the organic light emitting diode (OLED), and thus flexibility of design can be secured. However, the voltage of the initialization power V_{int} is set to a lower voltage than the first power $ELVDD$.

[0093] FIG. 5 is a waveform diagram showing an exemplary embodiment of a driving method of the pixel shown in FIG. 4. In the present embodiment, the second light emitting control signal that is supplied to the i -th second light emitting control line $E2i$ overlaps the control signal that is supplied to the i -th control line CLi , and overlaps the scan signal that is supplied to the i -th scan line Si .

[0094] Referring to FIG. 5, the control signal is supplied to the i -th control line CLi for a first period $T1''$, and the second light emitting control signal is supplied to the i -th second light emitting control line $E2i$. When the control signal is supplied to the i -th second light emitting control line $E2i$, the sixth transistor $M6'$ is turned off. When the sixth transistor $M6'$ is turned off, the second node $N2$ and the organic light emitting diode OLED are electrically decoupled, and the organic light emitting diode OLED is set to a non-emitting condition.

[0095] When the control signal is supplied to the i -th control line CLi , a third transistor $M3$ and a fourth transistor $M4$ are turned on. When the fourth transistor $M4$ is turned on, the second node $N2$ is electrically connected with the initialization power V_{int} . When the third transistor $M3$ is turned on, the voltage of the reference power V_{ref} is supplied to a first node $N1$. When the voltage of the reference power V_{ref} is supplied to the first node $N1$, a first transistor $M1$ is turned on. A current passes through a fifth

transistor $M5$, the first transistor $M1$, and the fourth transistor $M4$, and is supplied to the initialization power V_{int} from the first power $ELVDD$. That is, the first transistor $M1$ is set to an ON-bias condition for the first period $T1''$, and thus uniform luminance of the image can be displayed.

[0096] The first light emitting control signal is supplied to the i -th first light emitting control line $E1i$ for a second period $T2''$. When the first light emitting control signal is supplied to the i -th first light emitting control line $E1i$, the fifth transistor $M5$ is turned off. When the fifth transistor $M5$ is turned off, the first power $ELVDD$ and a third node $N3$ are electrically decoupled.

[0097] In this case, because the first node $N1$ sustains the voltage of the reference power V_{ref} , the current from the third node $N3$ passes through the first transistor $M1$ and the fourth transistor $M4$ to flow to the reference power V_{int} . The voltage of the third node $N3$ drops from the first power $ELVDD$ voltage to a voltage that is the sum of the reference power V_{ref} and the threshold voltage of the first transistor $M1$. When the voltage of the third node $N3$ is set to the voltage that is the sum of the reference voltage V_{ref} and the threshold voltage of the first transistor $M1$, the first transistor $M1$ is turned off. The voltage corresponding to the threshold voltage of the first transistor $M1$ is charged to the first capacitor $C1$.

[0098] As described above, the first period $T1''$ is a period during which an ON-bias voltage is supplied to the first transistor $M1$, and the second period $T2''$ is a period during which the threshold voltage of the first transistor $M1$ is compensated. Here, because the first period $T1''$ and the second period $T2''$ are not related to charging a capacitor with the data signal, the period thereof can be set to be sufficiently wide. That is, the first period $T1''$ and the second period $T2''$ can be set to be wider than a horizontal line unit, and thus the threshold voltage of the first transistor $M1$, included in pixels 140, can be suitably compensated.

[0099] For the third period $T3''$, the scan signal is supplied to the i -th scan line Si , and the supply of the control signal to the i -th control line CLi is stopped. When the supply of control signal to the i -th control line CLi is stopped, the third transistor $M3$ and the fourth transistor $M4$ are turned off. When the scan signal is supplied to the i -th scan line Si , the second transistor $M2$ is turned on. When the second transistor $M2$ is turned on, the data signal is supplied to the first node $N1$ from the data line Dm . When the data signal is supplied to the first node $N1$, the voltage of the first node $N1$ is changed to the data signal voltage from the reference power V_{ref} voltage. In this case, the voltage of the third node $N3$ is changed corresponding to the voltage change amount of the first node $N1$. For example, the voltage of the third node $N3$ is changed to a voltage corresponding to a capacitor ratio of the first capacitor $C1$ and the second capacitor $C2$. A voltage corresponding to the sum of the threshold voltage of the first transistor $M1$ and the data signal is charged to the first capacitor $C1$.

[0100] After the third period $T3''$, the supply of the scan signal to the i -th scan line Si is stopped, the supply of the first light emitting control signal to the i -th first light emitting control line $E1i$ is stopped, and the supply of the second light emitting control signal to the i -th second light emitting control line $E2i$ is stopped.

[0101] When the supply of the scan signal to the i -th scan line Si is stopped, the second transistor $M2$ is turned off.

When the second transistor M2 is turned off, the first node N1 is set to a floating condition.

[0102] When the supply of the first light emitting control signal to the i-th first light emitting control line E1i is stopped, the fifth transistor M5 is turned on, and the voltage of the first power ELVDD is supplied to the third node N3. In this case, because the first node N1 is set to the floating condition, the first capacitor C1 suitably sustains the voltage that is charged during the previous period. That is, the voltage charged in the first capacitor C1 sustains the voltage charged during the previous period regardless of the voltage of the first power ELVDD, and thus a correct luminance of the image can be realized regardless of the voltage drop of the first power ELVDD.

[0103] When the supply of the second light emitting control signal to the i-th second light emitting control line E2i is stopped, the first transistor M1 is electrically connected to the organic light emitting diode(OLED). The first transistor M1 controls an amount of current supplied to the organic light emitting diode (OLED) corresponding to the voltage of the first node N1. Further, pixels 140 of the present embodiment may repeat the above process to display the image corresponding to the data signal.

[0104] Additionally, the transistors are shown as PMOS for convenience of description, but the present invention is not limited thereto. In other words, in other embodiments, the transistors can be formed as NMOS.

[0105] Also, the organic light emitting diodes (OLEDs) may generate various suitable colors of light including red, green, and blue corresponding to an amount of current supplied from the driving transistors, but the present invention is not limited thereto. For example, the organic light emitting diodes (OLEDs) may generate white color light corresponding to an amount of current supplied from the driving transistors. In this case, a separate color filter may be used to realize a color image.

[0106] Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of ordinary skill in the art as of the filing of the present application, features, characteristics, components, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, components, and/or elements described in connection with other embodiments unless otherwise specifically indicated. Accordingly, it will be understood by those of skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims and their equivalents.

What is claimed is:

1. A pixel comprising:

an organic light emitting diode;

a first transistor configured to control an amount of current flowing from a first power through the organic light emitting diode to a second power according to a voltage of a first node;

a second transistor between a data line and the first node;

a third transistor between the first node and a reference power;

a fourth transistor between a second node and an initialization power, the second node being connected to an anode electrode of the organic light emitting diode;

a first capacitor; and

a second capacitor connected in series to the first capacitor, the first and second capacitors being between the first node and the first power,

wherein a third node between the first capacitor and second capacitor is electrically connected to a first electrode of the first transistor.

2. The pixel of claim 1, wherein the reference power has a voltage at which the first transistor is turned on.

3. The pixel of claim 1, wherein the initialization power has a voltage at which the organic light emitting diode is turned off.

4. The pixel of claim 1, wherein the third transistor and the fourth transistor are configured to be concurrently turned on and turned off, and

wherein a turned-on period of the third and fourth transistors does not overlap a turned-on period of the second transistor.

5. The pixel of claim 4, wherein the third transistor and the fourth transistor are configured to be turned on before the second transistor is turned on.

6. The pixel of claim 1 further comprising:

a fifth transistor between the third node and the first power; and

a sixth transistor between the second node and the first transistor.

7. The pixel of claim 6, wherein a turned-on period of the fifth transistor does not overlap a turned-on period of the second transistor, and

wherein the fifth transistor is configured to be turned off after the third transistor is turned on.

8. The pixel of claim 6, wherein the sixth transistor is configured to be turned off when the second transistor is turned on.

9. The pixel of claim 1 further comprising:

a fifth transistor between the third node and the first power; and

a sixth transistor between the second node and the organic light emitting diode.

10. The pixel of claim 9, wherein a turned-on period of the fifth transistor does not overlap a turned-on period of the second transistor, and

wherein the fifth transistor is configured to be turned off after the third transistor is turned on.

11. The pixel of claim 9, wherein a turned-on period of the sixth transistor does not overlap turned-on periods of the second transistor and the third transistor.

12. An organic light emitting display device comprising: pixels at regions defined by scan lines, data lines, control lines, first light emitting control lines, and second light emitting control lines;

a scan driver configured to supply scan signals to the scan lines;

a data driver configured to supply data signals to the data lines; and

a control line driver configured to supply control signals to the control lines,

wherein each of the pixels at an i-th horizontal line (i is natural number) comprises:

an organic light emitting diode;

a first transistor configured to control an amount of current that passes from a first power through the organic light emitting diode to a second power according to a voltage of a first node;

- a second transistor between a data line of the data lines and the first node, and configured to be turned on when a scan signal is supplied to an i-th scan line of the scan lines;
 - a third transistor between the first node and a reference power, and configured to be turned on when a control signal is supplied to an i-th control line of the control lines;
 - a fourth transistor between an initialization power and a second node that is connected to an anode electrode of the organic light emitting diode, and configured to be turned on when the control signal is supplied to the i-th control line;
 - a first capacitor;
 - a second capacitor connected in series to the first capacitor, the first and second capacitors being between the first node and the first power; and
 - a third node between the first capacitor and second capacitor that is electrically connected to a first electrode of the first transistor.
- 13.** The organic light emitting display device of claim **12**, wherein the reference power has a voltage at which the first transistor is turned on.
- 14.** The organic light emitting display device of claim **12**, wherein the initialization power has a voltage at which the organic light emitting diode is turned off.
- 15.** The organic light emitting display device of claim **12**, wherein the scan driver is configured to sequentially supply the scan signals to the scan lines, and
- wherein the control line driver is configured to supply the i-th control line with the control signal that is wider than the scan signal, and that is supplied before the scan signal is supplied to the i-th scan line.
- 16.** The organic light emitting display device of claim **12**, wherein each of the pixels at the i-th horizontal line comprises:
- a fifth transistor between the third node and the first power, and configured to be turned off when a first light emitting control signal is supplied to an i-th first light emitting control line of the first light emitting control lines, and configured to be turned on otherwise; and
 - a sixth transistor between the second node and the first transistor, and configured to be turned off when a second light emitting control signal is supplied to an i-th second light emitting control line of the second light emitting control lines, and configured to be turned on otherwise.
- 17.** The organic light emitting display device of claim **16**, further comprising an emission driver configured to:
- supply the first light emitting control signal to the i-th light emitting control line such that a part of the first

- light emitting control signal overlaps the control signal supplied to the i-th control line, and such that another part of the first light emitting control signal overlaps the scan signal supplied to the i-th scan line; and
 - supply the second light emitting signal to the i-th second light emitting control line such that a part of the second light emitting signal overlaps the scan signal supplied to the i-th scan line.
- 18.** The organic light emitting display device of claim **12**, wherein each of the pixels at the i-th horizontal line comprises:
- a fifth transistor between the third node and the first power, and configured to be turned off when a first light emitting control signal is supplied to an i-th first light emitting control line of the first light emitting control lines, and configured to be turned on otherwise; and
 - a sixth transistor between the second node and the anode electrode of the organic light emitting diode, and configured to be turned off when a second light emitting control signal is supplied to an i-th second light emitting control line of the second light emitting control lines, and configured to be turned on otherwise.
- 19.** The organic light emitting display device of claim **18**, further comprising an emission driver configured to:
- supply the first light emitting control signal to the i-th light emitting control line such that a part of the first light emitting control signal overlaps the control signal supplied to the i-th control line, and such that another part of the first light emitting control signal overlaps the scan signal supplied to the i-th scan line; and
 - supply the second light emitting control signal to the i-th second light emitting control line such that a part of the second light emitting control signal overlaps the control signal supplied to the i-th control line and the scan signal supplied to the i-th scan line.
- 20.** A method of driving an organic light emitting display device comprising pixels at horizontal lines, the method comprising:
- initializing a driving transistor in a pixel of the pixels to an ON-bias condition;
 - compensating for a threshold voltage of the driving transistor; and
 - charging at least one capacitor connected to the driving transistor with a voltage corresponding to a data signal, wherein at least one part of the initializing and the compensating of the pixels that are at an i+1-th horizontal line overlaps the compensating of the pixels that are at an i-th horizontal line.

* * * * *

专利名称(译)	像素，有机发光显示装置及其驱动方法		
公开(公告)号	US20160379552A1	公开(公告)日	2016-12-29
申请号	US15/048475	申请日	2016-02-19
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM TAE JIN KIM JONG SOO SONG MYOUNG SEOP LEE MYUNG HO		
发明人	KIM, TAE JIN KIM, JONG SOO SONG, MYOUNG SEOP LEE, MYUNG HO		
IPC分类号	G09G3/3208		
CPC分类号	G09G2330/02 G09G3/3208		
优先权	1020150092527 2015-06-29 KR		
其他公开文献	US10043441		
外部链接	Espacenet USPTO		

摘要(译)

一种像素，包括：有机发光二极管；第一晶体管，被配置为控制通过所述有机发光二极管从连接到所述第一晶体管的第一电极的第一电源流向第二电源的电流，所述第一电源对应于第一节点的电压；在数据线和第一节点之间的第二晶体管；在所述第一节点和参考功率之间的第三晶体管；在第二节点和初始化电源之间的第四晶体管，所述第二节点连接到所述有机发光二极管的阳极；第一电容器；以及与所述第一电容器串联连接的第二电容器，所述第一和第二电容器在所述第一节点和所述第一电源之间。

