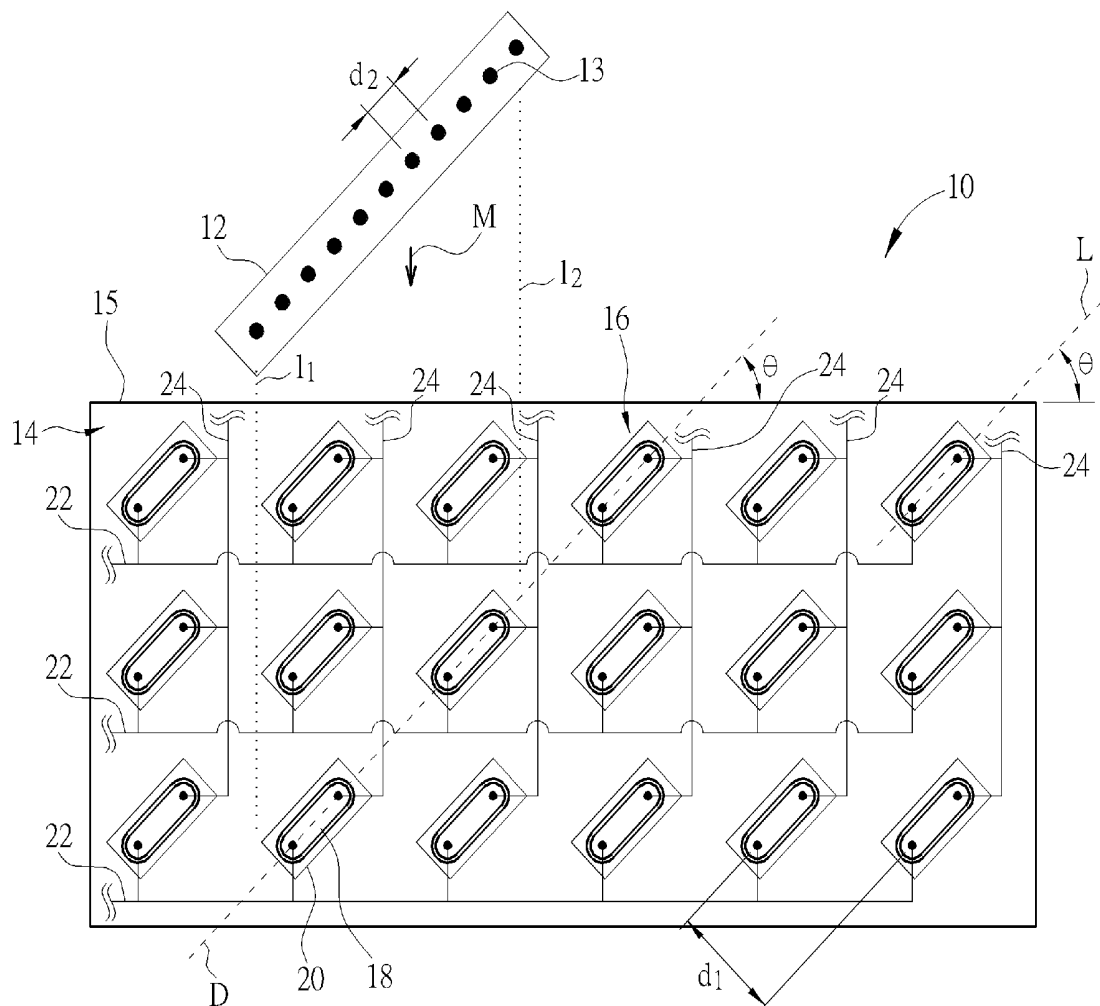


(10) **Pub. No.: US 2014/0346472 A1**
(43) **Pub. Date: Nov. 27, 2014**



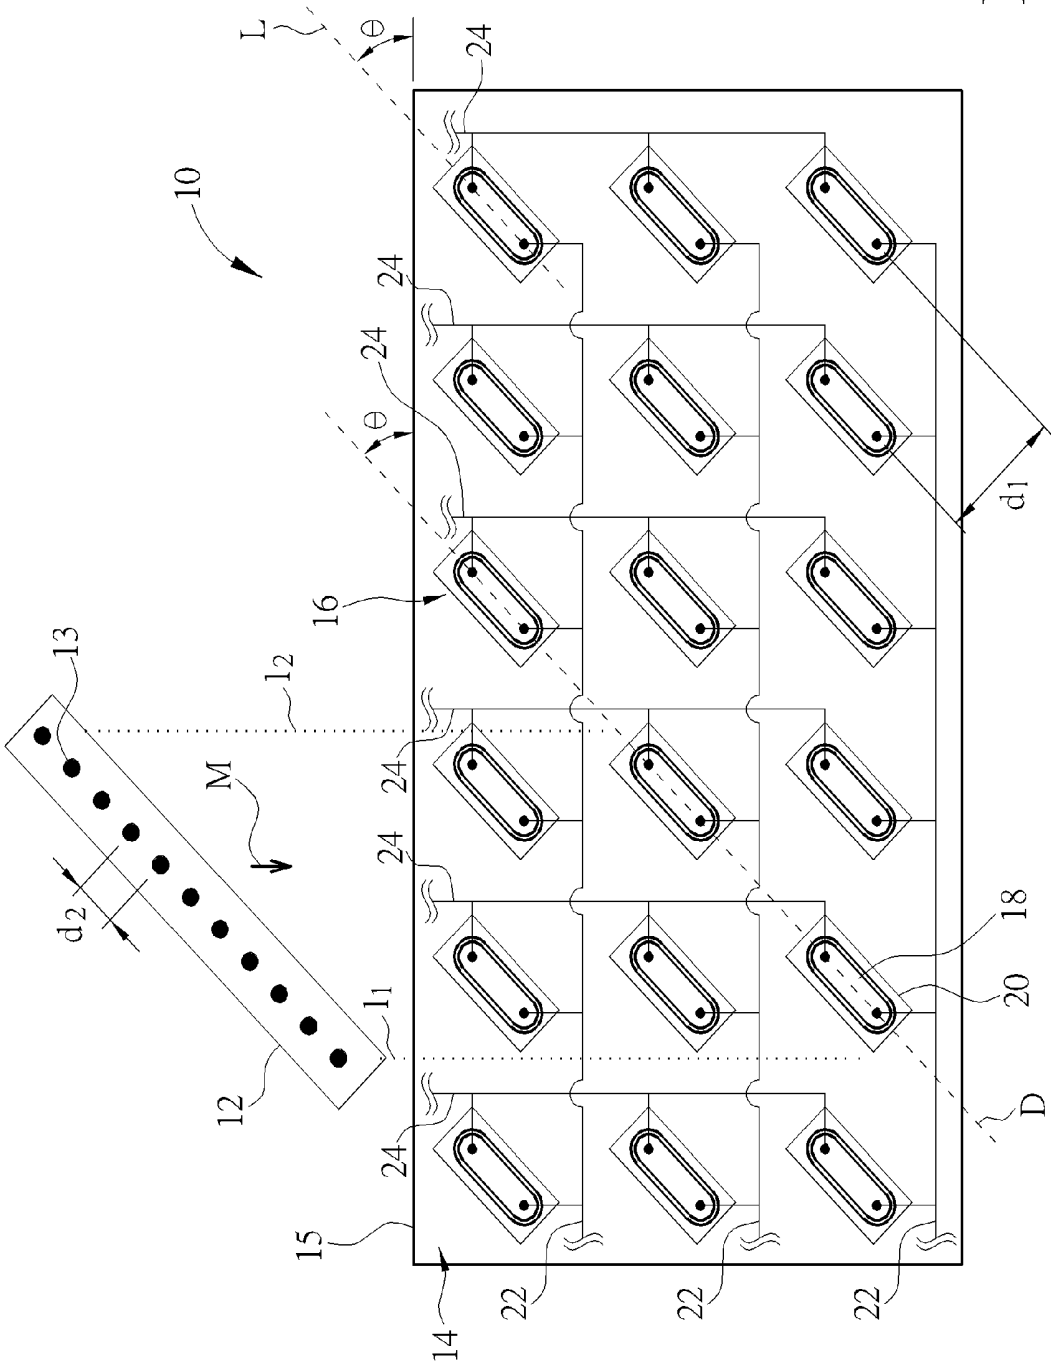


FIG. 1

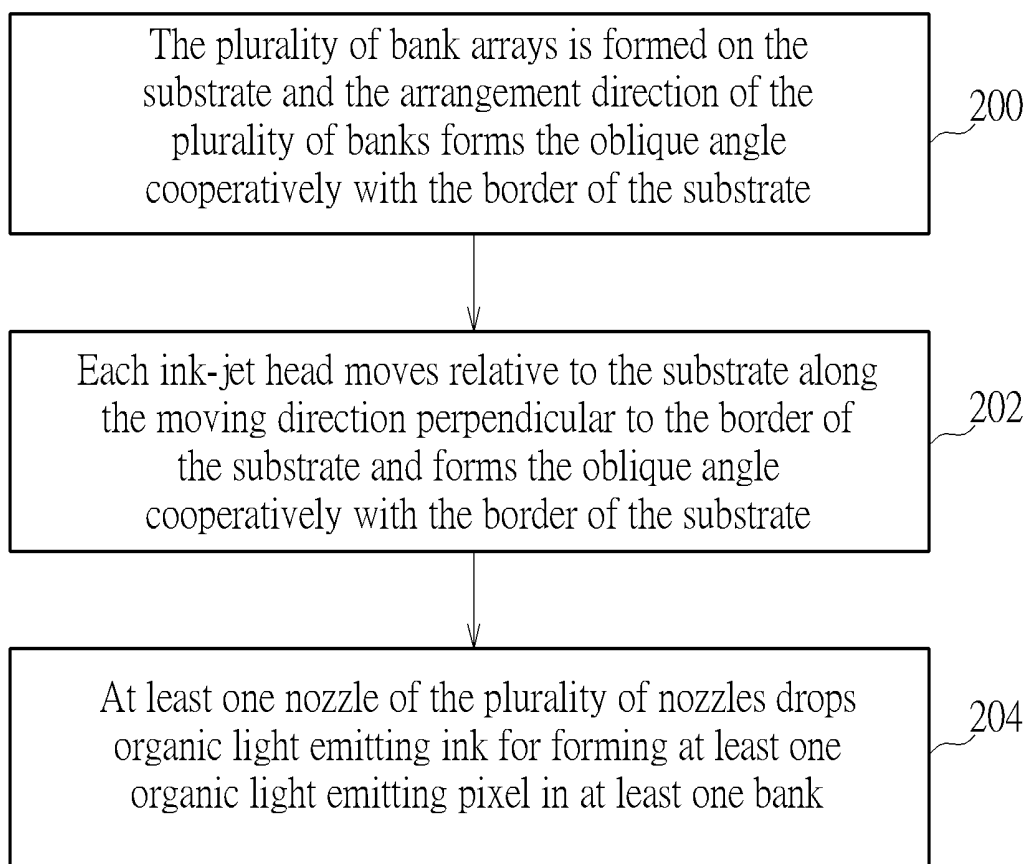


FIG. 2

METHOD FOR MANUFACTURING AN ORGANIC LIGHT EMITTING DISPLAY PANEL AND RELATED ORGANIC LIGHT EMITTING DISPLAY PANEL

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a method for manufacturing an organic light emitting display panel and a related organic light emitting display panel, and more specifically, to a method for utilizing ink-jet heads to manufacture an organic light emitting display panel and a related organic light emitting display panel.

[0003] 2. Description of the Prior Art

[0004] With development of the ink-jet technology and the display technology, the method of dropping organic light emitting ink into pixel banks by an ink-jet printing process for forming organic light emitting pixels on a substrate has been widely applied to a display panel manufacturing process. In general, since a distance between two adjacent nozzles on an ink-jet head is not equal to a distance between two adjacent pixels, the ink-jet head could only utilize some of the nozzles, which are aligned with the pixels, to drop organic light emitting ink during the aforesaid pixel forming process, so as to cause a poor nozzle utilization efficiency of the ink-jet head. Therefore, in practical application, the display panel manufacturing process usually adopts the design of rotating the ink-jet head to form an oblique angle with the substrate, so that each nozzle could be aligned with the corresponding pixels. In such a manner, the nozzle utilization efficiency of the ink-jet head could be increased.

[0005] However, since number of the nozzles utilized by the ink-jet head could be different every time when the ink-jet head drops organic light emitting ink, the aforesaid design may make the ink volume jetted by each nozzle different from each other so as to cause a poor pixel forming quality. Accordingly, the image display quality of an organic light emitting display panel could be influenced.

SUMMARY OF THE INVENTION

[0006] The present invention provides a method for manufacturing an organic light emitting display panel. The organic light emitting display panel includes a substrate. The method includes forming a plurality of bank arrays, each of which has a plurality of banks, utilizing a plurality of ink-jet heads, each of which has a plurality of nozzles arranged alternately, to move relative to the substrate along a moving direction perpendicular to a border of the substrate, and utilizing at least one of the plurality of nozzles to drop organic light emitting ink for forming at least one organic light emitting pixel in at least one bank. An oblique angle is formed between an arrangement direction of the plurality of banks and the border of the substrate. Each ink-jet head forms the oblique angle cooperatively with the border of the substrate.

[0007] The present invention further provides an organic light emitting display panel. The organic light emitting display panel includes a substrate, a plurality of bank arrays, and a plurality of organic light emitting pixels. The substrate has a border. The plurality of bank arrays is formed on the substrate. Each bank array has a plurality of banks for containing organic light emitting ink. An oblique angle is formed between an arrangement direction of the plurality of banks

and the border of the substrate. The plurality of organic light emitting pixels is formed on at least one bank of the plurality of banks.

[0008] The present invention further provides an organic light emitting display panel. The organic light emitting display panel includes a substrate, a plurality of bank arrays, and a plurality of organic light emitting pixels. The substrate has a border. The plurality of bank arrays is formed on the substrate. Each bank array has a plurality of banks for containing organic light emitting ink. An oblique angle is formed between a longitudinal direction of each bank and the border of the substrate. A plurality of organic light emitting pixels is formed on at least one bank of the plurality of banks.

[0009] These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a diagram of an organic light emitting display panel according to an embodiment of the present invention.

[0011] FIG. 2 is a flowchart of a method for manufacturing the organic light emitting display panel according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0012] Please refer to FIG. 1, which is a diagram of an organic light emitting display panel 10 according to an embodiment of the present invention. In this embodiment, the organic light emitting display panel 10 could be manufactured by utilizing a plurality of ink-jet heads 12 (only one shown in FIG. 1 for simplicity) to drop organic light emitting ink, but not limited thereto. As shown in FIG. 1, each ink-jet head 12 has nozzles 13 arranged alternately for dropping organic light emitting ink. The organic light emitting display panel 10 includes a substrate 14, a plurality of bank arrays 16, and a plurality of organic light emitting pixels 18. The substrate 14 is a conventional substrate applied to an organic light emitting display panel, such as a glass substrate or a transparent plastic substrate, and has a border 15. The ink-jet head 12 forms an oblique angle θ cooperatively with the border 15 of the substrate 14. The oblique angle θ could be greater than 0° and less than 90° .

[0013] The plurality of bank arrays 16 is formed on the substrate 14. Each bank array 16 could have a plurality of banks 20 for containing organic light emitting ink. As shown in FIG. 1, the oblique angle θ is also formed between an arrangement direction D of the plurality of banks 20 of each bank array 16 and the border 15 of the substrate 14, so as to achieve the purpose that the organic light emitting pixels 18 are arranged obliquely relative to the border 15 of the substrate 14. The plurality of organic light emitting pixels 18 is formed on the substrate 14 by utilizing each ink-jet head 12 to move relative to the substrate 14 along a moving direction M perpendicular to the border 15 and then utilizing the nozzles 13 on each ink-jet head 12 to drop organic light emitting ink into the corresponding banks 18, so as to form an image display region of the organic light emitting display panel 10. In this embodiment, the plurality of organic light emitting pixels 18 could be an OLED (Organic Light Emitting Diode) in a strip shape or a circular shape, and could be in a mosaic

arrangement or a stripe arrangement (but not limited thereto). For example, if the plurality of organic light emitting pixels **18** is in a mosaic arrangement, the organic light emitting pixels **18** located in the same bank array **16** could be strip-shaped and formed on the substrate **14** in an RGB arrangement, and the color of each organic light emitting pixel **18** is different from that of the adjacent organic light emitting pixel **18**. To be noted, as shown in FIG. 1, if each bank **20** is a shape having a longitudinal direction L for containing the corresponding organic light emitting pixel **18** with the similar shape (e.g. the strip shape as shown in FIG. 1), the longitudinal direction L of each bank **20** could also form the oblique angle θ cooperatively with the border **15** of the substrate **14**, meaning that the arrangement direction D of the plurality of banks **20** is parallel to the longitudinal direction L of each bank **20**.

[0014] Furthermore, as shown in FIG. 1, the organic light emitting display panel **10** could further include a plurality of data lines **22** and a plurality of scan lines **24**. Each data line **22** and each scan line **24** are respectively coupled to the corresponding organic light emitting pixel **18** for controlling light emission of each organic light emitting pixel **18**, so as to make the organic light emitting display panel **10** capable of displaying images. Since the related description for the circuit control design of each data line **22** and each scan line **24** is commonly seen in the prior art, it is therefore omitted herein.

[0015] More detailed description for the forming process of the organic light emitting pixels **18** on the organic light emitting display panel **10** is provided as follows. Please refer to FIG. 1 and FIG. 2. FIG. 2 is a flowchart of a method for manufacturing the organic light emitting display panel **10** according to an embodiment of the present invention. The method includes the following steps.

[0016] Step 200: Form the plurality of bank arrays **16** on the substrate **14**;

[0017] Step 202: Utilize each ink-jet head **12** to move relative to the substrate **14** along the moving direction M perpendicular to the border **15** of the substrate **14**;

[0018] Step 204: Utilize at least one nozzle **13** of the plurality of nozzles **13** to drop organic light emitting ink for forming at least one organic light emitting pixel **18** in at least one bank **20**.

[0019] In the following, the steps of utilizing the ink-jet head **12** as shown in FIG. 1 to form the corresponding organic light emitting pixels **18** on the substrate **14** is described in detail. As for description for the steps of utilizing other ink-jet heads **12** to form the corresponding organic light emitting pixels **18**, it could be reasoned by analogy and therefore omitted herein. In Step 200, the plurality of bank arrays **16** for containing organic light emitting ink is formed on the substrate **14**. As shown in FIG. 1, each bank array **16** has the plurality of banks **20** and the arrangement direction D of the plurality of banks **20** forms the oblique angle θ with the border **15** of the substrate **14**. Each bank **20** could define a forming region for one organic light emitting pixel **18** on the substrate **14** by a conventional bank manufacturing process (e.g. a lithography process), so as to prevent the color mixing problem caused by mixing of the organic light emitting pixels **18** with different colors.

[0020] After the plurality of bank arrays **16** is formed, the ink-jet head **12** could be utilized to move relative to the substrate **14** along the moving direction M perpendicular to the border **15** of the substrate **14** (Step 202). At this time, the ink-jet head **12** and the arrangement direction D of each bank

array **16** respectively form the oblique angle θ with the border **15**. To be more specific, in practical application, the oblique angle θ could conform to the following equation.

$$\text{the oblique angle } \theta = \cos^{-1}[(\text{a distance } d_1 \text{ between two adjacent bank arrays } 16) / (\text{a distance } d_2 \text{ between two adjacent nozzles } 13 \text{ on each ink-jet head } 12)].$$

[0021] In such a manner, via the aforesaid design in which the ink-jet head **12** and each bank array **16** have the same oblique angle θ relative to the border **15** of the substrate **14** and the ink-jet head **12** is utilized to move relative to the substrate **14** along the moving direction M perpendicular to the border **15** of the substrate **14**, the purpose that number of the nozzles **13** utilized by the ink-jet head **12** is the same every time when the ink-jet head **12** drops organic light emitting ink could be achieved accordingly. For example, as shown in FIG. 1, during the ink-jet head **12** moves along the moving direction M, the ink-jet head **12** utilizes the same number of the nozzles **13** to drops organic light emitting ink between two dotted lines l_1 and l_2 perpendicular to the border **15**, so as to cause the ink volume jetted by each nozzle **13** to be the same with each other.

[0022] Finally, in Step 204, the ink-jet head **12** utilizes the same number of the nozzles **13** to drop organic light emitting ink into the bank **20** when the ink-jet head **12** is aligned with the bank **20**. Accordingly, as shown in FIG. 1, the ink-jet head **12** could form the corresponding organic light emitting pixel **18** in the bank **20**. As for description for the forming process of other organic light emitting pixel **18**, it could be reasoned by analogy. In such a manner, each organic light emitting pixel **18** could be formed sequentially on the substrate **14** on the condition that the ink volume jetted by each nozzle **13** is the same with each other. Accordingly, the aforesaid prior art problem could be solved to make each organic light emitting pixel **18** have a preferable forming quality, so that the image display quality of the organic light emitting display panel **10** could be greatly improved.

[0023] To be noted, the aforesaid arrangement and shape designs for the organic light emitting pixels **18**, the number of the banks **20** formed on the substrate **14**, the number of the nozzles **13** utilized by the ink-jet head **12**, and the number of the organic light emitting pixels **18** are not limited to the FIG. 1, meaning that all of them are adjustable according to the practical application of the organic light emitting display panel **10**. In other words, all designs in which the ink-jet head and each bank array have the same oblique angle relative to the border of the substrate for forming the organic light emitting pixels may fall within the scope of the present invention.

[0024] Compared with the prior art, the present invention utilizes the design in which the arrangement direction of the banks forms the oblique angle with the border of the substrate and each ink-jet head is parallel to the organic light emitting pixels, to achieve the purpose that each ink-jet head utilizes the same number of the nozzles every time when dropping organic light emitting ink, so that the ink volume jetted by each nozzle could be the same with each other. In such a manner, via the aforesaid designs, the present invention could make each organic light emitting pixel have a preferable forming quality, so as to greatly improve the image display quality of the organic light emitting display panel.

[0025] Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the

invention. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.

What is claimed is:

1. A method for manufacturing an organic light emitting display panel, the organic light emitting display panel comprising a substrate, the method comprising:

forming a plurality of bank arrays on the substrate, each bank array having a plurality of banks for containing organic light emitting ink, an oblique angle being formed between an arrangement direction of the plurality of banks and a border of the substrate;

utilizing a plurality of ink-jet heads to move relative to the substrate along a moving direction perpendicular to the border of the substrate, each ink-jet head forming the oblique angle cooperatively with the border of the substrate and having a plurality of nozzles arranged alternately; and

utilizing at least one of the plurality of nozzles to drop organic light emitting ink for forming at least one organic light emitting pixel in at least one bank.

2. The method of claim 1, wherein the oblique angle conforms to the following equation:

$$\text{the oblique angle} = \cos^{-1}[(\text{a distance between two adjacent bank arrays})/(\text{a distance between two adjacent nozzles on each ink-jet head})].$$

3. The method of claim 1, wherein the step of utilizing at least one of the plurality of nozzles to drop organic light emitting ink for forming at least one organic light emitting pixel in at least one bank comprises:

utilizing the plurality of ink-jet heads to drop organic light emitting ink for forming a plurality of organic light emitting pixels on the substrate in a mosaic arrangement or a stripe arrangement.

4. The method of claim 1, wherein a longitudinal direction of each bank forms the oblique angle cooperatively with the border of the substrate.

5. An organic light emitting display panel comprising:
a substrate having a border;

a plurality of bank arrays formed on the substrate, each bank array having a plurality of banks for containing organic light emitting ink, an oblique angle being formed between an arrangement direction of the plurality of banks and the border of the substrate; and

a plurality of organic light emitting pixels formed on at least one bank of the plurality of banks.

6. The organic light emitting display panel of claim 5, wherein the organic light emitting ink contained in each bank is dropped by a plurality of ink-jet heads, each ink-jet head has a plurality of nozzles arranged alternately, and the oblique angle conforms to the following equation:

$$\text{the oblique angle} = \cos^{-1}[(\text{a distance between two adjacent bank arrays})/(\text{a distance between two adjacent nozzles on each ink-jet head})].$$

7. The organic light emitting display panel of claim 5, wherein the plurality of organic light emitting pixels is in a mosaic arrangement or a stripe arrangement.

8. The organic light emitting display panel of claim 5, wherein each organic light emitting pixel is an organic light emitting diode.

9. The organic light emitting display panel of claim 8, wherein the organic light emitting display panel further comprises a plurality of data lines and a plurality of scan lines, and each data line and each scan line are respectively coupled to the corresponding organic light emitting pixel for controlling light emission of each organic light emitting pixel.

10. The organic light emitting display panel of claim 5, wherein each organic light emitting pixel is a strip shape or a circular shape.

11. An organic light emitting display panel, the organic light emitting display panel comprising:

a substrate having a border;

a plurality of bank arrays formed on the substrate, each bank array having a plurality of banks for containing organic light emitting ink, an oblique angle being formed between a longitudinal direction of each bank and the border of the substrate; and

a plurality of organic light emitting pixels formed on at least one bank of the plurality of banks.

12. The organic light emitting display panel of claim 11, wherein the organic light emitting ink contained by each bank is dropped by a plurality of ink-jet heads, each ink-jet head has a plurality of nozzles arranged alternately, and the oblique angle conforms to the following equation:

$$\text{the oblique angle} = \cos^{-1}[(\text{a distance between two adjacent bank arrays})/(\text{a distance between two adjacent nozzles on each ink-jet head})].$$

13. The organic light emitting display panel of claim 11, wherein the plurality of organic light emitting pixels is in a mosaic arrangement or a stripe arrangement.

14. The organic light emitting display panel of claim 11, wherein each organic light emitting pixel is an organic light emitting diode.

15. The organic light emitting display panel of claim 14, wherein the organic light emitting display panel further comprises a plurality of data lines and a plurality of scan lines, and each data line and each scan line are respectively coupled to the corresponding organic light emitting pixel for controlling light emission of each organic light emitting pixel.

16. The organic light emitting display panel of claim 11, wherein each organic light emitting pixel is a strip shape.

* * * * *

专利名称(译)	用于制造有机发光显示面板的方法和相关的有机发光显示面板		
公开(公告)号	US20140346472A1	公开(公告)日	2014-11-27
申请号	US14/201940	申请日	2014-03-10
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	CHEN PENG YU LEE CHIA HWA		
发明人	CHEN, PENG-YU LEE, CHIA-HWA		
IPC分类号	H01L51/00 H01L27/32		
CPC分类号	H01L27/3246 H01L51/0005		
优先权	102118117 2013-05-22 TW		
其他公开文献	US9412946		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种制造有机发光显示面板的方法。有机发光显示面板包括基板。该方法包括形成多个堤阵列，每个堤阵列具有多个堤，利用多个喷墨头，每个喷墨头具有交替排列的多个喷嘴，以沿垂直的移动方向相对于基板移动在所述基板的边界上，利用所述多个喷嘴中的至少一个喷射有机发光油墨，以在至少一个堤中形成至少一个有机发光像素。在多个堤的排列方向和基板的边界之间形成倾斜角。每个喷墨头与基板的边界共同形成倾斜角。

