



US 20150228705A1

(19) **United States**(12) **Patent Application Publication**
Kim(10) **Pub. No.: US 2015/0228705 A1**(43) **Pub. Date: Aug. 13, 2015**(54) **ORGANIC LIGHT-EMITTING DIODE (OLED)
DISPLAY AND METHOD OF
MANUFACTURING THE SAME**(52) **U.S. CL.**CPC *H01L 27/3276* (2013.01); *H01L 27/322*
(2013.01); *H01L 27/3246* (2013.01); *H01L*
27/3248 (2013.01); *H01L 51/56* (2013.01);
H01L 27/1259 (2013.01); *H01L 2227/323*
(2013.01)(71) Applicant: **Samsung Display Co., Ltd.**,
Yongin-City (KR)(72) Inventor: **Su-Weon Kim**, Yongin-City (KR)(21) Appl. No.: **14/308,348**

(57)

ABSTRACT(22) Filed: **Jun. 18, 2014**(30) **Foreign Application Priority Data**

Feb. 12, 2014 (KR) 10-2014-0016286

Publication Classification(51) **Int. Cl.***H01L 27/32* (2006.01)*H01L 27/12* (2006.01)*H01L 51/56* (2006.01)

An organic light-emitting diode (OLED) display and a method of manufacturing the same are disclosed. In one aspect, the OLED display comprises a driving thin-film transistor (TFT), a data line electrically connected to the driving TFT and having a first color, an OLED, and a light absorption layer. The OLED is electrically connected to the driving TFT. The light absorption layer is formed over the data line and has a second color different from the first color.

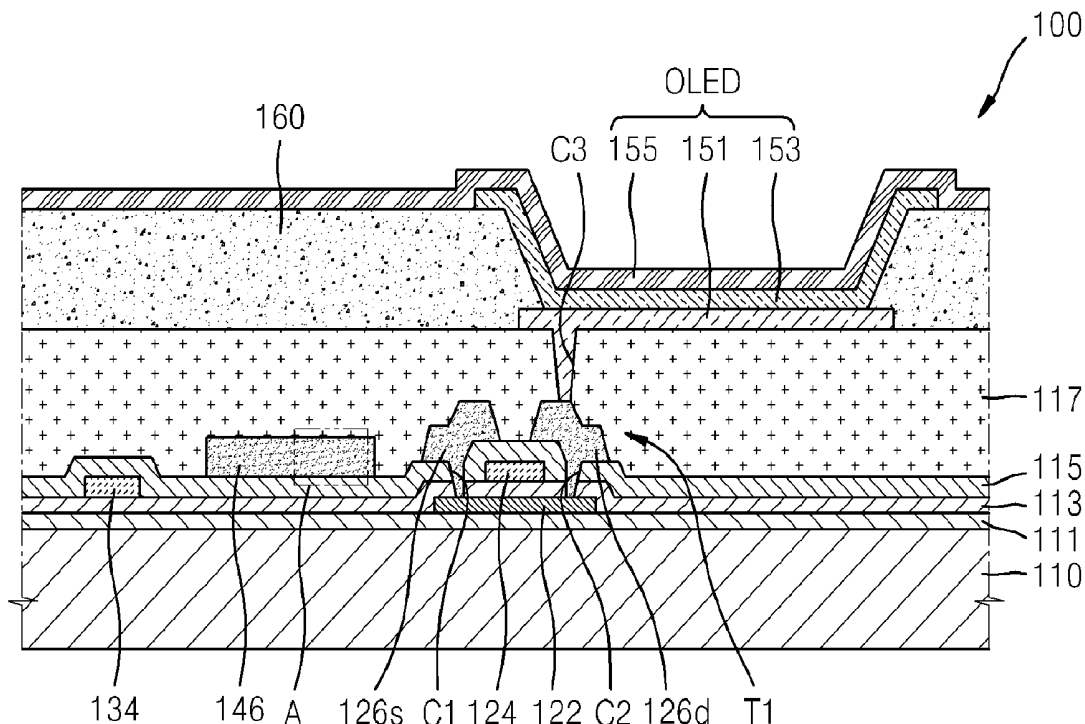


FIG. 1

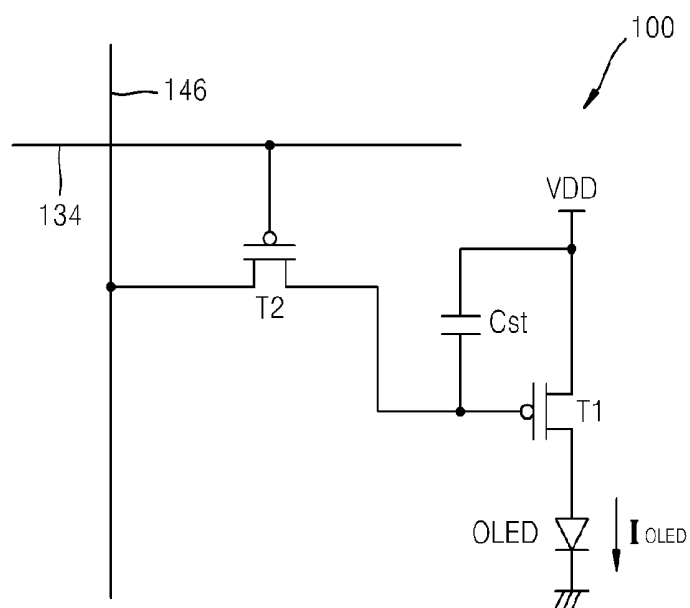


FIG. 2

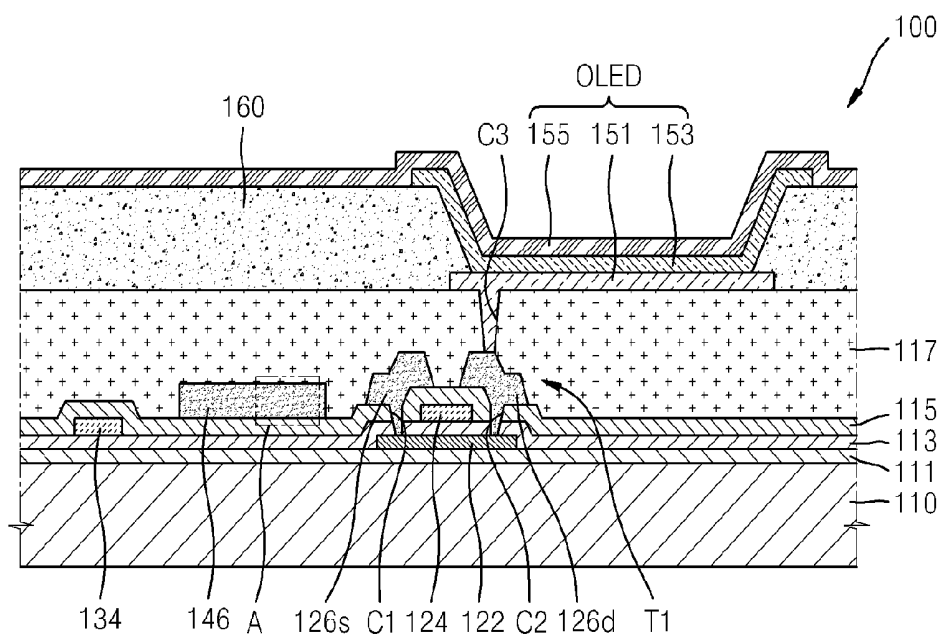


FIG. 3

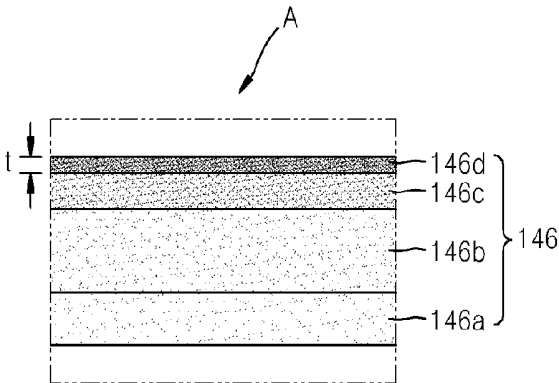


FIG. 4A

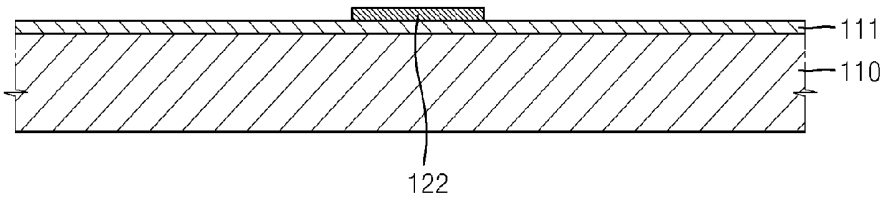


FIG. 4B

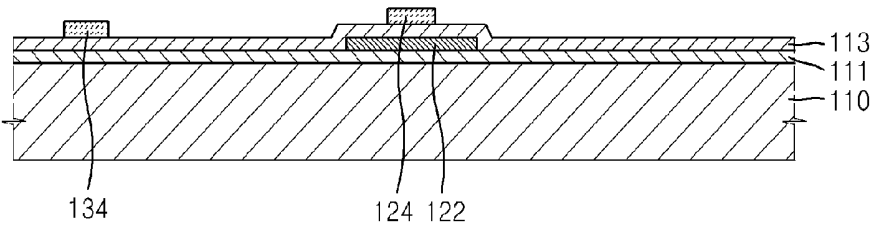


FIG. 4C

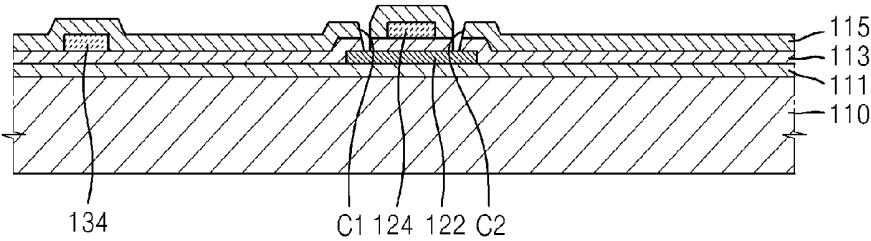


FIG. 4D

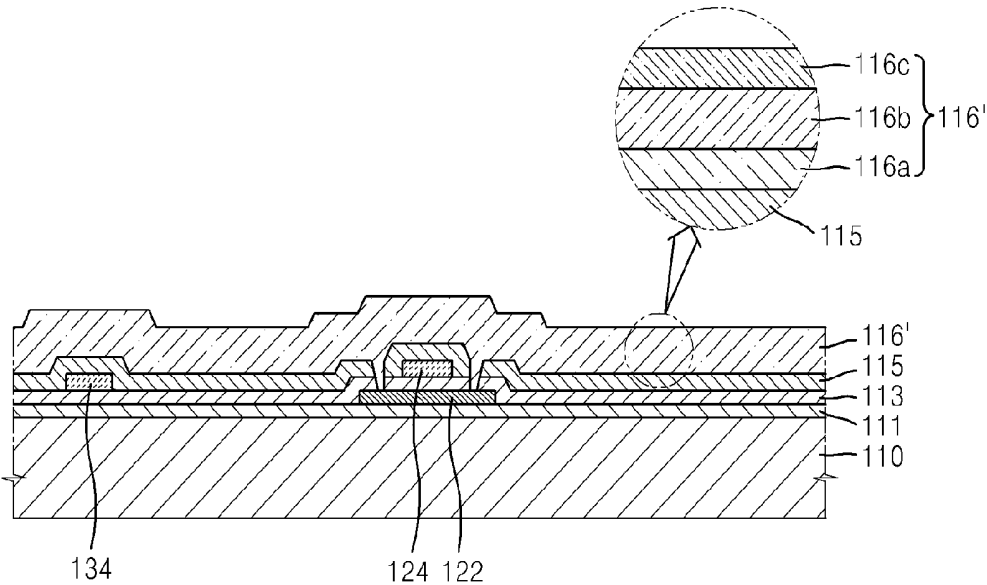


FIG. 4E

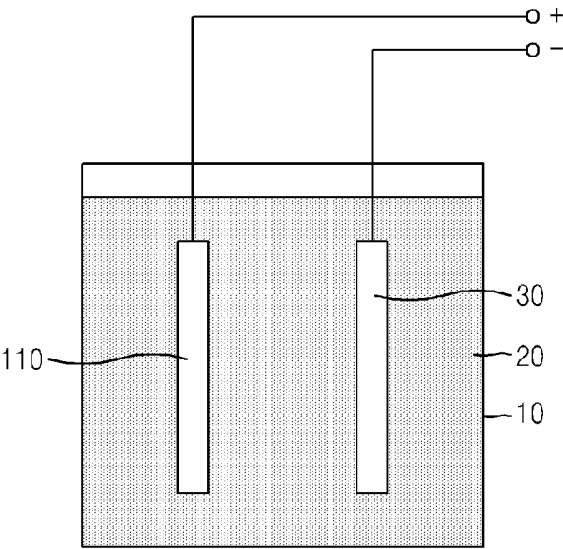


FIG. 4F

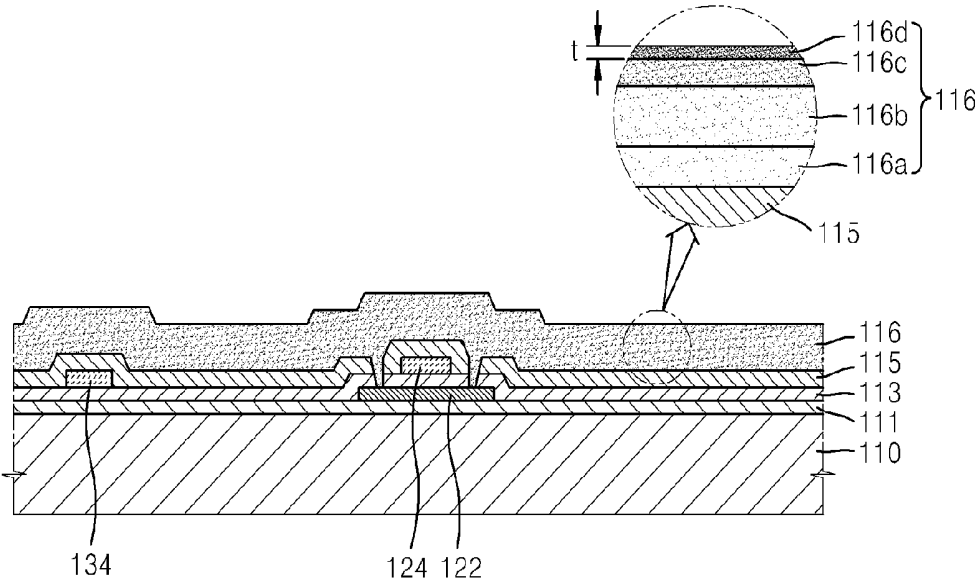


FIG. 4G

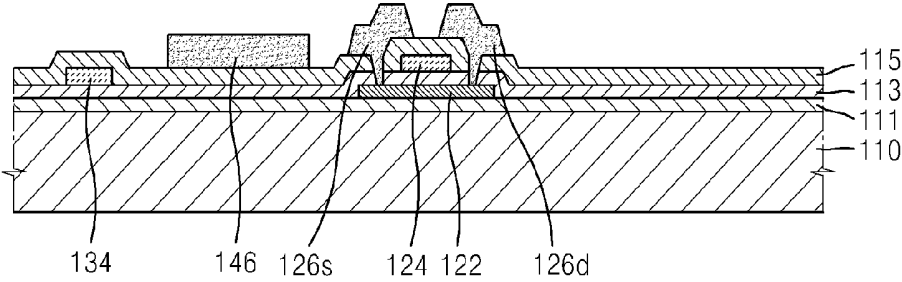


FIG. 4H

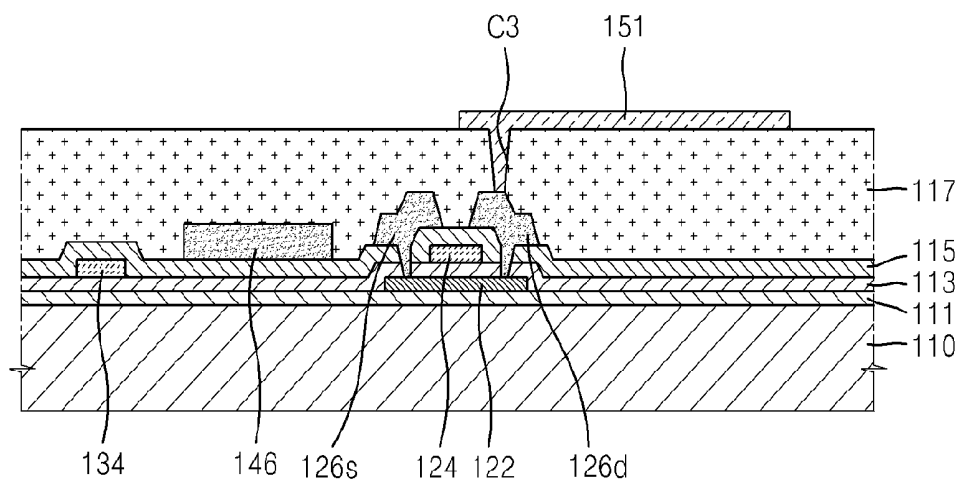


FIG. 4I

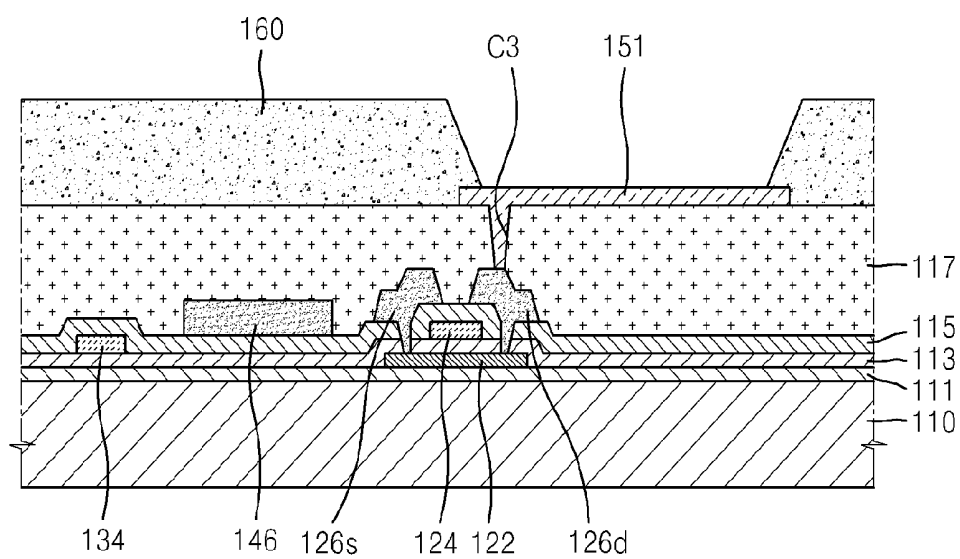


FIG. 5


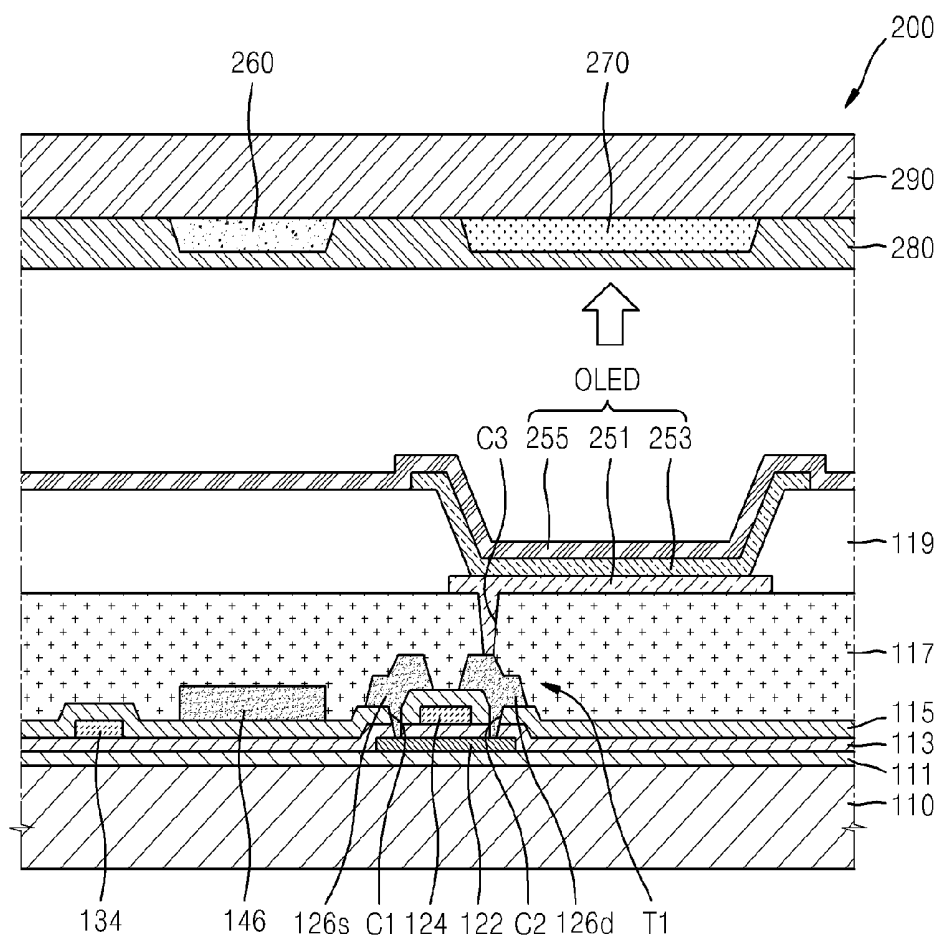


FIG. 6

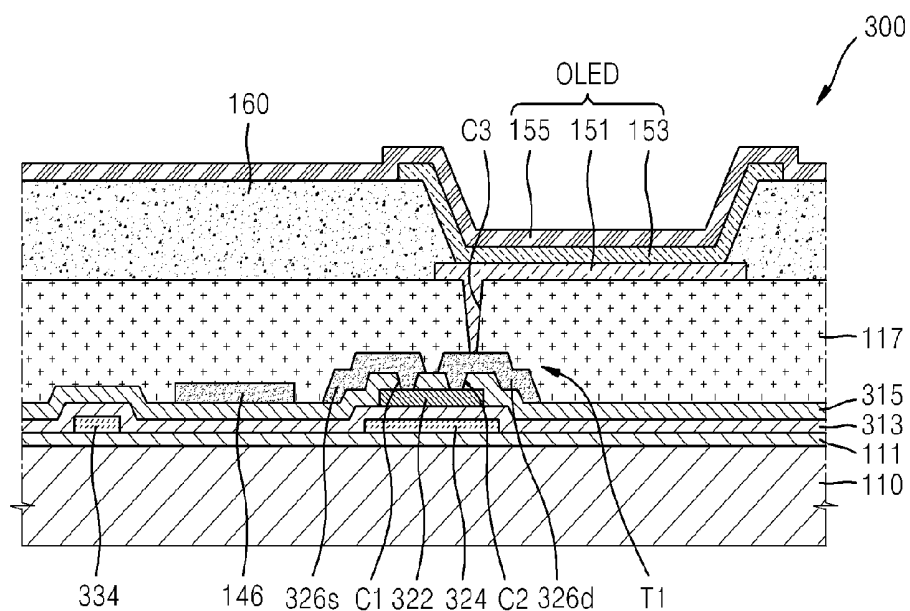

**ORGANIC LIGHT-EMITTING DIODE (OLED)
DISPLAY AND METHOD OF
MANUFACTURING THE SAME**

RELATED APPLICATIONS

[0001] This application claims the benefit of Korean Patent Application No. 10-2014-0016286, filed on Feb. 12, 2014, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND

[0002] 1. Field

[0003] The described technology generally relates to an organic light-emitting diode (OLED) display and a method of manufacturing the same.

[0004] 2. Description of the Related Technology

[0005] An organic light-emitting diode (OLED) display includes an organic light-emitting diode (OLED) display including a hole injection electrode, an electron injection electrode, and an organic emission layer formed therebetween, and is a self-emission type display apparatus that emits light as excitons, which are generated when holes injected from the hole injection electrode and electrons injected from the electron injection electrode combine in the organic emission layer.

[0006] Because an OLED display is a self-emission type display apparatus and does not need a separate light source, it can be driven with a low voltage and can be lightweight and thin. In addition, because of an excellent viewing angle, contrast, and response speed, the applications of OLED display technology are expanding from a personal mobile device, such as an MP3 player or a mobile phone, to a television (TV).

SUMMARY OF CERTAIN INVENTIVE ASPECTS

[0007] One inventive aspect is an organic light-emitting diode (OLED) display and a method of manufacturing the same.

[0008] In another aspect, an OLED display includes: a gate line; a data line crossing the gate line and having a first color; a switching thin-film transistor electrically connected to the gate line and the data line; a driving thin-film transistor electrically connected to the switching thin-film transistor; an organic light-emitting device electrically connected to the driving thin-film transistor and including a pixel electrode, an intermediate layer formed on the pixel electrode and including an organic emission layer, and a counter electrode formed on the intermediate layer; and a light absorption layer formed in a region overlapping the data line in plan view, and having a second color different from the first color.

[0009] The first and second colors can be substantially complementary colors.

[0010] The data line can include a metal layer and a metal oxide layer formed on the metal layer.

[0011] The metal layer and the metal oxide layer can be respectively a titanium (Ti) layer and a titanium oxide (TiOx) layer.

[0012] The driving thin-film transistor can include a source electrode and a drain electrode, which are formed on a same layer and formed of a same material as the data line, wherein the source and drain electrodes can have the first color.

[0013] The light absorption layer can operate as a pixel-defining film that covers both edges of the pixel electrode and defines a pixel region.

[0014] The OLED display can further include a color filter formed to correspond to the organic light-emitting device in a direction in which light emitted from the intermediate layer is emitted, wherein the light absorption layer can be formed on a same layer as the color filter.

[0015] In another aspect, a method of manufacturing an organic light-emitting diode (OLED) display apparatus, the method includes: forming a gate line on a substrate; forming a data line that crosses the gate line and has a first color; and forming a light absorption layer having a second color different from the first color, in a region on the data line overlapping the data line in plan view.

[0016] The first and second colors can be substantially complementary colors.

[0017] The forming of the data line can include: forming a metal layer; oxidizing at least a portion of the metal layer via an anodic oxidation method using an electrolyte, resulting in an oxidized portion of the metal layer; and patterning the metal layer which is oxidized at least a portion.

[0018] The metal layer can include titanium (Ti).

[0019] The method can further include forming a driving thin-film transistor including source and drain electrodes having the first color, wherein the source and drain electrodes can be formed simultaneously with the data line.

[0020] The method can further include forming an organic light-emitting device electrically connected to the driving thin-film transistor, wherein the forming of the organic light-emitting device can include: forming a pixel electrode; forming an intermediate layer including an organic emission layer; and forming a counter electrode.

[0021] The forming of the light absorption layer can include, after the forming of the pixel electrode, forming the light absorption layer operating as a pixel-defining film that covers both edges of the pixel electrode and defines a pixel region.

[0022] The method can further include forming a color filter to correspond to the organic light-emitting device in a direction in which light emitted from the intermediate layer is emitted, wherein the light absorption layer and the color filter can be formed on a same layer.

[0023] Another aspect is an organic light-emitting diode (OLED) display, comprising a gate line, a data line crossing the gate line and having a first color, a switching thin-film transistor (TFT) electrically connected to the gate line and the data line, a driving TFT electrically connected to the switching TFT, an organic light-emitting diode (OLED), and a light absorption layer. The OLED is electrically connected to the driving TFT and comprises i) a pixel electrode, ii) an intermediate layer formed over the pixel electrode and including an organic emission layer, and iii) a counter electrode formed over the intermediate layer. The light absorption layer is formed in a region at least partially overlapping the data line in plan view, and having a second color different from the first color.

[0024] In the above OLED display, the first and second colors are substantially complementary to each other.

[0025] In the above OLED display, the data line comprises a metal layer and a metal oxide layer formed on the metal layer. In the above OLED display, the metal layer and the metal oxide layer are respectively a titanium (Ti) layer and a titanium oxide (TiOx) layer.

[0026] In the above OLED display, the driving TFT comprises a source electrode and a drain electrode formed on the

same layer and formed of the same material as that of the data line, wherein the source and drain electrodes have the first color.

[0027] In the above OLED display, the light absorption layer includes a pixel-defining film that at least partially covers opposing ends of the pixel electrode and defines a pixel region.

[0028] The above OLED further comprises a color filter formed over the OLED, wherein the light absorption layer is formed on the same layer as that of the color filter.

[0029] Another aspect is a method of manufacturing an organic light-emitting diode (OLED) display, the method comprising forming a gate line over a substrate, forming a data line that crosses the gate line and has a first color, and forming a light absorption layer in a region on the data line at least partially overlapping the data line in plan view, wherein the light absorption layer has a second color different from the first color.

[0030] In the above method, the first and second colors are substantially complementary to each other.

[0031] In the above method, the forming of the data line comprises forming a metal layer, oxidizing at least a portion of the metal layer with an electrolyte so as to form an oxidized portion of the metal layer, and patterning the metal layer including the oxidized portion. In the above method, the metal layer is formed of titanium (Ti).

[0032] The above method further comprises forming a driving thin-film transistor (TFT) comprising source and drain electrodes having the first color, wherein the source and drain electrodes are formed substantially simultaneously with the data line. The above method further comprises forming an OLED electrically connected to the driving TFT. In the above method, the forming of the OLED comprises forming a pixel electrode, forming an intermediate layer comprising an organic emission layer over the pixel electrode, and forming a counter electrode over the intermediate layer. In the above method, the light absorption layer includes a pixel-defining film that at least partially covers opposing ends of the pixel electrode and defines a pixel region.

[0033] The above method further comprises forming a color filter over the OLED, wherein the light absorption layer and the color filter are formed on the same layer.

[0034] Another aspect is an organic light-emitting diode (OLED) display comprising a driving thin-film transistor (TFT), a data line electrically connected to the driving TFT and having a first color, an organic light-emitting diode (OLED) electrically connected to the driving TFT, and a light absorption layer formed over the data line and having a second color different from the first color.

[0035] In the above OLED display, the first and second colors are substantially complementary to each other.

[0036] In the above OLED display, the driving TFT comprises a source electrode and a drain electrode formed on the same layer and formed of the same material as that of the data line, wherein the source and drain electrodes have the first color.

[0037] In the above OLED display, the OLED comprises a pixel electrode, wherein the light absorption layer includes a pixel-defining film that at least partially covers opposing ends of the pixel electrode and defines a pixel region.

[0038] The above OLED display further comprises a color filter formed over the OLED, wherein the light absorption layer is formed on the same layer as that of the color filter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0039] FIG. 1 is a circuit diagram schematically illustrating a pixel circuit of an organic light-emitting diode (OLED) display according to an embodiment.

[0040] FIG. 2 is a cross-sectional view schematically illustrating an OLED display according to an embodiment.

[0041] FIG. 3 is a cross-sectional view of a region A of FIG. 1.

[0042] FIGS. 4A through 4I are cross-sectional views for describing a method of manufacturing the OLED display of FIG. 2.

[0043] FIG. 5 is a cross-sectional view schematically illustrating an OLED display according to another embodiment.

[0044] FIG. 6 is a cross-sectional view schematically illustrating an OLED display according to another embodiment.

DETAILED DESCRIPTION OF CERTAIN INVENTIVE EMBODIMENTS

[0045] Hereinafter, the described technology will be described more fully with reference to the accompanying drawings, in which exemplary embodiments of the described technology are shown. The described technology can, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the concept of the described technology to those skilled in the art.

[0046] In the drawings, like reference numerals denote like elements, and overlapping descriptions are omitted.

[0047] In the specification, the terms such as “first”, “second”, etc., do not have limited meanings, but are used only to distinguish one component from another.

[0048] An expression used in the singular encompasses the expression of the plural, unless the expression used in the singular has a clearly different meaning in the context.

[0049] In the present specification, it is to be understood that the terms such as “including” or “having,” etc., are intended to indicate the existence of the features or components, and are not intended to preclude the possibility that one or more other features or components can exist or can be added.

[0050] It will also be understood that when a part such as a film, a region, or a component is referred to as being “on” another part, it can be directly on the other part, or intervening film, region, or component can also be present.

[0051] In drawings, the sizes of components can be exaggerated for clarity. For example, because the sizes and thicknesses of components are arbitrarily illustrated for convenience of description, embodiments of the present described technology are not limited by the drawings.

[0052] As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. Expressions such as “at least one of,” when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list. In this disclosure, the term “substantially” includes the meanings of completely, almost completely or to any significant degree under some applications and in accordance with those skilled in the art. Moreover, “formed on” can also mean “formed over.”

[0053] FIG. 1 is a circuit diagram schematically illustrating a pixel circuit of an OLED display 100 according to an embodiment. FIG. 2 is a cross-sectional view schematically

illustrating the OLED display 100 according to an embodiment. FIG. 3 is a cross-sectional view of a region A of FIG. 1.

[0054] Referring to FIG. 1, the OLED display 100 includes a gate line 134, a data line 146 crossing the gate line 134 and having a first color, a switching thin-film transistor (TFT) T2 electrically connected to the gate line 134 and the data line 146, a driving TFT T1 electrically connected to the switching TFT T2, an organic light-emitting diode (OLED) electrically connected to the driving TFT T1, and a light absorption layer 160 (FIG. 2) formed in a region overlapping the data line 146 in plan view and having a second color different from the first color.

[0055] Referring to driving principles of the OLED display 100, the switching TFT T2 is turned on by a selection signal transmitted through the gate line 134. A data voltage is transmitted to a gate terminal of the driving TFT T1 through the data line 146 when the switching TFT T2 is turned on. A potential difference between the data voltage and a voltage source VDD is stored in a capacitor Cst connected between a gate and a source of the driving TFT T1. A driving current I_{OLED} flows to the OLED due to the potential difference, and thus the OLED emits light. In some embodiments, a predetermined contrast gray scale can be displayed according to a voltage level of an applied data voltage.

[0056] FIG. 1 shows an active matrix (AM) type OLED display having a 2Tr-1Cap structure, wherein the pixel circuit includes two TFTs, i.e., the driving TFT T1 and the switching TFT T2, and one capacitor Cst, but the described technology is not limited thereto. In other words, an OLED display can include a plurality of TFTs and at least one capacitor in one pixel circuit, and can be formed to have any one of various structures. For example, a separate wire can be further included or an existing wire can be omitted. In some embodiments, a pixel circuit is a minimum unit for displaying an image, and a display apparatus displays an image by using a plurality of pixel circuits.

[0057] Referring to FIGS. 2 and 3, a buffer layer 111 can be formed on a substrate 110 that is a glass substrate or a plastic substrate. The buffer layer 111 can block impure elements from penetrating through the substrate 110, can flatten a surface of the substrate 110, and can include a single layer or plurality of layers formed of an inorganic material, such as silicon nitride (SiN_x) and/or silicon oxide (SiO_x).

[0058] The driving TFT T1 can be formed in a region on the buffer layer 111. The driving TFT T1 can include an active layer 122, a gate electrode 124, a source electrode 126s, and a drain electrode 126d. A gate insulating film 113 can be formed between the active layer 122 and the gate electrode 124, and an interlayer insulating film 115 can be formed between the gate electrode 124 and the source and drain electrodes 126s and 126d.

[0059] In FIG. 2, the driving TFT T1 is a top gate type TFT in which the gate electrode 124 is formed above the active layer 122, but alternatively, the driving TFT T1 can be a bottom gate type TFT in which the gate electrode 124 is formed below the active layer 122.

[0060] The active layer 122 can be formed of an inorganic semiconductor material, such as amorphous silicon or crystalline silicon. The gate electrode 124 can include a single layer or plurality of layers formed of at least one material from among aluminum (Al), platinum (Pt), palladium (Pd), silver (Ag), magnesium (Mg), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), chromium (Cr), lithium (Li), calcium (Ca), molybdenum (Mo), titanium (Ti), tungsten (W),

and copper (Cu). The gate electrode 124 can be formed on the same layer and formed of the same material as the gate line 134.

[0061] The source and drain electrodes 126s and 126d can have the first color, and can be electrically connected to the active layer 122 respectively through first and second contact holes C1 and C2 formed in the interlayer insulating film 115 and the gate insulating film 113. The source and drain electrodes 126s and 126d can be formed on the same layer and can include the same material as the data line 146, which will be described in detail later.

[0062] The gate line 134 is formed in another region on the buffer layer 111, and the gate insulating film 113 can be formed between the buffer layer 111 and the gate line 134.

[0063] The gate line 134 can be formed on the same layer and be formed of the same material as that of the gate electrode 124. In other words, the gate line 134 can include a single layer or plurality of layers formed of at least one of Al, Pt, Pd, Ag, Mg, Au, Ni, Nd, Jr, Cr, Li, Ca, Mo, Ti, W, and Cu.

[0064] The data line 146 can be formed in another region on the buffer layer 111. The gate insulating film 113 and the interlayer insulating film 115 can be formed between the buffer layer 111 and the data line 146. Although not shown, the gate line 134 and the data line 146 can include regions that overlap in plan view, and can be insulated from each other by the interlayer insulating film 115.

[0065] The data line 146 has the first color, and the first color can be a chromatic color, such as blue, yellow, or green, instead of a black- or white-based color. When a data line has a white-based color, visibility of an OLED display can be low because external light incident on the data line is reflected. When the data line has a black-based color, the data line can absorb a laser beam emitted while manufacturing the OLED display and thus a metal forming the data line can melt.

[0066] However, the data line 146, according to the current embodiment, has a chromatic color instead of a white- or black-based color. When viewed together with the light absorption layer 160 by a user, the data line 146 can be appeared to be in a black-based color, which will be described later.

[0067] Referring to FIG. 3, the data line 146 can include a plurality of layers, and can include a low resistance metal layer 146b formed of Al or Cu. The data line 146 can include first and second protection metal layers 146a and 146c respectively formed below and on the low resistance metal layer 146b.

[0068] The first and second protection metal layers 146a and 146c can include Ti. A metal oxide layer 146d having a thickness t can be formed on the second protection metal layer 146c.

[0069] The metal oxide layer 146d can be formed of titanium oxide (TiO_x). The data line 146 can have various colors based on the thickness t of the metal oxide layer 146d, as will be described later.

[0070] As described above, the source and drain electrodes 126s and 126d can be formed of the same material as that of the data line 146, can include Ti and TiO_x , and can also have the first color, like the data line 146.

[0071] Referring back to FIG. 2, a planarization film 117 can be formed on the interlayer insulating film 115 to at least partially cover the data line 146, the source electrode 126s, and the drain electrode 126d. The OLED including a pixel

electrode **151**, an intermediate layer **153** including an organic emission layer, and a counter electrode **155** can be formed on the planarization film **117**.

[0072] The planarization film **117** can include a via hole **C3**, and the drain electrode **126d** and the pixel electrode **151** can be electrically connected to each other through the via hole **C3**.

[0073] The pixel electrode **151** can be a reflection electrode including a reflection layer. For example, the reflection layer can be formed of at least one material selected from the group consisting of Ag, Mg, Al, Pt, Pd, Au, Ni, Nd, Jr, and Cr. A transparent or semi-transparent electrode layer formed of at least one material selected from the group consisting of indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), indium oxide (In_2O_3), indium gallium oxide, and aluminum zinc oxide (AZO) can be further formed on the reflection layer.

[0074] For example, the pixel electrode **151** can include three layers: ITO, Ag, and ITO.

[0075] The intermediate layer **153** can include the organic emission layer, and can further include at least one of a hole injection layer (HIL), a hole transport layer (HTL), an electron transport layer (ETL), and an electron injection layer (EIL). However, the described technology is not limited thereto, and the intermediate layer **153** can further include other various functional layers, as well as the organic emission layer.

[0076] Meanwhile, when the OLED is a full color OLED display, the organic emission layer can be patterned to include a red emission layer, a green emission layer, and a blue emission layer respectively according to a red sub-pixel, a green sub-pixel, and a blue sub-pixel.

[0077] Meanwhile, the organic emission layer can have a multilayer structure in which a red emission layer, a green emission layer, and a blue emission layer are stacked to emit a white light, or a single layer structure including a red emission material, a green emission material, and a blue emission material. The OLED including such an organic emission layer can additionally include a red color filter, a green color filter, and a blue color filter to emit a full color.

[0078] The counter electrode **155** can be a transparent or semi-transparent electrode, can be formed of at least one material selected from among Ag, Al, Mg, Li, Ca, Cu, LiF/Ca, LiF/Al, MgAg, and CaAg, and can have a thickness from several nanometers (nm) to tens of nanometers (nm).

[0079] The OLED display **100** of FIG. 1 can be a top-emission type OLED display that emits a light towards the counter electrode **155** because the pixel electrode **151** is a reflection electrode and the counter electrode **155** is a transparent or semi-transparent electrode.

[0080] The light absorption layer **160** at least partially covering two edges or opposing ends of the pixel electrode **151** can be formed on the planarization film **117**. In the some embodiments, the light absorption layer **160** can operate as a pixel-defining film for defining a pixel region. The light absorption layer **160** can be formed of an organic material having the second color, or an organic material including a pigment having the second color.

[0081] The light absorption layer **160** can have the second color different from the first color, and the first and second colors can be complementary colors. In other words, when the first and second colors are mixed, brightness can be decreased and the mixture of first and second colors can substantially have a black-based color.

[0082] The data line **146** and the light absorption layer **160** are formed in regions overlapping each other in plan view. The overlapping regions can substantially appear to be black when viewed by the user.

[0083] Accordingly, light corresponding to a partial wavelength of a visible ray area of external light incident on the OLED display **100** can be absorbed by the light absorption layer **160**, and light corresponding to the remaining wavelength can be absorbed by the data line **146**.

[0084] In other words, the OLED display **100** can have improved visibility by reducing the amount of external light reflected by a metal layer, such as the data line **146** included in the OLED display **100**.

[0085] FIGS. 4A through 4I are cross-sectional views for describing a method of manufacturing the OLED display **100** of FIG. 2.

[0086] Referring to FIG. 4A, the buffer layer **111** can be formed on the substrate **110**, and then the active layer **122** can be formed on the buffer layer **111**. The buffer layer **111** can include a single layer or plurality of layers formed of an inorganic material, such as SiN_x and/or SiO_x . The active layer **122** can be formed of an inorganic semiconductor material, such as amorphous silicon or crystalline silicon.

[0087] Referring to FIG. 4B, the gate insulating film **113** can be formed to at least partially cover the active layer **122** on the buffer layer **111**. The gate line **134** and the gate electrode **124** can be formed on the gate insulating film **113**.

[0088] The gate insulating film **113** can be formed of an inorganic material, such as SiO_2 , SiN_x , SiON , Al_2O_3 , TiO_2 , Ta_2O_5 , HfO_2 , ZrO_2 , BST, or PZT. The gate line **134** and the gate electrode **124** can include a single layer or multiple layers formed of at least one material from among Al, Pt, Pd, Ag, Mg, Au, Ni, Nd, Ir, Cr, Li, Ca, Mo, Ti, W, and Cu.

[0089] Although not illustrated, the gate line **134** and the gate electrode **124** can be substantially simultaneously formed by coating a conductive material, and then sequentially performing photoresist coating, exposing light, developing, etching, and striping by using a mask corresponding to a desired pattern.

[0090] Referring to FIG. 4C, the interlayer insulating film **115** can be formed to at least partially cover the gate line **134** and the gate electrode **124**. The first and second contact holes **C1** and **C2** exposing parts of two edges of the active layer **122** can be formed at the interlayer insulating film **115** and the gate insulating film **113**.

[0091] Referring to FIG. 4D, a metal layer **116'** can be formed on the interlayer insulating film **115**. The metal layer **116'** can include a low resistance metal layer **116b** and first and second protection metal layers **116a** and **116c** respectively formed below and on the low resistance metal layer **116b**. The low resistance metal layer **116b** can be formed of Al or Cu, and the first and second protection metal layers **116a** and **116c** can be formed of Ti.

[0092] Referring to FIGS. 4E and 4F, the substrate **110**, on which the metal layer **116'** of FIG. 4D, etc. are formed, are put into a container **10** accommodating an electrolyte **20**. The metal layer **116'** can be oxidized by using the metal layer **116'** as a positive electrode. In other words, the metal layer **116'** can be oxidized via an anodic oxidation method.

[0093] A negative electrode material **30**, as well as the substrate **110**, can be formed in the electrolyte **20**. The electrolyte **20** can be a liquid in which water and an acidic solution, such as ammonium sulfate, copper sulfate, or sodium

carbonate, are mixed. However, the electrolyte **20** is not limited thereto, and any acidic solution can be used as the electrolyte **20**.

[0094] According to the anodic oxidation method, the second protection metal layer **116c** that is an uppermost layer in the metal layer **116'** is oxidized, and thus a metal oxide layer **116d** is formed.

[0095] In other words, an oxidized metal layer **116** can include the low resistance metal layer **116b**, the first and second protection metal layers **116a** and **116c** respectively formed on and below the low resistance metal layer **116b**, and the metal oxide layer **116d** formed on the second protection metal layer **116c**. The metal oxide layer **116d** can be TiO_x generated as Ti is oxidized, and can have the thickness t .

[0096] The thickness t of TiO_x can vary according to a voltage applied to the electrolyte **20**, i.e., according to a potential difference between the metal layer **116'** and the negative electrode material **30**. A color of the oxidized metal layer **116** can vary according to the thickness t . As the voltage applied to the electrolyte **20** is increased, the oxidized metal layer **116** can have a color such as yellow, purple, blue, magenta, or green.

[0097] Referring to FIG. 4G, the oxidized metal layer **116** of FIG. 4F can be patterned to substantially simultaneously form the data line **146**, the source electrode **126s**, and the drain electrode **126d**.

[0098] In other words, the data line **146**, the source electrode **126s**, and the drain electrode **126d** can have a predetermined color, i.e., the first color, according to the thickness t of TiO_x , as described above.

[0099] Referring to FIG. 4H, the planarization film **117** can be formed to at least partially cover the data line **146**, the source electrode **126s**, and the drain electrode **126d** on the interlayer insulating film **115**. The via hole C3 can be formed on the planarization film **117**. The planarization film **117** can be formed of an organic material having excellent planarization characteristics.

[0100] After forming the via hole C3, the pixel electrode **151** electrically connected to the drain electrode **126d** through the via hole C3 can be formed on the planarization film **117**.

[0101] Referring to FIG. 4I, after forming the pixel electrode **151**, the light absorption layer **160** can be formed.

[0102] The light absorption layer **160** can be formed of an organic material having the second color, or an organic material including a pigment having the second color.

[0103] The light absorption layer **160** can have the second color different from the first color, and the first and second colors can be complementary colors. In other words, when the first and second colors are mixed, brightness can be decreased and the mixture of first and second colors can substantially have a black-based color.

[0104] The data line **146** and the light absorption layer **160** are formed in regions overlapping each other in plan view. The overlapping regions can substantially appear to be black when viewed by the user.

[0105] Referring back to FIG. 2, the intermediate layer **153** and the counter electrode **155** can be formed on the pixel electrode **151**.

[0106] FIG. 5 is a cross-sectional view schematically illustrating an OLED display **200** according to another embodiment.

[0107] Like reference numerals in FIGS. 2 and 5 denote like elements, and differences between the OLED display **100** of FIG. 2 and the OLED display **200** of FIG. 5 will now be mainly described.

[0108] Referring to FIG. 5, the OLED display **200** according to the current embodiment includes the buffer layer **111** formed on the substrate **110**. The driving TFT T1, the gate line **134**, and the data line **146** can be formed on the buffer layer **111**.

[0109] The driving TFT T1 can include the active layer **122**, the gate electrode **124**, the source electrode **126s**, and the drain electrode **126d**. The gate insulating film **113** can be formed between the active layer **122** and the gate electrode **124**. The interlayer insulating film **115** can be formed between the gate electrode **124** and the source and drain electrodes **126s** and **126d**.

[0110] The gate line **134** can be formed on the same layer and formed of the same material as the gate electrode **124**. The data line **146** can be formed on the same layer and formed of the same material as the source and drain electrodes **126s** and **126d**.

[0111] The data line **146**, the source electrode **126s**, and the drain electrode **126d** can have the first color, and include a metal layer formed of Ti and a metal oxide layer formed of TiO_x .

[0112] The first color can be a chromatic color instead of a white- or black-based color, and can appear to be a black-based color together with a light absorption layer **260** described later, when viewed by the user.

[0113] The planarization film **117** can be formed on the interlayer insulating film **115** to at least partially cover the data line **146**, the source electrode **126s**, and the drain electrode **126d**. The OLED including a pixel electrode **251**, an intermediate layer **253** including an organic emission layer, and a counter electrode **255** can be formed on the planarization film **117**. The planarization film **117** can include the via hole C3. The drain electrode **126d** and the pixel electrode **251** can be electrically connected to each other through the via hole C3.

[0114] The pixel electrode **251** can be a reflection electrode including a reflection layer, the counter electrode **155** can be a transparent or semi-transparent electrode, and the intermediate layer **253** can include the organic emission layer and further include at least one of an HIL, an HTL, an ETL, and an EIL. However, the described technology is not limited thereto, and the intermediate layer **253** can further include other various functional layers, as well as the organic emission layer.

[0115] The organic emission layer can have a multilayer structure in which a red emission layer, a green emission layer, and a blue emission layer are stacked to emit a white light, or can have a single layer structure formed of a red emission material, a green emission material, and a blue emission material.

[0116] A pixel-defining film **219** at least partially covering two edges of the pixel electrode **251** can be formed on the planarization film **117**. The pixel-defining film **219** can be formed of an organic material, such as polyimide.

[0117] The OLED display **200** can include an encapsulation substrate **290**. The light absorption layer **260** and a color filter **270** can be formed on a surface of the encapsulation substrate **290**, which faces the substrate **110**.

[0118] The color filter **270** can be formed to correspond to the OLED in a direction in which light emitted from the

intermediate layer **253** is emitted. The color filter **270** can be any one of a red color filter, a green color filter and a blue color filter. In other words, the intermediate layer **253** can emit a white light and realize a color with the color filter **270**.

[0119] FIG. 5 illustrates one sub-pixel of the OLED display **200**. Each pixel of the OLED display **200** can include a plurality of sub-pixels.

[0120] The light absorption layer **260** can be formed on the same layer as the color filter **270**, and can be formed to substantially overlap the data line **146** in plan view.

[0121] The light absorption layer **260** can have the second color different from the first color, and the first and second colors can be complementary colors. In other words, when the first and second colors are mixed, brightness can be decreased and the mixture of first and second colors can substantially have a black-based color.

[0122] The light absorption layer **260** can have the same color as the color filter **270**, and in this case, the color filter **270** and the light absorption layer **260** can be formed of the same material, and can be formed substantially simultaneously.

[0123] In other words, a coating of a material for forming the light absorption layer **260** and a coating of a material for forming the color filter **270** can be applied to the encapsulation substrate **290**. The light absorption layer **260** and the color filter **270** can be substantially simultaneously formed via a patterning process.

[0124] When the light absorption layer **260** and the color filter **270** are formed of different materials, a coating of a material for forming the color filter **270** can be applied to the encapsulation substrate **290** and patterned to form the color filter **270**. A coating of a material for forming the light absorption layer **260** can be applied to the encapsulation substrate **290** and patterned to form the light absorption layer **260**. The light absorption layer **260** can be formed and then the color filter **270** can be formed.

[0125] An overcoat film **280** can be formed on the encapsulation substrate **290** to cover the light absorption layer **260** and the color filter **270**. although not illustrated, a black matrix (not shown) can be further formed between the light absorption layer **260** and the color filter **270**.

[0126] In FIG. 5, a width of the light absorption layer **260** is the same as that of the data line **146**, but alternatively, the light absorption layer **260** can extend to a region beyond a region where the color filter **270** is formed.

[0127] The data line **146** and the light absorption layer **260** can be formed in regions overlapping each other in plan view, and can substantially appear to be black when viewed by the user.

[0128] Accordingly, light corresponding to a partial wavelength of a visible ray area of external light incident on the OLED display **200** can be absorbed by the light absorption layer **260**, and light corresponding to the remaining wavelength can be absorbed by the data line **146**.

[0129] In other words, the OLED display **200** can have improved visibility by reducing the amount of external light reflected by a metal layer, such as the data line **146** included in the OLED display **200**.

[0130] FIG. 6 is a cross-sectional view schematically illustrating an OLED display **300** according to another embodiment.

[0131] Like reference numerals in FIGS. 2 and 6 denote like elements, and differences between the OLED display **100** of FIG. 2 and the OLED display **300** of FIG. 6 will now be mainly described.

[0132] Referring to FIG. 6, the OLED display **300** according to the current embodiment includes the buffer layer **111** formed on the substrate **110**. The driving TFT **T1**, a gate line **334**, and the data line **146** can be formed on the buffer layer **111**.

[0133] The driving TFT **T1** is a bottom gate type TFT, and includes a gate electrode **324**, an active layer **322**, and source and drain electrodes **326s** and **326d** electrically connected to the active layer **322**. In some embodiments, a gate insulating film **313** can be formed between the gate electrode **324** and the active layer **322**, and an etch stop layer **315** can be formed between the active layer **322** and the source and drain electrodes **326s** and **326d**.

[0134] The gate electrode **324** is formed below the active layer **322**, and can be formed of at least one metal selected from among Al, Pt, Pd, Ag, Mg, Au, Ni, Nd, Jr, Cr, Li, Ca, Mo, Ti, W, and Cu.

[0135] The active layer **322** can be formed of an oxide semiconductor. When an active layer is formed of amorphous silicon, mobility of electrons is low and thus it is difficult to realize a driving circuit that operates at a high speed. When an active layer is formed of polysilicon, mobility of electrons is high but a threshold voltage is not uniform, and thus a separate compensation circuit can be used. Accordingly, the OLED display **300** of FIG. 6 can use an oxide semiconductor as the active layer **322**.

[0136] For example, the active layer **322** can include at least any one of indium gallium zinc oxide (IGZO) and indium tin zinc oxide (ITZO), and can have a thickness of about 500 Å. Alternatively, the active layer **322** can be formed of an oxide of a material selected from among 12, 13, and 14-group metal elements, such as Zn, In, Ga, Sn, Cd, Ge, and Hf, and a combination thereof.

[0137] The etch stop layer **315** formed on the active layer **322** can protect the active layer **322** while the source and drain electrodes **326s** and **326d** are formed. The etch stop layer **315** and the active layer **322** can be formed of materials having different etch selectivities. In some embodiments, a difference in etch selectivities means that the active layer **322** and the etch stop layer **315** have different etch rates such that the active layer **322** is not etched while the etch stop layer **315** is etched. For example, the etch stop layer **315** can be formed of a material, such as SiN_x or AlO_x , which has a low amount of hydrogen, and thereby does not affect an oxide characteristic of the active layer **322**. The etch stop layer **315** can include the first and second contact holes **C1** and **C2** exposing parts of the active layer **322**.

[0138] The source and drain electrodes **326s** and **326d**, which are electrically connected to the active layer **322** respectively through the first and second contact holes **C1** and **C2**, can be formed on the etch stop layer **315**.

[0139] The gate line **334** can be formed on the same layer and formed of the same material as the gate electrode **324**. The data line **146** can be formed on the same layer and formed of the same material as the source and drain electrodes **326s** and **326d**.

[0140] The data line **146**, the source electrode **326s**, and the drain electrode **326d** can have the first color, and can include a metal layer formed of Ti and a metal oxide layer formed of TiO_x .

[0141] The first color can be a chromatic color instead of a white- or black-based color, and can appear to be a black-based color together with the light absorption layer 160, when viewed by the user.

[0142] The planarization film 117 can be formed on the etch stop layer 315 to cover the data line 146, the source electrode 326s, and the drain electrode 326d. The OLED including the pixel electrode 151, the intermediate layer 153 including an organic emission layer, and the counter electrode 155 can be formed on the planarization film 117. The planarization film 117 can include the via hole C3. The drain electrode 326d and the pixel electrode 151 can be electrically connected to each other through the via hole C3.

[0143] The light absorption layer 160 can be formed on the planarization film 117. The light absorption layer 160 according to the current embodiment can operate as a pixel-defining film for defining a pixel region. The light absorption layer 160 can be formed of an organic material having the second color, or an organic material including a pigment having the second color.

[0144] The light absorption layer 160 can have the second color different from the first color, and the first and second colors can be complementary colors. In other words, when the first and second colors are mixed, brightness can be decreased and the mixture of first and second colors can substantially have a black-based color.

[0145] The data line 146 and the light absorption layer 160 are formed in regions overlapping each other in plan view, and the overlapping regions can appear to be black when viewed by the user.

[0146] The OLED displays 100 through 300 according to the embodiments include the data line 146 having the first color. The OLED displays 100 through 300 also include light absorption layers 160 and 260 formed in a region overlapping the data line 146 in plan view and having the second color. The data line 146 and the light absorption layers 160 and 260 can prevent the reflection of external light. Thus, visibilities of the OLED displays 100 through 300 can be improved.

[0147] The inventive technology has been described with reference to the figures, it will be understood by those of ordinary skill in the art that various changes in form and details can be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

What is claimed is:

1. An organic light-emitting diode (OLED) display, comprising:

- a gate line;
- a data line crossing the gate line and having a first color;
- a switching thin-film transistor (TFT) electrically connected to the gate line and the data line;
- a driving TFT electrically connected to the switching TFT;
- an organic light-emitting diode (OLED) electrically connected to the driving TFT and comprising i) a pixel electrode, ii) an intermediate layer formed over the pixel electrode and including an organic emission layer, and iii) a counter electrode formed over the intermediate layer; and
- a light absorption layer formed in a region at least partially overlapping the data line in plan view, and having a second color different from the first color.

2. The OLED display of claim 1, wherein the first and second colors are substantially complementary to each other.

3. The OLED display of claim 1, wherein the data line comprises a metal layer and a metal oxide layer formed on the metal layer.

4. The OLED display of claim 3, wherein the metal layer and the metal oxide layer are respectively a titanium (Ti) layer and a titanium oxide (TiOx) layer.

5. The OLED display of claim 1, wherein the driving TFT comprises a source electrode and a drain electrode formed on the same layer and formed of the same material as that of the data line, and wherein the source and drain electrodes have the first color.

6. The OLED display of claim 1, wherein the light absorption layer includes a pixel-defining film that at least partially covers opposing ends of the pixel electrode and defines a pixel region.

7. The OLED display of claim 1, further comprising a color filter formed over the OLED, wherein the light absorption layer is formed on the same layer as that of the color filter.

8. A method of manufacturing an organic light-emitting diode (OLED) display, the method comprising:

- forming a gate line over a substrate;
- forming a data line that crosses the gate line and has a first color; and
- forming a light absorption layer in a region on the data line at least partially overlapping the data line in plan view, wherein the light absorption layer has a second color different from the first color.

9. The method of claim 8, wherein the first and second colors are substantially complementary to each other.

10. The method of claim 8, wherein the forming of the data line comprises:

- forming a metal layer;
- oxidizing at least a portion of the metal layer with an electrolyte so as to form an oxidized portion of the metal layer; and
- patterning the metal layer including the oxidized portion.

11. The method of claim 10, wherein the metal layer is formed of titanium (Ti).

12. The method of claim 8, further comprising forming a driving thin-film transistor (TFT) comprising source and drain electrodes having the first color, wherein the source and drain electrodes are formed substantially simultaneously with the data line.

13. The method of claim 12, further comprising forming an OLED electrically connected to the driving TFT,

wherein the forming of the OLED comprises:

- forming a pixel electrode;
- forming an intermediate layer comprising an organic emission layer over the pixel electrode; and
- forming a counter electrode over the intermediate layer.

14. The method of claim 13, wherein the light absorption layer includes a pixel-defining film that at least partially covers opposing ends of the pixel electrode and defines a pixel region.

15. The method of claim 13, further comprising forming a color filter over the OLED, wherein the light absorption layer and the color filter are formed on the same layer.

* * * * *

专利名称(译)	有机发光二极管 (OLED) 显示器及其制造方法		
公开(公告)号	US20150228705A1	公开(公告)日	2015-08-13
申请号	US14/308348	申请日	2014-06-18
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM SU WEON		
发明人	KIM, SU-WEON		
IPC分类号	H01L27/32 H01L27/12 H01L51/56		
CPC分类号	H01L27/3276 H01L27/322 H01L27/3246 H01L2227/323 H01L51/56 H01L27/1259 H01L27/3248 H01L27/124 H01L27/1248 H01L51/5218 H01L51/5284		
优先权	1020140016286 2014-02-12 KR		
其他公开文献	US9142603		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种有机发光二极管 (OLED) 显示器及其制造方法。在一个方面，OLED显示器包括驱动薄膜晶体管 (TFT)，电连接到驱动TFT并具有第一颜色的数据线，OLED和光吸收层。OLED电连接到驱动TFT。光吸收层形成在数据线上方并具有与第一颜色不同的第二颜色。

