



US 20160254337A1

(19) **United States**(12) **Patent Application Publication**
CHOI et al.(10) **Pub. No.: US 2016/0254337 A1**(43) **Pub. Date: Sep. 1, 2016**(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE AND METHOD OF
MANUFACTURING THE SAME**(71) Applicant: **Samsung Display Co., LTD.,**
Yongin-City (KR)(72) Inventors: **Kwang-Young CHOI**, Incheon (KR);
Sang-Ho PARK, Suwon-si (KR)(21) Appl. No.: **14/942,173**(22) Filed: **Nov. 16, 2015**(30) **Foreign Application Priority Data**

Feb. 26, 2015 (KR) 10-2015-0026963

Publication Classification(51) **Int. Cl.**
H01L 27/32 (2006.01)
H01L 51/52 (2006.01)
H01L 51/56 (2006.01)(52) **U.S. Cl.**CPC **H01L 27/3272** (2013.01); **H01L 27/3262**
(2013.01); **H01L 27/3265** (2013.01); **H01L**
27/3276 (2013.01); **H01L 51/56** (2013.01);
H01L 51/5203 (2013.01)

(57)

ABSTRACT

An organic light emitting display device includes a substrate including a light-emitting region and a transparent region, a transistor disposed in the light-emitting region and including a gate electrode, a source electrode and a drain electrode overlapping the gate electrode, a capacitor disposed in the light-emitting region and disposed adjacent to the transistor and including a first capacitor electrode and a second capacitor electrode overlapping the first capacitor electrode, and a plurality of light-blocking patterns partially overlapping the gate electrode, the source electrode or the drain electrode and disposed on a different layer as a layer the gate electrode, the source electrode or the drain electrode are disposed.

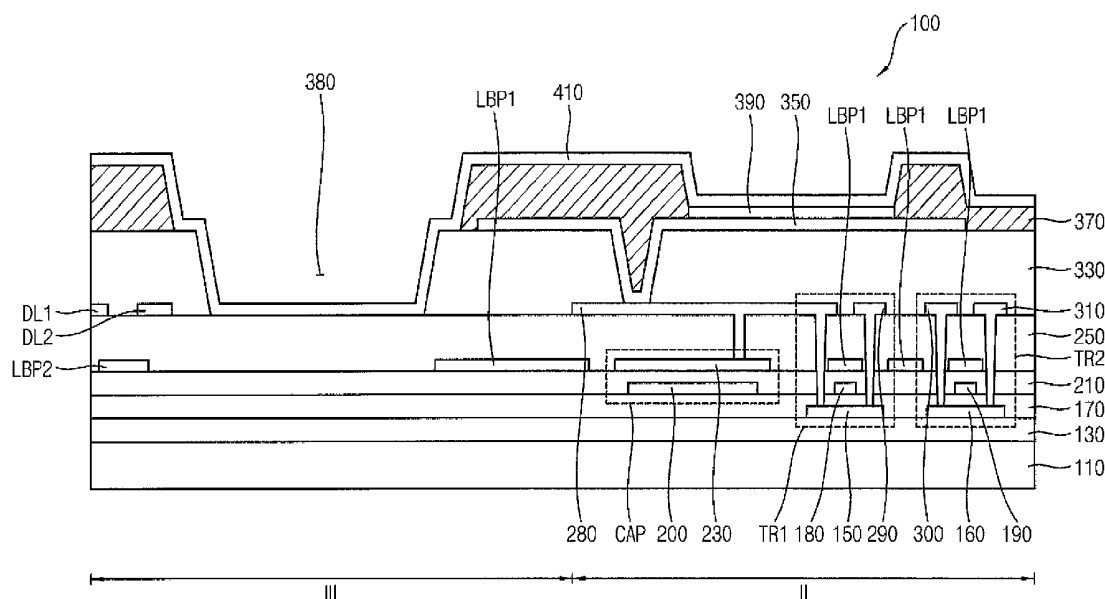


FIG. 1

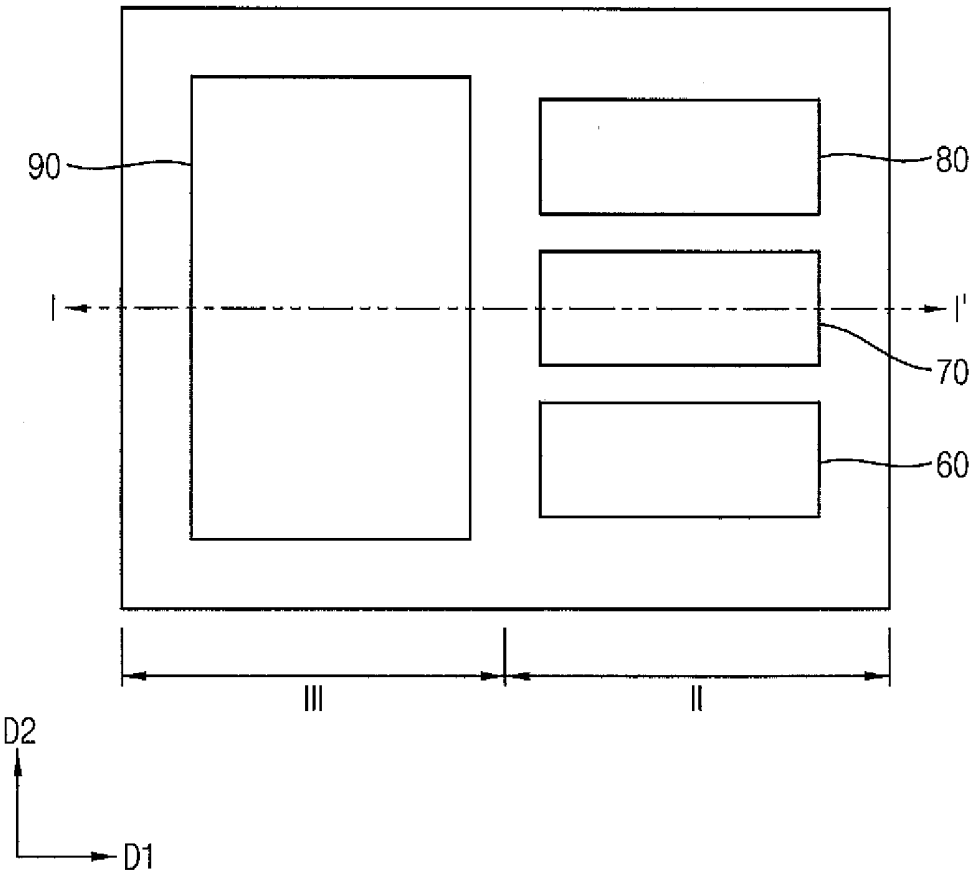


FIG. 3

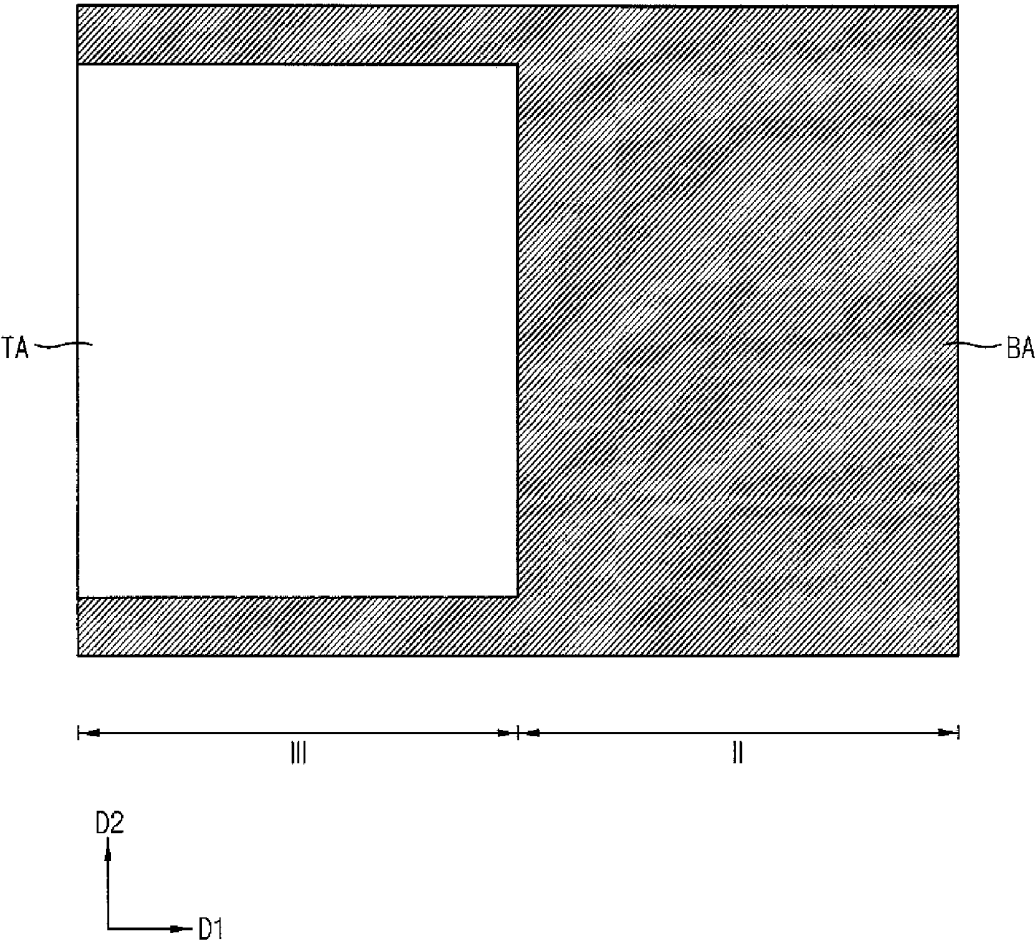


FIG. 4

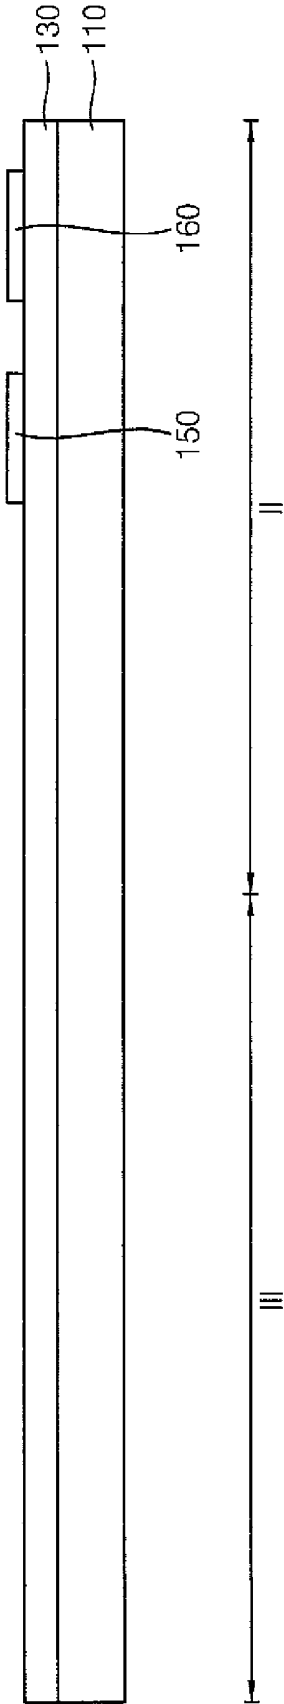


FIG. 5

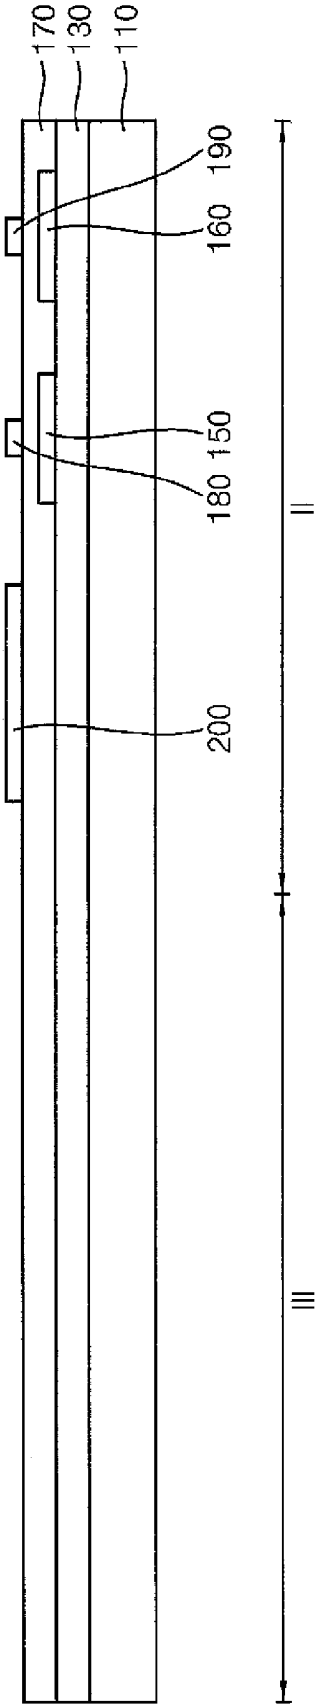


FIG. 6

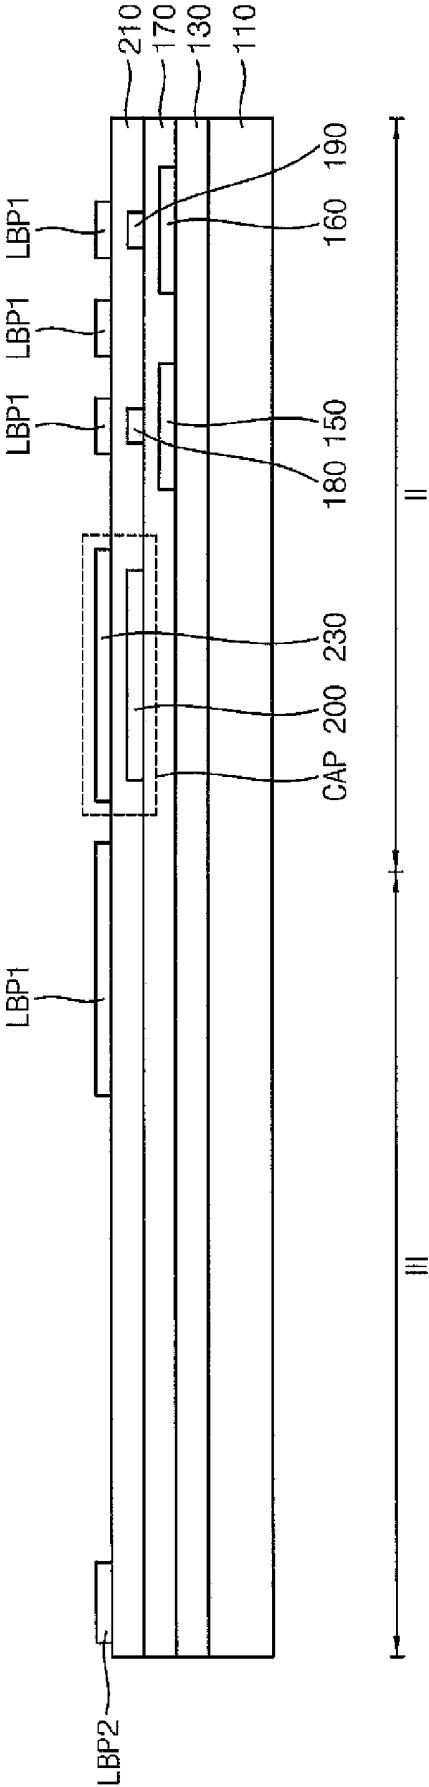


FIG. 8

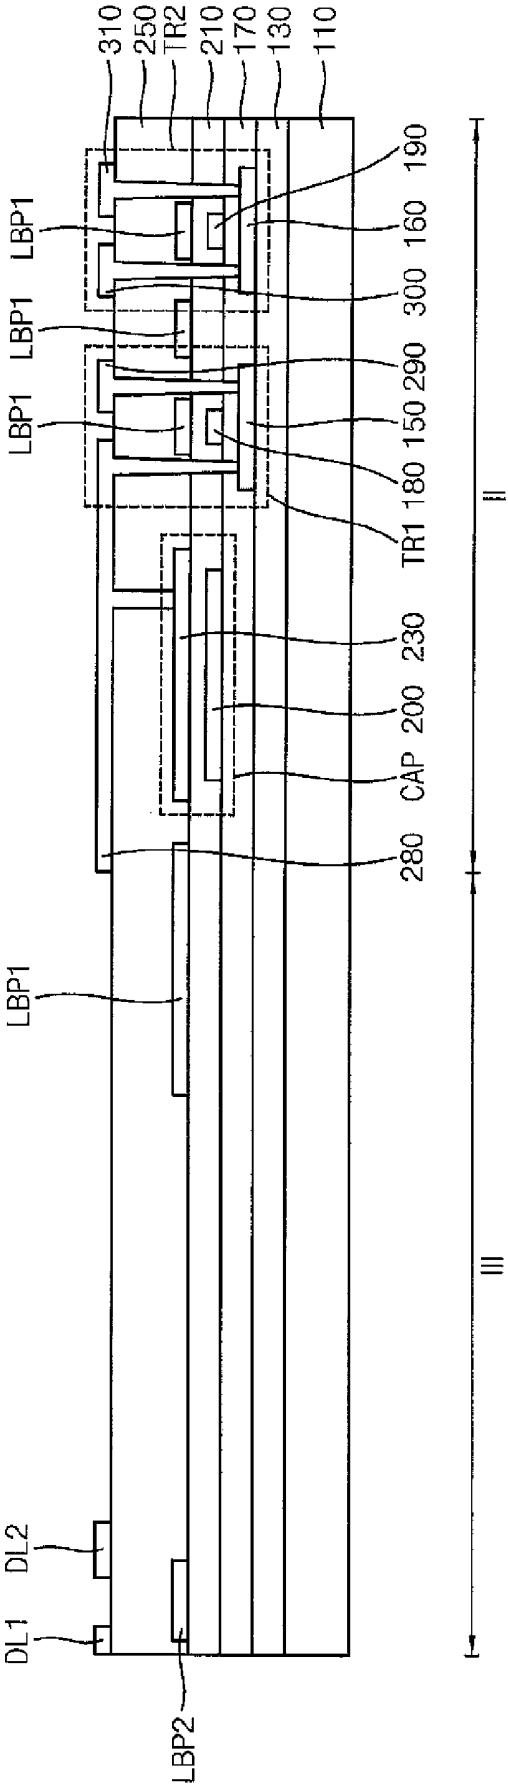


FIG. 12

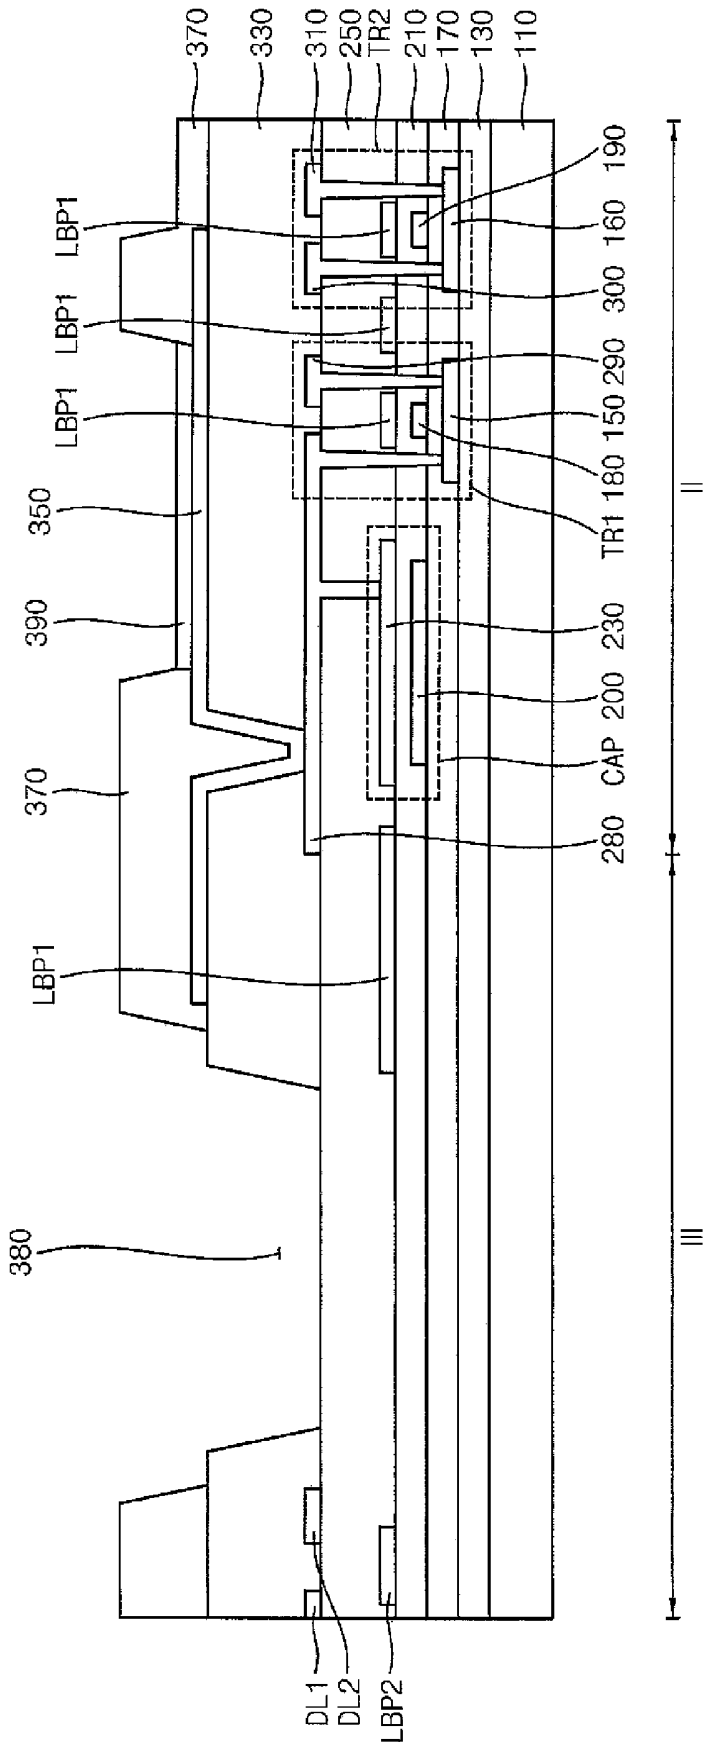


FIG. 13

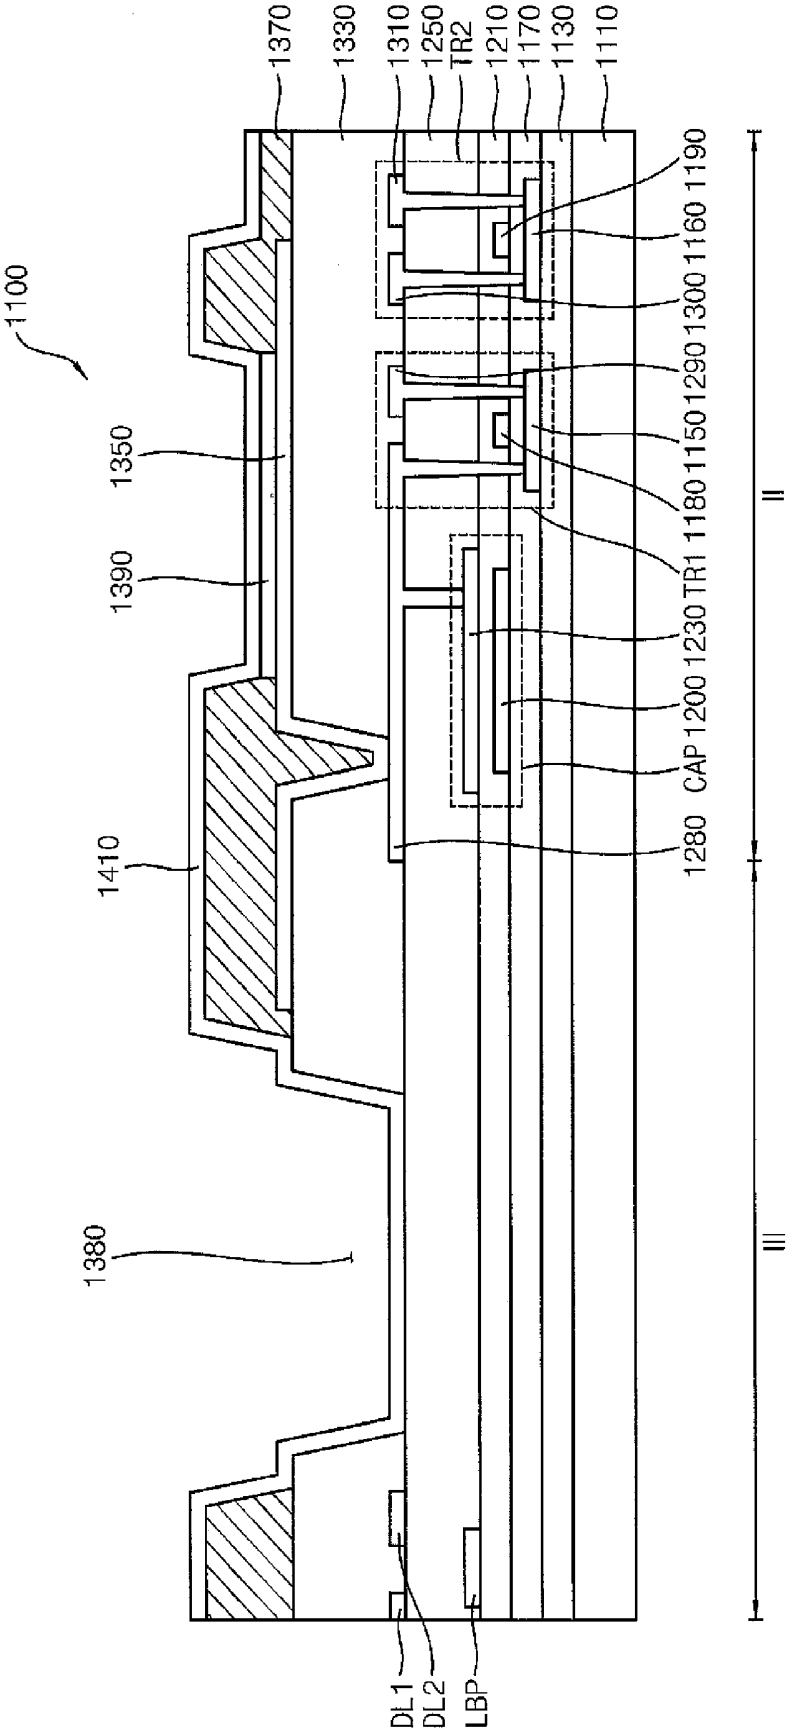


FIG. 14

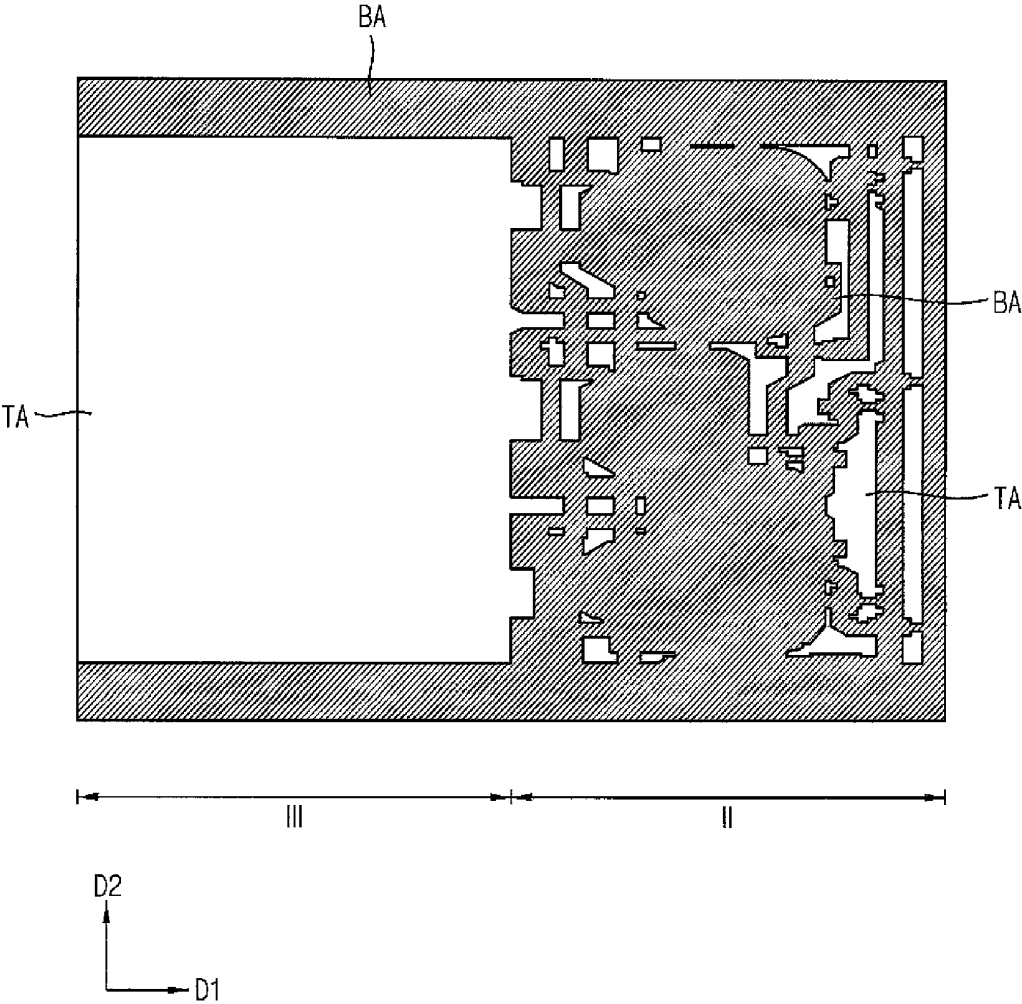


FIG. 15

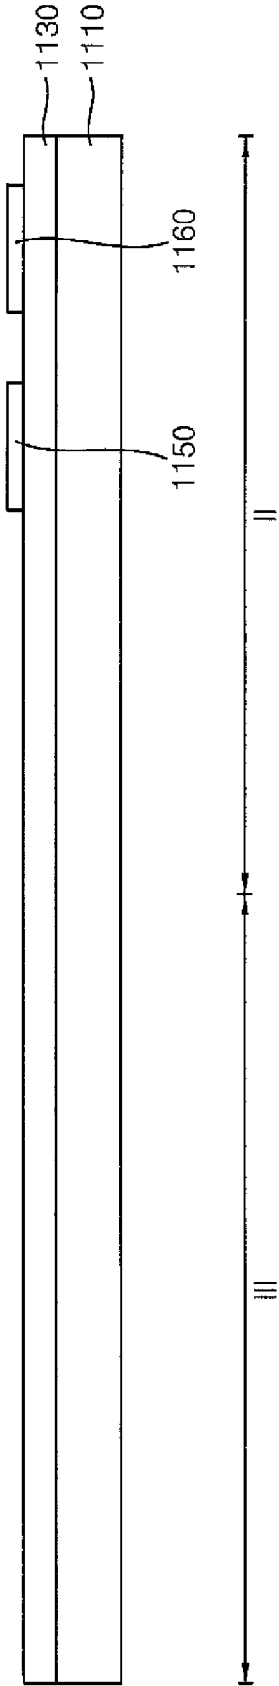


FIG. 16

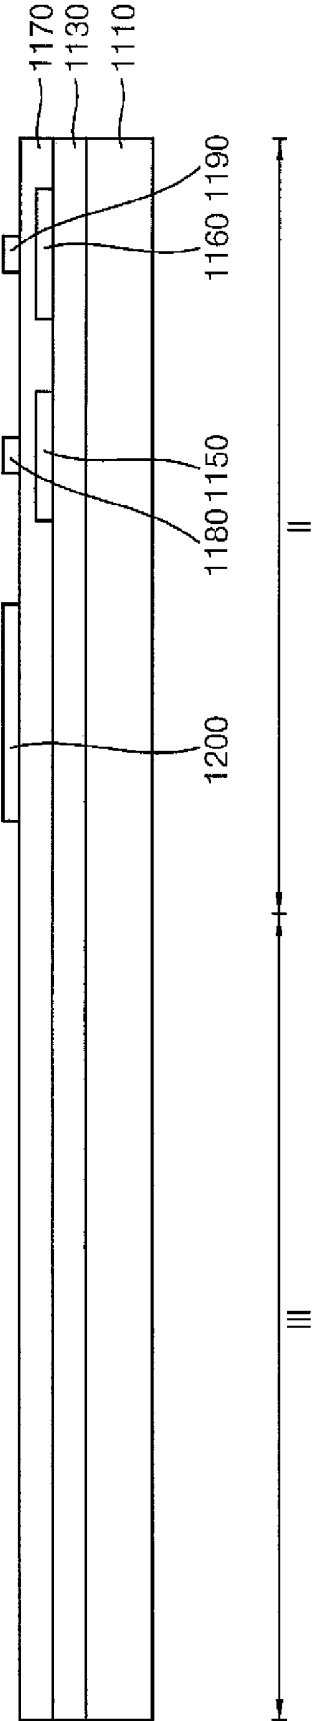


FIG. 17

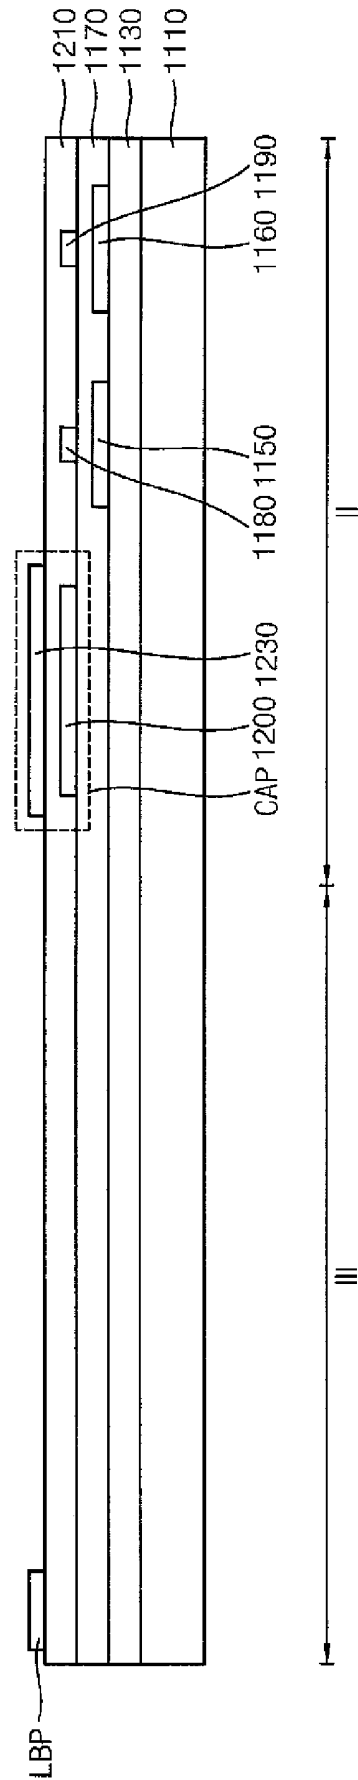


FIG. 18

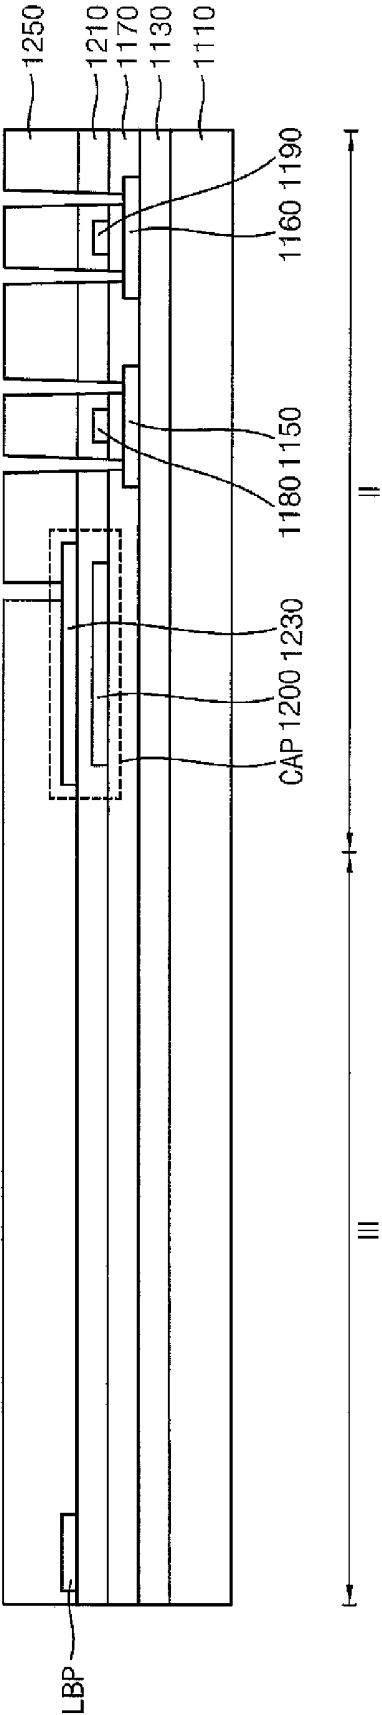


FIG. 19

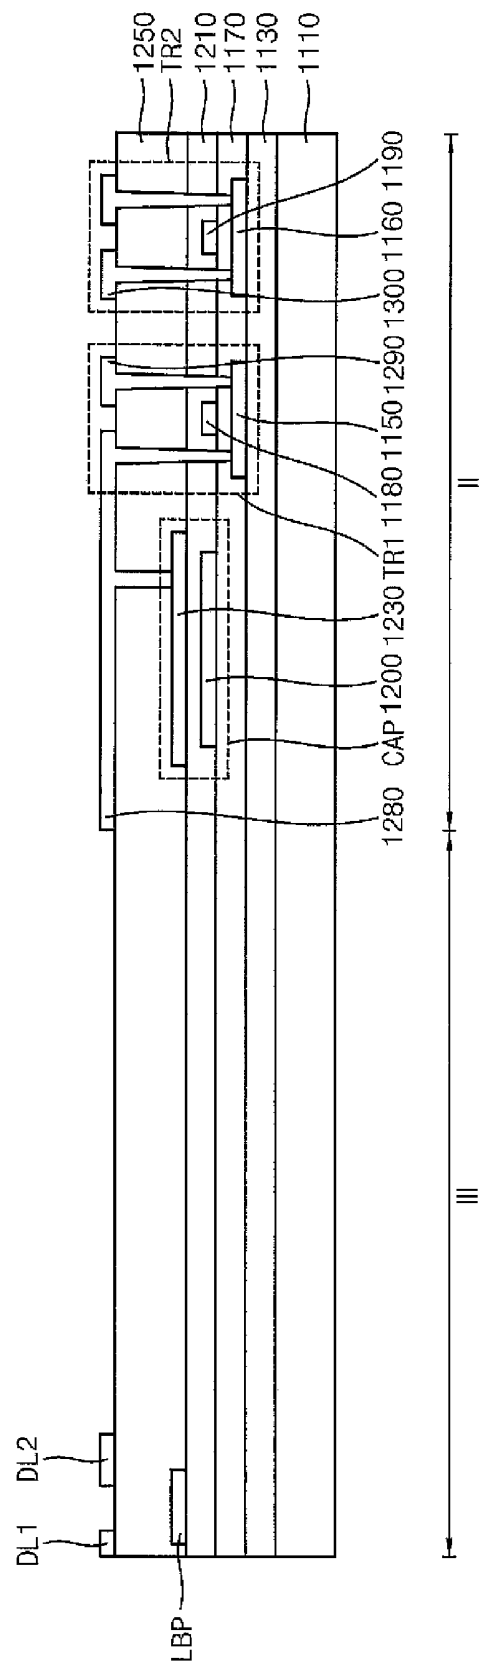


FIG. 21

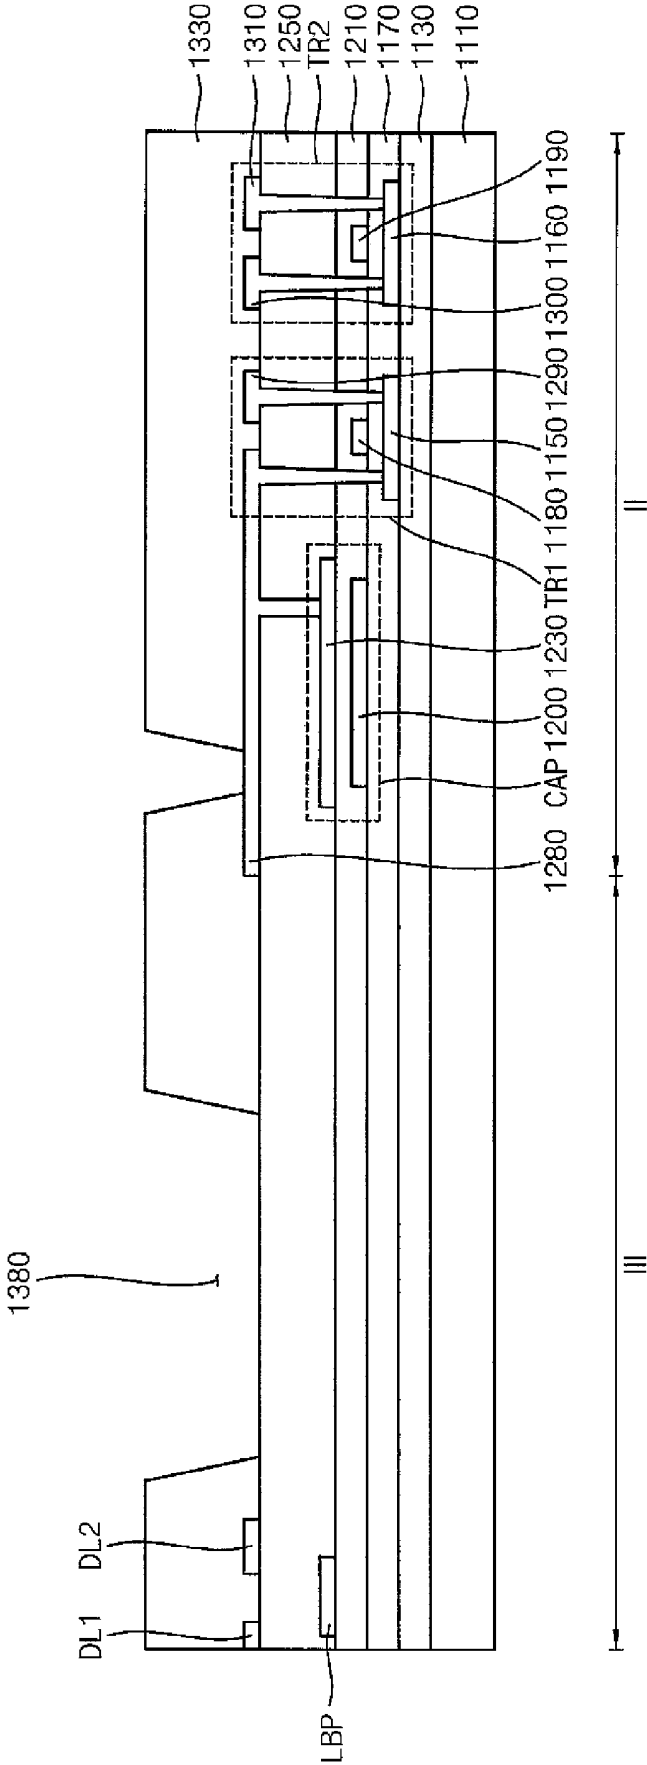


FIG. 22

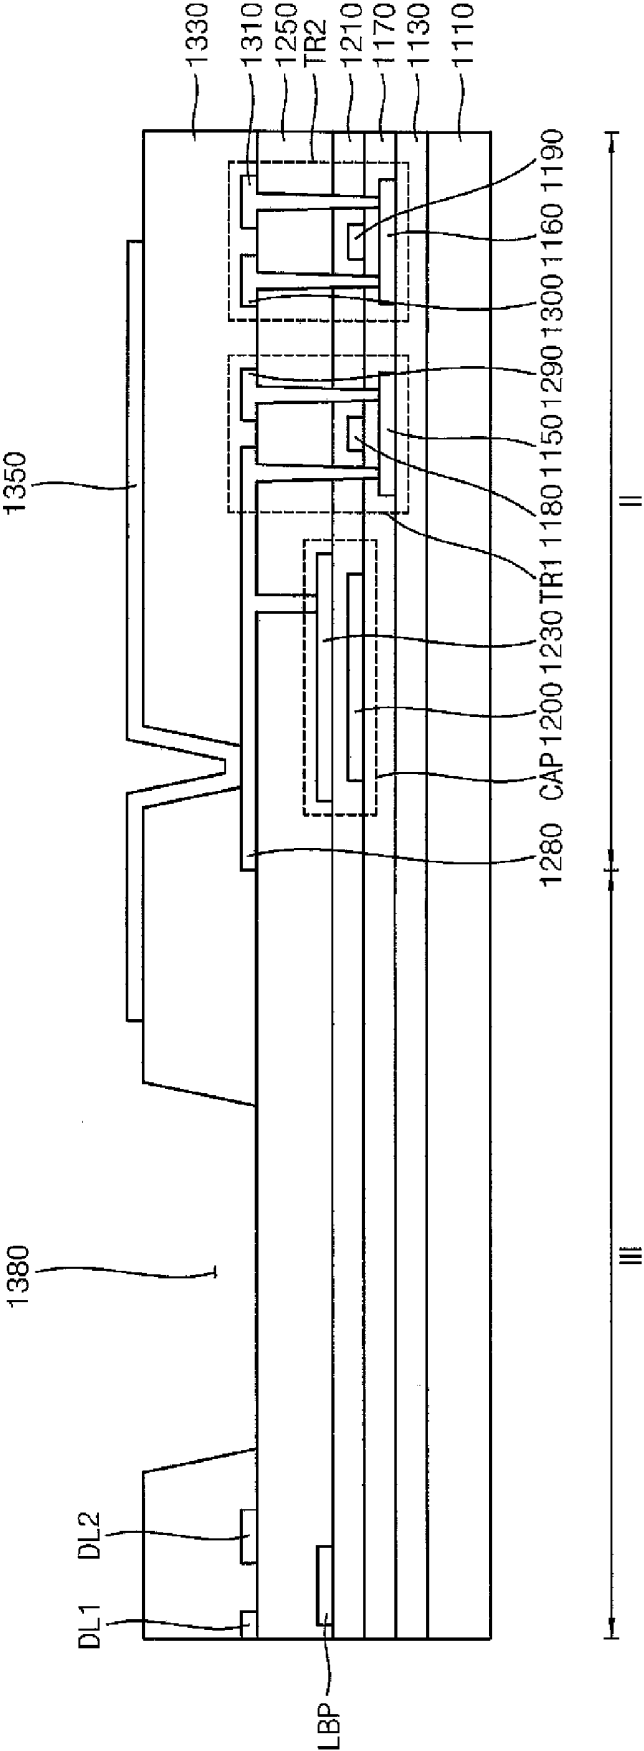


FIG. 23

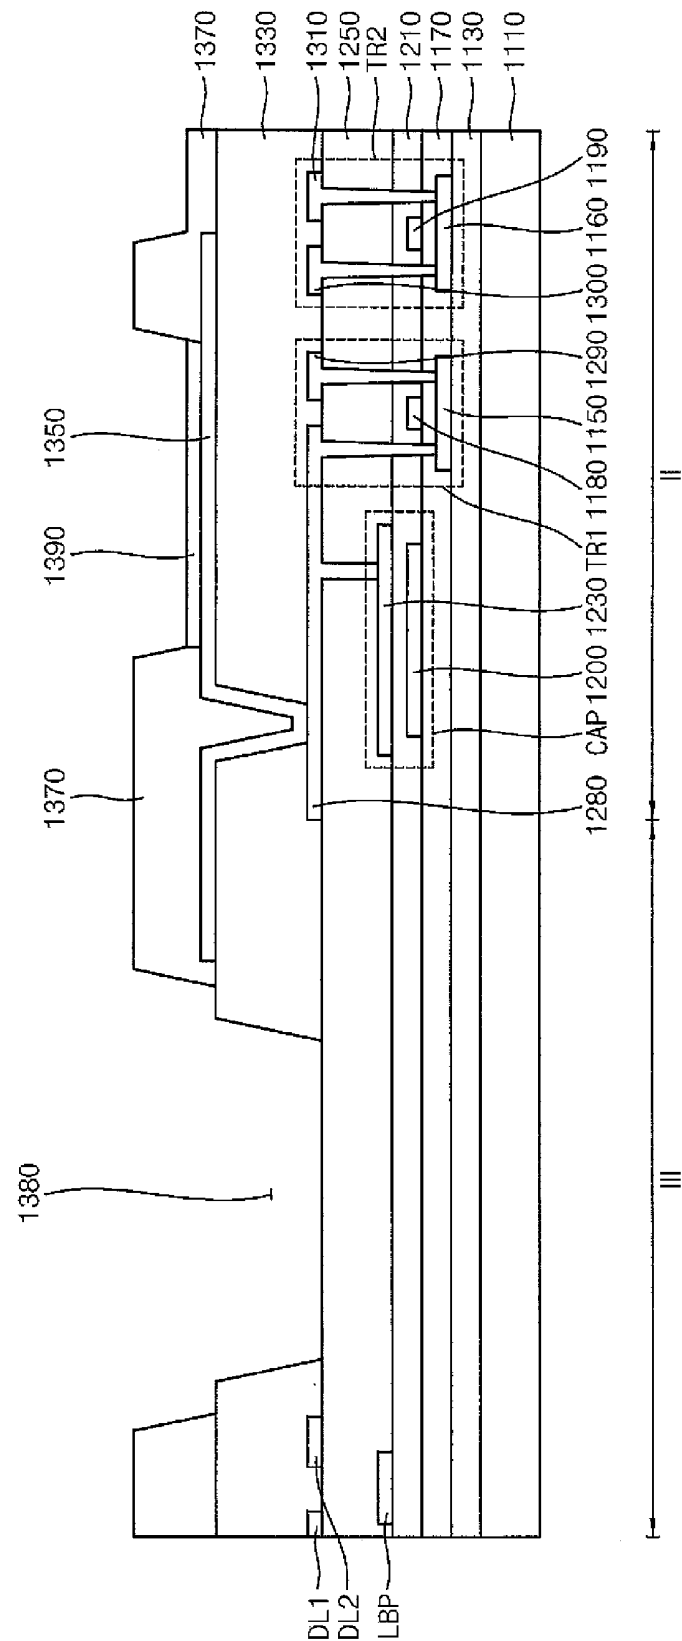


FIG. 24

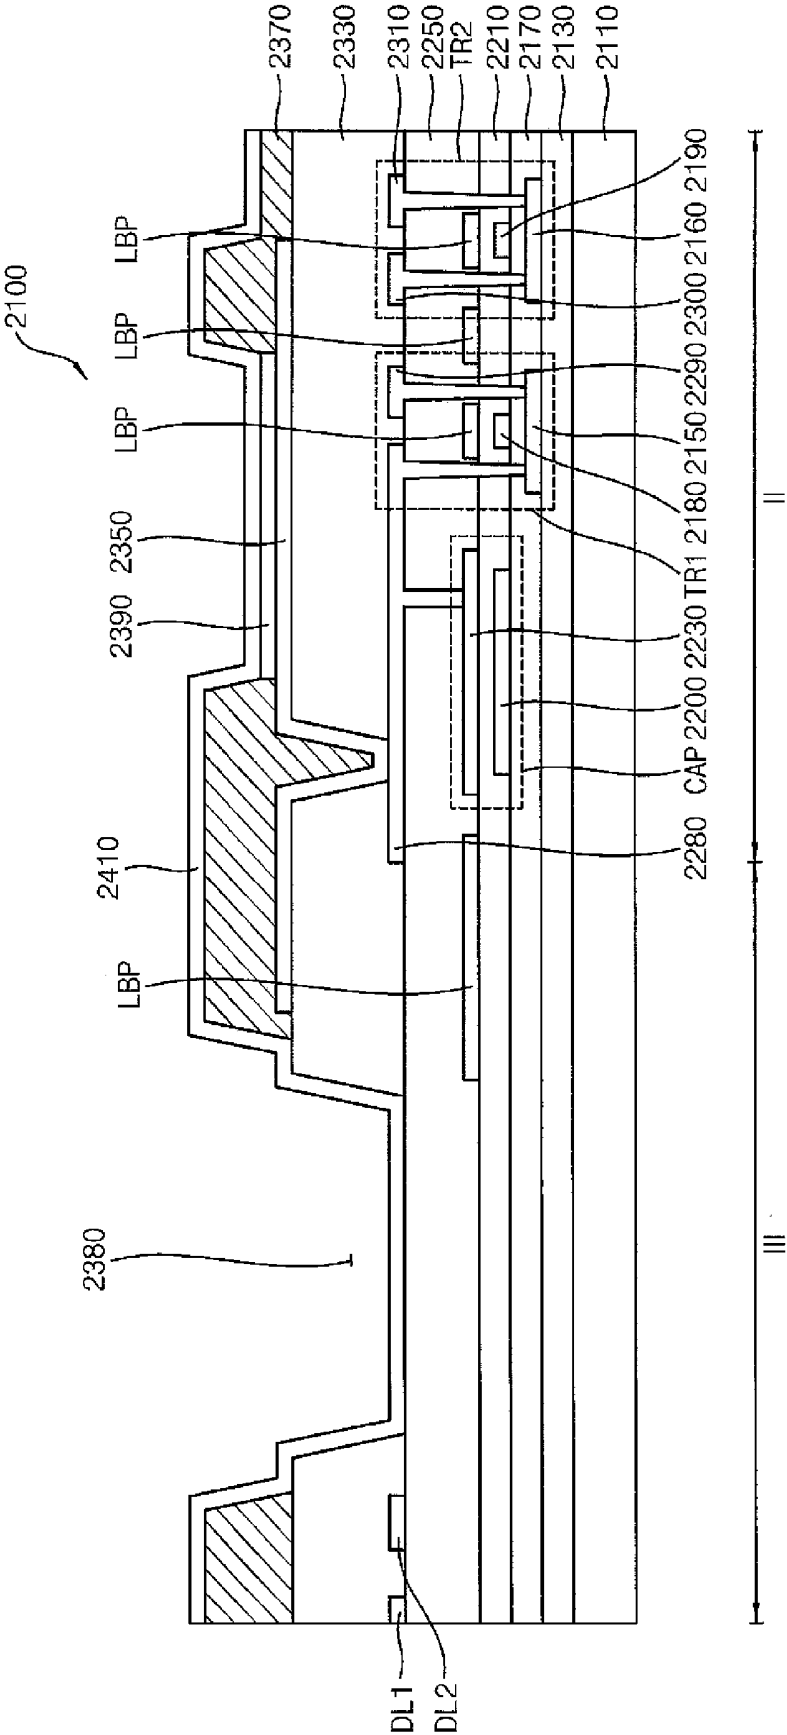


FIG. 25

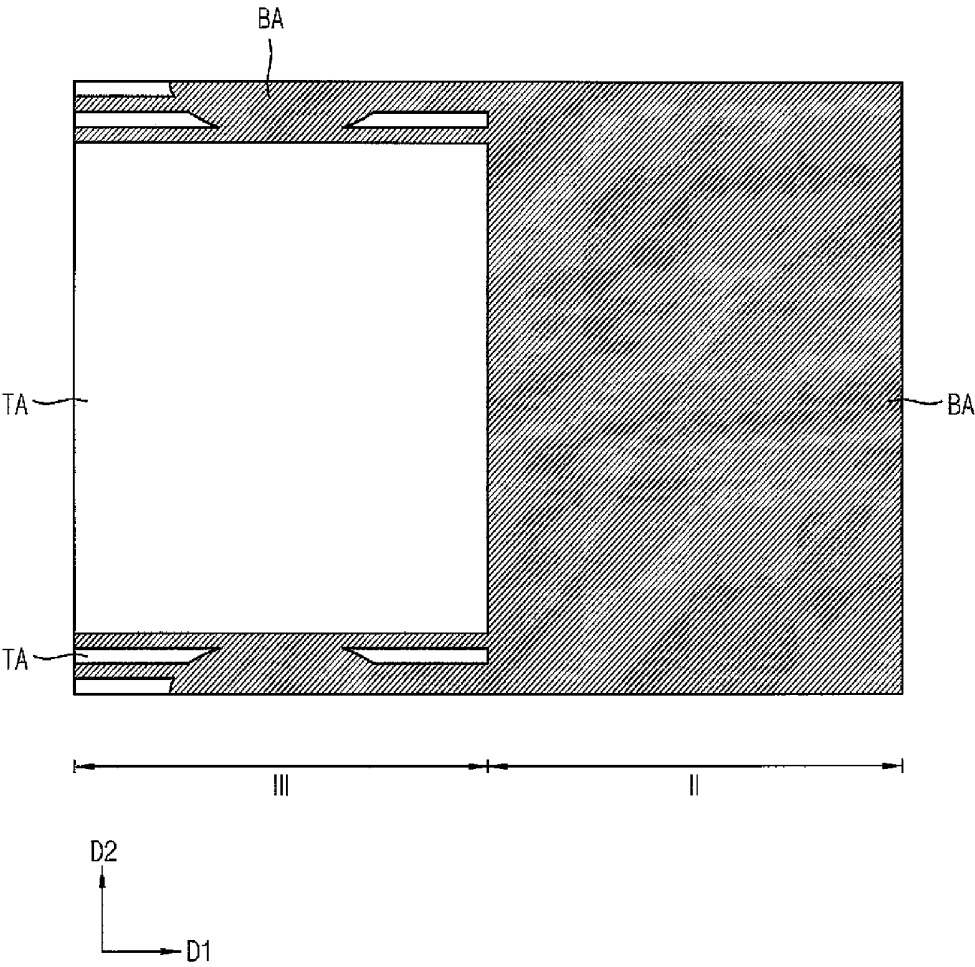


FIG. 26

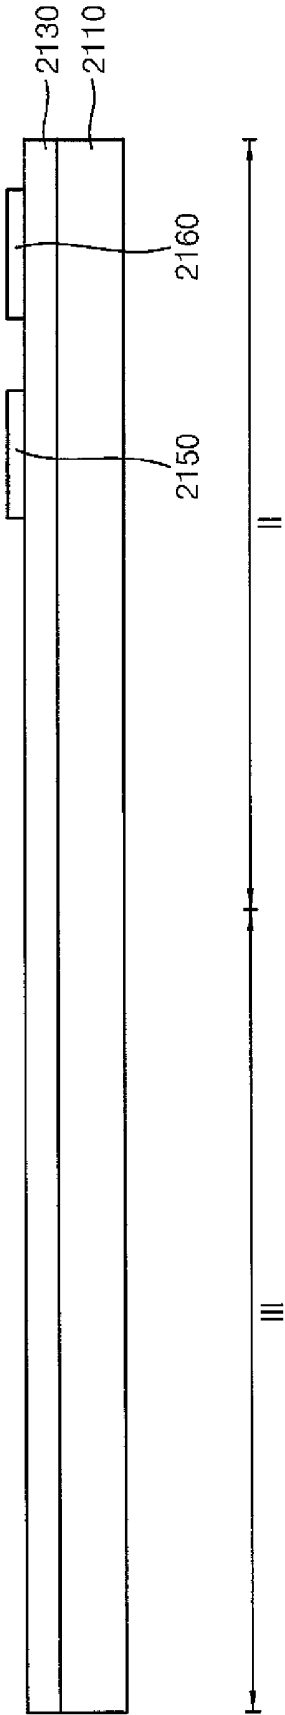


FIG. 27

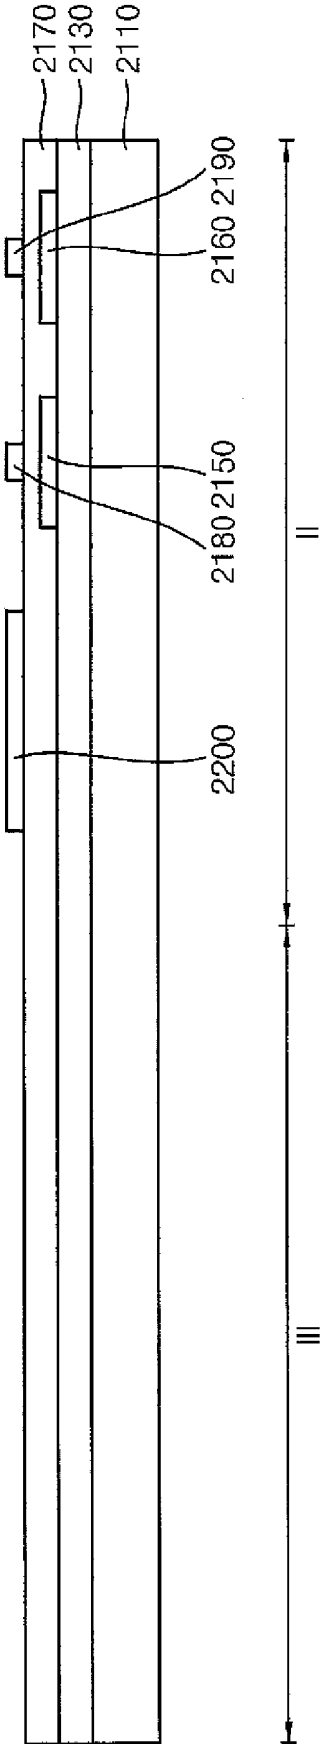


FIG. 28

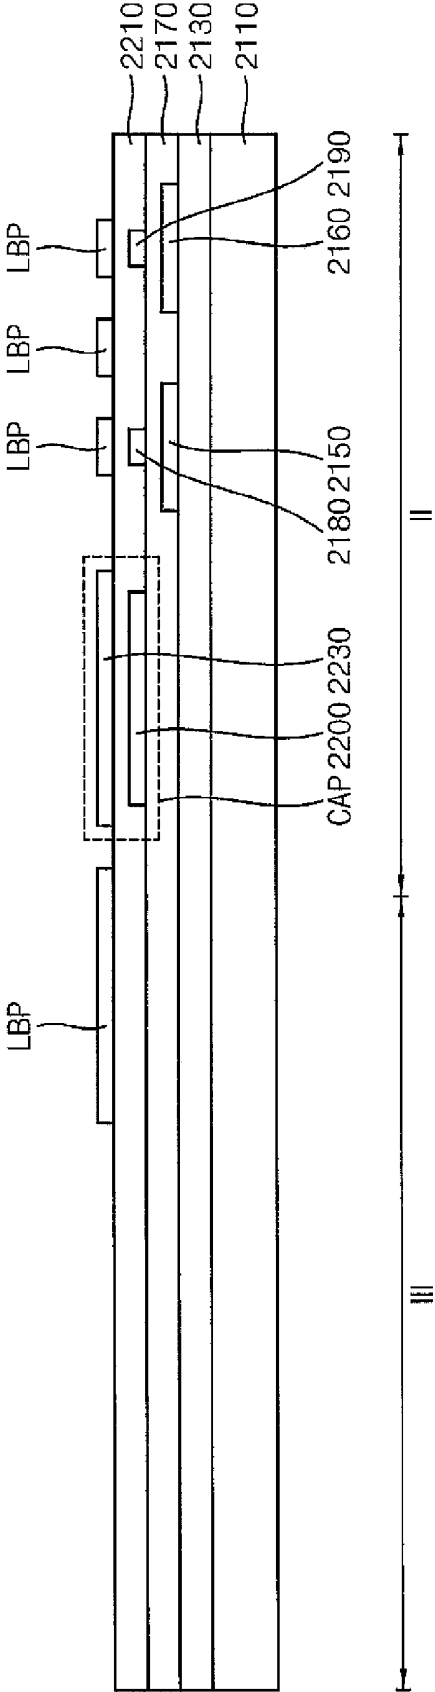


FIG. 29

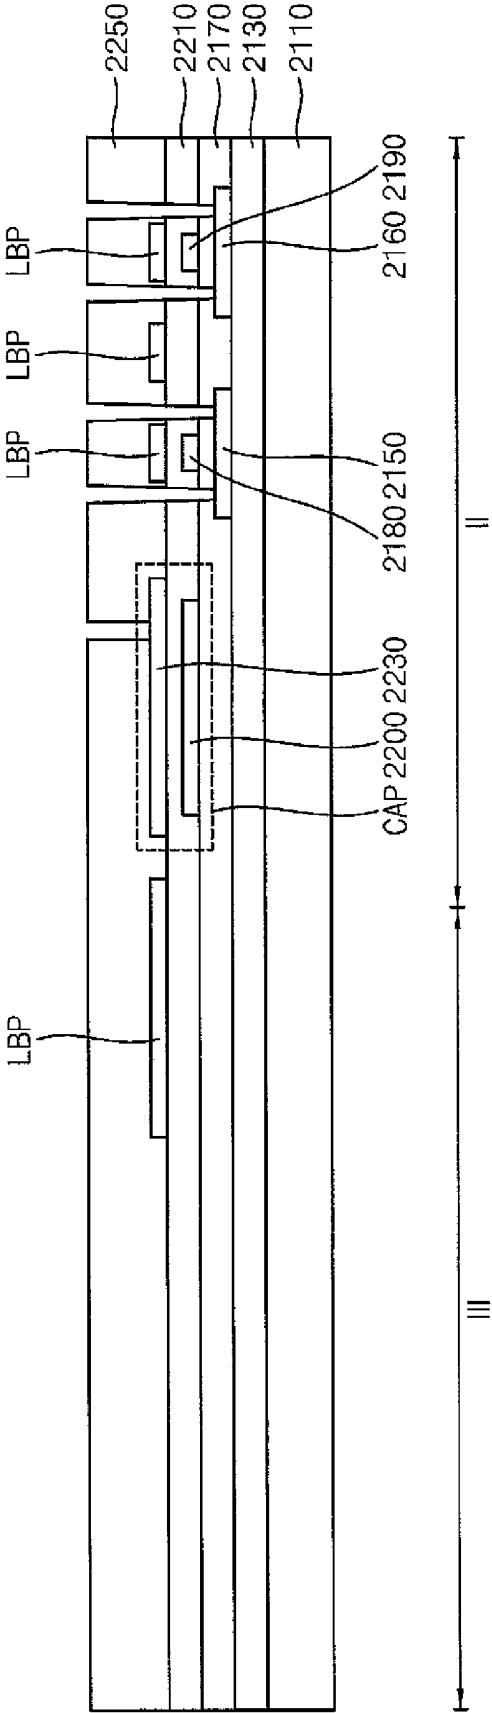


FIG. 30

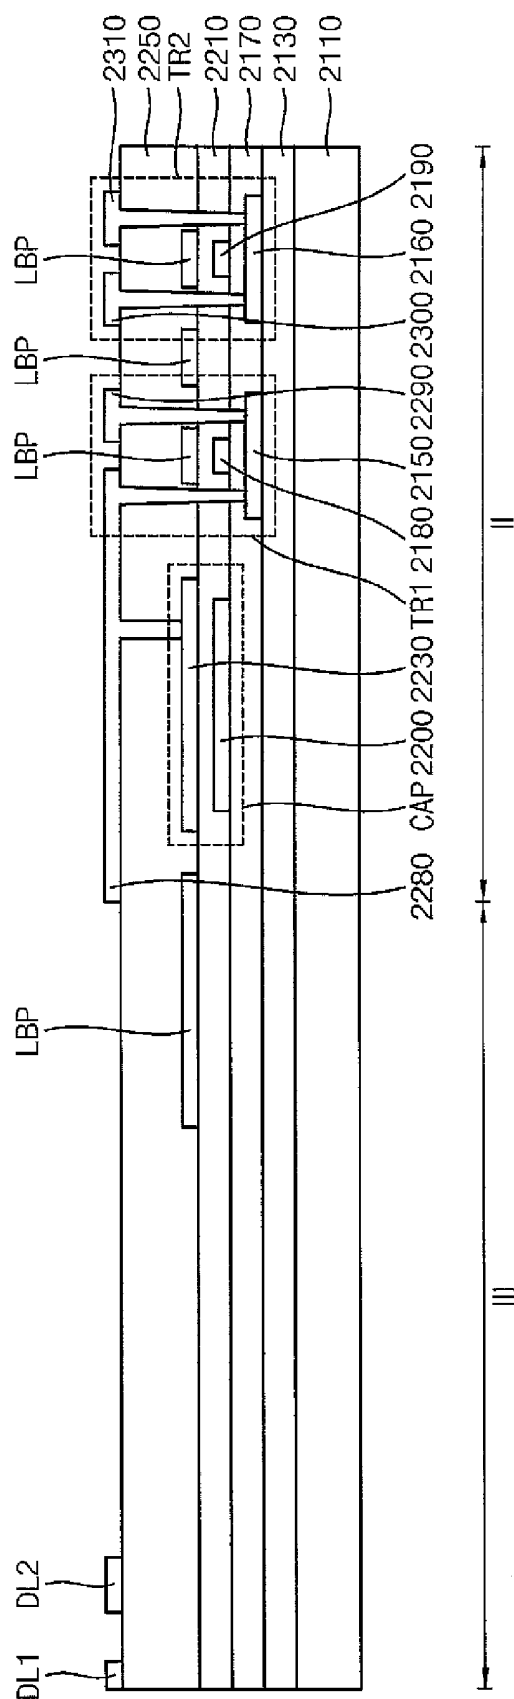


FIG. 31

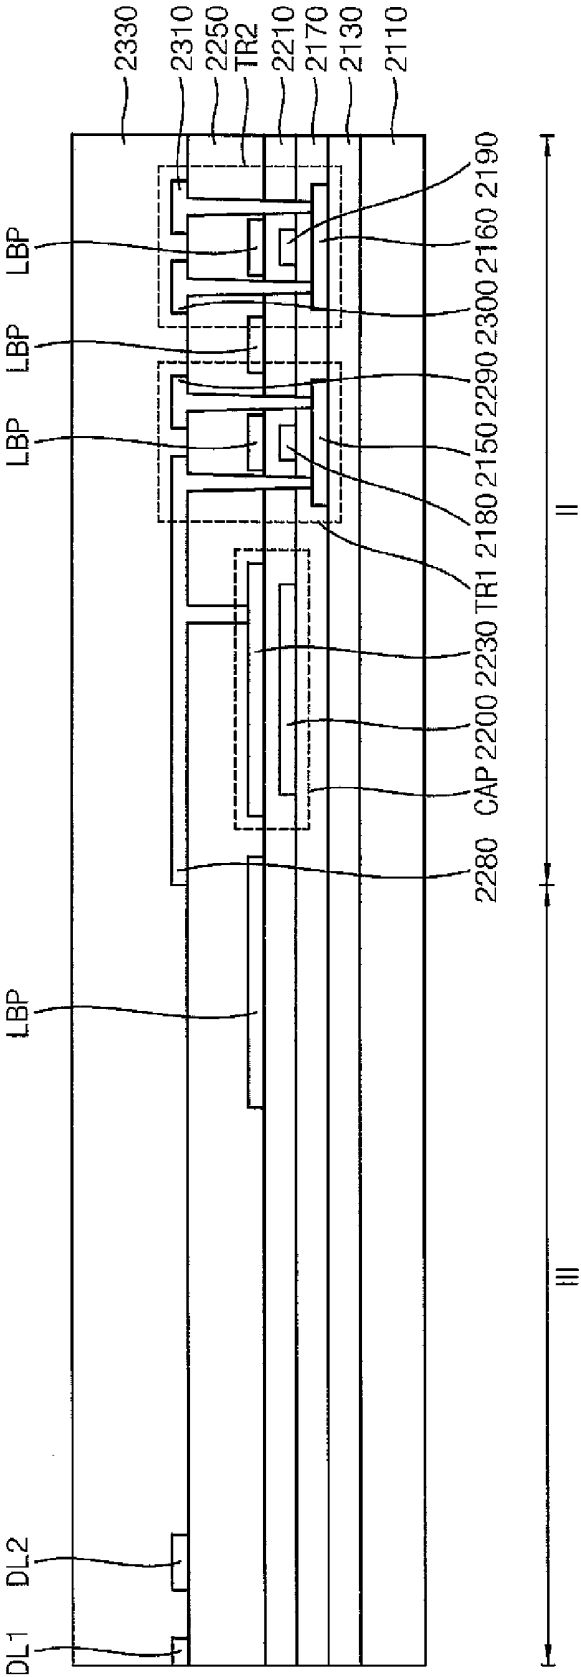


FIG. 33


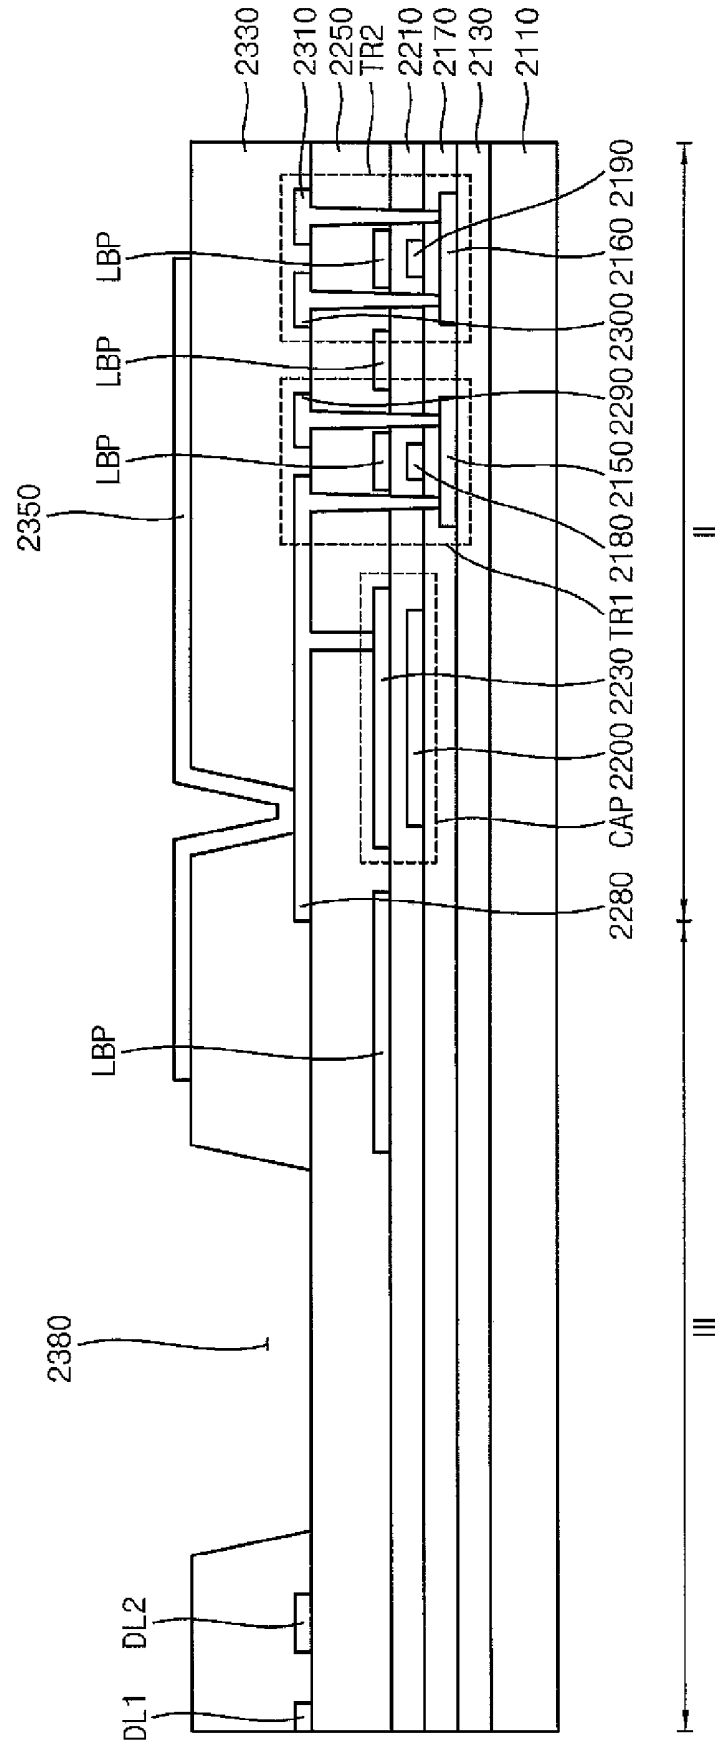


FIG. 34

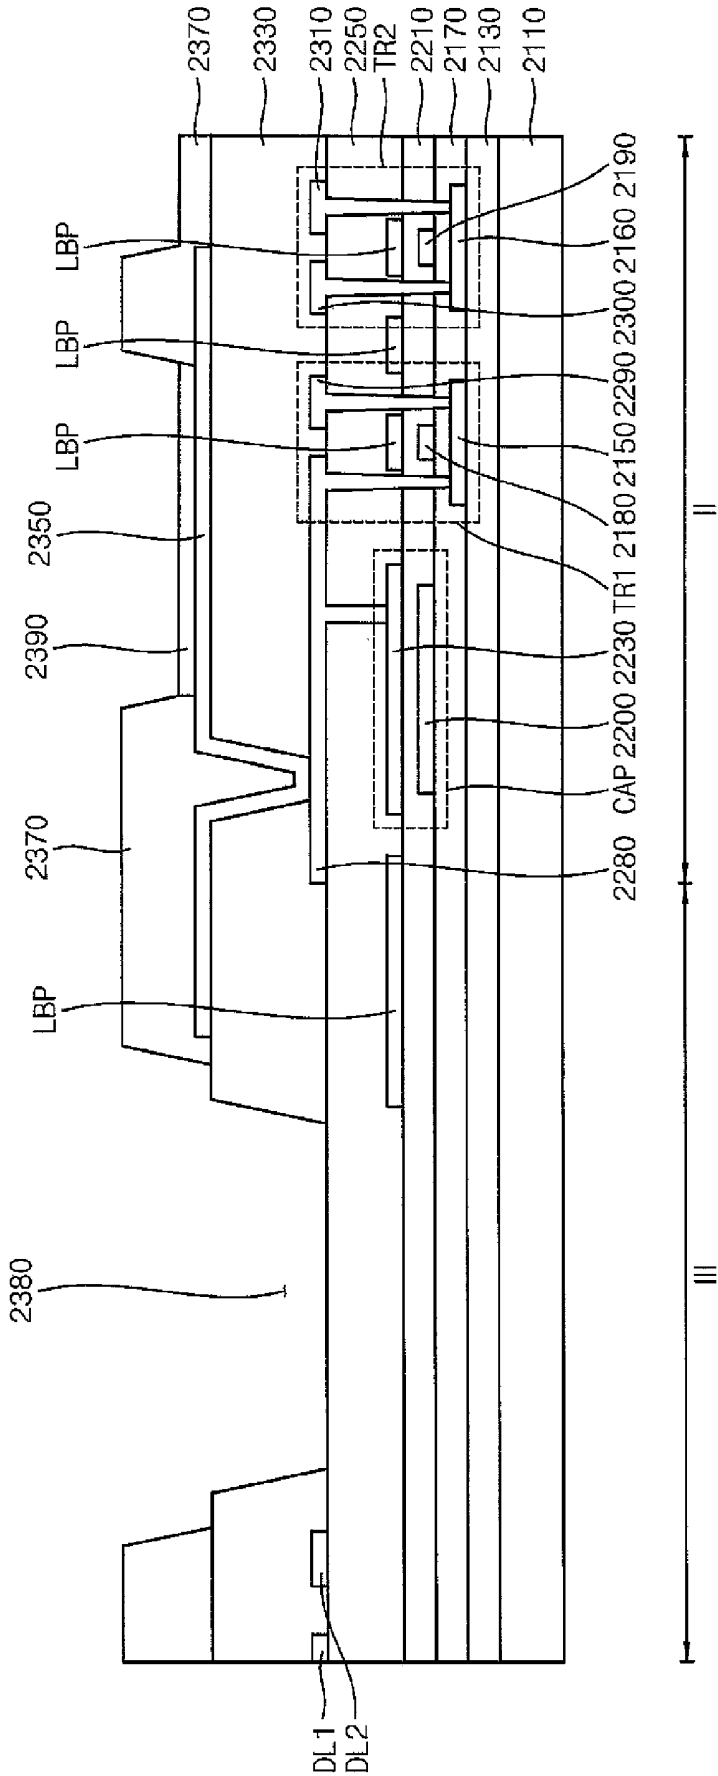

**ORGANIC LIGHT EMITTING DISPLAY
DEVICE AND METHOD OF
MANUFACTURING THE SAME**

[0001] This application claims priority to Korean Patent Application No. 10-2015-0026963, filed on Feb. 26, 2015, and all the benefits accruing therefrom under 35 U.S.C. §119, the content of which in its entirety is herein incorporated by reference.

BACKGROUND

[0002] 1. Field

[0003] Exemplary embodiments of the invention relate to an organic light emitting display (“OLED”) device and a method of manufacturing the OLED device. More particularly, exemplary embodiments relate to an OLED device capable of increasing visibility and a method of manufacturing the OLED device.

[0004] 2. Description of the Related Art

[0005] A flat panel display (“FPD”) device is widely used as a display device of an electronic device because the flat panel display device is lightweight and thin compared to a cathode-ray tube (“CRT”) display device. Typical examples of the flat panel display device are a liquid crystal display (“LCD”) device and an organic light emitting diode (“OLED”) display device. Compared to the LCD, the OLED has many advantages such as a higher luminance and a wider viewing angle. In addition, the OLED display device can be made thinner because the OLED display device does not require a backlight. In the OLED display device, electrons and holes are injected into an organic thin layer through a cathode and an anode, and then recombined in the organic thin layer to generate excitons, thereby a light of a certain wavelength can be emitted.

[0006] Recently, a transparent OLED device has been rapidly developed. The transparent OLED device may include a transparent region and an opaque region. In the transparent OLED device, an image of an object before or after a transparent region of the OLED device may be recognized when the OLED device is in an ON state. In an OFF state of the OLED device, an image may be displayed in a pixel region of the OLED device.

SUMMARY

[0007] In a conventional transparent organic light emitting display (“OLED”) device, since transistors and capacitors are positioned in an opaque region, light due to reflection by metal wirings may be incident to an opaque region. Therefore, blurring of images may be occurred.

[0008] Exemplary embodiments of the invention provide an OLED device capable of increasing visibility.

[0009] Exemplary embodiments of the invention further provide a method of manufacturing the OLED device.

[0010] In an exemplary embodiment of an OLED device according to the invention, the OLED device includes a substrate comprising a light-emitting region and a transparent region, a transistor disposed in the light-emitting region and including a gate electrode, a source electrode and a drain electrode overlapping the gate electrode, a capacitor disposed in the light-emitting region and disposed adjacent to the transistor and including a first capacitor electrode and a second capacitor electrode overlapping the first capacitor electrode, and a plurality of light-blocking patterns partially overlapping the gate electrode, the source electrode or the drain

electrode and disposed on a different layer as a layer the gate electrode, the source electrode or the drain electrode are disposed.

[0011] In an exemplary embodiment, the light-blocking patterns may be disposed on the same layer as the second capacitor electrode.

[0012] In an exemplary embodiment, the light-blocking patterns may be insulated from the second capacitor electrode.

[0013] In an exemplary embodiment, the light-blocking patterns may include the same material as the second capacitor electrode.

[0014] In an exemplary embodiment, the light-blocking patterns may be disposed in a region on which the gate electrode, the source electrode and the drain electrode are not disposed in a plan view.

[0015] In an exemplary embodiment, the light-blocking patterns may include opaque material.

[0016] In an exemplary embodiment, the light-blocking patterns may include a first light-blocking pattern disposed in the light-emitting region and a second light-blocking pattern extending in a first direction to be disposed in the light-emitting region and the transparent region, and overlapping a data line electrically connected with the source electrode.

[0017] In an exemplary embodiment, the OLED device may further include a first electrode disposed in the light-emitting region and electrically connected with the drain electrode, an emission layer disposed on the first electrode and a second electrode disposed on the emission layer, and disposed in the light-emitting region and the transparent region.

[0018] In an exemplary embodiment, the first electrode may include opaque material.

[0019] In an exemplary embodiment, a width of a first direction of the first electrode may be wider than a width of a first direction of the emission layer by more than about 5 micrometers (μ).

[0020] In an exemplary embodiment of a method of manufacturing an OLED device according to the invention, the method includes forming a gate electrode and a first capacitor electrode on a substrate comprising a light-emitting region and a transparent region and forming a source electrode, a drain electrode, a second capacitor electrode and a plurality of light-blocking patterns on the substrate on which the gate electrode and a first capacitor electrode are provided. The light-blocking patterns partially overlap the gate electrode, the source electrode or the drain electrode, and are disposed on a different layer as a layer the gate electrode, the source electrode or the drain electrode are disposed.

[0021] In an exemplary embodiment, the light-blocking patterns may be disposed on the same layer as the second capacitor electrode.

[0022] In an exemplary embodiment, the light-blocking patterns may be insulated from the second capacitor electrode.

[0023] In an exemplary embodiment, the light-blocking patterns may include the same material as the second capacitor electrode.

[0024] In an exemplary embodiment, the light-blocking patterns may be disposed in a region on which the gate electrode, the source electrode and the drain electrode are not disposed in a plan view.

[0025] In an exemplary embodiment, the light-blocking patterns may include opaque material.

[0026] In an exemplary embodiment, the light-blocking patterns may include a first light-blocking pattern disposed in the light-emitting region and a second light-blocking pattern extending in a first direction to be disposed in the light-emitting region and the transparent region, and overlapping a data line electrically connected with the source electrode.

[0027] In an exemplary embodiment, the method may further include forming a first electrode electrically connected with the drain electrode in the light-emitting region, forming an emission layer on the first electrode and forming second electrode disposed on the emission layer.

[0028] In an exemplary embodiment, the first electrode may include opaque material.

[0029] In an exemplary embodiment, a width of a first direction of the first electrode may be wider than a width of a first direction of the emission layer by more than about 5 μ .

[0030] According to the exemplary embodiment, the OLED device light-blocking patterns disposed on the tiny openings. Thus, light transmitted via the tiny openings may be blocked. Accordingly, visibility of a display device may be improved.

[0031] In addition, the first electrode includes opaque material, and thus the first electrode may block light not blocked by the light-blocking patterns. Accordingly, the first electrode additionally blocks light of the light-emitting region II, and thus visibility of a display device may be improved.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The above and other features and advantages of the invention will become more apparent by describing in detailed exemplary embodiments thereof with reference to the accompanying drawings, in which:

[0033] FIG. 1 is a plan view illustrating an exemplary embodiment of an organic light emitting display ("OLED") device according to the invention;

[0034] FIG. 2 is a cross-sectional view taken along line I-I' of FIG. 1;

[0035] FIG. 3 is a plan view illustrating an exemplary embodiment of light transmission of an OLED device according to the invention;

[0036] FIGS. 4 to 12 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 2;

[0037] FIG. 13 is a plan view illustrating an exemplary embodiment of an OLED device according to the invention;

[0038] FIG. 14 is a plan view illustrating an exemplary embodiment of light transmission of an OLED device according to the invention;

[0039] FIGS. 15 to 23 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 13;

[0040] FIG. 24 is a plan view illustrating an exemplary embodiment of an OLED device according to the invention;

[0041] FIG. 25 is a plan view illustrating an exemplary embodiment of light transmission of an OLED device according to the invention; and

[0042] FIGS. 26 to 34 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 24.

DETAILED DESCRIPTION

[0043] The invention now will be described more fully hereinafter with reference to the accompanying drawings, in which various embodiments are shown. This invention may, however, be embodied in many different forms, and should

not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like reference numerals refer to like elements throughout.

[0044] It will be understood that when an element is referred to as being "on" another element, it can be directly on the other element or intervening elements may be present therebetween. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0045] It will be understood that, although the terms "first," "second," "third" etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another element, component, region, layer or section. Thus, "a first element," "component," "region," "layer" or "section" discussed below could be termed a second element, component, region, layer or section without departing from the teachings herein.

[0046] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms, including "at least one," unless the content clearly indicates otherwise. "Or" means "and/or." As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. It will be further understood that the terms "comprises" and/or "comprising," or "includes" and/or "including" when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

[0047] Furthermore, relative terms, such as "lower" or "bottom" and "upper" or "top," may be used herein to describe one element's relationship to another element as illustrated in the Figures. It will be understood that relative terms are intended to encompass different orientations of the device in addition to the orientation depicted in the Figures. For example, if the device in one of the figures is turned over, elements described as being on the "lower" side of other elements would then be oriented on "upper" sides of the other elements. The exemplary term "lower," can therefore, encompass both an orientation of "lower" and "upper," depending on the particular orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as "below" or "beneath" other elements would then be oriented "above" the other elements. The exemplary terms "below" or "beneath" can, therefore, encompass both an orientation of above and below.

[0048] "About" or "approximately" as used herein is inclusive of the stated value and means within an acceptable range of deviation for the particular value as determined by one of ordinary skill in the art, considering the measurement in question and the error associated with measurement of the particular quantity (i.e., the limitations of the measurement system). For example, "about" can mean within one or more standard deviations, or within $\pm 30\%$, 20%, 10%, 5% of the stated value.

[0049] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and the present disclosure, and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0050] Exemplary embodiments are described herein with reference to cross section illustrations that are schematic illustrations of idealized embodiments. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments described herein should not be construed as limited to the particular shapes of regions as illustrated herein but are to include deviations in shapes that result, for example, from manufacturing. For example, a region illustrated or described as flat may, typically, have rough and/or nonlinear features. Moreover, sharp angles that are illustrated may be rounded. Thus, the regions illustrated in the figures are schematic in nature and their shapes are not intended to illustrate the precise shape of a region and are not intended to limit the scope of the present claims.

[0051] Hereinafter, the invention will be explained in detail with reference to the accompanying drawings.

[0052] FIG. 1 is a plan view illustrating an organic light emitting display ("OLED") device according to an exemplary embodiment of the invention. FIG. 2 is a cross-sectional view taken along line I-I' of FIG. 1. FIG. 3 is a plan view illustrating light transmission of an OLED device according to an exemplary embodiment of the invention.

[0053] Referring to FIGS. 1 and 2, an OLED device according to an exemplary embodiment of the invention may include a light-emitting region II and a transparent region III. Pixels 60, 70, and 80 may be positioned in the light-emitting region II, and a transparent window 90 may be positioned in the transparent region III. In an exemplary embodiment, the pixel 60 may be a pixel emitting a red color, the pixel 70 may be a pixel emitting a green color, and the pixel 80 may be a pixel emitting a blue color, for example. The transparent window 90 may transmit an external light. Here, wires or lines (e.g., data lines, scan lines, power supply electrodes, etc.) and insulating layers (e.g., a pixel defining layer, via layer, etc.) may be disposed in an area (e.g., a dead space) surrounding the pixels 60, 70, and 80 and the transparent window 90.

[0054] The OLED device 100 may include a substrate 110, a driving transistor TR1, a switching transistor TR2, a storage capacitor CAP, a power supply electrode 280, a buffer layer 130, an insulating interlayer 170, a gate insulating layer 210, a first insulating layer 250, a second insulating layer 330, a first electrode 350, a pixel defining layer 370, a transparent window 380, an emission layer 390, a second electrode 410, etc. In exemplary embodiments, the OLED device 100 may include a light-emitting region II and a transparent region III. The driving transistor TR1, the switching transistor TR2, the storage capacitor CAP, the power supply electrode 280, the second insulating layer 330, the first electrode 350, the emission layer 390 may be positioned in the light-emitting region II. In an exemplary embodiment, the transparent window 380 may be positioned in the transparent region III. In an exemplary embodiment, an image may be displayed in the light-

emitting region II, and objects or images located opposite to the OLED device 100 may be transmitted in the transparent region III, for example.

[0055] In an exemplary embodiment, the substrate 110 may include a transparent inorganic material or flexible plastic, for example. In an exemplary embodiment, the substrate 110 may include a glass substrate, a quartz substrate, etc., for example. In an alternative exemplary embodiment, the substrate 110 may include a flexible transparent resin substrate, for example. In an exemplary embodiment, the flexible transparent resin substrate for the substrate 110 may include a polyimide substrate, for example. In an exemplary embodiment, the polyimide substrate may include a first polyimide layer, a barrier film layer, a second polyimide layer, etc., for example.

[0056] In exemplary embodiments, the substrate 110 may have a structure in which the first polyimide layer, the barrier film layer and the second polyimide layer are stacked on a glass substrate, for example. In an exemplary embodiment, after an insulation layer is provided on the second polyimide layer, upper structures including a light emitting structure (e.g., the driving transistor TR1, the switching transistor TR2, the storage capacitor CAP, the power supply electrode 280, the first electrode 350, the emission layer 390, the second electrode 410, etc.) may be disposed on the insulation layer. After the upper structures are disposed on the insulation layer, the glass substrate may be removed. It may be difficult that the upper structures are directly disposed on the polyimide substrate because the polyimide substrate is thin and flexible. Accordingly, the upper structures are disposed on a rigid glass substrate, and then the polyimide substrate may be used as the substrate 110 after a removal of the glass substrate. As the OLED device 100 may include the light-emitting region II and the transparent region III, the substrate 110 may also include the light-emitting region II and the transparent region III.

[0057] The buffer layer 130 may be disposed on the substrate 110. As illustrated in FIG. 2, the buffer layer 130 may extend from the light-emitting region II into the transparent region III. In an exemplary embodiment, the buffer layer 130 may prevent the diffusion (e.g., an out gassing) of metal atoms and/or impurities from the substrate 110. In an exemplary embodiment, the buffer layer 130 may control a rate of a heat transfer in a crystallization process for forming a first active pattern 150 and a second active pattern 160, thereby obtaining substantially uniform the first and the second active patterns 150 and 160.

[0058] Furthermore, the buffer layer 130 may improve a surface flatness of the substrate 110 when a surface of the substrate 110 is relatively irregular. In an exemplary embodiment, the buffer layer 130 may include silicon nitride, silicon oxide, etc., for example. In exemplary embodiments, only one buffer layer or no buffer layer may be provided on the substrate 110 in accordance with the type of the substrate 110. When the buffer layer 130 includes the silicon oxide, an external light penetrated to the transparent region III of the OLED device 100 may transmit the buffer layer 130.

[0059] In exemplary embodiments, according to a type of the substrate 110, at least two buffer layers may be provided on the substrate 110, or the buffer layer may not be disposed.

[0060] The driving transistor TR1 may be disposed on the buffer layer 130. In exemplary embodiments, the driving transistor TR1 may include a first active pattern 150, the insulating interlayer 170, a first gate electrode 180, the gate

insulating layer **210**, the first insulating layer **250**, a first source electrode, a first drain electrode **290**, etc. Here, the first source electrode may be connected to the power supply electrode **280**, and a high power supply voltage may be applied to the first source electrode. In an exemplary embodiment, the OLED device **100** may include the power supply electrode **280** (e.g., a high power supply electrode) and a low power supply electrode (not shown). The high power supply voltage may be provided to the power supply electrode **280**, and the low power supply voltage may be provided to the low power supply electrode.

[0061] The switching transistor TR2 may be disposed on the buffer layer **130**. In exemplary embodiments, the switching transistor TR2 may include a second active pattern **160**, the insulating interlayer **170**, a second gate electrode **190**, the gate insulating layer **210**, the first insulating layer **250**, a second source electrode **300**, a second drain electrode **310**, etc.

[0062] The storage capacitor CAP may be disposed on the insulating interlayer **170**. In exemplary embodiments, the storage capacitor CAP may include a first capacitor electrode **200**, the gate insulating layer **210**, a second capacitor electrode **230**, etc. Here, the second capacitor electrode **230** may be connected to the power supply electrode **280**, and the high power supply voltage may be applied to the second capacitor electrode **230**.

[0063] In exemplary embodiments, the driving transistor TR1 and the switching transistor TR2 may be positioned in the light-emitting region II. In the driving transistor TR1 and the switching transistor TR2, the first and second active patterns **150** and **160** may be disposed spacing apart from each other by a predetermined distance in the light-emitting region II on the buffer layer **130**. In an exemplary embodiment, each of the first and second active patterns **150** and **160** may be a semiconductor device which may include an active layer including oxide semiconductor, inorganic semiconductor (e.g., amorphous silicon, polysilicon, etc.), organic semiconductor, etc., for example. The insulating interlayer **170** may be disposed on the buffer layer **130**. The insulating interlayer **170** may cover the first and second active patterns **150** and **160**, and may extend into the transparent region III. In an exemplary embodiment, the insulating interlayer **170** may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the insulating interlayer **170** may include a silicon oxide. In an exemplary embodiment, the insulating interlayer **170** may include a material substantially the same as that of the buffer layer **130**. In this case, as the insulating interlayer **170** and the buffer layer **130** may be provided as the same material in the transparent region III, the insulating interlayer **170** and the buffer layer **130** may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0064] The first gate electrode **180** may be disposed on the insulating interlayer **170** under which the first active pattern **150** is positioned. The second gate electrode **190** may be disposed on the insulating interlayer **170** under which the second active pattern **160** is positioned. In an exemplary embodiment, each of the first gate electrode **180** and the second gate electrode **190** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example.

[0065] The first capacitor electrode **200** may be disposed on the insulating interlayer **170**. The first capacitor electrode **200** may be spaced apart from the first gate electrode **180** by

predetermined distances. In an exemplary embodiment, the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190** may include substantially the same material. In another exemplary embodiment, each of the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190** may include different materials.

[0066] The gate insulating layer **210** may be disposed on the insulating interlayer **170**, the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190**. The gate insulating layer **210** may cover the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190**, and may extend into the transparent region III. In an exemplary embodiment, the gate insulating layer **210** may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the gate insulating layer **210** may include a silicon oxide, for example. In an exemplary embodiment, the gate insulating layer **210** may include a material substantially the same as that of the buffer layer **130** and the insulating interlayer **170**. In this case, as the gate insulating layer **210**, the insulating interlayer **170** and the buffer layer **130** may be provided as the same material in the transparent region III, the gate insulating layer **210**, the insulating interlayer **170** and the buffer layer **130** may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0067] The second capacitor electrode **230** may be disposed on the gate insulating layer **210** under which the first capacitor electrode **200** is positioned. In an exemplary embodiment, the second capacitor electrode **230** may include a material substantially the same that of the first gate electrode **180**, the second gate electrode **190**, and the first capacitor electrode **200**. In another exemplary embodiment, each of the second capacitor electrode **230**, the first gate electrode **180**, the second gate electrode **190**, and the first capacitor electrode **200** may include different materials.

[0068] A light-blocking pattern may be disposed on the gate insulating layer **210**. The light-blocking pattern may include a first light-blocking pattern LBP1 and a second light-blocking pattern LBP2. The light-blocking pattern may be disposed on the same layer as the second capacitor electrode **230**. The light-blocking pattern is insulated from the second capacitor electrode **230**. The light-blocking pattern may include the same material as the second capacitor electrode **230**.

[0069] The first light-blocking pattern LBP1 is disposed in the light-emitting region II. The second light-blocking pattern LBP2 extends in a first direction D1. The second light-blocking pattern LBP2 is disposed in the light-emitting region II and the transparent region III. The second light-blocking pattern LBP2 overlaps data lines DL1 and DL2 electrically connected with a source electrode.

[0070] The light-blocking pattern partially overlaps the first gate electrode **180**, the second gate electrode **190**, the first source electrode, the second source electrode **300**, the first drain electrode **290** and the second drain electrode **310**. The light-blocking pattern may be disposed in a region on which the first gate electrode **180**, the second gate electrode **190**, the first source electrode, the second source electrode **300**, the first drain electrode **290** and the second drain electrode **310** are not disposed in a plan view. That is, the light-blocking pattern is disposed in a region on which a gate metal pattern

including a gate electrode and a data metal pattern including a source electrode, a drain electrode and a data line are not disposed in a plan view.

[0071] Referring to FIGS. 2 and 3, state of light transmission of an OLED device according to an exemplary embodiment of the invention is illustrated.

[0072] The first light-blocking pattern LBP1 is disposed in the light-emitting region II. The second light-blocking pattern LBP2 is disposed in the light-emitting region II and the transparent region III. Thus, the light-blocking patterns may form a light-blocking region BA in the light-emitting region II and a portion of the transparent region III. A region on which the light-blocking patterns are not disposed may be defined as a light-transmission region TA.

[0073] The gate metal pattern and the data metal pattern are not overlapped each other completely. Thus, tiny openings may be defined in a plan view. Accordingly, visibility of a display device may be decreased due to diffraction of light via the tiny openings.

[0074] However, an OLED device according to the invention includes light-blocking patterns disposed on the tiny openings. Thus, light transmitted via the tiny openings may be blocked. Accordingly, visibility of a display device may be improved.

[0075] The first insulating layer 250 may be disposed on the gate insulating layer 210 and the second capacitor electrode 230. The first insulating layer 250 may cover the second capacitor electrode 230, and may extend into the transparent region III. In an exemplary embodiment, the first insulating layer 250 may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the first insulating layer 250 may include a silicon oxide. In an exemplary embodiment, the first insulating layer 250 may include materials substantially the same as that of the gate insulating layer 210, the buffer layer 130 and the insulating interlayer 170. In this case, as the first insulating layer 250, the gate insulating layer 210, the insulating interlayer 170 and the buffer layer 130 may be provided as the same material in the transparent region III, the first insulating layer 250, the gate insulating layer 210, the insulating interlayer 170 and the buffer layer 130 may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III. Accordingly, a definition of objects or images located opposite to the OLED device 100 may be increased. In addition, a thickness of the first insulating layer 250 taken along a direction perpendicular to a direction along which the substrate 110 extends in a cross section may be substantially greater than that of the gate insulating layer 210. In exemplary embodiments, as a thickness of the first insulating layer 250 is relatively increased, a coupling phenomenon that is generated between the power supply electrode 280 and the second capacitor electrode 230 may be reduced.

[0076] The power supply electrode 280, the first source electrode of the driving transistor TR1, the first drain electrode 290 of the driving transistor TR1, the second source electrode 300 of the switching transistor TR2, the second drain electrode 310 of the switching transistor TR2, a portion of the second insulating layer 330, and a portion of the first electrode 350 may be disposed in the light-emitting region II of the first insulating layer 250. A portion of the pixel defining layer 370 and a portion of the second electrode 410 may be disposed on the transparent region III of the first insulating layer 250.

[0077] The first source electrode and the first drain electrode 290 may be contacted to the first active pattern 150 by removing portions of the first insulating layer 250, the gate insulating layer 210, and the insulating interlayer 170. In an exemplary embodiment, each of the first source electrode and the first drain electrode 290 may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. These may be used alone or in a combination thereof.

[0078] The second source electrode 300 and the second drain electrode 310 may be contacted to the second active pattern 160 by removing portions of the first insulating layer 250, the gate insulating layer 210, and the insulating interlayer 170. Each of the second source electrode 300 and the second drain electrode 310 may include materials substantially the same as that of the first source electrode and the first drain electrode 290.

[0079] The power supply electrode 280 may be electrically contacted to the second capacitor electrode 230 by removing a portion of the first insulating layer 250, and may be electrically contacted to the first active pattern 150 by removing a portion of the first insulating layer 250, the gate insulating layer 210, and the insulating interlayer 170. The high power supply voltage applied to the power supply electrode 280 may be provided to the second capacitor electrode 230 and the first active pattern 150. In an exemplary embodiment, the power supply electrode 280 may include materials substantially the same as that of the first drain electrode 290, the second source electrode 300, and the second drain electrode 310.

[0080] The second insulating layer 330 may cover the first source electrode, the first drain electrode 290, the second source electrode 300, and the second drain electrode 310. The second insulating layer 330 may be disposed such that the second insulating layer 330 overlaps a portion of the power supply electrode 280. That is, at least a portion of the power supply electrode 280 may be exposed by the second insulating layer 330 disposed thereon. The second insulating layer 330 may include an inorganic material. In an exemplary embodiment, the second insulating layer 330 may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer 330 may include an organic material. In an exemplary embodiment, the second insulating layer 330 may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0081] The first electrode 350 may be disposed on a portion of the power supply electrode 280 and a portion of the second insulating layer 330 in the light-emitting region II. In exemplary embodiments, the first electrode 350 may be disposed as a substantially uniform thickness along upper surfaces of the power supply electrode 280 and the second insulating layer 330.

[0082] In an exemplary embodiment, the first electrode 350 may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. In an exemplary embodiment, the first electrode 350 may include aluminum (Al), aluminum alloy, aluminum nitride (AlNx), silver (Ag), silver alloy, tungsten (W), tungsten nitride (WNx), copper (Cu), copper alloy, nickel (Ni), chrome (Cr), chrome nitride (CrNx), molybdenum (Mo), molybde-

num alloy, titanium (Ti), titanium nitride (TiN_x), platinum (Pt), tantalum (Ta), tantalum nitride (TaN_x), neodymium (Nd), scandium (Sc), strontium ruthenium oxide (SRO), zinc oxide (ZnO_x), indium tin oxide ("ITO"), stannum oxide (SnO_x), indium oxide (InO_x), gallium oxide (GaO_x), indium zinc oxide ("IZO"), etc., for example. These may be used alone or in a combination thereof.

[0083] In the exemplary embodiment, the first electrode 350 may include opaque material. A width of the first electrode 350 along a first direction D1 is wider than a width of the emission layer 390 along the first direction D1 by more than about 5μ, for example. The first electrode 350 may block light not blocked by the light-blocking patterns. The first electrode 350 may additionally block light of the light-emitting region II, and thus visibility of a display device may be improved.

[0084] The pixel defining layer 370 may be disposed on the first electrode 350 and a portion of the second insulating layer 330. A first opening and a second opening may be defined in the pixel defining layer 370. In the light-emitting region II, the first opening of the pixel defining layer 370 may be positioned on a portion of the first electrode 350 disposed on the second insulating layer 330. The emission layer 390 may be disposed in the first opening. In addition, the second opening of the pixel defining layer 370 may be positioned in the transparent region III. The second opening may be defined as the transparent window 380. The pixel defining layer 370 may include organic materials or inorganic materials. These may be used alone or in a combination thereof. In an exemplary embodiment, the pixel defining layer 370 may include materials substantially the same as that of the second insulating layer 330.

[0085] The emission layer 390 may be disposed on the first electrode 350 which is exposed via the first opening of the pixel defining layer 370. The emission layer 390 may be provided using light emitting materials capable of generating different colors of light (e.g., a red color of light, a blue color of light, and a green color of light). In an exemplary embodiment, the emission layer 390 may generally generate a white color of light by stacking a plurality of light emitting materials capable of generating different colors of light such as a red color of light, a green color of light, a blue color of light, etc.

[0086] The second electrode 410 may be disposed on the pixel defining layer 370, the emission layer 390, the first insulating layer 250 and the second insulating layer 330. In an exemplary embodiment, the second electrode 410 may be disposed as a substantially uniform thickness along upper surfaces of the pixel defining layer 370, the emission layer 390, the first insulating layer 250 and the second insulating layer 330. The second electrode 410 may be contacted to a portion of the second insulating layer 330 via the second opening of the pixel defining layer 370, and may extend into the transparent region III. That is, the second electrode 410 may extend into the second opening. In exemplary embodiments, the second electrode 410 may include a transparent conductive material. In an exemplary embodiment, the second electrode 410 may include ITO, SnO_x, InO_x, GaO_x, IZO, etc., for example. Thus, the second electrode 410 positioned in the transparent region III may not substantially reduce a transmittivity of the transparent region III. In an exemplary embodiment, the second electrode 410 may include materials substantially the same as that of the first electrode 350.

[0087] FIGS. 4 to 12 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 2.

[0088] Referring to FIG. 4, a buffer layer 130 is disposed on a substrate 110. Thereafter, a first active pattern 150 and a second active pattern 160 are disposed on the buffer layer 130.

[0089] The buffer layer 130 may extend from the light-emitting region II into the transparent region III. The buffer layer 130 may prevent the diffusion (e.g., an out gassing) of metal atoms and/or impurities from the substrate 110. Additionally, the buffer layer 130 may control a rate of a heat transfer in a crystallization process for forming a first active pattern 150 and a second active pattern 160, thereby obtaining substantially uniform the first and the second active patterns 150 and 160.

[0090] Furthermore, the buffer layer 130 may improve a surface flatness of the substrate 110 when a surface of the substrate 110 is relatively irregular. In an exemplary embodiment, the buffer layer 130 may include silicon nitride, silicon oxide, etc., for example. When the buffer layer 130 includes the silicon oxide, an external light penetrated to the transparent region III of the OLED device 100 may transmit the buffer layer 130.

[0091] In exemplary embodiments, according to a type of the substrate 110, at least two buffer layers may be provided on the substrate 110, or the buffer layer may not be disposed.

[0092] The first and the second active patterns 150 and 160 may be positioned on the buffer layer 130 on the light-emitting region II. The second active pattern 160 may be spaced apart from the first active pattern 150 along the first direction. Each of the first and the second active patterns 150 and 160 may include a material including silicon or oxide semiconductor.

[0093] Referring to FIG. 5, an insulating interlayer 170 is disposed on the substrate 110 on which the buffer layer 130 is disposed. Thereafter, a first gate electrode 180, a second gate electrode 190 and a first capacitor electrode 200 are disposed on the insulating interlayer 170.

[0094] The insulating interlayer 170 may be disposed on the buffer layer 130. The insulating interlayer 170 may cover the first and second active patterns 150 and 160, and may extend into the transparent region III. In an exemplary embodiment, the insulating interlayer 170 may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the insulating interlayer 170 may include a silicon oxide. In an exemplary embodiment, the insulating interlayer 170 may include a material substantially the same as that of the buffer layer 130. In this case, as the insulating interlayer 170 and the buffer layer 130 may be provided as the same material in the transparent region III, the insulating interlayer 170 and the buffer layer 130 may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0095] The first gate electrode 180 may be disposed on the insulating interlayer 170 under which the first active pattern 150 is positioned. The second gate electrode 190 may be disposed on the insulating interlayer 170 under which the second active pattern 160 is positioned. Each of the first gate electrode 180 and the second gate electrode 190 may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example.

[0096] The first capacitor electrode 200 may be disposed on the insulating interlayer 170. The first capacitor electrode 200 may be spaced apart from the first gate electrode 180 by predetermined distances. The first capacitor electrode 200, the first gate electrode 180, and the second gate electrode 190 may include substantially the same material. In an exemplary

embodiment, each of the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190** may include different materials.

[0097] Referring to FIG. 6, a gate insulating layer **210** is disposed on the substrate **110** on which the first gate electrode **180**, the second gate electrode **190** and the first capacitor electrode **200** are disposed. Thereafter, a second capacitor electrode **230** and a light-blocking pattern are disposed on the gate insulating layer **210**. The light-blocking pattern may include a first light-blocking pattern LBP1 and a second light-blocking pattern LBP2.

[0098] The gate insulating layer **210** may be disposed on the insulating interlayer **170**, the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190**. The gate insulating layer **210** may cover the first capacitor electrode **200**, the first gate electrode **180**, and the second gate electrode **190**, and may extend into the transparent region III. In an exemplary embodiment, the gate insulating layer **210** may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the gate insulating layer **210** may include a silicon oxide. In an exemplary embodiment, the gate insulating layer **210** may include a material substantially the same as that of the buffer layer **130** and the insulating interlayer **170**. In this case, as the gate insulating layer **210**, the insulating interlayer **170** and the buffer layer **130** may be provided as the same material in the transparent region III, the gate insulating layer **210**, the insulating interlayer **170** and the buffer layer **130** may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0099] The second capacitor electrode **230** may be disposed on the gate insulating layer **210** under which the first capacitor electrode **200** is positioned. The second capacitor electrode **230** may include a material substantially the same as that of the first gate electrode **180**, the second gate electrode **190**, and the first capacitor electrode **200**. In an exemplary embodiment, each of the second capacitor electrode **230**, the first gate electrode **180**, the second gate electrode **190**, and the first capacitor electrode **200** may include different materials.

[0100] The light-blocking pattern may be disposed on the same layer as the second capacitor electrode **230**. The light-blocking pattern is insulated from the second capacitor electrode **230**. The light-blocking pattern may include the same material as the second capacitor electrode **230**.

[0101] The first light-blocking pattern LBP1 is disposed in the light-emitting region II. The second light-blocking pattern LBP2 extends in a first direction D1. The second light-blocking pattern LBP2 is disposed in the light-emitting region II and the transparent region III. The second light-blocking pattern LBP2 overlaps data lines DL1 and DL2 electrically connected with a source electrode.

[0102] The light-blocking pattern partially overlaps the first gate electrode **180**, the second gate electrode **190**, the first source electrode, the second source electrode **300**, the first drain electrode **290** and the second drain electrode **310**. The light-blocking pattern may be disposed in a region on which the first gate electrode **180**, the second gate electrode **190**, the first source electrode, the second source electrode **300**, the first drain electrode **290** and the second drain electrode **310** are not disposed in a plan view. That is, the light-blocking pattern is disposed in a region on which a gate metal pattern including a gate electrode and a data metal pattern including a source electrode, a drain electrode and a data line are not disposed in a plan view.

[0103] Referring to FIG. 7, a first insulating layer **250** is disposed on the substrate **110** on which the second capacitor electrode **230** is disposed. Therefore, a contact hole penetrating the first insulating layer **250** and a contact hole penetrating the first insulating layer **250**, the gate insulating layer **210** and the insulating interlayer **170** are defined.

[0104] Referring to FIG. 8, a first source electrode, a first drain electrode **290**, a second source electrode **300**, a second drain electrode **310** and a power supply electrode **280** are provided.

[0105] The first source electrode and the first drain electrode **290** may be contacted to the first active pattern **150** by removing portions of the first insulating layer **250**, the gate insulating layer **210**, and the insulating interlayer **170**. Each of the first source electrode and the first drain electrode **290** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. These may be used alone or in a combination thereof.

[0106] The second source electrode **300** and the second drain electrode **310** may be contacted to the second active pattern **160** by removing portions of the first insulating layer **250**, the gate insulating layer **210**, and the insulating interlayer **170**. Each of the second source electrode **300** and the second drain electrode **310** may include materials substantially the same as that of the first source electrode and the first drain electrode **290**.

[0107] The power supply electrode **280** may be electrically contacted to the second capacitor electrode **230** by removing a portion of the first insulating layer **250**, and may be electrically contacted to the first active pattern **150** by removing a portion of the first insulating layer **250**, the gate insulating layer **210**, and the insulating interlayer **170**. The high power supply voltage applied to the power supply electrode **280** may be provide to the second capacitor electrode **230** and the first active pattern **150**. The power supply electrode **280** may include materials substantially the same as that of the first drain electrode **290**, the second source electrode **300**, and the second drain electrode **310**.

[0108] Referring to FIG. 9, a second insulating layer **330** is disposed on the substrate **110** on which the first source electrode, the first drain electrode **290**, the second source electrode **300**, the second drain electrode **310** and the power supply electrode **280** are provided.

[0109] The second insulating layer **330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **330** may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In some exemplary embodiments, the second insulating layer **330** may include an organic material. In an exemplary embodiment, the second insulating layer **330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0110] Referring to FIG. 10, the second insulating layer **330** is patterned to form a transparent window **380** and a contact hole.

[0111] The second insulating layer **330** may cover the first source electrode, the first drain electrode **290**, the second source electrode **300**, and the second drain electrode **310**. The second insulating layer **330** may be disposed such that the second insulating layer **330** overlaps a portion of the power

supply electrode **280**. That is, at least a portion of the power supply electrode **280** may be exposed by the second insulating layer **330** disposed thereon.

[0112] The second insulating layer **330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **330** may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer **330** may include an organic material. In an exemplary embodiment, the second insulating layer **330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0113] Referring to FIG. 11, a first electrode **350** is disposed on the second insulating layer **330**.

[0114] The first electrode **350** may be disposed on a portion of the power supply electrode **280** and a portion of the second insulating layer **330** in the light-emitting region II. In exemplary embodiments, the first electrode **350** may be disposed as a substantially uniform thickness along upper surfaces of the power supply electrode **280** and the second insulating layer **330**.

[0115] The first electrode **350** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. In an exemplary embodiment, the first electrode **350** may include aluminum (Al), aluminum alloy, aluminum nitride (AlNx), silver (Ag), silver alloy, tungsten (W), tungsten nitride (WNx), copper (Cu), copper alloy, nickel (Ni), chrome (Cr), chrome nitride (CrNx), molybdenum (Mo), molybdenum alloy, titanium (Ti), titanium nitride (TiNx), platinum (Pt), tantalum (Ta), tantalum nitride (TaNx), neodymium (Nd), scandium (Sc), strontium ruthenium oxide (SRO), zinc oxide (ZnOx), ITO, stannum oxide (SnOx), indium oxide (InOx), gallium oxide (GaOx), IZO, etc., for example. These may be used alone or in a combination thereof.

[0116] Referring to FIG. 12, a pixel defining layer **370** is disposed on the substrate **110** on which the first electrode **350** is disposed. Thereafter, an emission layer **390** is disposed on the first electrode **350** which is exposed via the first opening of the pixel defining layer **370**.

[0117] The pixel defining layer **370** may be disposed on the first electrode **350** and a portion of the second insulating layer **330**. A first opening and a second opening may be defined in the pixel defining layer **370**. In the light-emitting region II, the first opening of the pixel defining layer **370** may be positioned in a portion of the first electrode **350** disposed on the second insulating layer **330**. The emission layer **390** may be disposed in the first opening. In addition, the second opening of the pixel defining layer **370** may be positioned in the transparent region III. The second opening may be defined as the transparent window **380**. The pixel defining layer **370** may include organic materials or inorganic materials. These may be used alone or in a combination thereof. In an exemplary embodiment, the pixel defining layer **370** may include materials substantially the same as that of the second insulating layer **330**.

[0118] The emission layer **390** may be disposed on the first electrode **350** which is exposed via the first opening of the pixel defining layer **370**. The emission layer **390** may be provided using light emitting materials capable of generating

different colors of light (e.g., a red color of light, a blue color of light, and a green color of light). In an exemplary embodiment, the emission layer **390** may generally generate a white color of light by stacking a plurality of light emitting materials capable of generating different colors of light such as a red color of light, a green color of light, a blue color of light, etc.

[0119] Referring to FIG. 2, a second electrode **410** is disposed on the substrate **100** on which the pixel defining layer **370** is disposed.

[0120] The second electrode **410** may be disposed on the pixel defining layer **370**, the emission layer **390**, the first insulating layer **250** and the second insulating layer **330**. In an exemplary embodiment, the second electrode **410** may be disposed as a substantially uniform thickness along upper surfaces of the pixel defining layer **370**, the emission layer **390**, the first insulating layer **250** and the second insulating layer **330**. The second electrode **410** may be contacted to a portion of the first insulating layer **250** and the second insulating layer **330** via the transparent window **380**, and may extend into the transparent region III. That is, the second electrode **410** may extend into the transparent window **380**. In exemplary embodiments, the second electrode **410** may include a transparent conductive material. In an exemplary embodiment, the second electrode **410** may include ITO, SnOx, InOx, GaOx, IZO, etc., for example. Thus, the second electrode **410** positioned in the transparent region III may not substantially reduce a transmittivity of the transparent region III. In an exemplary embodiment, the second electrode **410** may include materials substantially the same as that of the first electrode **350**.

[0121] FIG. 13 is a plan view illustrating an OLED device according to an exemplary embodiment of the invention. FIG. 14 is a plan view illustrating light transmission of an OLED device according to an exemplary embodiment of the invention.

[0122] The OLED device **1100** according to the exemplary embodiment is substantially same as the OLED device **100** of FIGS. 1 to 12 except for a light-blocking pattern LBP, and thus same reference numerals are used for same elements and repetitive explanation will be omitted.

[0123] Referring to FIG. 13, the OLED device **1100** may include a substrate **1110**, a driving transistor TR1, a switching transistor TR2, a storage capacitor CAP, a power supply electrode **1280**, a buffer layer **1130**, an insulating interlayer **1170**, a gate insulating layer **1210**, a first insulating layer **1250**, a second insulating layer **1330**, a first electrode **1350**, a pixel defining layer **1370**, a transparent window **1380**, an emission layer **1390**, a second electrode **1410**, etc., for example. In exemplary embodiments, the OLED device **1100** may include a light-emitting region II and a transparent region III. The driving transistor TR1, the switching transistor TR2, the storage capacitor CAP, the power supply electrode **1280**, the second insulating layer **1330**, the first electrode **1350**, the emission layer **1390** may be positioned in the light-emitting region II. In addition, the transparent window **1380** may be positioned in the transparent region III. In an exemplary embodiment, an image may be displayed in the light-emitting region II, and objects or images located opposite to the OLED device **1100** may be transmitted in the transparent region III.

[0124] The light-blocking pattern LBP may be disposed on the gate insulating layer **1210**. The light-blocking pattern LBP may be disposed on the same layer as the second capacitor electrode **1230**. The light-blocking pattern LBP is insulated from the second capacitor electrode **1230**. The light-

blocking pattern LBP may include the same material as the second capacitor electrode **1230**.

[0125] The light-blocking pattern LBP extends in a first direction D1. The light-blocking pattern LBP is disposed in the light-emitting region II and the transparent region III. The light-blocking pattern LBP overlaps data lines DL1 and DL2 electrically connected with a source electrode.

[0126] Referring to FIG. 14, state of light transmission of an OLED device according to an exemplary embodiment of the invention is illustrated.

[0127] The light-blocking pattern LBP is disposed in the light-emitting region II and the transparent region III. Thus, the light-blocking pattern LBP may form a light-blocking region BA in the light-emitting region II and a portion of the transparent region III. In addition, a light-blocking region BA in which a gate metal pattern including a gate electrode and a data metal pattern including a source electrode and a drain electrode are provided may be provided in the light-emitting region II. A region on which the light-blocking patterns are not disposed may be defined as a light-transmission region TA.

[0128] The gate metal pattern and the data metal pattern are not overlapped each other completely. Thus, tiny openings may be defined in a plan view. Accordingly, visibility of a display device may be decreased due to diffraction of light via the tiny openings.

[0129] However, an OLED device according to the invention includes light-blocking patterns disposed on the tiny openings. Thus, light transmitted via the tiny openings may be blocked. Accordingly, visibility of a display device may be improved.

[0130] In the exemplary embodiment, the first electrode **1350** may include opaque material. A width of a first direction D1 of the first electrode **1350** is wider than a width of a first direction D1 of the emission layer **1390** by more than about 5 μ . The first electrode **1350** may block light not blocked by the light-blocking patterns. The first electrode **1350** may additionally block light of the light-emitting region II, and thus visibility of a display device may be improved.

[0131] FIGS. 15 to 23 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 13.

[0132] Referring to FIG. 15, a buffer layer **1130** is disposed on a substrate **1110**. Thereafter, a first active pattern **1150** and a second active pattern **1160** are disposed on the buffer layer **1130**.

[0133] The buffer layer **1130** may extend from the light-emitting region II into the transparent region III. The buffer layer **1130** may prevent the diffusion (e.g., an out gassing) of metal atoms and/or impurities from the substrate **1110**. Additionally, the buffer layer **1130** may control a rate of a heat transfer in a crystallization process for forming a first active pattern **1150** and a second active pattern **1160**, thereby obtaining substantially uniform the first and the second active patterns **1150** and **1160**.

[0134] Furthermore, the buffer layer **1130** may improve a surface flatness of the substrate **1110** when a surface of the substrate **1110** is relatively irregular. In an exemplary embodiment, the buffer layer **1130** may include silicon nitride, silicon oxide, etc., for example. When the buffer layer **1130** includes the silicon oxide, an external light penetrated to the transparent region III of the OLED device **1100** may transmit the buffer layer **1130**.

[0135] In exemplary embodiments, according to a type of the substrate **1110**, at least two buffer layers may be provided on the substrate **1110**, or the buffer layer may not be disposed.

[0136] The first and the second active patterns **1150** and **1160** may be positioned on the buffer layer **1130** on the light-emitting region II. The second active pattern **1160** may be spaced apart from the first active pattern **1150** along the first direction. Each of the first and the second active patterns **1150** and **1160** may include a material including silicon or oxide semiconductor.

[0137] Referring to FIG. 16, an insulating interlayer **1170** is disposed on the substrate **1110** on which the buffer layer **1130** is disposed. Thereafter, a first gate electrode **1180**, a second gate electrode **1190** and a first capacitor electrode **1200** are disposed on the insulating interlayer **1170**.

[0138] The insulating interlayer **1170** may be disposed on the buffer layer **1130**. The insulating interlayer **1170** may cover the first and second active patterns **1150** and **1160**, and may extend into the transparent region III. In an exemplary embodiment, the insulating interlayer **1170** may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the insulating interlayer **1170** may include a silicon oxide. In an exemplary embodiment, the insulating interlayer **1170** may include a material substantially the same as that of the buffer layer **1130**. In this case, as the insulating interlayer **1170** and the buffer layer **1130** may be provided as the same material in the transparent region III, the insulating interlayer **1170** and the buffer layer **1130** may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0139] The first gate electrode **1180** may be disposed on the insulating interlayer **1170** under which the first active pattern **1150** is positioned. The second gate electrode **1190** may be disposed on the insulating interlayer **1170** under which the second active pattern **1160** is positioned. Each of the first gate electrode **1180** and the second gate electrode **1190** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example.

[0140] The first capacitor electrode **1200** may be disposed on the insulating interlayer **1170**. The first capacitor electrode **1200** may be spaced apart from the first gate electrode **1180** by predetermined distances. The first capacitor electrode **1200**, the first gate electrode **1180**, and the second gate electrode **1190** may include substantially the same material. In an exemplary embodiment, each of the first capacitor electrode **1200**, the first gate electrode **1180**, and the second gate electrode **1190** may include different materials.

[0141] Referring to FIG. 17, a gate insulating layer **1210** is disposed on the substrate **1110** on which the first gate electrode **1180**, the second gate electrode **1190** and the first capacitor electrode **1200** are disposed. Thereafter, a second capacitor electrode **1230** and a light-blocking pattern LBP are disposed on the gate insulating layer **1210**.

[0142] The gate insulating layer **1210** may be disposed on the insulating interlayer **1170**, the first capacitor electrode **1200**, the first gate electrode **1180**, and the second gate electrode **1190**. The gate insulating layer **1210** may cover the first capacitor electrode **1200**, the first gate electrode **1180**, and the second gate electrode **1190**, and may extend into the transparent region III. In an exemplary embodiment, the gate insulating layer **1210** may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the gate insulating layer **1210** may include a silicon oxide. In an exemplary embodiment, the gate insulating layer **1210** may

include a material substantially the same as that of the buffer layer **1130** and the insulating interlayer **1170**. In this case, as the gate insulating layer **1210**, the insulating interlayer **1170** and the buffer layer **1130** may be provided as the same material in the transparent region III, the gate insulating layer **1210**, the insulating interlayer **1170** and the buffer layer **1130** may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0143] The second capacitor electrode **1230** may be disposed on the gate insulating layer **1210** under which the first capacitor electrode **1200** is positioned. The second capacitor electrode **1230** may include a material substantially the same that of the first gate electrode **1180**, the second gate electrode **1190**, and the first capacitor electrode **1200**. In an exemplary embodiment, each of the second capacitor electrode **1230**, the first gate electrode **1180**, the second gate electrode **1190**, and the first capacitor electrode **1200** may include different materials.

[0144] The light-blocking pattern LBP may be disposed on the same layer as the second capacitor electrode **230**. The light-blocking pattern LBP is insulated from the second capacitor electrode **230**. The light-blocking pattern LBP may include the same material as the second capacitor electrode **230**.

[0145] The light-blocking pattern LBP extends in a first direction D1. The light-blocking pattern LBP is disposed in the light-emitting region II and the transparent region III. The light-blocking pattern LBP overlaps data lines DL1 and DL2 electrically connected with a source electrode.

[0146] Referring to FIG. 18, a first insulating layer **1250** is disposed on the substrate **1110** on which the second capacitor electrode **1230** is disposed. Therefore, a contact hole penetrating the first insulating layer **1250** and a contact hole penetrating the first insulating layer **1250**, the gate insulating layer **1210** and the insulating interlayer **1170** are defined.

[0147] Referring to FIG. 19, a first source electrode, a first drain electrode **1290**, a second source electrode **1300**, a second drain electrode **1310** and a power supply electrode **1280** are provided.

[0148] The first source electrode and the first drain electrode **1290** may be contacted to the first active pattern **1150** by removing portions of the first insulating layer **1250**, the gate insulating layer **1210**, and the insulating interlayer **1170**. Each of the first source electrode and the first drain electrode **1290** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. These may be used alone or in a combination thereof.

[0149] The second source electrode **1300** and the second drain electrode **1310** may be contacted to the second active pattern **1160** by removing portions of the first insulating layer **1250**, the gate insulating layer **1210**, and the insulating interlayer **1170**. Each of the second source electrode **1300** and the second drain electrode **1310** may include materials substantially the same as that of the first source electrode and the first drain electrode **1290**.

[0150] The power supply electrode **1280** may be electrically contacted to the second capacitor electrode **1230** by removing a portion of the first insulating layer **1250**, and may be electrically contacted to the first active pattern **1150** by removing a portion of the first insulating layer **1250**, the gate insulating layer **1210**, and the insulating interlayer **1170**. The high power supply voltage applied to the power supply electrode **1280** may be provide to the second capacitor electrode

1230 and the first active pattern **1150**. The power supply electrode **1280** may include materials substantially the same as that of the first drain electrode **1290**, the second source electrode **1300**, and the second drain electrode **1310**.

[0151] Referring to FIG. 20, a second insulating layer **1330** is disposed on the substrate **1110** on which the first source electrode, the first drain electrode **1290**, the second source electrode **1300**, the second drain electrode **1310** and the power supply electrode **1280** are disposed.

[0152] The second insulating layer **1330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **1330** may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer **1330** may include an organic material. In an exemplary embodiment, the second insulating layer **1330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0153] Referring to FIG. 21, the second insulating layer **1330** is patterned to form a transparent window **1380** and a contact hole.

[0154] The second insulating layer **1330** may cover the first source electrode, the first drain electrode **1290**, the second source electrode **1300**, and the second drain electrode **1310**. The second insulating layer **1330** may be disposed such that the second insulating layer **1330** overlaps a portion of the power supply electrode **1280**. That is, at least a portion of the power supply electrode **1280** may be exposed by the second insulating layer **1330** disposed thereon.

[0155] The second insulating layer **1330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **1330** may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer **1330** may include an organic material. In an exemplary embodiment, the second insulating layer **1330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0156] Referring to FIG. 22, a first electrode **1350** is disposed on the second insulating layer **1330**.

[0157] The first electrode **1350** may be disposed on a portion of the power supply electrode **1280** and a portion of the second insulating layer **1330** in the light-emitting region II. In exemplary embodiments, the first electrode **1350** may be disposed as a substantially uniform thickness along upper surfaces of the power supply electrode **1280** and the second insulating layer **1330**.

[0158] The first electrode **1350** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. In an exemplary embodiment, the first electrode **1350** may include aluminum (Al), aluminum alloy, aluminum nitride (AlNx), silver (Ag), silver alloy, tungsten (W), tungsten nitride (WNx), copper (Cu), copper alloy, nickel (Ni), chrome (Cr), chrome nitride (CrNx), molybdenum (Mo), molybdenum alloy, titanium (Ti), titanium nitride (TiNx), platinum (Pt), tantalum (Ta), tantalum

nitride (Ta_Nx), neodymium (Nd), scandium (Sc), strontium ruthenium oxide (SRO), zinc oxide (ZnOx), ITO, stannum oxide (SnOx), indium oxide (InOx), gallium oxide (GaOx), IZO, etc., for example. These may be used alone or in a combination thereof.

[0159] Referring to FIG. 23, a pixel defining layer 1370 is disposed on the substrate 1110 on which the first electrode 1350 is disposed. Thereafter, an emission layer 1390 is disposed on the first electrode 1350 which is exposed via the first opening of the pixel defining layer 1370.

[0160] The pixel defining layer 1370 may be disposed on the first electrode 1350 and a portion of the second insulating layer 1330. A first opening and a second opening may be defined in the pixel defining layer 1370. In the light-emitting region II, the first opening of the pixel defining layer 1370 may be positioned in a portion of the first electrode 1350 disposed on the second insulating layer 1330. The emission layer 1390 may be disposed in the first opening. In addition, the second opening of the pixel defining layer 1370 may be positioned in the transparent region III. The second opening may be defined as the transparent window 1380. The pixel defining layer 1370 may include organic materials or inorganic materials. These may be used alone or in a combination thereof. In an exemplary embodiment, the pixel defining layer 1370 may include materials substantially the same as that of the second insulating layer 1330.

[0161] The emission layer 1390 may be disposed on the first electrode 1350 which is exposed via the first opening of the pixel defining layer 1370. The emission layer 1390 may be provided using light emitting materials capable of generating different colors of light (e.g., a red color of light, a blue color of light, and a green color of light). In an exemplary embodiment, the emission layer 1390 may generally generate a white color of light by stacking a plurality of light emitting materials capable of generating different colors of light such as a red color of light, a green color of light, a blue color of light, etc. A width of a first direction D1 of the first electrode 1350 is wider than a width of a first direction D1 of the emission layer 1390 by more than about 5 μ m. The first electrode 1350 may block light not blocked by the light-blocking patterns. The first electrode 1350 may additionally block light of the light-emitting region II, and thus visibility of a display device may be improved.

[0162] Referring to FIG. 13, a second electrode 1410 is disposed on the substrate 1100 on which the pixel defining layer 1370 is disposed.

[0163] The second electrode 1410 may be disposed on the pixel defining layer 1370, the emission layer 1390, the first insulating layer 1250 and the second insulating layer 1330. In an exemplary embodiment, the second electrode 1410 may be disposed as a substantially uniform thickness along upper surfaces of the pixel defining layer 1370, the emission layer 1390, the first insulating layer 1250 and the second insulating layer 1330. The second electrode 1410 may be contacted to a portion of the first insulating layer 1250 the second insulating layer 1330 via the via the transparent window 1380, and may extend into the transparent region III. That is, the second electrode 1410 may extend into the transparent window 1380. In exemplary embodiments, the second electrode 1410 may include a transparent conductive material. In an exemplary embodiment, the second electrode 1410 may include ITO, SnOx, InOx, GaOx, IZO, etc., for example. Thus, the second electrode 1410 positioned in the transparent region III may not substantially reduce a transmittivity of the transparent

region III. In an exemplary embodiment, the second electrode 1410 may include materials substantially the same as that of the first electrode 1350.

[0164] FIG. 24 is a plan view illustrating an OLED device according to an exemplary embodiment of the invention. FIG. 25 is a plan view illustrating light transmission of an OLED device according to an exemplary embodiment of the invention.

[0165] The OLED device 2100 according to the exemplary embodiment is substantially same as the OLED device 100 of FIGS. 1 to 12 except for a light-blocking pattern LBP, and thus same reference numerals are used for same elements and repetitive explanation will be omitted.

[0166] Referring to FIGS. 1 and 24, the OLED device 2100 may include a substrate 2110, a driving transistor TR1, a switching transistor TR2, a storage capacitor CAP, a power supply electrode 2280, a buffer layer 2130, an insulating interlayer 2170, a gate insulating layer 2210, a first insulating layer 2250, a second insulating layer 2330, a first electrode 2350, a pixel defining layer 2370, a transparent window 2380, an emission layer 2390, a second electrode 2410, etc., for example. In exemplary embodiments, the OLED device 2100 may include a light-emitting region II and a transparent region III. The driving transistor TR1, the switching transistor TR2, the storage capacitor CAP, the power supply electrode 2280, the second insulating layer 2330, the first electrode 2350, the emission layer 2390 may be positioned in the light-emitting region II. In addition, the transparent window 2380 may be positioned in the transparent region III. In an exemplary embodiment, an image may be displayed in the light-emitting region II, and objects or images located opposite to the OLED device 2100 may be transmitted in the transparent region III.

[0167] The light-blocking pattern LBP may be disposed on the gate insulating layer 2210. The light-blocking pattern LBP may be disposed on the same layer as the second capacitor electrode 2230. The light-blocking pattern LBP is insulated from the second capacitor electrode 2230. The light-blocking pattern LBP may include the same material as the second capacitor electrode 2230.

[0168] The light-blocking pattern LBP is disposed in the light-emitting region II. The light-blocking pattern LBP partially overlaps the first gate electrode 180, the second gate electrode 2190, the first source electrode, the second source electrode 2300, the first drain electrode 2290 and the second drain electrode 2310. The light-blocking pattern LBP may be disposed in a region on which the first gate electrode 2180, the second gate electrode 2190, the first source electrode, the second source electrode 2300, the first drain electrode 2290 and the second drain electrode 2310 are not disposed in a plan view. That is, the light-blocking pattern LBP is disposed in a region on which a gate metal pattern including a gate electrode and a data metal pattern including a source electrode, a drain electrode and a data line are not disposed in a plan view.

[0169] Referring to FIG. 25, state of light transmission of an OLED device according to an exemplary embodiment of the invention is illustrated.

[0170] The light-blocking pattern LBP is disposed in the light-emitting region II. Thus, the light-blocking pattern LBP may form a light-blocking region BA in the light-emitting region II. A region on which the light-blocking pattern LBP are not disposed may be defined as a light-transmission region TA.

[0171] The gate metal pattern and the data metal pattern are not overlapped each other completely. Thus, tiny openings may be defined in a plan view. Accordingly, visibility of a display device may be decreased due to diffraction of light via the tiny openings.

[0172] However, an OLED device according to the invention includes light-blocking patterns disposed on the tiny openings. Thus, light transmitted via the tiny openings may be blocked. Accordingly, visibility of a display device may be improved.

[0173] In the exemplary embodiment, the first electrode 2350 may include opaque material. A width of a first direction D1 of the first electrode 2350 is wider than a width of a first direction D1 of the emission layer 2390 by more than about 5 μ . The first electrode 2350 may block light not blocked by the light-blocking patterns. The first electrode 2350 may additionally block light of the light-emitting region II, and thus visibility of a display device may be improved.

[0174] FIGS. 26 to 34 are cross-sectional views illustrating a method of manufacturing the OLED device of FIG. 24.

[0175] Referring to FIG. 26, a buffer layer 2130 is disposed on a substrate 2110. Thereafter, a first active pattern 2150 and a second active pattern 2160 are disposed on the buffer layer 2130.

[0176] The buffer layer 2130 may extend from the light-emitting region II into the transparent region III. The buffer layer 2130 may prevent the diffusion (e.g., an out gassing) of metal atoms and/or impurities from the substrate 2110. Additionally, the buffer layer 2130 may control a rate of a heat transfer in a crystallization process for forming a first active pattern 2150 and a second active pattern 2160, thereby obtaining substantially uniform the first and the second active patterns 2150 and 2160.

[0177] Furthermore, the buffer layer 2130 may improve a surface flatness of the substrate 2110 when a surface of the substrate 2110 is relatively irregular. In an exemplary embodiment, the buffer layer 2130 may include silicon nitride, silicon oxide, etc., for example. When the buffer layer 2130 includes the silicon oxide, an external light penetrated to the transparent region III of the OLED device 2100 may transmit the buffer layer 2130.

[0178] In exemplary embodiments, according to a type of the substrate 2110, at least two buffer layers may be provided on the substrate 2110, or the buffer layer may not be disposed.

[0179] The first and the second active patterns 2150 and 2160 may be positioned on the buffer layer 2130 on the light-emitting region II. The second active pattern 2160 may be spaced apart from the first active pattern 2150 along the first direction. Each of the first and the second active patterns 2150 and 2160 may include a material including silicon or oxide semiconductor.

[0180] Referring to FIG. 27, an insulating interlayer 2170 is disposed on the substrate 2110 on which the buffer layer 2130 is disposed. Thereafter, a first gate electrode 2180, a second gate electrode 2190 and a first capacitor electrode 2200 are disposed on the insulating interlayer 2170.

[0181] The insulating interlayer 2170 may be disposed on the buffer layer 2130. The insulating interlayer 2170 may cover the first and second active patterns 2150 and 2160, and may extend into the transparent region III. In an exemplary embodiment, the insulating interlayer 2170 may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the insulating interlayer 2170 may include a silicon oxide. In an exemplary embodiment, the

insulating interlayer 2170 may include a material substantially the same as that of the buffer layer 2130. In this case, as the insulating interlayer 2170 and the buffer layer 2130 may be provided as the same material in the transparent region III, the insulating interlayer 2170 and the buffer layer 2130 may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0182] The first gate electrode 2180 may be disposed on the insulating interlayer 2170 under which the first active pattern 2150 is positioned. The second gate electrode 2190 may be disposed on the insulating interlayer 2170 under which the second active pattern 2160 is positioned. Each of the first gate electrode 2180 and the second gate electrode 2190 may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example.

[0183] The first capacitor electrode 2200 may be disposed on the insulating interlayer 2170. The first capacitor electrode 2200 may be spaced apart from the first gate electrode 2180 by predetermined distances. The first capacitor electrode 2200, the first gate electrode 2180, and the second gate electrode 2190 may include substantially the same material. In an exemplary embodiment, each of the first capacitor electrode 2200, the first gate electrode 2180, and the second gate electrode 2190 may include different materials.

[0184] Referring to FIG. 28, a gate insulating layer 2210 is disposed on the substrate 2110 on which the first gate electrode 2180, the second gate electrode 2190 and the first capacitor electrode 2200 are disposed. Thereafter, a second capacitor electrode 2230 and a light-blocking pattern LBP are disposed on the gate insulating layer 2210.

[0185] The gate insulating layer 2210 may be disposed on the insulating interlayer 2170, the first capacitor electrode 2200, the first gate electrode 2180, and the second gate electrode 2190. The gate insulating layer 2210 may cover the first capacitor electrode 2200, the first gate electrode 2180, and the second gate electrode 2190, and may extend into the transparent region III. In an exemplary embodiment, the gate insulating layer 2210 may include a silicon compound, a metal oxide, etc., for example. In exemplary embodiments, the gate insulating layer 2210 may include a silicon oxide. In an exemplary embodiment, the gate insulating layer 2210 may include a material substantially the same as that of the buffer layer 2130 and the insulating interlayer 2170. In this case, as the gate insulating layer 2210, the insulating interlayer 2170 and the buffer layer 2130 may be provided as the same material in the transparent region III, the gate insulating layer 2210, the insulating interlayer 2170 and the buffer layer 2130 may have the same refractive index. Thus, a light transmittivity may be improved in the transparent region III.

[0186] The second capacitor electrode 2230 may be disposed on the gate insulating layer 2210 under which the first capacitor electrode 2200 is positioned. The second capacitor electrode 2230 may include a material substantially the same that of the first gate electrode 2180, the second gate electrode 2190, and the first capacitor electrode 2200. In an exemplary embodiment, each of the second capacitor electrode 2230, the first gate electrode 2180, the second gate electrode 2190, and the first capacitor electrode 2200 may include different materials.

[0187] The light-blocking pattern LBP may be disposed on the same layer as the second capacitor electrode 2230. The light-blocking pattern LBP is insulated from the second

capacitor electrode **2230**. The light-blocking pattern LBP may include the same material as the second capacitor electrode **2230**.

[0188] The light-blocking pattern LBP is disposed in the light-emitting region II. The light-blocking pattern LBP partially overlaps the first gate electrode **180**, the second gate electrode **2190**, the first source electrode, the second source electrode **2300**, the first drain electrode **2290** and the second drain electrode **2310**. The light-blocking pattern LBP may be disposed in a region on which the first gate electrode **2180**, the second gate electrode **2190**, the first source electrode, the second source electrode **2300**, the first drain electrode **2290** and the second drain electrode **2310** are not disposed in a plan view. That is, the light-blocking pattern LBP is disposed in a region on which a gate metal pattern including a gate electrode and a data metal pattern including a source electrode, a drain electrode and a data line are not disposed in a plan view.

[0189] Referring to FIG. 29, a first insulating layer **2250** is disposed on the substrate **2110** on which the second capacitor electrode **2230** is disposed. Therefore, a contact hole penetrating the first insulating layer **2250** and a contact hole penetrating the first insulating layer **2250**, the gate insulating layer **2210** and the insulating interlayer **2170** are defined.

[0190] Referring to FIG. 30, a first source electrode, a first drain electrode **2290**, a second source electrode **2300**, a second drain electrode **2310** and a power supply electrode **2280** are provided.

[0191] The first source electrode and the first drain electrode **2290** may be contacted to the first active pattern **2150** by removing portions of the first insulating layer **2250**, the gate insulating layer **2210**, and the insulating interlayer **2170**. Each of the first source electrode and the first drain electrode **2290** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. These may be used alone or in a combination thereof.

[0192] The second source electrode **2300** and the second drain electrode **2310** may be contacted to the second active pattern **2160** by removing portions of the first insulating layer **2250**, the gate insulating layer **2210**, and the insulating interlayer **2170**. Each of the second source electrode **2300** and the second drain electrode **2310** may include materials substantially the same as that of the first source electrode and the first drain electrode **2290**.

[0193] The power supply electrode **2280** may be electrically contacted to the second capacitor electrode **2230** by removing a portion of the first insulating layer **2250**, and may be electrically contacted to the first active pattern **2150** by removing a portion of the first insulating layer **2250**, the gate insulating layer **2210**, and the insulating interlayer **2170**. The high power supply voltage applied to the power supply electrode **2280** may be provide to the second capacitor electrode **2230** and the first active pattern **2150**. The power supply electrode **2280** may include materials substantially the same as that of the first drain electrode **2290**, the second source electrode **300**, and the second drain electrode **2310**.

[0194] Referring to FIG. 31, a second insulating layer **2330** is disposed on the substrate **2110** on which the first source electrode, the first drain electrode **2290**, the second source electrode **2300**, the second drain electrode **2310** and the power supply electrode **2280** are disposed.

[0195] The second insulating layer **2330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **2330** may include a silicon compound such as

silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer **2330** may include an organic material. In an exemplary embodiment, the second insulating layer **2330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0196] Referring to FIG. 32, the second insulating layer **2330** is patterned to form a transparent window **2380** and a contact hole.

[0197] The second insulating layer **2330** may cover the first source electrode, the first drain electrode **2290**, the second source electrode **2300**, and the second drain electrode **2310**. The second insulating layer **2330** may be disposed such that the second insulating layer **2330** overlaps a portion of the power supply electrode **2280**. That is, at least a portion of the power supply electrode **2280** may be exposed by the second insulating layer **2330** disposed thereon.

[0198] The second insulating layer **2330** may include an inorganic material. In an exemplary embodiment, the second insulating layer **2330** may include a silicon compound such as silicon oxide (SiOx), silicon nitride (SiNx), silicon oxynitride (SiOxNy), silicon oxycarbide (SiOxCy), silicon carbonitride (SiCxNy), etc. These may be used alone or in a combination thereof. In exemplary embodiments, the second insulating layer **2330** may include an organic material. In an exemplary embodiment, the second insulating layer **2330** may include polyimide-based resin, photoresist, acrylic-based resin, polyamide-based resin, siloxane-based resin, etc., for example. These may be used alone or in a combination thereof.

[0199] Referring to FIG. 33, a first electrode **2350** is disposed on the second insulating layer **2330**.

[0200] The first electrode **2350** may be disposed on a portion of the power supply electrode **2280** and a portion of the second insulating layer **2330** in the light-emitting region II. In exemplary embodiments, the first electrode **2350** may be disposed as a substantially uniform thickness along upper surfaces of the power supply electrode **2280** and the second insulating layer **2330**.

[0201] The first electrode **2350** may include metal, alloy, metal nitride, conductive metal oxide, a transparent conductive material, etc., for example. In an exemplary embodiment, the first electrode **2350** may include aluminum (Al), aluminum alloy, aluminum nitride (AlNx), silver (Ag), silver alloy, tungsten (W), tungsten nitride (WNx), copper (Cu), copper alloy, nickel (Ni), chrome (Cr), chrome nitride (CrNx), molybdenum (Mo), molybdenum alloy, titanium (Ti), titanium nitride (TiNx), platinum (Pt), tantalum (Ta), tantalum nitride (TaNx), neodymium (Nd), scandium (Sc), strontium ruthenium oxide (SRO), zinc oxide (ZnOx), ITO, stannum oxide (SnOx), indium oxide (InOx), gallium oxide (GaOx), IZO, etc., for example. These may be used alone or in a combination thereof.

[0202] Referring to FIG. 34, a pixel defining layer **2370** is disposed on the substrate **2110** on which the first electrode **2350** is disposed. Thereafter, an emission layer **2390** is disposed on the first electrode **2350** which is exposed via the first opening of the pixel defining layer **2370**.

[0203] The pixel defining layer **2370** may be disposed on the first electrode **2350** and a portion of the second insulating

layer **2330**. A first opening and a second opening may be defined in the pixel defining layer **2370**. In the light-emitting region II, the first opening of the pixel defining layer **2370** may be positioned in a portion of the first electrode **2350** disposed on the second insulating layer **2330**. The emission layer **2390** may be disposed in the first opening. In addition, the second opening of the pixel defining layer **2370** may be positioned in the transparent region III. The second opening may be defined as the transparent window **2380**. The pixel defining layer **2370** may include organic materials or inorganic materials. These may be used alone or in a combination thereof. In an exemplary embodiment, the pixel defining layer **2370** may include materials substantially the same as that of the second insulating layer **2330**.

[0204] The emission layer **2390** may be disposed on the first electrode **2350** which is exposed via the first opening of the pixel defining layer **2370**. The emission layer **2390** may be provided using light emitting materials capable of generating different colors of light (e.g., a red color of light, a blue color of light, and a green color of light). In an exemplary embodiment, the emission layer **2390** may generally generate a white color of light by stacking a plurality of light emitting materials capable of generating different colors of light such as a red color of light, a green color of light, a blue color of light, etc., for example. A width of a first direction D1 of the first electrode **2350** is wider than a width of a first direction D1 of the emission layer **2390** by more than about 5 μ . The first electrode **2350** may block light not blocked by the light-blocking patterns. The first electrode **2350** may additionally block light of the light-emitting region II, and thus visibility of a display device may be improved.

[0205] Referring to FIG. 24, a second electrode **2410** is disposed on the substrate **2100** on which the pixel defining layer **2370** is disposed.

[0206] The second electrode **2410** may be disposed on the pixel defining layer **2370**, the emission layer **2390**, the first insulating layer **2250** and the second insulating layer **2330**. In an exemplary embodiment, the second electrode **2410** may be disposed as a substantially uniform thickness along upper surfaces of the pixel defining layer **2370**, the emission layer **2390**, the first insulating layer **2250** and the second insulating layer **2330**. The second electrode **2410** may be contacted to a portion of the first insulating layer **2250** the second insulating layer **2330** via the transparent window **2380**, and may extend into the transparent region III. That is, the second electrode **2410** may extend into the transparent window **2380**. In exemplary embodiments, the second electrode **2410** may include a transparent conductive material. In an exemplary embodiment, the second electrode **2410** may include ITO, SnOx, InOx, GaOx, IZO, etc., for example. Thus, the second electrode **2410** positioned in the transparent region III may not substantially reduce a transmittivity of the transparent region III. In an exemplary embodiment, the second electrode **2410** may include materials substantially the same as that of the first electrode **2350**.

[0207] According to the exemplary embodiment, the OLED device light-blocking patterns disposed on the tiny openings. Thus, light transmitted via the tiny openings may be blocked. Accordingly, visibility of a display device may be improved.

[0208] In addition, the first electrode includes opaque material, and thus the first electrode may block light not blocked by the light-blocking patterns. Accordingly, the first

electrode additionally blocks light of the light-emitting region II, and thus visibility of a display device may be improved.

[0209] The foregoing is illustrative of the invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of the invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of the invention. Accordingly, all such modifications are intended to be included within the scope of the invention as defined in the claims. In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Therefore, it is to be understood that the foregoing is illustrative of the invention and is not to be construed as limited to the specific exemplary embodiments disclosed, and that modifications to the disclosed exemplary embodiments, as well as other exemplary embodiments, are intended to be included within the scope of the appended claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

What is claimed is:

1. An organic light emitting display device comprising:
 - a substrate comprising a light-emitting region and a transparent region;
 - a transistor disposed in the light-emitting region and comprising a gate electrode, a source electrode and a drain electrode overlapping the gate electrode;
 - a capacitor disposed in the light-emitting region, and disposed adjacent to the transistor, and comprising a first capacitor electrode and a second capacitor electrode overlapping the first capacitor electrode; and
 - a plurality of light-blocking patterns partially overlapping at least one of the gate electrode, the source electrode and the drain electrode, and disposed on a different layer as a layer the gate electrode, the source electrode or the drain electrode are disposed.
2. The organic light emitting display device of claim 1, wherein the light-blocking patterns and the second capacitor electrode are disposed on the same layer.
3. The organic light emitting display device of claim 2, wherein the light-blocking patterns are insulated from the second capacitor electrode.
4. The organic light emitting display device of claim 1, wherein the light-blocking patterns comprise the same material as that of the second capacitor electrode.
5. The organic light emitting display device of claim 1, wherein the light-blocking patterns are disposed in a region on which the gate electrode, the source electrode and the drain electrode are not disposed in a plan view.
6. The organic light emitting display device of claim 1, wherein the light-blocking patterns comprise opaque material.
7. The organic light emitting display device of claim 1, wherein the light-blocking patterns comprising:
 - a first light-blocking pattern disposed in the light-emitting region; and
 - a second light-blocking pattern extending in a first direction to be disposed in the light-emitting region and the transparent region, and overlapping a data line electrically connected with the source electrode.

8. The organic light emitting display device of claim 1, further comprising:

a first electrode disposed in the light-emitting region and electrically connected with the drain electrode;
an emission layer disposed on the first electrode; and
a second electrode disposed on the emission layer, and disposed in the light-emitting region and the transparent region.

9. The organic light emitting display device of claim 8, wherein the first electrode comprises opaque material.

10. The organic light emitting display device of claim 8, wherein a width of a first direction of the first electrode is wider than a width of a first direction of the emission layer by more than about 5 micrometers.

11. A method for manufacturing an organic light emitting display device substrate, the method comprising:

forming a gate electrode and a first capacitor electrode on a substrate comprising a light-emitting region and a transparent region; and

forming a source electrode, a drain electrode, a second capacitor electrode and a plurality of light-blocking patterns on the substrate on which the gate electrode and a first capacitor electrode are disposed; and

wherein the light-blocking patterns partially overlap the gate electrode, the source electrode or the drain electrode, and are disposed on a different layer as a layer the gate electrode, the source electrode or the drain electrode are disposed.

12. The method of claim 11, wherein the light-blocking patterns and the second capacitor electrode are disposed on the same layer.

13. The method of claim 12, wherein the light-blocking patterns are insulated from the second capacitor electrode.

14. The method of claim 11, wherein the light-blocking patterns comprise the same material as that of the second capacitor electrode.

15. The method of claim 14, wherein the light-blocking patterns are disposed in a region on which the gate electrode, the source electrode and the drain electrode are not disposed in a plan view.

16. The method of claim 11, wherein the light-blocking patterns comprise opaque material.

17. The method of claim 11, wherein the light-blocking patterns comprising:

a first light-blocking pattern disposed in the light-emitting region; and

a second light-blocking pattern extending in a first direction to be disposed in the light-emitting region and the transparent region, and overlapping a data line electrically connected with the source electrode.

18. The method of claim 11, further comprising:

forming a first electrode electrically connected with the drain electrode in the light-emitting region;

forming an emission layer on the first electrode; and

forming second electrode disposed on the emission layer.

19. The method of claim 18, wherein the first electrode comprises opaque material.

20. The method of claim 18, wherein a width of a first direction of the first electrode is wider than a width of a first direction of the emission layer by more than about 5 micrometers.

* * * * *

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	US20160254337A1	公开(公告)日	2016-09-01
申请号	US14/942173	申请日	2015-11-16
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHOI KWANG YOUNG PARK SANG HO		
发明人	CHOI, KWANG-YOUNG PARK, SANG-HO		
IPC分类号	H01L27/32 H01L51/52 H01L51/56		
CPC分类号	H01L27/3272 H01L27/3262 H01L51/5203 H01L27/3276 H01L51/56 H01L27/3265 H01L27/326		
优先权	1020150026963 2015-02-26 KR		
其他公开文献	US9620577		
外部链接	Espacenet USPTO		

摘要(译)

一种有机发光显示装置，包括：基板，包括发光区域和透明区域；晶体管，设置在所述发光区域中并包括栅电极；源电极和漏电极，与所述栅电极重叠；电容器在发光区域中并且与晶体管相邻设置并且包括与第一电容器电极重叠的第一电容器电极和第二电容器电极，以及与栅电极，源电极或漏电极部分重叠的多个光阻挡图案并且，作为层设置在不同的层上，设置栅电极，源电极或漏电极。

