

(12) **Patent Application Publication**  
**KIM**

(43) **Pub. Date:** **Jul. 2, 2015**

(52) **U.S. Cl.**  
CPC ..... *H01L 27/323* (2013.01); *H01L 27/3272*  
(2013.01)

Dec. 31, 2013 (KR) ..... 10-2013-0169359

(51) **Int. Cl.**  
**H01L 27/32** (2006.01)

An organic light-emitting diode (OLED) display is disclosed. In one aspect, the OLED display includes a display substrate including first and second surfaces opposing each other. The OLED display further includes a touch sensing layer formed over the encapsulation substrate and configured to sense a touch input, a display flexible printed circuit board electrically attached to the second surface of the display substrate, and a touch flexible printed circuit board electrically connected to the touch sensing layer and attached to the second surface of the display substrate. An impact absorbing layer is formed over the second surface of the display substrate and attaches the display flexible printed circuit board and the touch flexible printed circuit board to the second surface of the display substrate. The impact absorbing layer includes a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

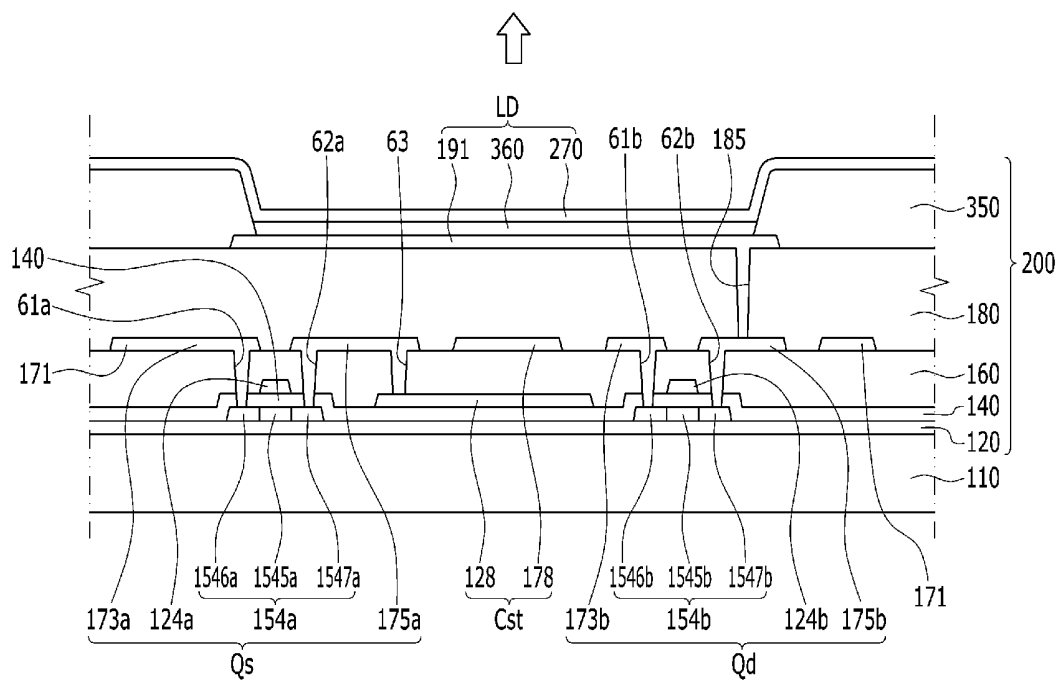




FIG. 2

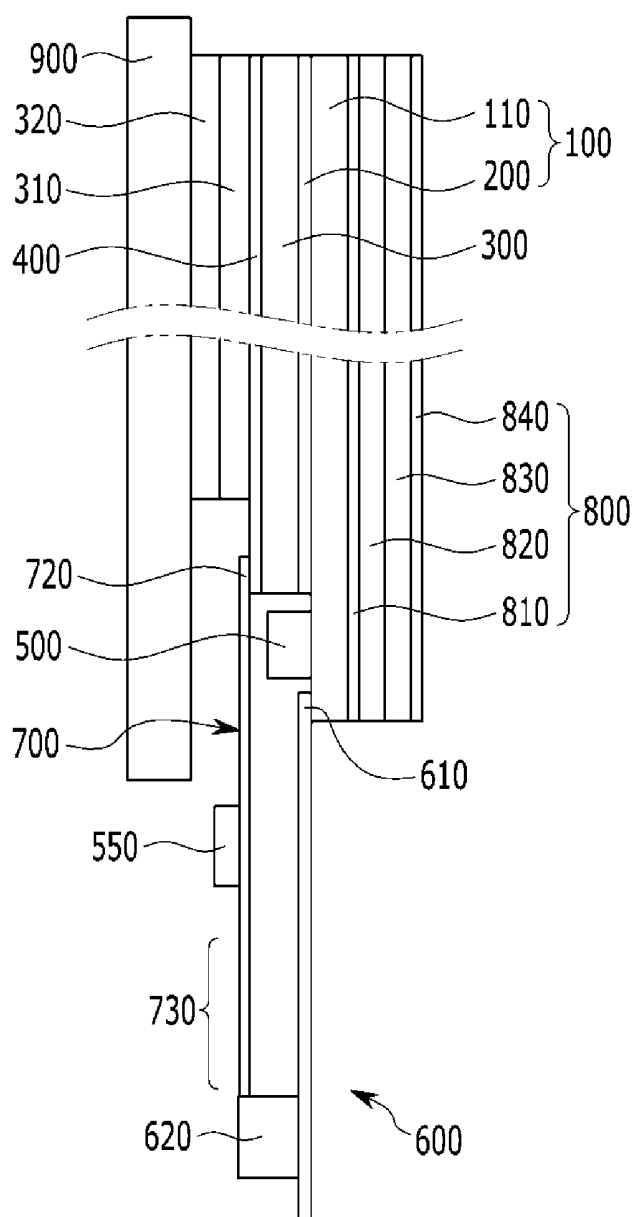


FIG. 3

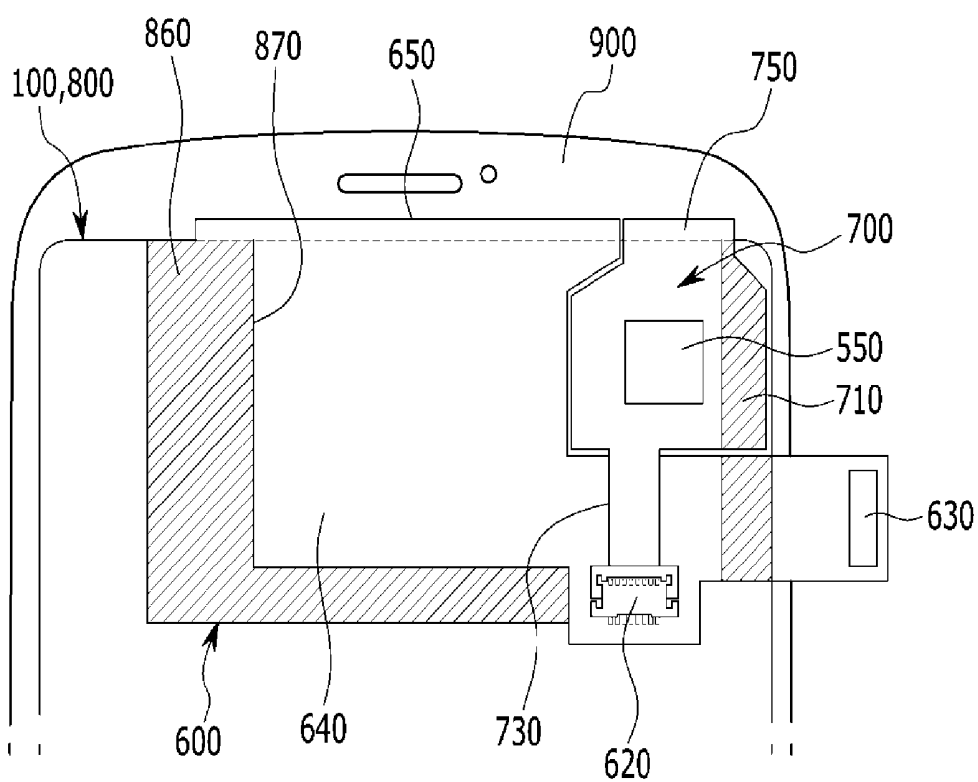




FIG. 5

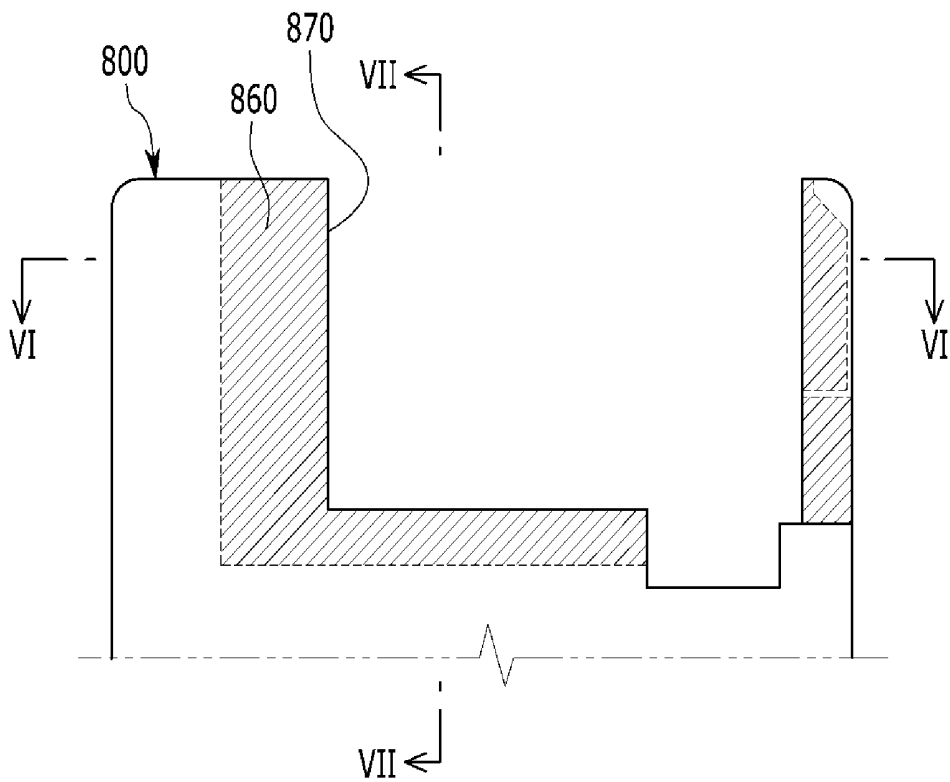


FIG. 6

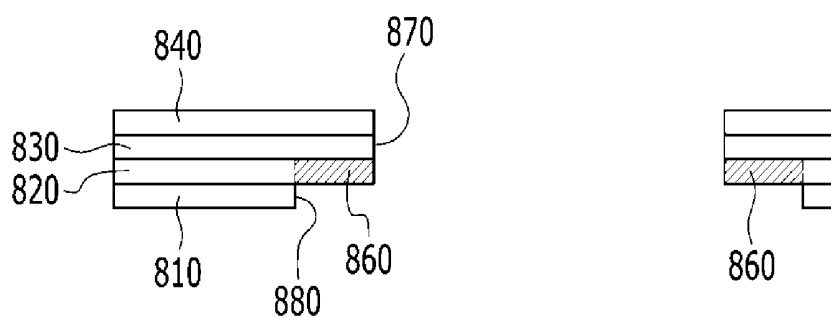


FIG. 7

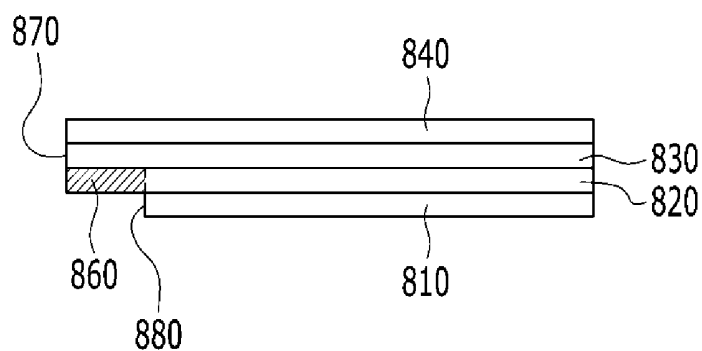


FIG. 8

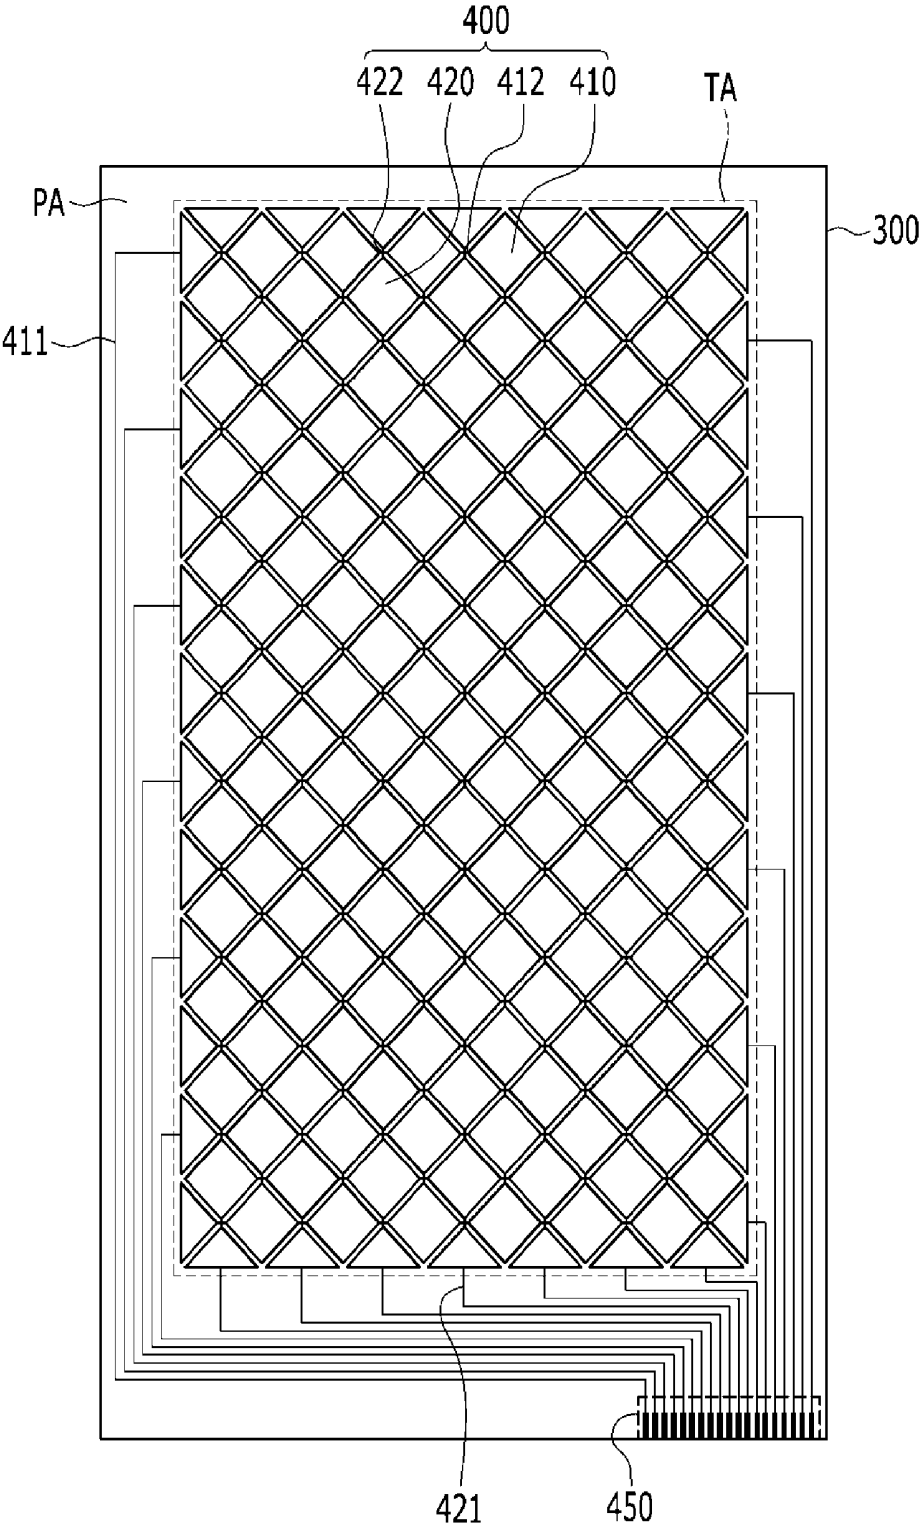


FIG. 9

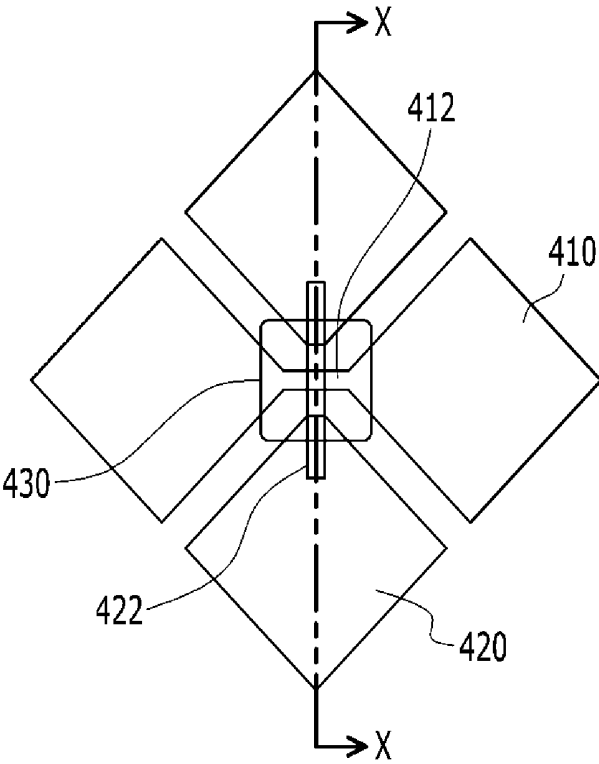
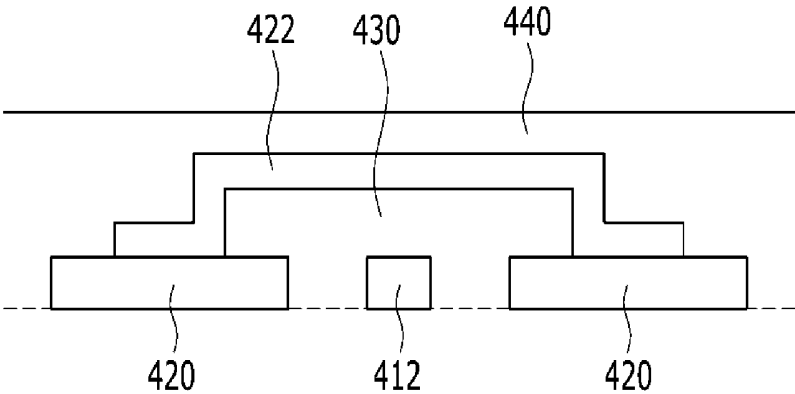


FIG. 10



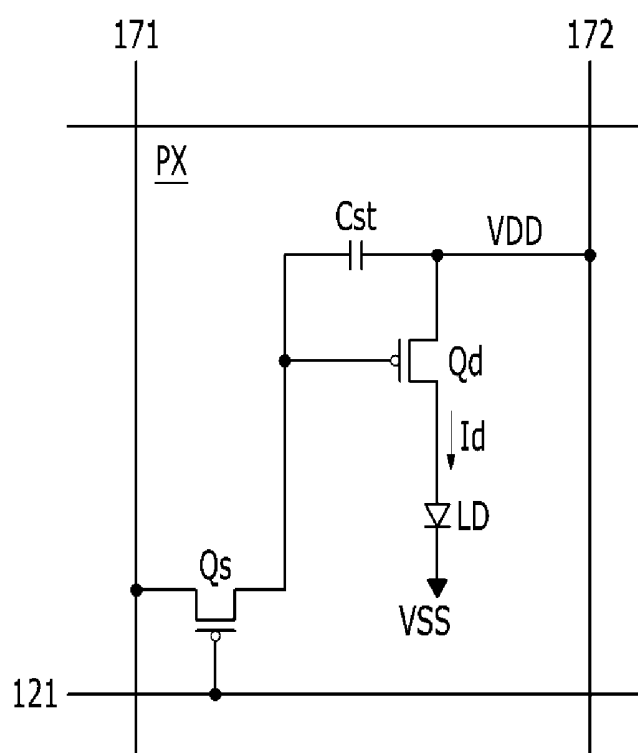


FIG. 12


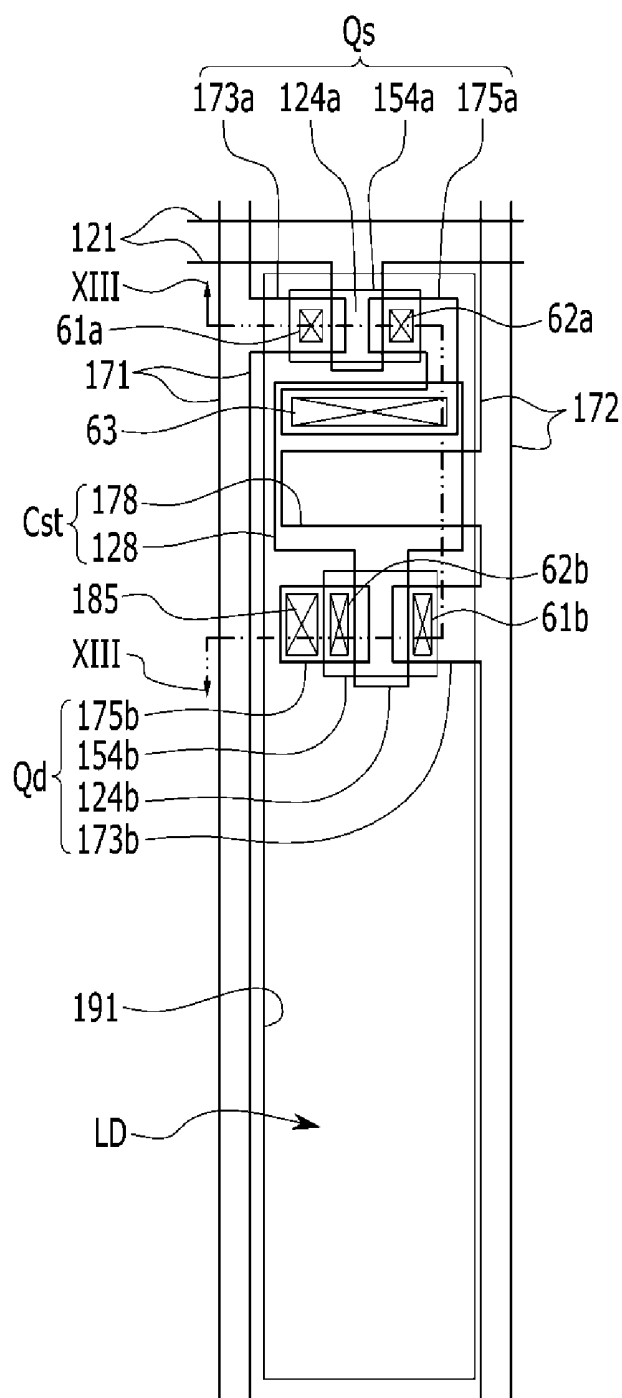


FIG. 13

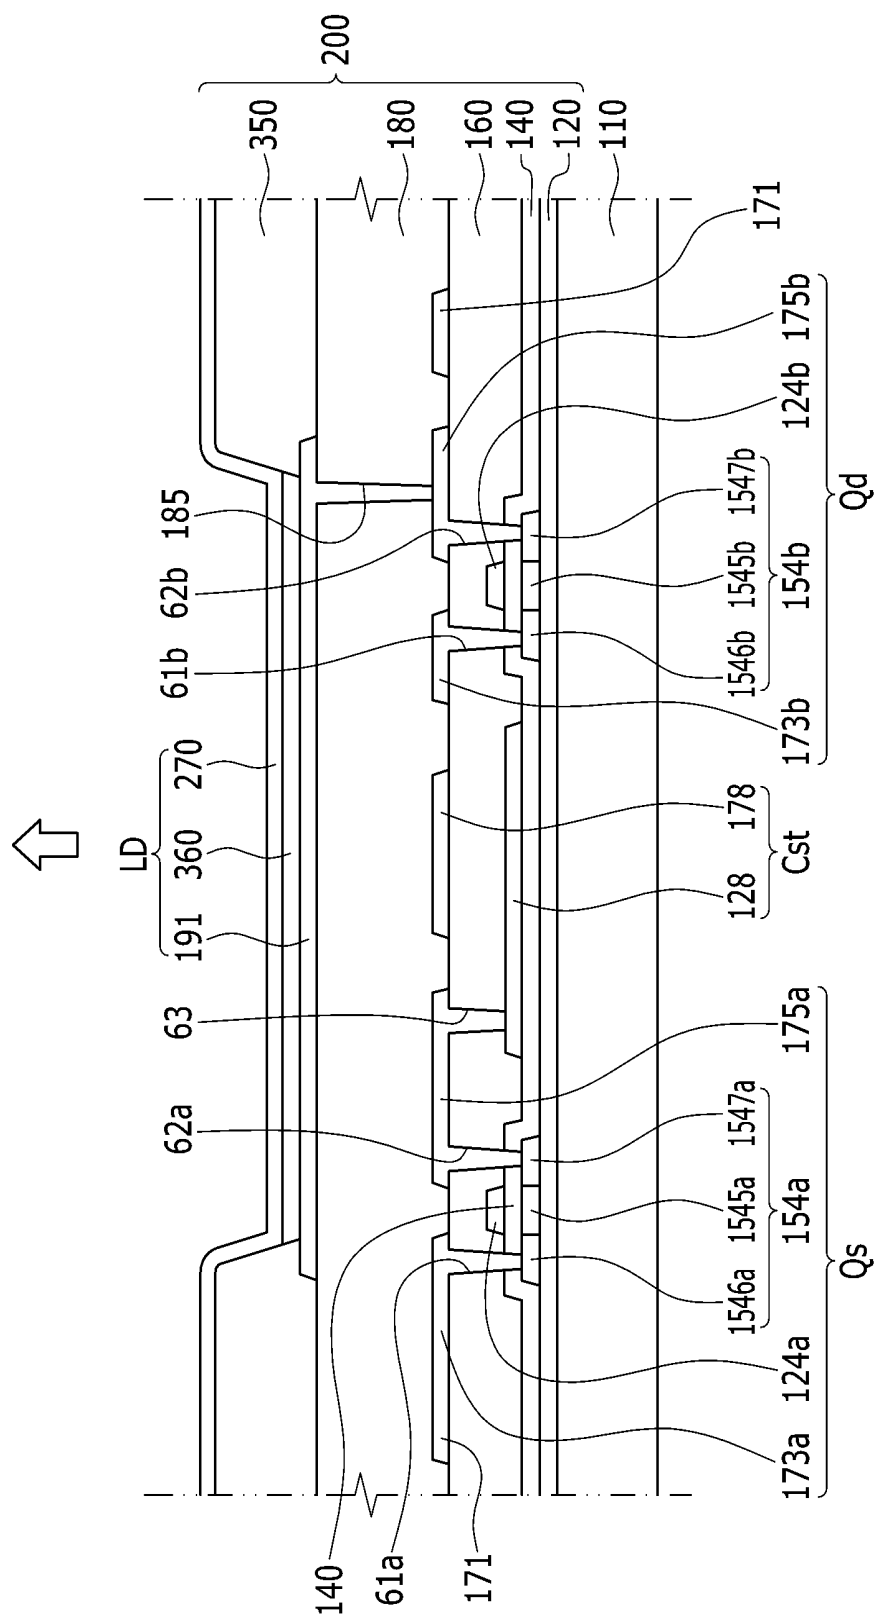

## ORGANIC LIGHT-EMITTING DIODE (OLED) DISPLAY

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2013-0169359 filed in the Korean Intellectual Property Office on Dec. 31, 2013, the entire contents of which are incorporated herein by reference.

### BACKGROUND

[0002] 1. Field

[0003] The described technology generally relates to an organic light-emitting diode (OLED) display, and more particularly, to an OLED display including a touch sensing layer.

[0004] 2. Description of the Related Technology

[0005] Flat panel displays, such as organic light-emitting diode (OLED) displays, liquid crystal displays (LCDs), and electrophoretic display (EPDs), include a field generating electrode and an electro-optical active layer. For example, OLED displays include an organic emission layer as the electro-optical active layer and EPDs include charged particles. The field generating electrode is connected to a switching element such as a thin film transistor (TFT) to receive a data signal and the electro-optical active layer converts the data signal to an optical signal to display an image.

[0006] Recently, many such displays have included a touch sensing function in which interaction with a user can be performed, in addition to the base functionality of displaying images. The touch sensing function is used to generate touch information such as whether an object touches a screen and the touch location thereof by sensing a change in pressure, charge, light, or the like applied to the screen of the display when a user touches a finger or a touch pen to the screen. The display can receive new image signals based on the touch information. In addition, an impact absorbing layer can be attached to the display device to absorb external impacts.

[0007] The above information disclosed in this Background section is only intended to facilitate the understanding of the background of the described technology and therefore it may contain information that does not constitute the prior art that is already known in this country to a person of ordinary skill in the art.

### SUMMARY OF CERTAIN INVENTIVE ASPECTS

[0008] One inventive aspect is an organic light-emitting diode (OLED) display including a touch sensing layer and having the advantage of shielding an impact absorbing layer from electro-magnetic interference.

[0009] Another aspect is an OLED display including a display substrate having first and second surfaces opposing each other, a thin film display layer formed over the first surface of the display substrate, an encapsulation substrate formed over the thin film display layer, a touch sensing layer formed over the encapsulation substrate and configured to sense a touch input, a display flexible printed circuit board electrically connected to the thin film display layer and attached to at least the second surface of the display substrate, a touch flexible printed circuit board electrically connected to the touch sensing layer and attached to the second surface of the display substrate, and an impact absorbing layer formed over the second surface of the display substrate and attaching the display flexible printed circuit board and the touch flexible

printed circuit board to the second surface of the display substrate, wherein the impact absorbing layer includes a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

[0010] The impact absorbing layer may further include a first adhesive layer formed over the second surface the display substrate and a cushion layer configured to absorb external impacts.

[0011] The first adhesive layer may be formed between the display substrate and the metal layer and the metal layer may be formed between the first adhesive layer and the cushion layer.

[0012] The impact absorbing layer may further include a first opening partially exposing the display flexible printed circuit board and the touch flexible printed circuit board.

[0013] The first opening may be formed in the metal layer and the cushion layer.

[0014] The impact absorbing layer may further include a second opening exposing the display flexible printed circuit board and the touch flexible printed circuit board.

[0015] The second opening may be formed in the first adhesive layer.

[0016] The area of the first opening may be less than the area of the second opening.

[0017] The impact absorbing layer may further include an overlapped portion that at least partially overlaps the display flexible printed circuit board and the touch flexible printed circuit board.

[0018] The metal layer and the cushion layer may be formed on the display flexible printed circuit board and the touch flexible printed circuit board in the overlapped portion.

[0019] The metal layer may be electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board in the overlapped portion.

[0020] The display flexible printed circuit board and the touch flexible printed circuit board may be bent around an edge of the display substrate.

[0021] The display flexible printed circuit board and the touch flexible printed circuit board may be electrically connected to each other.

[0022] The thin film display layer may include a plurality of pixels and each pixel may include an OLED.

[0023] The OLED display may further include a display driver formed on the first surface of the display substrate and configured to apply a driving signal to each pixel and a touch driver formed on the touch flexible printed circuit board and configured to receive a sense output signal from the touch sensing layer.

[0024] Another aspect is an OLED display including a display substrate having first and second surfaces opposing each other, a thin film display layer formed over the first surface of the display substrate, an encapsulation substrate formed over the thin film display layer, a touch sensing layer formed over the encapsulation substrate and configured to sense a touch input, a display flexible printed circuit board electrically connected to the thin film display layer and attached to at least the second surface of the display substrate, a touch flexible printed circuit board electrically connected to the touch sensing layer and attached to the second surface of the display substrate, and an impact absorbing layer formed over the second surface of the display substrate and attaching the display flexible printed circuit board and the touch flexible printed circuit board to the second surface of the display

substrate, wherein the impact absorbing layer includes a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

**[0025]** The impact absorbing layer can further include a first adhesive layer formed over the second surface of the display substrate and a cushion layer configured to absorb external impacts. The first adhesive layer can be interposed between the display substrate and the metal layer and the metal layer can be interposed between the first adhesive layer and the cushion layer. A first opening can be formed in the impact absorbing layer and at least partially expose the display flexible printed circuit board and the touch flexible printed circuit board. The first opening can be formed in the metal layer and the cushion layer. A second opening can be further formed in the impact absorbing layer and expose the display flexible printed circuit board and the touch flexible printed circuit board. The second opening can be formed in the first adhesive layer. The area of the first opening can be less than the area of the second opening. The impact absorbing layer can further include an overlapped portion that at least partially overlaps the display flexible printed circuit board and the touch flexible printed circuit board.

**[0026]** The metal layer and the cushion layer can be formed on the display flexible printed circuit board and the touch flexible printed circuit board in the overlapped portion. The metal layer can be formed at least in the overlapped portion. The display flexible printed circuit board and the touch flexible printed circuit board can be bent around an edge of the display substrate. The display flexible printed circuit board and the touch flexible printed circuit board can be electrically connected to each other. The thin film display layer can include a plurality of pixels and wherein each pixel can include an OLED. The OLED display can further include a display driver formed on the first surface of the display substrate and configured to apply a driving signal to each pixel and a touch driver formed on the touch flexible printed circuit board and configured to receive a sense output signal from the touch sensing layer. The touch flexible printed circuit board can at least partially overlap the display flexible printed circuit board, wherein each of the display flexible printed circuit board and the touch flexible printed circuit board surrounds at least three surfaces of the display substrate, and wherein the display flexible printed circuit board is attached to the first surface of the display substrate.

**[0027]** Another aspect is an OLED display including a display substrate including first and second surfaces opposing each other, a display flexible printed circuit board attached to at least the second surface of the display substrate, a touch flexible printed circuit board attached to the second surface of the display substrate and at least partially overlapping the display flexible printed circuit board, wherein each of the display flexible printed circuit board and the touch flexible printed circuit board surrounds at least three surfaces of the display substrate, and an impact absorbing layer formed over the second surface of the display substrate and at least a portion of the display flexible printed circuit board and the touch flexible printed circuit board, wherein the impact absorbing layer include a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

**[0028]** Each of the display flexible printed circuit board and the touch flexible printed circuit board can include a ground-line wire electrically connected to the metal layer. The impact

absorbing layer can further include a first adhesive layer interposed between the metal layer and the second surface of the display substrate and a cushion layer formed over the metal layer and configured to absorb external impacts. A first opening can be formed in the metal layer and cushion layer and wherein a second opening having a greater area than the first opening is formed in the first adhesive layer. The OLED display can further include touch sensing layer configured to sense a touch input, wherein the display flexible printed circuit board is attached to the first surface of the display substrate, and wherein the touch flexible printed circuit board is attached to the touch sensing layer.

**[0029]** As described, according to at least one embodiment, the impact absorbing layer includes the metal layer that is electrically connected with a ground line of the display flexible printed circuit board and the touch flexible printed circuit board, thereby shielding electro-magnetic interference.

**[0030]** In addition, since the impact absorbing layer partially overlaps the display flexible printed circuit board and the touch flexible printed circuit board, the display flexible printed circuit board and the touch flexible printed circuit board are fixed, and accordingly the display flexible printed circuit board and the touch flexible printed circuit board can be substantially prevented from being lifted.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0031]** FIG. 1 is a top plan view of the structure of an OLED display before a flexible printed circuit board is bent according to an exemplary embodiment.

**[0032]** FIG. 2 schematically shows the side surface of the OLED display of FIG. 1.

**[0033]** FIG. 3 is a top plan view in which the flexible printed circuit board is bent and attached to the other surface of a display substrate in the OLED display of FIG. 1.

**[0034]** FIG. 4 is a side view schematically illustrating the side surface of the OLED display of FIG. 3.

**[0035]** FIG. 5 is a top plan view of an impact absorbing layer according to an exemplary embodiment.

**[0036]** FIG. 6 is a cross-sectional view of FIG. 5, taken along the line VI-VI.

**[0037]** FIG. 7 is a cross-sectional view of FIG. 5, taken along the line VII-VII.

**[0038]** FIG. 8 is a top plan view of a touch sensing layer of the OLED display of FIG. 1.

**[0039]** FIG. 9 is an enlarged view of a part of the touch sensing layer of FIG. 8.

**[0040]** FIG. 10 is a cross-sectional view of FIG. 9, taken along the line X-X.

**[0041]** FIG. 11 is an equivalent circuit diagram of one pixel of the OLED display of FIG. 1.

**[0042]** FIG. 12 is a layout view of one pixel of the OLED display of FIG. 1.

**[0043]** FIG. 13 is a cross-sectional view of FIG. 12, taken along the line XIII-XIII.

#### DETAILED DESCRIPTION OF CERTAIN INVENTIVE EMBODIMENTS

**[0044]** The described technology will be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the described technology are shown. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the

described technology. On the contrary, exemplary embodiments introduced herein are provided to make disclosed contents thorough and complete, and sufficiently transfer the spirit of the described technology to those skilled in the art.

[0045] In the drawings, the thicknesses of layers, films, panels, regions, etc., may be exaggerated for the sake of clarity. It will be understood that when a layer is referred to as being “on” another layer or substrate, it can be directly on the other layer or substrate or intervening elements may also be present. Like reference numerals designate like elements throughout the specification. The term “substantially” as used in this disclosure means completely, almost completely, or to any significant degree.

[0046] An organic light-emitting diode (OLED) display according to an exemplary embodiment will be described with reference to FIG. 1 to FIG. 13.

[0047] FIG. 1 and FIG. 2 show the structure of an OLED display before a flexible printed circuit board is bent and attached to the rear surface of a lower substrate.

[0048] The OLED display includes a display panel 100, an encapsulation substrate 300, a touch sensing layer 400, a polarization layer 310, a resin layer 320, and a window 900. In addition, the OLED display includes an impact absorbing layer 800. In FIG. 1, the polarization layer 310, the resin layer 320, and the window 900 are omitted for convenience of illustration of a plane view of the OLED display.

[0049] In addition, the OLED display includes a display flexible printed circuit board 600 attached to the display panel 100 and a touch flexible printed circuit board 700 attached to the encapsulation substrate 300.

[0050] As shown in the plane view of FIG. 1, the OLED display includes a display area DA where an image is displayed and a peripheral area PA surrounding the display area DA.

[0051] The display panel 100 includes a display substrate 110 formed of an insulating material such as transparent glass or plastic and a thin film display layer 200 formed on a first side or first surface of the display substrate 110.

[0052] The display substrate 110 can have rounded corners to prevent breakage.

[0053] The thin film display layer 200 includes a plurality of pixels and each pixel includes a switching thin film transistor Qs, a driving thin film transistor Qd, a storage capacitor Cst, and an OLED LD.

[0054] The display panel 100 includes a display driver 500 for applying a driving signal to each pixel of the thin film display layer 200. The display driver 500 is formed in the peripheral area PA on the display substrate 110.

[0055] The encapsulation substrate 300 is formed facing the thin film display layer 200, functions as an encapsulation substrate, and is bonded to the display substrate 110 via a sealant (not shown).

[0056] The touch sensing layer 400 is formed on the outer side of the encapsulation substrate 300, that is, the side of the encapsulation substrate 300 opposing the thin film display layer 200. The touch sensing layer 400 senses touch input. The touch sensing layer 400 can sense touch input when an object approaches or touches the touch sensing layer 400 or the window 900. Here, touch input refers not only to when an external object such as a user's finger directly touches the touch sensing layer 400 or the window 900, but also when the external object approaches or hovers over the touch sensing layer 400 or window 900.

[0057] The polarization layer 310, the resin layer 320, and the window 900 are sequentially formed on the touch sensing layer 400.

[0058] The polarization layer 310 increases the contrast ratio by reducing reflection of external light and the resin layer 320 is an adhesive layer for attaching the window 900 to the OLED display. The window 900 protects the display panel 100 and the touch sensing layer 400.

[0059] The display flexible printed circuit board 600 includes a display terminal 610, a connection portion 620, an input portion 630, and a display main body 640.

[0060] The display terminal 610 is attached to the display substrate 110 and thus connects the flexible printed circuit board 600 to the display driver 500, the connection portion 620 connects the touch flexible printed circuit board 700 to the display flexible printed circuit board 600, and the input portion 630 receives an input signal from an external source. Various circuit elements can be formed on the display main body 640.

[0061] The display flexible printed circuit board 600 receives an input signal through the input portion 630 and applies the received signal to the display driver 500.

[0062] The touch flexible printed circuit board 700 includes a touch main body 710, a touch terminal 720, and a tail portion 730.

[0063] The touch terminal 720 is attached to the encapsulation substrate 300 and connects the touch flexible printed circuit board 700 to the touch sensing layer 400. The tail portion 730 extends from an end of the main body 710 and is connected to the connection portion 620. Accordingly, the touch flexible printed circuit board 700 is connected to the flexible printed circuit board 600 and receives an input signal through the input portion 630.

[0064] A touch driver 550 is mounted to the touch main body 710. The touch driver 550 receives a sense input signal of the touch sensing layer 400 from the external source outside and transmits the received signal to the touch sensing layer 400. In addition, the touch driver 550 receives a sense output signal from the touch sensing layer 400 and process the received signal.

[0065] The impact absorbing layer 800 is formed on the second side or second surface of the display substrate 110, that is, the impact absorbing layer 800 is formed on a surface of the display substrate 110 opposing the thin film display layer 200.

[0066] The impact absorbing layer 800 absorbs external impacts and substantially prevents the display panel 100, the encapsulation substrate 300, and the touch sensing layer 400 from being damaged due to the impacts. The impact absorbing layer 800 also attaches the display panel 100 to other parts, for example, a case or the like. The impact absorbing layer 800 includes a first adhesive layer 810, a metal layer 820, a cushion layer 830, and a second adhesive layer 840 sequentially formed in the described order on the second side of the display substrate 100.

[0067] The first adhesive layer 810 is attached to the second side of the display substrate 110 and attaches the impact absorbing layer 800 to the second side of the display substrate 110.

[0068] The metal layer 820 is electrically connected to a grounding wire of the display flexible printed circuit board 600 and the touch flexible printed circuit board 700 to shield the OLED display from electromagnetic interference (EMI). In addition, since the metal layer 820 has high heat conduc-

tivity, the metal layer **820** enhances heat dissipation by dispersing heat generated by the OLED display.

[0069] The cushion layer **830** can prevent the display panel **100**, the encapsulation substrate **300**, and the touch sensing layer **400** from being damaged by absorbing external impacts.

[0070] The second adhesive layer **840** is attached to other parts, for example a case or the like, and thus attaches the impact absorbing layer **800** to the other parts.

[0071] As shown in FIG. 3 and FIG. 4, in order to apply the OLED display to an actual product, the flexible printed circuit board **600** and the touch flexible printed circuit board **700** are bent around an edge of the display substrate **110** and are thus attached to the lower display substrate **110**.

[0072] Referring to FIG. 3 and FIG. 4, the bending portion **650** of the flexible printed circuit board **600** is bent and surrounds a portion of the edge of the display substrate **110**. The display element **610** of the flexible printed circuit board **600** is attached to the first side of the display substrate **110** and the display main body **640** of the flexible printed circuit board **600** is attached to the second side of the display substrate **110**.

[0073] A bending portion **750** of the touch flexible printed circuit board **700** is bent around the edge of the encapsulation substrate **300**. The touch terminal **720** of the touch flexible printed circuit board **700** is attached to the first side of the display substrate **110** and a corner of the display substrate **110** is not surrounded by the bending portion **650** of the flexible printed circuit board **600**. The touch main body **710** of the touch flexible printed circuit board **700** is also attached to the second side of the display substrate **110**. As shown in FIG. 3, the bending portion **750** and the touch main body **710** of the touch flexible printed circuit board **700** do not overlap the flexible printed circuit board **600** and the tail portion **730** overlaps the flexible printed circuit board **600**.

[0074] The impact absorbing layer **800** includes a first opening **870** partially exposing the flexible printed circuit board **600** and the touching printed circuit board **700** attached to the second side of the display substrate **110**. The first opening **870** exposes the touch driver **550** and the connection portion **620**.

[0075] In addition, the impact absorbing layer **800** includes an overlapped portion **860** that partially overlaps the display flexible printed circuit board **600** and the touch flexible printed circuit board **700**. The impact absorbing layer **800** attached to the second side of the display substrate **110** attaches the displaying printed circuit board **600** and the touch flexible printed circuit board **700** to the second side of the display substrate **110** through the overlapped portion **860**. In the overlapped portion **860**, the impact absorbing layer **800** is formed above the display flexible printed circuit board **600** and the touch flexible printed circuit board **700**.

[0076] That is, since the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** are interposed between the display substrate **110** and the impact absorbing layer **800** in the overlapped portion **860**, the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** can be substantially prevented from being lifted from the second side of the display substrate **110**.

[0077] Now, the impact absorbing layer according to an exemplary embodiment will be described with reference to FIG. 5 to FIG. 7.

[0078] Referring to FIG. 5 to FIG. 7, the impact absorbing layer **800** includes the overlapped portion **860**, the first opening **870**, and a second opening **880**.

[0079] As previously described, the overlapped portion **860** partially overlaps the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** and the first opening **870** partially overlaps the flexible printed circuit board **600** and the touch flexible printed circuit board **700**.

[0080] The first opening **870** is formed in the metal layer **820**, the cushion layer **830**, and the second adhesive layer **840**.

[0081] The second opening **880** is formed in the first adhesive layer **810**. The second opening **880** exposes the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** and the area of the second opening **880** is greater than that of the first opening **870**. Accordingly, the overlapped portion **860** is located in the metal layer **820**, the cushion layer **830**, and the second adhesive layer **840**.

[0082] In the overlapped portion **860**, the metal layer **820**, the cushion layer **830**, and the second adhesive layer **840** are formed over the display flexible printed circuit board **600** and the touch flexible printed circuit board **700**. Thus, the metal layer **820** partially overlaps the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** and is electrically connected thereto in the overlapped portion **860**. In addition, since the metal layer **820**, the cushion layer **830**, and the second adhesive layer **840** fixes the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** in the overlapped portion **860**, the display flexible printed circuit board **600** and the touch flexible printed circuit board **700** can be substantially prevented from being lifted from the second side of the display substrate **110**.

[0083] Next, the touch sensing layer according to an exemplary embodiment will be described in detail with reference to FIG. 8 to FIG. 10.

[0084] Referring to FIG. 8, the touch sensing layer **400** is formed on the encapsulation substrate **300**. The touch sensing layer **400** is formed in a touch active area TA where touch input can be sensed. The touch active area TA may be the entire display area DA or may include a part of the peripheral area PA. Alternatively, only a part of the display area DA may be the touch active area TA.

[0085] The touch sensing layer **400** can sense contact with various methods. For example, contact sensing can be classified into various methods such as resistive, capacitive, electro-magnetic (EM), and optical contact sensing.

[0086] In the embodiment of FIGS. 8-10, capacitive contact sensing will be exemplarily described.

[0087] The touch sensing layer **400** includes a plurality of touch electrodes and the touch electrodes include a plurality of first touch electrodes **410** and a plurality of second touch electrodes **420**. The first and second touch electrodes **410** and **420** are separated from each other.

[0088] The first and second touch electrodes **410** and **420** are alternately distributed so as to not overlap each other in the touch active area TA. The first touch electrodes **410** may be formed in a column direction and a row direction and the second touch electrodes **420** may also be formed in a column direction and a row direction.

[0089] The first and second touch electrodes **410** and **420** the second touch electrodes **420** are formed on the same layer as each other or on different layers from each other, but this is not restrictive. In some embodiments, the first and second touch electrodes **410** and **420** are positioned in different layers. In the FIG. 8 embodiment, each of the first and second touch electrodes **410** and **420** the second touch electrodes **420** forms a quadrangle, but they are not limited thereto, and may

have various forms such as protrusions for improving the sensitivity of the touch sensor.

[0090] At least some of the first touch electrodes **410** arranged in the same row or column are electrically connected to each other or separated from each other either inside or outside the touch active area TA. Likewise, at least some of the second touch electrodes **420** arranged in the same column or row are electrically connected to each other or separated from each other either inside or outside the touch active area TA. For example, as illustrated in FIG. 8, the first touch electrodes **410** formed in the same row are electrically connected to each other inside the touch active area TA and the second touch electrodes **420** formed in the same column are electrically connected to each other inside the touch active area TA. In more detail, the first touch electrodes **410** positioned in each row are electrically connected to each other through first connection portions **412** and the second touch electrodes **420** positioned in each column are electrically connected to each other through second connection portions **422**.

[0091] The first touch electrodes **410** connected to each other in each row are electrically connected to the touch driver **550** through first touch wires **411** and the second touch electrodes **420** connected to each other in each column are electrically connected to the touch driver **550** through second touch wires **421**. The first and second touch wires **411** and **421** are formed in the peripheral area PA in the embodiment of FIG. 8, but in other embodiments are formed in the touch active area TA. End portions of the first and second touch wires **411** and **421** form a pad portion **450** in the peripheral area PA of the encapsulation substrate **300**.

[0092] Referring to FIG. 9 and FIG. 10, the first connection portions **412** connecting the first touch electrodes **410** adjacent to each other are formed on the same layer as the first touch electrodes **410** and can be formed of the same material as the first touch electrodes **410**. That is, the first touch electrodes **410** and the first connection portions **412** are integrated and simultaneously patterned in the embodiment of FIGS. 9 and 10.

[0093] The second connection portions **422** connecting the second touch electrodes **420** adjacent to each other are formed on a different layer from the second touch electrodes **420**. That is, the second touch electrodes **420** and the second connection portions **422** are separated from each other and separately patterned. The second touch electrodes **420** and the second connection portions **422** are electrically connected to each other through direct contact.

[0094] A first insulating layer **430** is formed between the first and second connection portions **412** and **422** electrically insulate them from each other. The first insulating layer **430** is formed as a plurality of independent island-shaped insulators for every intersection between the first and second connection portions **412** and **422**. The first insulating layer **430** exposes at least a portion of the second touch electrodes **420** so that the second connection portions **422** are electrically connected to the second touch electrodes **420**. The first insulating layer **430** has rounded corners and may be formed of SiOx, SiNx, and/or SiOxNy. According to other embodiments, the first insulating layer is formed over the entirety of the first and second touch electrodes **410** and **420**.

[0095] A second insulating layer **440** is formed on the first and second touch electrodes **410** and **420** and the second connection portions **422**. The second insulating layer **440** is

formed throughout the entirety of touch active area TA and may be formed of SiOx, SiNx, and/or SiOxNy.

[0096] In other embodiments and in contrast to the embodiment of FIGS. 8-10, the second connection portions **422** connecting the second touch electrodes **420** adjacent to each other are formed on the same layer as the first touch electrodes **410** and integrated with the first touch electrodes **410**. In these embodiments, the first connection portions **412** connecting the first touch electrodes **410** adjacent to each other are formed on a different layer from the first touch electrodes **410**.

[0097] The first and second touch electrodes **410** and **420** can have a predetermined transmittance or greater so that light from the thin film display layer **200** is transmitted therethrough. For example, the first and second touch electrodes **410** and **420** may be formed of a transparent conductive material, such as indium tin oxide (ITO) or indium zinc oxide (IZO), a thin metal layer such as a silver nanowire (AgNW), a metal mesh, or carbon nanotubes (CNT), but are not limited thereto. The materials of the first and second connection portions **412** and **422** are the same as the materials of the touch electrodes.

[0098] The first and second touch wires **411** and **421** may include a transparent conductive material such as that forming the first and second touch electrodes **410** and **420** or a low resistive material such as molybdenum (Mo), silver (Ag), titanium (Ti), copper (Cu), aluminum (Al), or molybdenum/aluminum/molybdenum (Mo/Al/Mo).

[0099] The first and second touch electrodes **410** and **420** that are adjacent to each other form a mutual sensing capacitor functioning as the touch sensor. The mutual sensing capacitor receives a sensing input signal through one of the first and second touch electrodes **410** and **420** and outputs a change in stored charge due to contact of the external object through the other touch electrode as the sensing output signal.

[0100] In other embodiments, the first touch electrodes **410** and the second touch electrodes **420** are separated from each other and are electrically connected to a touch sensor controller through each touch wire (not illustrated). In these embodiments, each touch electrode forms a self-sensing capacitor to function as the touch sensor. The self-sensing capacitor receives the sensing input signal to store a predetermined charge and outputs a sensing output signal that is different from the sensing input signal due to a change in the stored charge generated when the external object such as a finger makes contact with the window **900**.

[0101] Now, the thin film display layer according to an exemplary embodiment will be described with reference to FIG. 11 to FIG. 13. As previously described, the thin film display layer **200** includes a plurality of pixels.

[0102] FIG. 11 is an equivalent circuit diagram of one pixel of the OLED display of FIG. 1.

[0103] Referring to FIG. 11, the OLED display includes a plurality of signal lines **121**, **171**, and **172** and a plurality of pixels PX connected to the signal lines **121**, **171**, and **172** and substantially arranged in a matrix.

[0104] The signal lines include a plurality of gate lines **121** transmitting gate signals (or scan signals), a plurality of data lines **171** transmitting data signals, and a plurality of driving voltage lines **172** transmitting a driving voltage ELVDD. The display driver **500** respectively applies the gate and data signals to the gate and data lines **121** and **171**.

[0105] The gate lines **121** extend in a row direction and are substantially parallel to each other and the data lines **171** and

the driving voltage lines **172** extend in a column direction and are substantially parallel to each other.

[0106] Each pixel PX includes a switching thin film transistor Qs, a driving thin film transistor Qd, a storage capacitor Cst, and an OLED LD.

[0107] The switching thin film transistor Qs includes a control terminal, an input terminal, and an output terminal. The control terminal is connected to the gate line **121**, the input terminal is connected to the data line **171**, and the output terminal is connected to the driving thin film transistor Qd. The switching thin film transistor Qs transmits a data signal applied to the data line **171** to the driving thin film transistor Qd in response to a gate signal applied to the gate line **121**.

[0108] The driving thin film transistor Qd includes a control terminal, an input terminal, and an output terminal. The control terminal is connected to the switching thin film transistor T1, the input terminal is connected to the driving voltage line **172**, and the output terminal is connected to the OLED LD. The driving thin film transistor Qd outputs an output current Id with a magnitude that varies according to the voltage applied between the control terminal and the output terminal of the driving thin film transistor Qd.

[0109] The storage capacitor Cst is connected between the control terminal and the input terminal of the driving thin film transistor Qd. The storage capacitor Cst is charged with a data signal applied to the control terminal of the driving thin film transistor Qd and maintains the data signal after the switching thin film transistor Qs is turned off.

[0110] The OLED LD includes an anode connected to the output terminal of the driving thin film transistor Qd and a cathode connected to a common voltage VSS. The OLED LD emits light with an intensity that varies according to the output current Id of the driving thin film transistor Qd to display an image.

[0111] The switching thin film transistor Qs and the driving thin film transistor Qd may be n-channel electric field effect transistors (FETs) or p-channel electric field effect transistors. In addition, the connection relationship of the switching and driving thin film transistors Qs and Qd, the storage capacitor Cst, and the OLED LD can be changed.

[0112] FIG. 12 is a layout view of one pixel of the OLED display of FIG. 1. FIG. 13 is a cross-sectional view of FIG. 12, taken along the line XIII-XIII.

[0113] Referring to FIG. 12 and FIG. 13, the thin film display layer **200** is formed on the display substrate **110** in the OLED display.

[0114] The thin film display layer **200** includes a buffer layer **120**, a switching semiconductor **154a**, a driving semiconductor layer **154b**, a gate insulating layer **140**, gate lines **121**, a first storage capacitor plate **128**, an interlayer insulating layer **160**, data lines **171**, driving voltage lines **172**, a switching drain electrode **175a**, a driving drain electrode **175b**, and a passivation layer **180**.

[0115] The buffer layer **120** is formed on the display substrate **110** and can be formed as a single layer of a silicon nitride (SiNx) or as a dual-layer structure in which a silicon nitride (SiNx) and a silicon oxide (SiOx) are laminated. The buffer layer **120** serves to planarize the surface of the display substrate **110** while preventing unnecessary contaminants such as impurities or moisture from permeating therethrough.

[0116] The switching semiconductor layer **154a** and the driving semiconductor layer **154b** are formed at a distance from each other on the buffer layer **120**. The switching semiconductor layer **154a** and the driving semiconductor layer

**154b** are formed of polysilicon and include channel regions **1545a** and **1545b**, source regions **1546a** and **1546b**, and drain regions **1547a** and **1547b**. The source regions **1546a** and **1546b** and the drain regions **1547a** and **1547b** are respectively formed on opposing sides of the channel regions **1545a** and **1545b**.

[0117] The channel regions **1545a** and **1545b** are formed of polysilicon which is not doped with impurities, that is, intrinsic semiconductors, and the source regions **1546a** and **1546b** and the drain regions **1547a** and **1547b** are formed of polysilicon which is doped with impurities, that is, doped semiconductors.

[0118] The gate insulating layer **140** is formed on the channel regions **1545a** and **1545b** of the switching and driving semiconductor layers **154a** and **154b**. The gate insulating layer **140** may be a single layer or a multilayer including at least one of a silicon nitride and a silicon oxide.

[0119] The gate lines **121** and the first storage capacitor plate **128** are formed on the gate insulating layer **140**.

[0120] The gate line **121** extends in a substantially horizontal direction and transmit a gate signal. The gate line **121** includes a switching gate electrode **124a** protruding toward the switching semiconductor layer **154a** from the gate line **121**.

[0121] The first storage capacitor plate **128** includes a driving gate electrode **124b** protruding toward the driving semiconductor layer **154b** from the first storage capacitor plate **128**. The switching gate electrode **124a** and the driving gate electrode **124b** respectively overlap the channel regions **1545a** and **1545b**.

[0122] The interlayer insulating layer **160** is formed on the gate line **121**, the first storage capacitor plate **128**, and the gate insulating layer **140**.

[0123] A switching source contact hole **61a** and a switching drain contact hole **62a** that respectively expose the source region **1546a** and the drain area **1547a** of the switching semiconductor layer **154a** are formed in the interlayer insulating layer **160**. In addition, a driving source contact hole **61b** and a driving drain contact hole **62b** that respectively expose the source region **1546b** and the drain region **1547b** of the driving semiconductor layer **154b** are formed in the interlayer insulating layer **160**.

[0124] The data lines **171**, the driving voltage lines **172**, the switching drain electrode **175a**, and the driving drain electrode **175b** are formed on the interlayer insulating layer **160**.

[0125] The data line **171** transmits a data signal and extends in a direction crossing the gate lines **121**. The data line **171** includes a switching source electrode **173a** protruding toward the semiconductor **154a** from the data line **171**.

[0126] The driving voltage line **172** transmits a driving voltage, is separated from the data line **171**, and extends in substantially the same direction as the data line **171**. The driving voltage line **172** includes a driving source electrode **173b** protruding toward the driving semiconductor layer **154b** from the driving voltage line **172** and a second storage capacitor plate **178** protruding from the driving voltage line **172** and overlapping the first storage capacitor plate **128**. Here, the first storage capacitor plate **128** and the second storage capacitor plate **178** form the storage capacitor Cst using the interlayer insulating layer **160** as a dielectric material.

[0127] The switching drain electrode **175a** faces the switching source electrode **173a** and the driving drain electrode **175b** faces the driving source electrode **173b**.

[0128] The switching source electrode **173a** and the switching drain electrode **175a** are respectively connected with the source region **1546a** and the drain region **1547a** of the switching semiconductor layer **154a** through the switching source contact hole **61a** and the switching drain contact hole **62a**. In addition, the switching drain electrode **175a** extends and is thus electrically connected to the first storage capacitor plate **128** and the driving gate electrode **124b** through a first contact hole **63** formed in the interlayer insulating layer **160**.

[0129] The driving source electrode **173b** and the driving drain electrode **175b** are respectively connected to the source region **1546b** and the drain region **1547b** of the driving semiconductor layer **154b** through the driving source contact hole **61b** and the driving drain contact hole **62b**.

[0130] The switching semiconductor layer **154a**, the switching gate electrode **124a**, the switching source electrode **173a**, and the switching drain electrode **175a** form the switching thin film transistor Qs. Similarly, the driving semiconductor layer **154b**, the driving gate electrode **124b**, the driving source electrode **173b**, and the driving drain electrode **175b** form the driving thin film transistor Qd.

[0131] The passivation layer **180** is formed on the data lines **171**, the driving voltage lines **172**, the switching drain electrode **175a**, and the driving drain electrode **175b**.

[0132] A second contact hole **185** exposing the driving drain electrode **175b** is formed in the passivation layer **180**.

[0133] The OLED LD and a pixel defining layer **350** are formed on the passivation layer **180**.

[0134] The OLED LD includes a pixel electrode **191**, an organic emission layer **360**, and a common electrode **270**.

[0135] The pixel electrode **191** is formed on the passivation layer **180** and is electrically connected to the driving drain electrode **175b** of the driving thin film transistor Qd through the second contact hole **185** formed in the interlayer insulating layer **160**. The pixel electrode **191** is the anode of the OLED LD.

[0136] The pixel electrode **191** may be formed of a transparent conductive material such as indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), or indium oxide (In<sub>2</sub>O<sub>3</sub>), or a reflective metal such as lithium (Li), calcium (Ca), lithium fluoride/calcium (LiF/Ca), lithium fluoride/aluminum (LiF/Al), aluminum (Al), silver (Ag), magnesium (Mg), or gold (Au).

[0137] The pixel defining layer **350** is formed on an edge portion of the pixel electrode **191** and on the passivation layer **180**.

[0138] The pixel defining layer **350** includes an opening exposing the pixel electrode **191**. The pixel defining layer **350** may be formed of a resin such as a polyacrylate or a polyimide.

[0139] The organic emission layer **360** is formed on the pixel electrode **191** in the opening of the pixel defining layer **350**. The organic emission layer **360** is formed of multilayers including one or more of a light emitting layer, a hole injection layer (HIL), a hole transporting layer (HTL), an electron transporting layer (ETL), and an electron injection layer (EIL). When the organic emission layer **360** includes all the layers, the hole injection layer (HIL) is formed on a pixel electrode which is an anode, and the hole transporting layer (HTL), the light emitting layer, the electron transporting layer (ETL), and the electron injection layer (EIL) are sequentially laminated thereon.

[0140] The organic emission layer **360** may include a red, green, or blue organic emission layer respectively emitting red, green, or blue light. The red, green, and blue organic emission layers are respectively formed in red, green, and blue pixels, thereby implementing a color image.

[0141] Further, the organic emission layer **360** may implement the color image by laminating the red, green, and blue organic emission layers together in each of the red, green, and blue pixels and forming one of red, green, and blue color filters for each pixel. As another example, white organic emission layers emitting white light may be formed in each of the red, green, and blue pixels and one of red, green, and blue color filters may be formed for each pixel, thereby implementing the color image. When implementing the color image by using the white organic emission layer and the color filters, a deposition mask for depositing the red, green, and blue organic emission layers on the respective pixels, that is, the red, green, and blue pixels is not required.

[0142] The white organic emission layer described in another example may be formed by one organic emission layer or can include a configuration formed so as to emit white light by laminating a plurality of organic emission layers. For example, the white organic emission layer may include a configuration which may emit white light by combining at least one yellow organic emission layer and at least one blue organic emission layer, a configuration which may emit white light by combining at least one cyan organic emission layer and at least one red organic emission layer, a configuration which may emit white light by combining at least one magenta organic emission layer and at least one green organic emission layer, and the like.

[0143] The common electrode **270** is formed on the pixel defining layer **350** and the organic emission layer **360**. The common electrode **270** may be formed of a transparent conductive material such as ITO, IZO, ZnO, or In<sub>2</sub>O<sub>3</sub>, or a reflective metal such as lithium (Li), calcium (Ca), lithium fluoride/calcium (LiF/Ca), lithium fluoride/aluminum (LiF/Al), aluminum (Al), silver (Ag), magnesium (Mg), or gold (Au). The common electrode **270** is the cathode of the OLED LD.

[0144] While the inventive technology has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

What is claimed is:

1. An organic light-emitting diode (OLED) display, comprising:

- a display substrate having first and second surfaces opposing each other;
- a thin film display layer formed over the first surface of the display substrate;
- an encapsulation substrate formed over the thin film display layer;
- a touch sensing layer formed over the encapsulation substrate and configured to sense a touch input;
- a display flexible printed circuit board electrically connected to the thin film display layer and attached to at least the second surface of the display substrate;
- a touch flexible printed circuit board electrically connected to the touch sensing layer and attached to the second surface of the display substrate; and

an impact absorbing layer formed over the second surface of the display substrate and attaching i) the display flexible printed circuit board and ii) the touch flexible printed circuit board to the second surface of the display substrate,

wherein the impact absorbing layer comprises a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

2. The OLED display of claim 1, wherein the impact absorbing layer further comprises i) a first adhesive layer formed over the second surface of the display substrate and ii) a cushion layer configured to absorb external impacts.

3. The OLED display of claim 2, wherein the first adhesive layer is interposed between the display substrate and the metal layer and wherein the metal layer is interposed between the first adhesive layer and the cushion layer.

4. The OLED display of claim 3, wherein a first opening is formed in the impact absorbing layer and at least partially exposes the display flexible printed circuit board and the touch flexible printed circuit board.

5. The OLED display of claim 4, wherein the first opening is formed in the metal layer and the cushion layer.

6. The OLED display of claim 5, wherein a second opening is further formed in the impact absorbing layer and exposes the display flexible printed circuit board and the touch flexible printed circuit board.

7. The OLED display of claim 6, wherein the second opening is formed in the first adhesive layer.

8. The OLED display of claim 7, wherein the area of the first opening is less than the area of the second opening.

9. The OLED display of claim 8, wherein the impact absorbing layer further comprises an overlapped portion that at least partially overlaps the display flexible printed circuit board and the touch flexible printed circuit board.

10. The OLED display of claim 9, wherein the metal layer and the cushion layer are formed on the display flexible printed circuit board and the touch flexible printed circuit board in the overlapped portion.

11. The OLED display of claim 10, wherein the metal layer is electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board in the overlapped portion.

12. The OLED display of claim 1, wherein the display flexible printed circuit board and the touch flexible printed circuit board are bent around an edge of the display substrate.

13. The OLED display of claim 12, wherein the display flexible printed circuit board and the touch flexible printed circuit board are electrically connected to each other.

14. The OLED display of claim 1, wherein the thin film display layer comprises a plurality of pixels and wherein each pixel comprises an OLED.

15. The OLED display of claim 14, further comprising:

a display driver formed on the first surface of the display substrate and configured to apply a driving signal to each pixel; and

a touch driver formed on the touch flexible printed circuit board and configured to receive a sense output signal from the touch sensing layer.

16. An organic light-emitting diode (OLED) display, comprising:

a display substrate including first and second surfaces opposing each other;

a display flexible printed circuit board attached to at least the second surface of the display substrate;

a touch flexible printed circuit board attached to the second surface of the display substrate and at least partially overlapping the display flexible printed circuit board, wherein each of the display flexible printed circuit board and the touch flexible printed circuit board surrounds at least three surfaces of the display substrate; and

an impact absorbing layer formed over i) the second surface of the display substrate and ii) at least a portion of the display flexible printed circuit board and the touch flexible printed circuit board,

wherein the impact absorbing layer comprises a metal layer electrically connected to the display flexible printed circuit board and the touch flexible printed circuit board.

17. The OLED display of claim 16, wherein each of the display flexible printed circuit board and the touch flexible printed circuit board comprises a grounding wire electrically connected to the metal layer.

18. The OLED display of claim 16, wherein the impact absorbing layer further comprises i) a first adhesive layer interposed between the metal layer and the second surface of the display substrate and ii) a cushion layer formed over the metal layer and configured to absorb external impacts.

19. The OLED display of claim 18, wherein a first opening is formed in the metal layer and cushion layer and wherein a second opening having a greater area than the first opening is formed in the first adhesive layer.

20. The OLED display of claim 19, further comprising a touch sensing layer configured to sense a touch input, wherein the display flexible printed circuit board is attached to the first surface of the display substrate, and wherein the touch flexible printed circuit board is attached to the touch sensing layer.

\* \* \* \* \*

|                |                                                                          |         |            |
|----------------|--------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 有机发光二极管 ( OLED ) 显示器                                                     |         |            |
| 公开(公告)号        | <a href="#">US20150187845A1</a>                                          | 公开(公告)日 | 2015-07-02 |
| 申请号            | US14/498738                                                              | 申请日     | 2014-09-26 |
| [标]申请(专利权)人(译) | 三星显示有限公司                                                                 |         |            |
| 申请(专利权)人(译)    | 三星DISPLAY CO. , LTD.                                                     |         |            |
| 当前申请(专利权)人(译)  | 三星DISPLAY CO. , LTD.                                                     |         |            |
| [标]发明人         | KIM TAE SIK                                                              |         |            |
| 发明人            | KIM, TAE SIK                                                             |         |            |
| IPC分类号         | H01L27/32                                                                |         |            |
| CPC分类号         | H01L27/3272 H01L27/323 H01L51/5237 H05K1/189 H05K2201/053 H05K2201/10128 |         |            |
| 优先权            | 1020130169359 2013-12-31 KR                                              |         |            |
| 其他公开文献         | US9490307                                                                |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                          |         |            |

#### 摘要(译)

公开了一种有机发光二极管 ( OLED ) 显示器。在一个方面，OLED显示器包括显示基板，该显示基板包括彼此相对的第一和第二表面。OLED显示器还包括：触摸感测层，形成在封装基板上方并且被配置为感测触摸输入；显示器柔性印刷电路板，电连接到显示基板的第二表面；以及触摸柔性印刷电路板，电连接到显示基板的第二表面。触摸传感层并附着在显示基板的第二表面上。在显示基板的第二表面上形成冲击吸收层，并将显示器柔性印刷电路板和触摸柔性印刷电路板附接到显示基板的第二表面。冲击吸收层包括电连接到显示器柔性印刷电路板和触摸柔性印刷电路板的金属层。

